

# RecipeNet: A Hierarchical Transformer for Recipe Data

Pin-Yen Huang  
Arizona State University  
Tempe, Arizona, USA  
pyhuang@asu.edu

Sachin Chhabra  
Arizona State University  
Tempe, Arizona, USA  
sachin.chhabra@asu.edu

Prasanth Sai Gouripeddi  
Arizona State University  
Tempe, Arizona, USA  
pgouripe@asu.edu

Abhinav Kumar  
Applied Materials  
Santa Clara, California, USA  
abhinav\_kumar@amat.com

Baoxin Li  
University of Illinois Chicago  
Chicago, Illinois, USA  
baoxinli@uic.edu

## Abstract

Recipe data arises in domains such as materials synthesis, pharmaceutical formulation, and industrial manufacturing, where procedures are represented as ordered sequences of steps containing heterogeneous structured fields. Existing tabular learning methods typically flatten this structure into fixed-schema representations, limiting their ability to capture hierarchical field interactions and procedural dependencies. We propose *RecipeNet*, a hierarchical Transformer architecture that encodes field-level interactions within each step and sequential dependencies across steps through stacked Transformer encoders. Experiments on multiple recipe datasets and tasks demonstrate that RecipeNet consistently outperforms existing tabular models, highlighting the value of hierarchical and sequential modeling for recipe representation learning.

## CCS Concepts

• **Computing methodologies** → **Neural networks**; *Learning latent representations*; Machine learning.

## Keywords

tabular data, recipe data, tabular learning, neural networks, representation learning, sequential data, deep learning

## ACM Reference Format:

Pin-Yen Huang, Sachin Chhabra, Prasanth Sai Gouripeddi, Abhinav Kumar, and Baoxin Li. 2026. RecipeNet: A Hierarchical Transformer for Recipe Data. In *Proceedings of the 35th ACM International Conference on Information and Knowledge Management (CIKM '26)*, November 07–11, 2026, Rome, Italy. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/3799682.3839874>

## 1 Introduction

Recipe data is a specialized form of tabular data that describes sequential procedures for producing a desired outcome. For example, in industrial manufacturing, recipes specify the sequence of operations, materials, and conditions required to produce a target product [4, 24]. Recipe data is also widely used across various domains, including cooking [17, 29], material synthesis [27], pharmaceutical formulation [8] and semiconductor manufacturing [6, 7].

**Table 1: Example of a manufacturing recipe sample.**

| Attribute   | Step 1: Mixing | Step 2: Heating | Step 3: Cooling |
|-------------|----------------|-----------------|-----------------|
| Temperature | 25°C           | 80°C            | 30°C            |
| Pressure    | –              | 2.5 bar         | 1.0 bar         |
| Duration    | 5 min          | 20 min          | 10 min          |
| Material A  | 20 g           | –               | –               |
| Material B  | 10 g           | –               | –               |

Despite differences across domains, these recipes share a common structure: each consists of heterogeneous fields organized into sequential procedural steps [3, 8, 27]. An example of a manufacturing recipe is illustrated in Table 1.

Due to the varying field sets and numbers of procedural steps across recipes, existing tabular learning methods cannot be directly applied to recipe data. To use these methods, recipe data must first be converted into fixed-schema tabular representations through flattening and padding of the native recipe structure. These pre-processing steps often result in sparse representations and the loss of important structural relationships among fields and procedural steps [1, 11]. More fundamentally, recipe data differs substantially from conventional tabular data in ways that make it difficult for existing tabular learning methods to model effectively [10, 28]. Specifically, recipe data presents three major challenges:

- (1) **Variable schema.** Recipes contain varying field sets and numbers of procedural steps, whereas most tabular learning methods assume a fixed set of features across all samples.
- (2) **Hierarchical structure.** Recipes are naturally organized as procedural steps containing multiple fields. Effective modeling therefore requires capturing both intra-step field interactions and inter-step relationships, while conventional tabular methods typically operate on flat feature vectors.
- (3) **Sequential dependencies.** The order of procedural steps strongly influences the final outcome. However, many tabular learning methods are not designed to model sequential dependencies and generally treat feature ordering as irrelevant.

To address these limitations, we propose RecipeNet, a hierarchical Transformer architecture for recipe data that preserves the native structure of procedural recipes. RecipeNet encodes heterogeneous field information within each procedural step and captures dependencies across steps through a second Transformer encoder. This design naturally accommodates variable recipe schemas while



This work is licensed under a Creative Commons Attribution 4.0 International License. *CIKM '26, Rome, Italy*

© 2026 Copyright held by the owner/author(s).  
ACM ISBN 979-8-4007-2539-5/2026/11  
<https://doi.org/10.1145/3799682.3839874>

modeling both local field interactions and global procedural context. Experimental results show that RecipeNet consistently outperforms existing tabular learning methods across multiple recipe datasets and downstream prediction tasks, highlighting the effectiveness of hierarchical recipe modeling. The code is available at <https://github.com/pm25/recipe.net>.

## 2 Related Work

### 2.1 Fixed-Schema Tabular Learning

Existing tabular learning methods are typically designed for fixed-schema tabular data, where all samples share the same set of features. Classical machine learning approaches, such as XGBoost [5] and CatBoost [22], achieve strong performance on tabular data by capturing nonlinear relationships and interactions among features. More recently, deep tabular learning methods, such as TabNet [2], TabTransformer [13], FT-Transformer [10], SAINT [23], and NODE [21] have been proposed to learn feature representations from tabular inputs using neural architectures.

However, these methods are primarily designed for data with fixed feature layouts and do not explicitly model the variable schemas, hierarchical structure, and procedural dependencies characteristic of recipe data. Consequently, applying them to recipe datasets often requires flattening and padding to convert recipes into fixed-schema tabular representations, which can obscure the hierarchical and sequential structure inherent in recipe data.

### 2.2 Structure-Aware Representation Learning

Beyond conventional tabular learning, several model architectures have been proposed for modeling unordered sets or sequential data. Set-based architectures, including Deep Sets [30] and Set Transformer [16], learn permutation-invariant representations from unordered inputs. Sequential models such as recurrent neural networks (RNNs) [9], Long Short-Term Memory networks (LSTMs) [12], and Transformers [26] have demonstrated strong performance in modeling temporal and sequential dependencies.

While these approaches effectively model either unordered sets or ordered sequences, recipe data combines both properties: each procedural step contains a variable set of heterogeneous fields, and the steps themselves form an ordered procedure. Existing methods are therefore not specifically designed to jointly model both aspects within a unified hierarchical framework.

## 3 Method

### 3.1 Overview

We propose **RecipeNet**, a hierarchical Transformer architecture for recipe data. Unlike conventional tabular models that require preprocessing recipes into fixed-schema tabular representations, RecipeNet preserves the native hierarchical structure of recipes, where each recipe consists of an ordered sequence of procedural steps and each step contains a variable set of observed fields. RecipeNet consists of three stages: (1) field-level tokenization (Section 3.3), (2) step-level fusion (Section 3.4), and (3) recipe-level sequence encoding (Section 3.5).

The architecture mirrors the hierarchical organization of recipe data. First, field-level tokenization maps heterogeneous numerical

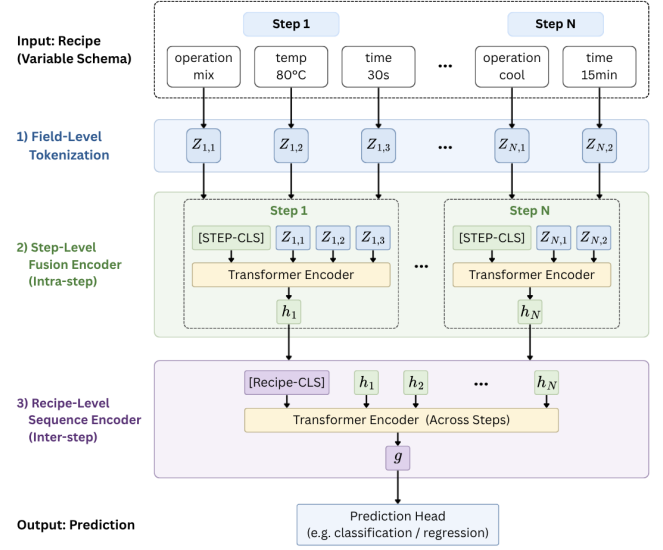


Figure 1: Overview of the proposed RecipeNet architecture.

and categorical fields into a shared embedding space. A step-level Transformer then aggregates field embeddings within each procedural step to generate step representations. Finally, a recipe-level Transformer models dependencies across procedural steps to capture global procedural context and produce a recipe representation. This hierarchical design preserves the native structure of recipe data while naturally supporting variable schemas.

### 3.2 Structured Recipe Representation

A recipe is represented as an ordered sequence of procedural steps:

$$R = \{S_1, S_2, \dots, S_N\}.$$

Each step contains a variable number of observed fields. In RecipeNet, only observed fields are converted into tokens and included in the input sequence, allowing the model to naturally accommodate varying field sets and procedural structures.

### 3.3 Field-Level Tokenization

RecipeNet maps observed field tokens into a shared latent space of dimension  $d$ . Numerical values are projected using a learned linear layer:

$$e^{(num)} = W_{num}x + b_{num},$$

while categorical values are represented using embedding tables:

$$e^{(cat)} = \text{Embedding}_f(c).$$

The resulting value embedding  $e^{(value)}$  is combined with a learned step-position embedding  $e^{(step)}$  and a learned field-identity embedding  $e^{(field)}$  to form the final token representation:

$$z_{r,j} = e_r^{(step)} + e_{r,j}^{(field)} + e_{r,j}^{(value)},$$

where  $r$  denotes the step and  $j$  denotes the field token.

This tokenization scheme represents each field using its value, field identity, and procedural context, enabling RecipeNet to model heterogeneous field types without relying on fixed feature positions.

**Table 2: Performance comparison of tabular learning models across recipe datasets and downstream tasks.**

| Method                  | Solid-state reactions |                        | Sol-gel precursor synthesis |                        | Solution synthesis   |                        |
|-------------------------|-----------------------|------------------------|-----------------------------|------------------------|----------------------|------------------------|
|                         | Next-step Prediction  | Masked-step Prediction | Next-step Prediction        | Masked-step Prediction | Next-step Prediction | Masked-step Prediction |
| XGBoost                 | 0.418±0.001           | 0.974±0.000            | 0.359±0.003                 | 0.911±0.003            | 0.573±0.001          | 0.882±0.001            |
| CatBoost                | 0.394±0.002           | 0.993±0.001            | 0.262±0.003                 | 0.981±0.004            | 0.550±0.001          | 0.980±0.001            |
| TabNet                  | 0.367±0.008           | 0.633±0.004            | 0.363±0.008                 | 0.758±0.016            | 0.501±0.005          | 0.739±0.007            |
| NODE                    | 0.167±0.000           | 0.167±0.000            | 0.167±0.000                 | 0.167±0.000            | 0.167±0.000          | 0.167±0.000            |
| Transformer             | 0.439±0.010           | 0.752±0.033            | 0.331±0.026                 | 0.939±0.011            | 0.546±0.004          | 0.787±0.005            |
| Set Transformer         | 0.173±0.006           | 0.965±0.005            | 0.238±0.001                 | 0.167±0.000            | 0.506±0.001          | 0.986±0.001            |
| FT-Transformer          | 0.401±0.023           | 0.595±0.061            | 0.340±0.002                 | 0.842±0.023            | 0.536±0.004          | 0.771±0.000            |
| TabTransformer          | 0.396±0.003           | 0.682±0.017            | 0.235±0.001                 | 0.911±0.017            | 0.535±0.002          | 0.908±0.019            |
| <b>RecipeNet (Ours)</b> | <b>0.453±0.001</b>    | <b>0.995±0.000</b>     | <b>0.406±0.007</b>          | <b>0.999±0.000</b>     | <b>0.585±0.003</b>   | <b>0.994±0.000</b>     |

### 3.4 Step Fusion Encoder

For each procedural step, RecipeNet applies a Transformer encoder over the observed field tokens within that step. A learnable [STEP-CLS] token is prepended to the sequence:

$$h_n = \text{Transformer}_{\text{step}}([\text{STEP-CLS}], z_{n,1}, \dots, z_{n,m_n})_{[0]},$$

where  $m_n$  denotes the number of observed field tokens in step  $n$ .

This step-level attention mechanism captures interactions among fields that jointly determine the behavior of a process step (e.g., pressure–temperature interactions), enabling RecipeNet to aggregate heterogeneous field into a contextualized step representation.

### 3.5 Recipe-Level Sequence Encoder

The sequence of step embeddings:

$$H = \{h_1, h_2, \dots, h_N\},$$

is processed using a second Transformer encoder operating over procedural steps:

$$g = \text{Transformer}_{\text{recipe}}([\text{RECIPE-CLS}], h_1, \dots, h_N)_{[0]}.$$

The contextualized [RECIPE-CLS] token produces the final recipe representation  $g \in \mathbb{R}^d$ . This recipe-level encoder captures long-range procedural dependencies across steps, enabling RecipeNet to model the overall procedural context of a recipe.

### 3.6 Prediction Head

The final recipe representation is passed to a task-specific prediction head for downstream tasks such as classification or regression:

$$\hat{y} = Wg + b.$$

RecipeNet naturally supports variable numbers of fields and procedural steps, heterogeneous numerical and categorical features, and hierarchical modeling of intra-step interactions and inter-step procedural dependencies. By preserving the hierarchical structure of recipe data, RecipeNet jointly captures local field interactions and global procedural context.

## 4 Experiments

### 4.1 Experimental Setting

**Datasets:** We evaluate our method on three publicly available recipe datasets: the solid-state reaction dataset and the sol-gel precursor synthesis dataset from the Text-Mined Synthesis Project [15], and the solution synthesis dataset [27].

**Downstream Tasks:** Experiments were conducted on two downstream tasks: next-step prediction, and masked-step prediction.

**Evaluation Metrics:** We report balanced accuracy for the tasks.

**Statistical Evaluation:** Each experiment was conducted using the same three random seeds (0, 1, and 2). We report the mean and standard deviation across runs.

**Hyperparameters:** All neural-based methods were trained using the same hyperparameter settings: learning rate  $1 \times 10^{-4}$ , batch size 32, training iterations 51,200, and a cosine learning-rate scheduler [19]. Models were optimized using the AdamW optimizer [18] with cross-entropy loss. Classical machine learning baselines used the default scikit-learn implementations [20].

### 4.2 Analysis on Downstream Tasks

To evaluate the effectiveness of RecipeNet, we compare its performance with existing tabular learning models on three recipe datasets across two downstream tasks: next-step prediction and masked-step prediction. The next-step prediction task aims to predict the type of the subsequent synthesis step given the preceding recipe context, while the masked-step prediction task requires recovering a masked step from the remaining recipe information. The results are summarized in Table 2.

RecipeNet consistently achieves the best performance across all datasets and tasks, outperforming tree-based methods, neural tabular models, and transformer-based architectures. The improvements are particularly evident in next-step prediction, where RecipeNet achieves the highest accuracy across all three synthesis domains. RecipeNet also attains near-perfect performance on masked-step prediction, consistently surpassing strong baselines such as XGBoost, CatBoost, and Set Transformer.

The strong performance of RecipeNet on both tasks suggests that explicitly modeling intra-step field interactions and inter-step

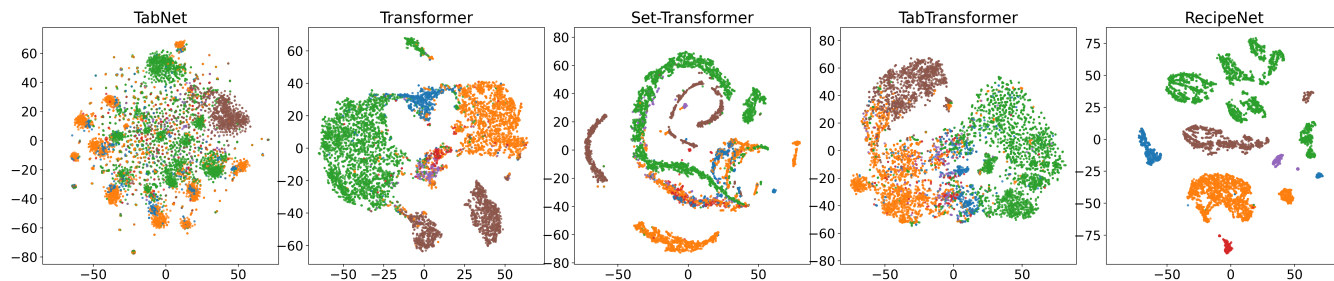


Figure 2: Visualization of learned recipe representations using t-SNE. Different colors correspond to different target classes.

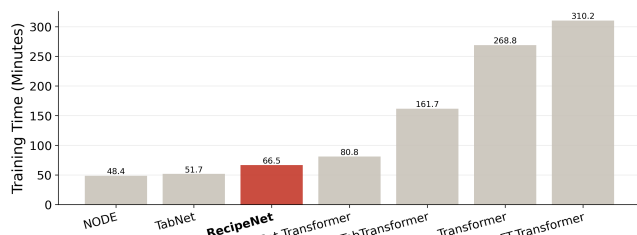


Figure 3: Comparison of total training time between RecipeNet and other neural tabular learning models.

procedural dependencies leads to more informative recipe representations. The consistent improvements across datasets and tasks demonstrate the effectiveness and robustness of the proposed hierarchical architecture for recipe data.

### 4.3 Speed Analysis

To evaluate the computational efficiency of RecipeNet, we compare its training time with other neural models on the Solid-state Reactions dataset. The reported times are averaged across multiple runs. As shown in Figure 3, RecipeNet achieves the lowest training time among all transformer-based models. We attribute this efficiency to its hierarchical architecture and support for variable field tokens, which avoid unnecessary computation on missing recipe fields while compactly encoding the hierarchical structure of recipe data. As a result, RecipeNet reduces the computational overhead typically associated with transformer-based models.

Notably, RecipeNet reduces training time by approximately 18% compared with the fastest competing transformer-based baseline while simultaneously achieving superior predictive performance. Some non-transformer models (NODE and TabNet) train faster, due to the simplicity of the model structure however they generally achieve lower predictive performance on the downstream tasks. These results suggest that RecipeNet achieves a favorable balance between computational efficiency and predictive accuracy, making it a practical approach for recipe data.

### 4.4 Ablation Study

To evaluate the contribution of each component in RecipeNet, we perform an ablation study by removing individual components and evaluating performance on the Sol-gel precursor synthesis dataset.

Table 3: Ablation study evaluating the contribution of each component in RecipeNet.

| Component              | Next-step Prediction | Masked-step Prediction |
|------------------------|----------------------|------------------------|
| RecipeNet (full model) | <b>0.406</b>         | <b>0.999</b>           |
| w/o Hierarchy          | 0.398                | 0.995                  |
| w/o Step Encoder       | 0.334                | 0.973                  |
| w/o Recipe Encoder     | 0.351                | 0.994                  |
| w/o Step Embedding     | 0.369                | 0.997                  |
| w/o Field Embedding    | 0.391                | 0.994                  |

The results are summarized in Table 3. The full model achieves the best performance on both next-step and masked-step prediction tasks, indicating that each component contributes to the overall effectiveness of RecipeNet.

The largest performance degradation is observed when removing the step encoder, followed by the recipe encoder. This suggests that modeling interactions among fields within a procedural step and dependencies across steps are both critical for recipe representation learning. Removing step-position embeddings or field-identity embeddings also reduces performance, demonstrating the importance of preserving procedural order and field-level semantic information. Finally, replacing the hierarchical architecture with a flattened representation leads to a performance drop, highlighting the benefit of explicitly modeling recipe data as a hierarchy of fields and procedural steps. The ablation results show that both the hierarchical structure and sequential modeling components contribute substantially to the performance of RecipeNet.

### 4.5 Feature Visualization

To better understand the representations learned by RecipeNet, we visualize recipe embeddings from the Sol-gel precursor synthesis dataset using t-SNE [25]. Figure 2 shows the projected embeddings, where each color denotes a target class. Compared with other baselines, RecipeNet produces more compact and well-separated clusters with reduced overlap between classes. In contrast, the baseline models exhibit greater inter-class mixing and more dispersed class distributions. The clear separation of target classes suggests that RecipeNet learns more discriminative representations, highlighting the benefits of hierarchical modeling for recipe data.

## 5 Conclusion

In this paper, we proposed RecipeNet, a hierarchical Transformer architecture designed for recipe data with variable schemas and sequential procedural structure. Unlike conventional tabular learning methods that flatten recipes into fixed representations, RecipeNet preserves both intra-step field interactions and inter-step procedural dependencies through hierarchical encoding. Experimental results across multiple recipe datasets and downstream tasks demonstrate the effectiveness of RecipeNet, highlighting the importance of explicitly modeling the hierarchical and sequential nature of recipe data for effective representation learning.

## Acknowledgments

The authors gratefully acknowledge Applied Materials Inc. for its sponsorship and support of this work. The authors also acknowledge Research Computing at Arizona State University for providing computing resources that contributed to the research results reported in this paper. This research used the Sol supercomputer at Arizona State University [14].

## References

- [1] Charu C Aggarwal, Alexander Hinneburg, and Daniel A Keim. 2001. On the surprising behavior of distance metrics in high dimensional space. In *International conference on database theory (ICDT)*. Springer, 420–434.
- [2] Sercan Ö Arik and Tomas Pfister. 2021. Tabnet: Attentive interpretable tabular learning. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 35. 6679–6687.
- [3] Michał Bień, Michał Gilski, Martyna Maciejewska, Wojciech Taisner, Dawid Wiśniewski, and Agnieszka Lawrynowicz. 2020. RecipeNLG: A cooking recipes dataset for semi-structured text generation. In *Proceedings of the 13th international conference on natural language generation (INLG)*. 22–28.
- [4] Dennis Brandl. 2006. *Design patterns for flexible manufacturing*. ISA.
- [5] Tianqi Chen and Carlos Guestrin. 2016. Xgboost: A scalable tree boosting system. In *Proceedings of the 22nd acm sigkdd international conference on knowledge discovery and data mining (KDD)*. 785–794.
- [6] Zhen-Yin Annie Chen, Chun-Cheng Lin, and Ke-Wen Lu. 2025. Optimizing semiconductor process recipe settings using hybrid meta-learning and metaheuristic approaches. *Information Sciences* 706 (2025), 121998.
- [7] Zhen-Yin Annie Chen, Chun-Cheng Lin, Ke-Wen Lu, Hui-Hsin Chin, and Der-Jiunn Deng. 2023. An improved meta learning approach for optimizing recipe parameters for semiconductor processes. In *IECON 2023-49th Annual Conference of the IEEE Industrial Electronics Society*. IEEE, 1–2.
- [8] Jie Dong, Zheng Wu, Huanle Xu, and Defang Ouyang. 2024. FormulationAI: a novel web-based platform for drug formulation design driven by artificial intelligence. *Briefings in Bioinformatics* 25, 1 (2024), bbad419.
- [9] Jeffrey L Elman. 1990. Finding structure in time. *Cognitive science* 14, 2 (1990), 179–211.
- [10] Yury Gorishniy, Ivan Rubachev, Valentin Khrulkov, and Artem Babenko. 2021. Revisiting deep learning models for tabular data. *Advances in neural information processing systems (NeurIPS)* 34 (2021), 18932–18943.
- [11] William L Hamilton, Rex Ying, and Jure Leskovec. 2017. Representation learning on graphs: Methods and applications. *arXiv preprint arXiv:1709.05584* (2017).
- [12] Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation* 9, 8 (1997), 1735–1780.
- [13] Xin Huang, Ashish Khetan, Milan Cvitkovic, and Zohar Karnin. 2020. Tabtransformer: Tabular data modeling using contextual embeddings. *arXiv preprint arXiv:2012.06678* (2020).
- [14] Douglas M. Jennewein, Johnathan Lee, Chris Kurtz, Will Dizon, Ian Shaeffer, Alan Chapman, Alejandro Chiquete, Josh Burks, Amber Carlson, Natalie Mason, Arhat Kobwala, Thirugnanam Jagadeesan, Praful Barghav, Torey Battelle, Rebecca Belshe, Debra McCaffrey, Marisa Brazil, Chaitanya Inumella, Kirby Kuznia, Jade Buzinski, Sean Dudley, Dhruvil Shah, Gil Speyer, and Jason Yalim. 2023. The Sol Supercomputer at Arizona State University. In *Practice and Experience in Advanced Research Computing* (Portland, OR, USA) (PEARC '23). Association for Computing Machinery, New York, NY, USA, 296–301. doi:10.1145/3569951.3597573
- [15] Olga Kononova, Haoyan Huo, Tanjin He, Ziqin Rong, Tiago Botari, Wenhao Sun, Vahe Tshitoyan, and Gerbrand Ceder. 2019. Text-mined dataset of inorganic materials synthesis recipes. *Scientific data* 6, 1 (2019), 203.
- [16] Juho Lee, Yoonho Lee, Jungtaek Kim, Adam Kosiorek, Seungjin Choi, and Yee Whye Teh. 2019. Set transformer: A framework for attention-based permutation-invariant neural networks. In *International conference on machine learning (ICML)*. PMLR, 3744–3753.
- [17] Angela Lin, Sudha Rao, Asli Celikyilmaz, Elnaz Nouri, Chris Brockett, Debadeepta Dey, and William B Dolan. 2020. A recipe for creating multimodal aligned datasets for sequential tasks. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. 4871–4884.
- [18] Ilya Loshchilov and Frank Hutter. 2017. Decoupled Weight Decay Regularization. In *International Conference on Learning Representations (ICLR)*.
- [19] Ilya Loshchilov and Frank Hutter. 2017. SGDR: Stochastic Gradient Descent with Warm Restarts. In *International Conference on Learning Representations (ICLR)*.
- [20] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al. 2011. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research (JMLR)* 12 (2011), 2825–2830.
- [21] Sergei Popov, Stanislav Morozov, and Artem Babenko. 2019. Neural Oblivious Decision Ensembles for Deep Learning on Tabular Data. In *International Conference on Learning Representations (ICLR)*.
- [22] Liudmila Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. 2018. CatBoost: unbiased boosting with categorical features. *Advances in neural information processing systems (NeurIPS)* 31 (2018).
- [23] Gowthami Somepalli, Avi Schwarzschild, Micah Goldblum, C Bayan Bruss, and Tom Goldstein. [n. d.]. SAINT: Improved Neural Networks for Tabular Data via Row Attention and Contrastive Pre-Training. In *NeurIPS 2022 First Table Representation Workshop*.
- [24] An-Jhih Su, Jyh-Cheng Jeng, Hsiao-Ping Huang, Cheng-Ching Yu, Shih-Yu Hung, and Ching-Kong Chao. 2007. Control relevant issues in semiconductor manufacturing: Overview with some new results. *Control Engineering Practice* 15, 10 (2007), 1268–1279.
- [25] Laurens Van der Maaten and Geoffrey Hinton. 2008. Visualizing data using t-SNE. *Journal of machine learning research (JMLR)* 9, 11 (2008).
- [26] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems (NeurIPS)* 30 (2017).
- [27] Zheren Wang, Olga Kononova, Kevin Cruse, Tanjin He, Haoyan Huo, Yuxing Fei, Yan Zeng, Yingzhi Sun, Zijian Cai, Wenhao Sun, et al. 2022. Dataset of solution-based inorganic materials synthesis procedures extracted from the scientific literature. *Scientific data* 9, 1 (2022), 231.
- [28] Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and Philip S Yu. 2020. A comprehensive survey on graph neural networks. *IEEE transactions on neural networks and learning systems* 32, 1 (2020), 4–24.
- [29] Semih Yagcioglu, Aykut Erdem, Erkut Erdem, and Nazli İkizler-Cimbis. 2018. Recipeqa: A challenge dataset for multimodal comprehension of cooking recipes. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 1358–1368.
- [30] Manzil Zaheer, Satwik Kottur, Siamak Ravanbakhsh, Barnabas Poczos, Russ R Salakhutdinov, and Alexander J Smola. 2017. Deep sets. *Advances in neural information processing systems (NeurIPS)* 30 (2017).