

Images in Sentences: Scaling Interleaved Instructions for Unified Visual Generation

Yabo Zhang, Kunchang Li, Dewei Zhou, Xinyu Huang, Xun Wang[†]

ByteDance Seed

[†]Project lead

Abstract

While recent advancements in multimodal language models have enabled image generation from expressive multi-image instructions, existing methods struggle to maintain performance under complex interleaved instructions. This limitation stems from the structural separation of images and text in current paradigms, which forces models to bridge difficult long-range dependencies to match descriptions with visual targets. To address these challenges, we propose **Images in SEntences** (*a.k.a.*, INSET), a unified generation model that seamlessly embeds images as native vocabulary within textual instructions. By positioning visual features directly at their corresponding semantic slots, INSET leverages the contextual locality of transformers for precise object binding, effectively treating images as dense, expressive language tokens. Furthermore, we introduce a scalable data engine that synthesizes 15M high-quality interleaved samples from standard image and video datasets, utilizing VLMs and LLMs to construct rich, long-horizon sequences. Evaluation results on InterleaveBench demonstrate that INSET significantly outperforms state-of-the-art methods in multi-image consistency and text alignment, with performance gaps widening as input complexity increases. Beyond standard generation, our approach inherently extends to multimodal image editing, integrating visual content as part of the instruction to facilitate highly expressive and creative visual manipulations.

Date: May 13, 2026

1 Introduction

Recent breakthroughs in multimodal understanding have revolutionized how models perceive and describe visual concepts [1, 5, 18, 22, 23, 27]. This progress has propelled image generation beyond text-only prompts [8, 12, 28, 30], embracing expressive interleaved image-text instructions [7, 13, 20, 39–41, 49]. However, current methods fail to fully capitalize on this potential. Although capable of handling straightforward and few-reference scenarios, their performance drops sharply when they face complex multi-image constraints.

This inability to scale to complex scenarios stems from (i) the indirect referencing mechanism and (ii) the scarcity of complex interleaved data. First, existing methods [7, 13, 17, 31, 36, 39, 41, 46] rely on an indirect query-based paradigm where visual content is retrieved via explicit indices, such as “the dog in Image 1”. This design compels the model to simultaneously learn to align abstract indices with distant visual features and adjust their attributes and relationships based on the instruction. Consequently, as input sequences lengthen with multiple reference images, the model often fails to accurately bind attributes to their corresponding



Figure 1 Showcases of INSET in Interleaved Image Generation and Editing. By embedding images as native tokens within text, INSET leverages contextual locality of transformers for precise object binding, enabling high-fidelity results in both complex generation and editing tasks.

targets, frequently neglecting specific image inputs. Second, existing interleaved datasets [7, 43, 44, 48] suffer from limited scale and complexity. Although they may include multiple reference images, the sequences are typically short and the interactions between text and images are rudimentary. They lack the rich, long-horizon interleaved examples necessary to teach the model how to handle intricate compositional reasoning involving dense visual contexts.

To overcome these challenges, we propose INSET, a unified generation model that seamlessly embeds images into sentences as native vocabulary, along with a scalable data engine. Instead of treating images as external references requiring retrieval, we position visual features directly at their corresponding semantic slots within the instruction. Conceptually, INSET regards input images as a detailed form of language, which broadens the input domain from text-only prompts to expressive interleaved instructions. This interleaved architecture leverages the contextual locality of transformers [19] to directly bind textual descriptions with visual targets, enabling the model to focus on comprehending the intricate interleaved inputs. Furthermore, we develop a scalable data engine to construct high-quality interleaved data from standard image and video datasets. For static images, the data engine utilizes VLMs [9] to detect salient objects and generate granular descriptions, which are then synthesized by an LLM [9] into natural text sequences with visual embeddings explicitly placed at their semantic positions. Extending to video, it utilizes VLMs to establish object correspondence between frame pairs, prioritizing entities that undergo significant visual changes. These dynamic objects are then processed via the identical pipeline used for static images, explicitly enabling the model to learn how to manipulate visual states in response to textual instructions.

To comprehensively evaluate capabilities on complex interleaved tasks, we introduce InterleaveBench, a benchmark featuring multi-image compositions with intricate interleaved instructions. We implement INSET on top of BAGEL and train it on 15M samples curated by our data engine. Experimental results demonstrate that INSET surpasses all competing methods in multi-image consistency and significantly outperforms open-source models in text alignment. Notably, this performance advantage becomes increasingly pronounced as the number of input images grows, validating the scalability of our approach. Beyond generation, our interleaved format naturally extends to image editing, generalizing text-guided editing into a multimodal paradigm where

both textual instructions and visual reference tokens guide the editing process.

Our contributions are summarized as follows:

- We propose INSET, a unified generation model that embeds images as native vocabulary within instructions, utilizing the contextual locality to achieve precise object binding.
- We develop a scalable data engine that constructs 15M high-quality interleaved samples from image and video datasets, and introduce InterleaveBench for evaluating complex multi-image tasks.
- Experiments show that INSET achieves superior performance in image and text consistency, with advantages amplifying as complexity increases, and naturally generalizes to multimodal image editing.

2 Related Works

2.1 Unified Image Generation Models

Following the success of text-to-image models [12, 28, 30], research has increasingly focused on enabling interleaved image-text inputs [4, 7, 10, 13, 17, 20, 31, 32, 34, 37, 43, 49]. Early attempts [35, 38, 47] primarily relied on pre-trained image encoders such as CLIP [29] to extract visual features, but are prone to rigid copy-paste artifacts and often conflate features when processing multiple reference images. With the rapid advancement of multimodal large language models, recent paradigms have shifted towards leveraging these powerful understanding models to handle multimodal inputs. Among these, autoregressive models [10, 32, 33] adopt discrete image tokenization for unified modeling, though their quality is often bottlenecked by the visual tokenizer. [44, 45, 49] employ a single transformer for both modalities, yet often trail behind specialized models in generation fidelity. Consequently, the majority of recent works [3, 7, 13, 16, 17, 25, 31, 31, 39, 40, 42] adopt a hybrid strategy that connects understanding and generation modules without sharing parameters, allowing the generator to benefit from MLLM capabilities. Despite these progressions, current multimodal generation models have not fully unlocked the potential of advanced understanding models, showing competence in simple interleaved inputs but often faltering when facing complex, multi-step instructions.

2.2 Interleaved Image-Text Datasets

The availability of high-quality interleaved datasets is pivotal for advancing multimodal generation, yet existing options face significant limitations in supporting complex instruction-following. Large-scale web-crawled corpora [14, 50] often suffer from loose semantic alignment and noisy text-image correlations, rendering them suboptimal for precise generation tasks. Conversely, datasets derived from video sequences [7] are primarily tailored for multi-turn editing with high visual redundancy, lacking the capacity to chain distinct visual concepts. Subject-driven collections (*e.g.*, X2I-subject [44]) are typically constrained by limited input images and simplistic commands. More recently, synthetic datasets [21, 43, 48] have utilized generative models for data construction. However, these approaches struggle to maintain diversity at scale and are inherently bottlenecked by the capabilities of the source generative models. To bridge this gap, we introduce a scalable data engine designed to construct rich, complex interleaved sequences derived from real-world scenarios, ensuring both diversity and semantic precision.

3 Method

In this section, we present INSET, a unified framework designed to master complex multi-image generation through a native interleaved formulation. We begin by detailing the modeling paradigm in Sec. 3.1, which embeds images directly as vocabulary within instructions to ensure precise semantic binding. To support this approach, we introduce a scalable data engine in Sec. 3.2 that curates 15M high-quality interleaved samples from real-world image and video corpora. Finally, in Sec. 3.3, we propose InterleaveBench, a rigorous benchmark and evaluation protocol tailored for assessing complex interleaved scenarios.

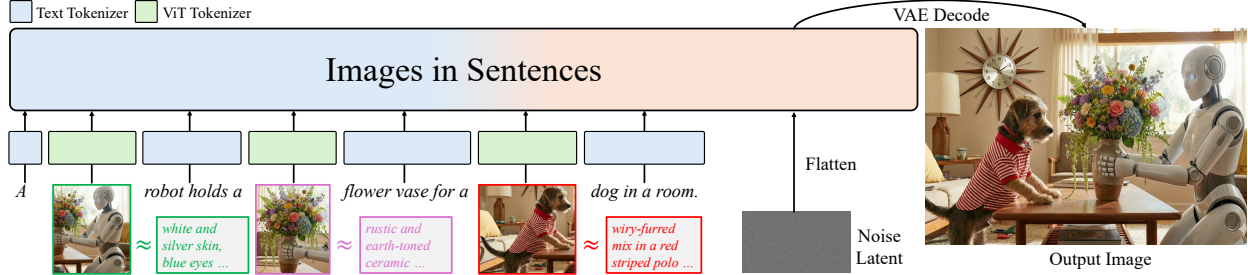


Figure 2 Overview of INSET. Our method positions visual features directly at their corresponding semantic slots within the text instruction. By using a semantic ViT tokenizer as vision encoder, it treats input images as a detailed form of language, expanding text-only prompts into expressive interleaved instructions.

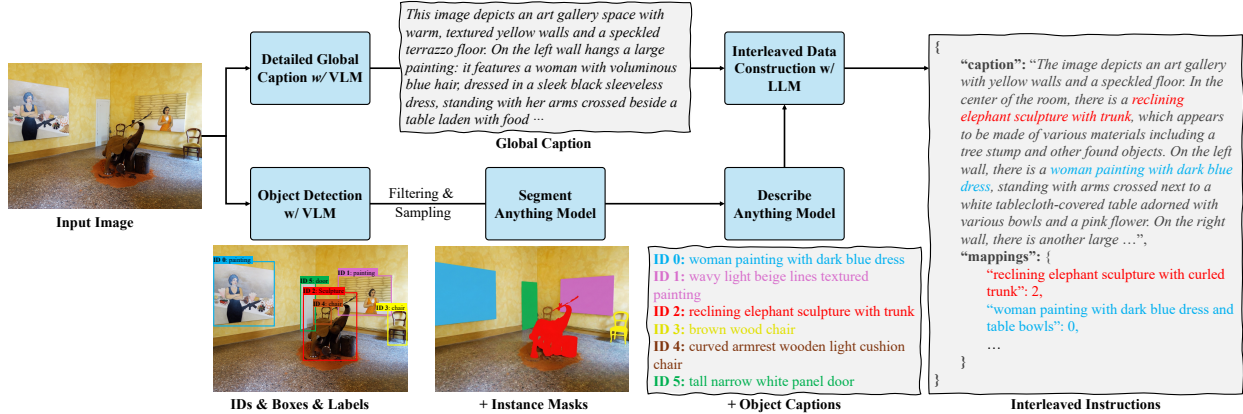


Figure 3 Synthesizing Interleaved Data from Images. We synthesize training data by (i) generating a global narrative via VLM, (ii) extracting fine-grained instance masks and object captions, and (iii) employing an LLM to weave these visual instances into their precise semantic contexts. This process transforms static images into expressive interleaved instructions with structured text-image mappings.

3.1 Unified Interleaved Modeling

Native Interleaved Formulation. Existing unified generation models predominantly rely on an indirect query-based paradigm, where visual content is retrieved via explicit indices. For instance, given the inputs in Figure 2, these models typically segregate reference images from the textual instruction (e.g., [Image1] [Image2] [Image3] + "A robot in image 1 holds a flower vase from image 2..."). This design compels the model to contend with long-range dependencies between the textual instruction and distant visual features. Consequently, as input sequences lengthen with multiple reference images, the model often fails to accurately bind attributes to their corresponding targets or simply neglects specific image inputs.

In contrast, as illustrated in Figure 2, INSET conceptually regards input images as a detailed form of language, seamlessly embedding them into sentences as native vocabulary. This formulation broadens the input domain from simple text-only prompts to expressive interleaved instructions. By positioning visual features directly at their corresponding semantic slots (e.g., "A [Image1] robot holds a [Image2] flower vase..."), we leverage the inherent contextual locality of transformers to directly bind textual descriptions with visual targets. This explicit alignment relieves the model from the struggle of long-range dependency resolution, enabling it to focus entirely on comprehending and executing intricate interleaved instructions.

Model Architecture. Following BAGEL, INSET adopts a Mixture-of-Transformer architecture, including an understanding branch designed to process interleaved image-text instructions and a generation branch dedicated to image synthesis. Diverging from standard dual-feature inputs, we only input semantic ViT embeddings and discard pixel-level VAE latent features. In multi-image scenarios, the inclusion of VAE latents

often biases the model towards “image-pasting” issues, where reference objects are rigidly copied rather than semantically integrated. By relying solely on ViT features, we mitigate this trivial copying and encourage the model to perform deeper semantic reasoning for consistent composition.

Inference Strategy. During inference, the visual modality tends to dominate the generation process, often overshadowing textual instructions. To rectify this imbalance, we adopt a two-stage guidance strategy. First, we calibrate the interplay between modalities by boosting the text influence relative to a visual-only baseline. Second, we apply classifier-free guidance using the null embedding $\emptyset$ as the uncondition input. Formally, let $\mathbf{c}_t$ and $\mathbf{c}_v$ denote the text and visual conditions, and $\emptyset$ represent the null token for missing modalities. We use s_1 and s_2 , to control the text-image balance and the overall generation strength, respectively. The balanced conditional estimate $\hat{\epsilon}_{\text{bal}}$ and the final noise prediction $\tilde{\epsilon}_\theta$ are computed as:

$$\hat{\epsilon}_{\text{bal}} = \epsilon_\theta(z_t, \emptyset, \mathbf{c}_v) + s_1 \cdot (\epsilon_\theta(z_t, \mathbf{c}_t, \mathbf{c}_v) - \epsilon_\theta(z_t, \emptyset, \mathbf{c}_v)), \quad (1)$$

$$\tilde{\epsilon}_\theta = \epsilon_\theta(z_t, \emptyset, \emptyset) + s_2 \cdot (\hat{\epsilon}_{\text{bal}} - \epsilon_\theta(z_t, \emptyset, \emptyset)). \quad (2)$$

By setting $s_1 = 4.0$, we explicitly enhance the adherence to textual descriptions before applying the global guidance scale $s_2 = 1.5$.

3.2 Scalable Interleaved Data Engine

To fully realize the potential of INSET, diverse and high-quality data is indispensable. Addressing the critical scarcity of such resources, we propose a scalable interleaved data engine that autonomously mines and structures complex interleaved sequences directly from large-scale real-world image and video corpora.

Synthesizing Interleaved Data from Images. To construct training data that mirrors the complexity of natural interleaved instructions, our pipeline seamlessly embeds visual instances into their precise semantic contexts, as illustrated in Figure 3. The process comprises three stages:

- (1) **Global Captioning.** We first employ a VLM (*e.g.*, Doubao-Seed-1.6-Vision) to generate a comprehensive global description of the image. This provides a narrative backbone, capturing the scene’s overall context and spatial relationships.
- (2) **Fine-grained Object Processing.** Parallel to global captioning, we extract dense visual details. We utilize a VLM for object detection to obtain bounding boxes and category labels. Following a filtering and sampling step to remove low-quality candidates (*e.g.*, extreme sizes), we apply the Segment Anything Model (SAM) [11] to generate pixel-perfect instance masks. Finally, the Describe Anything Model (DAM) [15] produces detailed object captions for each valid instance.
- (3) **LLM-driven Interleaved Construction.** In the final stage, an LLM synthesizes the interleaved instruction. Taking the global caption and the set of object triplets (label, mask, object caption) as input, the LLM rewrites the narrative to naturally incorporate the detected objects. It compresses detailed regional descriptions into concise descriptive phrases and outputs a structured JSON containing the final interleaved caption and a precise mapping between these textual phrases and their corresponding visual indices. Through this pipeline, we curate 10M complex samples, each containing 3–8 input images, providing a dense signal for learning text-image correspondence.

Synthesizing from Videos. Relying solely on static imagery risks training the model to merely “copy-paste” reference objects without adaptation. To empower the model with dynamic state manipulation capabilities, we extend our data engine to video corpora. Our goal is to leverage temporal changes to construct training pairs where the visual reference (from a source frame) and the generation target (a target frame) depict the same entity in distinctly different states.

- (1) **Long-range Object Correspondence.** We select frame pairs separated by distinct temporal intervals to maximize visual variance. Instead of relying on traditional tracking which struggles with large gaps, we concatenate both frames and feed them into a VLM. The VLM is prompted to jointly identify and match identical entities across the two views, ensuring robust correspondence even under significant view changes.

Table 1 Quantitative Comparisons Different Numbers of Input Images. Despite its smaller parameter scale, INSET significantly outperforms all open-source methods and achieves performance comparable to closed-source models. As the number of input images increases, INSET shows widening leads in both image and text consistency.

Method	#Params.	Image Consistency					Text Consistency				
		Two Obj.	Three Obj.	Four Obj.	Five Obj.	Overall	Two Obj.	Three Obj.	Four Obj.	Five Obj.	Overall
Close-sourced Models											
GPT-4o	-	0.92	0.93	0.90	0.89	0.91	0.86	0.85	0.78	0.81	0.81
Nano Banana	-	0.92	0.94	0.83	0.83	0.88	0.83	0.87	0.74	0.76	0.79
Seedream 4.0	-	0.90	0.93	0.91	0.91	0.91	0.84	0.88	0.85	0.85	0.85
Open-sourced Models											
DreamOmni2	7B+5B+12B	0.83	0.80	0.69	0.65	0.75	0.71	0.67	0.51	0.47	0.57
FluxKontext	5B+12B	0.83	0.80	0.69	0.60	0.74	0.72	0.68	0.50	0.42	0.56
Qwen Image	7B+20B	0.85	0.75	0.70	0.41	0.69	0.78	0.66	0.48	0.20	0.49
BAGEL	7B+7B	0.68	0.62	0.57	0.57	0.61	0.59	0.48	0.40	0.38	0.45
INSET (Ours)	7B+7B	0.93 (+0.08)	0.94 (+0.14)	0.90 (+0.20)	0.94 (+0.29)	0.93 (+0.18)	0.82 (+0.04)	0.78 (+0.10)	0.72 (+0.21)	0.71 (+0.24)	0.75 (+0.18)

(2) **Dynamic State Filtering.** To ensure the model learns transformation rather than reconstruction, we apply a dual-stage filter to select objects that undergo meaningful changes. We first discard static pairs using ORB feature matching (high similarity). Subsequently, we employ a *lightweight* VLM (*e.g.*, Doubao-Seed-1.6-Flash) to verify that the remaining pairs exhibit significant semantic alterations in action, pose, or morphology.

(3) **Cross-Frame Instruction Synthesis.** We construct interleaved instructions specifically for the target frame. Crucially, the visual tokens embedding in the instruction are cropped from the source frame. During training, the model learn to preserve the object’s identity provided by the source visual token, while simultaneously transforming its state (*e.g.*, pose, lighting) to align with the textual description of the target frame. This strategy yields 5M video-derived samples, explicitly training the model to manipulate object states according to textual instructions.

3.3 InterleaveBench Construction

Existing benchmarks, such as DreamBench++ [26] and OmniContext [41], often lack the complexity required for robust evaluation due to their limited reference images and simple spatial relationships. To address this gap, we introduce **InterleaveBench**, a rigorous benchmark designed for complex multi-image scenarios.

Dataset Curation. We source high-quality reference entities from DreamBench++ [26]. For each test case, we sample $N \in [2, 5]$ distinct images and employ a VLM to filter for semantic compatibility. We then generate intricate interleaved instructions that mandate logical spatial reasoning and adaptive attribute modification, rather than simple composition. To ensure quality, all samples undergo rigorous human verification to filter out unnatural or conflicting prompts.

Evaluation Protocol. Conventional metrics relying on holistic embeddings, such as CLIP [29] or DINO [2], struggle to accurately assess identity preservation within complex interleaved instructions involving multiple subjects. To strictly quantify performance beyond these limitations, we implement a dual-perspective LLM-as-Judge framework. (i) *Image Consistency* evaluates identity preservation by assigning a rating on a 1–5 scale, which is subsequently normalized to the interval $[0, 1]$. Crucially, it is designed to penalize fundamental identity drift while explicitly tolerating reasonable instruction-driven variations (*e.g.*, pose or lighting changes), a nuance often misjudged by simple embedding distances. (ii) *Text Consistency* measures semantic alignment via a VQA-based approach [26]. We leverage an LLM to pre-formulate a set of binary questions targeting specific attributes and relationships defined in the instruction. During evaluation, these pre-defined questions are answered by a VLM to calculate an adherence score.

4 Experiments

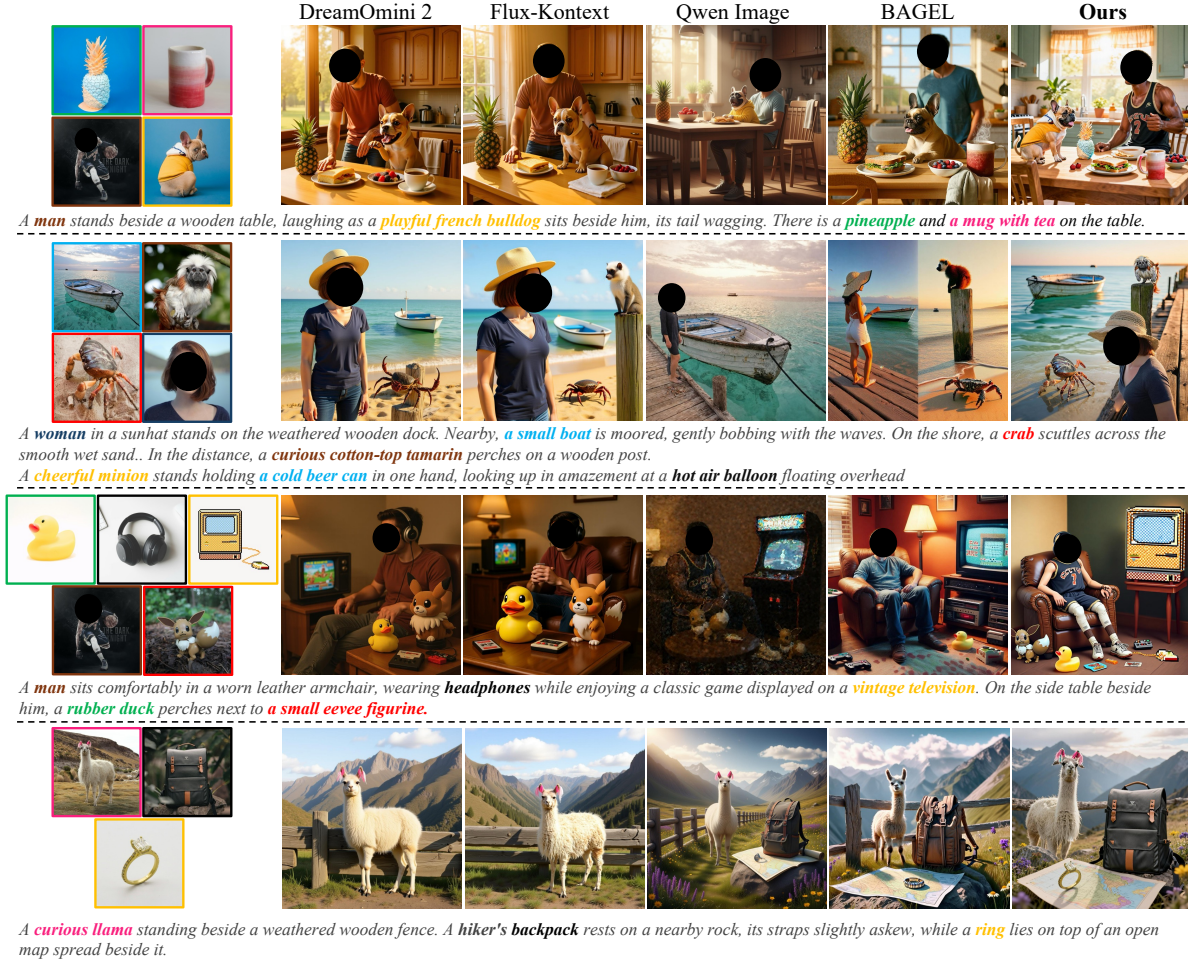


Figure 4 Qualitative Comparisons with the SOTA Open-sourced Methods. INSET significantly outperforms open-source baselines in visual consistency and precise attribute binding, avoiding common failure cases such as object misalignment or the inability to render specific actions and textures.

4.1 Experimental Setup

Implementation Details. We initialize INSET from the BAGEL model, fine-tuning all parameters except for the VAE. The model is trained on a composite dataset containing image-based interleaved data, video-based interleaved data, text-guided image editing data, and text-to-image data, with a sampling ratio of $0.2 : 0.2 : 0.1 : 0.5$, respectively. For optimization, we use AdamW with $\beta_1 = 0.9$ and $\beta_2 = 0.95$, setting the learning rate to 2.5×10^{-5} for a total of 50k steps. Throughout the training, the maximum image resolution is set to 1024, the sequence length per rank is about 30k, and the diffusion timestep shift is set to 3.0.

Evaluation Details. We utilize Doubao-Seed-1.6 to evaluate both image consistency and text consistency, reporting performance metrics across varying numbers of objects. For the evaluation of baseline methods, we adapt the input format to ensure compatibility. In Specific, while InterleaveBench inherently uses an interleaved format (*e.g.*, “A [Image 1] dog in [Image 2] park meets [Image 3] cat.”), most baseline methods require reference images to be prepended and indexed. Therefore, we restructure the inputs for these methods by moving all images to the beginning and rewriting the prompts to reference them explicitly via indices.

Table 2 Quantitative Ablation Study of Key Model Components.

Method	Image Consistency					Text Consistency				
	Two Obj.	Three Obj.	Four Obj.	Five Obj.	Overall	Two Obj.	Three Obj.	Four Obj.	Five Obj.	Overall
Baseline	0.68	0.62	0.57	0.57	0.61	0.59	0.48	0.40	0.38	0.45
Image First	0.88	0.89	0.83	0.82	0.86	0.73	0.70	0.64	0.60	0.66
<i>w/o</i> Video-based Data	0.90	0.92	0.91	0.91	0.91	0.68	0.65	0.56	0.57	0.60
<i>w/</i> VAE Feature	0.91	0.90	0.74	0.68	0.82	0.74	0.71	0.46	0.42	0.56
INSET (Ours)	0.93	0.94	0.90	0.94	0.93	0.82	0.78	0.72	0.71	0.75

4.2 Qualitative Comparisons

We compare our method with representative open-source models in Fig. 4. Experimental results demonstrate that our approach significantly outperforms baselines in both visual consistency and instruction following. Specifically, existing methods frequently misalign generated objects or ignore visual inputs entirely, as evidenced by the failure cases of the “poke ball” in the third row and the “anime man” in the last row. Moreover, models such as DreamOmni 2 [43] and Flux-Kontext [12] exhibit inferior capability in precise attribute binding. For instance, they fail to render the “cream-colored sweater” (second row) or the action to “relax on a flamingo float” (last row). Finally, comparisons with powerful proprietary models [6, 24, 31] in Fig. 5 further highlight the superiority in maintaining image fidelity in handling complex interleaved instructions, as exemplified by the “pineapple” case in the second row.

4.3 Quantitative Comparisons

Table 1 presents a comparison of image and text consistency on InterleaveBench against both open-source and proprietary models. Experimental results demonstrate that, despite having the fewest parameters, INSET significantly outperforms all open-source methods across all metrics and achieves performance comparable to powerful closed-source models. Notably, our advantage over state-of-the-art open-source baselines becomes increasingly pronounced as the number of input images rises. Specifically, in the challenging “Five Objects” setting, we lead by substantial margins of 0.29 in image consistency and 0.24 in text consistency. Furthermore, while our method surpasses closed-source models in image consistency, it slightly lags in text consistency due to the limited capabilities of the underlying text-to-image generation model.

4.4 Emerging Multimodal Image Editing

Although trained separately on interleaved instructions and text-guided image editing tasks, INSET successfully integrates these capabilities, leading to the emergence of novel image editing abilities driven by interleaved instructions. Fig. 6 demonstrates this by showing the model executing edits based on instructions containing both text and specific visual references. A comparison between the “*w/o* Input Images” and “*w/* Input Images” columns reveals that incorporating the input reference images enables highly precise editing. The model faithfully transfers the exact visual characteristics of the specified objects (*e.g.*, specific cap design, branded t-shirt, or robot), rather than relying solely on generic interpretations of the text description.

4.5 Ablation Studies

Adopting BAGEL as the baseline, INSET is trained on interleaved data constructed from images and videos, with the exclusion of input image VAE features. This approach significantly enhances the capability to comprehend complex interleaved instructions. In Fig. 7 and Table 2, we investigate the impact of various improvements on the final performance.

Effect of Image Placement. To validate our native interleaved formulation, we benchmark it against the standard “Image First” approach using identical training data. As shown in Fig. 7 and Table 2, by explicitly positioning visual tokens, we leverage contextual locality to achieve precise object binding. In contrast, the “Image First” paradigm forces the model to resolve difficult long-range dependencies between the text and the

prepended images. Consequently, the baseline often fails to accurately bind attributes to their corresponding targets, or simply neglects specific image inputs entirely.

Effect of Video-based Data. We evaluate the impact of integrating video-based interleaved data into our training set. While a model trained solely on image data achieves satisfactory visual consistency and simple spatial alignment, it falters when required to alter object attributes or synthesize interactive dynamics based on text. Adding video data bridges this gap, enabling the model to generate object interactions that are both more natural and semantically accurate.

Effect of VAE Vision Encoder. We validate removing the pixel-level VAE encoder by comparing against the standard BAGEL architecture (*i.e.*, *w/* VAE). Results indicate that VAE latents induce “image-pasting,” where the model rigidly copies pixels at the expense of following editing instructions. Moreover, the excessive token overhead from VAE dilutes the context, causing object omission and inferior consistency compared to our ViT-only design.

5 Conclusion

In this paper, we introduced INSET, a unified generation model that embeds images as native vocabulary within textual instructions. By positioning visual features directly at their corresponding semantic slots, our approach ensures precise object binding and overcomes the limitations of indirect referencing mechanisms. To enable this paradigm, we developed a scalable data engine to construct 15M high-quality interleaved samples and validated the model on our proposed InterleaveBench. Results show that our method not only excels in complex generation tasks but also naturally generalizes to multimodal image editing. We believe that treating visual content as dense and expressive language tokens offers a promising direction for future research to build more intuitive and unified multimodal systems.


References

- [1] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report. [arXiv preprint arXiv:2502.13923](#), 2025.
- [2] Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In [Proceedings of the IEEE/CVF international conference on computer vision](#), pages 9650–9660, 2021.
- [3] Jiuai Chen, Zhiyang Xu, Xichen Pan, Yushi Hu, Can Qin, Tom Goldstein, Lifu Huang, Tianyi Zhou, Saining Xie, Silvio Savarese, et al. Blip3-o: A family of fully open unified multimodal models-architecture, training and dataset. [arXiv preprint arXiv:2505.09568](#), 2025.
- [4] Xiaokang Chen, Zhiyu Wu, Xingchao Liu, Zizheng Pan, Wen Liu, Zhenda Xie, Xingkai Yu, and Chong Ruan. Janus-pro: Unified multimodal understanding and generation with data and model scaling. [arXiv preprint arXiv:2501.17811](#), 2025.
- [5] Gheorghe Comanici, Eric Bieber, Mike Schaekermann, Ice Pasupat, Naveen Sachdeva, Inderjit Dhillon, Marcel Blistein, Ori Ram, Dan Zhang, Evan Rosen, et al. Gemini 2.5: Pushing the frontier with advanced reasoning, multimodality, long context, and next generation agentic capabilities. [arXiv preprint arXiv:2507.06261](#), 2025.
- [6] Google DeepMind. Gemini 2.5 flash image. <https://developers.googleblog.com/en/introducing-gemini-2-5-flash-image/>, 2025. Accessed: 2025-10-30.
- [7] Chaorui Deng, Deyao Zhu, Kunchang Li, Chenhui Gou, Feng Li, Zeyu Wang, Shu Zhong, Weihao Yu, Xiaonan Nie, Ziang Song, Guang Shi, and Haoqi Fan. Emerging properties in unified multimodal pretraining. [arXiv preprint arXiv:2505.14683](#), 2025.
- [8] Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In [Forty-first international conference on machine learning](#), 2024.

- [9] Dong Guo, Faming Wu, Feida Zhu, Fuxing Leng, Guang Shi, Haobin Chen, Haoqi Fan, Jian Wang, Jianyu Jiang, Jiawei Wang, et al. Seed1. 5-v1 technical report. arXiv preprint arXiv:2505.07062, 2025.
- [10] George Karypis, Eui-Hong Han, and Vipin Kumar. Chameleon: Hierarchical clustering using dynamic modeling. computer, 32(8):68–75, 1999.
- [11] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In ICCV, 2023.
- [12] Black Forest Labs. Flux. <https://github.com/black-forest-labs/flux>, 2024.
- [13] Black Forest Labs, Stephen Batifol, Andreas Blattmann, Frederic Boesel, Saksham Consul, Cyril Diagne, Tim Dockhorn, Jack English, Zion English, Patrick Esser, Sumith Kulal, Kyle Lacey, Yam Levi, Cheng Li, Dominik Lorenz, Jonas Müller, Dustin Podell, Robin Rombach, Harry Saini, Axel Sauer, and Luke Smith. Flux.1 kontext: Flow matching for in-context image generation and editing in latent space, 2025. URL <https://arxiv.org/abs/2506.15742>.
- [14] Qingyun Li, Zhe Chen, Weiyun Wang, Wenhai Wang, Shenglong Ye, Zhenjiang Jin, Guanzhou Chen, Yinan He, Zhangwei Gao, Erfei Cui, et al. Omnicorpus: An unified multimodal corpus of 10 billion-level images interleaved with text. arXiv preprint arXiv:2406.08418, 2024.
- [15] Long Lian, Yifan Ding, Yunhao Ge, Sifei Liu, Hanzi Mao, Boyi Li, Marco Pavone, Ming-Yu Liu, Trevor Darrell, Adam Yala, et al. Describe anything: Detailed localized image and video captioning. arXiv preprint arXiv:2504.16072, 2025.
- [16] Chao Liao, Liyang Liu, Xun Wang, Zhengxiong Luo, Xinyu Zhang, Wenliang Zhao, Jie Wu, Liang Li, Zhi Tian, and Weilin Huang. Mogao: An omni foundation model for interleaved multi-modal generation. arXiv preprint arXiv:2505.05472, 2025.
- [17] Bin Lin, Zongjian Li, Xinhua Cheng, Yuwei Niu, Yang Ye, Xianyi He, Shenghai Yuan, Wangbo Yu, Shaodong Wang, Yunyang Ge, et al. Uniworld: High-resolution semantic encoders for unified visual understanding and generation. arXiv preprint arXiv:2506.03147, 2025.
- [18] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. arXiv:2304.08485, 2023.
- [19] Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. Lost in the middle: How language models use long contexts. Transactions of the Association for Computational Linguistics, 12:157–173, 2024.
- [20] Yiyang Ma, Xingchao Liu, Xiaokang Chen, Wen Liu, Chengyue Wu, Zhiyu Wu, Zizheng Pan, Zhenda Xie, Haowei Zhang, Xingkai Yu, et al. Janusflow: Harmonizing autoregression and rectified flow for unified multimodal understanding and generation. In Proceedings of the Computer Vision and Pattern Recognition Conference, pages 7739–7751, 2025.
- [21] Chong Mou, Yanze Wu, Wenxu Wu, Zinan Guo, Pengze Zhang, Yufeng Cheng, Yiming Luo, Fei Ding, Shiwen Zhang, Xinghui Li, et al. Dreamo: A unified framework for image customization. arXiv preprint arXiv:2504.16915, 2025.
- [22] OpenAI. Gpt-4 technical report. arXiv:2303.08774, 2023.
- [23] OpenAI. Gpt-4v(ision) system card, 2023. URL <https://openai.com/research/gpt-4v-system-card>.
- [24] OpenAI. Introducing 4o image generation. <https://openai.com/index/introducing-4o-image-generation/>, 2024. Accessed: 2025-12-19.
- [25] Xichen Pan, Li Dong, Shaohan Huang, Zhiliang Peng, Wenhui Chen, and Furu Wei. Kosmos-g: Generating images in context with multimodal large language models. arXiv preprint arXiv:2310.02992, 2023.
- [26] Yuang Peng, Yuxin Cui, Haomiao Tang, Zekun Qi, Runpei Dong, Jing Bai, Chunrui Han, Zheng Ge, Xiangyu Zhang, and Shu-Tao Xia. Dreambench++: A human-aligned benchmark for personalized image generation. arXiv preprint arXiv:2406.16855, 2024.
- [27] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei. Kosmos-2: Grounding multimodal large language models to the world. arXiv:2306.14824, 2023.

- [28] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis. [arXiv preprint arXiv:2307.01952](#), 2023.
- [29] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021.
- [30] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [31] Team Seedream, Yunpeng Chen, Yu Gao, Lixue Gong, Meng Guo, Qiushan Guo, Zhiyao Guo, Xiaoxia Hou, Weilin Huang, Yixuan Huang, et al. Seedream 4.0: Toward next-generation multimodal image generation. [arXiv preprint arXiv:2509.20427](#), 2025.
- [32] Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14398–14409, 2024.
- [33] Junke Wang, Zhi Tian, Xun Wang, Xinyu Zhang, Weilin Huang, Zuxuan Wu, and Yu-Gang Jiang. Simplear: Pushing the frontier of autoregressive visual generation through pretraining, sft, and rl. [arXiv preprint arXiv:2504.11455](#), 2025.
- [34] Peiyu Wang, Yi Peng, Yimeng Gan, Liang Hu, Tianyidan Xie, Xiaokun Wang, Yichen Wei, Chuanxin Tang, Bo Zhu, Changshi Li, et al. Skywork unipic: Unified autoregressive modeling for visual understanding and generation. [arXiv preprint arXiv:2508.03320](#), 2025.
- [35] Qixun Wang, Xu Bai, Haofan Wang, Zekui Qin, Anthony Chen, Huaxia Li, Xu Tang, and Yao Hu. Instantid: Zero-shot identity-preserving generation in seconds. [arXiv preprint arXiv:2401.07519](#), 2024.
- [36] Xinlong Wang, Xiaosong Zhang, Zhengxiong Luo, Quan Sun, Yufeng Cui, Jinsheng Wang, Fan Zhang, Yueze Wang, Zhen Li, Qiying Yu, et al. Emu3: Next-token prediction is all you need. [arXiv preprint arXiv:2409.18869](#), 2024.
- [37] Hongyang Wei, Baixin Xu, Hongbo Liu, Cyrus Wu, Jie Liu, Yi Peng, Peiyu Wang, Zexiang Liu, Jingwen He, Yidan Xietian, et al. Skywork unipic 2.0: Building kontekst model with online rl for unified multimodal model. [arXiv preprint arXiv:2509.04548](#), 2025.
- [38] Yuxiang Wei, Yabo Zhang, Zhilong Ji, Jinfeng Bai, Lei Zhang, and Wangmeng Zuo. Elite: Encoding visual concepts into textual embeddings for customized text-to-image generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15943–15953, 2023.
- [39] Chenfei Wu, Jiahao Li, Jingren Zhou, Junyang Lin, Kaiyuan Gao, Kun Yan, Sheng ming Yin, Shuai Bai, Xiao Xu, Yilei Chen, Yuxiang Chen, Zecheng Tang, Zekai Zhang, Zhengyi Wang, An Yang, Bowen Yu, Chen Cheng, Dayiheng Liu, Deqing Li, Hang Zhang, Hao Meng, Hu Wei, Jingyuan Ni, Kai Chen, Kuan Cao, Liang Peng, Lin Qu, Minggang Wu, Peng Wang, Shuting Yu, Tingkun Wen, Wensen Feng, Xiaoxiao Xu, Yi Wang, Yichang Zhang, Yongqiang Zhu, Yujia Wu, Yuxuan Cai, and Zenan Liu. Qwen-image technical report, 2025. URL <https://arxiv.org/abs/2508.02324>.
- [40] Chengyue Wu, Xiaokang Chen, Zhiyu Wu, Yiyang Ma, Xingchao Liu, Zizheng Pan, Wen Liu, Zhenda Xie, Xingkai Yu, Chong Ruan, et al. Janus: Decoupling visual encoding for unified multimodal understanding and generation. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 12966–12977, 2025.
- [41] Chenyuan Wu, Pengfei Zheng, Ruiran Yan, Shitao Xiao, Xin Luo, Yueze Wang, Wanli Li, Xiyan Jiang, Yexin Liu, Junjie Zhou, Ze Liu, Ziyi Xia, Chaofan Li, Haoge Deng, Jiahao Wang, Kun Luo, Bo Zhang, Defu Lian, Xinlong Wang, Zhongyuan Wang, Tiejun Huang, and Zheng Liu. Omnigen2: Exploration to advanced multimodal generation. [arXiv preprint arXiv:2506.18871](#), 2025.
- [42] Size Wu, Wenwei Zhang, Lumin Xu, Sheng Jin, Zhonghua Wu, Qingyi Tao, Wentao Liu, Wei Li, and Chen Change Loy. Harmonizing visual representations for unified multimodal understanding and generation. [arXiv preprint arXiv:2503.21979](#), 2025.

- [43] Bin Xia, Bohao Peng, Yuechen Zhang, Junjia Huang, Jiyang Liu, Jingyao Li, Haoru Tan, Sitong Wu, Chengyao Wang, Yitong Wang, et al. Dreamomni2: Multimodal instruction-based editing and generation. [arXiv preprint arXiv:2510.06679](#), 2025.
- [44] Shitao Xiao, Yueze Wang, Junjie Zhou, Huaying Yuan, Xingrun Xing, Ruiran Yan, Chaofan Li, Shuting Wang, Tiejun Huang, and Zheng Liu. Omnigen: Unified image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13294–13304, 2025.
- [45] Jinheng Xie, Weijia Mao, Zechen Bai, David Junhao Zhang, Weihao Wang, Kevin Qinghong Lin, Yuchao Gu, Zhijie Chen, Zhenheng Yang, and Mike Zheng Shou. Show-o: One single transformer to unify multimodal understanding and generation. [arXiv preprint arXiv:2408.12528](#), 2024.
- [46] Jinheng Xie, Zhenheng Yang, and Mike Zheng Shou. Show-o2: Improved native unified multimodal models. [arXiv preprint arXiv:2506.15564](#), 2025.
- [47] Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang. Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models. [arXiv preprint arXiv:2308.06721](#), 2023.
- [48] Junyan Ye, Dongzhi Jiang, Zihao Wang, Leqi Zhu, Zhenghao Hu, Zilong Huang, Jun He, Zhiyuan Yan, Jinghua Yu, Hongsheng Li, et al. Echo-4o: Harnessing the power of gpt-4o synthetic images for improved image generation. [arXiv preprint arXiv:2508.09987](#), 2025.
- [49] Chunting Zhou, Lili Yu, Arun Babu, Kushal Tirumala, Michihiro Yasunaga, Leonid Shamis, Jacob Kahn, Xuezhe Ma, Luke Zettlemoyer, and Omer Levy. Transfusion: Predict the next token and diffuse images with one multi-modal model. [arXiv preprint arXiv:2408.11039](#), 2024.
- [50] Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Youngjae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal c4: An open, billion-scale corpus of images interleaved with text. *Advances in Neural Information Processing Systems*, 36:8958–8974, 2023.

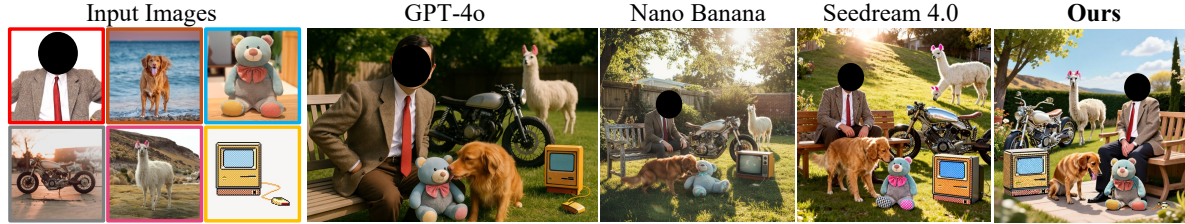

A whimsical outdoor gathering in a sunlit backyard where **a man** sits on a wooden bench next to **a dog** that playfully nuzzles **a teddy bear** at his feet. Nearby, **a classic motorcycle** is parked beside **an old vintage television**. In the background, **a llama** grazes peacefully, creating a charmingly eclectic scene of nature and nostalgia.



A silver Rolls-Royce parked on a sunlit driveway, with the iconic rolls-royce hood ornament gleaming in the golden light. A table displays **a vibrant bouquet of flowers** in a crystal vase beside **a pineapple with green leafy top**. A sleek **basketball shoe** rests on the table's edge.



A vintage motorcycle is parked beside a weathered brick building. Nearby, a cozy sidewalk café features **a armchair** positioned outside, with **a steaming mug** resting on a small wooden table beside it. In the background, **a yellow taxi** drives past



A wooden side table holding a **vintage television** displaying static, a **clock** ticking on the wall above it, and a **piggy bank** sitting on a stack of old books beside the TV. A dog lies contentedly on a woven rug nearby.

Figure 5 Qualitative Comparisons with Advanced Close-sourced Methods. INSET demonstrates superior image fidelity and stability when handling complex interleaved instructions, particularly in maintaining identity consistency across challenging visual contexts.

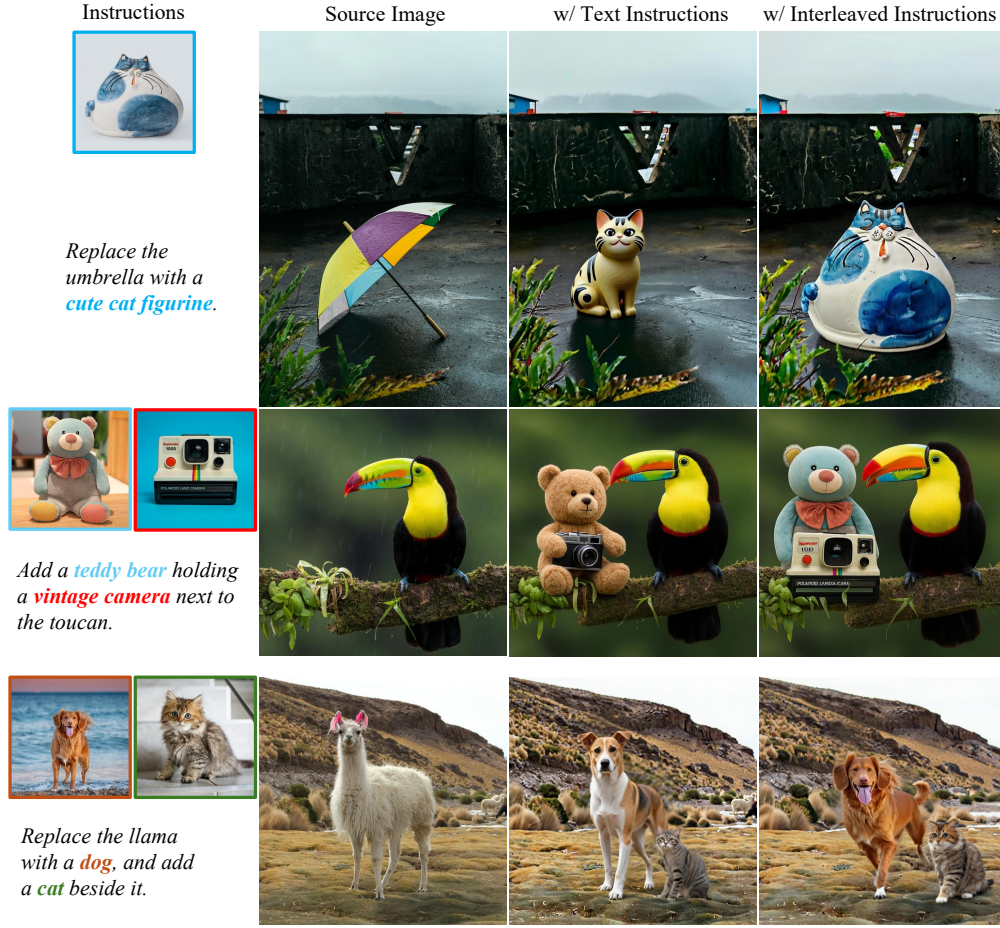


Figure 6 Emerging Multimodal Image Editing via Interleaved Instructions.



Figure 7 Qualitative Ablation Study of Key Model Components. Our interleaved formulation significantly improves attribute binding and context adherence by leveraging semantic locality over the “Image First” baseline. Furthermore, incorporating video-based data enhances interactive dynamics, while our ViT-only design avoids the “image-pasting” issues and high token overhead typical of VAE-based encoders.