

Beyond Noise Steering: Dual-Latent Space Reinforcement Learning for Generative Robot Policy

Pengfei Zhang, Teng Sun, and Xianchao Xiu *Member, IEEE*

Abstract—Pretrained generative robot policies learn expressive action priors from demonstrations. However, existing reinforcement learning methods only steer the noisy space but fail to modulate intermediate action representations during the generation process, resulting in performance degradation and inefficiency. To address this limitation, we propose a novel Dual-Latent Space Reinforcement Learning (DLSRL) framework, which complements initial-noise steering with representation-level control inside the frozen generator. Specifically, our actor network predicts two distinct latent variables: an initial-noise latent variable that steers behavior generation, and an action-representation latent variable for intermediate feature modulation. Moreover, this representation latent variable is mapped to adapter features and ingeniously injected into the hidden states of intermediate action tokens via residual connections. Our dual-control design enables direct adjustment of action representations without updating the base policy. Experiments across generative policy architectures and robotic manipulation tasks show that DLSRL effectively accelerates online robot policy adaptation and achieves competitive performance. Our code is available at <https://github.com/xianchaoxiu/DLSRL>.

I. INTRODUCTION

Vision-Language-Action (VLA) models provide a scalable route toward general-purpose robotic manipulation by integrating visual perception, language understanding, and action prediction [1], [2], [3]. Given images, language instructions, and robot states, VLA models can generate actions while leveraging semantic knowledge acquired from large-scale vision-language and robotic datasets [4], [5]. Such pretraining reduces the need to learn every behavior from scratch [6], [7]. Building on this foundation, recent policy models have also adopted generative action heads to represent continuous and multimodal behavior distributions [8], [9], [10]. For example, Diffusion Policy [11] establishes this paradigm for visuomotor control, while RDT-1B [12] and π_0 [13] extend diffusion or flow-matching techniques to large-scale robotic policies. By transforming noise into action sequences, these generative policies provide expressive action priors for complex and dexterous manipulation tasks.

However, when there is a discrepancy with the pretraining distribution, VLA policies often require downstream adaptation [14]. Such deviations are particularly critical in long-horizon tasks, where even small spatial or temporal errors can lead to task failure [15]. Furthermore, this mismatch may only manifest during closed-loop execution and remain absent from small offline adaptation datasets [16]. While

full fine-tuning can improve downstream performance, it is computationally expensive for models with billions of parameters. Parameter-efficient methods [17], [18], [19] reduce the number of trainable parameters, yet they still rely on offline demonstrations and gradient-based policy modifications [20]. Consequently, online adaptation becomes highly attractive when additional demonstrations are limited, especially when the pretrained policy can remain frozen.

One popular approach is to improve a generative policy with Reinforcement Learning (RL) [21], [22]. For instance, Diffusion Policy Policy Optimization (DPPO) directly fine-tunes diffusion policies through policy gradients, showing that generative action models can be optimized online [23]. A complementary line keeps the base policy frozen while learning an external guidance or correction mechanism. For example, Diffusion Steering via Reinforcement Learning (DSRL) learns an observation-conditioned initial-noise policy, thereby steering a frozen generator without backpropagating through its parameters [24]. More broadly, related approaches include using external models to guide denoising trajectories, learning residual actions on top of a fixed policy, or combining human corrections with noise-space optimization [25], [26]. Across these methods, a common characteristic is that they can achieve task-specific adaptation without updating the pretrained generator itself [27], [28].

More specifically, existing interfaces act mainly at the boundaries of action generation. While initial-noise steering changes the starting point and can influence the behavioral mode selected by the generator, its effect on later representations remains indirect. In contrast, residual policies apply corrections after action generation, thereby failing to shape the evolution of internal action representations [29]. This limitation becomes particularly critical when downstream tasks require precise corrections to contact locations, action magnitudes, or local trajectories during generation. As illustrated in controllable image-generation methods, injecting lightweight features into intermediate representations can modulate a frozen generator without relearning its full capabilities [30], [31], [32]. However, their control conditions and training objectives do not directly address online robotic feedback. *What is still missing is an RL mechanism that combines global behavior selection with direct modulation of intermediate action representations.*

Motivated by these observations, we propose Dual-Latent Space Reinforcement Learning (DLSRL), which, to the best of our knowledge, is the first work that integrates initial-noise steering with action-token hidden-state modulation. Fig. 1 illustrates the difference with the benchmark DSRL [24]. In

This work was supported by the National Natural Science Foundation of China under Grant 12371306. (Corresponding author: Xianchao Xiu.)

Pengfei Zhang, Teng Sun, and Xianchao Xiu are with the School of Mechatronic Engineering and Automation, Shanghai University, Shanghai 200444, China (e-mail: xcxiu@shu.edu.cn).

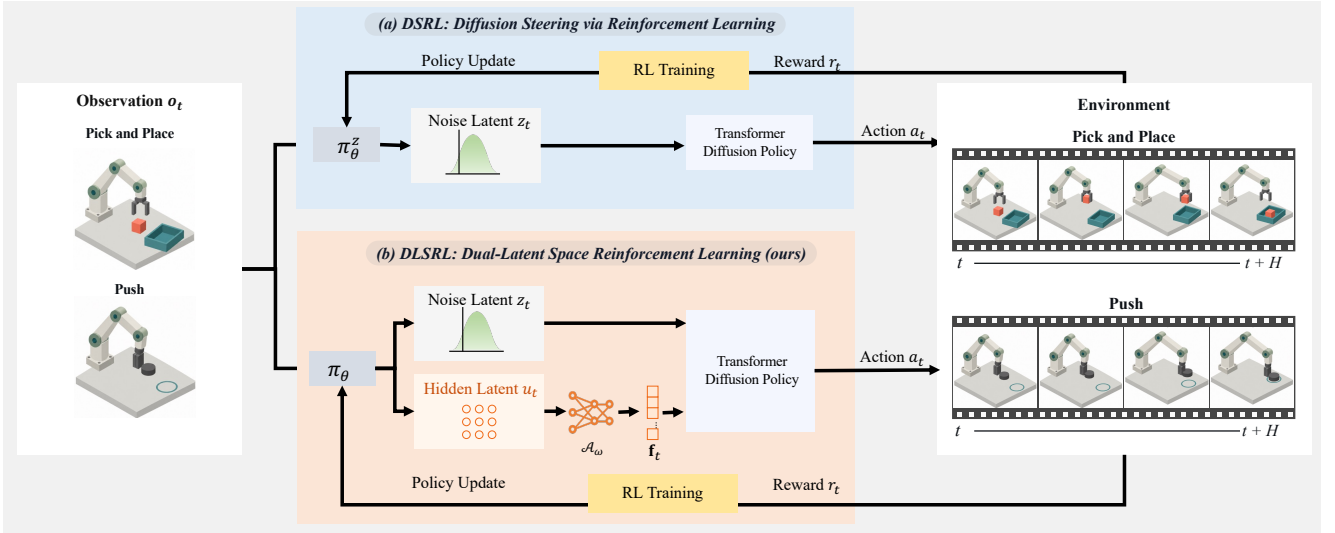


Fig. 1. Comparison of our DLSRL and existing DSRL, where (a) DSRL learns an observation-conditioned initial-noise latent variable z_t to steer action generation. (b) DLSRL produces the initial-noise latent variable z_t and an action-representation latent variable u_t , and the adapter feature mapper $\mathcal{A}_\omega$ transforms u_t into an adapter feature f_t that modulates the intermediate action-token hidden states.

summary, the main contributions are as follows:

- A novel latent space RL framework is introduced by simultaneously optimizing initial-noise latent variables and action-representation latent variables, thereby extending the policy guidance from the sampling initial-ization phase to the intermediate representation phase.
- A lightweight residual modulation mechanism is developed to map the action-representation latent variables into adapter features aligned with action tokens as well as inject them into the Transformer hidden states without requiring updates to the base policy.
- A series of experiments on diffusion and flow-matching policies confirm that our proposed DLSRL can improve online adaptation speed while maintaining competitive final performance.

II. RELATED WORK

A. Generative Robotic Policies

Generative robot policies characterize multimodal behaviors by modeling conditional action distributions [33]. Among them, Diffusion Policy formulates action-sequence generation as conditional denoising [11], [34], whereas flow matching learns a continuous transport process from noise to actions, providing an alternative modeling paradigm for efficient generation [35]. Building on these generative formulations, Diffusion and flow matching have also been adopted for action generation in VLA architectures [36], enabling robot actions to be generated from multimodal inputs. For example, RDT [12] employs a diffusion Transformer to model robot actions, while π_0 [13] combines a pretrained vision-language backbone with a flow-matching action expert to generate continuous action sequences based on multimodal inputs. Although these models acquire expressive action priors from large-scale demonstrations, efficient adaptation

remains necessary when downstream environments differ from the pretraining distribution.

B. Online Policy Steering

Generative policies can be adapted either by updating the generator itself or by learning an external steering mechanism [23]. For external steering, existing methods intervene at different stages of action generation. DynaGuide [25] utilizes guidance from an external dynamics model to modify the diffusion denoising trajectory, whereas DSRL [24] learns an observation-conditioned initial-noise policy for a frozen diffusion policy. Other methods that operate in the latent space include UniSteer [28] and LPS [37]. UniSteer converts human corrective actions into noise-space supervision through action-to-noise inversion, while LPS employs an action-space critic to optimize a latent steering policy. These methods act through the initial latent variable, the sampling trajectory, or their associated gradients, without directly modifying intermediate representations inside the action-generation network. Beyond latent-space and sampling-trajectory steering, methods such as Residual RL [26] and Policy Decorator [27] correct the final output of a pretrained policy in the environment action space. However, they modify the generated actions during or after the decoding process rather than directly altering internal action-token representations. In contrast, our DLSRL retains initial-noise steering while introducing a second RL control interface into the intermediate action-token hidden states, with the base generative policy remaining frozen throughout adaptation.

C. Intermediate-Representation Adapters

Parameter-efficient adaptation transfers pretrained models by optimizing a small number of additional or low-rank parameters while freezing most model weights [17], [18], [38]. Within this adaptation paradigm, ControlNet [31] and T2I-Adapter [?] map external conditions into intermediate

features to control frozen diffusion models. However, these methods are primarily designed for image generation tasks and typically rely on predefined conditions with offline supervision. In contrast, Our DLSRL extends intermediate-representation control to online robot adaptation. Specifically, It learns a low-dimensional action-representation latent variable from environmental feedback, maps it into action-token-aligned adapter features, and coordinates this representation-level signal with initial-noise control.

III. PROPOSED METHOD

A. Problem Formulation

Robotic manipulation is formulated as a Markov decision process. At time step t , the policy receives an observation $o_t = (I_t, q_t, \ell)$, where I_t , q_t , and ℓ denote the visual observation, robot proprioceptive state, and language instruction, respectively. Note that the language instruction ℓ is omitted for tasks without language conditioning. Given the current observation, the policy generates a continuous action chunk $\mathbf{a}_t \in \mathbb{R}^{H \times d_a}$, where H is the action prediction horizon and d_a is the dimensionality of each individual action.

We assume access to a generative base policy G_ϕ pre-trained on offline demonstrations, with its parameters ϕ kept frozen. The policy takes random noise $\mathbf{z}_t \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ as the initial condition of the generation process and transforms it into an action chunk conditioned on the current observation, which is formulated as

$$\mathbf{a}_t = G_\phi(o_t, \mathbf{z}_t). \quad (1)$$

Clearly, the above formulation applies to both diffusion and flow-matching policies, as both can be viewed as conditional generative processes that transform initial noise into continuous action chunks.

Our goal is to learn a lightweight external control module through online interaction with the environment, while keeping the base policy G_ϕ completely frozen. The corresponding expected discounted return is given by

$$J = \mathbb{E} \left[\sum_{t=0}^{T-1} \gamma^t r_t \right], \quad (2)$$

where T is the interaction horizon, r_t is the task reward obtained at time step t , and $\gamma \in [0, 1)$ is the discount factor. This setup preserves the actions previously learned by the base policy while avoiding end-to-end online fine-tuning of large generative models.

B. Dual-Latent Actor

Let's recall existing noise-space RL methods, which employ an actor to generate task-relevant initial noise based on the current observation, i.e.,

$$\mathbf{z}_t \sim \pi_\theta^z(\cdot | o_t), \quad (3)$$

where π_θ^z denotes the noise-space policy parameterized by θ . Subsequently, a frozen base policy utilizes the selected initial noise to generate action segments via Eq. 1. Unlike random sampling from a standard Gaussian distribution, this

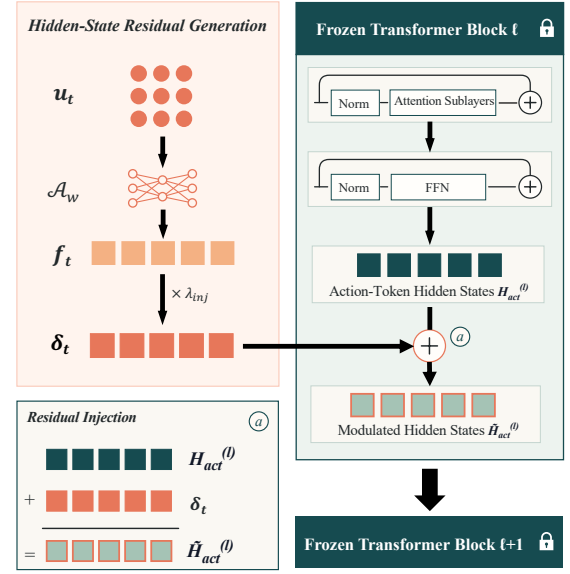


Fig. 2. Action-token hidden-state modulation in DLSRL, where the adapter feature $\mathbf{f}_t = \mathcal{A}_w(\mathbf{u}_t)$ is scaled by λ_{inj} and residually injected into the hidden states of a frozen Transformer block.

actor selects $\mathbf{z}_t$ based on environmental observations, thereby steering the frozen base policy to generate actions that better align with the requirements of the current task. However, this approach controls only the initial conditions and does not directly modify the intermediate action representations within the generative network.

Our DLSRL extends the noise-space actor into a dual-latent actor, thereby enabling control that goes beyond initial conditions. Given the current observation o_t , the dual-latent actor produces an initial-noise latent variable $\mathbf{z}_t$ and an action-representation latent variable $\mathbf{u}_t$ according to

$$(\mathbf{z}_t, \mathbf{u}_t) \sim \pi_\theta(\cdot | o_t), \quad (4)$$

where π_θ represents the dual-latent space policy. Then, the action-representation latent variable is mapped to adapter features via a lightweight adapter feature mapper as

$$\mathbf{f}_t = \mathcal{A}_w(\mathbf{u}_t), \quad (5)$$

where $\mathcal{A}_w$ denotes the adapter feature mapper parameterized by w . In addition, the marginal distributions of the joint policy over $\mathbf{z}_t$ and $\mathbf{u}_t$ are denoted by π_θ^z and π_θ^u , respectively.

Therefore, the frozen base policy generates an action chunk, which is defined as

$$\mathbf{a}_t = G_\phi(o_t, \mathbf{z}_t, \mathbf{f}_t). \quad (6)$$

It is worth pointing out that the initial-noise latent variable $\mathbf{z}_t$ controls the starting point of action generation and primarily influences the overall behavioral mode produced by the base policy. In contrast, the action-representation latent variable $\mathbf{u}_t$ modulates intermediate action representations through the adapter feature $\mathbf{f}_t$, providing more direct representation-level control during generation. Both latent variables are optimized using online task rewards. Throughout this process, the base-policy parameters ϕ remain frozen, while the dual-latent

Algorithm 1 Dual-Latent Policy Optimization

Require: Base policy G_ϕ , environment $\mathcal{M}$, injection strength λ_{inj} , environment-step budget T , updates per iteration K .

- 1: Initialize buffer $\mathcal{D}$, critics $Q_\psi^{\text{act}}, Q_\nu^{\text{lat}}$, actor π_θ , mapper $\mathcal{A}_\omega$.
 - 2: Reset $\mathcal{M}$ to obtain o_0 . Set $t \leftarrow 0$.
 - 3: **while** environment-step budget T is not exhausted **do**
 - 4: Sample $(\mathbf{z}_t, \mathbf{u}_t)$ using Eq. (4).
 - 5: Compute $\mathbf{f}_t, \mathbf{a}_t$ using Eq. (5) and Eq. (6).
 - 6: Execute actions, obtain (r_t, o_{t+1}, d_t) and count environment steps.
 - 7: Store $(o_t, \mathbf{a}_t, r_t, o_{t+1}, d_t)$ in $\mathcal{D}$.
 - 8: **for** $j = 1, \dots, K$ **do**
 - 9: Sample a minibatch from $\mathcal{D}$ and update ψ by off-policy Temporal-Difference (TD) learning.
 - 10: Sample $\hat{\mathbf{z}} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ and $\hat{\mathbf{u}} \sim \pi_\theta^u(\cdot | o)$.
 - 11: Compute $\hat{\mathbf{f}}, \hat{\mathbf{a}}$ using Eq. (5) and Eq. (6).
 - 12: Update only ν using Eq. (9).
 - 13: Resample $(\mathbf{z}, \mathbf{u})$ using Eq. (4) and compute $\mathbf{f}$ using Eq. (5).
 - 14: Update only (θ, ω) using Eq. (10).
 - 15: **end for**
 - 16: If the episode ends, reset $\mathcal{M}$ to obtain a new o_{t+1} .
 - 17: Set $t \leftarrow t + 1$.
 - 18: **end while**
-

actor parameters θ and adapter feature mapping parameters ω are updated.

C. Action-Token Hidden-State Modulation

Consider that the action-representation latent variable influences action generation through the intermediate hidden states of the generation network. Our DLSRL does not introduce additional trainable Transformer layers into the base policy. As illustrated in Fig. 2, the adapter feature is scaled by λ_{inj} and added to the action-token hidden states at the outputs of selected frozen Transformer blocks. At the k -th generation update step, the action-token hidden states produced by the l -th frozen Transformer block are given by

$$\mathbf{H}_{t,k}^{(l)} = \mathcal{T}_\phi^{(l)} \left(\tilde{\mathbf{H}}_{t,k}^{(l-1)}, \mathbf{e}_t, k \right), \quad (7)$$

where $\mathcal{T}_\phi^{(l)}$ denotes the l -th Transformer block with frozen parameters, $\tilde{\mathbf{H}}_{t,k}^{(l-1)}$ denotes the modulated action-token hidden states from the preceding block, and $\mathbf{e}_t$ represents the conditional representation derived from the current observation. For diffusion policies, k indexes the reverse denoising steps, whereas for flow-matching policies, k indexes the discrete integration steps.

The action-token hidden states satisfy $\mathbf{H}_{t,k}^{(l)} \in \mathbb{R}^{N_a \times d_h}$, where N_a is the number of action tokens and d_h is the Transformer hidden dimension. The adapter feature obtained from Eq. (5) has the same shape, i.e., $\mathbf{f}_t \in \mathbb{R}^{N_a \times d_h}$. For a selected Transformer block l , our DLSRL scales the adapter feature and residually injects it into the output action-token hidden states, yielding

$$\tilde{\mathbf{H}}_{t,k}^{(l)} = \mathbf{H}_{t,k}^{(l)} + \delta_t. \quad (8)$$

Here, $\delta_t = \lambda_{\text{inj}} \mathbf{f}_t$ denotes the adapter modulation, obtained by scaling the adapter feature with the global injection

strength λ_{inj} . The modulated hidden states $\tilde{\mathbf{H}}_{t,k}^{(l)}$ are subsequently passed to the next Transformer block. Since $\delta_t \in \mathbb{R}^{N_a \times d_h}$ is already aligned with the action-token hidden states, no additional projection layers or trainable parameters are required within the base policy.

Furthermore, the same adapter feature $\mathbf{f}_t$ is shared across the selected Transformer blocks and generation update steps. Residual injection is applied only to action-token positions and does not directly modify visual, language, proprioceptive, or other contextual tokens. Consequently, our DLSRL modifies intermediate action representations without changing the base-network architecture or updating its parameters.

D. Dual-Latent Policy Optimization

Following the action-to-latent value-distillation mechanism [24], we develop a dual-latent policy optimization. This framework contains an action-space critic and a latent space critic, both of which are used only during training. The action-space critic $Q_\psi^{\text{act}}(o_t, \mathbf{a}_t)$ is trained from online inter-action data using a standard off-policy temporal-difference objective. It estimates the expected return of action chunks decoded by the frozen base policy under dual-latent control. Then, these value estimates are subsequently distilled into the latent space critic $Q_\nu^{\text{lat}}(o_t, \mathbf{z}_t, \mathbf{f}_t)$.

Specifically, given an observation $o_t \sim \mathcal{D}$ sampled from the replay buffer, we draw $\hat{\mathbf{z}}_t$ from the standard Gaussian prior and sample $\hat{\mathbf{u}}_t \sim \pi_\theta^u(\cdot | o_t)$. The corresponding adapter feature $\hat{\mathbf{f}}_t$ and action chunk $\hat{\mathbf{a}}_t$ are obtained using Eq.(5) and Eq. (6), respectively. The latent space critic is optimized using the following value-distillation objective

$$\mathcal{L}_{\text{distill}} = \mathbb{E} \left[\left(Q_\nu^{\text{lat}}(o_t, \hat{\mathbf{z}}_t, \hat{\mathbf{f}}_t) - \text{sg}[Q_\psi^{\text{act}}(o_t, \hat{\mathbf{a}}_t)] \right)^2 \right], \quad (9)$$

where $\text{sg}[\cdot]$ denotes the stop-gradient operation. During this distillation step, gradients are applied only to the latent space

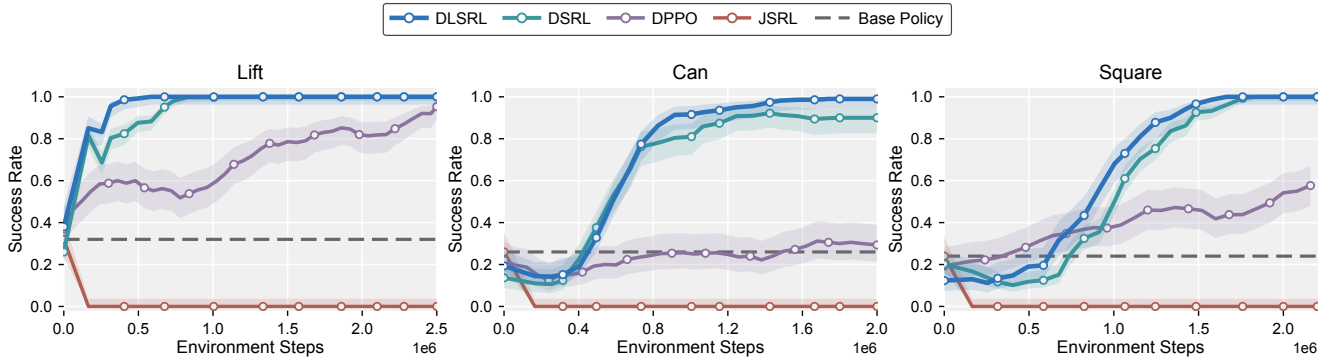


Fig. 3. Online evaluation success rates of our DLSRL and compared methods on the RoboMimic Lift, Can, and Square tasks, where the horizontal dashed line denotes the performance of the frozen base policy.

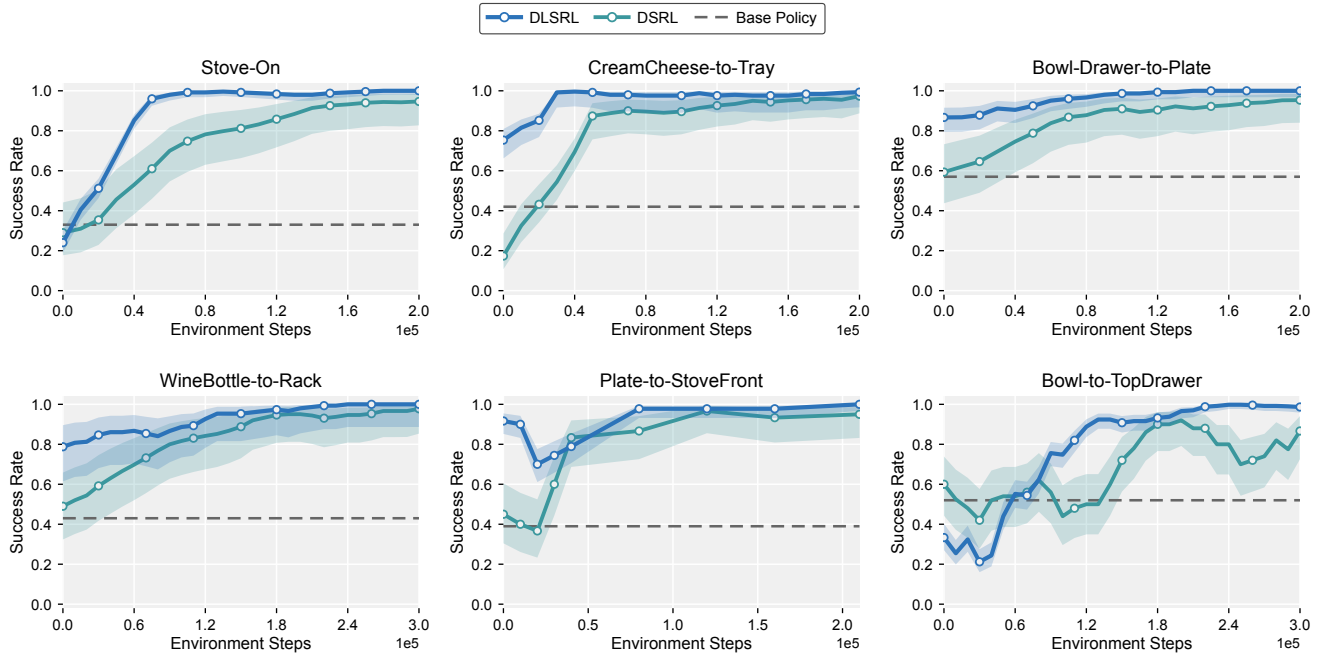


Fig. 4. Online evaluation success rates of our DLSRL and DSRL across six LIBERO tasks, where the horizontal dashed line denotes the performance of the frozen base policy.

critic parameters ν . This objective allows the latent space critic to learn the joint effect of initial-noise steering and action-token hidden-state modulation on task returns without propagating gradients through the frozen generation process.

Next, the dual-latent actor is optimized by minimizing the following entropy-regularized objective

$$\mathcal{L}_{\text{actor}} = \mathbb{E} [\alpha \log \pi_{\theta}^z(\mathbf{z}_t | o_t) - Q_{\nu}^{\text{lat}}(o_t, \mathbf{z}_t, \mathbf{f}_t)], \quad (10)$$

where α is the entropy-regularization coefficient. Although entropy regularization is applied only to the initial-noise branch, gradients of the latent space value with respect to $\mathbf{z}_t$ and $\mathbf{f}_t$ propagate through both actor branches and the adapter feature mapper. During training, the action-space critic, latent space critic, and dual-latent actor together with the adapter feature mapper are updated alternately, while the parameters of the base generative policy G_{ϕ} remain frozen. The overall training procedure is summarized in Algorithm 1. At deployment, only the dual-latent actor and adapter feature

mapper are retained, and both critics are discarded.

IV. NUMERICAL EXPERIMENTS

Experiments are conducted on RoboMimic and LIBERO to evaluate the performance of our DLSRL across different generative policy architectures. On RoboMimic, the Lift, Can, and Square tasks are used with a pretrained Transformer-based Diffusion Policy whose parameters remain frozen during online adaptation. The policy contains four Transformer blocks with a hidden dimension of 128 and predicts action chunks of length 4. Under the same environment interaction budget, our DLSRL is compared with Base Policy, JSRL [39], DPPO [23], and DSRL [24]. On LIBERO, six tasks, including Stove-On, CreamCheese-to-Tray, Bowl-Drawer-to-Plate, WineBottle-to-Rack, Plate-to-StoveFront, and Bowl-to-TopDrawer are considered for the flow-matching setting with π_0 . Here, the vision-language backbone and action-generation module remain frozen.

TABLE I

AVERAGE EPISODE LENGTH ON LIBERO SIMULATION TASKS, WHERE THE BEST RESULTS ARE LABELED IN BOLD.

Methods	Stove-On	CreamCheese-to-Tray	Bowl-Drawer-to-Plate	WineBottle-to-Rack	Plate-to-StoveFront	Bowl-to-TopDrawer
DSRL	88.34 $\pm$ 16.42	203.44 $\pm$ 12.58	125.80 $\pm$ 29.18	113.26 $\pm$ 8.97	101.24 $\pm$ 15.82	226.90 $\pm$ 46.04
DLSRL	65.90 $\pm$ 1.12	157.20 $\pm$ 5.77	97.06 $\pm$ 0.22	95.96 $\pm$ 0.65	80.29 $\pm$ 3.42	180.16 $\pm$ 11.82
Reduction	25.40%	22.73%	22.85%	15.27%	20.69%	20.60%

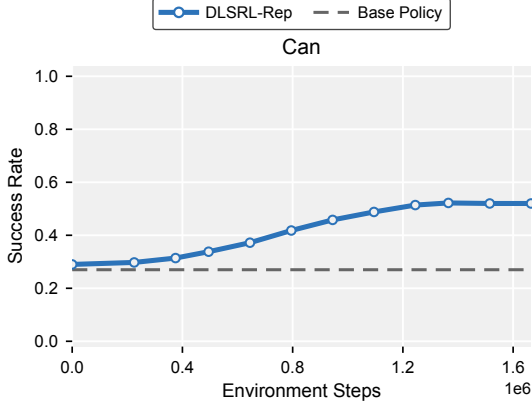


Fig. 5. Ablation studies on the Can task, where DLSRL-Rep retains only action-token hidden-state modulation without learned initial-noise steering.

Moreover, DSRL is used as the main comparison because it adapts the same base policy through initial-noise steering alone. In addition, the success rate is evaluated over 100 episodes during the training process.

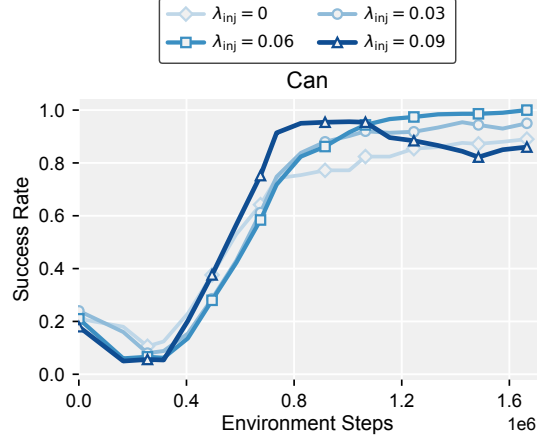
A. Can DLSRL Improve Online Adaptation Efficiency?

Fig. 3 shows the results of our DLSRL compared with other methods on the RoboMimic Lift, Can, and Square tasks. Across all three tasks, our DLSRL demonstrates faster performance improvement during the early and intermediate stages of training. On Lift, although DSRL gradually narrows the gap in the later stages, our DLSRL reaches a near-saturated performance level much earlier. On Square, our DLSRL exhibits faster and more stable performance gains. In particular, on our DLSRL on Can reaches approximately 99% success in the later stage of training, compared with about 90% for DSRL. Under the same interaction budget, DPPO improves more slowly, while JSRL does not consistently outperform Base Policy.

Overall, the main advantage of our DLSRL is faster adaptation rather than uniformly higher final performance. It is more pronounced on Can and Square, where successful execution requires greater action precision, whereas the simpler Lift task eventually allows DSRL to approach a similar success rate. These results indicate that our DLSRL makes more effective use of online interactions when adapting a frozen diffusion policy.

B. Does DLSRL Transfer to Flow-Matching VLA Policies?

Fig. 4 illustrates our DLSRL with DSRL on six LIBERO tasks using the pretrained π_0 policy. Across these tasks, our DLSRL generally improves the success rate more rapidly and

Fig. 6. Analysis of action-token hidden-state injection strength on the Can task under different values of λ_{inj} .

maintains higher performance over most of the interaction budget. Although both methods continue to improve with training, our DLSRL typically reaches saturated performance with fewer environment interactions.

As listed in Table I, our DLSRL achieves shorter average episode lengths on all six tasks, indicating consistent improvements in task execution efficiency across different manipulation scenarios. These consistent improvements demonstrate that the benefit of dual-latent control is not limited to diffusion policies and can also be observed in flow-matching-based VLA policies.

C. How Does Representation Modulation Help?

To investigate whether representation-level modulation contributes independently to online adaptation, DLSRL-Rep is evaluated on the Can task with learned initial-noise steering disabled. As shown in Fig. 5, DLSRL-Rep starts from a success rate close to that of the frozen base policy and improves steadily from approximately 27% to 52%. This gain shows that modifying intermediate action-token representations alone can improve the base policy, even without learned initial-noise steering. These results also help explain why combining these two control interfaces in our DLSRL accelerates the adaptation process.

Fig. 6 analyzes the effect of modulation strength by varying $\lambda_{inj} \in \{0, 0.03, 0.06, 0.09\}$ while keeping the remaining training settings fixed. It can be seen that a larger injection strength does not always lead to better performance. Although $\lambda_{inj} = 0.09$ improves most rapidly at the beginning of training, it exhibits larger fluctuations later on. In contrast, $\lambda_{inj} = 0.03$ produces a more gradual but stable improvement.

The intermediate value $\lambda_{inj} = 0.06$ provides the best balance between adaptation speed and stability and eventually reaches a success rate of 100%. These observations suggest that effective representation-level control requires sufficient modulation strength without excessively perturbing the pre-trained action representations.

V. CONCLUSION

In this paper, we develop an efficient Dual-Latent Space Reinforcement Learning (DLSRL) framework for online adaptation of frozen generative robot policies. Different from the previous work, our DLSRL combines initial-noise steering with lightweight modulation of intermediate action-token representations, providing an additional control interface inside the frozen generator. Experiments on RoboMimic and LIBERO demonstrate that the proposed DLSRL generally improves online adaptation speed and maintaining competitive success rates. Future work will evaluate our DLSRL on real-world environments and investigate the effects of injection layers, generation steps, and injection strengths on adaptation performance.

REFERENCES

- [1] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, J. Dabis, C. Finn, K. Gopalakrishnan, K. Hausman, A. Herzog, J. Hsu *et al.*, “RT-1: Robotics Transformer for Real-World Control at Scale,” *arXiv preprint arXiv:2212.06817*, 2022.
- [2] A. O’Neill, A. Rehman, A. Maddukuri, A. Gupta, A. Padalkar, A. Lee, A. Pooley, A. Gupta, A. Mandlekar, A. Jain *et al.*, “Open X-Embodiment: Robotic Learning Datasets and RT-X Models,” in *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2024, pp. 6892–6903.
- [3] Y. Ma, Z. Song, Y. Zhuang, J. Hao, and I. King, “A Survey on Vision-Language-Action Models for Embodied AI,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 37, no. 7, pp. 3031–3051, 2026.
- [4] D. Driess, F. Xia, M. S. Sajjadi, C. Lynch, A. Chowdhery, B. Ichter, A. Wahid, J. Tompson, Q. Vuong, T. Yu *et al.*, “PaLM-E: An Embodied Multimodal Language Model,” *arXiv preprint arXiv:2303.03378*, 2023.
- [5] S. Belkhal, T. Ding, T. Xiao, P. Sermanet, Q. Vuong, J. Tompson, Y. Chebotar, D. Dwibedi, and D. Sadigh, “RT-H: Action Hierarchies Using Language,” *arXiv preprint arXiv:2403.01823*, 2024.
- [6] O. Mees, D. Ghosh, K. Pertsch, K. Black, H. R. Walke, S. Dasari, J. Hejna, T. Kreiman, C. Xu, J. Luo, Y. L. Tan, D. Sadigh, C. Finn, and S. Levine, “Octo: An Open-Source Generalist Robot Policy,” in *First Workshop on Vision-Language Models for Navigation and Manipulation at ICRA 2024*.
- [7] L. Wang, X. Chen, J. Zhao, and K. He, “Scaling Proprioceptive-Visual Learning with Heterogeneous Pre-trained Transformers,” *Advances in Neural Information Processing Systems*, vol. 37, pp. 124 420–124 450, 2024.
- [8] N. M. Shafiuallah, Z. Cui, A. A. Altanzaya, and L. Pinto, “Behavior Transformers: Cloning k Modes with One Stone,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 22 955–22 968, 2022.
- [9] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning Fine-Grained Bimanual Manipulation with Low-Cost Hardware,” in *ICML Workshop on New Frontiers in Learning, Control, and Dynamical Systems*, 2023.
- [10] M. Reuss, M. Li, X. Jia, and R. Lioutikov, “Goal-conditioned imitation learning using score-based diffusion policies,” *arXiv preprint arXiv:2304.02532*, 2023.
- [11] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, “Diffusion Policy: Visuomotor Policy Learning via Action Diffusion,” *The International Journal of Robotics Research*, vol. 44, no. 10-11, pp. 1684–1704, 2025.
- [12] S. Liu, L. Wu, B. Li, H. Tan, H. Chen, Z. Wang, K. Xu, H. Su, and J. Zhu, “RDT-1B: A Diffusion Foundation Model for Bimanual Manipulation,” in *International Conference on Learning Representations*, vol. 2025, 2025, pp. 29 982–30 009.
- [13] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter *et al.*, “ π_0 : A Vision-Language-Action Flow Model for General Robot Control,” *arXiv preprint arXiv:2410.24164*, 2024.
- [14] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. P. Foster, P. R. Sanketi, Q. Vuong, T. Kollar, B. Burchfiel, R. Tedrake, D. Sadigh, S. Levine, P. Liang, and C. Finn, “OpenVLA: An Open-Source Vision-Language-Action Model,” in *8th Annual Conference on Robot Learning*, 2024.
- [15] S. Ross and D. Bagnell, “Efficient Reductions for Imitation Learning,” in *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*. JMLR Workshop and Conference Proceedings, 2010, pp. 661–668.
- [16] S. Ross, G. Gordon, and D. Bagnell, “A Reduction of Imitation Learning and Structured Prediction to No-Regret Online Learning,” in *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*. JMLR Workshop and Conference Proceedings, 2011, pp. 627–635.
- [17] N. Houlsby, A. Giurgiu, S. Jastrzebski, B. Morrone, Q. De Larousilhe, A. Gesmundo, M. Attariyan, and S. Gelly, “Parameter-Efficient Transfer Learning for NLP,” in *International Conference on Machine Learning*. PMLR, 2019, pp. 2790–2799.
- [18] E. J. Hu, yelong shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, “LoRA: Low-Rank Adaptation of Large Language Models,” in *International Conference on Learning Representations*, 2022.
- [19] S. yang Liu, C.-Y. Wang, H. Yin, P. Molchanov, Y.-C. F. Wang, K.-T. Cheng, and M.-H. Chen, “DoRA: Weight-Decomposed Low-Rank Adaptation,” in *Forty-first International Conference on Machine Learning*, 2024.
- [20] M. J. Kim, C. Finn, and P. Liang, “Fine-Tuning Vision-Language-Action Models: Optimizing Speed and Success,” *arXiv preprint arXiv:2502.19645*, 2025.
- [21] Z. Wang, J. J. Hunt, and M. Zhou, “Diffusion Policies as an Expressive Policy Class for Offline Reinforcement Learning,” in *Deep Reinforcement Learning Workshop NeurIPS 2022*, 2022.
- [22] B. Kang, X. Ma, C. Du, T. Pang, and S. Yan, “Efficient Diffusion Policies for Offline Reinforcement Learning,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 67 195–67 212, 2023.
- [23] A. Ren, J. Lidard, L. Ankile, A. Simeonov, P. Agrawal, A. Majumdar, B. Burchfiel, H. Dai, and M. Simchowitz, “Diffusion Policy Policy Optimization,” in *International Conference on Learning Representations*, vol. 2025, 2025, pp. 77 288–77 329.
- [24] A. Wagenmaker, Y. Zhang, M. Nakamoto, S. Park, W. Yagoub, A. Nagabandi, A. Gupta, and S. Levine, “Steering your diffusion policy with latent space reinforcement learning,” in *9th Annual Conference on Robot Learning*, 2025.
- [25] M. Du and S. Song, “Dynaguide: Steering Diffusion Policies with Active Dynamic Guidance,” *Advances in Neural Information Processing Systems*, vol. 38, pp. 44 192–44 221, 2026.
- [26] T. Johannink, S. Bahl, A. Nair, J. Luo, A. Kumar, M. Loskyll, J. A. Ojea, E. Solowjow, and S. Levine, “Residual Reinforcement Learning for Robot Control,” in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, 2019, pp. 6023–6029.
- [27] X. Yuan, T. Mu, S. Tao, Y. Fang, Z. Zhang, and H. Su, “Policy Decorator: Model-Agnostic Online Refinement for Large Policy Model,” in *International Conference on Learning Representations*, vol. 2025, 2025, pp. 28 129–28 164.
- [28] J. Lu, X. Qin, Y. Jiang, K. Wang, C. Zhang, B. Liang, J. Yang, M. Xu, and L. Zhao, “Unified Noise Steering for Efficient Human-Guided VLA Adaptation,” *arXiv preprint arXiv:2605.10821*, 2026.
- [29] T. Silver, K. Allen, J. Tenenbaum, and L. Kaelbling, “Residual Policy Learning,” *arXiv preprint arXiv:1812.06298*, 2018.
- [30] C. Mou, X. Wang, L. Xie, Y. Wu, J. Zhang, Z. Qi, and Y. Shan, “T2I-Adapter: Learning Adapters to Dig Out More Controllable Ability for Text-to-Image Diffusion Models,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 5, 2024, pp. 4296–4304.
- [31] L. Zhang, A. Rao, and M. Agrawala, “Adding Conditional Control to Text-to-Image Diffusion Models,” in *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2023, pp. 3813–3824.
- [32] Y. Li, H. Liu, Q. Wu, F. Mu, J. Yang, J. Gao, C. Li, and Y. J. Lee, “GLIGEN: Open-Set Grounded Text-to-Image Generation,” in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2023, pp. 22 511–22 521.

- [33] P. Florence, C. Lynch, A. Zeng, O. A. Ramirez, A. Wahid, L. Downs, A. Wong, J. Lee, I. Mordatch, and J. Tompson, “Implicit Behavioral Cloning,” in *Conference on Robot Learning*. PMLR, 2022, pp. 158–168.
- [34] J. Ho, A. Jain, and P. Abbeel, “Denoising Diffusion Probabilistic Models,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 6840–6851, 2020.
- [35] Y. Lipman, R. T. Q. Chen, H. Ben-Hamu, M. Nickel, and M. Le, “Flow Matching for Generative Modeling,” in *The Eleventh International Conference on Learning Representations*, 2023.
- [36] M. Reuss, Ö. E. Yağmurlu, F. Wenzel, and R. Lioutikov, “Multimodal Diffusion Transformer: Learning Versatile Behavior from Multimodal Goals,” in *First Workshop on Vision-Language Models for Navigation and Manipulation at ICRA 2024*, 2024.
- [37] H. Im, A. Kolobov, J. Fu, and Y. Lee, “Latent Policy Steering through One-Step Flow Policies,” *arXiv preprint arXiv:2603.05296*, 2026.
- [38] X. L. Li and P. Liang, “Prefix-Tuning: Optimizing Continuous Prompts for Generation,” in *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, 2021, pp. 4582–4597.
- [39] I. Uchendu, T. Xiao, Y. Lu, B. Zhu, M. Yan, J. Simon, M. Bennice, C. Fu, C. Ma, J. Jiao *et al.*, “Jump-Start Reinforcement Learning,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 34 556–34 583.