

Magic-Informed Quantum Architecture Search

Vincenzo Lipardi 

Department of Advanced Computing Sciences
Maastricht University
Maastricht, The Netherlands
vincenzo.lipardi@maastrichtuniversity.nl

Domenica Dibenedetto 

Department of Advanced Computing Sciences
Maastricht University
Maastricht, The Netherlands

Georgios Stamoulis 

Department of Advanced Computing Sciences
Maastricht University
Maastricht, The Netherlands

Mark H. M. Winands 

Department of Advanced Computing Sciences
Maastricht University
Maastricht, The Netherlands

Abstract—Nonstabilizerness, commonly referred to as magic, is a fundamental resource underpinning quantum advantage. In this paper, we propose a magic-informed quantum architecture search (QAS) technique that enables control over a quantum resource within the general framework of circuit design. Inspired by the AlphaGo approach, we tackle the problem with a Monte Carlo Tree Search technique equipped with a Graph Neural Network (GNN) that estimates the magic of candidate quantum circuits. The GNN model induces a magic-based bias that steers the search toward either high- or low-magic regimes, depending on the target objective.

We benchmark the proposed magic-informed QAS technique on both the structured ground-state energy problem and on the more general quantum state approximation problem, spanning different sizes and target magic levels. Experimental results show that the proposed technique effectively influences the magic across the search tree and notably also on the resulting final circuit, even in regimes where the GNN operates on out-of-distribution instances. Although introducing a problem-agnostic magic bias could, in principle, constrain the search dynamics, we observe consistent improvements in solution quality across all problems tested.

Index Terms—Quantum Architecture Search, Stabilizer Rényi Entropy, Monte Carlo Tree Search, Graph Neural Networks, Quantum Circuit Synthesis, Nonstabilizerness Estimation.

I. INTRODUCTION

Quantum architecture search (QAS), also known as *quantum ansatz search* or *quantum circuit design*, is a general framework aiming to the development of techniques that automatically design parameterized quantum circuits (PQCs) tailored to both a target problem and the constraints of available quantum hardware. Despite the progress provided by several QAS techniques proposed [1]–[11], designing PQCs that simultaneously achieve a high solution quality and satisfy practical hardware constraints remains a key challenge. This difficulty derives from the combinatorial challenge of selecting appropriate gates, positions, and parameters, as well as from the geometry of the optimization landscape, which is typically affected by the barren plateau [12], [13] or, more generally,

the exponential concentration phenomenon [14]. In this scenario, exploiting problem-specific structure can significantly reduce the computational cost of QAS and improve the solution quality. For instance, in quantum chemistry applications, physics-inspired ansatz can incorporate molecular symmetries into the circuit design for solving the ground-state energy problem [15]. However, in general applications, there is no trivial structural information to exploit and we have to rely on problem-agnostic QAS techniques. An example is the Progressive Widening Monte Carlo Tree Search (PWM-CTS) [9], a gradient-free technique that exploits a progressive widening [16] to dynamically explore the continuous search space of PQCs.

Beyond the combinatorial complexity of QAS, the design of PQCs also involves exploiting quantum resources. On the one hand, entanglement captures non-classical correlations, but it is not sufficient alone to guarantee computational advantage [17]. On the other hand nonstabilizerness, commonly referred to as magic, measures the deviation of a quantum state from the polynomial-time simulability in the framework of the Gottesman-Knill Theorem [17]. While several works take into account entanglement, we highlight the practical relevance of having access to magic estimations in the design of PQCs.

In this paper, we propose the class of magic-informed QAS techniques aiming to add a problem-agnostic bias in the PQC design based on a quantum resource. The major obstacle to the practical use of magic in QAS techniques lies in the computational cost related to magic measures, referred to as magic monotones, as it generally grows exponentially in the number of qubits [18]. To overcome this limitation, we leverage a recently proposed Graph Neural Network (GNN) model [19] to estimate the magic of PQCs, measured by the stabilizer 2-Rényi entropy M_2 [18]. The GNN model exhibits strong generalization capabilities across different PQCs in terms of number of qubits, circuit depth, circuit structures, and entanglement levels. Inspired by the AlphaGo approach [20], which enhances Monte Carlo Tree Search with deep learning,

we formulate the QAS problem as a single-player game and employ PWMCTS [9] alongside a GNN [19] to predict the M_2 of candidate PQC, inducing a bias toward desired magic regimes.

The main contributions of this paper are as follows.

- 1) We propose a magic-informed QAS technique to control the magic level during the design of PQCs. Depending on the scope, it can be used to bias the search toward either high-magic or low-magic circuits. In particular, we embed GNN-based M_2 estimations in the PWMCTS technique [9] at two different stages, including the expansion and selection strategy.
- 2) We benchmark the magic-informed PWMCTS on both the structured ground-state energy problem and the more general quantum state approximation problem spanning different levels of magic, measured in terms of M_2 . The proposed techniques effectively induce a bias on the M_2 values within the entire search tree and on the final PQC designed. Additionally, the solution quality achieved by the magic-informed PWMCTS is systematically improved.
- 3) We provide a pipeline for designing target quantum circuits with different levels of magic under the constraint of a fixed number of gates. Keeping the total number of gates is fundamental to focus the hardness of the analysis on the magic levels rather than other PQC structures. We observe that the performance of standard PWMCTS significantly decreases as the magic level of the target circuits increases. In this regime, which is the most relevant for quantum advantage, magic-informed QAS techniques can benefit the design of more representative PQCs.

It is important to note that quantum magic, as a quantum resource, naturally fits within the framework of problem-agnostic QAS techniques. Moreover, magic is attracting growing interest in many-body quantum physics [21], [22] and has been recently investigated in the context of variational quantum algorithms [23], [24]. In this scenario, magic-informed QAS techniques can help better study and exploit magic in quantum computing applications.

This paper is organized as follows. Section II introduces quantum magic, the stabilizer Rényi entropy, and the GNN model employed for magic estimation. Section III presents PWMCTS, focusing on its suitability for incorporating magic-based bias. Section IV presents the details of the proposed magic-informed PWMCTS technique. Section V describes the experimental setup and results. Section VI discusses potentials and limitations of magic-informed QAS. Finally, Section VII summarizes the main findings and outlines future research.

II. QUANTUM MAGIC

The Gottesman-Knill Theorem [17], [25] states that quantum states that can be prepared using exclusively Clifford gates, referred to as *stabilizer states*, can be perfectly simulated in polynomial time on a classical computer. As a consequence,

quantum computations restricted to stabilizer states and Clifford gates do not provide any computational advantage over the classical counterpart. Because the set of stabilizer states is closed under Clifford operations, and a universal quantum gate set cannot be constructed from Clifford gates alone, the preparation of a generic state in the Hilbert space requires resources beyond the Clifford group. The amount of these non-Clifford resources is referred to as *magic*, or nonstabilizerness.

In recent years, magic has been extensively studied. On the one hand, considerable effort has been dedicated to define proper magic monotones [18], [26]–[29] and improving the techniques used to compute them [30]–[33]. On the other hand, there is a growing interest in different fields of application, including many-body quantum physics [21], [22] and variational quantum algorithms [23], [24], where the interconnection with other quantum resources [34], [35] and properties [36] is particularly relevant.

In this work, we employ a GNN model to predict the stabilizer 2-Rényi Entropy [19]. Section II-A introduces this measure of magic, while Section II-B describes the GNN approach.

A. Stabilizer Rényi Entropy

For a pure n -qubit quantum state $|\psi\rangle$, the *stabilizer 2-Rényi entropy* [18] is defined as:

$$M_2(|\psi\rangle) = -\ln \sum_{P \in \mathcal{P}_n} \Xi_P^2(|\psi\rangle) - \ln(2^n) \quad (1)$$

where $\Xi_P(|\psi\rangle) = \frac{1}{2^n} \langle \psi | P | \psi \rangle^2$ and $\mathcal{P}_n$ denotes the set of n -qubit Pauli strings. We note that M_2 is a nonstabilizerness monotone [37].

In general, the computational cost of evaluating M_2 using Equation 1 scales exponentially with the number of qubits n [18], as it requires estimating 4^n expectation values corresponding to all possible Pauli strings. Methods based on Matrix Product States [30]–[32], [38], and more in general Tensor Networks, offer a framework to compute M_2 efficiently in the number of qubits but in running time that scales as a polynomial of degree four in the bond dimension [30]. These methods represent a powerful theoretical framework, but with practical limitations to low bond dimensions [22], [31]. A recent alternative approach leverages supervised learning to generalize from computationally tractable states to larger or more complex instances [19], [39], [40]. In particular, GNNs have been proposed to estimate M_2 , trading exact computation for fast and scalable predictions. It is important to note that learning-based techniques are not meant to compete with tensor-network approaches, but are complementary. For example, GNN models could be used to exploit tensor-network computations on tractable instances and use them to extrapolate to more challenging regimes.

B. Stabilizer Rényi Entropy Estimation using Graph Neural Networks

Estimating the magic of PQCs during the design PQCs is in principle unfeasible, due to the computational cost related to

computing M_2 . However, the Graph Neural Network (GNN) proposed in [19], enables fast M_2 predictions after a one-time training procedure.

This GNN model manages to capture the relevant features of PQCs using a graph-based circuit representation, which encodes them as directed acyclic graphs. Here, nodes correspond to quantum gates and edges represent the flow of quantum information across qubits. This structural representation enables the model to leverage message-passing layers to capture local and global correlations that are intrinsic to the magic of quantum circuits. Unlike traditional machine learning models that rely on fixed-length feature vectors [40], the GNN demonstrates improved generalization capabilities for out-of-distribution circuits with higher qubit counts and gate depths than those encountered during training [19]. By circumventing the exponential scaling of exact M_2 computations, the GNN model provides a computationally efficient pathway for the real-time PQC design. Section IV-B provides the details of the GNN training and assess the its performance.

III. QUANTUM ARCHITECTURE SEARCH

Quantum Architecture Search (QAS) aims to design a PQC that optimizes the given objective function providing hybrid quantum-classical algorithms customized on the available quantum hardware. The problem is encoded into an objective function defined on n -qubit PQCs with a fixed number of qubits n . QAS involves designing the PQC topology, which consists of an ordered sequence of quantum gates, their respective positions, and the corresponding angle parameters. Several techniques have been proposed for QAS [1]–[3], [5]–[11], including differentiable quantum architecture [1], evolutionary algorithms [2], [3], reinforcement learning [5]–[7], and Monte Carlo Tree Search (MCTS) [8], [9].

In this work, we focus on the Progressive Widening enhanced Monte Carlo Tree Search (PWMCTS) technique [9], whose gradient-free approach and robustness to hyperparameter variation make it particularly suitable for the magic-informed approach. PWMCTS formulates the QAS problem as a single-player game over a search tree, allowing it to exploit the extensive previous research available on MCTS for game playing, including breakthrough approaches such as AlphaGo [20]. Section III-A introduces the general MCTS, while Section III-B describes the PWMCTS technique [9], which is specifically designed for the QAS problem.

A. Monte Carlo Tree Search

MCTS is a best-first search method [41] whose basic implementation does not require any domain-specific knowledge. MCTS is based on a randomized exploration of the search space. Using the results of previous explorations, MCTS gradually builds up a search tree in memory, and successively becomes better at accurately estimating the values of the most promising actions. It consists of four strategic steps [16], repeated as long as there is time left. (1) In the *selection* step the tree is traversed from the root node downward until a state is chosen, which has not been stored in the tree. (2) Next, in the

roll-out step, actions are randomly chosen until a terminal state is reached. (3) Subsequently, in the *expansion* step one or more states encountered along the roll-out are added to the tree. (4) Finally, in the *backpropagation* step, the reward is propagated back along the previously traversed path up to the root node, where node statistics are updated accordingly. MCTS grows its search tree gradually by executing the four steps described above. Such an iteration is called a full simulation.

The selection strategy used in this work is the UCB [42], referred to as UCT in the context of Monte Carlo Tree Search, which balances exploitation and exploration of the search [43]. Given a state s and the set of all possible actions $\mathcal{A}$, the MCTS takes the action a^* with the highest UCT value

$$a^* = \arg \max_{a \in \mathcal{A}} UCT(s, a)$$

$$UCT(s, a) = \frac{Q_{(s,a)}}{N_{(s,a)}} + c \sqrt{\frac{\ln N_s}{N_{(s,a)}}} \quad (2)$$

where $N_{(s,a)}$ is the number of times the agent took the action a from the state s , $N_s = \sum_{a \in \mathcal{A}} N_{(s,a)}$ is the total number of times the agent visited the state s , and $Q_{(s,a)}$ is the cumulative reward the agent gained by taking the action a from the state s . The constant c is a parameter that controls the degree of exploration, captured by the second term of Eq. 2 versus the exploitation captured by the first term. Here, c has been set to 0.4 based on [9].

B. Quantum Circuit Design using Progressive Widening Monte Carlo Tree Search

In PWMCTS [9], each node corresponds to a n -qubit quantum circuit and each move corresponds to a specific modification of it. The search starts from a PQC with a Hadamard gate applied on each qubit, previously initialized to $|0\rangle$, which allows to start from a non-classical state. PWMCTS explores the search space by sampling from four classes of allowed actions:

- 1) *add* (A) a random gate on a random qubit at the end of the circuit;
- 2) *swap* (S) a random gate in the circuit with a new one;
- 3) *delete* (D) from the circuit a gate at random position;
- 4) *change* (C) the angle parameter θ_i of a randomly chosen parameterized gate in $\theta_i + \epsilon$, where $\epsilon \sim \mathcal{N}(0, \Delta\theta)$ is sampled from a normal distribution with mean zero and standard deviation $\Delta\theta$.

MCTS chooses between these four classes by sampling from a probability mass distribution $p = (p_A, p_S, p_C, p_D)$, where p_A, p_S, p_C, p_D correspond to the probabilities of choosing the respective action. Quantum gates are sampled from the universal gate set $G = (CX, R_x, R_y, R_z)$. This technique is inspired by a framework [44] proposed for an evolutionary strategy on quantum circuits. PWMCTS is equipped with a progressive widening technique [16] to restrict the infinite discrete number of moves allowed from a state s to a finite number of moves:

$$k_s = \lceil \beta_{PW} N_s^{\alpha_{PW}} \rceil \quad (3)$$

where $\alpha_{PW} \in [0, 1]$ and $\beta_{PW} > 0$ are hyperparameters of PWMCTS. All hyperparameters, including p , $\Delta\theta$, α_{PW} , and β_{PW} have been fixed according to the previous work [9]. Because we are interested in the whole sequence of gates, an action-by-action search is employed to distribute the search time along all the levels of the tree [45], [46]. Once a level of the tree is sufficiently explored, the MCTS commits to the best action.

IV. MAGIC-INFORMED PROGRESSIVE WIDENING ENHANCED MONTE CARLO TREE SEARCH

This section describes the proposed magic-informed PWMCTS technique, in which GNN-based estimates are used to induce a magic-based bias in the tree search. Section IV-A details the magic-informed variant of the baseline PWMCTS, which operates at two stages, namely expansion and selection. Section IV-B analyzes the quality of the GNN estimates for both the M_2 prediction and ranking tasks, which are essential for the effectiveness of the magic-informed expansion and selection, respectively. Finally, Section IV-C provides a procedure to design quantum circuits with a fixed number of gates and different levels of magic.

A. Magic Expansion and Selection Strategies

The magic-informed PWMCTS can be divided into two classes: the high-magic class, which biases the search toward PQC's with high M_2 to obtain solutions that are harder to simulate classically, and the low-magic class, which biases the search toward PQC's with low M_2 to obtain solutions that are easier to simulate. The magic-informed PWMCTS technique extends the baseline PWMCTS by introducing two independent magic-based biases: the magic progressive widening in the expansion step and the magic UCT as a selection strategy. We emphasize that M_2 estimates are exclusively used to bias the growth of the search tree, and the evaluation of the quality of candidate PQC's relies on a problem-dependent reward.

The first bias modifies the progressive widening mechanism that defines the expansion strategy, see Equation 3. In the magic progressive widening (magic PW), the number of child nodes k_s for a state s , as defined by Equation 3, is rescaled by a multiplicative factor γ . At each expansion step, a batch of $\bar{k}_s = \gamma k_s$ candidate circuits is generated, with $\gamma > 1$. These circuits are evaluated in parallel using a batched GNN forward pass to obtain their predicted $\hat{M}_2$ values. The top- k_s candidates are then retained in the search tree, while the remaining $\bar{k}_s - k_s$ candidates are discarded. The hyperparameter γ is fixed to 3 in order to keep limited the computational overhead of the GNN prediction time. We note that progressive strategies have been proven to be particularly effective in the context of MCTS for game playing [16], where domain-specific heuristics are used to guide the exploration process and improve performance.

The second bias is a PUCT-like selection strategy [47] that introduces a magic-based multiplicative factor to the

exploration term of the standard UCT, reported in Equation 2. The resulting magic UCT formula is:

$$UCT_{M_2}(s, a) = \frac{Q_{(s,a)}}{N_{(s,a)}} + c \cdot p_{M_2} \sqrt{\frac{\ln N_s}{N_{(s,a)}}} \quad (4)$$

where $p_{M_2} \equiv p_{M_2}(s, a)$ is the normalized M_2 prediction of the GNN model on the circuit obtained from state s after applying action a . For the bias toward high-magic state we use $p_{M_2} = \frac{\hat{M}_2}{M_2^{\max}}$, while for the bias to low-magic states $1 - \frac{\hat{M}_2}{M_2^{\max}}$. The maximum value $M_2^{\max} = \ln\left(\frac{2^n + 1}{2}\right)$, derived in [18] as a function of the number of qubits n , ensures the normalization of p_{M_2} . This value is computed once and cached at each node. There are two main differences between the proposed magic UCT approach and the plain PUCT selection strategy. First, the exploration term scales differently with the visit counts, as in PUCT deviates from the standard UCT formulation and scales with $\frac{\sqrt{N_s}}{N_{(s,a)}}$ [20], [47]. Second, the multiplicative factor in PUCT is usually a probability distribution over all possible actions a . In contrast, although $p_{M_2} \in [0, 1]$ for all nodes, it does not form a normalized distribution for a given state s : $\sum_a p_{M_2}(s, a) \neq 1$. We note that PUCT-like selection strategies have been successfully used in AlphaGo [20], where they incorporate prior policy information captured by a deep-learning model in the tree search.

Magic PW and magic UCT modify the baseline PWMCTS at two different stages and are therefore independent from each other. The resulting magic-informed PWMCTS includes both contributions. The magic PW ensures that the search tree is populated with PQC's exhibiting higher (or lower) M_2 , while the magic UCT selection strategy biases the traversal towards subtrees characterized by similar magic properties. As a result, the hybrid approach simultaneously guides both the expansion and selection strategies using the estimations $\hat{M}_2$.

B. Graph Neural Network Model

The Graph Neural Network employed in this work adopts the same architecture, hyperparameters, and training dataset as those described in [9]. Specifically, the dataset used here is referred to as Random Quantum Circuit dataset, with circuits from 2 to 6 qubits and total gates ranging from 1 to 99. Any reference to the GNN model in the remainder of the paper refers to this implementation.

Here, we evaluate the $\hat{M}_2$ estimations provided by the GNN model. In particular, we focus on the PQC sixe that is typically explored by PWMCTS, based on its constraints and hyperparameters. For example, the maximum circuit depth, probability distribution over the four possible actions, and the progressive widening technique, typically restrict the search space to PQC's with total gates between 1 and 30. Because the magic-informed PWMCTS variants use the GNN at two stages, as a ranking model for the magic progressive widening and as a M_2 estimator for the Magic UCT, the performance is evaluated in terms of M_2 estimations and on the widely used Spearman's rank correlation coefficient ρ_S [48]. Figure 1 reports the GNN estimations on a set of 150 of random quantum

circuits, with 50 circuits for each qubit count $n \in \{4, 5, 6\}$. For each circuit, the number of gates is drawn uniformly from the interval $[1, 30]$, and individual gates are sampled from the set $(CNOT, H, R_X, R_Y, R_Z)$. The exact M_2 is computed for each circuit, alongside the corresponding GNN prediction.

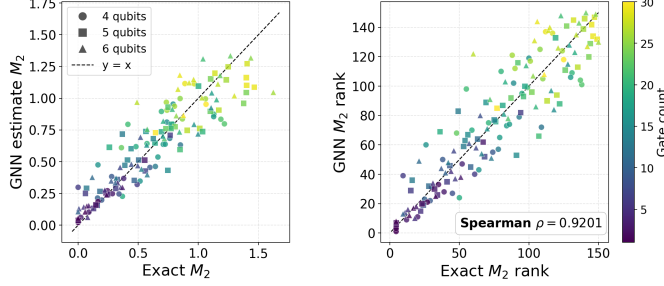


Fig. 1: Graph Neural Network performance. On the left, the performances in terms of M_2 estimations, on the right, in terms of Spearman’s ranking correlation.

C. Generation Procedure of Target States

We generate target states with a number of qubits spanning $n \in \{4, 5, 6\}$, with three representative magic levels for each size. For each value of n , we proceed as follows. First, we generate a pool of 10 random circuits, by uniformly sampling 20 gates from the gate set $\{CNOT, H, S, T\}$, each applied on a random qubit. Since these circuits exhibit low magic (see the gray violin plots in Figure 2), we select the circuit with the highest M_2 as the *low-magic* representative, and the one with the lowest magic as the *working circuit* that is used as a starting circuit to design two more target circuits with higher M_2 . Next, we apply PWMCTS to increase the magic level while keeping the total number of gates fixed. In this setup, PWMCTS uses $M_2/M_2^{\max}$ as reward function, and the action probabilities are set to $p = (0, 40, 60, 0)$, effectively disabling the *add* and *delete* actions in favor of *swap* and *change*. We note that this reward function takes values in $[0, 1]$. For each n , we perform 10 independent PWMCTS runs, where we initialize the root node in the selected *working circuit*. We consider two iteration budgets, $I = 500$ and $I = 2000$, producing two sets of optimized circuits with increasing magic. The circuit with the lowest M_2 among those obtained with $I = 500$ is selected as the *medium-magic* target circuit, while the circuit with the highest M_2 among those obtained with $I = 2000$ is selected as the *high-magic* target circuit.

This procedure generates nine target quantum circuit differing in terms of number of qubits n and magic M_2 . Figure 2 illustrates the distribution of M_2 value for the initial random quantum circuits generated for each value of n , together with the resulting circuit obtained by applying PWMCTS on the random quantum circuit with the lowest M_2 . As shown in the figure, this initial circuit consistently corresponds to a stabilizer state. The reason for starting from the circuit with the lowest M_2 is twofold. First, it is different from the circuit

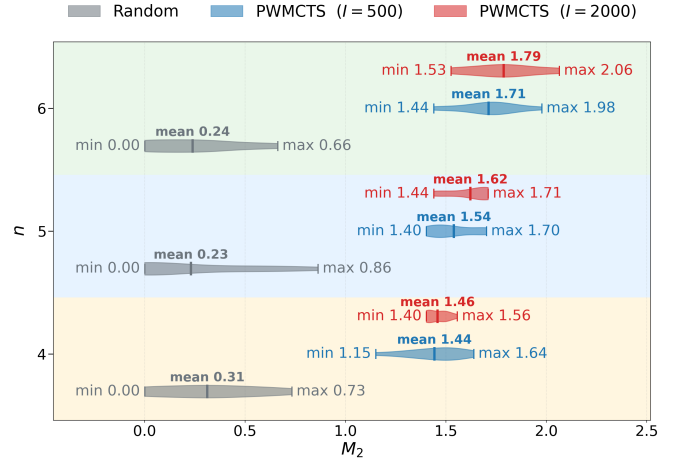


Fig. 2: Generation procedure of the target states. For each value of the number of qubits n , the plot shows the M_2 value distribution of the generated random quantum circuits (grey), of the resulting circuits optimized in M_2 using PWMCTS with a number of iterations fixed to 500 (blue), and 2000 (red).

with the highest M_2 value, which is already part of the target circuit set. Second, it showcases the capabilities of PWMCTS in the circuit optimization task, where even with low number of iterations and starting from a stabilizer state it successfully designs a circuit with higher magic using the limited resources given by the number of total gates.

TABLE I: Target Circuits Summary

n	Magic Level	CNOT	T Count	M_2
4	Low	3	6	0.73
4	Medium	3	5	1.15
4	High	6	6	1.56
5	Low	3	4	0.86
5	Medium	4	5	1.40
5	High	5	6	1.71
6	Low	4	4	0.66
6	Medium	5	8	1.44
6	High	3	9	2.06

It is important to note that the PWMCTS employed for generating target circuits is considerably different from the PWMCTS used for the QAS context. They are initialized on different circuits, share different hyperparameters, and most importantly they work on different universal gate sets. This distinction is essential to avoid structural biases that could artificially simplify the problem. Table I summarizes the nine target circuits designed for the quantum state approximation problem. We emphasize that PWMCTS can solve the nontrivial task of placing non-Clifford T gates in appropriate positions to increase magic. For example, low- and high-magic 4-qubit circuits may share the same number of T gates, yet the circuit produced by PWMCTS achieves an M_2 value more than twice as large. This approach enables the successful design of target circuits spanning a wide range of magic levels.

V. EXPERIMENTAL RESULTS

This section presents a set of experiments to evaluate the performance of the proposed magic-informed PWMCTS technique against the standard PWMCTS. Section V-A presents the results on the ground-state energy problem for three different molecules. Section V-B focuses on the more general quantum state approximation problem, where the target solutions are the nine random quantum circuits generated with different magic levels, as detailed in IV-C. The experiments in these two sections are divided in two main parts. The first analyzes the ability of the proposed technique to control the magic levels within the tree search and in the final PQC. The second analyzes the performance in terms of solution quality, which are the energy and fidelity for the ground-state energy and quantum state approximation respectively. To isolate the contribution of the magic-based components, we conduct an ablation study analyzing the independent effects of the magic PW and magic UCT strategies. Finally, Section V-C analyzes the impact of the magic-informed PWMCTS on the structure of the PQCs designed.

A. Ground-state Energy Problem

The ground-state energy problem is fundamental in the field of quantum chemistry. Any molecule is described by an Hamiltonian that encodes the electronic structure of the system. The problem consists of determining the eigenvector (ground state) corresponding to the lowest eigenvalue of this Hamiltonian (minimum energy). Here, we consider three molecules: hydrogen (H_2), water (H_2O), and lithium hydride (LiH). Table II summarizes the specifics of these molecules, including the number of active electrons n_e , active orbitals n_o , the number of qubit n required for the simulation, and the molecular geometry, which specifies the position of each atom in three-dimensional space. These three molecules have been chosen according to the baseline work [9] as they span various system sizes and complexities.

TABLE II: Molecule Structures

Molecule	n_e	n_o	n	Geometry
H_2	2	2	4	(0, 0, ± 0.6614)
H_2O	4	4	8	H: (0, 0, 0), (3.36, 0, 0); O: (1.63, 0.86, 0)
LiH	2	5	10	(0, 0, 0), (0, 0, 2.97)

The following study is performed under a fixed computational budget, measured in terms of the number of PWMCTS iterations I , which correspond to the total number of circuit evaluations [9]. In this application, we set $I = 1000$ for H_2 , $I = 50000$ for H_2O , and $I = 5000$ for LiH . We perform 10 independent runs for each PWMCTS variant, for both the low-magic and high-magic class as defined in Section IV.

The boxplots in Figure 3 show the average GNN estimations $\hat{M}_2$ across all nodes in the search tree for each PWMCTS variant and for the three molecules. From left to right, the figure reports results for the baseline PWMCTS, the variants of the high-magic class, and of the low-magic class. Each class includes the ablation settings (along the x-axis) that

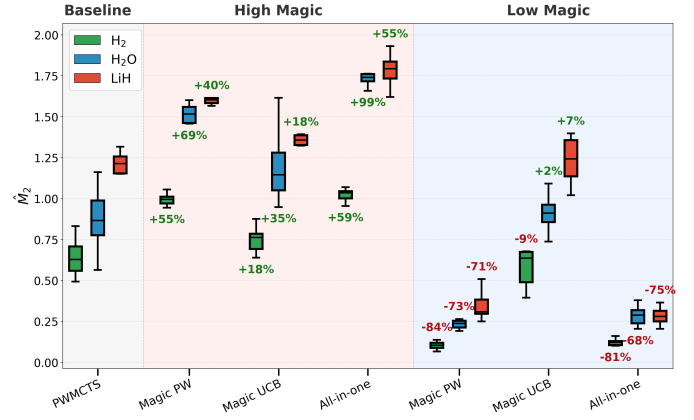


Fig. 3: Average GNN estimations $\hat{M}_2$ in the search tree.

isolate the independent contributions of the two magic-based bias strategies. In the figure, the horizontal black lines in the boxplots indicate the median values, while the values in percentage correspond to the relative change in the mean $\hat{M}_2$ with respect to the baseline. Overall, the magic-informed PWMCTS significantly shifts the distribution of $\hat{M}_2$, with the magic PW having a stronger impact on $\hat{M}_2$ than the magic UCT. When combined, the two strategies consistently amplify the observed shifts, leading to the largest deviations from the baseline values.

We note that a high average $\hat{M}_2$ does not guarantee higher M_2 values in the final PQC. Firstly, because the reward function is generally independent on the magic. Secondly, because the effectiveness of the bias relies on the accuracy of the GNN estimations $\hat{M}_2$. As a consequence, we assess this point by computing the exact M_2 of the final PQC. Figure 8 reports these values in the red boxplots, together with the trace of Quantum Fisher Information in blue.

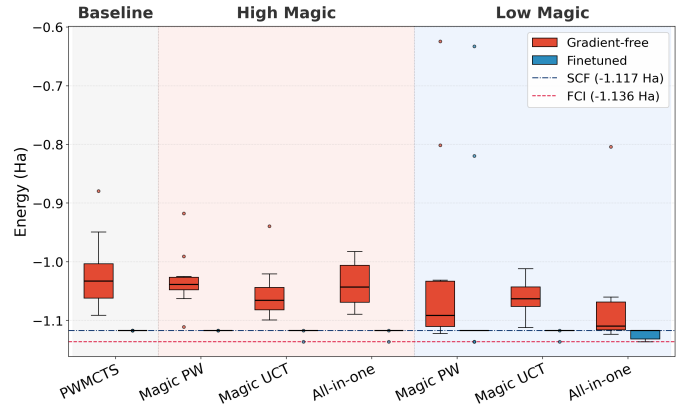


Fig. 4: H_2 . Energy achieved by each PWMCTS variant.

The analysis of the performance based on the solution quality is illustrated in Figures 4, 5, and 6 for the molecules of H_2 , H_2O , and LiH , respectively. Orange boxplots correspond to the energies achieved by the circuits designed by the gradient-free PWMCTS variants before the parameter

finetuning, whereas blue boxplots correspond to the energies obtained from the same PQC after finetuning using the Adam optimizer [49]. The horizontal lines indicate the classical benchmarks provided by the self-consistent field (SCF) and the full configuration interaction (FCI) methods. SCF is a mean-field approximation in which electrons are treated independently within an averaged potential, whereas FCI provides an exact solution by accounting for all possible electronic configurations and thus fully capturing electron correlation effects. The FCI method is exact within a fixed basis set, which according to previous works we set to STO-3G [8], [9].

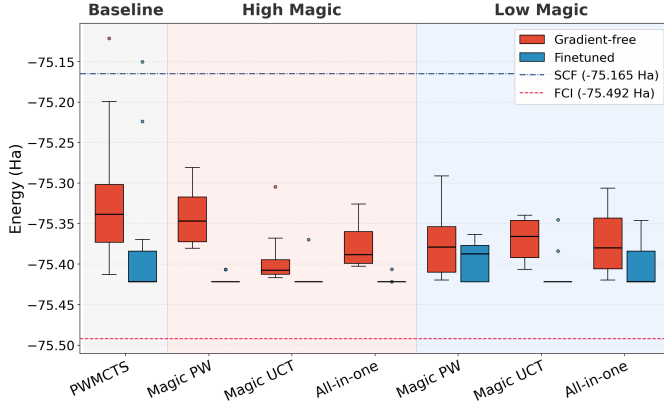


Fig. 5: H_2O . Energy achieved by each PWMCTS variant.

The experiments on the simplest molecule H_2 show that all variants manage to converge to the SCF solution. However, the magic-informed PWMCTS converge more reliably in the gradient-free phase to the solution compared to the baseline, and the combination of magic PW and magic UCT (all-in one) results in a systematic lower energy approaching to the FCI solution. This suggests that inducing the correct magic-based bias can improve the convergence of PWMCTS to the solution.

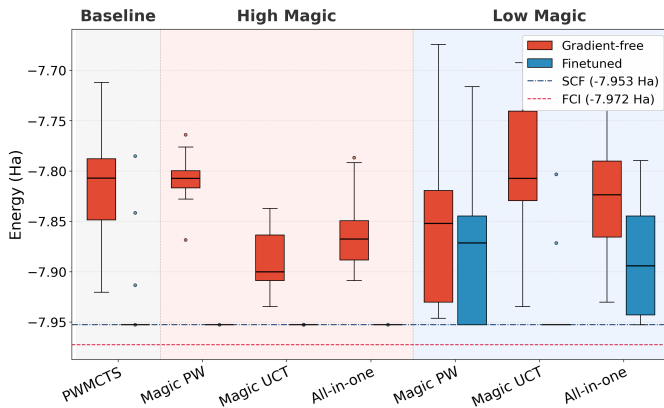


Fig. 6: LiH . Energy achieved by each PWMCTS variant.

The results on the more complex molecules of H_2O and LiH , show that high-magic variants achieve improved performance compared to the baseline. In this case, the increased molecular complexity requires more expressive circuit structures. On the one hand, high-magic variants provide better

solutions in the gradient-free stage, and after the parameter finetuning they converge with higher reliability to the energy value -75.445 . On the other hand, the variants belonging to the low-magic class perform similarly to the baseline, with the exception of the magic UCT, which also induces a weaker magic bias.

B. Quantum State Approximation

In the quantum state approximation, also referred to as quantum oracle approximation or unitary compilation, the goal is finding a PQC that prepares a quantum state close to the target state. We measure the distance between two circuits in terms of fidelity, which we compute through noiseless state vector simulations.

We evaluate the performance of the magic-informed PWMCTS on the set of nine target quantum states, generated following the procedure described in Section IV-C, and summarized in Table I. This procedure constructs a set of circuits spanning a wide range of M_2 values while keeping the number of gates fixed. For a fair comparison, we perform 10 independent runs for each PWMCTS variant under a fixed iteration budget $I = 20,000$. Because the average M_2 estimations in the search tree exhibits similar trends to those observed in Figure 3, we focus directly on the M_2 on the final PQC. To avoid bias due to approximation errors in the GNN, all M_2 are computed exactly. Figure 7 reports the M_2 values of the PQCs designed by all the variants aggregated on all nine problems. According to the results presented in the previous section, the M_2 values of the designed PQC are successfully biased in the desired direction by both the magic PW and the magic UCT for both high-magic and low-magic setting.

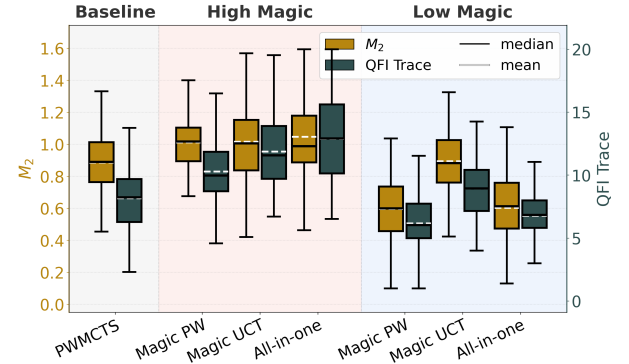
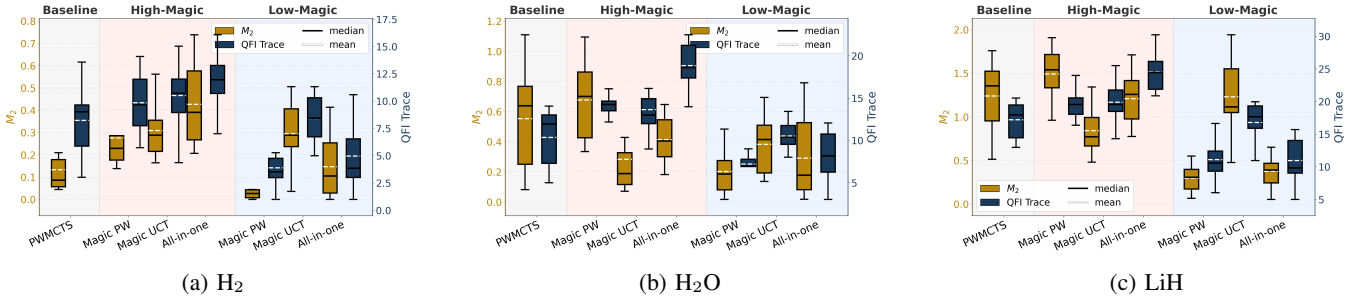


Fig. 7: Exact M_2 values and trace of the QFI matrix of the PQCs designed by each gradient-free PWMCTS variant.

We further evaluate the magic-informed PWMCTS based on the solution quality, measured in terms of fidelity. Figure 9 illustrates the numerical results obtained by each PWMCTS variants, including the high-magic class in Figure 9a and low-magic class in Figure 9b. Both figures are divided into three panels, each corresponding to the target problems with fixed number of qubits n , and each including the three target problems with increasing magic, corresponding to the target states summarized in Table I. In solid colors there are the

TABLE III: Summary of the structure of PQC designed by magic-informed variants against the PWMCTS baseline.

	Problem	Variant	Class	Total gates	Parameterized gates	Adam steps
Ground-state Energy Estimation	H_2	PWMCTS	—	16 ± 4	12 ± 4	122 ± 33
		All-in-one	Low-Magic	16 ± 6	9 ± 4	118 ± 56
	H_2O	PWMCTS	—	23 ± 3	14 ± 4	103 ± 21
		All-in-one	High-Magic	36 ± 3	30 ± 3	156 ± 74
	LiH	PWMCTS	—	34 ± 4	23 ± 3	163 ± 34
		All-in-one	High-Magic	45 ± 5	36 ± 3	197 ± 112
Quantum State Approximation	Low-Magic Circuits	PWMCTS	—	19 ± 4	12 ± 3	130 ± 30
		Magic PW	Low-Magic	16 ± 3	10 ± 2	108 ± 22
	Medium-Magic Circuits	PWMCTS	—	20 ± 4	14 ± 3	111 ± 12
		All-in-one	High-Magic	28 ± 6	22 ± 5	109 ± 42
	High-Magic Circuits	PWMCTS	—	19 ± 3	12 ± 3	142 ± 56
		Magic PW	High-Magic	22 ± 3	16 ± 2	122 ± 23


 Fig. 8: Ground-state energy problem. Exact M_2 values and trace of the QFI matrix of the PQC designed by each gradient-free PWMCTS variant.

result obtained by the gradient-free variants, while in dashed there is the improvement provided by finetuning the circuit parameters using the Adam optimizer. We observe that the M_2 value of the target circuits significantly affects the difficulty of the PQC design problem. In the low-magic regime, the baseline PWMCTS achieves near-perfect performance. However, its performance degrades substantially as the target circuits exhibit higher and more structured magic. This degradation occurs for medium-magic circuits with at least five qubits and is even more pronounced in the high-magic regime.

The magic-informed PWMCTS, with the class of high-magic variants, achieves at least the same fidelity as the baseline for all target states less than the 4-qubit quantum circuit with low magic, which is the instance with less magic overall. Significant improvements are achieved on target states in the medium- or high-magic regime. For example, on 5- and 6-qubit circuits. The ablation study, which allows to analyze the independent contributions from each of the two magic-based biases, highlights that the magic PW is not only stronger in inducing the bias, but it also provides the most significant improvements in terms of solution quality. On the contrary, the PWMCTS variants belonging to the low-magic class do not show any significant improvement with respect to the PWMCTS baseline. The main motivation lies in the particular structure of the PQC provided by these techniques, which is analyzed in detail in Section V-C.

In the high-magic regime, magic-informed techniques de-

sign PQC with M_2 values closer to the target while also achieving improved fidelity compared to the baseline PWMCTS.

C. Comparison of the circuit structures

The gradient-free PQC design using PWMCTS is followed by a fine-tuning procedure on the parameters of the circuit using a gradient-based optimizer [49]. In this context, designing PQC with high trainability is a key challenge. The experimental results presented in the previous sections suggest that the magic-informed PWMCTS variants provide PQC with magic values in the desired regime, while also exhibiting more robust convergence to the solution. The improvement in the solution quality becomes more consistent after the finetuning procedure. To analyze this behavior, we compare the trainability of the PQC designed in the experiments presented in Sections V-A and V-B, by computing the Quantum Fisher Information (QFI) matrix. QFI is widely used as a metric of trainability and learnability in PQC [13], [50], because the eigenvectors associated with its largest eigenvalues identify directions in the parameter space along which the state is most sensitive, and thus most suitable to gradient-based optimization. We employ the trace of the QFI matrix to summarize in a single scalar the measure of the overall trainability of PQC. Figure 7 and 8 report the distribution of this measure (shown in dark gray boxplots) for the quantum state approximation and the ground-state energy, respectively.

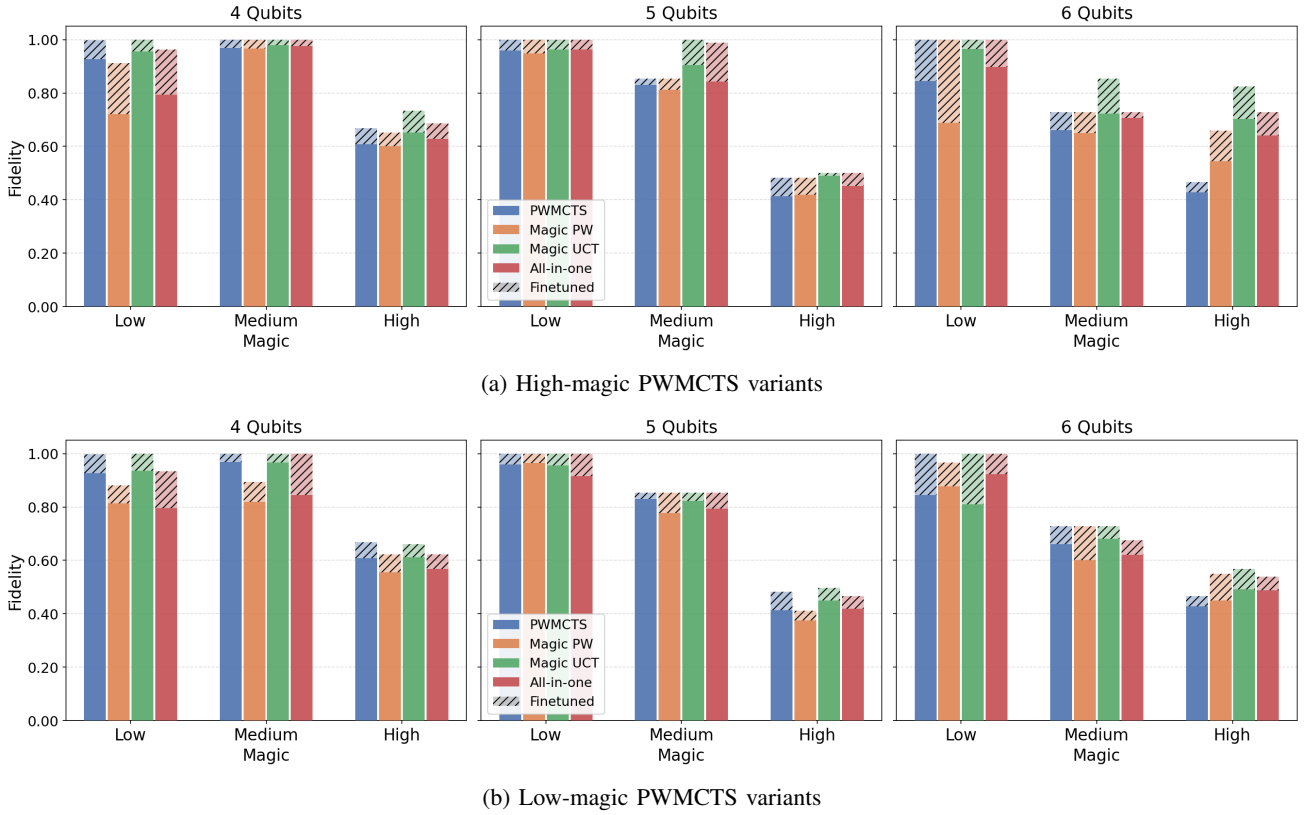


Fig. 9: Quantum state approximation. The bars report the median values of the fidelity achieved by each PWMCTS variant over 10 independent runs for all the nine target circuits.

Across both applications and all problem instances, the high-magic variants of magic-informed PWMCTS consistently produce PQC with higher M_2 values and larger traces of the QFI matrix. Notably, the magic-informed UCT component tends to generate circuits with higher QFI compared to the magic-based Progressive Widening (PW) alone, while their combination achieves the largest overall increases in both M_2 and QFI. However, magic PW exhibits greater robustness in maintaining simultaneously high M_2 and QFI values when the GNN operates in out-of-distribution regimes. This behavior is illustrated in Figure 8. For the H_2 molecule—a 4-qubit system where the GNN operates in-distribution—magic PW produces PQC with higher M_2 and QFI trace than the baseline, while magic UCT explores a similar M_2 range but achieves a larger increase in QFI. Their combination results in the highest values for both metrics.

Table III summarizes the structure of the PQC designed the standard PWMCTS and the best magic-informed variant based on the solution quality. It reports the mean and the standard deviation (over the 10 independent runs) of the total number of quantum gates, the number of parameterized gates and the number of the gradient-based Adam optimizer used to finetune the circuits [49]. The quantum state approximation results have been aggregated in the number of qubits, so each row of the second part collects the results corresponding to the 4-, 5- and 6-qubit target circuits. Low-magic PWMCTS

variants consistently design PQC with fewer total gates and a lower ratio of parameterized gates compared to PWMCTS, indicating a preference for simpler ansatz. In contrast, high-magic variants tend to produce deeper circuits with a higher number of parameterized gates (in ratio) than the baseline, reflecting a wider use of non-Clifford operations. This behavior is intuitive, as single-qubit rotations are a primary source of magic. However, the comparison with PWMCTS suggests that simply increasing the number of rotations is not sufficient to directly increase the magic of the final PQC, because it requires placing these gates in appropriate positions. This is reflected in the controlled increase of total gates observed in the high-magic regime. The difference between the PQC designed by the magic-informed variants and the standard PWMCTS can also be identified in the number of optimization steps required during the finetuning procedure. Low-magic variants typically require fewer optimization steps due to the fewer parameters, while high-magic variants provide PQC with more complex structure, whose larger parameter space effectively translates into greater improvements in solution quality.

VI. DISCUSSION

The role of quantum magic in variational quantum algorithms is attracting increasing attention [23], [24]. As current approaches often operate below their quantum potential [51]–

[53], we highlight the need to account for quantum resources during the PQC design. The proposed magic-informed PWMCTS technique leverages a GNN model to efficiently predict the stabilizer 2-Rényi entropy M_2 to control the magic levels during this process [19]. The numerical results presented in Section V show that the two magic-based biases incorporated in the standard PWMCTS successfully contribute to increase the average magic level in the search tree and most importantly in the final PQC designed. The performance of magic-informed QAS substantially depends on the quality of the predictions of the magic estimator. An ablation study reveals that the magic PW, which relies on the capabilities of the GNN model to rank PQC based on their M_2 , is more robust than magic UCT, which relies on the quality of the M_2 estimations of the GNN model.

The numerical results also show a benefit of the magic-informed PWMCTS in terms of the solution quality, as it achieves a more robust convergence than the standard PWMCTS. In the ground-state energy problem, we tackled three molecules: hydrogen H_2 , water H_2O , and lithium hydride LiH . We note that the GNN model operates in an extrapolation regime on the number of qubits for the water and lithium hydride molecules, as they require 8 and 10 qubits, respectively. On the simpler H_2 , the class of low-magic PWMCTS provides PQC with improved energy. In contrast, on the more complex molecules of H_2O and LiH , the PWMCTS variants providing systematically improved solution belong to the high-magic class. This behavior is consistent with commonly used ansatz in variational quantum eigensolvers, such as UCCSD [54] and ADAPT-VQE [15], where the magic of the PQC typically increases during the optimization process. In the quantum state approximation setting, we consider nine benchmark problems generated according to the procedure described in Section IV-C. These instances provide a diverse testbed for evaluating the magic-informed PWMCTS, as they span a range of circuit sizes and target magic levels. In this setting, the proposed technique achieves improved solution quality when the target state lies in a high-magic regime. This improvement is reflected not only in fidelity but also in the ability to produce circuits whose magic values match more closely those of the target state. This is particularly relevant, as the reward function does not explicitly account for such properties, and high fidelity does not necessarily imply agreement in underlying quantum state properties.

We emphasize that our approach employs magic estimations to induce bias in the search, but the quality of the candidate PQCs is evaluated by reward functions that depend exclusively on the problem. In general, there is no trivial correlation between magic and these reward functions. Therefore, good candidate PQCs may be potentially discarded.

VII. CONCLUSIONS

In this paper, we proposed a magic-informed quantum architecture search (QAS) technique to design parametrized quantum circuits (PQCs). Inspired by the AlphaGo approach [20],

which combines Monte Carlo Tree Search with Deep Learning, we leverage a recently proposed Graph Neural Network (GNN) [19] model for predicting the stabilizer 2-Rényi entropy of PQCs, and integrate it in the Progressive Widening Monte Carlo Tree Search (PWMCTS) [9]. PWMCTS is a problem-agnostic QAS technique that is particularly suitable to support this integration given its gradient-free approach. The resulting magic-informed PWMCTS offers a pathway to more systematically study and exploit quantum resources, which are often underutilized in current approaches [52], [53].

Numerical results on both the structured ground-state energy problem and on the more general quantum state approximation, show that magic-informed PWMCTS can significantly bias the average magic level within the tree and of the final PQC designed. This bias can be induced toward either high- or low-magic circuits, depending on the objective. We note that the proposed technique can effectively bias the search across a range of applications, including settings involving circuits with more qubits than those seen during training (out-of-distribution predictions), demonstrating strong generalization capabilities. While the training data includes circuits with up to 6 qubits [19], the proposed technique is evaluated on systems with up to 10 qubits. Additionally, the magic-informed PWMCTS designs more structured PQCs, leading to improved solution quality compared to those designed by the standard PWMCTS.

We identify three main future research directions. The first is the integration of magic estimation into different QAS techniques, such as those based on reinforcement learning and evolutionary algorithms, which may pave the way for resource-aware QAS techniques. The second direction concerns improving the accuracy of GNN-based predictions. The model used in this work is trained on a general dataset of random quantum circuits. However, it could be further fine-tuned on representative set of circuits tailored to the QAS technique employed. The third direction is the extension of magic-informed QAS techniques to real quantum devices. Although the standard PWMCTS exhibits robust behavior under typical noise in NISQ devices [9], and the employed GNN can be trained to predict the magic measured on noisy quantum devices [19], the practical deployment of magic-informed QAS techniques on NISQ devices requires future investigation.

DATA AVAILABILITY STATEMENT

The data and code to reproduce the experiments of this work are publicly available at the GitHub repository: <https://github.com/VincenzoLipardi/GNN-MCTS.git>.

ACKNOWLEDGMENT

The authors disclose the use of Claude Sonnet 4.6 to assist with the implementation of the experiments in Section V. All content was reviewed and edited by the authors, who take full responsibility for the final work.

REFERENCES

- [1] S.-X. Zhang, C.-Y. Hsieh, S. Zhang, and H. Yao, “Differentiable quantum architecture search,” *Quantum Science and Technology*, vol. 7, no. 4, p. 045023, 2022.
- [2] A. Zhang and S. Zhao, “Evolutionary-based searching method for quantum circuit architecture,” *Quantum Information Processing*, vol. 22, no. 7, p. 283, 2023.
- [3] D. Chivilikhin, A. Y. Samarin, V. I. Ulyantsev, I. V. Iorsh, A. R. Oganov, and O. Kyriienko, “Mog-vqe: Multiobjective genetic variational quantum eigensolver,” *arXiv preprint arXiv:2007.04424*, 2020.
- [4] M. Lourens, I. Sinayskiy, D. K. Park, C. Blank, and F. Petruccione, “Hierarchical quantum circuit representations for neural architecture search,” *npj Quantum Information*, vol. 9, no. 1, p. 79, 2023.
- [5] E.-J. Kuo, Y.-L. L. Fang, and S. Y.-C. Chen, “Quantum architecture search via deep reinforcement learning,” *arXiv preprint arXiv:2104.07715*, 2021.
- [6] M. Ostaszewski, L. M. Trenkwalder, W. Masarczyk, E. Scerri, and V. Dunjko, “Reinforcement learning for optimization of variational quantum circuit architectures,” *Advances in Neural Information Processing Systems*, vol. 34, pp. 18182–18194, 2021.
- [7] Y. J. Patel, A. Kundu, M. Ostaszewski, X. Bonet-Monroig, V. Dunjko, and O. Danaci, “Curriculum reinforcement learning for quantum architecture search under hardware errors,” in *The Twelfth International Conference on Learning Representations*, 2024.
- [8] P. Wang, M. Usman, U. Parampalli, L. C. Hollenberg, and C. R. Myers, “Automated quantum circuit design with Nested Monte Carlo Tree Search,” *IEEE Transactions on Quantum Engineering*, 2023.
- [9] V. Lipardi, D. Dibeneditto, G. Stamoulis, and M. H. M. Winands, “Quantum circuit design using a progressive widening enhanced monte carlo tree search,” *Advanced Quantum Technologies*, vol. 8, no. 10, p. e2500093, 2025.
- [10] Z. He, C. Chen, L. Li, S. Zheng, and H. Situ, “Quantum architecture search with meta-learning,” *Advanced Quantum Technologies*, vol. 5, no. 8, p. 2100134, 2022.
- [11] Z. He, H. Chen, Y. Zhou, H. Situ, Y. Li, and L. Li, “Self-supervised representation learning for bayesian quantum architecture search,” *Physical Review A*, vol. 111, no. 3, p. 032403, 2025.
- [12] M. Larocca, S. Thanasilp, S. Wang, K. Sharma, J. Biamonte, P. J. Coles, L. Cincio, J. R. McClean, Z. Holmes, and M. Cerezo, “Barren plateaus in variational quantum computing,” *Nature Reviews Physics*, vol. 7, no. 4, pp. 174–189, 2025.
- [13] M. Cerezo, A. Arrasmith, R. Babbush, S. C. Benjamin, S. Endo, K. Fujii, J. R. McClean, K. Mitarai, X. Yuan, L. Cincio, *et al.*, “Variational quantum algorithms,” *Nature Reviews Physics*, vol. 3, no. 9, pp. 625–644, 2021.
- [14] S. Thanasilp, S. Wang, M. Cerezo, and Z. Holmes, “Exponential concentration in quantum kernel methods,” *Nature communications*, vol. 15, no. 1, p. 5200, 2024.
- [15] H. R. Grimsley, S. E. Economou, E. Barnes, and N. J. Mayhall, “An adaptive variational algorithm for exact molecular simulations on a quantum computer,” *Nature communications*, vol. 10, no. 1, p. 3007, 2019.
- [16] G. M. J.-B. Chaslot, M. H. M. Winands, H. J. van den Herik, J. W. H. M. Uiterwijk, and B. Bouzy, “Progressive strategies for Monte-Carlo Tree Search,” *New Mathematics and Natural Computation*, vol. 4, no. 3, pp. 343–357, 2008.
- [17] D. Gottesman, “The heisenberg representation of quantum computers,” *arXiv preprint quant-ph/9807006*, 1998.
- [18] L. Leone, S. F. Oliviero, and A. Hama, “Stabilizer rényi entropy,” *Physical Review Letters*, vol. 128, no. 5, p. 050402, 2022.
- [19] V. Lipardi, D. Dibeneditto, G. Stamoulis, E. van Nieuwenburg, and M. H. M. Winands, “Nonstabilizerness estimation using graph neural networks,” *Machine Learning: Science and Technology*, 2026.
- [20] D. Silver, A. Huang, C. J. Maddison, A. Guez, L. Sifre, G. Van Den Driessche, J. Schrittwieser, I. Antonoglou, V. Panneershelvam, M. Lanctot, *et al.*, “Mastering the game of Go with deep neural networks and tree search,” *nature*, vol. 529, no. 7587, pp. 484–489, 2016.
- [21] Z.-W. Liu and A. Winter, “Many-body quantum magic,” *PRX Quantum*, vol. 3, no. 2, p. 020333, 2022.
- [22] P. S. Tarabunga, E. Tirrito, T. Chanda, and M. Dalmonte, “Many-body magic via pauli-markov chains—from criticality to gauge theories,” *PRX Quantum*, vol. 4, no. 4, p. 040317, 2023.
- [23] T. Spriggs, A. Ahmadi, B. Chen, and E. Greplova, “Quantum resources of quantum and classical variational methods,” *Machine Learning: Science and Technology*, vol. 6, no. 1, p. 015042, 2025.
- [24] C. Capecchi, G. C. Santra, A. Bottarelli, E. Tirrito, and P. Hauke, “Role of nonstabilizerness in quantum optimization,” *arXiv preprint arXiv:2505.17185*, 2025.
- [25] S. Aaronson and D. Gottesman, “Improved simulation of stabilizer circuits,” *Physical Review A—Atomic, Molecular, and Optical Physics*, vol. 70, no. 5, p. 052328, 2004.
- [26] M. Heinrich and D. Gross, “Robustness of magic and symmetries of the stabiliser polytope,” *Quantum*, vol. 3, p. 132, 2019.
- [27] T. Haug and L. Piroli, “Stabilizer entropies and nonstabilizerness monotones,” *Quantum*, vol. 7, p. 1092, 2023.
- [28] P. Sonya Tarabunga, M. Frau, T. Haug, E. Tirrito, and L. Piroli, “A nonstabilizerness monotone from stabilizerness asymmetry,” *Quantum Science and Technology*, vol. 10, no. 4, p. 045026, 2025.
- [29] T. Haug and P. S. Tarabunga, “Efficient witnessing and testing of magic in mixed quantum states,” *npj Quantum Information*, 2026.
- [30] T. Haug and L. Piroli, “Quantifying nonstabilizerness of matrix product states,” *Physical Review B*, vol. 107, no. 3, p. 035148, 2023.
- [31] G. Lami and M. Collura, “Nonstabilizerness via perfect pauli sampling of matrix product states,” *Physical Review Letters*, vol. 131, no. 18, p. 180401, 2023.
- [32] P. S. Tarabunga, E. Tirrito, M. C. Bañuls, and M. Dalmonte, “Nonstabilizerness via matrix product states in the pauli basis,” *Physical Review Letters*, vol. 133, no. 1, p. 010601, 2024.
- [33] A. Sinibaldi, A. F. Mello, M. Collura, and G. Carleo, “Nonstabilizerness of neural quantum states,” *Physical Review Research*, vol. 7, no. 4, p. 043289, 2025.
- [34] A. Gu, S. F. Oliviero, and L. Leone, “Magic-induced computational separation in entanglement theory,” *PRX Quantum*, vol. 6, no. 2, p. 020324, 2025.
- [35] G. E. Fux, E. Tirrito, M. Dalmonte, and R. Fazio, “Entanglement – nonstabilizerness separation in hybrid quantum circuits,” *Phys. Rev. Res.*, vol. 6, p. L042030, Oct 2024.
- [36] L. Leone, S. F. Oliviero, and A. Hama, “Nonstabilizerness determining the hardness of direct fidelity estimation,” *Physical Review A*, vol. 107, no. 2, p. 022429, 2023.
- [37] L. Leone and L. Bittel, “Stabilizer entropies are monotones for magic-state resource theory,” *Physical Review A*, vol. 110, no. 4, p. L040403, 2024.
- [38] G. Lami and M. Collura, “Unveiling the stabilizer group of a matrix product state,” *Physical Review Letters*, vol. 133, no. 1, p. 010602, 2024.
- [39] A. F. Mello, G. Lami, and M. Collura, “Retrieving nonstabilizerness with neural networks,” *Physical Review A*, vol. 111, no. 1, p. 012440, 2025.
- [40] V. Lipardi, D. Dibeneditto, G. Stamoulis, and M. H. M. Winands, “A study on stabilizer rényi entropy estimation using machine learning,” in *2025 IEEE International Conference on Quantum Artificial Intelligence (QAI)*, pp. 159–164, IEEE, 2025.
- [41] R. Coulom, “Efficient selectivity and backup operators in Monte-Carlo Tree Search,” in *International Conference on Computers and Games*, pp. 72–83, Springer, 2007.
- [42] P. Auer, N. Cesa-Bianchi, and P. Fischer, “Finite-time analysis of the multiarmed bandit problem,” *Machine learning*, vol. 47, pp. 235–256, 2002.
- [43] L. Kocsis and C. Szepesvári, “Bandit based Monte-Carlo planning,” in *Machine Learning: ECML 2006: 17th European Conference on Machine Learning Berlin, Germany, September 18-22, 2006 Proceedings 17*, pp. 282–293, Springer, 2006.
- [44] L. Franken, B. Georgiev, S. Mucke, M. Wolter, R. Heese, C. Bauckhage, and N. Piatkowski, “Quantum circuit evolution on NISQ devices,” in *2022 IEEE Congress on Evolutionary Computation (CEC)*, pp. 1–8, IEEE, 2022.
- [45] H. Baier and M. H. M. Winands, “Nested Monte-Carlo Tree Search for Online Planning in Large MDPs,” in *ECAI*, vol. 242, pp. 109–114, 2012.
- [46] M. P. D. Schadd, M. H. M. Winands, M. J. W. Tak, and J. W. H. M. Uiterwijk, “Single-player monte-carlo tree search for SameGame,” *Knowledge-Based Systems*, vol. 34, pp. 3–11, 2012.
- [47] C. D. Rosin, “Multi-armed bandits with episode context,” *Annals of Mathematics and Artificial Intelligence*, vol. 61, no. 3, pp. 203–230, 2011.
- [48] C. Spearman, “The proof and measurement of association between two things,” 1961.

- [49] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *arXiv preprint arXiv:1412.6980*, 2014.
- [50] H.-k. Zhang, C. Zhu, M. Jing, and X. Wang, “Statistical analysis of quantum state learning process in quantum neural networks,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 33133–33160, 2023.
- [51] M. Cerezo, M. Larocca, D. García-Martín, N. L. Diaz, P. Braccia, E. Fontana, M. S. Rudolph, P. Bermejo, A. Ijaz, S. Thanasilp, *et al.*, “Does provable absence of barren plateaus imply classical simulability?,” *Nature Communications*, vol. 16, no. 1, p. 7907, 2025.
- [52] P. Bermejo, P. Braccia, M. S. Rudolph, Z. Holmes, L. Cincio, and M. Cerezo, “Quantum convolutional neural networks are effectively classically simulable,” *PRX Quantum*, vol. 7, p. 020304, Apr 2026.
- [53] C. Y. Kesiku and B. Garcia-Zapirain, “How quantum circuits actually learn: A causal identification of genuine quantum contributions,” *arXiv preprint arXiv:2603.16321*, 2026.
- [54] J. Lee, W. J. Huggins, M. Head-Gordon, and K. B. Whaley, “Generalized unitary coupled cluster wave functions for quantum computation,” *Journal of Chemical Theory and Computation*, vol. 15, no. 1, pp. 311–324, 2018.