

TabSurv: Adapting Modern Tabular Neural Networks to Survival Analysis

Stanislav Kirpichenko* Andrei Konstantinov*,[†] Lev Utkin*
 kirpichenko.sr@gmail.com, andrue.konst@gmail.com, lev.utkin@gmail.com

Higher School of Artificial Intelligence Technologies,
 Peter the Great St. Petersburg Polytechnic University,
 St. Petersburg, Russia

Abstract

Survival analysis on tabular data is a well-studied problem. However, existing deep learning methods are often highly task-specific, which can limit the transfer of new approaches from other domains and introduce constraints that may affect performance. We propose TabSurv, an approach that adapts modern tabular architectures to survival analysis using either the Weibull distribution or non-parametric survival prediction. TabSurv optimizes SurvHL, a novel histogram loss function supporting censored data. In addition to a baseline feed-forward network, we implement deep ensembles of MLPs for survival analysis within TabSurv. In contrast to prior work, the ensemble components are trained in parallel, optimizing survival distribution parameters before averaging, which promotes diversity across ensemble component predictions. We perform a comprehensive empirical evaluation of different proposed architectures on 10 diverse real-world survival datasets. Our results show that TabSurv consistently outperforms on average established classical and deep learning baselines, such as RSF, DeepSurv, DeepHit, SurvTRACE. Notably, deep ensembles with Weibull parametrization instead of non-parametric models achieve the highest average rank by C-index. Overall, our study clarifies how modern tabular neural networks can be adapted and trained to tackle survival analysis problems, offering a strong and reliable approach. The TabSurv implementation is publicly available.

1 Introduction

Survival analysis [20], the statistical study of time-to-event data, is a foundational tool for domains where outcomes are not immediate and observations can be incomplete. Its ability to formally incorporate censored data, where the exact event time for some instances may only be known to exceed a certain point, makes it essential for clinical trials, reliability engineering, financial risk assessment, and beyond. Survival analysis delivers quantifiable insights into event timing uncertainty across these fields.

While classical methods like the Kaplan-Meier estimator [24] and Cox Proportional Hazards models [8] and Random Survival Forests (RSF) [23] have dominated the field for decades, recent years have seen significant interest in deep learning approaches, including DeepSurv [25], DeepHit [29], and SurvTRACE [46], which aim to capture complex, non-linear relationships in high-dimensional data. In parallel, nonparametric kernel-based methods, such as the Beran estimator [6], provide flexible alternatives by smoothing the empirical survival distribution based on covariate similarity, offering robustness to model misspecification.

Despite this progress, a notable gap persists between advancements in generic tabular deep learning, including TabR [14], TabM [13], RealMLP [19], etc., and their application to survival analysis. Many existing deep survival models are highly task-specific, with architectures and loss functions deeply intertwined

with the survival objective [27]. This specialization can inadvertently limit the field: it restricts the transfer of modern architectures from the broader tabular machine learning domain and may impose modeling constraints that affect flexibility and performance. Some approaches, such as DeepSurv, inherit the proportional hazards assumption from the Cox model, which may not hold in complex real-world scenarios. Others, like DeepHit, relax this assumption but rely on discretizing the time axis, which introduces sensitivity to binning choices and can impair calibration. More recent models, including SurvTRACE, incorporate transformer-based architectures but are often computationally intensive and require large datasets to realize their full potential, conditions rarely met in many survival analysis applications, which typically involve modest sample sizes and high-dimensional covariates. Moreover, these models often lack explicit modular design, making it difficult to swap components (e.g., backbone networks, loss functions, or output parameterizations) without significant re-engineering.

To address this, we propose *TabSurv*, a principled and flexible approach that bridges modern tabular deep learning with survival analysis. Our core contribution is a framework that adapts standard and ensemble-based tabular architectures, such as Multi-Layer Perceptrons (MLPs), to model survival outcomes through two distinct pathways: a Weibull-distribution-based parametric head and a non-parametric survival prediction head. A key peculiarity of TabSurv is the introduction and optimization of a novel histogram-based loss function, called SurvHL, explicitly designed to handle censored data efficiently. Furthermore, we implement a parallel deep ensemble strategy within TabSurv, where each ensemble member independently learns survival distribution parameters before aggregation. Unlike sequential or bagging methods, our ensemble components optimize their respective survival distribution parameters independently before aggregation, ensuring prediction diversity and enhanced robustness.

We conduct a comprehensive empirical evaluation of TabSurv variants on several diverse real-world datasets. Our results demonstrate that TabSurv consistently outperforms established classical (e.g., RSF) and deep learning baselines (e.g., DeepSurv, Deep-

Hit, SurvTRACE). The deep ensemble variant with Weibull parametrization achieves the highest average rank by the concordance index (C-index [16]), highlighting the efficacy of combining modern ensemble techniques with a flexible parametric model. By providing a modular, well-engineered, and publicly available implementation, TabSurv not only advances the state of the art in deep survival analysis, but also offers a reliable foundation for future research and practical deployment. Our work clarifies how off-the-shelf tabular architectures can be systematically adapted to handle censored time-to-event data, opening new avenues for cross-domain knowledge transfer in survival modeling.

Our contributions can be summarized as follows:

1. We propose TabSurv, a flexible approach that adapts modern tabular deep learning architectures to survival analysis, supporting both parametric (Weibull) and non-parametric survival prediction while naturally handling censored data.
2. We propose SurvHL, a novel histogram-based loss function tailored for censored time-to-event data, and develop a parallel training strategy for deep ensembles of MLPs that optimizes survival distribution parameters before averaging, enhancing diversity and predictive performance.
3. Through extensive experiments on diverse real-world survival datasets, we demonstrate that TabSurv consistently outperforms established classical and deep learning baselines, including RSF, DeepSurv, DeepHit, SurvTRACE, with Weibull-based deep ensembles achieving the highest average ranks of survival performance measures, providing new insights into the effectiveness of parametric modeling in deep survival analysis. To summarize the experimental results, the C-index [16], Integrated Brier Score (IBS) [15], and time-dependent (cumulative/dynamic) AUC [42] metrics are applied.

In summary, this study clarifies how contemporary tabular neural networks can be effectively adapted for survival analysis, providing a strong, reliable, and

publicly available approach. The complete implementation of TabSurv is open-sourced to facilitate further research and application.

2 Related Work

Machine learning for survival analysis. Survival analysis concerned with modeling time-to-event outcomes under censoring has benefited substantially from advances in machine learning. Early efforts extended classical statistical models (e.g., Cox regression) with nonparametric and ensemble methods, while recent work increasingly leverages deep learning to capture complex, nonlinear relationships in high-dimensional data. Comprehensive surveys by [33, 38, 43] catalog this evolution, highlighting trends such as scalable deep architectures, handling of competing risks, and integration with electronic health records. Methodological generalizations of survival models are discussed in [4], while [11] emphasize benchmarking and interpretability. Most recently, [49] outline emerging challenges and opportunities in the field, including robustness, fairness, and uncertainty quantification.

Transformer-based models capable of modeling long-range interactions in high-dimensional inputs have gained traction in survival analysis: [47] propose transformers for competing-risk settings, while others develop specialized variants such as ResDeepSurv [44], explainable transformers [40], and general-purpose survival transformers [22]. Applications in clinical domains include multi-modal survival prediction [51], semi-supervised learning [41], and SurFormer [45]. The discussed transformer survival models, in contrast to the proposed approach TabSurv, are based on learning from images rather than from tabular data.

Modern tabular machine learning models. A distinctive feature of many machine learning tasks is that the data are predominantly tabular, comprising lab results, patient characteristics, and similar structured variables. This necessitates the use of models specifically designed for tabular data. Prominent examples include TabR [14], TabM [13], RealMLP [19], TabICL [35], TabPFN [17], MotherNet [34], along with several other recent architec-

tures [18, 26, 32, 37, 50]. Ensembles of tabular models, where multiple neural networks are trained individually and their predictions are averaged, were studied in [28, 48]. Despite the effectiveness of these models with tabular data, their application in survival analysis requires the development of special “extensions” that would enable the creation of new survival models competitive with existing deep learning survival models.

3 Survival analysis: the problem statement

In survival analysis, a dataset is represented by a set of triplets $\mathcal{D} = \{(\mathbf{x}_1, \delta_1, t_1), \dots, (\mathbf{x}_n, \delta_n, t_n)\}$, where $\mathbf{x}_i \in \mathbb{R}^d$ is a d -dimensional feature vector, t_i is the observed time, and $\delta_i \in \{0, 1\}$ is a binary censoring indicator. An observation is *uncensored* ($\delta_i = 1$) if the event of interest (e.g., failure or death) was observed at time t_i . It is *censored* ($\delta_i = 0$) if the event was not observed within the study period, meaning the true event time is known only to exceed t_i . A survival model is trained on $\mathcal{D}$ to estimate probabilistic characteristics of the future event time T for a new subject described by a feature vector $\mathbf{x}$.

A fundamental concept in survival analysis is the *survival function* $S(t | \mathbf{x})$, defined as the probability that a subject with features $\mathbf{x}$ survives beyond time t :

$$S(t | \mathbf{x}) = \mathbb{P}(T > t | \mathbf{x}). \quad (1)$$

Our objective is to estimate the survival function $S(t | x)$. To this end, we discretize time into a set of intervals and represent the survival function via interval probabilities $p_i(x)$, defined as

$$p_i(x) = \mathbb{P}(T \in [\tau_i, \tau_{i+1}) | X = x),$$

where $0 < \tau_1 < \dots < \tau_m < \tau_{m+1} = +\infty$ denote the ordered unique event times. Given $\{p_i(x)\}_{i=1}^m$, the survival function can be approximated as

$$S(t | x) \approx 1 - \sum_{i: \tau_i \leq t} p_i(x).$$

We denote the interval probabilities, predicted by a machine learning model as $\hat{p}_i(\mathbf{x})$, and represent

the estimated survival function as a vector $\hat{\mathbf{S}} = (\hat{S}_1, \dots, \hat{S}_m)$, whose entries $\hat{S}_i(\mathbf{x}) = \sum_{j=1}^i \hat{p}_j(x)$ approximate $S(\tau_i | \mathbf{x})$.

4 TabSurv

In general, TabSurv consists of three main components: a numerical feature embedding module, a neural network backbone, and a survival function construction module. Figure 1 illustrates four proposed architectural variants, starting from the simplest MLP wrapper to deep ensemble, generating Weibull distribution parameters. Below, we describe these variants in detail.

4.1 Architecture details

Logits $\rightarrow$ Survival (LS). The simplest approach is non-parametric, i.e., it does not assume any predefined family of event-time distributions. A neural network of arbitrary architecture, such as a fully connected network or RealMLP, outputs logits corresponding to a discrete set of time intervals. These logits are transformed into a probability distribution over time intervals via the Softmax function, which is then converted into a survival function.

Logits $\rightarrow$ Average $\rightarrow$ Survival (LAS). Unlike classical neural-network-based approaches to survival analysis, we additionally consider deep ensembles, where the neural network consists of m independently trained components. As shown in [13], such ensembles can lead to substantially more accurate models. Technically, training is performed in parallel by minimizing the sum of the loss functions of all ensemble members. Importantly, prediction aggregation is not performed before loss computation, which is crucial for preserving prediction diversity. Indeed, optimizing the sum of losses over independent components is equivalent up to the shared modules to training m ensemble members independently.

A key difference from classical ensembles is the presence of a shared numerical feature embedding module, which is trained jointly for all ensemble members.

This design choice is motivated by the need to balance ensemble diversity with representation efficiency. Low-level numerical feature representations are largely task-agnostic and benefit from being learned from the full data signal, whereas higher-level predictions remain independent across ensemble members. Sharing the embedding module reduces the number of trainable parameters, improves sample efficiency, and stabilizes optimization, while still allowing ensemble members to maintain diversity through independent downstream networks.

In the LAS architecture, each ensemble member outputs logits. During training, these logits are independently transformed into survival functions, and a separate loss is computed for each member. At inference time, the logits are averaged and subsequently converted into a survival function. Thus, the final model represents an ensemble, which can potentially improve generalization performance.

Weibull parameters $\rightarrow$ Survival $\rightarrow$ Average (WSA). Since non-parametric approaches may yield noisy survival function estimates, we also consider a parametric formulation based on the Weibull distribution. We adopt the Weibull distribution as a parametric survival model due to its favorable balance between flexibility and inductive bias. The Weibull family can represent increasing, decreasing, and constant hazard rates, which makes it expressive enough for a wide range of real-world time-to-event processes while remaining low-dimensional and stable to optimize. Compared to more expressive parametric families, the Weibull distribution exhibits well-behaved likelihood surfaces and requires estimating only two positive parameters, λ and k . This significantly reduces estimation variance and improves robustness, especially in low- and moderate-sample regimes. Finally, the Weibull distribution admits a closed-form cumulative distribution and survival function, which allows for efficient discretization on arbitrary time grids and seamless integration with standard survival losses. Although this parameterization is not universal, in practice one can determine its suitability for a given task via cross-validation. As demonstrated in our experiments, the Weibull-based approach achieves

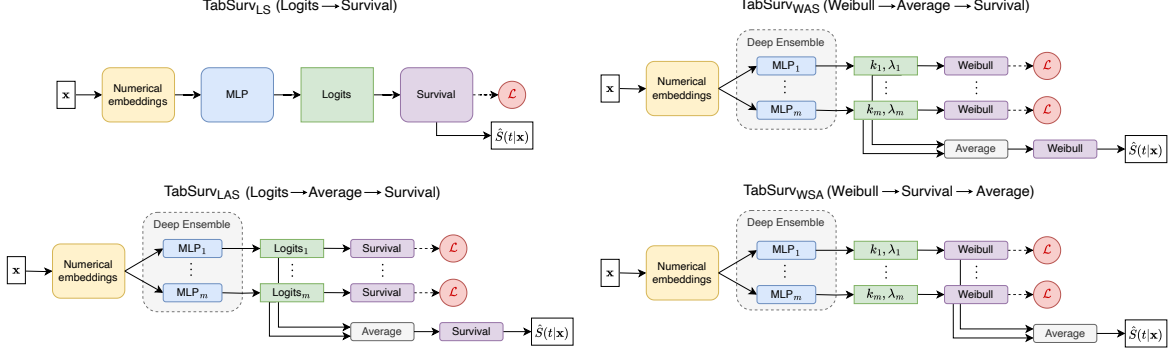


Figure 1: Architectural variants of TabSurv. **Blue** blocks denote learnable neural networks, **Green** blocks denote intermediate parameters, and **Purple** blocks denote the specific survival transformation (Softmax or Weibull). **Dashed** arrows indicate the flow during training (independent losses), while **Solid** arrows indicate the prediction flow (including ensemble averaging).

superior performance on a wide range of real-world datasets.

In the WSA architecture, each ensemble member predicts positive Weibull parameters $\lambda(x)$ and $k(x)$. Based on these parameters, we compute a discretized probability distribution, where each element represents the probability that the event occurs inside the interval $[\tau_i, \tau_{i+1})$:

$$\hat{p}_i(x) = F_W(\tau_{i+1}; \lambda(x), k(x)) - F_W(\tau_i; \lambda(x), k(x)), \quad (2)$$

$$\hat{S}_i(x) = 1 - \sum_{j=1}^i \hat{p}_j(x), \quad (3)$$

where $F_W(\cdot)$ denotes the Weibull cumulative distribution function.

Training proceeds analogously to LAS: each ensemble member is optimized using its own loss function. At inference time, the estimated survival functions are averaged. Consequently, the final survival estimate is a mixture of the survival functions produced by individual ensemble members.

Weibull parameters → Average → Survival (WAS). The WAS architecture differs from WSA only at the inference stage; however, this difference is substantial. Averaging the Weibull parameters prior

to survival function computation results in a final distribution that remains Weibull. While this imposes a strong modeling constraint, it can significantly reduce prediction noise.

Empirically we observe that the multimodality produced by WSA is more likely to reflect estimation noise rather than meaningful uncertainty. Since each MLP is trained independently by fitting the whole distribution, aggregated multimodal survival time estimates cannot represent a complex multimodal distribution. Therefore, WSA should not be regarded as inherently superior to WAS.

4.2 SurvHL loss function

The idea behind the loss function SurvHL is to extend the discretized likelihood commonly used in survival analysis, which is defined by probabilities on discretized time intervals in accordance with a conditional probability distribution of time to event and represented in survival analysis or a single data point $\mathbf{x}_i$ as follows:

$$\ell(\mathbf{x}, t, \delta) = \begin{cases} -\log \hat{p}_{I(t)}(\mathbf{x}), & \delta = 1 \\ -\log \hat{S}_{I(t)}(\mathbf{x}), & \delta = 0, \end{cases} \quad (4)$$

where $I(t) = \max\{i \mid \tau_i \leq t\}$ is the index of the corresponding time interval.

For uncensored events, instead of considering only one discretized time interval (as in classical likelihood), we smooth across several neighboring intervals. This approach ensures a smoother gradient flow through the loss function and makes model training more robust compared to the standard maximum likelihood method.

The formula for a single data point $\mathbf{x}$, for which the predicted probabilities and the survival function vector are denoted for brevity as $\hat{p}$, $\hat{S}$:

$$\ell(\mathbf{x}, t, \delta) = \begin{cases} -\sum_{j=1}^m \omega_j(I(t)) \log(\hat{p}_j), & \delta = 1 \\ -\log \hat{S}_{I(t)}, & \delta = 0, \end{cases} \quad (5)$$

where $\omega_j(I(t))$ are weights derived from the Gaussian distribution centered at $I(t)$ with the standard deviation $\sigma = r/3$, and r is a hyperparameter. Gaussian weighting is chosen for smoothness and locality.

The final loss function is the negative average over a batch of size n :

$$\mathcal{L} = -\frac{1}{n} \sum_{i=1}^n \ell(\mathbf{x}_i, t_i, \delta_i). \quad (6)$$

Figure 2 presents the distribution of the C-index on the validation set obtained during hyperparameter tuning of the TabSurv_{LAS} model on the METABRIC dataset. Among the considered objectives, the SurvHL consistently achieves higher validation performance than both the standard likelihood-based loss and the sigmoid-smoothed C-index, and is therefore selected as the optimization objective.

5 Experiments

5.1 Evaluation metrics

Evaluating survival models requires metrics that account for censoring and time-to-event outcomes. The most widely used measure is *Harrell's concordance index (C-index)*, which quantifies a model ability to correctly rank event times. Let $\mathcal{J}$ denote the set of all pairs (i, j) with $\delta_i = 1$ and $t_i < t_j$. The C-index is computed as

$$C = \frac{\sum_{(i,j) \in \mathcal{J}} \mathbf{1}[\hat{t}_i < \hat{t}_j]}{|\mathcal{J}|}, \quad (7)$$




Figure 2: Hyperparameter tuning results with different loss functions, TabSurv_{LAS} model on METABRIC dataset

where $\hat{t}_i$ and $\hat{t}_j$ are the expected event times approximations derived from the predicted survival function. A C-index of 1 indicates perfect ranking, while a value of 0.5 corresponds to random ordering.

Another important metric is the *Integrated Brier Score (IBS)*, a time-dependent measure that combines discrimination and calibration. For a given time interval $[0, t_{\max}]$, it is defined as

$$IBS = \frac{1}{t_{\max}} \int_0^{t_{\max}} \mathbb{E} \left[\left(\Delta_{\text{new}}(t) - \hat{S}(t | \mathbf{x}_{\text{new}}) \right)^2 \right] dt. \quad (8)$$

where $\Delta_{\text{new}}(t) = \mathbf{1}(T_{\text{new}} > t)$ is the true survival status at t and $\hat{S}(t | \mathbf{x}_{\text{new}})$ is the predicted survival probability. Lower values of the IBS indicate better predictive accuracy.

A complementary time-dependent discrimination metric is the *cumulative/dynamic area under the ROC curve (AUC)*. At a given time t , the time-dependent AUC evaluates the ability of a model to distinguish individuals who experience the event by time t from those who remain event-free at t . Formally, it is defined as the probability that, for a randomly selected pair consisting of one individual with $T \leq t$ and one individual with $T > t$, the model assigns a higher risk score to the former.

In practice, we compute the cumulative/dynamic AUC using the predicted survival probabilities $\hat{S}(t | \mathbf{x})$, with appropriate handling of censoring. To obtain a single summary statistic, we report the time-integrated AUC by averaging the time-dependent

AUC over the evaluation horizon. Higher values of the AUC indicate better discriminative performance.

5.2 Datasets

We evaluate the proposed methods on a collection of 10 real-world survival datasets. The list of datasets and their main characteristics are summarized in Table 2 (Appendix A).

All datasets are preprocessed in a unified manner prior to training. Numerical features are standardized, while categorical features are encoded using a one-hot scheme. Missing values are imputed with the mean for numerical features and with an additional category for categorical features. Features that are missing for all samples are removed from the dataset.

5.3 Methodology

All real-world datasets are split into training, validation, and test sets, with stratification based on censoring indicators. The experimental procedure consists of two stages. The design of the experimental protocol follows the methodology commonly used in modern tabular neural network studies, such as TabR [14] and TabM [13]. This protocol is particularly appropriate for neural models whose training is computationally expensive and whose performance is sensitive to hyperparameter choices. The same protocol is also applied to all competing methods, for which hyperparameter tuning is similarly important. For each dataset, we use a fixed train-validation-test split and repeat training and evaluation with different random seeds. Hyperparameters are selected once for each method within the fixed train-validation part of each dataset, using the validation set, and are then kept fixed across repeated runs rather than re-optimized for each random seed. Thus, the protocol does not use nested cross-validation. Nevertheless, all methods are evaluated under identical conditions, and the held-out test set is never used for model selection or hyperparameter tuning, preventing adaptation to the test portion of a particular split. This setup provides reliable comparisons while remaining feasible for expensive neural baselines. Moreover, most datasets contain at least 500 observations after preprocessing,

and the five largest datasets have held-out test sets ranging from 572 to 2732 samples (Table 2), making the use of held-out test evaluation appropriate for the benchmark.

In the first stage, hyperparameters are tuned using the Tree-structured Parzen Estimator (TPE) sampler implemented in Optuna [1]. The optimal hyperparameter configuration is selected by maximizing the C-index on the validation set. The number of optimization iterations depends on the number of hyperparameters of a given method and ranges from 50 to 200. At this stage, the validation set effectively serves as a test set, while models are trained on the training set. For methods employing early stopping, the validation set is sampled as 25% of the training data.

The second stage corresponds to the final evaluation. Depending on the method, the validation set is either used for early stopping or merged with the training set (as in the case of Random Survival Forests). All evaluation metrics are computed on the held-out test set. At each experimental run, models are ranked according to their performance, separately for the C-index, IBS, and time-dependent AUC. The reported results correspond to the average metric values and average ranks computed over 20 independent runs.

5.4 Results on real-world datasets

The results are summarized using rank-based comparisons across all datasets. For each method, an average rank is computed on each dataset, and the distribution of these average ranks is visualized using boxplots. Figures 3, 4, and 5 report these rank distributions for the C-index, IBS, and time-dependent AUC, respectively. Detailed result tables for each dataset are provided in Appendix D. Methods are ordered according to their mean rank aggregated over all datasets, with lower ranks indicating better overall performance. In all figures, the evaluated methods are denoted as follows. The proposed models are referred to as TabSurv, with a subscript indicating the specific architectural variant (LAS, WSA, or WAS). For the LS architecture, the employed backbone is additionally specified in parentheses (MLP or RealMLP). The Random Survival Forest baseline is abbreviated as

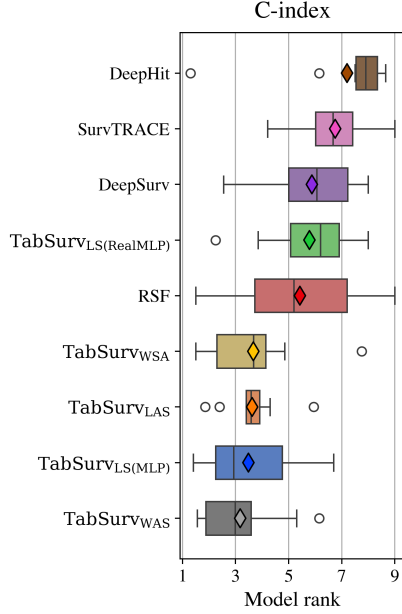


Figure 3: Comparison of model performance across all datasets based on the C-index. Diamonds indicate mean ranks.

RSF. All remaining methods are denoted by their full names without abbreviations.

Across all datasets and evaluation metrics, the best overall performance is achieved by the proposed TabSurvWAS, TabSurvLAS, and TabSurvLS(MLP) models, while all existing baseline methods consistently yield inferior results with respect to C-index, IBS, and time-dependent AUC. The results indicate that employing RealMLP as a backbone without additional architectural adaptations leads to worse performance compared to standard MLPs. Furthermore, the WSA variant underperforms relative to WAS, which is consistent with theoretical considerations regarding noise smoothing properties inherent to the WAS formulation. The LS(MLP) and LAS architectures achieve the lowest Integrated Brier Score, suggesting that these methods provide the most accurate estimates of the survival function shape. In contrast, the WAS variant attains superior C-index and time-dependent AUC values, indicating more accurate ranking of ex-

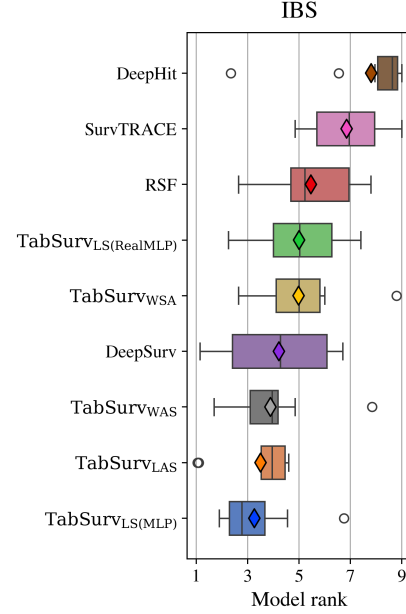


Figure 4: Comparison of model performance across all datasets based on the Integrated Brier Score (IBS). Diamonds indicate mean ranks.

pected event times. This behavior may be attributed to the comparatively simpler optimization of neural networks predicting Weibull distribution parameters, as opposed to models that predict a large number of logits.

5.5 Additional analysis

The empirical results also provide practical guidance on which TabSurv variant to use. The LS(MLP), LAS, and WAS variants are the most accurate overall, but they are preferable in different regimes. The WAS model is attractive when a compact parametric description of event times is adequate, because the two-parameter Weibull head acts as a strong regularizer. This reduction in variance can improve ranking metrics such as the C-index even when the exact Weibull assumption is imperfect. However, the simulation study in Appendix E shows that non-parametric variants are better suited to genuinely multimodal

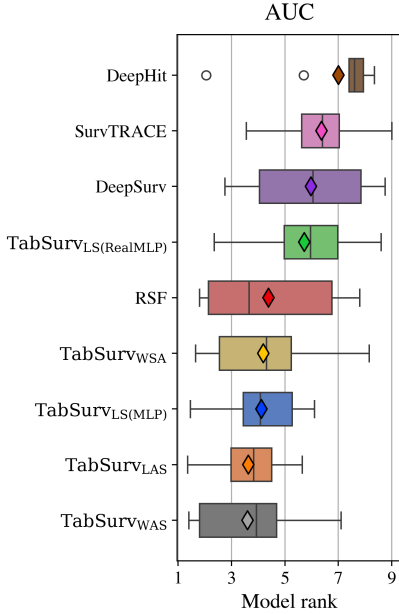


Figure 5: Comparison of model performance across all datasets based on the time-dependent AUC. Diamonds indicate mean ranks.

event-time distributions. Between LS(MLP) and LAS, the former is a more economical choice for smaller datasets, whereas LAS is preferable on larger datasets, where its parameter-efficient ensemble can benefit from more data.

The framework is not tied to a specific backbone or distributional family. In this paper we instantiate it with MLP, TabM-like, and RealMLP-style backbones, observing that the MLP and TabM-like variants are the strongest in the considered survival setting. RealMLP performs worse without the kind of large-scale pretraining used in its original tabular learning context, which suggests that survival-specific adaptation remains important. Extending TabSurv to retrieval-based models such as TabR, or to foundation-style tabular models such as TabPFN and MotherNet, is conceptually possible but requires additional work on survival-compatible output heads and training objectives. Similarly, the Weibull head is only one parametric instance; other families can be substituted

by changing the distribution used to map predicted parameters to survival probabilities.

To assess whether the gains are merely a consequence of using ensembles, we compare TabSurv with independently ensembled DeepSurv and DeepHit baselines in Appendix C.3. The results indicate that external ensembling alone does not explain the performance of TabSurv: LS(MLP) already outperforms DeepSurv and remains competitive with its ensemble, while the independent LS(MLP) ensemble is practically equivalent to LAS but requires substantially more computation. We also compare TabSurv with GBDT-based survival models based on XGBoost survival variants [2]. Table 1 reports Bayesian probabilities that TabSurv_{LS(MLP)} is better, practically equivalent, or worse than two XGBSE variants. TabSurv is either competitive or favorable across the considered metrics, with particularly strong IBS performance against the stacked Weibull variant.

6 Conclusion

We proposed a unified neural framework for tabular survival analysis based on the Survival Histogram Loss and introduced a family of models, TabSurv, that differ in their survival distribution parameterization and aggregation strategies. The framework is architecture-agnostic and supports heterogeneous tabular features through flexible embedding mechanisms.

We evaluated the proposed methods on a diverse set of real-world survival datasets using a rigorous experimental protocol with hyperparameter optimization and repeated runs. Performance was assessed using complementary metrics, C-index, Integrated Brier Score (IBS), and time-dependent AUC, capturing both ranking quality and survival function accuracy.

Across all datasets, TabSurv_{WAS}, TabSurv_{LAS}, and TabSurv_{LS(MLP)} consistently outperformed existing baselines. LAS and LS(MLP) achieved the lowest IBS values, indicating more accurate estimation of survival function shapes, while WAS showed superior performance in terms of C-index and time-dependent AUC, suggesting more reliable event-time ordering. The results also indicate that more complex back-

Baseline	Metric	Better	ROPE	Worse
XGBSEKaplanNeighbors	C-index	0.567	0.254	0.179
XGBSEKaplanNeighbors	IBS	0.293	0.605	0.102
XGBSEKaplanNeighbors	AUC	0.796	0.140	0.064
XGBSEStackedWeibull	C-index	0.254	0.742	0.004
XGBSEStackedWeibull	IBS	0.968	0.032	0.000
XGBSEStackedWeibull	AUC	0.427	0.417	0.156

Table 1: Bayesian comparison between $\text{TabSurv}_{\text{LS(MLP)}}$ and XGBSE-based survival baselines. For C-index and AUC, “Better” denotes $P(\text{TabSurv} > \text{XGBSE})$; for IBS, it denotes $P(\text{TabSurv} < \text{XGBSE})$. The ROPE width is 0.005.

bones, such as RealMLP, do not necessarily improve performance without additional adaptation, and that WAS is preferable to WSA, in line with theoretical considerations on noise smoothing.

Overall, the proposed framework establishes a strong baseline for neural survival modeling on tabular data and offers a flexible foundation for future extensions, including alternative distributional assumptions and more advanced backbone architectures.

Impact Statement

This paper presents work whose goal is to advance the field of Machine Learning. The proposed methods are intended for general-purpose survival modeling and decision support. As with all predictive models applied to sensitive domains, careful validation and responsible use are required.

References

- [1] T. Akiba, S. Sano, T. Yanase, T. Ohta, and M. Koyama. Optuna: A next-generation hyperparameter optimization framework. In *Proceedings of the 25th ACM SIGKDD international conference on knowledge discovery & data mining*, pages 2623–2631, 2019.
- [2] A. Barnwal, H. Cho, and T. Hocking. Survival regression with accelerated failure time model in xgboost. *Journal of Computational and Graphical Statistics*, 31(4):1292–1302, 2022.
- [3] Alessio Benavoli, Giorgio Corani, Janez Demšar, and Marco Zaffalon. Time for a change: A tutorial for comparing multiple classifiers through bayesian analysis. *Journal of Machine Learning Research*, 18(77):1–36, 2017.
- [4] Andreas Bender, David Rügamer, Fabian Scheipl, and Bernd Bischl. A general machine learning framework for survival analysis. In *Joint European conference on machine learning and knowledge discovery in databases*, pages 158–173. Springer, 2020.
- [5] R. Bender, T. Augustin, and M. Blettner. Generating survival times to simulate cox proportional hazards models. *Statistics in Medicine*, 24(11):1713–1723, 2005.
- [6] R. Beran. Nonparametric regression with randomly censored survival data. Technical report, University of California, Berkeley, 1981.
- [7] A.F. Connors, N.V. Dawson, N.A. Desbiens, W.J. Fulkerson, L. Goldman, W.A. Knaus, J. Lynn, R.K. Oye, M. Bergner, A. Damiano, et al. A controlled trial to improve care for seriously iii hospitalized patients: The study to understand prognoses and preferences for outcomes and risks of treatments (support). *Jama*, 274(20):1591–1598, 1995.
- [8] D.R. Cox. Regression models and life-tables. *Journal of the Royal Statistical Society, Series B (Methodological)*, 34(2):187–220, 1972.

- [9] C. Curtis, S.P. Shah, S.F. Chin, and et al. The genomic and transcriptomic architecture of 2,000 breast tumours reveals novel subgroups. *Nature*, 486(7403):346–352, 2012.
- [10] A. Dispenzieri, J.A. Katzmann, R.A. Kyle, D.R. Larson, T.M. Therneau, C.L. Colby, R.J. Clark, G.P. Mead, S. Kumar, L.J. Melton III, et al. Use of nonclonal serum immunoglobulin free light chains to predict overall survival in the general population. In *Mayo Clinic Proceedings*, volume 87, pages 517–523. Elsevier, 2012.
- [11] F. Emmert-Streib and M. Dehmer. Introduction to survival analysis in practice. *Machine Learning & Knowledge Extraction*, 1:1013–1038, 2019.
- [12] T.R. Fleming and D.P. Harrington. *Counting processes and survival analysis*. John Wiley & Sons, 2013.
- [13] Yu. V. Gorishniy, Akim Kotelnikov, and Artem Babenko. Tabm: Advancing tabular deep learning with parameter-efficient ensembling. *ArXiv*, abs/2410.24210, 2024.
- [14] Yury Gorishniy, Ivan Rubachev, Nikolay Kartashev, Daniil Shlenskii, Akim Kotelnikov, and Artem Babenko. Tabr: Tabular deep learning meets nearest neighbors. In *The Twelfth International Conference on Learning Representations*, 2024.
- [15] Erika Graf, Claudia Schmoor, Willi Sauerbrei, and Martin Schumacher. Assessment and comparison of prognostic classification schemes for survival data. *Statistics in medicine*, 18(17-18):2529–2545, 1999.
- [16] F.E. Harrell. *Regression Modeling Strategies*. Springer Cham, 2015.
- [17] Noah Hollmann, Samuel Müller, Katharina Eggensperger, and Frank Hutter. TabPFN: A transformer that solves small tabular classification problems in a second. In *NeurIPS 2022 First Table Representation Workshop*, 2022.
- [18] Noah Hollmann, Samuel Müller, Lennart Purrucker, Arjun Krishnakumar, Max Körfer, Shi Bin Hoo, Robin Tibor Schirrmeyer, and Frank Hutter. Accurate predictions on small data with a tabular foundation model. *Nature*, 637(8045):319–326, 2025.
- [19] D. Holzmüller, L. Grinsztajn, and I. Steinwart. Realmlp: Advancing mlps and default parameters for tabular data. In *ELLIS workshop on Representation Learning and Generative Models for Structured Data*, 2025.
- [20] D. Hosmer, S. Lemeshow, and S. May. *Applied Survival Analysis: Regression Modeling of Time to Event Data*. John Wiley & Sons, New Jersey, 2008.
- [21] D.W. Hosmer, S. Lemeshow, and S. May. Applied survival analysis. *Wiley Series in Probability and Statistics*, 2008.
- [22] Shi Hu, Egill Fridgeirsson, Guido van Wingen, and Max Welling. Transformer-based deep survival analysis. In *Survival Prediction-Algorithms, Challenges and Applications*, pages 132–148. PMLR, 2021.
- [23] H. Ishwaran and U.B. Kogalur. Random survival forests for r. *R News*, 7(2):25–31, 2007.
- [24] E.L. Kaplan and P. Meier. Nonparametric estimation from incomplete observations. *Journal of the American Statistical Association*, 53(282):457–481, 1958.
- [25] J.L. Katzman, U. Shaham, A. Cloninger, J. Bates, T. Jiang, and Y. Kluger. Deepsurv: Personalized treatment recommender system using a Cox proportional hazards deep neural network. *BMC medical research methodology*, 18(24):1–12, 2018.
- [26] M.J. Kim, F. Lefebvre, G. Brison, A. Perez-Lebel, and G. Varoquaux. Table foundation models: on knowledge pre-training for tabular learning. arXiv:2505.14415, May 2025.

- [27] H. Kvamme and Ø. Borgan. Continuous and discrete-time survival prediction with neural networks. *Lifetime data analysis*, 27(4):710–736, 2021.
- [28] Olivier Laurent, Adrien Lafage, Enzo Tartaglione, Geoffrey Daniel, Jean-Michel Martinez, Andrei Bursuc, and Gianni Franchi. Packed ensembles for efficient uncertainty estimation. In *The Eleventh International Conference on Learning Representations*, 2023.
- [29] C. Lee, W.R. Zame, J. Yoon, and M. van der Schaar. Deephit: A deep learning approach to survival analysis with competing risks. In *32nd Association for the Advancement of Artificial Intelligence (AAAI) Conference*, pages 1–8, 2018.
- [30] Jianfang Liu, T. Lichtenberg, K.A. Hoadley, L.M. Poisson, A.J. Lazar, A.D. Cherniack, A.J. Kovatich, C.C. Benz, D.A. Levine, A.V. Lee, et al. An integrated tcga pan-cancer clinical data resource to drive high-quality survival outcome analytics. *Cell*, 173(2):400–416, 2018.
- [31] C.L. Loprinzi, J.A. Laurie, H.S. Wieand, J.E. Krook, P.J. Novotny, J.W. Kugler, J. Bartel, M. Law, M. Bateman, and N.E. Klatt. Prospective evaluation of prognostic variables from patient-completed questionnaires. north central cancer treatment group. *Journal of Clinical Oncology*, 12(3):601–607, 1994.
- [32] Y. Ma, D. Frauen, E. Javurek, and S. Feuerriegel. Foundation models for causal inference via prior-data fitted networks. arXiv:2506.10914, Jun 2025.
- [33] G. Marinos and D. Kyriazis. A survey of survival analysis techniques. In *HEALTHINF*, pages 716–723, 2021.
- [34] Andreas C Mueller, Carlo A Curino, and Raghu Ramakrishnan. Mothernet: Fast training and inference via hyper-network transformers. In *NeurIPS 2024 Third Table Representation Learning Workshop*, 2024.
- [35] J. Qu, D. Holzmüller, G. Varoquaux, and M. Le Morvan. TabICL: A tabular foundation model for in-context learning on large data. In *Forty-second International Conference on Machine Learning*, 2025.
- [36] P. Royston and D.G. Altman. External validation of a cox prognostic model: principles and methods. *BMC medical research methodology*, 13(1):33, 2013.
- [37] Ivan Rubachev, Akim Kotelnikov, and Nikolay Kartashev. On finetuning tabular foundation models. arXiv:2506.08982, Jun 2025.
- [38] Stephen Salerno and Yi Li. High-dimensional survival analysis: Methods and applications. *Annual review of statistics and its application*, 10:25–49, 2023.
- [39] M. Schumacher, G. Bastert, H. Bojar, K. Hübner, M. Olschewski, W. Sauerbrei, C. Schmoor, C. Beyerle, R.L. Neumann, and H.F. Rauschecker. Randomized 2 x 2 trial evaluating hormonal treatment and the duration of chemotherapy in node-positive breast cancer patients. german breast cancer study group. *Journal of Clinical Oncology*, 12(10):2086–2093, 1994.
- [40] Zhihao Tang, Li Liu, Zongyi Chen, Guixiang Ma, Jiyan Dong, Xujie Sun, Xi Zhang, Chaozhuo Li, Qingfeng Zheng, Lin Yang, et al. Explainable survival analysis with uncertainty using convolution-involved vision transformer. *Computerized Medical Imaging and Graphics*, 110:102302, 2023.
- [41] Jing Teng, Lan Yang, Shan Wang, and Jing Yu. A semi-supervised transformer survival prediction model for lung cancer. *Advanced Functional Materials*, page 2419005, 2025.
- [42] H. Uno, Tianxi Cai, M.J. Pencina, R.B. D’Agostino, and Lee-Jen Wei. On the c-statistics for evaluating overall adequacy of risk prediction procedures with censored survival data. *Statistics in medicine*, 30(10):1105–1117, 2011.
- [43] P. Wang, Y. Li, and C.K. Reddy. Machine learning for survival analysis: A survey. *ACM Computing Surveys (CSUR)*, 51(6):1–36, 2019.

- [44] Yuchen Wang, Xianchun Kong, Xiao Bi, Lizhen Cui, Hong Yu, and Hao Wu. Resdeepsurv: A survival model for deep neural networks based on residual blocks and self-attention mechanism. *Interdisciplinary Sciences: Computational Life Sciences*, 16(2):405–417, 2024.
- [45] Zhikang Wang, Qian Gao, Xiaoping Yi, Xinyu Zhang, Yiwen Zhang, Daokun Zhang, Pietro Liò, Chris Bain, Richard Basset, Shanshan Li, et al. Surformer: An interpretable pattern-perceptive survival transformer for cancer survival prediction from histopathology whole slide images. *Computer Methods and Programs in Biomedicine*, 241:107733, 2023.
- [46] Zifeng Wang and Jimeng Sun. Survtrace: Transformers for survival analysis with competing events. In *Proceedings of the 13th ACM international conference on bioinformatics, computational biology and health informatics*, pages 1–9, 2022.
- [47] Zifeng Wang and Jimeng Sun. Survtrace: Transformers for survival analysis with competing events. In *Proceedings of the 13th ACM International Conference on Bioinformatics, Computational Biology and Health Informatics*, pages 1–9, 2022.
- [48] Yeming Wen, Dustin Tran, and Jimmy Ba. Batchensemble: An alternative approach to efficient ensemble and lifelong learning. In *International Conference on Learning Representations*, 2020.
- [49] Simon Wiegand, Philipp Kopper, Raphael Sonabend, Bernd Bischl, and Andreas Bender. Deep learning for survival analysis: a review. *Artificial Intelligence Review*, 57(65):1–34, 2024.
- [50] Derek Qiang Xu, F Olcay Cirit, Reza Asadi, Yizhou Sun, and Wei Wang. Mixture of in-context prompts for tabular PFNs. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [51] Zhongyu Yao, Tianhang Chen, Lingkuan Meng, and Ka-Chun Wong. A multi-head attention transformer framework for oesophageal cancer survival prediction. In *2024 4th International Conference on Artificial Intelligence, Robotics, and Communication (ICAIRC)*, pages 309–313. IEEE, 2024.

A Datasets

All statistics reported in Table 2 correspond to the datasets after preprocessing. Additional remarks on datasets:

- **SEER.** The processed version of the SEER dataset is obtained from <https://dx.doi.org/10.21227/a9qy-ph35>, where records from multiple years are consistently merged. The official documentation for the raw SEER data is available at <https://seer.cancer.gov/data-software/documentation/seerstat/nov2017/>.
- **TCGA-GBM.** This dataset is derived from the TCGA Pan-Cancer Atlas [30] and includes only patients diagnosed with Glioblastoma Multiforme (GBM).
- For the METABRIC dataset, we use both clinical features and *mRNA expression z-scores*, whereas for all other datasets only clinical features are employed.

Name	Number of samples			Number of features		Event rate
	Train	Validation	Test	Numeric	Categorical	
METABRIC [9]	999	333	572	494	75	42%
SEER	2112	704	1208	4	21	15%
SUPPORT [7]	4779	1594	2732	37	30	68%
TCGA-GBM [30]	312	105	179	5	20	82%
Rotterdam [36]	1565	522	895	5	6	43%
FLC [10]	4133	1378	2363	4	34	28%
GBSG2 [39]	360	120	206	5	4	44%
WHAS500 [21]	262	88	150	6	8	43%
Lung [31]	119	40	69	3	4	72%
PBC [12]	219	73	126	11	15	39%

Table 2: Summary of the datasets used in the experiments.

B Experiment setup

During the experiments, SurvTRACE and several TabSurv models (LAS, WAS, WSA) were executed on an NVIDIA Tesla V100 GPU with 16 GB of memory using CUDA 12.1. Other models (TabSurv_{LS}, DeepHit, DeepSurv, and RSF) were trained on a CPU using up to eight threads simultaneously.

B.1 Tuned hyperparameters

The hyperparameters were tuned using the Optuna framework [1] for each evaluated model, with the following hyperparameter domains:

- **TabSurv_{LS}(MLP)**
 - Number of layers: 1 to 4
 - Number of hidden units per layer: 128, 256, or 512

- Activation function: ReLU, SiLU, or SELU
- Loss parameter r : 1 to 5
- Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
- Batch size: 32, 64, or 96
- Use of layer normalization between layers
- Number of bins in Piecewise Linear Embeddings: 32, 48, or 64
- Use of activation function in numerical embeddings
- Dimensionality of numerical embeddings: 8, 12, or 16

- **TabSurv_{LAS}**

- Number of blocks: 1 to 3
- Number of hidden units per block: 128, 256, or 512
- Number of neural networks in the ensemble: 8, 16, or 32
- Activation function: ReLU, SiLU, or SELU
- Loss parameter r : 1 to 5
- Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
- Batch size: 32, 64, or 96
- Dropout rate: $\theta \sim \text{LogUniform}[10^{-2}, 10^{-1}]$
- Number of bins in Piecewise Linear Embeddings: 32, 48, or 64
- Use of activation function in numerical embeddings
- Dimensionality of numerical embeddings: 8, 12, or 16

- **TabSurv_{LS(RealMLP)}**

- Number of layers: 1 to 4
- Number of hidden units per layer: 128, 256, or 512
- Activation function: Mish or SELU
- Loss parameter r : 1 to 5
- Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
- Batch size: 32, 64, or 96
- Number of frequencies in Periodic Bias Linear DenseNet embeddings: 32, 48, or 64
- Frequency scale in numerical embeddings: $\rho \sim \text{LogUniform}[10^{-2}, 1]$
- Dimensionality of numerical embeddings: 8, 12, or 16

- **TabSurv_{WAS}**

- Number of blocks: 1 to 3
- Number of hidden units per block: 64, 128, or 256

- Number of neural networks in the ensemble: 8, 16, or 32
- Activation function: ReLU or SELU
- Loss parameter r : 1, 3, or 5 bins
- Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
- Batch size: 32, 64, or 96
- Number of bins in Piecewise Linear Embeddings: 32, 48, or 64
- Use of activation function in numerical embeddings
- Dimensionality of numerical embeddings: 8, 12, or 16
- **TabSurv_{WSA}** Hyperparameters are identical to those of **TabSurv_{WSA}**.
- **SurvTRACE** (100 optimization trials)
 - Number of hidden layers: 1 to 4
 - Transformer hidden size: 128, 256, or 512
 - Transformer intermediate size: 128, 256, or 512
 - Number of attention heads: 2, 4, or 8
 - Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
 - Dropout rate: $\theta \sim \text{LogUniform}[10^{-2}, 10^{-1}]$
 - Batch size: 32 or 64
 - Weight decay: $\gamma \sim \text{LogUniform}[10^{-4}, 10^{-1}]$
- **DeepHit**
 - Number of hidden layers: 1 to 4
 - Number of hidden units per layer: 128, 256, or 512
 - Activation function: ReLU or Tanh
 - Batch size: 64, 128, or 256
 - Learning rate: $\alpha_{\text{step}} \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
 - Dropout rate: $\theta \sim \text{LogUniform}[10^{-2}, 10^{-1}]$
 - Use of batch normalization between layers
 - Loss weighting coefficient α in DeepHit: $\alpha \sim \text{U}[0, 1]$
 - Smoothing parameter σ in DeepHit loss: 10^{-3} , 10^{-2} , 10^{-1} , or 1
- **DeepSurv**
 - Number of hidden layers: 1 to 4
 - Number of hidden units per layer: 128, 256, or 512
 - Activation function: ReLU or Tanh
 - Batch size: 64, 128, or 256

$P(A > B)$, C-index	MLP	Emb	Ens	Emb+Ens	SurvHL	SurvHL+Ens	Emb+SurvHL
Emb+SurvHL+Ens+Weib	0.914	0.947	0.734	0.505	0.900	0.743	0.862
Emb+SurvHL+Ens	0.959	0.968	0.709	0.748	0.883	0.265	0.755
SurvHL+Ens	0.785	0.993	0.596	0.742	0.388	–	0.654
SurvHL	0.249	0.892	0.140	0.281	–	0.123	0.180

Table 3: Bayesian ablation of TabSurv components. Rows correspond to model A , columns to model B .

- Learning rate: $\alpha \sim \text{LogUniform}[10^{-4}, 5 \cdot 10^{-3}]$
- Dropout rate: $\theta \sim \text{LogUniform}[10^{-2}, 10^{-1}]$
- Use of batch normalization between layers

- **Random Survival Forest**

- Number of trees in the ensemble: 20, 50, 100, or 200
- Maximum tree depth: 3, 5, or unlimited
- Minimum number of samples required to split a node: 2 samples, 1% of the dataset size, or 5%
- Number of features considered at each split: $\sqrt{d}$ or $\log_2 d$, where d denotes the number of features

C Additional ablations and statistical comparisons


We complement the rank-based summary in the main text with Bayesian comparisons following [3]. For each dataset and method, the metric value is averaged over 20 runs with different random seeds. The Bayesian comparison is then performed across datasets with a region of practical equivalence (ROPE) of 0.005. For the C-index and AUC, larger values are better; for IBS, smaller values are better.

C.1 Component ablation

To isolate the contribution of the main components, we start from a baseline MLP and progressively add numerical embeddings (Emb), ensembling (Ens), the SurvHL loss, and the Weibull head. Table 3 reports the posterior probability that the model in the row outperforms the model in the column in terms of the C-index. The results show that SurvHL, embeddings, and ensembling are most effective when combined: the full non-parametric variant and the Weibull variant both outperform the baseline and most partial configurations with high posterior probability. The Weibull head adds a compact parametric bias that further improves C-index over several non-parametric variants.

C.2 Sensitivity of SurvHL





SurvHL introduces a smoothing parameter r and depends on the discretization grid used to represent the event-time distribution. Table 4 and Figure 10 report C-index values on the METABRIC dataset for several grid sizes and values of r . For each grid, there is a preferred smoothing level, and the best value is obtained with the full grid. At the same time, the total variation across this range of settings is small, indicating that SurvHL is not overly sensitive to these hyperparameters.

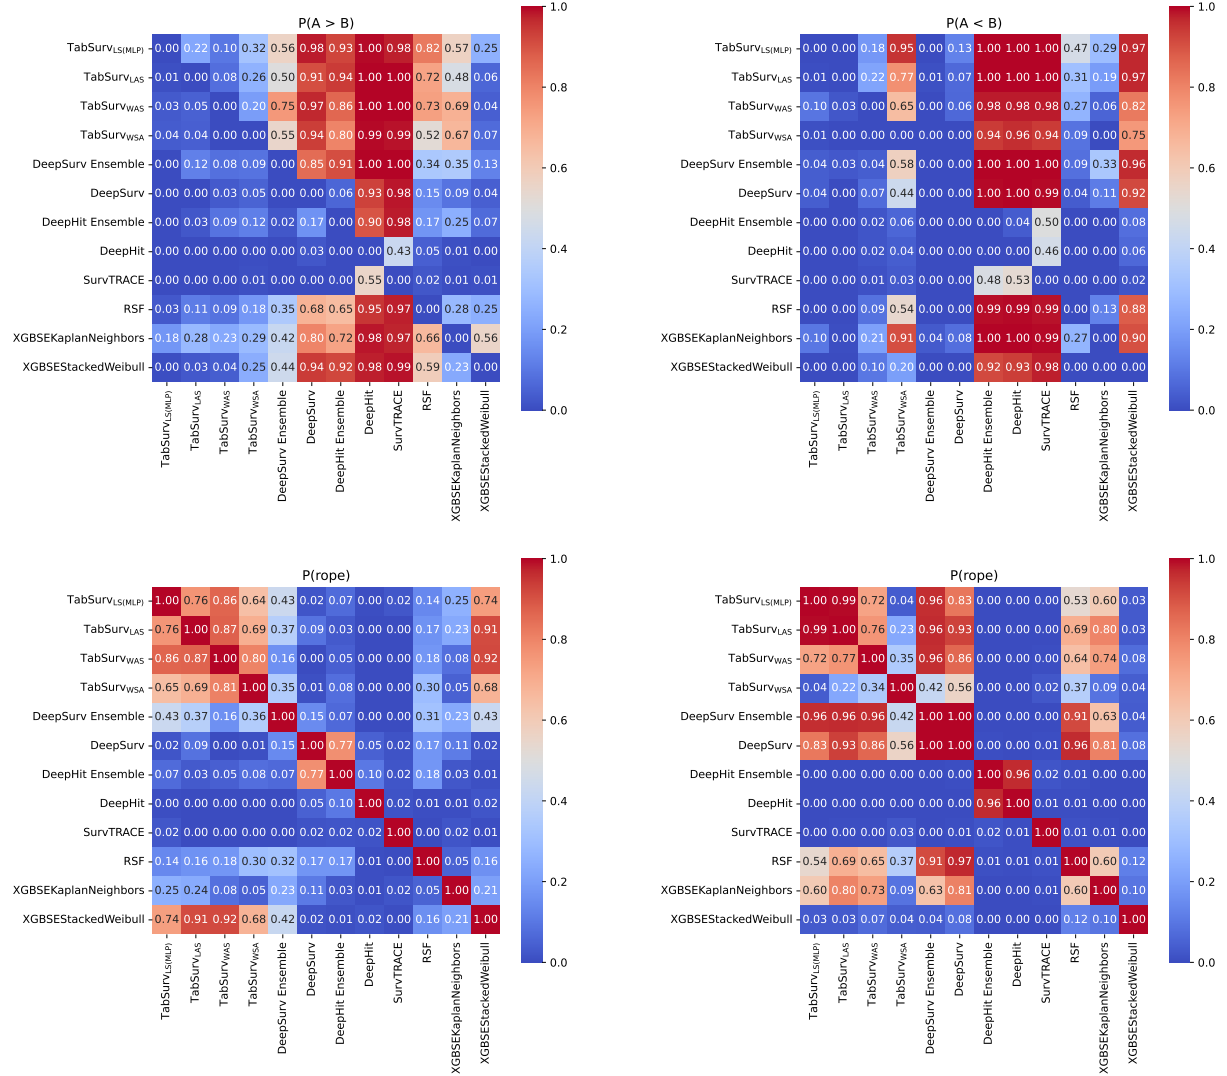

(a) Bayesian pairwise comparison of methods by C-index.

(b) Bayesian pairwise comparison of methods by IBS.

Figure 6: Bayesian pairwise comparisons of methods: (a) by C-index; (b) by IBS.

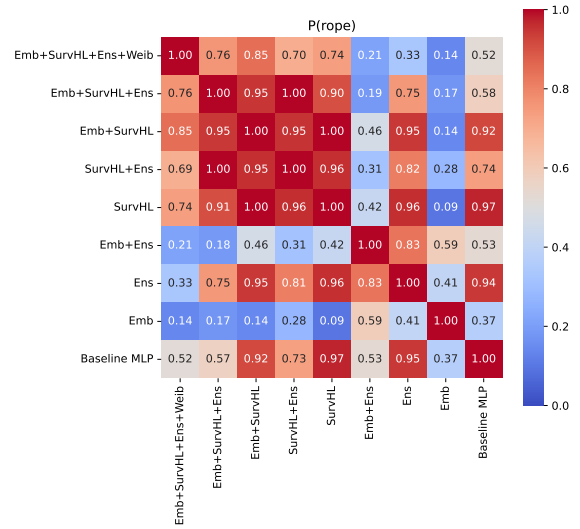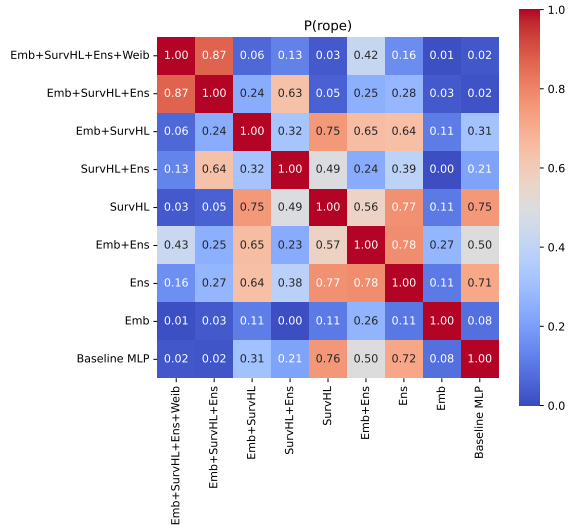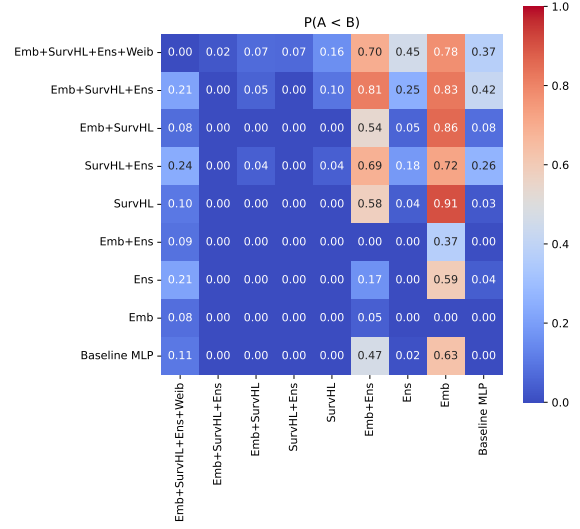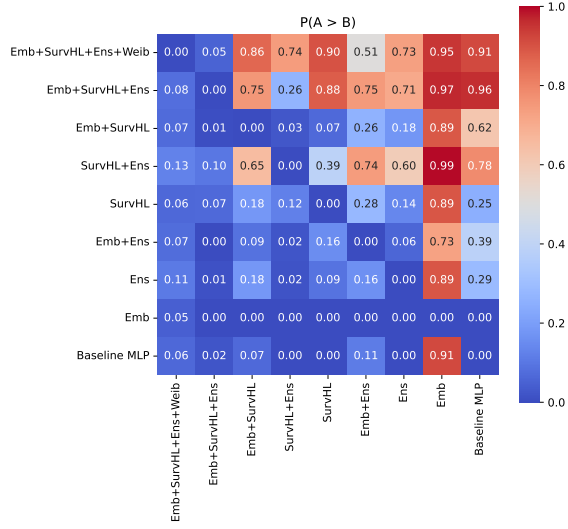

(a) Full Bayesian ablation comparison by C-index.

(b) Full Bayesian ablation comparison by IBS.

Figure 7: Full Bayesian ablation comparisons: (a) by C-index; (b) by IBS.

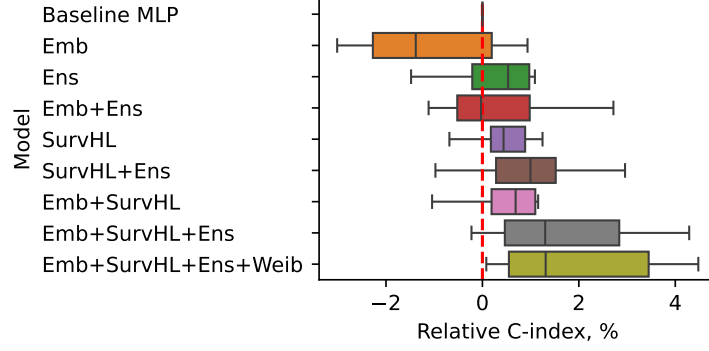


Figure 8: Relative component ablation results by C-index.

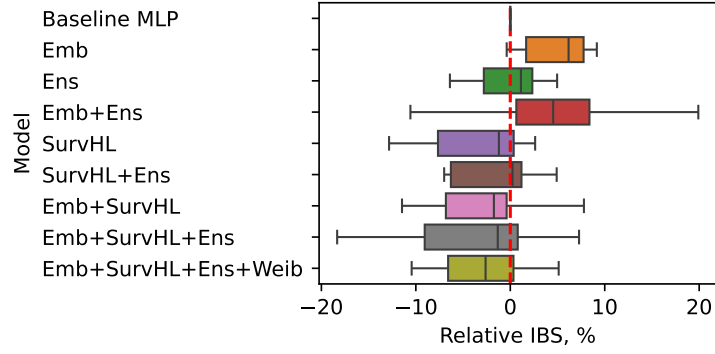


Figure 9: Relative component ablation results by IBS.

Grid	$r = 1$	$r = 5$	$r = 7$	$r = 10$	$r = 15$	$r = 20$
25%	0.81006	0.81313	0.81218	0.81160	0.80970	0.80491
50%	0.80938	0.81105	0.81156	0.81287	0.81211	0.80671
75%	0.80911	0.81159	0.81288	0.81369	0.81175	0.80889
100%	0.80976	0.81368	0.81503	0.81485	0.81447	0.81193

Table 4: C-index on METABRIC for different SurvHL smoothing parameters and time-grid sizes.

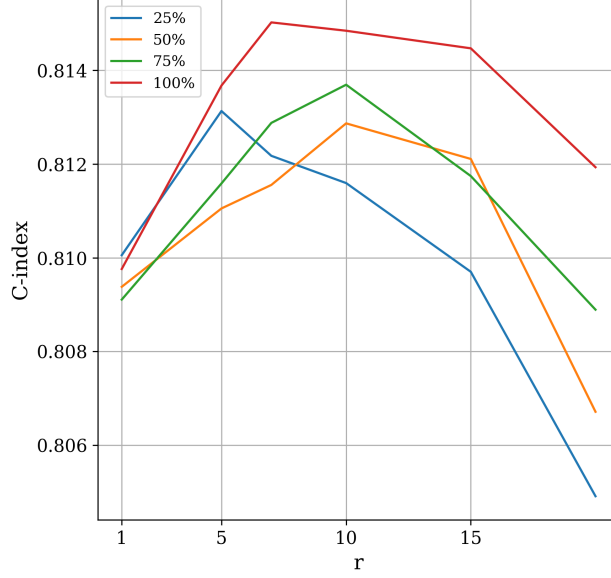


Figure 10: Sensitivity of the METABRIC C-index to the SurvHL smoothing parameter and discretization grid.

C.3 Comparison with external ensembles

The LAS variant uses parameter-efficient ensembling with a shared embedding module. To verify that its gains are not simply due to averaging many independently trained models, we compare it with external ensembles of DeepSurv, DeepHit, and LS(MLP), using 32 independently trained members where applicable. Table 5 reports posterior probabilities of superiority for the C-index, and Table 6 reports the corresponding ROPE probabilities. LS(MLP) already dominates DeepSurv with high probability and remains competitive with DeepSurv Ensemble. The independent LS(MLP) Ensemble is practically equivalent to LAS with high ROPE probability, while LAS is trained as a single shared model and therefore requires fewer computational resources.

$P(A > B)$	LS	LAS	LS Ens	DeepSurv	DS Ens	DH Ens
LS	0.000	0.225	0.162	0.978	0.564	0.926
LAS	0.011	0.000	0.049	0.910	0.502	0.941
LS Ens	0.161	0.112	0.000	0.967	0.835	0.972
DeepSurv	0.000	0.000	0.000	0.000	0.000	0.059
DS Ens	0.002	0.124	0.008	0.851	0.000	0.907
DH Ens	0.001	0.026	0.001	0.168	0.024	0.000

Table 5: Bayesian C-index comparison between TabSurv variants and external ensembles. LS denotes TabSurv_{LS(MLP)}; DS and DH denote DeepSurv and DeepHit.

$P(\text{ROPE})$	LS	LAS	LS Ens	DeepSurv	DS Ens	DH Ens
LS	1.000	0.764	0.674	0.022	0.434	0.073
LAS	0.760	1.000	0.840	0.090	0.370	0.033
LS Ens	0.678	0.838	1.000	0.033	0.157	0.026
DeepSurv	0.022	0.090	0.034	1.000	0.147	0.774
DS Ens	0.433	0.373	0.157	0.149	1.000	0.068
DH Ens	0.073	0.031	0.027	0.775	0.067	1.000

Table 6: ROPE probabilities for the ensemble comparison in Table 5.

D Results of experiments on real data

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.815 $\pm$ 0.003	1.4 $\pm$ 0.5	0.093 $\pm$ 0.002	1.9 $\pm$ 0.3	0.836 $\pm$ 0.007	1.4 $\pm$ 0.6
TabSurv _{LS} (RealMLP)	0.713 $\pm$ 0.004	7.4 $\pm$ 1.1	0.111 $\pm$ 0.002	6.3 $\pm$ 0.9	0.755 $\pm$ 0.005	6.8 $\pm$ 0.8
TabSurv _{LAS}	0.812 $\pm$ 0.003	1.9 $\pm$ 0.7	0.090 $\pm$ 0.001	1.1 $\pm$ 0.3	0.832 $\pm$ 0.003	1.8 $\pm$ 0.6
TabSurv _{WAS}	0.805 $\pm$ 0.004	3.3 $\pm$ 0.5	0.104 $\pm$ 0.011	4.1 $\pm$ 1.8	0.793 $\pm$ 0.008	4.0 $\pm$ 0.7
TabSurv _{WSA}	0.788 $\pm$ 0.006	4.8 $\pm$ 0.4	0.104 $\pm$ 0.004	4.0 $\pm$ 0.9	0.779 $\pm$ 0.009	5.0 $\pm$ 0.9
DeepSurv	0.709 $\pm$ 0.017	7.5 $\pm$ 1.1	0.112 $\pm$ 0.004	6.2 $\pm$ 1.0	0.733 $\pm$ 0.016	8.2 $\pm$ 0.8
DeepHit	0.710 $\pm$ 0.005	7.8 $\pm$ 0.7	0.171 $\pm$ 0.001	8.9 $\pm$ 0.2	0.744 $\pm$ 0.013	7.5 $\pm$ 0.9
SurvTRACE	0.695 $\pm$ 0.072	7.3 $\pm$ 1.3	0.127 $\pm$ 0.015	7.8 $\pm$ 0.6	0.722 $\pm$ 0.076	6.8 $\pm$ 2.1
RSF	0.800 $\pm$ 0.010	3.6 $\pm$ 1.1	0.106 $\pm$ 0.002	4.7 $\pm$ 0.8	0.806 $\pm$ 0.023	3.3 $\pm$ 1.1

Table 7: Comparison of model performance on the METABRIC dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.724 $\pm$ 0.007	6.7 $\pm$ 2.0	0.083 $\pm$ 0.001	6.8 $\pm$ 1.5	0.738 $\pm$ 0.012	6.1 $\pm$ 2.8
TabSurv _{LS} (RealMLP)	0.734 $\pm$ 0.002	2.2 $\pm$ 1.2	0.081 $\pm$ 0.001	3.1 $\pm$ 1.9	0.752 $\pm$ 0.003	2.4 $\pm$ 1.2
TabSurv _{LAS}	0.733 $\pm$ 0.004	3.4 $\pm$ 2.2	0.081 $\pm$ 0.001	4.0 $\pm$ 1.7	0.751 $\pm$ 0.004	3.0 $\pm$ 1.8
TabSurv _{WAS}	0.729 $\pm$ 0.003	5.3 $\pm$ 1.7	0.082 $\pm$ 0.001	4.1 $\pm$ 2.1	0.745 $\pm$ 0.005	5.0 $\pm$ 1.8
TabSurv _{WSA}	0.731 $\pm$ 0.003	4.2 $\pm$ 2.4	0.084 $\pm$ 0.004	5.3 $\pm$ 2.8	0.748 $\pm$ 0.003	4.1 $\pm$ 1.6
DeepSurv	0.729 $\pm$ 0.005	4.9 $\pm$ 2.1	0.081 $\pm$ 0.001	2.4 $\pm$ 1.4	0.748 $\pm$ 0.005	3.8 $\pm$ 1.8
DeepHit	0.723 $\pm$ 0.005	8.0 $\pm$ 0.9	0.209 $\pm$ 0.010	9.0 $\pm$ 0.0	0.730 $\pm$ 0.006	8.1 $\pm$ 0.9
SurvTRACE	0.725 $\pm$ 0.008	5.8 $\pm$ 2.9	0.082 $\pm$ 0.002	5.0 $\pm$ 2.1	0.739 $\pm$ 0.013	5.5 $\pm$ 2.9
RSF	0.731 $\pm$ 0.003	4.5 $\pm$ 2.0	0.082 $\pm$ 0.000	5.3 $\pm$ 1.2	0.738 $\pm$ 0.004	7.0 $\pm$ 0.9

Table 8: Comparison of model performance on the SEER dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.897 $\pm$ 0.000	3.9 $\pm$ 0.5	0.096 $\pm$ 0.002	2.7 $\pm$ 1.2	0.952 $\pm$ 0.000	4.0 $\pm$ 0.7
TabSurv _{LS} (RealMLP)	0.895 $\pm$ 0.001	5.0 $\pm$ 0.4	0.099 $\pm$ 0.002	4.5 $\pm$ 1.4	0.951 $\pm$ 0.000	5.5 $\pm$ 0.6
TabSurv _{LAS}	0.898 $\pm$ 0.001	2.4 $\pm$ 1.0	0.100 $\pm$ 0.005	4.6 $\pm$ 2.4	0.953 $\pm$ 0.001	3.0 $\pm$ 0.9
TabSurv _{WAS}	0.898 $\pm$ 0.001	1.6 $\pm$ 0.9	0.097 $\pm$ 0.005	3.0 $\pm$ 2.5	0.955 $\pm$ 0.001	1.4 $\pm$ 0.7
TabSurv _{WSA}	0.898 $\pm$ 0.000	2.1 $\pm$ 0.8	0.096 $\pm$ 0.002	2.6 $\pm$ 1.6	0.954 $\pm$ 0.001	1.9 $\pm$ 0.6
DeepSurv	0.886 $\pm$ 0.001	7.0 $\pm$ 0.0	0.103 $\pm$ 0.001	6.5 $\pm$ 0.5	0.945 $\pm$ 0.001	7.8 $\pm$ 0.9
DeepHit	0.879 $\pm$ 0.002	8.0 $\pm$ 0.0	0.107 $\pm$ 0.003	8.4 $\pm$ 1.0	0.945 $\pm$ 0.001	8.3 $\pm$ 0.7
SurvTRACE	0.893 $\pm$ 0.001	6.0 $\pm$ 0.2	0.100 $\pm$ 0.004	4.8 $\pm$ 2.0	0.951 $\pm$ 0.001	5.2 $\pm$ 0.9
RSF	0.858 $\pm$ 0.001	9.0 $\pm$ 0.0	0.105 $\pm$ 0.000	7.8 $\pm$ 0.6	0.945 $\pm$ 0.001	7.8 $\pm$ 0.7

Table 9: Comparison of model performance on the SUPPORT dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.863 $\pm$ 0.003	3.1 $\pm$ 1.2	0.062 $\pm$ 0.001	1.9 $\pm$ 0.7	0.918 $\pm$ 0.003	4.4 $\pm$ 1.5
TabSurv _{LS} (RealMLP)	0.853 $\pm$ 0.003	6.0 $\pm$ 1.0	0.063 $\pm$ 0.001	2.2 $\pm$ 1.0	0.913 $\pm$ 0.003	6.5 $\pm$ 1.3
TabSurv _{LAS}	0.861 $\pm$ 0.007	3.8 $\pm$ 1.9	0.066 $\pm$ 0.006	3.5 $\pm$ 2.2	0.915 $\pm$ 0.008	5.7 $\pm$ 2.4
TabSurv _{WAS}	0.861 $\pm$ 0.003	3.7 $\pm$ 1.1	0.065 $\pm$ 0.005	3.2 $\pm$ 1.4	0.917 $\pm$ 0.003	4.7 $\pm$ 1.5
TabSurv _{WSA}	0.862 $\pm$ 0.003	3.5 $\pm$ 1.0	0.074 $\pm$ 0.009	6.0 $\pm$ 1.8	0.918 $\pm$ 0.005	4.5 $\pm$ 1.6
DeepSurv	0.841 $\pm$ 0.008	8.0 $\pm$ 1.0	0.072 $\pm$ 0.002	5.9 $\pm$ 1.0	0.892 $\pm$ 0.009	8.8 $\pm$ 0.5
DeepHit	0.868 $\pm$ 0.003	1.3 $\pm$ 0.6	0.084 $\pm$ 0.001	8.7 $\pm$ 0.7	0.923 $\pm$ 0.003	2.0 $\pm$ 1.2
SurvTRACE	0.837 $\pm$ 0.011	8.3 $\pm$ 0.9	0.077 $\pm$ 0.010	7.0 $\pm$ 1.3	0.910 $\pm$ 0.009	6.7 $\pm$ 2.2
RSF	0.847 $\pm$ 0.004	7.2 $\pm$ 0.8	0.073 $\pm$ 0.001	6.5 $\pm$ 1.0	0.924 $\pm$ 0.002	1.9 $\pm$ 0.8

Table 10: Comparison of model performance on the TCGA-GBM dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.723 $\pm$ 0.002	2.7 $\pm$ 1.5	0.145 $\pm$ 0.001	2.5 $\pm$ 0.7	0.775 $\pm$ 0.003	3.5 $\pm$ 1.3
TabSurv _{LS} (RealMLP)	0.721 $\pm$ 0.002	3.9 $\pm$ 1.4	0.148 $\pm$ 0.002	4.5 $\pm$ 1.6	0.777 $\pm$ 0.003	2.6 $\pm$ 1.2
TabSurv _{LAS}	0.722 $\pm$ 0.002	3.4 $\pm$ 1.3	0.142 $\pm$ 0.000	1.1 $\pm$ 0.2	0.780 $\pm$ 0.003	1.4 $\pm$ 0.9
TabSurv _{WAS}	0.723 $\pm$ 0.002	2.5 $\pm$ 1.3	0.151 $\pm$ 0.008	4.8 $\pm$ 2.0	0.771 $\pm$ 0.005	4.7 $\pm$ 1.6
TabSurv _{WSA}	0.723 $\pm$ 0.002	2.7 $\pm$ 1.4	0.155 $\pm$ 0.012	6.0 $\pm$ 2.2	0.770 $\pm$ 0.004	5.3 $\pm$ 1.1
DeepSurv	0.708 $\pm$ 0.003	7.3 $\pm$ 0.5	0.151 $\pm$ 0.001	6.7 $\pm$ 0.9	0.754 $\pm$ 0.003	7.8 $\pm$ 0.8
DeepHit	0.706 $\pm$ 0.003	7.7 $\pm$ 0.6	0.209 $\pm$ 0.007	8.8 $\pm$ 0.4	0.754 $\pm$ 0.004	8.0 $\pm$ 0.7
SurvTRACE	0.675 $\pm$ 0.015	9.0 $\pm$ 0.0	0.191 $\pm$ 0.104	5.5 $\pm$ 2.4	0.750 $\pm$ 0.014	7.8 $\pm$ 1.8
RSF	0.717 $\pm$ 0.002	5.8 $\pm$ 0.7	0.148 $\pm$ 0.001	5.1 $\pm$ 1.0	0.773 $\pm$ 0.003	4.0 $\pm$ 1.0

Table 11: Comparison of model performance on the Rotterdam dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.936 $\pm$ 0.001	5.0 $\pm$ 1.2	0.047 $\pm$ 0.005	3.5 $\pm$ 1.4	0.955 $\pm$ 0.001	4.2 $\pm$ 1.6
TabSurv _{LS} (RealMLP)	0.935 $\pm$ 0.001	6.4 $\pm$ 1.0	0.047 $\pm$ 0.001	5.5 $\pm$ 0.9	0.951 $\pm$ 0.002	7.8 $\pm$ 1.2
TabSurv _{LAS}	0.937 $\pm$ 0.001	4.3 $\pm$ 1.1	0.046 $\pm$ 0.000	3.6 $\pm$ 1.5	0.955 $\pm$ 0.001	4.5 $\pm$ 1.4
TabSurv _{WAS}	0.938 $\pm$ 0.000	1.6 $\pm$ 0.7	0.046 $\pm$ 0.002	3.8 $\pm$ 1.9	0.957 $\pm$ 0.000	1.6 $\pm$ 0.5
TabSurv _{WSA}	0.938 $\pm$ 0.000	2.1 $\pm$ 0.7	0.047 $\pm$ 0.002	4.7 $\pm$ 2.1	0.950 $\pm$ 0.013	3.0 $\pm$ 3.1
DeepSurv	0.938 $\pm$ 0.000	2.5 $\pm$ 1.0	0.044 $\pm$ 0.000	1.1 $\pm$ 0.4	0.955 $\pm$ 0.001	3.6 $\pm$ 0.9
DeepHit	0.933 $\pm$ 0.001	8.4 $\pm$ 0.7	0.055 $\pm$ 0.001	8.8 $\pm$ 0.7	0.952 $\pm$ 0.001	7.4 $\pm$ 1.5
SurvTRACE	0.930 $\pm$ 0.014	7.5 $\pm$ 1.5	0.055 $\pm$ 0.021	6.8 $\pm$ 1.6	0.934 $\pm$ 0.081	7.1 $\pm$ 1.2
RSF	0.934 $\pm$ 0.001	7.0 $\pm$ 1.2	0.048 $\pm$ 0.000	7.1 $\pm$ 0.8	0.953 $\pm$ 0.001	5.8 $\pm$ 1.5

Table 12: Comparison of model performance on the FLC dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.719 $\pm$ 0.007	2.2 $\pm$ 1.4	0.152 $\pm$ 0.010	2.2 $\pm$ 1.5	0.756 $\pm$ 0.027	5.6 $\pm$ 1.1
TabSurv _{LS} (RealMLP)	0.702 $\pm$ 0.005	6.6 $\pm$ 1.2	0.170 $\pm$ 0.009	6.5 $\pm$ 1.0	0.762 $\pm$ 0.015	5.3 $\pm$ 1.1
TabSurv _{LAS}	0.714 $\pm$ 0.007	3.9 $\pm$ 1.8	0.159 $\pm$ 0.007	4.5 $\pm$ 2.0	0.765 $\pm$ 0.007	5.0 $\pm$ 1.2
TabSurv _{WAS}	0.716 $\pm$ 0.004	3.2 $\pm$ 1.4	0.156 $\pm$ 0.005	4.2 $\pm$ 1.1	0.788 $\pm$ 0.004	1.9 $\pm$ 0.7
TabSurv _{WSA}	0.714 $\pm$ 0.006	3.8 $\pm$ 1.6	0.169 $\pm$ 0.043	5.4 $\pm$ 1.1	0.784 $\pm$ 0.006	2.4 $\pm$ 0.7
DeepSurv	0.700 $\pm$ 0.014	6.3 $\pm$ 2.1	0.152 $\pm$ 0.003	2.6 $\pm$ 1.5	0.755 $\pm$ 0.019	6.0 $\pm$ 1.6
DeepHit	0.669 $\pm$ 0.026	8.7 $\pm$ 0.6	0.202 $\pm$ 0.002	8.0 $\pm$ 0.2	0.689 $\pm$ 0.033	7.9 $\pm$ 0.3
SurvTRACE	0.685 $\pm$ 0.037	6.9 $\pm$ 2.0	0.607 $\pm$ 0.000	9.0 $\pm$ 0.0	0.548 $\pm$ 0.007	9.0 $\pm$ 0.0
RSF	0.715 $\pm$ 0.005	3.3 $\pm$ 1.6	0.152 $\pm$ 0.001	2.6 $\pm$ 0.9	0.788 $\pm$ 0.009	1.9 $\pm$ 1.0

Table 13: Comparison of model performance on the GBSG2 dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.801 $\pm$ 0.026	2.0 $\pm$ 1.8	0.163 $\pm$ 0.018	3.8 $\pm$ 2.0	0.826 $\pm$ 0.044	3.4 $\pm$ 2.4
TabSurv _{LS} (RealMLP)	0.763 $\pm$ 0.017	8.0 $\pm$ 1.1	0.200 $\pm$ 0.016	7.4 $\pm$ 0.8	0.803 $\pm$ 0.020	7.0 $\pm$ 1.8
TabSurv _{LAS}	0.782 $\pm$ 0.006	6.0 $\pm$ 1.1	0.163 $\pm$ 0.008	4.5 $\pm$ 1.7	0.828 $\pm$ 0.008	4.3 $\pm$ 1.5
TabSurv _{WAS}	0.801 $\pm$ 0.009	2.7 $\pm$ 1.7	0.153 $\pm$ 0.011	2.0 $\pm$ 2.1	0.826 $\pm$ 0.029	3.8 $\pm$ 2.2
TabSurv _{WSA}	0.795 $\pm$ 0.013	4.1 $\pm$ 2.5	0.198 $\pm$ 0.074	4.3 $\pm$ 2.6	0.809 $\pm$ 0.035	5.9 $\pm$ 2.6
DeepSurv	0.783 $\pm$ 0.018	5.8 $\pm$ 2.1	0.160 $\pm$ 0.010	3.5 $\pm$ 1.6	0.811 $\pm$ 0.020	6.2 $\pm$ 2.3
DeepHit	0.780 $\pm$ 0.013	6.2 $\pm$ 1.9	0.194 $\pm$ 0.025	6.5 $\pm$ 1.7	0.820 $\pm$ 0.018	5.7 $\pm$ 2.2
SurvTRACE	0.777 $\pm$ 0.024	6.2 $\pm$ 2.6	0.350 $\pm$ 0.153	8.2 $\pm$ 1.6	0.801 $\pm$ 0.063	5.8 $\pm$ 2.7
RSF	0.793 $\pm$ 0.006	4.1 $\pm$ 1.2	0.162 $\pm$ 0.003	4.8 $\pm$ 1.0	0.839 $\pm$ 0.008	2.8 $\pm$ 1.7

Table 14: Comparison of model performance on the WHAS500 dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.649 ± 0.012	2.3 ± 0.8	0.166 ± 0.003	2.9 ± 1.5	0.646 ± 0.014	3.0 ± 1.0
TabSurv _{LS} (RealMLP)	0.588 ± 0.045	5.4 ± 1.6	0.167 ± 0.002	3.9 ± 1.2	0.604 ± 0.034	4.8 ± 1.2
TabSurv _{LAS}	0.621 ± 0.037	3.9 ± 1.8	0.169 ± 0.006	4.3 ± 1.3	0.630 ± 0.022	3.8 ± 1.3
TabSurv _{WAS}	0.571 ± 0.032	6.2 ± 1.3	0.295 ± 0.077	7.8 ± 0.7	0.528 ± 0.039	7.1 ± 1.2
TabSurv _{WSA}	0.517 ± 0.042	7.8 ± 1.5	0.392 ± 0.081	8.8 ± 0.4	0.486 ± 0.029	8.2 ± 0.9
DeepSurv	0.624 ± 0.024	4.0 ± 1.4	0.170 ± 0.004	5.0 ± 1.7	0.648 ± 0.032	2.8 ± 1.5
DeepHit	0.517 ± 0.061	7.5 ± 1.7	0.165 ± 0.001	2.4 ± 1.1	0.519 ± 0.045	7.4 ± 1.2
SurvTRACE	0.549 ± 0.082	6.5 ± 2.2	0.210 ± 0.082	6.2 ± 2.3	0.556 ± 0.081	6.2 ± 2.6
RSF	0.668 ± 0.018	1.5 ± 1.2	0.166 ± 0.004	3.7 ± 2.3	0.670 ± 0.023	1.8 ± 1.0

Table 15: Comparison of model performance on the Lung dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

	C-index		IBS		AUC	
	Mean ($\uparrow$)	Rank ($\downarrow$)	Mean ($\downarrow$)	Rank ($\downarrow$)	Mean ($\uparrow$)	Rank ($\downarrow$)
TabSurv _{LS} (MLP)	0.981 ± 0.013	5.4 ± 1.0	0.046 ± 0.050	4.5 ± 1.2	0.985 ± 0.013	5.5 ± 1.1
TabSurv _{LS} (RealMLP)	0.969 ± 0.017	7.0 ± 0.5	0.057 ± 0.046	6.0 ± 0.7	0.955 ± 0.011	8.6 ± 0.5
TabSurv _{LAS}	0.993 ± 0.002	3.4 ± 0.5	0.033 ± 0.004	4.0 ± 0.9	0.992 ± 0.007	3.9 ± 1.1
TabSurv _{WAS}	0.997 ± 0.001	1.6 ± 0.6	0.023 ± 0.006	1.7 ± 1.1	0.999 ± 0.001	1.8 ± 0.8
TabSurv _{WSA}	0.997 ± 0.001	1.5 ± 0.5	0.029 ± 0.009	2.7 ± 1.5	0.999 ± 0.001	1.6 ± 0.9
DeepSurv	0.983 ± 0.002	5.3 ± 0.6	0.028 ± 0.002	2.4 ± 0.8	0.991 ± 0.002	4.9 ± 0.9
DeepHit	0.949 ± 0.029	8.5 ± 0.5	0.232 ± 0.011	8.6 ± 0.5	0.952 ± 0.042	7.7 ± 0.9
SurvTRACE	0.977 ± 0.054	4.2 ± 1.7	0.219 ± 0.229	8.0 ± 0.8	0.993 ± 0.010	3.5 ± 1.5
RSF	0.964 ± 0.004	8.1 ± 0.8	0.069 ± 0.003	7.1 ± 0.4	0.967 ± 0.007	7.5 ± 0.7

Table 16: Comparison of model performance on the PBC dataset across C-index, Integrated Brier Score (IBS), and time-dependent AUC

E Simulation Experiments

As demonstrated in the experiments on real-world datasets, TabSurv_{WAS} achieves the best performance in terms of C-index and time-dependent AUC, while remaining competitive with respect to IBS. However, this behavior may be influenced by the specific characteristics of the considered real datasets. To further investigate the limitations of the proposed methods, we conduct an additional simulation study designed to illustrate scenarios in which TabSurv_{WAS} is clearly less effective than TabSurv_{LAS} with respect to the remaining metrics.

Synthetic event times were generated using the covariates of the Rotterdam dataset. To induce a bimodal time-to-event distribution, each feature vector was randomly assigned to one of two latent clusters using a Bernoulli distribution, with approximately equal cluster sizes. Conditioned on the cluster assignment, event times were sampled from a covariate-dependent Weibull distribution following the procedure described in [5], with parameters defined as

$$\begin{aligned}
\lambda_0 &= 10^{-5}, \quad \lambda_1 = 10^{-10}, \\
k_0 &= 4, \quad k_1 = 6, \\
\beta_0 &\sim \text{U}[0, 1], \quad \beta_1 \sim \text{U}[-1, 1].
\end{aligned} \tag{9}$$

The random cluster assignment induces a bimodal event-time distribution for each covariate vector $\mathbf{x}$.

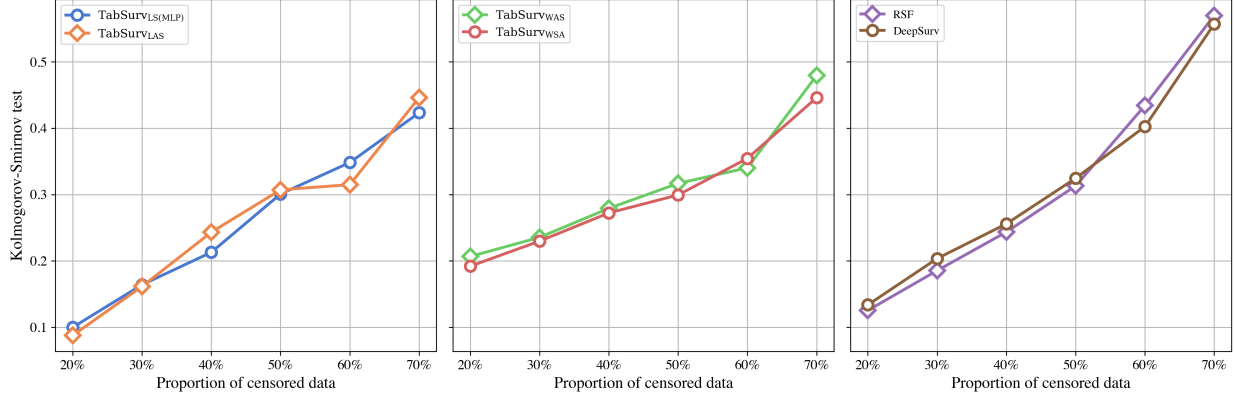


Figure 11: Results of the simulation study evaluated using the Kolmogorov–Smirnov statistic.

Censoring indicators were generated independently using a Bernoulli distribution with a predefined censoring rate. The data were split into training, validation, and test sets using the same protocol as in the original Rotterdam experiments.

The goal of this experiment is to assess how well different models approximate the underlying bimodal event-time distribution. To this end, we employ the Kolmogorov–Smirnov (KS) test to statistically quantify the similarity between the empirical distribution of test event times and the distribution obtained by averaging the predicted discrete probability densities across the test set. The KS statistic is computed exclusively on the test subset. Specifically, each model predicts a discrete event-time distribution for each test instance on a time grid defined by the event times observed in the training set. These predicted distributions are then averaged across all test instances to obtain a population-level prior, which is subsequently compared to the empirical distribution of observed test event times.

The censoring proportion is varied, and each point in Figure 11 corresponds to the average over 100 independent experimental runs. Standard deviations are also reported to illustrate the variability of the results.

Figure 12 visualizes the predicted event-time densities for a single experimental run with 20% censoring, using the SurvHL-TabM, RSF, and SurvHL-WPRM models. Kernel density estimation is used for visualization, as the original discrete distributions consist of approximately 1,000 time intervals, making histogram-based representations difficult to interpret. This figure provides qualitative insight into how different models capture the shape of the simulated event-time distribution.

For clarity of presentation, only a subset of models is included in this experiment, namely TabSurvLS(MLP), TabSurvLAS, RSF, TabSurvWSA, TabSurvWAS, and DeepSurv. These models were selected based on their performance in the real-data experiments.

Figure 11 shows that the TabSurvLS and TabSurvLAS models, which are not constrained by a Weibull distributional assumption, consistently achieve superior performance across all censoring proportions. The event-time distributions predicted by these models are the closest to the empirical distribution observed in the test data.

Figure 12 highlights substantial differences in the shapes of the distributions predicted by the considered models. Among them, TabSurvLAS most closely matches the ground-truth bimodal distribution, providing the most accurate approximation in this setting.

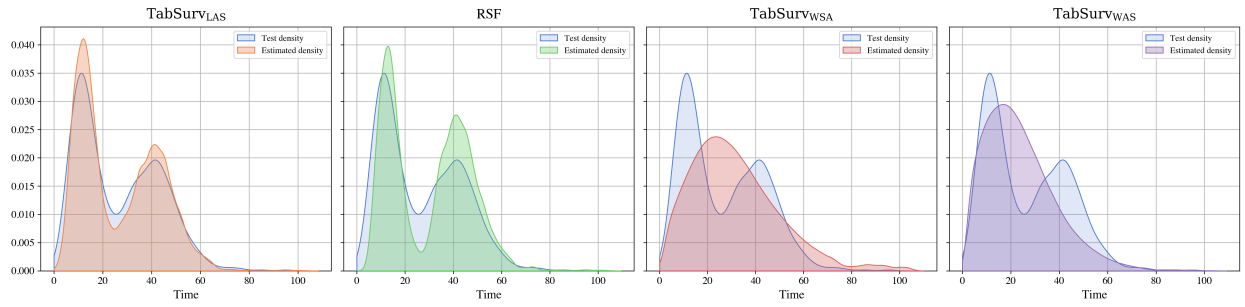


Figure 12: Predicted event-time densities on the simulated dataset for TabSurv_{LAS}, RSF, and TabSurv_{WAS}.