

Feature-Augmented Transformers for Robust AI-Text Detection Across Domains and Generators

Mohamed Mady^{1 2} Johannes Reschke² Björn Schuller^{1 3}

Abstract

AI-generated text is produced at scale across diverse domains and heterogeneous generators, making robustness to distribution shift a central requirement for reliable detection. We train transformer-based detectors on HC3 PLUS and adopt a deployment-realistic fixed-threshold protocol: a single decision threshold is calibrated on held-out validation data and kept fixed across all downstream test distributions. This protocol reveals that near-ceiling in-domain performance (up to 99.5% balanced accuracy) degrades significantly under cross-dataset and generator shift, exposing strong complementary failure modes across backbones (human-preserving vs. AI-aggressive). Feature augmentation that fuses handcrafted linguistic signals with transformer representations via a learnable attention module substantially improves transfer. While BERT and ROBERTa show complementary weaknesses, our best configuration DEBERTa-v3-BASE+FEATATTN yields the most balanced and robust profile, reaching 85.9% balanced accuracy on the multi-domain, multi-generator M4 benchmark (81.3% human recall, 90.5% AI recall). Multi-seed experiments (5 seeds) confirm high stability with a macro-average of $83.15 \pm 1.04\%$ on M4. Under the exact same fixed-threshold protocol, our model outperforms strong zero-shot baselines (Fast-DetectGPT, RADAR, Log-Rank) by up to +7.22 points. Category-level ablations further show that readability and vocabulary features contribute most to robustness under shift. Overall, these results demonstrate that feature augmentation and a modern DeBERTa backbone significantly outperform earlier BERT/RoBERTa models, while the fixed-threshold protocol, combined with generator-aware error profiling and explicit feature analysis, provides a more realistic and informative assessment of practical detector robustness.

1. Introduction

Frontier large language models (LLMs) can generate fluent and persuasive text across a wide range of styles and tasks, accelerating uptake in education, online platforms, and content creation. This proliferation increases the practical demand for AI-generated text detection in settings such as academic integrity, content moderation, and dataset curation (Chakraborty et al., 2024; Mitchell et al., 2023; Hans et al., 2024). However, real-world deployment is complicated by distribution shift: detectors are routinely applied to writing styles, domains, and generation pipelines that differ from those seen during training, where strong in-domain scores can be a misleading indicator of reliability.

We study supervised binary AI-text detection under such shift using a deployment-oriented evaluation protocol. Detectors are trained on HC3 PLUS (Su et al., 2023) and assessed without any target-domain tuning. Instead, each model uses a single decision threshold selected on held-out validation data and then kept fixed when transferring to new domains and generators. We evaluate robustness across three complementary suites: (i) in-domain assess-

ment on HC3 PLUS, (ii) direct cross-dataset transfer to the multi-domain, multi-generator M4 benchmark (English) (Wang et al., 2024), and (iii) external testing on AI-TEXT-DETECTION-PILE (artem9k, 2024). For M4, we report domain-level and generator-level results to expose failure patterns that are obscured by a single aggregate score.

Beyond standard transformer classifiers (BERT, ROBERTa), we investigate feature-augmented detectors that fuse transformer representations with handcrafted linguistic signals (e.g., lexical diversity, POS patterns, readability and punctuation cues, and language-model-derived statistics). We also include DEBERTa-v3-BASE as an additional backbone. In our experiments, it yields a more balanced transfer profile; one plausible explanation is that the v3 family is pre-trained with ELECTRA-style replaced-token detection (Clark et al., 2020; He et al., 2021a), which may encourage representations that are less sensitive to superficial cues that vary under rewriting and cross-domain shift.

We further strengthen the evaluation with multi-seed stability analysis (5 seeds), direct comparisons against strong zero-shot baselines (Fast-DetectGPT, RADAR, Log-Rank) under the identical fixed-threshold protocol, and comprehensive feature-category ablations that quantify the contribution of individual linguistic signals to robustness under shift.

¹Chair of Health Informatics, Technical University of Munich (TUM), Germany ²OTH Regensburg, Germany ³GLAM – Group on Language, Audio & Music, Imperial College London, United Kingdom.

Overall, our study yields three takeaways. First, semantic-invariant evaluation is a high stress test that can expose brittleness masked by near-ceiling performance on the source distribution. Second, calibrating a single validation threshold and keeping it fixed at test time better reflects deployment constraints and reveals domain- and generator-specific failure modes. Third, augmenting transformer representations with explicit linguistic features can improve transfer robustness, but it may also sharpen the trade-off between preserving human text and detecting diverse generators.

2. Related Work

Prior work on AI-generated text detection spans supervised classifiers trained on labelled human-machine data, zero-shot scoring rules derived from language-model probabilities, and provenance-based approaches such as watermarking, with additional work on streaming/online decision-making. This contribution focuses on supervised detection, with particular emphasis on evaluation reliability under distribution shift and on reporting practices that remain meaningful when target-domain labels are unavailable.

Benchmarks for human-LLM comparison have enabled rapid progress by providing paired human and model responses at scale. HC3 offers human-written and ChatGPT-generated answers for the same prompts across diverse question categories, supporting systematic evaluation of supervised baselines (Guo et al., 2023). HC3 PLUS extends this idea by introducing semantic-invariant rewrites (e.g., translation, summarisation, paraphrasing) that preserve the underlying meaning while altering the surface form, substantially increasing detection difficulty (Su et al., 2023). Such settings better reflect deployment conditions in which generated text may be post-edited or re-expressed before reaching a detector.

Supervised detectors typically fine-tune pre-trained encoders such as BERT and ROBERTA for binary classification (Devlin et al., 2019; Liu et al., 2019). Although these models can achieve near-ceiling scores in-domain, multiple studies highlight that performance may degrade under domain shift and generator shift, and that aggregate metrics can conceal brittle behaviour (Chakraborty et al., 2024). This motivates evaluation protocols that explicitly probe robustness across domains, generators, and transformation regimes, together with class-wise reporting to expose asymmetric error patterns.

Zero-shot and model-based detectors aim to reduce reliance on labelled data by exploiting language-model probability structure. DetectGPT uses the curvature of the log-probability function to separate sampled text from human text without supervised training (Mitchell et al., 2023). Binoculars constructs a strong zero-shot detector using a

pair of related language models and reports competitive performance across multiple generators (Hans et al., 2024). These approaches are complementary to supervised methods, but their robustness can depend on model mismatch and on shifts in the target distribution.

Beyond offline classification, online detection considers sequential decisions as tokens arrive. Sequential hypothesis testing via betting provides a principled framework, making the trade-off between detection speed and certainty explicit (Chen & Wang, 2025). While the present study is offline, the same deployment pressures arise as generators and target distributions evolve over time.

Watermarking provides a provenance signal embedded at generation time, enabling later detection or attribution. Recent work optimises watermark trade-offs between detection strength, quality impact, and robustness (Wouters, 2024). At the same time, impossibility results formalise limits on “strong” watermarking that would remain unremovable without quality loss (Zhang et al., 2024). These findings reinforce the need for rigorous evaluation of non-provenance detectors under realistic shift.

Taken together, the literature converges on a common message: strong in-domain performance does not guarantee reliable behaviour under distribution shift.

3. Datasets

We evaluate supervised binary AI-text detection under distribution shift using three complementary benchmarks: (i) HC3 PLUS for in-domain QA and semantic-invariant rewrites, (ii) M4 for cross-dataset transfer across domains and generators (English subset), and (iii) AI-TEXT-DETECTION-PILE for large-scale external evaluation.

3.1. HC3 PLUS

HC3 pairs human answers with ChatGPT outputs for the same prompts (Guo et al., 2023). HC3 PLUS extends this setting with semantic-invariant transformations (e.g., paraphrasing, summarisation, translation), which better reflect post-edited or re-expressed AI text in deployment (Su et al., 2023). All AI responses are generated by ChatGPT (GPT-3.5-TURBO) (Su et al., 2023). Split sizes are reported in Appendix A.

3.2. MULTI-DOMAIN MULTI-GENERATOR M4

M4 is a black-box benchmark designed to stress-test generalisation across domains and generator families (Wang et al., 2024). We use the English subset (78,766 samples; 12,583 Human / 66,183 AI) and report results by domain (wikipedia, wikihow, reddit, arxiv, peerread) and by generator (eight families includ-

ing ChatGPT, Davinci, Cohere, BLOOMZ, Dolly, Dolly2, FlanT5, LLaMA). The domain and generator breakdowns are provided in Appendix A.

3.3. AI-TEXT-DETECTION-PILE

For external evaluation beyond HC3 PLUS and M4, we test on AI-TEXT-DETECTION-PILE, a large-scale out-of-distribution dataset spanning diverse human sources and AI-generated text (artem9k, 2024). Dataset statistics are given in Appendix A.

4. Method

We study supervised binary detection of AI-generated text under realistic distribution shift, i.e., when the test data differ from the training data in domain, writing style, or generator family. Given an input text x , the detector outputs class probabilities $p_\theta(y=0 \mid x)$ for human-written text and $p_\theta(y=1 \mid x)$ for AI-generated text, where $y \in \{0, 1\}$. In what follows we write $p_\theta(x) \equiv p_\theta(y=1 \mid x) \in [0, 1]$ for brevity. Our approach combines (i) strong transformer baselines and (ii) feature-augmented variants that fuse handcrafted linguistic signals with transformer representations via a lightweight feature-attention module. To reflect deployment settings where target-domain labels are unavailable, we calibrate a single global decision threshold on HC3 PLUS validation and keep it fixed for all evaluations.

4.1. Problem Setup and Metric

For a fixed decision threshold τ , predictions are obtained by

$$\hat{y}(x; \tau) = \mathbb{I}[p_\theta(x) \geq \tau]. \quad (1)$$

Since target distributions may be class-imbalanced and errors under shift can be asymmetric, we use *balanced accuracy* (BA) as the primary metric:

$$\text{BA} = \frac{1}{2} (\text{TPR} + \text{TNR}), \quad (2)$$

where TPR is the recall on the AI class (true positive rate) and TNR is the recall on the Human class (true negative rate).

4.2. Base Transformer Detectors

As baselines, we fine-tune pretrained transformer encoders for sequence classification (e.g., BERT, ROBERTA) (Devlin et al., 2019; Liu et al., 2019). Let $h_{[\text{CLS}]}(x) \in \mathbb{R}^d$ denote the pooled representation of the input. A linear head predicts the AI probability:

$$p_\theta(x) = \sigma(W h_{[\text{CLS}]}(x) + b). \quad (3)$$

All models are trained end-to-end with standard cross-entropy loss.

4.3. Handcrafted Features and Global Selection

To complement neural representations with explicit stylistic cues, we extract a handcrafted feature vector $f(x) \in \mathbb{R}^m$ per text ($m=62$), spanning lexical diversity, POS/stylometric statistics, readability and punctuation measures, and LM-based signals such as perplexity and burstiness. For the feature-augmented detectors, we retain a compact subset of $k=30$ features selected once on the source dataset to avoid any target-domain leakage. Concretely, we compute a global importance ranking on the HC3 PLUS training set by combining mutual information and absolute point-biserial correlation with the binary labels, and select the top- k features under this ranking. The selected subset is then fixed for all samples and all test distributions. Full definitions, normalisation, and the exact scoring procedure are reported in Appendix C.3.

4.4. Feature-Attention Fusion Detectors

We define feature-augmented detectors that fuse transformer representations with a learnt, attention-weighted feature embedding. The design is dual-branch: (i) a text branch producing $h_{[\text{CLS}]}(x)$ and (ii) a feature branch that learns *dynamic* per-sample weights over $f_k(x)$ and projects the weighted features into a compact embedding.

Feature attention (dynamic gating). We compute attention weights over the selected features via a small importance network:

$$u(x) = W_2 \phi(\text{LN}(W_1 f_k(x))), \quad (4)$$

$$a(x) = \text{softmax}(u(x)), \quad (5)$$

where $W_1 \in \mathbb{R}^{128 \times k}$, $W_2 \in \mathbb{R}^{k \times 128}$, LN is layer normalisation, and ϕ is ReLU (with dropout during training). We form a weighted feature vector $\bar{f}_k(x) = a(x) \odot f_k(x)$ and project it to a feature embedding:

$$z_f(x) = W_3 \bar{f}_k(x) \in \mathbb{R}^{128}, \quad W_3 \in \mathbb{R}^{128 \times k}. \quad (6)$$

Unlike the Top- k selection (static), this attention is **dynamic** and can vary across samples.

Fusion and prediction. We concatenate the transformer representation and the feature embedding and apply an MLP classifier:

$$h(x) = [h_{[\text{CLS}]}(x); z_f(x)], \quad p_\theta(x) = \sigma(\text{MLP}(h(x))). \quad (7)$$

Instantiations. We instantiate the fusion detector with two backbones: BERT+FEATATTN (built on BERT (Devlin et al., 2019)) and DEBERTA+FEATATTN (built on DEBERTA (He et al., 2021b)), using the deberta-v3-base family (He et al., 2021a)). They share the same handcrafted

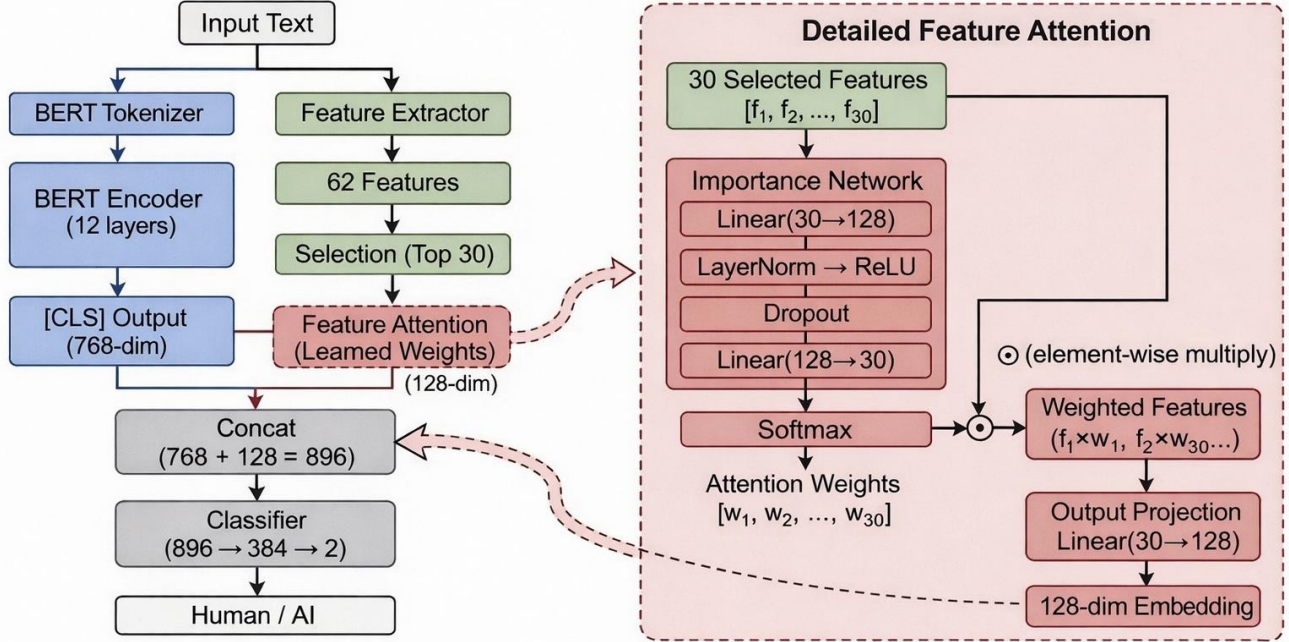


Figure 1. **BERT+FEATATTN architecture.** The input text is encoded by the transformer, yielding a [CLS] representation. In parallel, linguistic features are extracted, reduced to the selected subset, and mapped to a compact embedding via a feature-attention module. The [CLS] vector and feature embedding are concatenated and passed to an MLP classifier to predict Human vs AI.

feature pipeline and feature-attention module, differing only in the text encoder. Figures 1 and 2 illustrate the two architectures.

DeBERTa-v3 backbone. In addition to the DeBERTa-based fusion model, we also evaluate DeBERTa-v3-BASE as a standalone backbone. DeBERTa-v3 uses ELECTRA-style replaced-token detection (RTD) during pre-training, which explicitly trains the encoder to distinguish replaced tokens from original ones (He et al., 2021a). We hypothesise that this objective may be beneficial when superficial cues vary due to rewriting or cross-domain shift.

4.5. Threshold Calibration (Single Global Threshold)

To reflect deployment settings where target-domain labels are unavailable, we calibrate a *single global* decision threshold *per detector* on held-out HC3 PLUS validation data and keep it fixed for all downstream evaluations. For each detector, we pool the two validation views, $\mathcal{D}_{\text{val}} = \text{val}_{\text{qa}} \cup \text{val}_{\text{si}}$, and select a threshold from a fixed grid $\mathcal{T} \subset [0, 1]$ by maximising balanced accuracy on $\mathcal{D}_{\text{val}}$:

$$\tau^* = \arg \max_{\tau \in \mathcal{T}} \text{BA}_{\mathcal{D}_{\text{val}}}(\tau). \quad (8)$$

Once selected, τ^* is kept fixed for all test distributions (no target-domain fine-tuning and no threshold re-calibration), enabling a deployment-motivated assessment of robustness under distribution shift. Grid specification (range and step)

is reported in Appendix C.2.

5. Experimental Protocol

We evaluate supervised binary AI-generated text detection under realistic *distribution shift*. All detectors are fine-tuned on HC3 PLUS (Su et al., 2023) and assessed in three settings: (i) in-domain testing on HC3 PLUS, (ii) held-out cross-dataset transfer to M4 (English) (Wang et al., 2024) with domain- and generator-level reporting, and (iii) external evaluation on AI-TEXT-DETECTION-PILE (artem9k, 2024). To reflect deployment conditions where target-domain labels are unavailable for calibration, we use a validation-calibrated *fixed-threshold* protocol throughout.

5.1. Models Evaluated

We compare two standard transformer baselines, BERT (Devlin et al., 2019) and ROBERTA (Liu et al., 2019), against two feature-augmented detectors that fuse hand-crafted linguistic features with transformer representations via a feature-attention module: BERT+FEATATTN and DeBERTa+FEATATTN (He et al., 2021b). Architectural details are given in Section 4.

5.2. Training and Validation-Calibrated Thresholding

Each detector is fine-tuned on the official HC3 PLUS `train` split. We then calibrate a single decision threshold

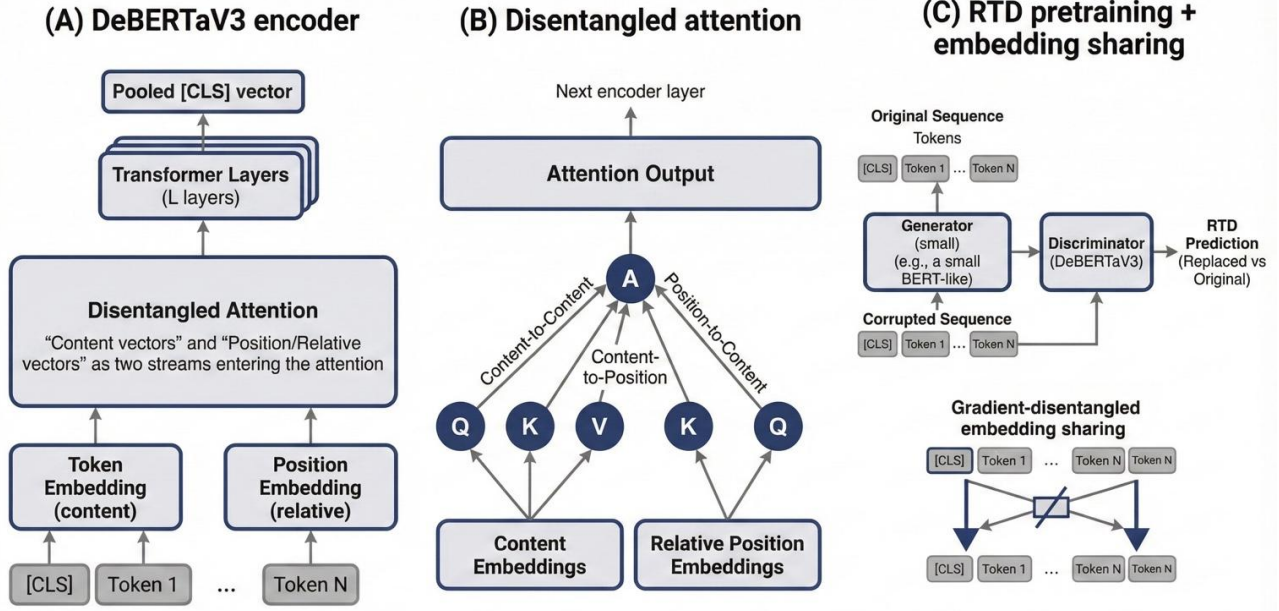


Figure 2. **DeBERTa-v3 overview.** (A) Encoder block using disentangled attention with separate content and relative-position representations. (B) Disentangled attention factorises content-to-content, content-to-position, and position-to-content interactions. (C) ELECTRA-style pre-training via replaced-token detection (RTD) with gradient-disentangled embedding sharing.

per detector on the pooled validation set $\mathcal{D}_{\text{val}} = \text{val_qa} \cup \text{val_si}$. Given predicted probabilities $p_{\theta}(x) \in [0, 1]$ for the AI class, we convert scores to binary decisions using a fixed threshold τ (predict AI if $p_{\theta}(x) \geq \tau$). We select τ^* by grid search over a uniform set of candidate thresholds $\mathcal{T} \subset [0, 1]$ to maximise balanced accuracy on $\mathcal{D}_{\text{val}}$ (grid range and step are specified in Appendix C.2). Once selected, τ^* is kept fixed for all subsequent test distributions, with no target-domain adaptation.

5.3. Evaluation Suites

We assess model robustness across three complementary evaluation suites that together cover the main challenges encountered in real-world deployment.

In-domain (HC3 PLUS). We report results on `test_qa` (question answering) and `test_si` (semantic-invariant rewrites), using the same calibrated threshold τ^* .

Cross-dataset (M4, English; held-out target). We evaluate HC3 PLUS-trained detectors on the five English domains of M4 and report: (i) *domain-level* performance (macro-averaged across domains), and (ii) *generator-level* performance by aggregating predictions by generator label. No target-domain fine-tuning or threshold re-calibration is performed.

External (AI-TEXT-DETECTION-PILE). Finally, we evaluate on AI-TEXT-DETECTION-PILE as a large-scale external benchmark to assess robustness beyond the two primary datasets, again using the same fixed threshold τ^* .

5.4. Metrics and Reporting

We use balanced accuracy (BA; defined in Section 4.1) as the primary metric, as it remains informative under class imbalance and asymmetric failure modes. Where informative (notably for external evaluation and generator-level analysis), we additionally report accuracy, macro-F1, ROC-AUC, and class-wise recall (Human/AI) to make systematic biases explicit.

Implementation details. Optimiser settings, learning-rate schedule, batch size, maximum sequence length, and training epochs are reported in Appendix C.1.

6. Results

We organise results to separate three sources of difficulty: semantic-invariant rewriting within HC3 PLUS, dataset/domain shift on M4, and external shift on AI-TEXT-DETECTION-PILE. Throughout, each model uses a fixed threshold calibrated on HC3 PLUS validation (Section 5), and we highlight how robustness depends on both the target domain and generator family.

6.1. In-domain Performance on HC3 PLUS (Baselines)

We begin with two transformer baselines (BERT and ROBERTA) fine-tuned on the official HC3 PLUS `train` split. Following the fixed-threshold protocol (Section 5), we calibrate one threshold τ^* per detector on the pooled validation set `val_qa` $\cup$ `val_si`, and keep it fixed when evaluating on `test_qa` and `test_si`. Table 1 reports balanced accuracy (BA) as our primary metric.

Model	τ^*	BA <code>test_qa</code>	BA <code>test_si</code>
BERT	0.72	98.26	85.97
ROBERTA	0.76	99.54	86.58

Table 1. HC3 PLUS in-domain BA (%) with fixed τ^* (per detector).

As shown in Table 1, performance is near-ceiling on `test_qa`, whereas the semantic-invariant split `test_si` is markedly more challenging, consistent with meaning-preserving transformations reducing reliance on surface-level cues.

6.2. Cross-dataset Transfer to M4: Domain-level Results (Baselines)

We next evaluate the same HC3 PLUS-trained baselines under dataset shift on the five English M4 domains. To characterise domain-dependent behaviour under a fixed operating point, Table 2 reports BA together with class-wise recall (H-R, AI-R).

Domain	BERT			ROBERTA		
	BA	H-R	AI-R	BA	H-R	AI-R
wikipedia	87.4	90.1	84.7	68.9	48.4	89.3
wikihow	80.7	93.4	68.1	65.0	50.8	79.3
reddit	85.8	99.1	72.4	73.8	53.9	93.8
arxiv	69.4	58.5	80.2	92.3	100.0	84.6
peerread	74.9	100.0	49.8	89.3	99.3	79.3
Macro Avg.	79.6	88.2	71.0	77.9	70.5	85.3

Table 2. M4 domain transfer (English): BA, H-R, AI-R (%). Best BA per row is in bold.

The transfer results in Table 2 are strongly domain-dependent and reveal complementary error profiles under shift. Across several domains, BERT achieves higher H-R (i.e., it is more likely to label samples as Human when appropriate), whereas ROBERTA often achieves higher AI-R (i.e., it more readily labels samples as AI), sometimes at the cost of lower H-R.

6.3. External Evaluation on AI-TEXT-DETECTION-PILE

Finally, we evaluate BERT and ROBERTA (trained on HC3 PLUS) on AI-TEXT-DETECTION-PILE. We keep

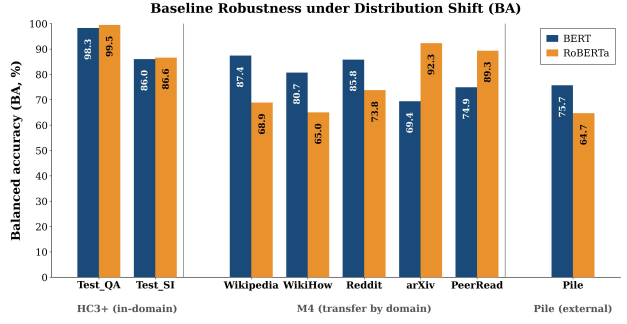


Figure 3. Baseline robustness under distribution shift (BA). Balanced accuracy (BA) of BERT and ROBERTA under a fixed decision threshold calibrated on HC3 PLUS validation and held constant across targets. Results are shown for HC3 PLUS (`test_qa`, `test_si`), M4 English domains, and AI-TEXT-DETECTION-PILE.

thresholds fixed from HC3 PLUS validation and report BA together with class-wise recall and additional metrics (Table 3).

Model	BA	Acc	H-R	AI-R	ROC-AUC	F1
BERT	75.73	82.19	89.26	62.20	87.60	64.61
ROBERTA	64.67	52.67	39.52	89.81	80.68	49.80

Table 3. Pile external: BA / Acc / H-R / AI-R / ROC-AUC / F1 (%).

Table 3 highlights complementary biases under external shift: BERT attains substantially higher H-R, indicating a stronger tendency to classify Human text correctly, whereas ROBERTA attains higher AI-R, indicating a stronger tendency to classify samples as AI.

6.4. In-domain Performance on HC3 PLUS (Feature-augmented Detectors)

We now turn to feature-augmented detectors that fuse 30 selected linguistic features with transformer representations via a feature-attention module (Section 4): BERT+FEATATTN and DEBERTA+FEATATTN. Thresholds are again calibrated on `val_qa` $\cup$ `val_si` and fixed for evaluation. Table 4 reports in-domain BA.

Model	τ^*	BA <code>test_qa</code>	BA <code>test_si</code>
BERT+FEATATTN	0.70	98.83	86.16
DEBERTA+FEATATTN	0.77	99.47	87.21

Table 4. HC3 PLUS in-domain BA (%) for feature-augmented detectors.

As shown in Table 4, DEBERTA+FEATATTN improves BA on both splits at the calibrated operating point.

6.5. Cross-dataset Transfer to M4: Domain-level Results (Feature-augmented Detectors)

We next evaluate the same feature-augmented detectors under direct transfer to M4. Table 5 reports BA by domain.

Domain	BERT+FEATATTN	DEBERTA+FEATATTN
wikipedia	89.96	74.52
wikihow	81.31	79.47
reddit	86.36	90.23
arxiv	75.55	74.69
peerread	76.33	93.00
Macro Avg.	81.90	82.39

Table 5. M4 domain transfer: feature-augmented BA (%).

Table 5 shows pronounced domain dependence under shift, while feature augmentation improves macro-average transfer and changes which backbone performs best depending on the target domain.

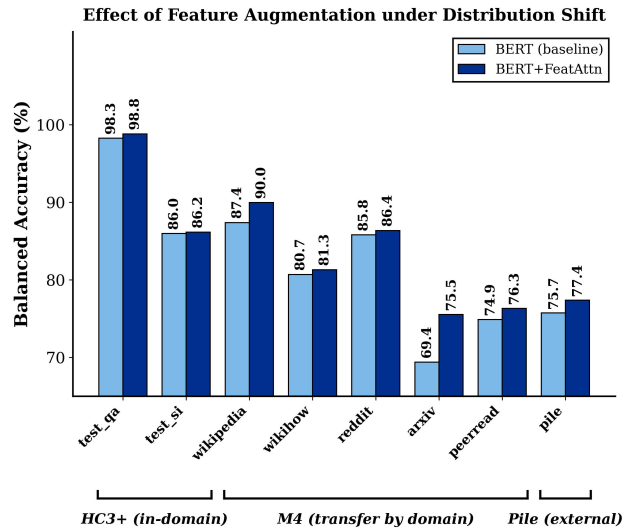


Figure 4. **Effect of feature augmentation under distribution shift (BA).** Balanced accuracy (BA) of BERT versus BERT+FEATATTN under the same fixed threshold calibrated on HC3 PLUS validation. We report in-domain performance on HC3 PLUS (test_qa, test_si), domain-level transfer on M4, and external evaluation on AI-TEXT-DETECTION-PILE. Feature augmentation improves robustness across all targets, with the largest gain on arXiv (+6.15 BA points).

6.6. M4 Error Profiling by Generator

Beyond domain shift, M4 also varies generator families and generation pipelines. To isolate generator-specific behaviour, Table 6 reports class-wise recall computed per generator: the Human row corresponds to recall on human-written text (H-R), and each generator row corresponds to recall on that AI source (AI-R).

Generator	BERT+FEATATTN	DEBERTA+FEATATTN
Human	92.95	69.42
ChatGPT	98.23	99.86
Cohere	90.20	98.20
Davinci	84.74	95.53
Dolly	65.43	86.98
Dolly2	48.83	69.83
Bloomz	29.83	79.84
Llama	12.80	95.22
FlanT5	80.27	93.22

Table 6. M4 generator detection rates: feature-augmented (class-wise recall, %).

Table 6 reveals a clear trade-off: DEBERTA+FEATATTN generalises substantially better across diverse (open and proprietary) generators, whereas BERT+FEATATTN preserves human text more reliably. This motivates class-wise reporting and generator-aware breakdowns rather than relying on a single aggregate score.

6.7. DeBERTa-v3 Optimisation for Balanced Transfer

To further improve robustness under distribution shift and obtain a more balanced error profile, we conducted an optimisation study around DEBERTA-V3-BASE with feature-attention. The best configuration uses 30 selected linguistic features, a weighted loss (Human: 1.5; AI: 1.0), and a fixed validation-calibrated threshold $\tau^* = 0.60$. Table 7 summarises in-domain and cross-dataset performance, while Table 8 reports generator-wise recall on M4.

Test set	BA	H-R	AI-R	ROC-AUC
HC3 QA	99.63 %	99.37 %	99.90 %	1.0000
HC3 SI	86.85 %	81.81 %	91.88 %	0.9566
M4 (All)	85.97 %	81.38 %	90.57 %	0.9437

Table 7. DEBERTA-V3-BASE+FEATATTN best setting (30 features; Human weight 1.5; $\tau^*=0.60$): overall performance (all values in %).

Generator	Samples	Recall
Human	12,583	81.38 %
ChatGPT	12,581	99.80 %
LLaMA	586	96.25 %
Bloomz	12,000	94.59 %
FlanT5	6,000	93.97 %
Cohere	10,142	93.46 %
Davinci	12,586	89.35 %
Dolly2	3,000	76.20 %
Dolly	9,288	73.45 %

Table 8. Generator-wise recall on M4 for the best DEBERTA-V3-BASE+FEATATTN setting. The Human row is Human recall; all other rows are AI recall (in %).

The resulting profile is both strong and comparatively balanced under shift: in-domain performance is near-ceiling

on HC3 QA (99.63% BA) and remains robust on semantic-invariant rewrites (86.85% BA). On M4, the model reaches 85.97% BA with 81.38% Human recall and 90.57% AI recall, while achieving notably high detection on the hardest generator Bloomz (94.59%).

6.8. Multi-Seed Stability and Stronger Baselines

To ensure the reliability and reproducibility of our results, we re-evaluated our best model (DEBERTA-v3-BASE+FEATATTN) across 5 independent random seeds. Results remain highly stable across all datasets and metrics:

Dataset	BA (%)	H-R (%)	AI-R (%)
HC3 QA	99.67 $\pm$ 0.04	99.45 $\pm$ 0.06	99.90 $\pm$ 0.03
HC3 SI	87.34 $\pm$ 0.15	84.71 $\pm$ 1.61	90.00 $\pm$ 1.51
M4 (macro)	83.15 $\pm$ 1.04	80.05 $\pm$ 4.63	86.24 $\pm$ 2.85

Table 9. Multi-seed results for DEBERTA-v3-BASE+FEATATTN (mean $\pm$ std across 5 seeds). BA = Balanced Accuracy, H-R = Human Recall, AI-R = AI Recall.

We also evaluated four strong external baselines under the exact same fixed-threshold protocol to provide a broader comparison:

Method	BA (%)
DeBERTa-v3+FeatAttn (ours)	84.50
Fast-DetectGPT	77.28
Log-Rank (GPT-2)	73.17
RADAR (NeurIPS 2023)	67.82

Table 10. M4 macro-average balanced accuracy under the same fixed-threshold protocol.

Our model outperforms the strongest zero-shot baseline by +7.22 percentage points.

6.9. Feature-Category Ablations

To understand which linguistic signals drive robustness under distribution shift, we performed a complete category-level ablation on the 30 selected features while keeping the operating point fixed. This analysis isolates the contribution of each feature group rather than individual features.

Category (single only)	M4 BA (%)	Human Recall (%)
Readability	83.15	89.80
Coherence	82.94	80.16
Repetition	81.73	74.85
Perplexity	80.81	71.89

Table 11. Single-category-only performance on M4 (macro average).

Removed Category	Δ M4 BA	Interpretation
Readability	-1.65	Largest overall drop
Vocabulary	-1.52	Strongest H-R impact
Stylometric	-1.04	Moderate effect
Perplexity	-0.79	Shifts operating point

Table 12. Leave-one-category-out results on M4 (change from full 30-feature model).

These ablations confirm that **Readability** and **Vocabulary** features are the most critical for achieving robust cross-domain performance.

6.10. External Evaluation on AI-TEXT-DETECTION-PILE and Gemini Generator Shift

We next evaluate our best feature-augmented configuration under external shift, keeping the validation-calibrated operating point fixed ($\tau^* = 0.60$). On AI-TEXT-DETECTION-PILE, DEBERTA-v3-BASE+FEATATTN (30 features; Human loss weight 1.5) attains 71.86% balanced accuracy, with 88.19% AI recall and 55.53% human recall (ROC-AUC 81.47%, F1 56.20%). This profile indicates strong sensitivity to AI text under shift, but also a substantial false-positive rate on human text at the same fixed threshold.

To probe generator shift beyond the benchmark generators, we additionally evaluate on Gemini outputs produced from the HC3 PLUS QA prompts. Specifically, we regenerate answers for the same questions using **Gemini 2.0 Flash**. On these 23,463 Gemini 2.0 Flash answers (all AI-generated), AI recall reaches **99.63%**. We further consider a harder setting with 1,000 answers generated by **Gemini 3.0 Pro**, where AI recall drops to **82.70%**. In summary, these results show that even with an unchanged detector and fixed operating point, transfer can vary substantially across generator families and generation setups.

We further test generalization on a large-scale academic-domain dataset called **Academic Text** (Mady et al., 2026). It consists of 469,008 human-written arXiv paragraphs (collected from papers published before 2022, guaranteeing purely human-generated text) and 200,000 AI-generated academic texts produced via the official APIs: 100,000 samples by GPT-3.5 Turbo and 100,000 samples by Gemini 2.0 Flash. The AI texts were generated on STEM topics carefully matched to the distribution of the human arXiv abstracts, ensuring close semantic and topical alignment. Under the same fixed threshold calibrated on HC3 PLUS validation ($\tau^* = 0.60$), our model achieves an overall balanced accuracy of **81.09%**, with perfect detection on GPT-3.5 Turbo (**100.0%**) and strong performance on Gemini 2.0

Flash (**93.25%**). Human recall on the arXiv text is 75.57%.

In summary, these results show that even with an unchanged detector and fixed operating point, transfer can vary substantially across generator families, domains, and generation setups. The academic-domain evaluation provides additional evidence of robust real-world generalization under distribution shift.

7. Discussion

Our experiments indicate that performance on the source distribution can be a weak proxy for reliability under shift in domain, writing style, and generator family. Evaluating the same fixed-threshold detectors on HC3 PLUS, held-out M4, and AI-TEXT-DETECTION-PILE surfaces error patterns that are not apparent from source-only reporting.

Semantic-invariant evaluation is a particularly stringent stress test. While results are near-ceiling on QA-style data, they drop on meaning-preserving rewrites, suggesting that detectors can exploit surface regularities that do not survive paraphrasing, summarisation, or translation. This gap matters in practice, where AI text is often post-edited or re-expressed before detection.

Holding the decision threshold fixed after validation calibration helps interpret these gaps under realistic constraints. Without re-tuning to each target distribution, transfer on M4 becomes clearly heterogeneous across domains and generators. Multi-seed experiments confirm that our best model (DEBERTA-v3-BASE+FEATATTN) is highly stable ($83.15 \pm 1.04\%$ macro BA on M4), and it consistently outperforms strong zero-shot baselines (Fast-DetectGPT, Log-Rank, RADAR) by up to +7.22 points under the same protocol. Generator-wise reporting further shows that aggregate scores can conceal large swings across generator families, supporting generator-aware profiling alongside domain averages.

Feature augmentation via attention-based fusion improves transfer robustness in several cases, but it also sharpens the operating-point trade-off between human-text preservation and broad generator coverage. Our category-level ablations reveal that **Readability** and **Vocabulary** features contribute most to cross-domain robustness, while other categories have smaller or even detrimental effects under shift.

External evaluation on both AI-TEXT-DETECTION-PILE and the new large-scale **Academic Text** dataset further confirms that the fixed-threshold protocol reveals practically relevant failure modes. Even with an unchanged detector, performance varies substantially across generator families and domains, underscoring the importance of stress-testing under realistic deployment conditions.

Finally, class-wise reporting remains essential beyond the

training distribution. External benchmarks can differ in class priors and error asymmetry, so accuracy alone can be misleading; balanced accuracy together with class-wise recall makes systematic biases explicit. Collectively, our results motivate semantic-invariant stress tests, fixed validation-calibrated operating points, generator-aware error profiling, and explicit feature analysis when assessing practical detector robustness.

Broader Impact and Ethical Considerations. This work aims to improve the robustness of AI-generated text detection in real-world deployment scenarios, supporting content moderation, academic integrity, and the fight against misinformation. By exposing operating-point trade-offs under a fixed-threshold protocol, we highlight practical risks that are often masked in standard evaluations. While our approach strengthens detection reliability, we acknowledge potential dual-use concerns: adversaries could exploit the identified weaknesses to craft harder-to-detect text, and overly aggressive detectors risk false positives that could suppress legitimate human writing. We therefore advocate for transparent, deployment-realistic evaluation and responsible use of such detectors in high-stakes applications.

8. Conclusion

We studied supervised binary AI-text detection under distribution shift using a deployment-oriented fixed-threshold protocol. Detectors were trained on HC3 PLUS, calibrated once on held-out validation, and then evaluated without target adaptation on semantic-invariant rewrites, multi-domain and multi-generator transfer in M4, and external testing on AI-TEXT-DETECTION-PILE.

Across models, near-ceiling in-domain results do not reliably predict performance under shift. Semantic-invariant rewrites act as a strong stress test, and cross-dataset transfer exposes domain- and generator-specific failure modes that are obscured by aggregate reporting. Feature augmentation improves robustness to generator variation, but it sharpens the trade-off between preserving human text and maximising AI recall. External evaluation further highlights the importance of balanced and class-wise metrics for making asymmetric errors explicit.

Overall, these findings motivate evaluation protocols that stress semantic invariance, fix an operating point via held-out validation, and complement aggregate scores with domain- and generator-level analyses.

References

- artem9k. Ai-text-detection-pile, 2024. URL <https://huggingface.co/datasets/artem9k/ai-text-detection-pile>. Hugging Face dataset; Accessed: 2026-01-03.
- Chakraborty, S., Bedi, A., Zhu, S., An, B., Manocha, D., and Huang, F. Position: On the possibilities of AI-generated text detection. In Salakhutdinov, R., Kolter, Z., Heller, K., Weller, A., Oliver, N., Scarlett, J., and Berkenkamp, F. (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 6093–6115. PMLR, July 2024. URL <https://proceedings.mlr.press/v235/chakraborty24a.html>.
- Chen, C. and Wang, J.-K. Online detection of LLM-generated texts via sequential hypothesis testing by betting. In Singh, A., Fazel, M., Hsu, D., Lacoste-Julien, S., Berkenkamp, F., Maharaj, T., Wagstaff, K., and Zhu, J. (eds.), *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 9231–9276. PMLR, July 2025. URL <https://proceedings.mlr.press/v267/chen25bn.html>.
- Clark, K., Luong, M.-T., Le, Q. V., and Manning, C. D. ELECTRA: Pre-training text encoders as discriminators rather than generators. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=rlxMH1BtvB>.
- Cover, T. M. and Thomas, J. A. *Elements of Information Theory*. Wiley, 2 edition, 2006. ISBN 9780471241959.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423/>.
- Guo, B., Zhang, X., Wang, Z., Jiang, M., Nie, J., Ding, Y., Yue, J., and Wu, Y. How close is ChatGPT to human experts? comparison corpus, evaluation, and detection. 2023. doi: 10.48550/arXiv.2301.07597. URL <https://arxiv.org/abs/2301.07597>.
- Hans, A., Schwarzschild, A., Cherepanova, V., Kazemi, H., Saha, A., Goldblum, M., Geiping, J., and Goldstein, T. Spotting LLMs with binoculars: Zero-shot detection of machine-generated text. In Salakhutdinov, R., Kolter, Z., Heller, K., Weller, A., Oliver, N., Scarlett, J., and Berkenkamp, F. (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*. PMLR, 2024. URL <https://proceedings.mlr.press/v235/hans24a.html>.
- He, P., Gao, J., and Chen, W. DeBERTaV3: Improving DeBERTa using ELECTRA-style pre-training with gradient-disentangled embedding sharing. 2021a. doi: 10.48550/arXiv.2111.09543. URL <https://arxiv.org/abs/2111.09543>.
- He, P., Liu, X., Gao, J., and Chen, W. DeBERTa: Decoding-enhanced BERT with disentangled attention. In *International Conference on Learning Representations*, 2021b. URL <https://openreview.net/forum?id=XPZiaotutsD>.
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., and Stoyanov, V. RoBERTa: A robustly optimized BERT pretraining approach. 2019. doi: 10.48550/arXiv.1907.11692. URL <https://arxiv.org/abs/1907.11692>.
- Mady, M., Reschke, J., and Schuller, B. Academic text dataset: A large-scale academic-domain benchmark for ai-generated text detection. <https://huggingface.co/datasets/mohamedmady/Academic-Text-arxiv-gpt-gemini>, 2026. Hugging Face Dataset.
- Mitchell, E., Lee, Y., Khazatsky, A., Manning, C. D., and Finn, C. DetectGPT: Zero-shot machine-generated text detection using probability curvature. In Krause, A., Brunskill, E., Cho, K., Engelhardt, B., and Sabato, S. (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 24950–24962. PMLR, 2023. URL <https://proceedings.mlr.press/v202/mitchell23a.html>.
- Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., Killeen, T., Lin, Z., Gimelshein, N., Antiga, L., Desmaison, A., Kopf, A., Yang, E., DeVito, Z., Raison, M., Tejani, A., Chilamkurthy, S., Steiner, B., Fang, L., Bai, J., and Chintala, S. PyTorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/bdbca288fee7f92f2bfa9f7012727740-Abstract.html>.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A.,

- Courvapeau, D., Brucher, M., Perrot, M., and Duchesnay, É. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011. URL <https://jmlr.org/papers/v12/pedregosalla.html>.
- Su, Z., Wu, X., Zhou, W., Ma, G., and Hu, S. HC3 PLUS: A semantic-invariant human–ChatGPT comparison corpus. 2023. doi: 10.48550/arXiv.2309.02731. URL <https://arxiv.org/abs/2309.02731>.
- Tate, R. F. A note on the correlation between a discrete and a continuous variable. *The Annals of Mathematical Statistics*, 25(3):603–607, 1954. doi: 10.1214/aoms/1177728730.
- Wang, Y., Mansurov, J., Ivanov, P., Su, J., Shelmanov, A., Tsvigun, A., Whitehouse, C., Afzal, O. M., Mahmoud, T., Sasaki, T., Arnold, T., Aji, A. F., Habash, N., Gurevych, I., and Nakov, P. M4: Multi-generator, multi-domain, and multi-lingual black-box machine-generated text detection. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1369–1407, St. Julian’s, Malta, March 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.eacl-long.83. URL <https://aclanthology.org/2024.eacl-long.83/>.
- Wolf, T., Debut, L., Sanh, V., Chaumond, J., Delangue, C., Moi, A., Cistac, P., Rault, T., Louf, R., Funtowicz, M., and Brew, J. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6/>.
- Wouters, B. Optimizing watermarks for large language models. In Salakhutdinov, R., Kolter, Z., Heller, K., Weller, A., Oliver, N., Scarlett, J., and Berkenkamp, F. (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 53251–53269. PMLR, July 2024. URL <https://proceedings.mlr.press/v235/wouters24a.html>.
- Zhang, H., Edelman, B. L., Francati, D., Venturi, D., Ate-niese, G., and Barak, B. Watermarks in the sand: Impossibility of strong watermarking for language models. In Salakhutdinov, R., Kolter, Z., Heller, K., Weller, A., Oliver, N., Scarlett, J., and Berkenkamp, F. (eds.), *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 58851–58880. PMLR, July

Appendix

This appendix provides (i) dataset statistics and breakdowns used in our experiments, and (ii) additional details to facilitate reproducibility.

A. Dataset Statistics

A.1. HC3 PLUS: Split Sizes (English)

Split	Human	AI	Total
train	74,020	74,020	148,040
val_qa	2,919	2,920	5,839
val_si	2,919	2,920	5,839
test_qa	16,951	8,018	24,969
test_si	19,047	19,063	38,110

Table 13. HC3 PLUS split sizes used in our experiments (English).

A.2. M4 (English): Domain Breakdown

Domain	Total	Human	AI
wikipedia	17,033	3,000	14,033
wikihow	18,001	3,001	15,000
reddit	19,220	3,000	16,220
arxiv	20,996	2,996	18,000
peerread	3,516	586	2,930
Total	78,766	12,583	66,183

Table 14. M4 English domain sizes used in our evaluation (Wang et al., 2024).

A.3. M4 (English): Generator Breakdown

Generator (AI only)	Samples	Domain coverage
ChatGPT	12,581	all five domains
Davinci	12,586	all five domains
Cohere	10,142	all five domains
BLOOMZ	12,000	four domains (not peerread)
Dolly	9,288	four domains (not wikihow)
Dolly2	3,000	wikihow only
FlanT5	6,000	reddit, arxiv
LLaMA	586	peerread only
Total AI	66,183	

Table 15. M4 generator breakdown (English subset) for AI samples, with domain coverage notes (Wang et al., 2024).

A.4. AI-TEXT-DETECTION-PILE: Dataset Size

AI-TEXT-DETECTION-PILE contains 1,392,011 samples (Human: 1,028,144; AI: 363,867) (artem9k, 2024).

A.5. Academic Text Dataset

We introduce the Academic Text dataset for evaluating robustness in the STEM/academic domain. It consists of 469,008 human-written arXiv paragraphs (collected from

papers published before 2022, guaranteeing purely human-generated text), 100,000 AI-generated texts produced by GPT-3.5 Turbo, and 100,000 AI-generated texts produced by Gemini 2.0 Flash. The AI texts were generated on STEM topics carefully matched to the distribution of the human arXiv paragraphs, ensuring close semantic alignment. The total size is 669,008 samples. Under the fixed-threshold protocol ($\tau^* = 0.60$), our best model achieves 81.09% balanced accuracy overall, with 100.0% detection on GPT-3.5 Turbo and 93.25% on Gemini 2.0 Flash. Human recall on arXiv text is 75.57%.

The dataset is publicly available at: <https://huggingface.co/datasets/mohamedmady/Academic-Text-arxiv-gpt-gemini>

B. Supplementary Experimental Analyses

B.1. Multi-Seed Stability

We re-evaluated our best model across 5 random seeds. Results are highly stable:

Dataset	BA (%)	H-R (%)	AI-R (%)
HC3 QA	99.67 $\pm$ 0.04	99.45 $\pm$ 0.06	99.90 $\pm$ 0.03
HC3 SI	87.34 $\pm$ 0.15	84.71 $\pm$ 1.61	90.00 $\pm$ 1.51
M4 (macro)	83.15 $\pm$ 1.04	80.05 $\pm$ 4.63	86.24 $\pm$ 2.85

Table 16. Multi-seed results for DeBERTa-v3-BASE+FEATATTN.

B.2. Comparison with Zero-Shot Baselines

Under the identical fixed-threshold protocol on M4:

Method	BA (%)
DeBERTa-v3+FeatAttn	84.50
Fast-DetectGPT	77.28
Log-Rank (GPT-2)	73.17
RADAR (NeurIPS 2023)	67.82

Table 17. M4 macro-average balanced accuracy.

B.3. Feature-Category Ablations

Full category-level results (single-only and leave-one-out) are shown in Tables 11 and 12 of the main paper. Readability and Vocabulary are consistently the most impactful categories.

B.4. Fixed vs Adaptive Threshold

On the challenging HC3 SI split, adaptive threshold recalibration improves BA by only +0.48%, but completely flips the error profile (higher Human recall, lower AI recall).

This demonstrates that the fixed-threshold protocol reveals operationally relevant trade-offs that are hidden under optimistic per-target tuning.

C. Additional Details for Reproducibility

C.1. Training Setup

C.1.1. MODELS AND HYPERPARAMETERS

All detectors are trained for **binary** classification (Human vs AI) with cross-entropy loss. For feature-augmented models, we jointly train the feature-attention module and an MLP classifier head together with the transformer backbone.

C.1.2. HARDWARE AND SOFTWARE

Experiments were run on an NVIDIA GeForce RTX 4090 GPU with **24 GB VRAM**. Software stack: Python 3.10, PyTorch 2.x (Paszke et al., 2019), HuggingFace Transformers 4.x (Wolf et al., 2020), CUDA 12.x, and scikit-learn 1.x (Pedregosa et al., 2011).

C.1.3. TRAINING AND INFERENCE TIME

Typical runtime (3 epochs): BERT ~ 1.5 h, RoBERTa ~ 1.5 h, BERT+FeatAttn ~ 2 h, DeBERTa+FeatAttn ~ 2.5 h. Inference is ~ 45 – 55 seconds per 1,000 samples depending on the backbone.

C.2. Threshold Calibration

Protocol. We select a single global threshold τ^* on a pooled validation set (HC3 PLUS `val_qaUval_si`) via grid search, and keep it fixed for all test distributions to reflect deployment where target labels are unavailable.

Search details. We search $\tau \in [0.10, 0.90]$ with step size 0.01 and optimise balanced accuracy:

$$BA = \frac{1}{2}(\text{TPR} + \text{TNR}).$$

To prevent leakage, we use *only* validation predictions to select τ^* .

C.3. Handcrafted Linguistic Features

C.3.1. FEATURE SET OVERVIEW ($m=62$; $k=30$ SELECTED)

We extract a handcrafted feature vector $f(x) \in \mathbb{R}^{62}$ organised into eight categories, and select the top- k features ($k=30$) for feature-attention models.

C.3.2. COMPLETE FEATURE LIST (62)

Perplexity (8): `ppl_text`, `ppl_mean.token`, `ppl_max.token`, `ppl_std.token`,

`ppl_skew.token`, `ppl_low.ratio`, `ppl_high.ratio`, `ppl_trend`.

Entropy (10): `ent_char`, `ent_word`, `ent_bigram`, `ent_trigram`, `ent_conditional`, `ent_rate`, `ent_pos`, `ent_punct`, `ent_sent_len`, `ent_word_len`.

Burstiness (6): `burst_word`, `burst_sent_len`, `burst_punct`, `burst_memory`, `burst_fano`, `burst_iat_var`.

Repetition (10): `rep_self_bleu2`, `rep_self_bleu3`, `rep_self_bleu4`, `rep_unique_bigram`, `rep_unique_trigram`, `rep_bigram_rate`, `rep_trigram_rate`, `rep_max_ngram_freq`, `rep_compression`, `rep_dup_sent`.

Vocabulary (8): `vocab_zipf_coef`, `vocab_yules_k`, `vocab_hapax`, `vocab_dis`, `vocab_heaps`, `vocab_ttr`, `vocab_mattr`, `vocab_lexical_density`.

Coherence (6): `coh_sent_sim_mean`, `coh_sent_sim_var`, `coh_topic_drift`, `coh_self_sim`, `coh_semantic_density`, `coh_consistency`.

Readability (6): `read_flesch`, `read_fk_grade`, `read_ari`, `read_coleman`, `read_smog`, `read_dale_chall`.

Stylometric (8): `style_func_word`, `style_pronoun`, `style_conjunction`, `style_avg_word_len`, `style_avg_sent_len`, `style_sent_len_var`, `style_punct_ratio`, `style_cap_ratio`.

C.3.3. FEATURE NORMALISATION AND NAN/INF HANDLING

We normalise features using `RobustScaler` (median/IQR) fitted on the training set and applied to validation/test sets, and replace NaN/Inf values with zeros after extraction.

C.3.4. GLOBAL FEATURE SELECTION ($k=30$ FROM $m=62$)

Feature selection is performed *once* using source-side training data only (HC3 PLUS `train`) to avoid target-domain leakage. We compute a global importance score per feature by combining (i) mutual information with the binary label (Cover & Thomas, 2006) and (ii) the absolute point-biserial correlation (Tate, 1954). After max-normalising both scores to $[0, 1]$, we average them and select the top- k features under the resulting ranking.

Table 18. Training hyperparameters for all models.

Parameter	BERT	RoBERTa	BERT+FeatAttn	DeBERTa+FeatAttn
Base model	bert-base-uncased	roberta-base	bert-base-uncased	microsoft/deberta-v3-base
Hidden size d	768	768	768	768
Layers / Heads	12 / 12	12 / 12	12 / 12	12 / 12
Max sequence length	512	512	512	512
Batch size	16	16	16	16
Epochs	3	3	3	3
Transformer LR	2×10^{-5}	2×10^{-5}	2×10^{-5}	2×10^{-5}
Feature-head LR	—	—	10^{-3}	10^{-3}
Weight decay	0.01	0.01	0.01	0.01
Warmup ratio	0.1	0.1	0.1	0.1
LR scheduler	linear warmup	linear warmup	linear warmup	linear warmup
Optimizer	AdamW	AdamW	AdamW	AdamW
Gradient clipping	1.0	1.0	1.0	1.0
Dropout	0.1	0.1	0.1	0.1
Loss	CE	CE	CE	CE

 Table 19. Handcrafted feature categories ($m=62$ total; $k=30$ selected).

Category	Count	Description (examples)
Perplexity	8	GPT-2 perplexity statistics (doc/token)
Entropy	10	character/word/ngram/POS entropy
Burstiness	6	repetition/interval burstiness measures
Repetition	10	self-BLEU, unique n-gram ratios, compression, dup. sentences
Vocabulary	8	Zipf/Yule/Hapax/TTR/MATTR, lexical density
Coherence	6	sentence similarity, topic drift, consistency
Readability	6	Flesch, FK-grade, ARI, Coleman–Liau, SMOG, Dale–Chall
Stylometric	8	function-word ratio, pronouns, punctuation density, caps ratio
Total	62	
Selected	30	via combined importance scoring

C.4. Feature-Attention Module and Classifier Head

Architecture. Given selected features $f_k(x) \in \mathbb{R}^{30}$, the feature-attention module produces attention weights $a(x) \in \mathbb{R}^{30}$ via an importance MLP followed by softmax; weighted features are projected to $z_f(x) \in \mathbb{R}^{128}$. The transformer pooled vector $h_{[\text{CLS}]} \in \mathbb{R}^{768}$ is concatenated with $z_f(x)$ to form a 896-dim fused vector, which is classified by an MLP head.

C.5. Data and Preprocessing Notes

Filtering. We discard extremely short texts (minimum length ≥ 50 characters and minimum words ≥ 10) to ensure stable feature extraction.

Cleaning. We apply minimal cleaning to preserve stylistic signals: no global lowercasing and no removal of punctuation/stopwords; we apply Unicode normalisation and whitespace normalisation; HTML tags may be removed if present.

Tokenization. Transformer tokenization uses the HuggingFace tokenizer for each backbone with max length 512,

Table 20. Feature-attention module and classifier architecture.

Component	Layer	In	Out
Importance Net	Linear + LayerNorm	30	128
	ReLU + Dropout(0.1)	128	128
	Linear	128	30
	Softmax	30	30
Output Proj	Linear + LayerNorm	30	128
	ReLU + Dropout(0.1)	128	128
	Linear	128	128
Classifier	Dropout(0.1)	896	896
	Linear + LayerNorm	896	384
	ReLU + Dropout(0.1)	384	384
	Linear	384	2

truncation enabled, and padding to `max_length` (Wolf et al., 2020).

C.6. Evaluation on AI-TEXT-DETECTION-PILE

We evaluate on the **full** AI-TEXT-DETECTION-PILE test distribution (no balanced subsampling), and report balanced accuracy and class-wise recall due to class imbalance.