

LEMUR: Learning to Align with Multi-Objective Reinforcement Learning from Preference Feedback

Manith Adikari^{1,4*}, Bei Peng², Samuele Vinanzi³, Angelo Cangelosi^{1,4}

¹Department of Computer Science, University of Manchester

²School of Computer Science, University of Sheffield

³School of Computing & Digital Technologies, Sheffield Hallam University

⁴Centre for Robotics & AI, University of Manchester

Abstract

Reinforcement Learning (RL) systems are typically trained using a single, well-specified scalar reward function. However, real-world decision-making tasks often involve multiple, competing objectives, such as performance versus efficiency, where ground-truth reward functions are difficult to specify or inaccessible. While Multi-Objective RL (MORL) addresses such trade-offs by modeling rewards as vectors, existing approaches typically assume access to a well-specified reward function for each objective, inheriting the same challenges faced by single-objective RL. Meanwhile, Preference-based RL (PbRL) has shown great potential in solving complex tasks without access to a pre-defined reward function through reward learning from human feedback, yet has largely been studied in single-objective settings. In this work, we bridge this gap with LEMUR: Learning to Align with Multi-Objective Reinforcement Learning with Preference feedback, a novel framework where an agent interactively learns from the preferences of multiple humans to learn optimal multi-objective policies. Our approach jointly learns policies and multiple objective-specific reward models from human feedback, enabling agents to effectively balance competing objectives during learning. We evaluate LEMUR on a variety of benchmark multi-objective tasks, and empirical results demonstrate its superior performance over baseline methods. Our method presents a promising direction for solving multi-objective decision-making tasks without pre-defined reward functions.

1 Introduction

Reinforcement Learning (RL) has achieved remarkable success in training autonomous agents, from game-playing (Mnih et al. 2013) to robotics (Tan et al. 2018). By formalizing learning as the maximization of cumulative rewards through trial and error learning (Sutton and Barto 1998), RL provides a natural framework for training autonomous ‘goal-seeking’ agents (McCarthy 1997). However, standard RL relies on two critical assumptions: that the goal can be represented by a single *scalar reward*, and that this reward function is *well-specified*. In practice, these assumptions rarely hold in complex, real-world domains.

Real-world tasks often involve *multiple, competing* objectives (Dulac-Arnold, Mankowitz, and Hester 2019), such as balancing speed versus safety in autonomous driving

(Wang et al. 2026), or throughput versus energy efficiency in robotics (Huang et al. 2022; Kouritem et al. 2022).

The field of Multi-Objective Reinforcement Learning (MORL) addresses this by modeling *rewards as vectors* to find a set of Pareto-optimal policies (Roijers et al. 2013): policies where no objective’s expected returns can be increased without decreasing the returns of other objectives. However, existing MORL approaches typically assume that the ground-truth reward function for each objective is accessible and manually specified (Hayes et al. 2022b). Thus, they inherit the same challenges of reward specification from the single-objective RL domain, now across multiple objectives. Manually designing a reward function that can achieve an adequate balance between competing objectives is challenging and can lead to oversimplification, which results in suboptimal policies (Knox et al. 2012) and possible reward exploitation (Amodei et al. 2016). To avoid complicated reward engineering, Preference-based RL (PbRL) learns reward models directly from human feedback (Christiano et al. 2017), which leads to better alignment between the system’s behavior and human preferences. Despite progress in reward learning for single-objective RL, this problem remains largely unexplored in the MORL setting. While some works consider reward learning in MORL, they are typically limited to Large Language Model (LLM) post-training settings or narrow natural language-based tasks (Bakker et al. 2022; Rame et al. 2023; Yang et al. 2024), and do not study the joint learning of policies and rewards in environments with multiple, competing objectives.

Reward specification is already a major bottleneck in scaling single-objective RL settings, and becomes even more critical in MORL. Two key challenges arise. First, the agent must optimize multiple objectives whose underlying reward functions are complex, implicit, or inaccessible. Second, even when human feedback is available, collapsing multi-criteria reward signals into a single scalar obscures the very trade-off structure that MORL is designed to optimize (Vamplew et al. 2011; Roijers et al. 2013; Sorensen et al. 2024). Consider training a robotic system: *non-expert* operators can reliably judge task-level success, such as whether objects were grasped or placed correctly, while expert operators are required to assess fine-grained criteria such as grasp stability, long-term wear, or safety-related objectives. Collapsing such *heterogeneous* feedback into a single reward risks conflating

*Corresponding Author: manith.adikari@manchester.ac.uk

distinct objectives and diluting expert signals, motivating the need for *separate*, objective-specific reward models learned from the appropriate source of feedback.

This creates a crucial gap: *How can agents learn optimal trade-offs between conflicting objectives when the reward functions are unknown and must be inferred from feedback?*

To address this gap, we introduce **LEMUR: Learning to Align with Multi-Objective Reinforcement Learning from Preference Feedback**, a framework for learning to balance multiple objectives without pre-defined reward functions. Our approach jointly learns policies and multiple objective-specific reward models from preference feedback, enabling agents to effectively balance competing objectives during learning. By removing the assumption of known reward functions and explicitly modeling multiple objectives, our method tackles a key challenge to scaling MORL in real-world, human-aligned domains. To summarize, our main contributions are:

- We propose a novel framework, LEMUR, which learns *multiple* objective-specific reward models from preference feedback and then optimizes policies against these reward models using multi-objective reinforcement learning. This enables agents to effectively solve multi-objective decision-making tasks without access to pre-defined reward functions, while naturally accommodating heterogeneous sources of feedback, where different annotators may hold expertise over different objectives.
- Our extensive experiments demonstrate that LEMUR outperforms baselines across a range of benchmark multi-objective environments, namely high-dimensional continuous control tasks, and further show LEMUR’s robustness to label noise, constrained feedback budgets, and scaling to more objectives.

2 Preliminaries

Multi-Objective Reinforcement Learning. We formulate the problem as a Multi-Objective Markov Decision Process (MOMDP) (White 1982), defined by the tuple $\langle \mathcal{S}, \mathcal{A}, \mathcal{T}, \gamma, \mathbf{r} \rangle$. Here, $\mathcal{S}$ and $\mathcal{A}$ denote state and action spaces respectively, $\mathcal{T}$ the transition dynamics, and $\gamma \in [0, 1)$ the discount factor. Unlike standard RL, the reward is a vector $\mathbf{r}(s, a) \in \mathbb{R}^m$ comprising m distinct objectives. The agent’s goal is to maximize the expected discounted vector returns $J(\pi) = \mathbb{E}_\pi[\sum_{t=0}^{\infty} \gamma^t \mathbf{r}(s_t, \mathbf{a}_t)]$. A policy π maps states to action distributions. Since no single policy typically maximizes all objectives in MORL, the agent learns a set of policies Π representing optimal trade-offs, defined by Pareto dominance (Hayes et al. 2022a). A policy π dominates π' (denoted $J(\pi) \succ J(\pi')$) if it is superior in at least one objective and no worse in others. The solution set is the Pareto Frontier $\mathcal{F} = \{\pi \in \Pi \mid \nexists \pi' \in \Pi : J(\pi') \succ J(\pi)\}$.

Soft Actor-Critic (SAC). SAC (Haarnoja et al. 2018) is an off-policy actor-critic algorithm grounded in the maximum entropy framework. It augments standard single-objective RL with an entropy term to encourage exploration. The agent aims to maximize $J(\pi) = \mathbb{E}_\pi[\sum_t \gamma^t (r_t + \alpha \mathcal{H}(\pi(\cdot|s_t)))]$.

Reward Learning from Preference Feedback. We follow the standard Preference-based RL (PbRL) framework,

which uses ‘latent rewards’ as a proxy for values (Christiano et al. 2017). Each human’s reward function is learned independently using their respective preference feedback. Similar to prior work, we use preferences over pairs of trajectory segments, (σ^0, σ^1) . An expert teacher (e.g., human) provides a label $y \in \{0, 1, 0.5\}$ to indicate their preference. To learn a reward function $\hat{r}$ parameterized by ψ , we employ the Bradley-Terry model (Bradley and Terry 1952), modeling the preference probability as $P[\sigma^1 \succ \sigma^0; \psi] = \frac{\exp \sum \hat{r}(\sigma^1)}{\exp \sum \hat{r}(\sigma^1) + \exp \sum \hat{r}(\sigma^0)}$. Given a dataset $\mathcal{D}$, the reward function is trained by minimizing the cross-entropy loss:

$$\mathcal{L}^{CE}(\psi) = -\mathbb{E}_{\mathcal{D}} \left[(1-y) \log P[\sigma^0 \succ \sigma^1] + y \log P[\sigma^1 \succ \sigma^0] \right]. \quad (1)$$

The learned reward function can then be used to update the policy with any RL algorithm to maximize expected returns.

3 Problem Setup

In this section, we present our formulation of Multi-Objective Reinforcement Learning (MORL) *without pre-defined* reward functions for *multiple, conflicting* objectives.

Latent Reward Vector. In standard MORL, the reward function is a known vector $\mathbf{r}(s, a) \in \mathbb{R}^m$. However, in our work, the agent *does not* have access to the ground-truth reward function. Instead, we assume the existence of m distinct multiple, conflicting human users (objectives), where each dimension r_i corresponds to the latent reward function of the i -th specific user. Since these rewards are inaccessible, we must approximate them. We define a parameterized reward vector $\hat{\mathbf{r}}_\psi(s, a) = [\hat{r}_{\psi_1}(s, a), \dots, \hat{r}_{\psi_m}(s, a)]^T$, where each component is a reward model learned from human preference feedback (Christiano et al. 2017).

Multi-Objective RL Optimization. The agent’s goal is to maximize the expected discounted vector returns. We adopt the most prevalent MORL formalism called the utility-based approach (Roijers et al. 2013), where we define a scalarization function $f_{\mathbf{w}}(\mathbf{r}) = \mathbf{w}^\top \mathbf{r}$, where $\mathbf{w} \in \mathbb{R}^m$ is a preference weight vector on the simplex (i.e., $\sum w_i = 1$). Thus, we define an optimal MORL agent to be the policies belonging to the Convex Coverage Set (CCS), the subset of $\mathcal{F}$ optimal for linearly scalarized preferences (Roijers et al. 2013).

To summarize, the MORL agent learns these policies by maximizing the expected returns of the *learned* latent reward vector linearly scalarized by the weight w , which determines the trade-offs between objectives:

$$J(\pi) = \mathbb{E}_\pi \left[\sum_{t=0}^{\infty} \gamma^t \mathbf{w}^\top \hat{\mathbf{r}}_\psi(s_t, a_t) \right]. \quad (2)$$

4 LEMUR

LEMUR (Learning to Align with Multi-Objective Reinforcement Learning from Preference Feedback), illustrated in Figure 1 proceeds in three stages: (1) unsupervised pre-training, where the agent explores via intrinsic rewards to collect diverse experiences (Section 4.1); (2) reward learning, where multiple human teachers are queried for preference feedback to train objective-specific reward models

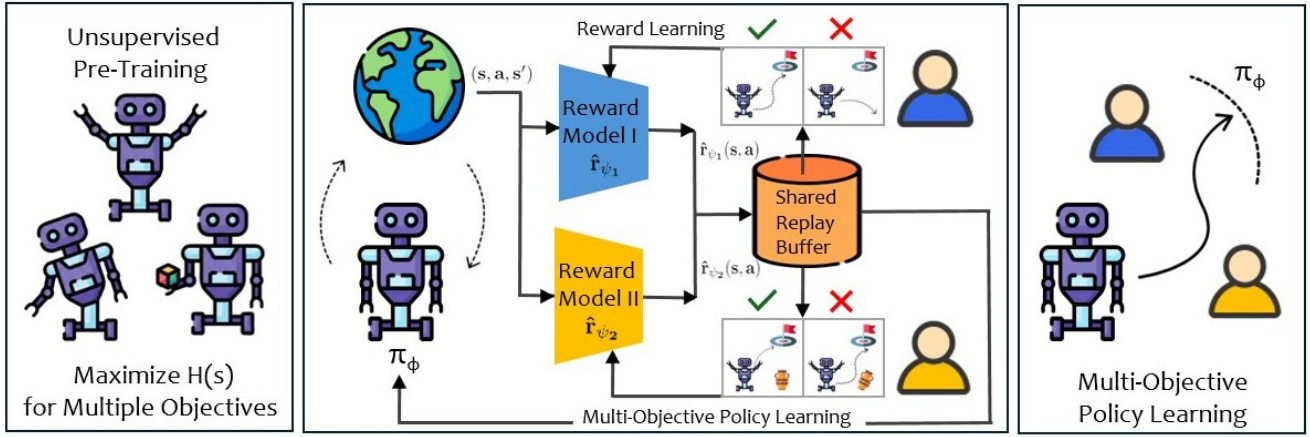


Figure 1: Illustration of our framework LEMUR: (1) Unsupervised Pre-training for the MORL agent to explore and collect diverse experiences via maximizing state entropy $H(s)$. (2) Reward learning from Preference feedback, where each reward model is learned separately from the preferences queried from each teacher. The reward models are used to dynamically relabel the state-action pairs as a reward vector for each objective (i.e., each teacher’s preferences). (3) Multi-Objective RL agent denoted by π_ϕ uses each of the trained reward models to do multi-objective policy optimization to maximize the expected vector rewards.

(Section 4.2); and (3) multi-objective RL training against the learned reward models (Section 4.3). Stages 2 and 3 repeat, continually improving both the reward models and the multi-objective policies. Full pseudocode is provided in Appendix B.

4.1 Unsupervised Pre-training

Standard PbRL suffers from uninformative queries caused by the limited coverage of random initialization. To generate informative queries, LEMUR employs an unsupervised pre-training phase driven by intrinsic motivation (Lee, Smith, and Abbeel 2021). We encourage exploration by maximizing state entropy, approximated via a particle-based k -nearest neighbors (k -NN) estimator (Liu and Abbeel 2021). The intrinsic reward $r^{int}(s_t) = \log(\|s_t - s_t^k\|)$ is the normalized distance to the k -th nearest neighbor in $\mathcal{B}$, and the agent maximizes $\mathcal{J}_{int}(\phi) = \mathbb{E}_{\pi_\phi}[\sum_{t=0}^T \gamma^t r^{int}(s_t)]$. This populates the buffer with diverse behaviors, accelerating the subsequent multi-objective reward learning.

4.2 Reward learning of Multiple Objectives from Preferences

A core challenge in our setup is that the agent does not have access to the ground-truth rewards, and the m conflicting objectives are characterized instead by the conflicting preferences of m humans. Following the PbRL formulation in Section 2, LEMUR learns a separate reward model $\hat{r}_{\psi_j}(s, a)$ per teacher, trained by minimizing the cross-entropy loss between the model’s predictions and that teacher’s labels (Equation 1).

Weight-Conditioned Reward Models. Rather than learning each teacher’s reward in isolation, we condition every objective-specific model on the shared objective space. Each teacher j is assigned a reward model $\hat{r}_{\psi_j}(s, a)$, a lightweight

MLP predicting the full objective vector, whose scalar utility is obtained by projecting onto that teacher’s preference anchor, $\hat{r}_j(s, a) = \mathbf{a}_j^\top \hat{\mathbf{r}}_{\psi_j}(s, a)$. This couples the m learned models to a common vector-reward structure, so that a policy conditioned on $\mathbf{w}$ reads a consistent per-teacher utility at inference, and the reward models remain directly comparable as the number of conflicting teachers grows. We deliberately adopt this simple architecture, as in prior approaches (Mu, Luan, and Jia 2025); we find it sufficient to recover strong compromise policies while keeping reward learning fast enough to remain in the loop with online policy optimization.

Query Sampling Strategy. We sample trajectory pairs (σ^0, σ^1) uniformly at random from the buffer $\mathcal{B}$, so that queries span the diverse state-action distributions explored by all policies. While more sophisticated disagreement-based strategies exist, uniform sampling offers simplicity and avoids bias toward particular regions of the objective space during early training.

4.3 Multi-Objective RL Training

Given the parameterized reward vector $\hat{\mathbf{r}}_\psi(s, a)$, LEMUR trains the MORL agent to maximize expected latent *vector* rewards (Equation 2). For policy optimization we leverage MORL/D, a state-of-the-art Multi-Objective Soft Actor-Critic (MO-SAC) algorithm (Felten, Talbi, and Danoy 2024) which learns a set of independent SAC policies and applies an evolutionary strategy for policy search. This off-policy choice is deliberate: reusing past experience from the replay buffer is essential for sample efficiency under a limited human feedback budget.

Weight Vector Initialization and Adaptation. The scalarization weight vectors $\{\mathbf{w}\}$ determine the trade-offs between objectives. Given $\mathbf{w} \in \mathbb{R}^m$, we optimize for policies using SAC (Haarnoja et al. 2018) on the scalarized reward of

Equation 2. We employ a Pareto Simulated Annealing (PSA) approach similar to (Felten, Talbi, and Danoy 2024), adapting the weight vector in response to the current policies and their distance to non-dominated solutions, allowing the agent to focus training on feasible regions of the objective space while maintaining policy diversity.

Cooperation via Shared Buffer. To facilitate information exchange across policies learning different trade-offs, all policies store and sample from a common replay buffer $\mathcal{B}$. This enables policies to learn from diverse experiences collected under different preference weightings, improving sample efficiency, a critical consideration given the limited human feedback budget.

Relabeling of Vector Rewards. Combining off-policy RL with a reward function learned from preferences introduces non-stationarity: as the reward model is updated with new feedback, rewards associated with past transitions in the buffer become stale, destabilizing learning. To address this, LEMUR employs a vector reward relabeling strategy inspired by prior work (Lee, Smith, and Abbeel 2021). Rather than storing rewards, we store only the transitions, and compute vector rewards on the fly when a batch is sampled, using the most up-to-date reward models. This ensures the agent always trains on updated rewards, synchronizing policy and reward learning while preserving the sample efficiency of our off-policy approach.

5 Experiments

Our experiments address three questions: (1) Can LEMUR learn multi-objective policies that balance multiple *learned* reward models from *multiple* teachers? (2) How does LEMUR compare to existing baselines on multi-objective benchmarks? (3) Does explicitly learning multiple reward models for conflicting feedback outperform aggregating feedback into a single reward model? For all experiments, we report the mean across five random seeds with standard error. Additional implementation details are reported in Appendices D & E.

Benchmark Environments & Setup. We evaluate LEMUR on high-dimensional environments from the *MORL-Generalization* benchmark (Teoh, Varakantham, and Vamplew 2025). Following standard practice in PbRL (Lee et al. 2021; Christiano et al. 2017), we use scripted teachers that generate feedback according to the components of the ground-truth vector reward, enabling quantitative evaluation; the ground-truth rewards remain inaccessible to the agent, which must jointly learn the conflicting preferences and optimize to find a balance. Our main experiments use two conflicting teachers, the fundamental version of the problem; Section 5.1 demonstrates scaling to more objectives. We evaluate on: MO-Lunarlander, where Teacher A rewards precise, stable landings and Teacher B prioritizes fuel conservation; MO-Hopper and MO-Cheetah, continuous control locomotion tasks where Teacher A prefers fast locomotion and Teacher B prefers slow, energy-efficient gaits; and MO-MetaWorld (Drawer-Close), a robotic-manipulation task from the Meta-World suite (Yu et al. 2020). Meta-World tasks are natively single-objective; we convert Drawer-Close into a two-objective task by pairing the native task-progress

reward (Teacher A) with a control-effort penalty (Teacher B), mirroring the reward decomposition standard in the MORL benchmark suite (Teoh, Varakantham, and Vamplew 2025). Full environment details are given in Appendix G.

Baselines. We compare against five baselines spanning distinct strategies for preference aggregation and learning from multiple objectives: (1) a **Utilitarian** agent, a single SAC agent optimizing the arithmetic mean of the independently learned rewards; (2) **Naive** data pooling, which trains one monolithic reward model on all conflicting feedback, akin to standard Reinforcement Learning from Human Feedback (RLHF); (3) **MORAL** (Peschl et al. 2022), which recovers per-teacher rewards via Adversarial Inverse Reinforcement Learning (AIRL) and learns a scalarization over them; (4) **PbMORL** (Mu, Luan, and Jia 2025), a recent preference-based multi-objective method learning a weight-conditioned vector reward from pairwise feedback; and (5) **FPbRL** (Siddique, Sinha, and Cao 2023), which aggregates learned per-teacher rewards through a Generalized Gini Welfare scalarization to optimize for fairness. We additionally report an (6) **Oracle** trained on ground-truth rewards as an upper bound. Unless otherwise noted, every baseline shares LEMUR’s interactive learning loop, reward-model architecture, pre-training stage, teacher weight vectors, query budget, and environment-step budget; the primary distinction lies in *how conflicting reward signals are aggregated and optimized*. Where a baseline’s original policy optimizer would disadvantage it in our environments, we adapt in the baseline’s favour; all deviations are disclosed in Appendix E.

5.1 Results & Analysis

Figure 2 presents the learning curves for all methods across the benchmark environments. Across every environment, LEMUR is the method that most closely tracks the Oracle on both objectives simultaneously, effectively recovering policies that balance multiple, conflicting objectives. The Utilitarian and Naive agents remain flat with suboptimal returns throughout, supporting our hypothesis that aggregating conflicting reward signals into a single scalar degrades performance in such multi-objective settings.

While MORAL improves early in LunarLander and Hopper, it fails to sustain this progress: in MO-Hopper its returns peak mid-training and then steadily declines. This is consistent with the known failure of out-of-distribution optimization due to static reward models; MORAL infers its per-teacher rewards offline from expert demonstrations via AIRL and holds them fixed. LEMUR instead does online policy optimization and addresses non-stationarity through *vector reward relabeling*.

PbMORL and FPbRL, which both learn vector rewards from preference feedback, perform better than the aggregation baselines, yet still fall short of LEMUR. We attribute this to the assumptions both methods inherit. PbMORL trains a single weight-conditioned reward model over pooled feedback, implicitly assuming all preferences originate from one single teacher; under conflicting teachers the pooled model must average over conflicting labels, degrading the reward signal, most visibly in MO-Hopper and MO-Cheetah where it consistently trails LEMUR on both objectives. FPbRL

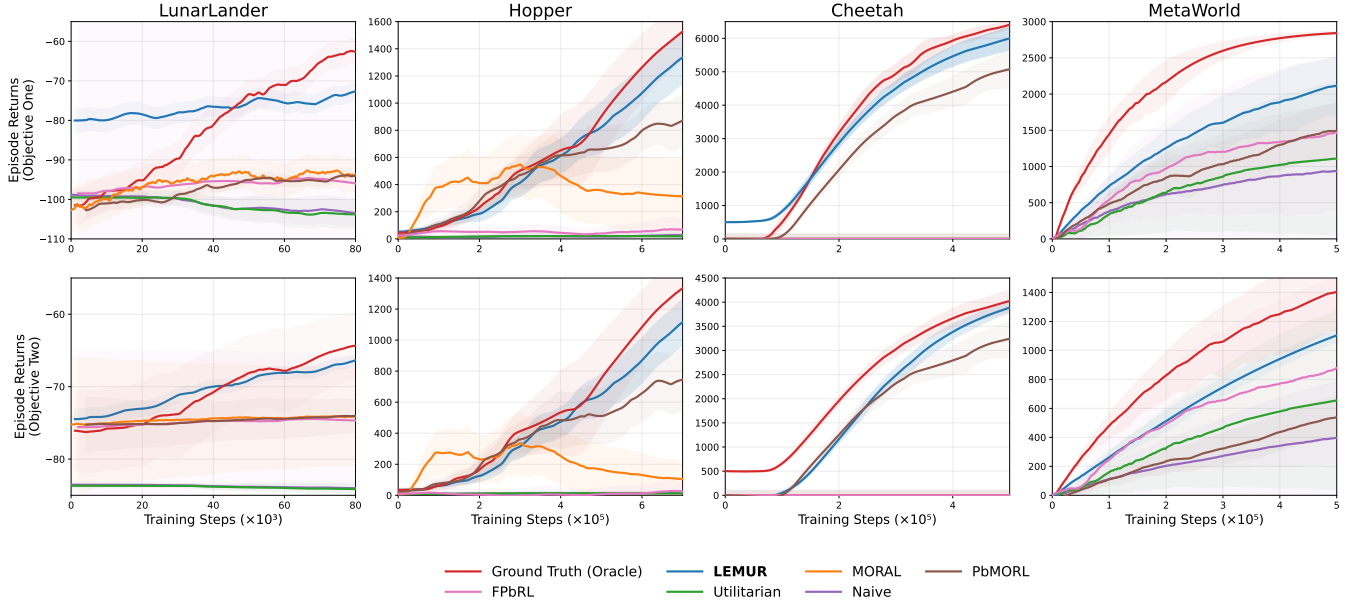


Figure 2: Learning curves on all benchmark environments: MO-LunarLander, MO-Hopper, MO-Cheetah, and MO-MetaWorld. Curves depict the true objective returns (inaccessible to the agent), averaged across five seeds, with shaded regions representing standard error. **LEMUR** (blue) most closely tracks the **Oracle** (red) on both objectives simultaneously. Baselines that aggregate conflicting feedback (**Naive**, **Utilitarian**) fail to make progress, while the external baselines (**MORAL**, **PbMORL**, **FPbRL**) learn but consistently trail LEMUR.

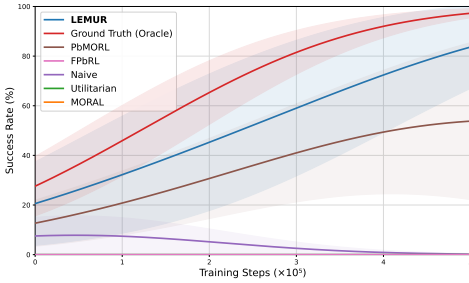


Figure 3: Task Success Rate (%) learning curves on MetaWorld (Drawer Close Task).

preserves the vector structure but employs a fixed Generalized Gini welfare scalarization a priori, converging to a single welfare-optimal policy rather than a set of trade-offs: it achieves reasonable returns on MetaWorld, but fails to achieve task success (shown in Figure 3) nor make progress on the other environments. LEMUR avoids both failure modes by maintaining objective-specific reward models and adapting the trade-off online. On MO-MetaWorld, Figure 3 reports the task success rate: LEMUR reaches closest to the Oracle, while PbMORL plateaus.

Multi-Objective Metrics. We evaluate LEMUR using standard multi-objective metrics (Hayes et al. 2022a). *Hypervolume* (HV) measures the volume of objective space, rewarding policies that are both high-performing and broadly spread (Teoh, Varakantham, and Vamplew 2025); *Sparsity*

Environment	Hypervolume ($\uparrow$)		Sparsity ($\downarrow$)	
	LEMUR	PbMORL	LEMUR	PbMORL
MO-LunarLander	1.10×10^4	1.09×10^4	134.5	7.8
MO-Hopper	3.67×10^6	2.24×10^6	294.7	1731.7
MO-HalfCheetah	4.86×10^7	4.78×10^7	294.7	2191.0
MO-MetaWorld	2.15×10^6	1.43×10^6	436.3	5564.7

Table 1: Hypervolume and Sparsity for LEMUR and PbMORL. Full results are in Appendix F.1.

(SPS) measures the average distance between policies along the front, with lower values indicating more uniform coverage (Teoh, Varakantham, and Vamplew 2025). As summarised in Table 1, LEMUR attains the highest or comparable Hypervolume across all four environments while achieving markedly lower sparsity than PbMORL, indicating that it learns policies that is both higher-performing and more uniformly distributed over the trade-off space. MORAL is excluded from these set-based metrics, as its single-objective policy optimization against a scalarized reward recovers only one solution rather than a front. Full results are reported in Appendix F.1.

Reward Model Alignment. We additionally evaluate the learned reward models directly against the ground-truth teacher rewards, following established PbRL evaluation practice (Lee et al. 2021). We report *Spearman* rank correlation, which measures how accurately the learned reward models rank individual states compared to the teachers’ ground-truth

reward; the *Trajectory Alignment Coefficient* (TAC) (Muslimani et al. 2025), which compares rankings over whole trajectories rather than individual transitions. Table 2 shows that LEMUR’s reward models recover their teachers’ preference orderings with consistently strong correlation, and outperform both PbMORL and FPbRL (Appendix F.2).

Environment	Spearman ($\rho \uparrow$)	TAC ($\uparrow$)
MO-Hopper	0.945 ± 0.002	0.856 ± 0.014
MO-HalfCheetah	0.710 ± 0.005	0.898 ± 0.041
MO-MetaWorld	0.520 ± 0.007	0.347 ± 0.026

Table 2: LEMUR reward model alignment, reporting Spearman rank correlation and Trajectory Alignment Coefficient (TAC). Per-metric comparisons against PbMORL and FPbRL are in Appendix F.2.

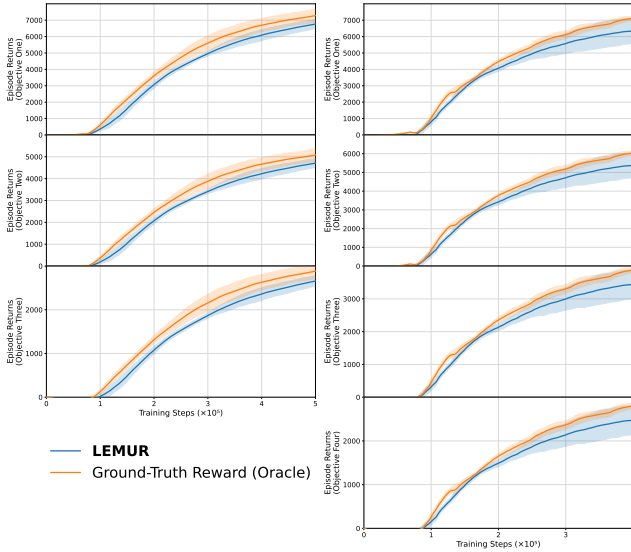


Figure 4: LEMUR scalability to higher-dimensional objective spaces. Episode returns for (a) 3-objective and (b) 4-objective tasks, comparing policies trained with LEMUR (blue) versus ground-truth oracle rewards (orange).

Scaling to More Objectives. We next vary the teacher configuration on MO-Cheetah. Figure 4 extends LEMUR to three and four conflicting teachers: the learned-reward policies closely track the ground-truth oracle across all objectives, demonstrating the per-teacher decomposition scales without modification, each additional objective adding one reward model.

5.2 Ablation Studies

To validate the components of LEMUR, we conduct ablation studies on the high-dimensional MO-Cheetah domain; Figure 5 visualizes the learning curves.

Impact of Shared Buffer, Relabeling, and Pre-training. Figure 5(a) isolates the contributions of the shared replay buffer, vector reward relabeling, and unsupervised pre-

training. Disabling the shared buffer causes the most severe degradation. With the shared buffer intact, removing relabeling alone produces a modest but consistent drop relative to full LEMUR, confirming that recomputing rewards under the current models stabilizes learning against reward non-stationarity. Removing pre-training accelerates the earliest phase of training, but converges to lower final returns, indicating that the diverse initial buffer ultimately yields better reward models and policies.

Robustness to Label Noise. Figure 5(b) corrupts a fraction of teacher labels (flipping preferences with probability up to 15%), following PbRL benchmarking protocol (Lee et al. 2021). LEMUR degrades gracefully: performance is essentially unaffected up to 10% noise, and at 15% the agent still learns effective compromise policies on both objectives, albeit with slower convergence and higher variance, indicating tolerance to levels of annotator error.

Impact of Feedback Budget. Figure 5(c) varies the total query budget from 260 to 5,200 per teacher. Performance improves with budget, and larger budgets learn faster; notably, even 260 total learns adequate policies on both objectives. This feedback efficiency is particularly important in preference-based RL, where human queries are limited.

Reward Model Ablation. To verify that LEMUR’s gains stem from its weight-conditioned reward model rather than the surrounding pipeline, we re-run LEMUR replacing this component with an ensemble of three unconditioned MLPs (Christiano et al. 2017; Lee, Smith, and Abbeel 2021), holding all else fixed. The weight-conditioned variant converges to $6,812 \pm 39$ and $4,404 \pm 22$ on the two objectives, against $4,556 \pm 369$ and $2,902 \pm 245$ for the ensemble. (For full results, refer to Appendix C.7).

Additional Experiments. In Appendices C.1-C.7, we demonstrate that LEMUR accommodates changing teachers/objectives mid-training, varying levels of conflict between teachers, and also non-stationary preferences without reinitialization. Query ablations reveal that segment length is important to performance, and we verify that LEMUR maintains performance even when teachers are in agreement with overlapping preferences.

6 Related Work

Reward Learning from Preference Feedback. Designing reward functions is a primary bottleneck in scaling RL, as manual crafting is impractical and can induce unsafe behavior (Amodei et al. 2016); prior work instead learns rewards from demonstrations (Ng and Russell 2000; Abbeel and Ng 2004), language (Lin et al. 2022), or human feedback (Christiano et al. 2017). Preference-based RL (PbRL) learns rewards from pairwise comparisons (Christiano et al. 2017; Lee, Smith, and Abbeel 2021); popularized as RLHF (Stienon et al. 2020; Ouyang et al. 2022), it typically trains a single reward model, aggregating diverse feedback into one scalar (Ouyang et al. 2022) and failing to capture the multi-objective nature of human values (Sorensen et al. 2024). Offline variants train rewards on fixed datasets before policy optimization (Shin, Dragan, and Brown 2023), but static models suffer distribution shift as the policy diverges from the offline coverage, causing reward exploitation (Gao, Schulman, and Hilton

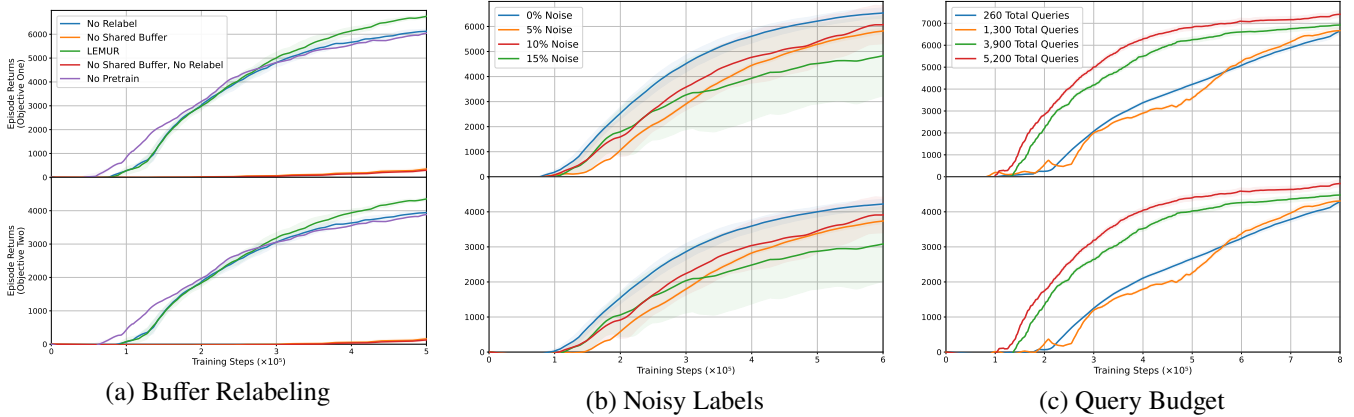


Figure 5: Ablation studies on MO-Cheetah evaluating the impact of (a) the shared buffer, vector reward relabeling, and unsupervised pre-training, (b) noisy teacher labels, and (c) varying the total query budget per teacher on agent returns for both objectives; by default LEMUR uses 3900 queries (green). The results are averaged over multiple runs across five seeds.

2023; Ye et al. 2024). Online, iterative RLHF mitigates this by collecting feedback alongside policy optimization (Dong et al. 2024; Gao, Schulman, and Hilton 2023; Ye et al. 2024), which is more critical still in MORL, where the agent must span a space of diverse policies (Hayes et al. 2022a); offline MORL instead presupposes specified rewards or adequate dataset coverage (Yuan et al. 2024; Zhu, Dang, and Grover 2023). LEMUR circumvents this by jointly and interactively optimizing both the reward models and the multi-objective policy online.

Multi-Objective Reinforcement Learning (MORL). MORL learns a set of policies approximating the Pareto frontier (Roijers et al. 2013; Hayes et al. 2022b), via single-policy scalarization, weight-conditioned, or multi-policy methods; multi-task and Meta-RL are closely related (Chen et al. 2019; Abdolmaleki et al. 2020; Sener and Koltun 2018). Most of this literature assumes a vector of ground-truth reward functions (Hayes et al. 2022b), which is impractical in complex, real-world tasks. Reward-free MORL (Chen et al. 2026) relaxes this only partially, using reward-free exploration as an auxiliary objective while still assuming an extrinsically specified ground-truth reward. LEMUR extends the MORL paradigm to the setting where the objectives are never observed and must be inferred directly from preferences.

Learning & Alignment with Diverse Objectives. Standard RLHF fails to capture the *pluralistic* nature of human values (Sorensen et al. 2024), and existing remedies rely on manual aggregation functions (Rodriguez-Soto et al. 2023), expensive consensus datasets (Tessler et al. 2024), static offline learning (Bakker et al. 2022), or model heterogeneous feedback as hidden context without optimizing the trade-off between preferences (Siththaranjan, Laidlaw, and Hadfield-Menell 2024). Our closest baselines learn rewards for multiple objectives but inherit strong coherence assumptions: MORAL (Peschl et al. 2022) requires expert demonstrations and freezes AIRL-learned rewards (Fu, Luo, and Levine 2018), PbMORL (Mu, Luan, and Jia 2025) assumes a single teacher, and FPbRL (Siddique, Sinha, and

Cao 2023) fixes a welfare scalarization a priori. LEMUR instead learns objective-specific reward models from separate feedback streams and jointly optimizes a multi-objective policy online via *vector reward relabeling*, without offline pre-training or expert demonstrations.

7 Conclusion & Limitations

We propose LEMUR, a framework for Multi-Objective RL in domains where reward functions are unknown and must be inferred from the conflicting preferences of multiple teachers. LEMUR jointly learns the objectives and the policies that balance them, without expert demonstrations, pre-defined rewards, or a priori aggregation rules that existing methods require. Across multi-objective RL control and robotic manipulation benchmark environments, LEMUR outperforms aggregation baselines and recent preference-based multi-objective methods, and remains robust to label noise, reduced feedback budgets, and scaling to additional objectives. Several directions for future work are as follows. Our evaluation uses scripted teachers, standard practice in PbRL for controlled and reproducible comparison (Lee et al. 2021); our noise ablations suggest the framework tolerates the label error real annotators exhibit, and a human study is the natural next validation. We adopt linear scalarization, and extending to non-linear scalarization would allow the framework to learn policies in non-convex regions of the front (Roijers et al. 2013; Hayes et al. 2022b). Finally, active querying (Akrou, Schoenauer, and Sebag 2012) offers a route to further reducing the number of queries, which is a promising path for deploying preference-based MORL in real-time.

References

- Abbeel, P.; and Ng, A. Y. 2004. Apprenticeship learning via inverse reinforcement learning. In *Proceedings of the twenty-first international conference on Machine learning*, 1.
- Abdolmaleki, A.; Huang, S.; Hasenclever, L.; Neunert, M.; Song, F.; Zambelli, M.; Martins, M.; Heess, N.; Hadsell, R.;

- and Riedmiller, M. 2020. A distributional view on multi-objective policy optimization. In *International conference on machine learning*, 11–22. PMLR.
- Akrour, R.; Schoenauer, M.; and Sebag, M. 2012. April: Active preference learning-based reinforcement learning. In *Joint European conference on machine learning and knowledge discovery in databases*, 116–131. Springer.
- Amodei, D.; Olah, C.; Steinhardt, J.; Christiano, P.; Schulman, J.; and Mané, D. 2016. Concrete problems in AI safety. *arXiv preprint arXiv:1606.06565*.
- Bahlous-Boldi, R.; Puri, I.; Shenfeld, I.; Kumar, A.; Damani, M.; Risi, S.; Khattab, O.; Hong, Z.-W.; and Agrawal, P. 2026. Vector Policy Optimization: Training for Diversity Improves Test-Time Search. *arXiv preprint arXiv:2605.22817*.
- Bai, Y.; Jones, A.; Ndousse, K.; Askell, A.; Chen, A.; Das-Sarma, N.; Drain, D.; Fort, S.; Ganguli, D.; Henighan, T.; et al. 2022. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*.
- Bakker, M.; Chadwick, M.; Sheahan, H.; Tessler, M.; Campbell-Gillingham, L.; Balaguer, J.; McAleese, N.; Glaese, A.; Aslanides, J.; Botvinick, M.; et al. 2022. Fine-tuning language models to find agreement among humans with diverse preferences. *Advances in neural information processing systems*, 35: 38176–38189.
- Bowling, M.; Martin, J. D.; Abel, D.; and Dabney, W. 2023. Settling the reward hypothesis. In *International Conference on Machine Learning*, 3003–3020. PMLR.
- Bradley, R. A.; and Terry, M. E. 1952. Rank analysis of incomplete block designs: I. the method of paired comparisons. *Biometrika*, 39(3/4): 324–345.
- Chen, X.; Ghadirzadeh, A.; Björkman, M.; and Jensfelt, P. 2019. Meta-learning for multi-objective reinforcement learning. In *2019 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 977–983. IEEE.
- Chen, Y.-T.; Hung, W.; Wu, B.-S.; Hong, Z.-W.; and Hsieh, P.-C. 2026. A Reward-Free Viewpoint on Multi-Objective Reinforcement Learning. In *The Fourteenth International Conference on Learning Representations*.
- Christiano, P. F.; Leike, J.; Brown, T.; Martic, M.; Legg, S.; and Amodei, D. 2017. Deep Reinforcement Learning from Human Preferences. In Guyon, I.; Luxburg, U. V.; Bengio, S.; Wallach, H.; Fergus, R.; Vishwanathan, S.; and Garnett, R., eds., *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Ding, L.; Zhang, J.; Clune, J.; Spector, L.; and Lehman, J. 2024. Quality Diversity through Human Feedback: Towards Open-Ended Diversity-Driven Optimization. In *Forty-first International Conference on Machine Learning*.
- Dong, H.; Xiong, W.; Pang, B.; Wang, H.; Zhao, H.; Zhou, Y.; Jiang, N.; Sahoo, D.; Xiong, C.; and Zhang, T. 2024. RLHF Workflow: From Reward Modeling to Online RLHF. *Transactions on Machine Learning Research*.
- Dulac-Arnold, G.; Mankowitz, D.; and Hester, T. 2019. Challenges of Real-World Reinforcement Learning.
- Felten, F.; Talbi, E.-G.; and Danoy, G. 2024. Multi-Objective Reinforcement Learning Based on Decomposition: A Taxonomy and Framework. *Journal of Artificial Intelligence Research*, 79: 679–723.
- Fickinger, A.; Zhuang, S.; Hadfield-Menell, D.; and Russell, S. 2020. Multi-principal assistance games. *arXiv preprint arXiv:2007.09540*.
- Fu, J.; Luo, K.; and Levine, S. 2018. Learning Robust Rewards with Adversarial Inverse Reinforcement Learning. In *International Conference on Learning Representations*.
- Gao, L.; Schulman, J.; and Hilton, J. 2023. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, 10835–10866. PMLR.
- Gunjal, A.; Wang, A.; Lau, E.; Nath, V.; He, Y.; Liu, B.; and Hendryx, S. M. 2025. Rubrics as Rewards: Reinforcement Learning Beyond Verifiable Domains. In *NeurIPS 2025 Workshop on Efficient Reasoning*.
- Haarnoja, T.; Zhou, A.; Abbeel, P.; and Levine, S. 2018. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International conference on machine learning*, 1861–1870. Pmlr.
- Hayes, C. F.; Rădulescu, R.; Bargiacchi, E.; Källström, J.; Macfarlane, M.; Reymond, M.; Verstraeten, T.; Zintgraf, L. M.; Dazeley, R.; Heintz, F.; Howley, E.; Irissappane, A. A.; Mannion, P.; Nowé, A.; Ramos, G.; Restelli, M.; Vamplew, P.; and Roijers, D. M. 2022a. A practical guide to multi-objective reinforcement learning and planning. *Auton. Agent. Multi. Agent. Syst.*, 36(1).
- Hayes, C. F.; Rădulescu, R.; Bargiacchi, E.; Källström, J.; Macfarlane, M.; Reymond, M.; Verstraeten, T.; Zintgraf, L. M.; Dazeley, R.; Heintz, F.; Howley, E.; Irissappane, A. A.; Mannion, P.; Nowé, A.; Ramos, G.; Restelli, M.; Vamplew, P.; and Roijers, D. M. 2022b. A Practical Guide to Multi-Objective Reinforcement Learning and Planning. *Autonomous Agents and Multi-Agent Systems*, 36(1): 26. ArXiv:2103.09568 [cs].
- Huang, S.; Abdolmaleki, A.; Vezzani, G.; Brakel, P.; Mankowitz, D. J.; Neunert, M.; Bohez, S.; Tassa, Y.; Heess, N.; Riedmiller, M.; et al. 2022. A constrained multi-objective reinforcement learning framework. In *Conference on Robot Learning*, 883–893. PMLR.
- Ibarz, B.; Leike, J.; Pohlen, T.; Irving, G.; Legg, S.; and Amodei, D. 2018. Reward learning from human preferences and demonstrations in atari. *Advances in neural information processing systems*, 31.
- Kirk, R.; Mediratta, I.; Nalmpantis, C.; Luketina, J.; Hambro, E.; Grefenstette, E.; and Raileanu, R. 2024. Understanding the Effects of RLHF on LLM Generalisation and Diversity. In *The Twelfth International Conference on Learning Representations*.
- Knox, W. B.; Glass, B. D.; Love, B. C.; Maddox, W. T.; and Stone, P. 2012. How humans teach agents: A new experimental perspective. *International Journal of Social Robotics*, 4(4): 409–421.
- Kouritem, S. A.; Abouheaf, M. I.; Nahas, N.; and Hassan, M. 2022. A multi-objective optimization design of indus-

- trial robot arms. *Alexandria Engineering Journal*, 61(12): 12847–12867.
- Lee, K.; Smith, L.; Dragan, A.; and Abbeel, P. 2021. B-Pref: Benchmarking Preference-Based Reinforcement Learning. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*.
- Lee, K.; Smith, L. M.; and Abbeel, P. 2021. PEBBLE: Feedback-Efficient Interactive Reinforcement Learning via Relabeling Experience and Unsupervised Pre-training. In Meila, M.; and Zhang, T., eds., *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, 6152–6163. PMLR.
- Lin, J.; Fried, D.; Klein, D.; and Dragan, A. 2022. Inferring Rewards from Language in Context. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 8546–8560.
- Liu, H.; and Abbeel, P. 2021. Behavior from the void: Unsupervised active pre-training. *Advances in Neural Information Processing Systems*, 34: 18459–18473.
- Ma, Y. J.; Hejna, J.; Fu, C.; Shah, D.; Liang, J.; Xu, Z.; Kirmani, S.; Xu, P.; Driess, D.; Xiao, T.; Bastani, O.; Jayaraman, D.; Yu, W.; Zhang, T.; Sadigh, D.; and Xia, F. 2025. Vision Language Models are In-Context Value Learners. In Yue, Y.; Garg, A.; Peng, N.; Sha, F.; and Yu, R., eds., *International Conference on Learning Representations*, volume 2025, 33984–34009.
- McCarthy, J. 1997. What is Artificial Intelligence? Stanford University. Also available in a 2007 version at <http://www-formal.stanford.edu/jmc/whatisai.pdf>.
- Mnih, V.; Kavukcuoglu, K.; Silver, D.; Graves, A.; Antonoglou, I.; Wierstra, D.; and Riedmiller, M. A. 2013. Playing Atari with Deep Reinforcement Learning. *CoRR*, abs/1312.5602.
- Mu, N.; Luan, Y.; and Jia, Q.-S. 2025. Preference-based multi-objective reinforcement learning. *IEEE Transactions on Automation Science and Engineering*.
- Munos, R.; Valko, M.; Calandriello, D.; Gheshlaghi Azar, M.; Rowland, M.; Guo, Z. D.; Tang, Y.; Geist, M.; Mesnard, T.; Fiegel, C.; Michi, A.; Selvi, M.; Girgin, S.; Momchev, N.; Bachem, O.; Mankowitz, D. J.; Precup, D.; and Piot, B. 2024. Nash Learning from Human Feedback. In Salakhutdinov, R.; Kolter, Z.; Heller, K.; Weller, A.; Oliver, N.; Scarlett, J.; and Berkenkamp, F., eds., *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 36743–36768. PMLR.
- Muslimani, C.; Johnstonbaugh, K.; Chandramouli, S.; Booth, S.; Knox, W. B.; and Taylor, M. E. 2025. Towards Improving Reward Design in RL: A Reward Alignment Metric for RL Practitioners. In *Reinforcement Learning Conference*.
- Ng, A. Y.; and Russell, S. J. 2000. Algorithms for Inverse Reinforcement Learning. In *Proceedings of the Seventeenth International Conference on Machine Learning*, 663–670.
- Ouyang, L.; Wu, J.; Jiang, X.; Almeida, D.; Wainwright, C.; Mishkin, P.; Zhang, C.; Agarwal, S.; Slama, K.; Ray, A.; et al. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744.
- Pásztor, B.; Buening, T. K.; and Krause, A. 2025. Stackelberg Learning from Human Feedback: Preference Optimization as a Sequential Game. In *NeurIPS 2025 Workshop: Second Workshop on Aligning Reinforcement Learning Experimentalists and Theorists*.
- Peschl, M.; Zgonnikov, A.; Oliehoek, F. A.; and Siebert, L. C. 2022. MORAL: Aligning AI with Human Norms through Multi-Objective Reinforced Active Learning. In *Proceedings of the 21st International Conference on Autonomous Agents and Multiagent Systems*, 1038–1046.
- Pierrot, T.; Richard, G.; Beguir, K.; and Cully, A. 2022. Multi-objective quality diversity optimization. In *Proceedings of the genetic and evolutionary computation conference*, 139–147.
- Rafailov, R.; Sharma, A.; Mitchell, E.; Manning, C. D.; Ermon, S.; and Finn, C. 2023. Direct preference optimization: Your language model is secretly a reward model. *Advances in neural information processing systems*, 36: 53728–53741.
- Rame, A.; Couairon, G.; Dancette, C.; Gaya, J.-B.; Shukor, M.; Soulier, L.; and Cord, M. 2023. Rewarded soups: towards pareto-optimal alignment by interpolating weights fine-tuned on diverse rewards. *Advances in Neural Information Processing Systems*, 36: 71095–71134.
- Rodriguez-Soto, M.; Rodriguez-Aguilar, J. A.; Lopez-Sanchez, M.; and Nowé, A. 2023. Multi-objective reinforcement learning for guaranteeing alignment with multiple values. In *2023 Adaptive and Learning Agents Workshop at AAMAS*.
- Rojers, D. M.; Vamplew, P.; Whiteson, S.; and Dazeley, R. 2013. A survey of multi-objective sequential decision-making. *Journal of Artificial Intelligence Research*, 48(1): 67–113.
- Ross, S.; Gordon, G.; and Bagnell, D. 2011. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, 627–635. JMLR Workshop and Conference Proceedings.
- Sener, O.; and Koltun, V. 2018. Multi-task learning as multi-objective optimization. *Advances in neural information processing systems*, 31.
- Shen, W. F.; Qiu, X.; Whitehouse, C.; Alazraki, L.; Goel, S.; Barbieri, F.; Willi, T.; Mathur, A.; and Leontiadis, I. 2026. Rethinking Rubric Generation for Improving LLM Judge and Reward Modeling for Open-ended Tasks. *arXiv preprint arXiv:2602.05125*.
- Shin, D.; Dragan, A. D.; and Brown, D. S. 2023. Benchmarks and Algorithms for Offline Preference-Based Reward Learning. ArXiv:2301.01392 [cs].
- Siddique, U.; Sinha, A.; and Cao, Y. 2023. Fairness in Preference-based Reinforcement Learning. In *ICML 2023 Workshop The Many Facets of Preference-Based Learning*.
- Silver, D.; Singh, S.; Precup, D.; and Sutton, R. S. 2021. Reward is enough. *Artificial intelligence*, 299: 103535.

- Siththaranjan, A.; Laidlaw, C.; and Hadfield-Menell, D. 2024. Distributional Preference Learning: Understanding and Accounting for Hidden Context in RLHF. In *The Twelfth International Conference on Learning Representations*.
- Skalse, J. M. V.; and Abate, A. 2023. The Reward Hypothesis is False.
- Sorensen, T.; Moore, J.; Fisher, J.; Gordon, M. L.; Miresghallah, N.; Rytting, C. M.; Ye, A.; Jiang, L.; Lu, X.; Dziri, N.; Althoff, T.; and Choi, Y. 2024. Position: A Roadmap to Pluralistic Alignment. In Salakhutdinov, R.; Kolter, Z.; Heller, K.; Weller, A.; Oliver, N.; Scarlett, J.; and Berkenkamp, F., eds., *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 46280–46302. PMLR.
- Stiennon, N.; Ouyang, L.; Wu, J.; Ziegler, D.; Lowe, R.; Voss, C.; Radford, A.; Amodei, D.; and Christiano, P. F. 2020. Learning to summarize with human feedback. *Advances in neural information processing systems*, 33: 3008–3021.
- Sutton, R. S.; and Barto, A. G. 1998. *Reinforcement learning: an introduction*. Adaptive computation and machine learning. Cambridge, Mass: MIT Press. ISBN 978-0-262-19398-6.
- Tan, J.; Zhang, T.; Coumans, E.; Iscen, A.; Bai, Y.; Hafner, D.; Bohez, S.; and Vanhoucke, V. 2018. Sim-to-Real: Learning Agile Locomotion For Quadruped Robots. *Preprint*.
- Teoh, J.; Varakantham, P.; and Vamplew, P. 2025. On Generalization Across Environments In Multi-Objective Reinforcement Learning. In *The Thirteenth International Conference on Learning Representations*.
- Tessler, M. H.; Bakker, M. A.; Jarrett, D.; Sheahan, H.; Chadwick, M. J.; Koster, R.; Evans, G.; Campbell-Gillingham, L.; Collins, T.; Parkes, D. C.; Botvinick, M.; and Summerfield, C. 2024. AI can help humans find common ground in democratic deliberation. *Science*, 386(6719): eadq2852.
- Umer, M.; Mohsin, M. A.; Bilal, A.; Chaudhry, A.; Haupt, A.; Koyejo, S.; Fox, E.; and Cioffi, J. M. 2026. General Preference Reinforcement Learning. *arXiv preprint arXiv:2605.18721*.
- Vamplew, P.; Dazeley, R.; Berry, A.; Issabekov, R.; and Dekker, E. 2011. Empirical evaluation methods for multiobjective reinforcement learning algorithms. *Machine learning*, 84(1): 51–80.
- Vamplew, P.; Smith, B. J.; Källström, J.; Ramos, G.; Rădulescu, R.; Roijers, D. M.; Hayes, C. F.; Heintz, F.; Mannion, P.; Libin, P. J.; et al. 2022. Scalar reward is not enough: A response to silver, singh, precup and sutton (2021). *Autonomous Agents and Multi-Agent Systems*, 36(2): 41.
- Van Seijen, H.; Fatemi, M.; Romoff, J.; Laroche, R.; Barnes, T.; and Tsang, J. 2017. Hybrid reward architecture for reinforcement learning. *Advances in neural information processing systems*, 30.
- Wang, Z.; Rahmani, S.; Cornelisse, D.; Sarkar, B.; Goldie, A. D.; Foerster, J. N.; and Whiteson, S. 2026. Learning to Drive in New Cities Without Human Demonstrations. In *Workshop on Simulation for Autonomous Driving*.
- White, D. 1982. Multi-objective infinite-horizon discounted Markov decision processes. *Journal of mathematical analysis and applications*, 89(2): 639–647.
- Wu, Z.; Hu, Y.; Shi, W.; Dziri, N.; Suhr, A.; Ammanabrolu, P.; Smith, N. A.; Ostendorf, M.; and Hajishirzi, H. 2023. Fine-grained human feedback gives better rewards for language model training. *Advances in Neural Information Processing Systems*, 36: 59008–59033.
- Xu, J.; Tian, Y.; Ma, P.; Rus, D.; Sueda, S.; and Matusik, W. 2020. Prediction-guided multi-objective reinforcement learning for continuous robot control. In *International conference on machine learning*, 10607–10616. PMLR.
- Yang, R.; Pan, X.; Luo, F.; Qiu, S.; Zhong, H.; Yu, D.; and Chen, J. 2024. Rewards-in-Context: Multi-objective Alignment of Foundation Models with Dynamic Preference Adjustment. In *Forty-first International Conference on Machine Learning*.
- Yang, R.; Sun, X.; and Narasimhan, K. 2019. A generalized algorithm for multi-objective reinforcement learning and policy adaptation. *Advances in neural information processing systems*, 32.
- Ye, C.; Xiong, W.; Zhang, Y.; Dong, H.; Jiang, N.; and Zhang, T. 2024. Online Iterative Reinforcement Learning from Human Feedback with General Preference Model. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*.
- Yu, T.; Quillen, D.; He, Z.; Julian, R.; Hausman, K.; Finn, C.; and Levine, S. 2020. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on robot learning*, 1094–1100. PMLR.
- Yuan, Y.; Zheng, Z.; Dong, Z.; and Hao, J. 2024. MOD-ULI: Unlocking Preference Generalization via Diffusion Models for Offline Multi-Objective Reinforcement Learning. *ArXiv:2408.15501 [cs]*.
- Zhi-Xuan, T.; Carroll, M.; Franklin, M.; and Ashton, H. 2025. Beyond Preferences in AI Alignment: T. Zhi-Xuan et al. *Philosophical Studies*, 182(7): 1813–1863.
- Zhou, Z.; Liu, J.; Shao, J.; Yue, X.; Yang, C.; Ouyang, W.; and Qiao, Y. 2024. Beyond one-preference-fits-all alignment: Multi-objective direct preference optimization. In *Findings of the Association for Computational Linguistics: ACL 2024*, 10586–10613.
- Zhu, B.; Dang, M.; and Grover, A. 2023. Scaling Pareto-Efficient Decision Making via Offline Multi-Objective RL. In *The Eleventh International Conference on Learning Representations*.

Appendix

A Extended Related Works

Vector Rewards and the Limits of Scalar Reward. A key premise in modern RL is the *reward hypothesis*: that goals can be adequately captured by maximizing a single *scalar* reward (Silver et al. 2021). A growing body of work contests the sufficiency of this framing, arguing that many objectives of interest cannot always be expressed by scalar reward (Vamplew et al. 2022; Skalse and Abate 2023; Bowling et al. 2023; Van Seijen et al. 2017) and are more naturally represented as *vectors* (Vamplew et al. 2022; Skalse and Abate 2023). Vector rewards and Pareto-optimal policy sets are common in multi-objective decision-making (Rojers et al. 2013; Hayes et al. 2022b), where general policy optimization recovers the Pareto front by conditioning a single policy-network on a sampled weight vector. This literature, however, largely assumes the ground-truth vector reward function is given. The reward-free viewpoint of (Chen et al. 2026) relaxes part of this assumption by using preference-guided exploration as an auxiliary task, yet still requires the ground-truth multi-objective reward during training. In contrast, LEMUR avoids these assumptions. Instead, it posits that true objectives are never directly observed and must be learned, in this case from preference feedback. Thus, the agent jointly learns reward models and an optimized policy that balances its various components.

Multi-Dimensional and Fine-Grained Preference Learning. Standard RLHF distills human comparisons into a single scalar reward (Christiano et al. 2017; Ouyang et al. 2022), which can conflate distinct criteria and collapse the multi-objective structure of human values (Sorensen et al. 2024). A line of work therefore decomposes feedback into finer-grained components: Fine-Grained RLHF (Wu et al. 2023) attaches rewards to localized segments and categories, while Rewarded Soups (Rame et al. 2023) and MODPO (Zhou et al. 2024) obtain a separate signal per objective and expose a Pareto family through weight interpolation or scalarized preference optimization. These methods combine per-objective signals *post hoc* rather than jointly learning the rewards and a trade-off policy, and are developed almost exclusively for LLM post-training. A related direction forgoes the reward model entirely, optimizing the policy directly from preference data (e.g., DPO (Rafailov et al. 2023)); such methods are effective but train on static or periodically refreshed preferences, forgoing the online, interactive feedback and policy optimization, ideal for reliable reward learning under policy improvement (Christiano et al. 2017; Lee, Smith, and Abbeel 2021; Gao, Schulman, and Hilton 2023; Bai et al. 2022; Ross, Gordon, and Bagnell 2011; Ibarz et al. 2018; Stiennon et al. 2020).

A further perspective treats heterogeneous feedback as hidden context, learning a distribution over reward functions (Siththaranjan, Laidlaw, and Hadfield-Menell 2024); this captures *which* preferences are present but does not, on its own, optimize an explicit compromise between them. LEMUR differs from all three: it learns an explicit, objective-specific reward model per feedback stream *online*, and jointly optimizes a set of policies over the resulting vector reward

in continuous control. A complementary line moves beyond the Bradley-Terry preference model assumption itself. General preference models represent preferences with a richer (e.g., skew-symmetric, k -dimensional) structure that admits *intransitive* cycles, optimizing policies directly against this structure rather than a scalar reward (Umer et al. 2026). Related game-theoretic formulations cast alignment as a Nash or Stackelberg equilibrium over preferences (Munos et al. 2024; Pásztor, Buening, and Krause 2025). Intransitivity is a different failure mode of scalar rewards from the one we study; it concerns the *shape* of preferences rather than the presence of multiple objectives, and we regard bridging it with multi-objective preference optimization as promising future work. In the LLM setting, rubric-based rewards have similarly been used to supply multi-dimensional supervision for reinforcement fine-tuning, though their reliability is sensitive to rubric coverage and correlated criteria (Gunjal et al. 2025; Shen et al. 2026). These directions are largely orthogonal to LEMUR, which targets online vector-reward learning and trade-off policy optimization.

Connections to Diversity and Foundation-Model Post-Training. A contemporary line of work observes that scalar RL post-training induces *entropy collapse*, eroding the solution diversity required by inference-time search (Kirk et al. 2024). Most directly, Vector Policy Optimization (Bahlous-Boldi et al. 2026) samples scalarizations over the reward simplex and trains a policy to output a set of solutions spanning the Pareto front, improving downstream best-of- N search. Such methods share LEMUR’s premise that collapsing a vector reward into a scalar discards useful structure. They differ from our setting in three respects: (i) they target LLM *test-time search*, seeking a diverse candidate pool for a downstream selector, whereas LEMUR seeks a policy that *compromises* between objectives *during deployment*; (ii) they assume the reward components are *known and observable* (e.g., per-test-case correctness), whereas LEMUR must *learn* them from feedback; and (iii) they operate on natural language generation rather than continuous control. We therefore treat this literature as motivating context rather than comparable works, and leave the study of train-time multi-objective learning from feedback to improve test-time diversity (Ding et al. 2024; Pierrot et al. 2022) as future work.

Pluralistic Alignment and Multiple Principals. LEMUR’s multi-teacher formulation connects to *pluralistic alignment*, which holds that a single reward model cannot represent the plurality of human values (Sorensen et al. 2024) and that an agent should instead balance multiple objectives to reach a compromise across them. A closely related framing casts this as serving *multiple principals*: a single agent acting on behalf of several stakeholders must respect the preferences of each, turning alignment into the problem of representing and trading off competing principals rather than satisfying one (Fickinger et al. 2020). How to reconcile these principals is itself contested. Naively aggregating preferences via RLHF has been shown to behave as a Borda count over latent objectives, with limited normative justification (Siththaranjan, Laidlaw, and Hadfield-Menell 2024), and others question whether aggregation is the right

frame at all, proposing non-aggregative alternatives for reconciling plural values (Zhi-Xuan et al. 2025). Practical efforts that do aggregate rely on curated consensus datasets or hand-specified aggregation functions (Bakker et al. 2022; Rodriguez-Soto et al. 2023; Tessler et al. 2024), both costly to obtain a priori and brittle when preferences shift during deployment. Rather than collapsing principals to a consensus in advance or assuming their reward functions are known, LEMUR preserves each principal’s objective as a separate learned reward model and recovers an explicit compromise through multi-objective optimization.

B LEMUR Pseudocode

Algorithm 1: LEMUR

Require: Feedback frequency K , queries per session M , number of objectives m

- 1: Initialize policy ϕ and reward models $\{\psi_j\}_{j=1}^m$
- 2: Initialize shared buffer $\mathcal{B} \leftarrow \emptyset$ and preference datasets $\mathcal{D}_j \leftarrow \emptyset$
- 3: $\mathcal{B} \leftarrow \text{EXPLORE}(\pi_\phi, r^{int})$ ▷ Pre-training
- 4: **for** each iteration **do**
- 5: **if** iteration mod $K == 0$ **then** ▷ Reward learning
- 6: **for** each teacher $j \in \{1, \dots, m\}$ **do**
- 7: Sample queries $(\sigma^0, \sigma^1) \sim \mathcal{B}$
- 8: $\mathcal{D}_j \leftarrow \mathcal{D}_j \cup \{(\sigma^0, \sigma^1, y_j)\}_{n=1}^M$
- 9: Update $\hat{r}_{\psi_j}$ on $\mathcal{D}_j$ via cross-entropy loss
- 10: **end for**
- 11: **end if**
- 12: Collect transitions (s_t, a_t, s_{t+1}) with π_ϕ and store in $\mathcal{B}$
- 13: **for** each gradient step **do** ▷ Multi-objective policy optimization
- 14: Sample batch $(s, a, s') \sim \mathcal{B}$
- 15: Relabel vector rewards: $r_w = \mathbf{w}^\top \hat{\mathbf{r}}_\psi(s, a)$
- 16: Update actor and critic using MO-SAC
- 17: **end for**
- 18: **end for**

C Additional Experiments

C.1 Adding a Teacher Mid-Training

A practical deployment of preference-based MORL is unlikely to have a fixed, known set of stakeholders at the outset: new preference sources appear over time. A framework that requires retraining from scratch whenever a teacher joins is therefore of limited practical use. Because LEMUR maintains one weight-conditioned reward model per teacher and couples them only through the shared MORL/D population, adding a teacher requires instantiating a single new reward model and extending the vector reward, leaving the existing reward models and the trained policy population intact.

We test this directly: a run begins with the standard two-teacher MO-Cheetah setup and a third teacher is introduced

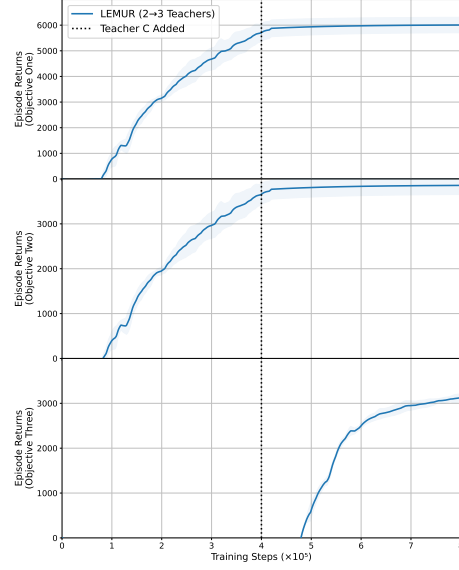


Figure 6: **Adding a third teacher mid-training (MO-Cheetah).** A third teacher is introduced at 4×10^5 steps (dotted line) into an already-training two-teacher run. The new objective (bottom) is learned from scratch while the two existing objectives (top, middle) are preserved, so no retraining from scratch is required. Mean $\pm$ std over five seeds.

at 4×10^5 environment steps, with training continuing uninterrupted from the existing population. Figure 6 shows the outcome. The newly added Objective Three is optimized from a cold start and rises steeply once its teacher joins, while Objectives One and Two, already near convergence at the changepoint, are retained rather than degraded, settling into a marginally adjusted equilibrium that accommodates the new objective. Crucially, the framework absorbs the new preference source *online*, without reinitialising either the reward models or the policy population, demonstrating that the cost of adding a teacher is incremental rather than a full retraining cycle.

C.2 Non-Stationary Preferences

Human preferences are not static, and a teacher may revise its trade-off during the course of training. Since LEMUR re-queries every teacher and relabels the shared replay buffer at each feedback interval, a revised preference propagates into the learned reward and hence into the policy objective without any special-case handling. To test this, Teacher A’s weight vector is altered at 2×10^5 steps mid-training.

Figure 7 shows that all three objectives continue to improve monotonically across the changepoint: the policy adapts to the revised utility rather than collapsing or plateauing, and the widening variance band immediately after the change reflects the transient period during which the reward models are being re-fit to the new preference before the population re-converges.

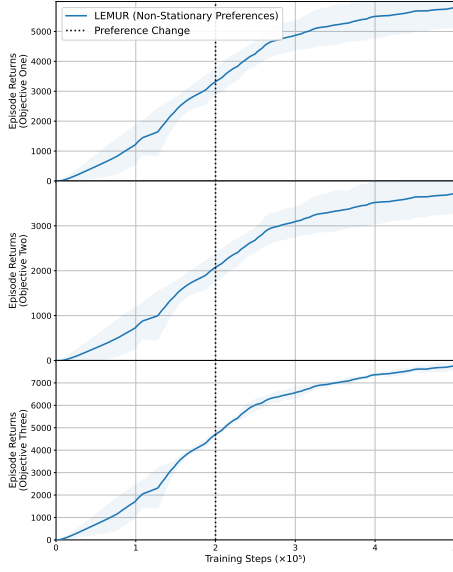


Figure 7: **Non-stationary preferences (MO-Cheetah).** Teacher A’s preference vector is changed at 2×10^5 steps (dotted line). Returns continue to improve across the changepoint, indicating that the online re-query and buffer-relabeling loop tracks the revised utility. Mean $\pm$ std over five seeds.

C.3 Ablation: Query Length

LEMUR elicits preferences over *trajectory segments*, determining the behavioral context teachers see per comparison. At a fixed budget of 300 queries per teacher, we tested segment lengths of 50, 35, and 1 transition (Figure 8). LEMUR maintains performance even with shorter segments of feedback. The improvement in performance due to longer segments is potentially due to more context for reward learning (Lee et al. 2021; Lee, Smith, and Abbeel 2021).

C.4 Ablation: Query Sampling Strategy

We also tested if *which* segments are queried matters at a fixed budget and length. We compared LEMUR’s default uniform sampler against an entropy-based sampler that selects the most uncertain segment pairs from a $10\times$ candidate pool (Figure 9).

Entropy-based selection yields a modest gain in performance. Uniform sampling recovers most of the achievable return without requiring uncertainty estimates, candidate pools, or extra forward passes. Combined with our query-length findings, this shows that under a fixed budget, *how much behavior each query covers* matters significantly more than *which* specific segments are chosen.

C.5 Overlapping Preferences

Our main results consider teachers whose anchors are genuinely conflicting. A natural question is whether the machinery required to resolve conflict imposes a cost when the teachers largely *agree*. We therefore repeat the experiment with overlapping (near-aligned) teacher weight vectors, comparing LEMUR against the ground-truth oracle upper bound

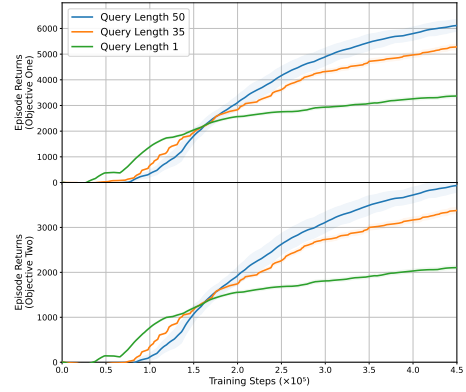


Figure 8: **Effect of query segment length (MO-Cheetah).** Ground-truth return per objective for preference queries of length 50 (default), 35 and 1 transition, at a fixed budget of 300 queries per teacher. Shading is ± 1 std; the length-35 and length-1 arms are single seeds and carry a nominal band. Shorter segments learn faster early but plateau by $\sim 2 \times 10^5$ steps, while length 50 overtakes them and continues improving.

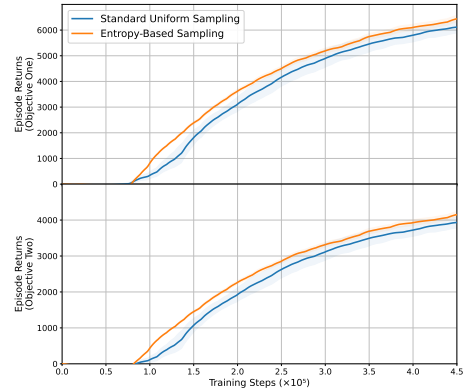


Figure 9: **Uniform vs. entropy-based query sampling (MO-Cheetah).** Ground-truth return per objective for the default uniform sampler and an entropy-based sampler that scores a $10\times$ candidate pool by reward-model uncertainty. Shading is ± 1 std; the entropy arm is a single seed and carries a nominal band. Entropy-based selection is consistently ahead, but by a small margin relative to the effect of query length (Figure 8).

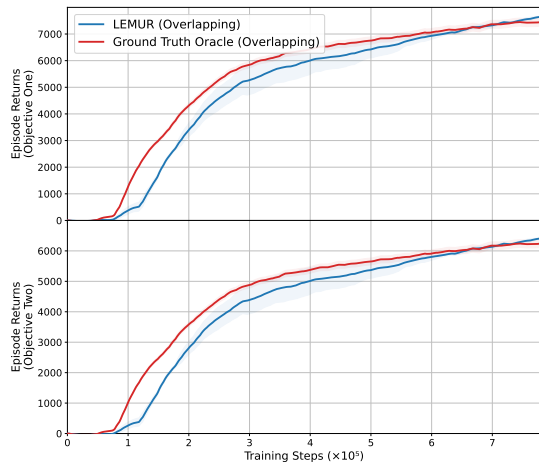


Figure 10: **Overlapping preferences (MO-Cheetah).** With near-aligned teacher anchors, LEMUR converges close to the ground-truth oracle on both objectives, showing that the method degrades gracefully when teachers largely agree. Mean $\pm$ std over five seeds.

under the same overlap condition.

Figure 10 shows that LEMUR tracks the oracle closely on both objectives, converging to a comparable final return with only a modest lag in sample efficiency. This indicates that the weight-conditioned formulation degrades gracefully toward the single-preference case, when there is little conflict to resolve.

C.6 Ablation: Varying Levels of Teacher Conflict

This ablation isolates the *degree* of teacher disagreement. Holding MO-Cheetah, the MORL/D backbone, explorer, and query budget fixed, we sweep the anchors from mildly to severely opposed and train LEMUR alongside an Oracle given the same anchors at each level. Comparing against a per-level Oracle separates degradation caused by the trade-off becoming harder from degradation caused by reward learning failing under disagreement. LEMUR remains competitive across the sweep (Figure 11).

C.7 Ablation: Weight-Conditioned Reward Model vs. Reward Ensemble

LEMUR’s central architectural choice is to condition each teacher’s reward model on a preference weight vector, rather than learning an ensemble of unconditioned reward models as in the earlier formulation. To isolate the contribution of this choice we hold everything else fixed, the same MORL/D backbone, explorer, teacher anchors, and query budget, and vary only the reward model.

Figure 12 shows a substantial and consistent gap on both objectives: the weight-conditioned model converges to $6,812 \pm 39$ and $4,404 \pm 22$, against $4,556 \pm 369$ and $2,902 \pm 245$ for the ensemble. The ensemble also exhibits an order-of-magnitude larger standard error, indicating greater seed-to-seed instability.

D LEMUR Implementation Details

Training Details. We utilize the MORL/D algorithm (Felten, Talbi, and Danoy 2024), a Multi-Objective Soft Actor-Critic (MO-SAC) implementation from the *MORL-Generalization* benchmark (Teoh, Varakantham, and Vamplew 2025). A summary of the hyperparameters is provided in Tables 3 and 4.

In the initial *Exploration* phase (Stage 0), an intrinsic-motivation explorer bootstraps a replay buffer of environment transitions, run for 50,000 timesteps on LunarLander, 80,000 on Hopper, and 100,000 on Cheetah and MetaWorld. This buffer is shared identically with every baseline, so no method receives more exploration data than another.

In the *Reward Learning* phase (Stage 1), each of the m teachers trains its own *weight-conditioned* reward model: a 2-layer MLP with 256 hidden units that takes the state-action pair *concatenated with a preference weight vector* w , trained by Bradley-Terry cross-entropy over pairwise trajectory-segment comparisons of length $H = 50$. Rather than querying each teacher only at its own fixed anchor w_j , weights are sampled from a Dirichlet distribution centred on that anchor with concentration $\kappa = 30$, so a single model generalises across a neighbourhood of the anchor instead of memorising one point on the simplex. At each iteration of reward-learning and policy-optimization, the per-teacher query budgets are $M = 200$ (LunarLander), 500 (Hopper), and 300 (Cheetah, MetaWorld), each trained for 100 epochs with Adam optimizer.

For *Multi-Objective Policy Optimization* (Stages 2-3), a population of 6 MO-SAC policies is trained on the m -dimensional learned vector reward, coupled by a shared replay buffer, weighted-sum scalarization, PSA weight adaptation, and weight transfer between neighbouring policies (neighbourhood size 2). Learning rates and exchange frequencies are adapted per environment (Table 4) while the population size is held constant at 6 across all environments. Crucially, reward learning does not terminate after Stage 1: every *feedback_interval* steps the pipeline re-queries all teachers, performs 30 online reward-update epochs, and *relabels the shared replay buffer* with the updated reward models, so the policy and the reward model co-adapt throughout training.

E Baselines Implementation Details

To ensure a fair comparison, all baselines share LEMUR’s Stage-0 explorer, scripted teacher weight vectors, query budget M , query length, interaction frequency K , reward-model capacity, and total environment-step budget, and are evaluated and logged under identical protocols (Tables 3 and 4). The primary distinction between methods therefore lies in *how conflicting reward signals are aggregated and optimized*, not in the data or compute they receive.

Each baseline retains its own defining reward-learning mechanism: MORAL’s adversarial AIRL rewards, PbMORL’s weight-conditioned Bradley-Terry model, and FPBRL’s GGF welfare model. Where a method’s original policy optimizer would place it at an unfair disadvantage in our environments, we adapt *in the baseline’s favour*, upgrading

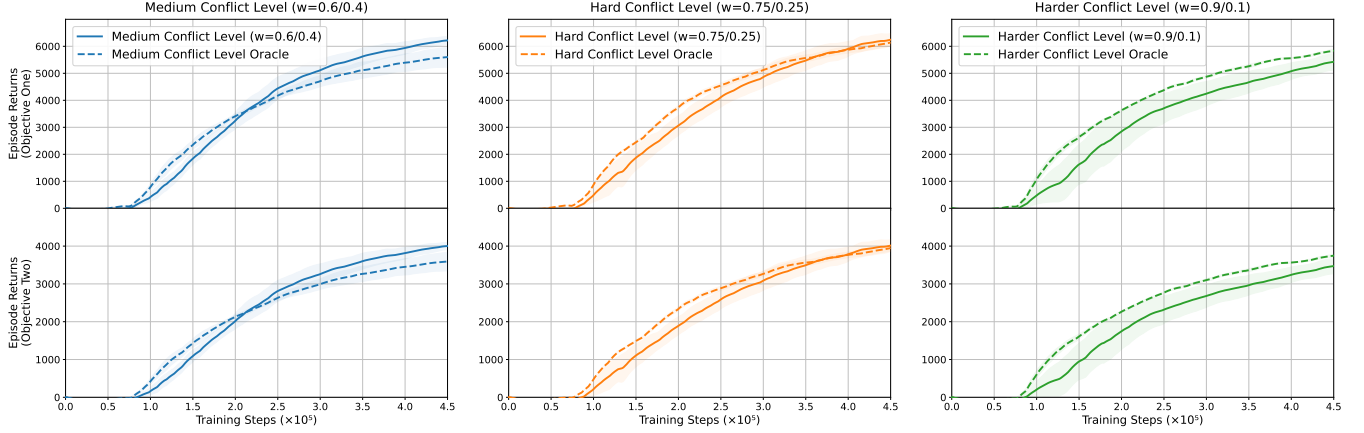


Figure 11: **Varying levels of teacher conflict (MO-Cheetah)**. Each column is one conflict level, set by the teacher preference anchors: medium ($w = [0.6, 0.4]/[0.4, 0.6]$), hard ($[0.75, 0.25]/[0.25, 0.75]$) and harder ($[0.9, 0.1]/[0.1, 0.9]$). Rows give each objective’s ground-truth return. Solid lines are LEMUR, dashed the ground-truth-reward Oracle under the identical configuration; shading is ± 1 std across seeds, with a common y -scale per row.

Hyperparameter	Value	Hyperparameter	Value
<i>Exploration (Stage 0)</i>			
Explorer Timesteps	50,000 (LunarLander), 80,000 (Hopper), 100,000 (Cheetah, MetaWorld)	Explorer Batch Size	128
Explorer Policy / Q LR	3×10^{-4}	Optimizer	Adam
<i>Reward Learning (Stage 1)</i>			
Reward Model	Weight-conditioned MLP (2-layer)	Hidden Dim	256
Reward Learning Rate	5e-4 (LL), 3e-4 (Hopper), 2.5e-4 (Cheetah), 1.5e-4 (MetaWorld)	Reward Batch Size	64
Queries per Teacher (M)	200 (LL), 500 (Hopper), 300 (Cheetah, MetaWorld)	Query Length (H)	50
Reward Epochs	100 (All Environments)	Loss	Bradley-Terry CE
Dirichlet Concentration κ	30.0 (All Environments)	Optimizer	Adam
<i>Online Reward Updates (Stages 2–3)</i>			
Online Update Epochs	30	Buffer Relabeling	True

Table 3: Hyperparameters for Exploration (Stage 0) and Reward Learning (Stage 1).

Hyperparameter	Value	Hyperparameter	Value
Algorithm	MORL/D (MO-SAC)	Batch Size	512 (LL, MetaWorld), 1024 (Hopper, Cheetah)
MORL Timesteps	100,000 (LL), 750,000 (Hopper, Cheetah), 500,000 (MetaWorld)	Target Entropy Scale	0.3
Policy LR	5e-5 (LL), 3e-4 (Hopper, Cheetah), 1e-4 (MetaWorld)	Optimizer	Adam
Q LR	5e-5 (LL), 1e-4 (Hopper, MetaWorld), 3e-4 (Cheetah)	Discount Factor γ	0.99
Population Size	6 (All Environments)	Shared Buffer	True
Exchange Frequency	5,000 (LL), 10,000 (Hopper, Cheetah, MetaWorld)	Weight Transfer	True
Weight Adaptation	PSA	Neighborhood Size	2
Scalarization	Weighted Sum (ws)		

Table 4: Hyperparameters for Multi-Objective Policy Optimization (Stages 2–3).

Hyperparameter	Value	Hyperparameter	Value
<i>PbMORL (Mu, Luan, and Jia 2025)</i>			
Reward Model	Weight-conditioned MLP	Hidden Dim	256
Query Budget (M)	300 (total, split across teachers)	Query Length (H)	50
Reward LR / Epochs	$2.5\text{e-}4 / 100$	Reward Batch Size	64
Optimizer (policy)	Envelope (LunarLander), MORL/D (Others)	Population Size	6
<i>FPbRL (Siddique, Sinha, and Cao 2023)</i>			
Reward Model	GGF welfare MLP (K -dim)	Hidden Dim	256
Query Budget (M) / Length	300 / 50	Reward LR / Epochs	$2.5\text{e-}4 / 100$
Policy Algorithm	PPO (continuous), SAC-discrete (LunarLander)	Policy LR	$3\text{e-}4$
PPO Steps / Iter	2,048	PPO Minibatches	32
PPO Update Epochs	10	PPO Clip Coef	0.2
GAE λ	0.95	GGF Weights	Decreasing on sorted utilities

Table 5: Hyperparameters for the PbMORL and FPbRL baselines.

Hyperparameter	Value	Hyperparameter	Value
<i>Stage 0 & 1: Expert Collection & AIRL Reward Inference</i>			
Expert Timesteps	1×10^6	Demo Episodes	50
Expert Net Arch.	256, 256	Expert Batch Size	256
Expert Policy / Q LR	3×10^{-4}	Expert Buffer Size	1×10^6
Expert α / τ	$0.2 / 0.005$	Expert Learning Starts	10,000
AIRL Hidden Dim	32	AIRL Generator Timesteps	200,000
AIRL Disc. Update Interval	1,024	AIRL Gen. Net Arch.	256, 256
AIRL Gen. Buffer / Batch	300,000 / 256	Optimizer	Adam

Table 6: MORAL (Peschl et al. 2022): hyperparameters for expert demonstration collection and adversarial AIRL reward training.

Hyperparameter	Value	Hyperparameter	Value
<i>Stage 2: Online Policy Optimization with Active Learning</i>			
Policy Algorithm	SAC (all environments; see App. E)	Active Query Budget	5,000
Policy / Q LR	3×10^{-4}	Query Interval	200
Batch Size	256	Scalarization Posterior	Bradley-Terry
Discount Factor γ	0.99	Query Strategy	Volume removal

Table 7: MORAL (Peschl et al. 2022): hyperparameters for online policy optimization (Stage 2). Note we optimize with SAC rather than the original work’s PPO; see Appendix E.

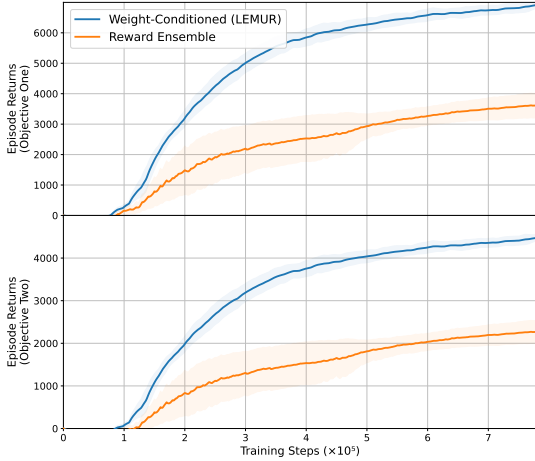


Figure 12: **Reward-model ablation (MO-Cheetah).** The weight-conditioned reward model substantially outperforms the reward-ensemble variant on both objectives under an identical optimizer, explorer, and query budget. Mean $\pm$ std over five seeds.

the optimizer rather than reproducing the paper verbatim, so that reported gaps reflect differences in reward learning and preference aggregation, the object of study, rather than differences in policy optimization. Most notably, MORAL is optimized with SAC rather than the PPO used in the original work, substantially improving its sample efficiency on our continuous-control tasks. All such deviations are disclosed below.

Utilitarian Agent. This baseline imposes an *a priori* scalarization on the objectives. Like LEMUR, it learns m distinct reward models $\{\hat{r}_{\psi_j}\}_{j=1}^m$, one per teacher, but rather than learning a set of trade-off policies it trains a *single* SAC agent to optimize their arithmetic mean:

$$r_{\text{util}}(s, a) = \frac{1}{m} \sum_{j=1}^m \hat{r}_{\psi_j}(s, a). \quad (3)$$

Learning rates, batch sizes, and buffer sizes are identical to LEMUR, with the population size set to 1 (standard single-objective SAC).

Naive Data Pooling. This baseline aggregates conflicting preferences at the *data* level, mimicking standard RLHF applied to heterogeneous feedback. Rather than maintaining separate datasets $\mathcal{D}_j$ per objective, all feedback tuples are stored in a single monolithic dataset $\mathcal{D}_{\text{pool}} = \bigcup_{j=1}^m \mathcal{D}_j$, over which one reward model $\hat{r}_{\text{pool}}$ is trained to minimize the cross-entropy loss. The policy is then trained with standard SAC to maximize

$$r_{\text{naive}}(s, a) = \hat{r}_{\text{pool}}(s, a). \quad (4)$$

As with the Utilitarian baseline, we use the environment-specific hyperparameters in Table 4 with the population size fixed to 1.

PbMORL (Mu, Luan, and Jia 2025). The original PbMORL assumes a single, internally-consistent teacher whose preferences are valid under any sampled scalarization weight, and therefore has no mechanism for multiple, independently-opinionated teachers. We retain its weight-conditioned m -dimensional reward model, trained with the Bradley-Terry cross-entropy objective over pairwise trajectory comparisons, and extend it to our setting in the two most natural ways: *PbMORL-naive* pools all teachers’ preferences into one shared weight-conditioned model, while *PbMORL-utilitarian* trains a separate model per teacher and combines them at inference by a fixed uniform average. Each teacher answers every query under its own fixed weight vector, exactly as in LEMUR.

The original paper pairs its reward model with Envelope Q-learning (Yang, Sun, and Narasimhan 2019), a discrete, value-based method. We retain this paper-faithful pairing on LunarLander, but Envelope’s Q-network requires an argmax over actions and is structurally inapplicable to continuous control; on Hopper, HalfCheetah, and MetaWorld we therefore substitute MORL/D (Felten, Talbi, and Danoy 2024), the same population-based optimizer LEMUR uses. This is the only structural substitution, and it equalizes the optimizer between PbMORL and LEMUR on those environments, isolating the reward-learning strategy as the sole difference.

FPbRL (Siddique, Sinha, and Cao 2023). We implement FPbRL’s K -dimensional welfare reward model, trained from Generalized Gini Welfare (GGF)-based preferences over the same $K = 2$ scripted teachers across which LEMUR and the other baselines compromise. At each policy-update iteration, the learned K -dimensional reward is scalarized by the GGF weight assignment, which places the largest weight on the currently worst-off objective, refreshed from a running per-objective return estimate, the standard practical form of Siddique et al.’s fair policy gradient.

Unlike MORAL, we retain PPO for continuous-action environments, matching the original paper: FPbRL’s fair policy gradient is formulated for an on-policy optimizer, and substituting an off-policy method would alter the method’s semantics rather than simply strengthen it. On LunarLander we use SAC-discrete, as no discrete PPO implementation is used elsewhere in our pipeline. In addition to the per-teacher returns reported for all methods, we log FPbRL’s own fairness metrics (welfare, coefficient of variation, and minimum objective), so that it is also evaluated on the criterion it is explicitly designed to optimize.

MORAL (Peschl et al. 2022). We reimplement MORAL’s pipeline in three stages: (i) two expert policies are trained on the ground-truth per-teacher scalarized reward and used to collect demonstrations; (ii) for each teacher, an AIRL (Fu, Luo, and Levine 2018) discriminator is trained *adversarially* against a live generator, rather than against a fixed pool of shuffled expert transitions, which would render training non-adversarial, yielding a per-teacher learned reward $g(s)$; and (iii) an active-learning wrapper scalarizes the two frozen AIRL rewards with a Bradley-Terry weight posterior, updated online via volume-removal preference queries, which a single-objective policy optimizes. Since the original

MORAL was evaluated only on grid-world tasks, we adopt the AIRL hyperparameters and network architectures of Fu et al. (Fu, Luo, and Levine 2018) for our high-dimensional MuJoCo experiments; these are detailed in Tables 6 and 7.

We deliberately preserve MORAL’s defining contribution, adversarial IRL reward learning combined with an actively-queried scalarization posterior, and do not replace it with our own preference-based reward model, as doing so would no longer constitute a MORAL baseline. We do, however, strengthen its policy optimization: the original work uses PPO, whereas we optimize with SAC (SAC-continuous, or SAC-discrete on LunarLander) across all environments. This off-policy upgrade materially improves MORAL’s sample efficiency under an identical environment-step budget and matches the backbone family used by LEMUR, ensuring MORAL is not penalized for an on-policy optimizer choice unrelated to its reward-learning contribution.

E.1 MORAL Baseline: Learned Weights and Optimiser Choice

Learned scalarisation weights. MORAL maintains a posterior over a scalarisation weight vector, refined through active queries, and it is this posterior, rather than a per-teacher reward decomposition, that carries its notion of whose preferences the policy is serving. Figure 13 tracks both components over training.

SAC vs. PPO. As described in Appendix E, we optimize the MORAL baseline with SAC rather than the PPO used in the original work, on the grounds that an on-policy optimizer would disadvantage the baseline for reasons unrelated to its reward-learning contribution. This ablation verifies that the substitution is genuinely favourable to MORAL and therefore that our reported comparison is conservative.

Figure 14 confirms this: holding MORAL’s adversarial AIRL reward learning and active-query scalarisation posterior fixed and varying only the policy optimizer, the SAC variant dominates PPO on both objectives throughout training, and the gap widens as training proceeds. The PPO variant additionally displays a pronounced sawtooth characteristic of on-policy updates (shown here under heavy smoothing). Reporting MORAL with SAC therefore strengthens the baseline relative to a faithful reproduction of the original paper, and the weight collapse in Figure 13 is a property of MORAL’s scalarization posterior rather than a symptom of the optimizer.

F Additional Results

F.1 Multi-Objective RL Metrics

Evaluating a multi-objective agent requires assessing the *set* of policies it recovers rather than any single return, so we adopt two metrics standard in the MORL literature (Hayes et al. 2022a; Roijers et al. 2013). Let $\mathcal{P} = \{J(\pi_1), \dots, J(\pi_P)\}$ denote the set of objective-value vectors attained by the learned policy population.

Hypervolume (HV). Given a reference point $\mathbf{z}$ dominated by all solutions, Hypervolume is the volume of the region

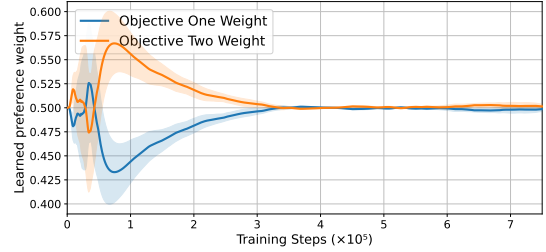


Figure 13: **MORAL’s learned scalarisation weights in (MO-Cheetah).** The two components of MORAL’s active-query scalarisation posterior over training.

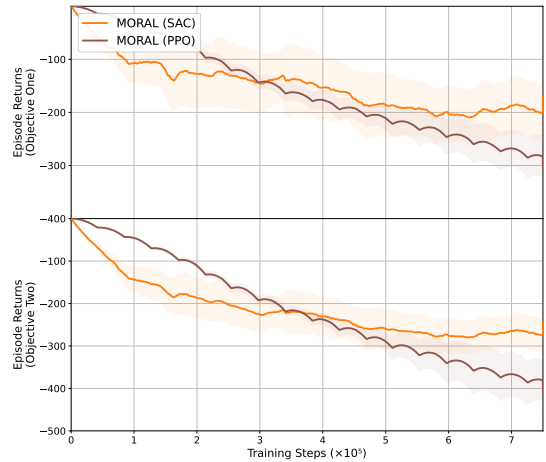


Figure 14: **MORAL optimizer ablation (MO-Cheetah).** With MORAL’s reward learning held fixed, SAC outperforms the original work’s PPO on both objectives, confirming that our SAC upgrade strengthens the baseline. Curves are heavily smoothed to expose the trend beneath PPO’s on-policy oscillation. Mean $\pm$ std over five seeds.

dominated by $\mathcal{P}$ and bounded by $\mathbf{z}$,

$$\text{HV}(\mathcal{P}, \mathbf{z}) = \Lambda \left(\bigcup_{\mathbf{p} \in \mathcal{P}} [\mathbf{z}, \mathbf{p}] \right), \quad (5)$$

where Λ is the Lebesgue measure. It simultaneously rewards solutions that are high-performing (pushing the front outward) and diverse (covering more of the objective space), and is the most widely adopted MORL quality indicator because it is the only common metric strictly monotonic with Pareto dominance: any set that dominates another is guaranteed a higher score (Roijsers et al. 2013). We use the reference point supplied by the *MORL-Generalization* benchmark (Teoh, Varakantham, and Vamplew 2025) so that values are comparable across methods within an environment; absolute magnitudes are not comparable *across* environments, since they depend on both the reference point and the reward scale.

Sparsity (SPS). Sparsity measures how evenly solutions are distributed along the recovered front. Sorting the $|\mathcal{P}|$ solutions by each objective i and writing $\tilde{P}_i(k)$ for the k -th value,

$$\text{SPS}(\mathcal{P}) = \frac{1}{|\mathcal{P}| - 1} \sum_{i=1}^m \sum_{k=1}^{|\mathcal{P}|-1} \left(\tilde{P}_i(k) - \tilde{P}_i(k+1) \right)^2, \quad (6)$$

with lower values indicating more uniform coverage (Xu et al. 2020). Sparsity must be read alongside Hypervolume rather than independently: a degenerate front that collapses to a single solution reports a low, apparently favourable value despite failing to cover the objective space, which is why we report both. This is the case for FPbRL, whose fixed welfare scalarization converges to a single policy, so no front is recovered and sparsity is undefined (—) on three of four environments.

Environment	LEMUR	PbMORL	FPbRL
Hypervolume ($\uparrow$)			
LunarLander	$1.10 \times 10^4 \pm 2.46 \times 10^2$	$1.09 \times 10^4 \pm 2.87 \times 10^2$	$5.05 \times 10^3 \pm 5.75 \times 10^2$
Hopper	$3.67 \times 10^5 \pm 2.01 \times 10^5$	$2.24 \times 10^5 \pm 0.000$	$7.19 \times 10^4 \pm 2.04 \times 10^4$
HalfCheetah	$4.86 \times 10^7 \pm 9.45 \times 10^5$	$4.78 \times 10^7 \pm 0.000$	$7.73 \times 10^5 \pm 2.91 \times 10^5$
MetaWorld-DrawerClose	$2.15 \times 10^5 \pm 6.49 \times 10^5$	$1.43 \times 10^5 \pm 4.43 \times 10^5$	$2.79 \times 10^5 \pm 3.39 \times 10^5$
Sparsity ($\downarrow$)			
LunarLander	134.5	7.8	—
Hopper	294.7	1731.7	—
HalfCheetah	294.7	2191.0	—
MetaWorld-DrawerClose	436.3	5564.7	0.000

Table 8: Hypervolume and Sparsity across benchmark environments. FPbRL’s fixed welfare scalarization fails to recover a set of trade-off policies, converging instead to a single solution: sparsity is therefore undefined (—) where no front exists, and its near-zero value on MetaWorld-DrawerClose reflects this collapse rather than uniform coverage. PbMORL is deterministic under our protocol on Hopper and HalfCheetah, hence zero variance.

F.2 Reward Model Evaluation Metrics

Policy return alone cannot distinguish a reward model that has genuinely recovered a teacher’s utility from one merely correlated with it on the visited state distribution. We therefore evaluate the learned reward models directly against the

ground-truth teacher utilities, following PbRL benchmarking practice (Lee et al. 2021). Let $\hat{r}_{\psi_j}$ denote teacher j ’s learned reward model and $r_j(s, a) = \mathbf{w}_j^\top \mathbf{r}(s, a)$ its ground-truth utility, where $\mathbf{r}$ is the environment’s native vector reward and $\mathbf{w}_j$ teacher j ’s scripted weight vector. All metrics lie in $[-1, 1]$, higher is better, and are averaged across the m teachers.

Per-state correlation. Over states sampled from evaluation rollouts, *Spearman* rank correlation measures how faithfully the learned reward orders individual transitions. It is our primary metric because preference-based rewards are identifiable only up to a positive monotone transform, making an order-preserving measure the appropriate notion of correctness. We also report *Pearson* correlation on raw values, which is stricter in penalising any nonlinear distortion; following prior reward-evaluation work we refer to this as the *Value-Order Correlation* (VOC) (Ma et al. 2025).

Trajectory and policy ranking. Per-state correlation can be high even when a reward model induces the wrong ordering over whole *behaviours*, which is what the policy ultimately optimizes. We therefore roll out each policy in the MORL/D population and compare the induced rankings using Kendall’s τ -b over trajectory returns, and the *Trajectory Alignment Coefficient* (TAC) of (Muslimani et al. 2025), computed identically but on *discounted* returns so that alignment is weighted by the same temporal discounting the agent optimizes. *Trajectory VOC* additionally averages the within-trajectory correlation between learned and ground-truth per-step reward sequences, capturing whether the model tracks the shape of the signal within an episode rather than only across episodes.

Results. Tables 9-11 report all metrics. LEMUR attains the strongest per-state correlations on every environment, with the largest margins on Hopper and MetaWorld-DrawerClose where the teachers’ anchors are most opposed, consistent with per-teacher decomposition mattering most under genuine conflict. Trajectory-level metrics are more mixed: FPbRL attains a higher Kendall τ and TAC on Hopper despite substantially weaker per-state correlation, reflecting that its welfare scalarization orders whole behaviours consistently even where the underlying reward is poorly calibrated. Reporting both families is what makes this distinction visible, and we recommend the same practice for future work in this setting.

Metric	LEMUR	PbMORL	FPbRL
Spearman ($\rho \uparrow$)	0.710 $\pm$ 0.005	0.705 $\pm$ 0.000	0.512 $\pm$ 0.089
Pearson ($r \uparrow$)	0.863 $\pm$ 0.003	0.853 $\pm$ 0.000	0.493 $\pm$ 0.065
VOC ($\uparrow$)	0.863 $\pm$ 0.003	0.853 $\pm$ 0.000	0.493 $\pm$ 0.065
VOC (traj) ($\uparrow$)	0.858 $\pm$ 0.003	0.851 $\pm$ 0.000	0.494 $\pm$ 0.066
Kendall τ (policy) ($\uparrow$)	0.939 $\pm$ 0.030	0.933 $\pm$ 0.000	0.567 $\pm$ 0.233
Traj-Alignment Coeff ($\uparrow$)	0.898 $\pm$ 0.041	0.858 $\pm$ 0.000	0.633 $\pm$ 0.233

Table 9: Reward-Model Evaluation Metrics : HalfCheetah.

G Benchmark Environment Details

Table 12 summarises the native multi-objective structure of each benchmark environment and the scripted

Metric	LEMUR	PbMORL	FPbRL
Spearman ($\rho \uparrow$)	0.520 $\pm$ 0.007	0.231 $\pm$ 0.000	0.085 $\pm$ 0.074
Pearson ($r \uparrow$)	0.589 $\pm$ 0.020	0.335 $\pm$ 0.000	0.345 $\pm$ 0.005
VOC ($\uparrow$)	0.589 $\pm$ 0.020	0.335 $\pm$ 0.000	0.345 $\pm$ 0.005
VOC (traj) ($\uparrow$)	0.340 $\pm$ 0.035	0.339 $\pm$ 0.000	0.358 $\pm$ 0.010
Kendall τ (policy) ($\uparrow$)	0.359 $\pm$ 0.002	0.291 $\pm$ 0.000	-0.167 $\pm$ 0.100
Traj-Alignment Coeff ($\uparrow$)	0.347 $\pm$ 0.026	0.300 $\pm$ 0.000	0.167 $\pm$ 0.167

Table 10: Reward-Model Evaluation Metrics: MetaWorld-DrawerClose.

Metric	LEMUR	PbMORL	FPbRL
Spearman ($\rho \uparrow$)	0.945 $\pm$ 0.002	0.527 $\pm$ 0.000	0.648 $\pm$ 0.094
Pearson ($r \uparrow$)	0.951 $\pm$ 0.002	0.532 $\pm$ 0.000	0.716 $\pm$ 0.073
VOC ($\uparrow$)	0.951 $\pm$ 0.002	0.532 $\pm$ 0.000	0.716 $\pm$ 0.073
VOC (traj) ($\uparrow$)	0.947 $\pm$ 0.004	0.606 $\pm$ 0.000	0.714 $\pm$ 0.073
Kendall τ (policy) ($\uparrow$)	0.914 $\pm$ 0.002	0.291 $\pm$ 0.000	0.933 $\pm$ 0.000
Traj-Alignment Coeff ($\uparrow$)	0.856 $\pm$ 0.014	0.370 $\pm$ 0.000	0.933 $\pm$ 0.000

Table 11: Reward-Model Evaluation Metrics: Hopper.

teacher weight vectors used throughout our experiments. In every case, teacher j 's ground-truth utility is the linear scalarisation $r_j(s, a) = \mathbf{w}_j^\top \mathbf{r}(s, a)$ of the environment's native vector reward $\mathbf{r}$, and it is this quantity that `validation/gt_teacher_{a,b}_return` tracks during training. The weight vectors are chosen to be genuinely conflicting: each teacher places its largest weight on a different objective, so no single policy can simultaneously maximise both utilities.

MO-LunarLander. A four-objective variant of the classic LunarLander domain with a discrete action space, taken from the MORL-Generalization benchmark (Teoh, Varakantham, and Vamplew 2025). The native reward vector comprises the shaping term (progress toward the landing pad), the main-engine fuel cost, the side-engine fuel cost, and the terminal landing/crash outcome. Teacher A weights the two engine-cost terms asymmetrically against Teacher B, producing a fuel-allocation conflict on top of a shared landing objective.

MO-Hopper. A three-objective continuous-control locomotion task in which the native reward vector is $[v_x, h, -c\|a\|^2]$: forward velocity, hop height, and a negated energy/control cost. Teacher A $([0.8, 0.1, 0.1])$ strongly prefers fast locomotion, while Teacher B $([0.3, 0.5, 0.2])$ prefers a higher, more energy-efficient and stable gait.

MO-Cheetah. A two-objective continuous-control task whose native reward vector is $[\text{reward_forward}, \text{reward_ctrl}]$, i.e. forward velocity against control cost. The teacher anchors $[0.6, 0.4]$ and $[0.4, 0.6]$ place opposing emphasis on velocity versus energy efficiency.

MO-MetaWorld (Drawer-Close). Meta-World tasks are natively *single*-objective, providing only a dense task-progress reward. We convert `Drawer-Close` into a two-objective task by pairing this native reward with a control-effort penalty, yielding the vector reward $[r_{\text{task}}, -\lambda\|a\|_2^2]$ with control-cost weight $\lambda = 0.1$ and a fixed horizon of 500

steps. This mirrors the forward-reward/control-cost decomposition standard to the MuJoCo suite, but applied to a more complex robot-manipulation domain. Teacher A is rewarded by task completion, Teacher B by smooth, energy-efficient actuation.

Environment	Actions	m	Native Objectives	Teacher Weights ($\mathbf{w}_A, \mathbf{w}_B$)
MO-LunarLander	Discrete	4	shaping, main-engine cost, side-engine cost, landing	$[0.6, 0.3, 0.05, 0.05]; [0.6, 0.05, 0.3, 0.05]$
MO-Hopper	Continuous	3	forward velocity, jump height, energy cost	$[0.8, 0.1, 0.1]; [0.3, 0.5, 0.2]$
MO-Cheetah	Continuous	2	forward velocity, control cost	$[0.6, 0.4]; [0.4, 0.6]$
MO-MetaWorld (Drawer-Close)	Continuous	2	task progress, control effort	$[0.6, 0.4]; [0.4, 0.6]$

Table 12: Benchmark environments: native objective decomposition and scripted teacher weight vectors. m denotes the dimensionality of the native vector reward.

H Compute Resources

In all experiments, we use 12 CPUs and a single GPU, of type either NVIDIA A100 or L40. Training in all environments takes approximately three to five hours on average.