

AgentHPOBench: A Benchmark For Evaluating LLM Agents as Sequential Hyperparameter Optimizers

Tianyu Huai^{2,3,4}, Tingshuo Fan^{1,4}, Xinchu Chen^{1,4,†}, Yining Zheng^{1,2,4}, Yuxin Wang^{1,2,4},
Shuang Chen^{1,2,4}, Jie Zhou³, Xuanjing Huang^{1,2}

¹Fudan University ²Shanghai Innovation Institute ³East China Normal University ⁴OpenMOSS

Abstract

As LLMs evolve from code completion systems into autonomous scientific agents, evaluating their ability to conduct experiments has become increasingly important. Existing benchmarks typically focus on static code generation, paper replication, or final answer correctness, but do not directly assess whether agents can interpret experimental evidence and use it to guide subsequent hyperparameter decisions. To address this gap, we introduce AgentHPOBench, a sequential benchmark comprising 30 executable machine learning tasks across seven research categories. Each task begins with a validated baseline run, after which an agent performs several sequential interventions. At each step, the agent observes the accumulated configurations, metrics, and logs before proposing the next valid configuration. We evaluate 12 widely used agents and conventional HPO baselines under a unified protocol. The results show that current agents exhibit measurable experimental optimization ability across domains, but still face clear limitations in sustained iterative refinement, complex log diagnosis, and consistent progress toward reported reference performance.

🔗 GitHub: <https://github.com/OpenMOSS/AgentHPOBench>

1 Introduction

As LLMs improve in reasoning, use of long contexts, and tool interaction, agents are becoming capable of completing increasingly complex workflows that form part of empirical research. Recent benchmarks have therefore moved beyond static question answering and isolated code generation toward executable research environments. MLGym [1] and MLE-Dojo [2] already provide interactive environments in which agents execute experiments and refine solutions through feedback. PaperBench [3], AutoExperiment [4], RE-Bench [5], MLR-Bench [6], and AIRS-Bench [7] further extend evaluation toward paper replication, research engineering, and broader stages of the ML research lifecycle. These benchmarks demonstrate the value of iterative evaluation, but they generally assess broad research or engineering workflows in which improvements may arise from data processing, code modification, architecture design, debugging, hyperparameter tuning, or combinations of these actions.

Traditional HPO benchmarks address a different aspect of the problem. They provide controlled tabular, surrogate, or executable objectives for comparing optimization algorithms [8, 9], but typically abstract away the logs, configurations, and procedural context of research repositories. This leaves a specific capability

[†]Corresponding authors.

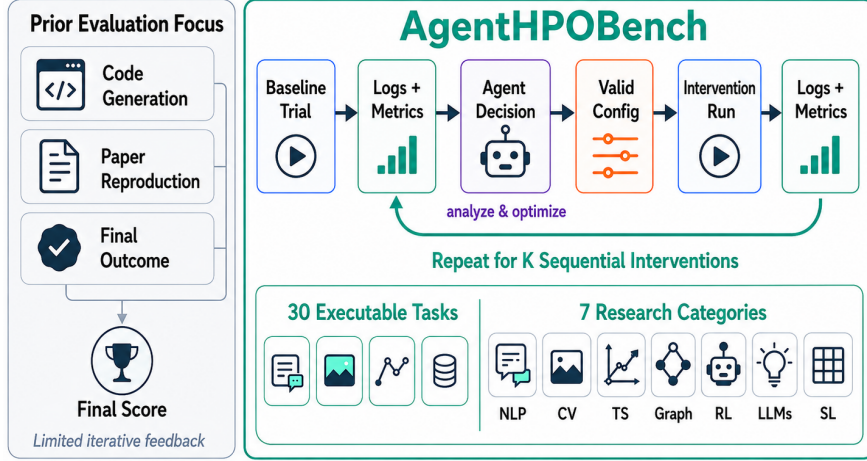


Figure 1 Conceptual overview of AgentHPOBench.

Benchmark	Interface	Task Unit	Decision Space	Observation	Primary Target
HPO-B [10]	Tabular	Objective	Hyperparameters	Metric	Optimizer
LCBench [11]	Tabular	Learning curve	Hyperparameters	Metric curve	Optimizer
HPOBench [8]	Mixed	Objective	Hyperparameters	Metric	Optimizer
YAHPO Gym [9]	Surrogate	Objective	Hyperparameters	Metric	Optimizer
JAHS-Bench-201 [12]	Surrogate	Search space	Architecture + hyperparameters	Metrics	Optimizer
DACBench [13]	Executable	Environment	Dynamic configuration	State + reward	Policy
AgentHPOBench	Executable	Research repository	Hyperparameters	Metrics + logs	HPO agent

Table 1 Comparison with representative HPO and algorithm configuration benchmarks.

insufficiently examined: whether an agent can interpret evidence from completed repository experiments and convert it into the next effective hyperparameter configuration. In a typical ML workflow, researchers execute a baseline, inspect target and auxiliary metrics together with execution logs, and decide which parameters to adjust in the next experiment. We therefore ask a focused question: can an autonomous agent improve real ML experiments through a sequence of hyperparameter interventions guided by empirical feedback?

To address this question, we introduce **AgentHPOBench**, a dedicated and controlled benchmark for evaluating sequential HPO by agents in executable research repositories, as shown in Figure 1. AgentHPOBench contains 30 executable tasks constructed from recent ML research repositories across seven categories: natural language processing, computer vision, time series forecasting, graph learning, reinforcement learning, large language modeling, and structured learning. By focusing on recent research repositories, the task suite captures contemporary training pipelines, configuration interfaces, and evaluation practices that are often abstracted away by conventional HPO benchmarks. Table 1 summarizes the differences between AgentHPOBench and representative HPO benchmarks.

AgentHPOBench comprises three components. First, the task construction protocol maps each repository to an executable optimization task with a reference baseline, a target metric, a constrained intervention space, and a paper or repository anchor. Second, the unified execution harness validates proposed configurations, executes experiments, and records the complete sequence of configurations, metrics, logs, and decisions. Third, the scoring and auditing layer verifies task traces and converts heterogeneous task results into mean bounded normalized score, baseline win rate, and mean anchor attainment. These metrics distinguish relative improvement over the reference baseline from absolute attainment of reported performance. Together, these components implement a common sequential evaluation protocol. Each task begins with a validated reference baseline that is shared by all agents and methods evaluated under the same budget setting. After the baseline run, the agent receives a fixed number of intervention opportunities. At each intervention, it

observes the accumulated configurations, target and auxiliary metrics, and execution logs, and proposes a new configuration within the intervention space derived from the official training scripts, configuration files, or repository documentation. The dataset, data split, target metric, evaluation code, and benchmark metadata remain fixed. The audited result after the final intervention is used for scoring. AgentHPOBench therefore isolates the ability to convert experimental feedback into the next valid configuration.

We evaluate models with open weights and API agents, together with conventional HPO methods under the same baseline and number of intervention opportunities. The results show that current agents can improve reference baselines and that several agents obtain stronger aggregate results than conventional HPO methods. However, this advantage is not consistent across task categories or evaluation settings. Evaluation under the full training budget improves both mean bounded normalized score and mean anchor attainment, but does not uniformly increase baseline win rate. The feedback ablation shows that removing intermediate experimental evidence reduces optimization performance, while trajectory analysis reveals that later interventions may plateau or discard earlier gains. These findings show that discovering a useful configuration and reliably refining it through feedback are distinct capabilities.

In a nutshell, our contributions are as follows:

- We introduce AgentHPOBench for evaluating whether agents can convert experimental feedback into effective hyperparameter decisions in executable research repositories. The benchmark contains 30 tasks from recent ML repositories across seven research categories.
- We develop a unified evaluation framework with intervention spaces and an execution harness that validates, executes, and records agent interventions under shared reference baselines and fixed task definitions. The framework measures both improvement over the baseline and attainment of reported reference performance.
- We evaluate several agents together with conventional HPO methods on AgentHPOBench. The results provide a systematic view of the capabilities and limitations of current agents in repository based HPO.

2 Related Work

Benchmarks for language agents. A growing body of work evaluates agents in ML research workflows. MLAgentBench [14], ML-Bench [15], and MLE-bench [16] examine codebase use, model training, and ML engineering, while CORE-Bench [17], RE-Bench [5], and PaperBench [3] focus on reproducibility, research engineering, and paper replication. MLGym [1], MLE-Dojo [2], MLR-Bench [6], and AIRS-Bench [7] broaden evaluation to more complete ML research workflows. These benchmarks assess general research execution or reproduction, whereas AgentHPOBench isolates whether agents can convert repository metrics and logs into the next valid hyperparameter configuration.

HPO methods and benchmarks. OpenML benchmark suites [18] and HPOBench [8] provide standardized tasks for comparing optimization algorithms, while NAS-Bench-101 [19] provides reusable objectives for architecture search. Common HPO approaches include random search [20], methods that use surrogate models [21–23], resource allocation methods such as Hyperband [24] and BOHB [25], and Population Based Training [26]. These methods and benchmarks generally assume a predefined search space, a structured objective interface, and relatively clean numerical feedback.

LLMs and agents for optimization. Recent work also uses language models as optimizers or HPO assistants. OptFormer learns an optimizer from tuning traces [27], LLAMBO incorporates LLMs into Bayesian optimization [28], and other studies investigate HPO decisions guided by LLMs and optimization frameworks based on agents [29–31]. Rather than proposing another optimization method, AgentHPOBench evaluates how reliably agents convert accumulated feedback from executable research repositories into valid configurations and empirical improvement.

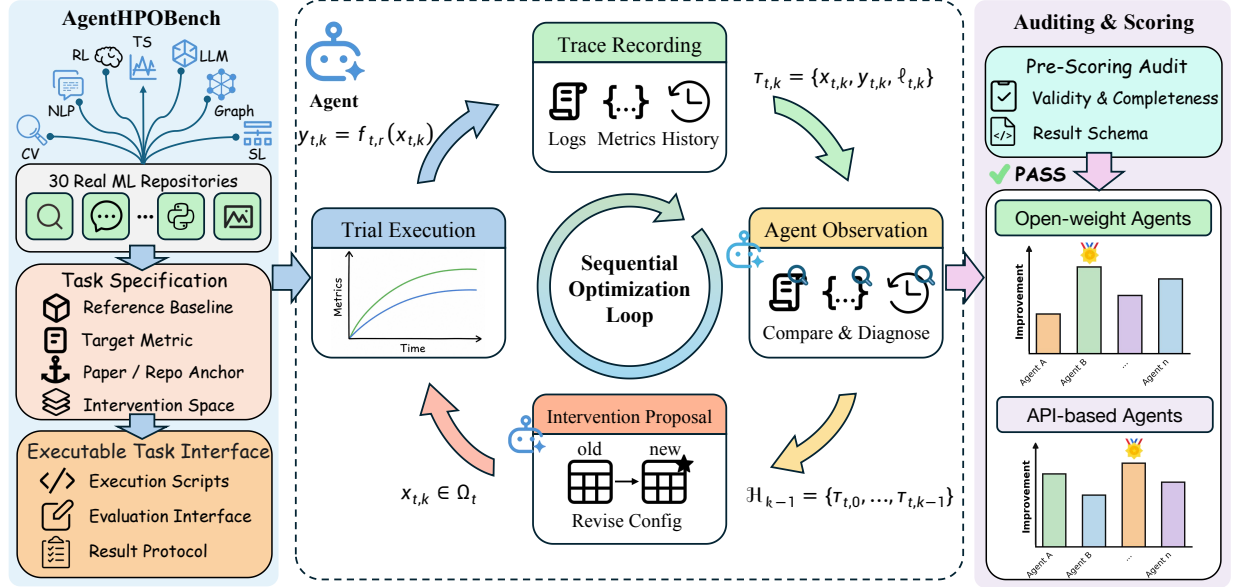


Figure 2 Overview of AgentHPOBench. Each task is constructed from an executable ML repository with a reference baseline, target metric, intervention space, anchor, and standardized task interface. At each step, the agent observes the accumulated metrics and logs and proposes a valid configuration for the next run. The harness validates and executes the proposal, records the resulting trace, and audits the completed trajectory before scoring.

3 Method

We introduce AgentHPOBench, a benchmark and evaluation harness for assessing whether agents can improve executable ML experiments through sequential hyperparameter interventions, as shown in Figure 2. Unlike agent benchmarks that evaluate general execution across multiple steps, code modification, or paper reproduction, AgentHPOBench isolates a specific experimental capability: converting the logs and metrics of an executed repository experiment into a valid configuration for the next run. The agent selects values only from the predefined intervention space, while the harness validates and executes the proposed configuration and returns the resulting observations. This process is repeated for a predefined number of intervention steps. Table 1 compares AgentHPOBench with representative HPO benchmarks. Most prior HPO benchmarks provide controlled tabular, surrogate, or wrapped objectives for comparing optimization algorithms, but abstract away repository execution details, textual logs, and sequential interaction. AgentHPOBench instead exposes real research repositories as executable task units and evaluates sequential optimization using task metrics tied to results reported by the corresponding papers or repositories.

3.1 AgentHPOBench

AgentHPOBench consists of 30 tasks constructed from 30 executable ML repositories on GitHub. Task construction follows three principles. First, each task must require a substantive experimental decision within an executable training or evaluation pipeline. Second, each task must provide measurable feedback after every intervention, allowing the benchmark to evaluate how the agent uses previous outcomes to inform subsequent decisions. Third, each task must remain close to real research practice by preserving the scripts, dependencies, logs, and failure modes of the original repository whenever possible.

Each task is based on an executable experiment from the original repository or its official reproduction environment. An executable task interface specifies how the harness launches the experiment, extracts the target metric, and records the outputs under a standardized result protocol. For each task, we construct the intervention space from the hyperparameters and valid values exposed by the official training scripts, configuration files, or repository documentation. We retain only fields that affect the execution or outcome of

the experiment. Agents may modify only these predefined fields, while the dataset, data split, target metric, evaluation code, and benchmark metadata remain fixed.

3.2 Problem Formulation

We formulate autonomous hyperparameter optimization over executable research repositories as a sequential decision problem. Each task t is defined by a repository specific experimental objective, a constrained intervention space Ω_t , an evaluation protocol, and a scalar performance metric. For task t under budget setting r , let $x_{t,0} \in \Omega_t$ denote the reference baseline configuration. This configuration is selected and validated during task construction and is shared by all agents and conventional optimizers. Executing $x_{t,0}$ under r produces the reference baseline performance

$$y_{t,0} = f_{t,r}(x_{t,0}). \quad (1)$$

The same $y_{t,0}$ serves as the reference baseline for all agents and conventional optimizers evaluated under the same budget setting. The configuration $x_{t,0}$ remains fixed across budget settings, but executing it under different budget may produce different baseline performance.

The agent first receives the reference baseline configuration $x_{t,0}$ and observes its performance $y_{t,0}$. The harness records each completed run, including the baseline, as a trace entry

$$\tau_{t,k} = \{x_{t,k}, y_{t,k}, \ell_{t,k}\}, \quad (2)$$

where $\ell_{t,k}$ contains the execution logs and auxiliary metrics made available to the agent. At intervention step $k \in \{1, \dots, K\}$, the agent observes the accumulated trace history

$$\mathcal{H}_{t,k-1} = \{\tau_{t,0}, \tau_{t,1}, \dots, \tau_{t,k-1}\}, \quad (3)$$

uses this history to form an implicit experimental state, and proposes a new valid configuration $x_{t,k} \in \Omega_t$. After validating the proposal, the harness executes $x_{t,k}$ under budget setting r and obtains

$$y_{t,k} = f_{t,r}(x_{t,k}), \quad (4)$$

where the direction of improvement is specified by the task metric. The resulting trace $\tau_{t,k}$ is then added to the history, and the corresponding feedback is returned to the agent before the next intervention.

After K sequential interventions, this process produces the trajectory

$$(x_{t,0}, y_{t,0}), (x_{t,1}, y_{t,1}), \dots, (x_{t,K}, y_{t,K}). \quad (5)$$

This formulation differs from conventional HPO benchmarks in two respects. First, the objective is embedded in an executable research repository rather than exposed through a clean objective interface. Second, the agent must interpret experimental evidence, including logs, metrics, task constraints, and prior execution outcomes, and convert this evidence into a valid configuration for the next experiment.

3.3 Evaluation Harness

To make the benchmark executable and comparable across agents, we implement a unified evaluation harness. The harness standardizes the interaction between agents and heterogeneous research repositories while preserving the original execution logic of each task. It launches experiments, provides task context to the agent, validates proposed configurations, and records the resulting outputs under a standardized result schema.

For each task, the harness maintains the agent visible trace, together with an internal execution record containing the proposed configurations, extracted metrics, execution logs, runtime metadata, and completion

Agent / Method	Mean bounded normalized score								Overall metrics	
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%)	MAA (%)
<i>Conventional HPO baselines</i>										
Random search	0.034	-0.135	0.299	-0.463	0.124	-0.292	-0.136	-0.034	48.9	62.6
TPE	0.020	-0.110	0.005	-0.406	0.192	-0.219	-0.302	-0.113	40.0	62.4
BOHB variant	-0.062	-0.006	0.235	-0.824	0.260	-0.236	0.153	0.018	45.6	65.3
<i>Open-weight agents</i>										
Gemma2-2B	0.014	-0.103	0.233	-0.459	0.005	-0.171	0.066	-0.001	55.6	64.2
DeepSeek-R1-Qwen-14B	0.008	-0.223	0.316	-0.333	0.074	-0.271	0.157	0.018	54.4	64.1
Qwen3-8B	-0.001	-0.140	0.233	-0.271	0.158	-0.219	0.124	0.024	53.3	65.1
Llama-3.1-8B	0.019	-0.142	0.253	-0.525	0.125	-0.144	0.172	0.030	44.4	66.3
Phi-4-14B	0.047	-0.077	0.278	-0.448	0.306	-0.098	0.430	0.130	63.3	66.9
Qwen3-32B	0.060	-0.120	0.285	-0.302	0.349	-0.120	0.485	0.148	60.0	69.1
<i>API agents</i>										
GLM-5.1	-0.088	-0.108	0.267	-1.000	0.032	-0.258	0.713	0.080	56.7	67.0
Kimi-2.6	-0.053	-0.106	0.277	-1.000	0.466	-0.173	0.556	0.110	56.7	70.4
GLM-4.7	-0.088	0.119	0.266	-1.000	0.061	-0.285	0.689	0.112	60.0	67.8
DeepSeek-V4-Pro	-0.029	-0.184	0.346	0.094	0.408	0.036	0.378	0.175	63.3	70.1
GPT-5.5	-0.028	-0.033	0.375	0.281	0.821	0.092	0.565	0.305	66.7	76.7
Claude Sonnet 4.6	-0.025	0.191	0.403	0.877	0.710	0.120	0.691	0.407	76.7	79.5

Table 2 AgentHPOBench results under the limited budget protocol for conventional HPO methods, open-weight agents, and API agents. Category columns report mean bounded normalized score. BWR and MAA are computed over all 30 tasks. **Bold** indicates the best performance across all evaluated methods.

status. These records preserve the complete sequence of interventions and support consistent auditing across tasks and agents.

The harness also enforces comparability between models with open weights and API agents. All agents are evaluated using the same task definitions, budget setting, number of interventions, allowed intervention space, scoring rules, and result schema. The different backends receive the same task information through interfaces specific to each backend. Their outputs are parsed into a common configuration schema and validated against Ω_t before execution.

Before scoring, the harness audits all task records. The audit verifies the presence of the baseline and the required intervention records, compliance with the result schema, correct metric extraction, and consistency with the reference baseline and anchor. Only complete records that pass these checks are included in aggregate scoring.

3.4 Scoring

Because the benchmark tasks use heterogeneous metrics, we evaluate each task using the audited result after the final intervention. For task t under budget setting r , let $b_{t,r} = y_{t,0}$ denote the reference baseline, $s_{t,r} = y_{t,K}$ denote the final result, and a_t denote the repository anchor. Before scoring, these values are expressed on the same numerical scale and oriented so that larger values indicate better performance. We denote the oriented values by $\tilde{b}_{t,r}$, $\tilde{s}_{t,r}$, and $\tilde{a}_t$.

We use mean bounded normalized score and baseline win rate as the primary metrics. The normalized score is

$$\text{NS}_{t,r} = \frac{\tilde{s}_{t,r} - \tilde{b}_{t,r}}{\tilde{a}_t - \tilde{b}_{t,r}}, \quad (6)$$

where the audit ensures that the denominator is positive and nonzero. To reduce the influence of tasks with a

small baseline to anchor gap, we bound each task score to $[-1, 1]$:

$$\text{BNS}_{t,r} = \min\{1, \max\{-1, \text{NS}_{t,r}\}\}. \quad (7)$$

The mean bounded normalized score (MBNS) is

$$\text{MBNS}_r = \frac{1}{T} \sum_{t=1}^T \text{BNS}_{t,r}, \quad (8)$$

where T is the number of evaluated tasks. A bounded score of 0 matches the baseline, 1 reaches or exceeds the anchor, and a negative value indicates degradation.

The baseline win rate (BWR) is defined as

$$\text{BWR}_r = \frac{1}{T} \sum_{t=1}^T \mathbf{1}[\tilde{s}_{t,r} > \tilde{b}_{t,r}]. \quad (9)$$

It measures the proportion of tasks for which the final result improves over the reference baseline.

As a secondary metric, we report anchor attainment in the original metric direction:

$$\text{AA}_{t,r} = \begin{cases} s_{t,r}/a_t, & \text{for higher is better metrics,} \\ a_t/s_{t,r}, & \text{for lower is better metrics.} \end{cases} \quad (10)$$

Mean anchor attainment (MAA) is defined as

$$\text{MAA}_r = \frac{1}{T} \sum_{t=1}^T \text{AA}_{t,r}. \quad (11)$$

An anchor attainment of 100% indicates that the final result matches the repository anchor, while values above indicate that it exceeds the anchor.

4 Experiments

Experimental Setup and Metrics. We evaluate agents on AgentHPOBench across seven categories: NLP, CV, TS, Graph, RL, LLM, and SL. Unless otherwise stated, we use the limited budget protocol. The harness first executes the reference baseline and then requests five sequential interventions from the agent. Under this protocol, both the baseline and each intervention use approximately 10% of the training budget of the corresponding original experiment. This setting retains executable training and empirical feedback for each task while making broad evaluation across repositories and agents computationally feasible. Before each intervention, the agent receives the accumulated trace, including previous configurations, target and auxiliary metrics, and execution logs. All task scores use the result after the final intervention rather than the best intermediate result. We report mean bounded normalized score (MBNS), baseline win rate (BWR), and mean anchor attainment (MAA) as the metrics. Category scores average the tasks within each category, whereas overall scores are computed directly over all 30 tasks, giving each task equal weight.

Agents and Implementation Details. We evaluate both models with open weights and API agents. The models with open weights include Qwen3-8B and Qwen3-32B [32], Gemma2-2B [33], DeepSeek-R1-Qwen-14B [34], Phi-4-14B [35], and Llama-3.1-8B-Instruct [36]. The API agents include DeepSeek-V4-Pro, GPT-5.5, GLM-4.7, GLM-5.1, Kimi-2.6, and Claude Sonnet 4.6. We additionally compare these agents with random search [20], TPE [22], and a BOHB-style method [25] as conventional HPO baselines. All agents and HPO baselines use the same task definitions, reference baselines, intervention spaces, number of configuration evaluations, budget

Agents	Mean bounded normalized score								Overall metrics	
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%)	MAA (%)
DeepSeek-R1-Qwen-14B	0.029	-0.125	0.369	-0.094	0.185	-0.145	0.448	0.151	50.0	78.6
Qwen3-32B	0.029	0.145	0.293	-0.594	0.488	-0.015	0.442	0.191	56.7	81.8
Claude Sonnet 4.6	0.722	0.266	0.455	0.502	0.754	0.184	0.582	0.472	76.7	89.1

Table 3 Full-budget final-step AgentHPOBench results.

Harness	Mean bounded normalized score								Overall metrics	
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%)	MAA (%)
<i>Claude Sonnet 4.6</i>										
Claude Code CLI	0.090	0.120	0.295	0.518	0.800	-0.170	0.712	0.332	76.7	82.2
AgentHPOBench	-0.025	0.191	0.403	0.877	0.710	0.120	0.691	0.407	76.7	79.5
<i>GPT-5.5</i>										
Codex CLI	0.050	0.108	0.318	0.565	0.666	-0.145	0.418	0.266	70.0	78.7
AgentHPOBench	-0.028	-0.033	0.375	0.281	0.821	0.092	0.565	0.305	66.7	76.7


Table 4 Harness ablation under the limited-budget protocol.

settings, and scoring rules. The conventional HPO baselines operate on previously evaluated configurations and target metric values, whereas agents additionally receive task context, auxiliary metrics, and execution logs. We repeat all locally executable open-weight agents and conventional HPO baselines using three experiment seeds, $\{0, 1, 42\}$. For these methods, the implementation, model checkpoint or optimization algorithm, runtime environment, and random state can be explicitly controlled, allowing the repetitions to measure sensitivity to benchmark stochasticity. API agents are evaluated once on the canonical benchmark instance. Further details are provided in Appendix.


Main Results. Table 2 summarizes the results under the limited-budget protocol. Claude Sonnet 4.6 achieves the highest overall MBNS of 0.407, the highest BWR of 76.7%, and the highest MAA of 79.5%. Among open-weight agents, Qwen3-32B obtains the highest overall MBNS (0.148) and MAA (69.1%), whereas Phi-4-14B achieves the highest BWR (63.3%). The conventional HPO methods generally trail the stronger agents in overall performance under the same five intervention opportunities. Among these baselines, the BOHB variant obtains the highest overall MBNS (0.018) and MAA (65.3%), while random search achieves the highest BWR (48.9%).

Performance varies substantially across task categories, and no method performs best in every category. Qwen3-32B achieves the highest MBNS on NLP. Claude Sonnet 4.6 leads on CV, TS, Graph, and LLM, GPT-5.5 leads on RL, and GLM-5.1 leads on SL. These results demonstrate that the relative effectiveness of agents and conventional HPO methods depends strongly on the experimental domain. The category-level HPO results also show that conventional optimization remains competitive in specific domains despite its lower overall performance.

Aggregate leadership does not imply consistent improvement across individual tasks. Although Claude Sonnet 4.6 obtains the strongest aggregate results, its BWR of 76.7% means that its final configurations exceed the reference baseline on 23 of the 30 tasks. Qwen3-32B obtains a mean BWR of 60.0% across the three controlled seeds. The remaining failures, together with the negative and near-zero category scores, show that even strong agents can produce final configurations that do not improve the baseline. These findings indicate that the main challenge is not only to identify useful interventions, but also to refine and preserve their benefits throughout the sequential optimization process.

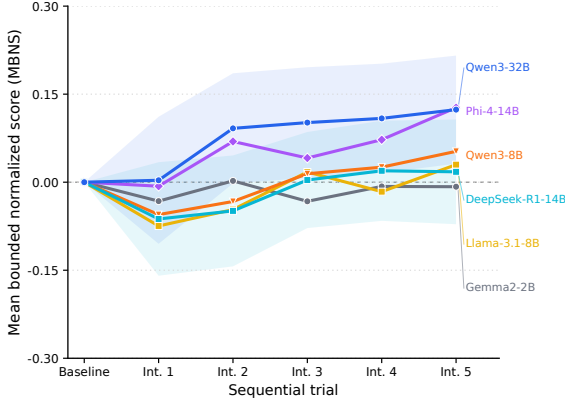

(a) Open-weight agents

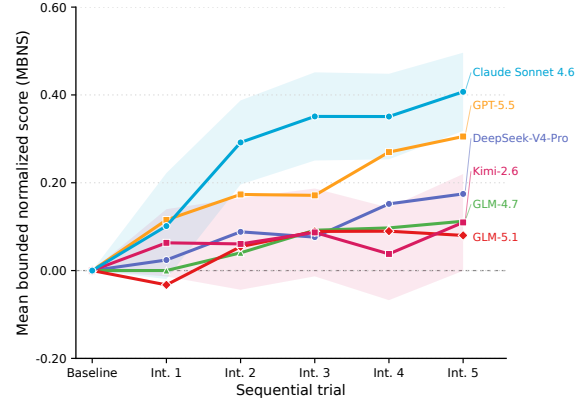

(b) API-based agents

Figure 3 Sequential optimization trajectories under the limited budget protocol. Lines show MBNS from the reference baseline through five interventions, and shaded regions indicate cross-task standard error.

Feedback setting	Mean bounded normalized score								Overall metrics	
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%)	MAA (%)
Standard feedback	0.060	-0.120	0.285	-0.302	0.349	-0.120	0.485	0.148	60.0	69.1
No intermediate feedback	0.021	-0.227	0.211	-0.333	0.346	-0.234	0.286	0.052	50.0	65.2

Table 5 Ablation of intermediate experimental feedback for Qwen3-32B under the limited budget protocol.

Full Budget Results. To examine how the training budget affects sequential optimization, we evaluate three selected agents using the full training budget of the original repositories, as shown in Table 3. The full budget increases both MBNS and MAA for all three agents. The MBNS values of Qwen3-32B, DeepSeek-R1-Qwen-14B, and Claude Sonnet 4.6 increase from 0.148, 0.018, and 0.407 under the limited-budget protocol to 0.191, 0.151, and 0.472, respectively. Claude Sonnet 4.6 also achieves the highest full-budget MAA of 89.1%. However, BWR does not improve uniformly: Claude Sonnet 4.6 remains at 76.7%, while Qwen3-32B and DeepSeek-R1-Qwen-14B decrease from 60.0% and 54.4% to 56.7% and 50.0%, respectively. These changes are not contradictory because the three metrics capture different aspects of performance. Full training can change both the baseline performance and the final performance obtained by an agent. Consequently, an agent may finish closer to the anchor while achieving a larger average normalized improvement, yet exceed the corresponding full-budget baseline on fewer tasks. The limited- and full-budget settings therefore provide complementary evidence about optimization under different computational constraints.

Harness Ablation. We examine how the execution harness affects performance by comparing the native AgentHPOBench harness with corresponding CLI harnesses under the same tasks, intervention spaces, budgets, and scoring rules. The results are shown in Table 4. For Claude Sonnet 4.6, the native harness achieves a higher MBNS than Claude Code CLI (0.407 vs. 0.332), while both harnesses obtain the same BWR of 76.7%. Claude Code CLI achieves a higher MAA (82.2% vs. 79.5%). Similarly, for GPT-5.5, the native harness achieves a higher MBNS than Codex CLI (0.305 vs. 0.266), whereas Codex CLI obtains a higher BWR (70.0% vs. 66.7%) and MAA (78.7% vs. 76.7%). These results show that the native harness produces greater relative improvement over the reference baseline for both agents, while the CLI harnesses achieve higher absolute anchor attainment. However, no harness consistently dominates across all metrics or task categories. Harness choice can therefore affect the configurations produced during sequential optimization and the resulting performance. This sensitivity motivates the use of a common harness for the main comparison and the separate reporting of harness effects.

Sequential Optimization Trajectories. Figure 3 reports the MBNS obtained after the reference baseline and each subsequent intervention. Claude Sonnet 4.6 and Qwen3-32B achieve substantial gains during the first two interventions, while GPT-5.5 improves more gradually across the trajectory. Other agents exhibit less stable behavior. DeepSeek-R1-Qwen-14B initially falls below the baseline before recovering, whereas Gemma2-2B and Llama-3.1-8B fluctuate around the baseline for most of the trajectory. Several agents also show nonmonotonic refinement. For example, Phi-4-14B loses part of its early improvement before recovering at the final intervention, while Kimi-2.6 declines at the fourth intervention and subsequently rebounds. In contrast, Claude Sonnet 4.6 and GPT-5.5 achieve their highest MBNS at the final intervention, showing that later feedback can still produce useful refinements. Overall, current agents can identify beneficial configurations, but their ability to preserve and improve earlier gains remains inconsistent across models.

Intermediate Feedback Ablation. We isolate the contribution of intermediate experimental feedback by evaluating Qwen3-32B under an otherwise identical protocol. The baseline observation and all other task inputs remain available, but the metrics and execution logs produced by each intervention are withheld from subsequent decisions. As shown in Table 5, removing intermediate feedback reduces overall MBNS from 0.148 to 0.052 and BWR from 60.0% to 50.0%, while MAA decreases from 69.1% to 65.2%. Standard feedback yields higher MBNS in all seven task categories. These results provide evidence that access to intermediate outcomes improves sequential optimization for Qwen3-32B under the limited-budget protocol.

5 Conclusion

In this work, we present AgentHPOBench, a benchmark for evaluating whether agents can improve executable ML experiments through sequential hyperparameter interventions. AgentHPOBench moves beyond conventional HPO benchmarks with clean black box objective interfaces by requiring agents to interpret metrics and logs from research repositories and convert this evidence into valid configurations. Experiments across 30 tasks show that current agents can improve reference baselines, but performance remains uneven across task domains, resource settings, and execution harnesses, and often remains below the reported reference performance. These findings establish HPO in research repositories as a challenging setting and provide a foundation for developing agents with stronger capabilities for experimental diagnosis and sequential decision making.

References

- [1] Deepak Nathani, Lovish Madaan, Nicholas Roberts, Nikolay Bashlykov, Ajay Menon, Vincent Moens, Mikhail Plekhanov, Amar Budhiraja, Despoina Magka, Vladislav Vorotilov, et al. Mlgym: A new framework and benchmark for advancing ai research agents. In *Second Conference on Language Modeling*, 2025.
- [2] Rushi Qiang, Yuchen Zhuang, Yinghao Li, Sagar V. K. Dingu, Rongzhi Zhang, Changhao Li, Ian Shu-Hei Wong, Sherry Yang, Percy Liang, Chao Zhang, and Bo Dai. MLE-Dojo: Interactive environments for empowering LLM agents in machine learning engineering. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=5W5mFU4oMO>. Datasets and Benchmarks Track.
- [3] Giulio Starace, Oliver Jaffe, Dane Sherburn, James Aung, Jun Shern Chan, Leon Maksin, Rachel Dias, Evan Mays, Benjamin Kinsella, Wyatt Thompson, Johannes Heidecke, Amelia Glaese, and Tejal Patwardhan. PaperBench: Evaluating AI’s ability to replicate AI research. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 56843–56873. PMLR, 2025. URL <https://proceedings.mlr.press/v267/starace25a.html>.
- [4] Gyeongwon James Kim, Alex Wilf, Louis-Philippe Morency, and Daniel Fried. From reproduction to replication: Evaluating research agents with progressive code masking. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=qBcHWGBnIb>.
- [5] Hjalmar Wijk, Tao Roa Lin, Joel Becker, Sami Jawhar, Neev Parikh, Thomas Broadley, Lawrence Chan, Michael Chen, Joshua M Clymer, Jai Dhyani, et al. Re-bench: Evaluating frontier ai r&d capabilities of language model agents against human experts. In *International Conference on Machine Learning*, pages 66772–66832. PMLR, 2025.
- [6] Hui Chen, Miao Xiong, Yujie Lu, Wei Han, Ailin Deng, Yufei He, Jiaying Wu, Yibo Li, Yue Liu, and Bryan Hooi. MLR-Bench: Evaluating AI agents on open-ended machine learning research. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=JX9DE6colf>. Datasets and Benchmarks Track.
- [7] Alisia Lupidi, Bhavul Gauri, Thomas Simon Foster, Bassel Al Omari, Despoina Magka, Alberto Pepe, Alexis Audran-Reiss, Muna Aghamelu, Nicolas Baldwin, Lucia Cipolina-Kun, Jean-Christophe Gagnon-Audet, Chee Hau Leow, Sandra Lefdal, Hossam Mossalam, Abhinav Moudgil, Saba Nazir, Emanuel Tewolde, Isabel Urrego, Jordi Armengol Estape, Amar Budhiraja, Gaurav Chaurasia, Abhishek Charnalia, Derek Dunfield, Karen Hambardzumyan, Daniel Izcovich, Martin Josifoski, Ishita Mediratta, Kelvin Niu, Parth Pathak, Michael Shvartsman, Edan Toledo, Anton Protopopov, Roberta Raileanu, Alexander Miller, Tatiana Shavrina, Jakob Foerster, and Yoram Bachrach. AIRS-Bench: A suite of tasks for frontier AI research science agents, 2026. URL <https://arxiv.org/abs/2602.06855>. arXiv preprint arXiv:2602.06855.
- [8] Katharina Eggersperger, Philipp Mueller, Neeratyoy Mallik, Matthias Feurer, Rene Sass, Aaron Klein, Noor Awad, Marius Lindauer, and Frank Hutter. HPOBench: A collection of reproducible multi-fidelity benchmark problems for HPO. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, 2021. URL <https://openreview.net/forum?id=1k4rJYEWda->.
- [9] Florian Pfisterer, Lennart Schneider, Julia Moosbauer, Martin Binder, and Bernd Bischl. YAHPO gym - an efficient multi-objective multi-fidelity benchmark for hyperparameter optimization. In *Proceedings of the First International Conference on Automated Machine Learning*, *Proceedings of Machine Learning Research*. PMLR, 2022. URL <https://proceedings.mlr.press/v188/pfisterer22a.html>.
- [10] Sebastian Pineda Arango, Hadi Samer Jomaa, Martin Wistuba, and Josif Grabocka. Hpo-b: A large-scale reproducible benchmark for black-box hpo based on openml. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021.
- [11] Lucas Zimmer, Marius Lindauer, and Frank Hutter. Auto-PyTorch: Multi-fidelity metalearning for efficient and robust AutoDL. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(9):3079–3090, 2021. URL <https://ieeexplore.ieee.org/document/9382913>.
- [12] Archit Bansal, Danny Stoll, Maciej Janowski, Arber Zela, and Frank Hutter. JAHS-Bench-201: A foundation for research on joint architecture and hyperparameter search. In *Advances in Neural Information Processing Systems*, 2022. URL https://papers.nips.cc/paper_files/paper/2022/hash/fd78f2f65881c1c7ce47e26b040cf48f-Abstract-Datasets_and_Benchmarks.html.

- [13] Theresa Eimer, André Biedenkapp, Maximilian Reimer, Steven Adriaensen, Frank Hutter, and Marius Lindauer. DACBench: A benchmark library for dynamic algorithm configuration. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence*, pages 1668–1674, 2021. doi: 10.24963/IJCAI.2021/230.
- [14] Qian Huang, Jian Vora, Percy Liang, and Jure Leskovec. MAgentBench: Evaluating language agents on machine learning experimentation. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 20271–20309. PMLR, 2024. URL <https://proceedings.mlr.press/v235/huang24y.html>.
- [15] Xiangru Tang, Yuliang Liu, Zefan Cai, Yanjun Shao, Junjie Lu, Yichi Zhang, Zexuan Deng, Helan Hu, Kaikai An, Ruijun Huang, Shuzheng Si, Sheng Chen, Haozhe Zhao, Liang Chen, Yan Wang, Tianyu Liu, Zhiwei Jiang, Baobao Chang, Yin Fang, Yujia Qin, Wangchunshu Zhou, Yilun Zhao, Arman Cohan, and Mark Gerstein. ML-Bench: Evaluating large language models and agents for machine learning tasks on repository-level code, 2024. URL <https://arxiv.org/abs/2311.09835>. arXiv preprint arXiv:2311.09835.
- [16] Jun Shern Chan, Neil Chowdhury, Oliver Jaffe, James Aung, Dane Sherburn, Evan Mays, Giulio Starace, Kevin Liu, Leon Maksin, Tejal Patwardhan, Aleksander Madry, and Lilian Weng. Mle-bench: Evaluating machine learning agents on machine learning engineering. In *The Thirteenth International Conference on Learning Representations (ICLR 2025)*, 2025. URL <https://dblp.org/rec/conf/iclr/ChanCJASMSLMPMW25.html>.
- [17] Zachary S. Siegel, Sayash Kapoor, Nitya Nadgir, Benedikt Stroebel, and Arvind Narayanan. CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. *Transactions on Machine Learning Research*, 2024. URL <https://openreview.net/forum?id=BsMMc4MEGS>.
- [18] Bernd Bischl, Giuseppe Casalicchio, Matthias Feurer, Pieter Gijsbers, Frank Hutter, Michel Lang, Rafael Gomes Mantovani, Jan N. van Rijn, and Joaquin Vanschoren. OpenML benchmarking suites. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, 2021. URL <https://openreview.net/forum?id=OCrD8ycKjG>.
- [19] Chris Ying, Aaron Klein, Eric Christiansen, Esteban Real, Kevin Murphy, and Frank Hutter. NAS-Bench-101: Towards reproducible neural architecture search. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 7105–7114. PMLR, 2019. URL <https://proceedings.mlr.press/v97/ying19a.html>.
- [20] James Bergstra and Yoshua Bengio. Random search for hyper-parameter optimization. *Journal of Machine Learning Research*, 13:281–305, 2012. URL <https://jmlr.org/papers/v13/bergstra12a.html>.
- [21] Frank Hutter, Holger H. Hoos, and Kevin Leyton-Brown. Sequential model-based optimization for general algorithm configuration. In *Learning and Intelligent Optimization*, volume 6683 of *Lecture Notes in Computer Science*, pages 507–523. Springer, 2011. doi: 10.1007/978-3-642-25566-3_40.
- [22] James Bergstra, Rémi Bardenet, Yoshua Bengio, and Balázs Kégl. Algorithms for hyper-parameter optimization. *Advances in neural information processing systems*, 24, 2011.
- [23] Jasper Snoek, Hugo Larochelle, and Ryan P. Adams. Practical bayesian optimization of machine learning algorithms. In *Advances in Neural Information Processing Systems*, volume 25, 2012. URL <https://papers.nips.cc/paper/4522-practical-bayesian-optimization-of-machine-learning-algorithms>.
- [24] Lisha Li, Kevin Jamieson, Giulia DeSalvo, Afshin Rostamizadeh, and Ameet Talwalkar. Hyperband: A novel bandit-based approach to hyperparameter optimization. *The journal of machine learning research*, 18(1):6765–6816, 2017.
- [25] Stefan Falkner, Aaron Klein, and Frank Hutter. BOHB: Robust and efficient hyperparameter optimization at scale. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 1437–1446. PMLR, 2018. URL <https://proceedings.mlr.press/v80/falkner18a.html>.
- [26] Max Jaderberg, Valentin Dalibard, Simon Osindero, Wojciech M. Czarnecki, Jeff Donahue, Ali Razavi, Oriol Vinyals, Tim Green, Iain Dunning, Karen Simonyan, Chrisantha Fernando, and Koray Kavukcuoglu. Population based training of neural networks, 2017. URL <https://arxiv.org/abs/1711.09846>. arXiv preprint arXiv:1711.09846.
- [27] Yutian Chen, Xingyou Song, Chansoo Lee, Zi Wang, Richard Zhang, David Dohan, Kazuya Kawakami, Greg

- Kochanski, Arnaud Doucet, Marc’Aurelio Ranzato, et al. Towards learning universal hyperparameter optimizers with transformers. *Advances in Neural Information Processing Systems*, 35:32053–32068, 2022.
- [28] Tennison Liu, Nicolas Astorga, Nabeel Seedat, and Mihaela van der Schaar. Large language models to enhance bayesian optimization. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=00xotBmGol>.
- [29] Michael R. Zhang, Nishkrit Desai, Juhan Bae, Jonathan Lorraine, and Jimmy Ba. Using large language models for hyperparameter optimization, 2024. URL <https://arxiv.org/abs/2312.04528>. arXiv preprint arXiv:2312.04528.
- [30] Siyi Liu, Chen Gao, and Yong Li. AgentHPO: Large language model agent for hyper-parameter optimization. In *Conference on Parsimony and Learning*, volume 280 of *Proceedings of Machine Learning Research*, pages 1146–1169. PMLR, 2025. URL <https://proceedings.mlr.press/v280/liu25c.html>.
- [31] Kanan Mahammadli and Seyda Ertekin. Sequential large language model-based hyper-parameter optimization, 2025. URL <https://arxiv.org/abs/2410.20302>. arXiv preprint arXiv:2410.20302.
- [32] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. Qwen3 technical report, 2025. URL <https://arxiv.org/abs/2505.09388>. arXiv preprint arXiv:2505.09388.
- [33] Gemma Team, Morgane Riviere, Shreya Pathak, Pier Giuseppe Sessa, Cassidy Hardin, Surya Bhupatiraju, Léonard Hussenot, Thomas Mesnard, Bobak Shahriari, Alexandre Ramé, et al. Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*, 2024.
- [34] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shirong Ma, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- [35] Marah Abdin, Jyoti Aneja, Harkirat Behl, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, Michael Harrison, Russell J. Hewett, Mojan Javaheripi, Piero Kauffmann, James R. Lee, Yin Tat Lee, Yuanzhi Li, Weishung Liu, Caio C. T. Mendes, Anh Nguyen, Eric Price, Gustavo de Rosa, Olli Saarikivi, Adil Salim, Shital Shah, Xin Wang, Rachel Ward, Yue Wu, Dingli Yu, Cyril Zhang, and Yi Zhang. Phi-4 technical report, 2024. URL <https://arxiv.org/abs/2412.08905>. arXiv preprint arXiv:2412.08905.
- [36] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- [37] Ivan Drokin. Kolmogorov-Arnold convolutions: Design principles and empirical studies, 2024. URL <https://arxiv.org/abs/2407.01092>. arXiv preprint arXiv:2407.01092.
- [38] Xufang Luo, Yuge Zhang, Zhiyuan He, Zilong Wang, Siyun Zhao, Dongsheng Li, Luna K. Qiu, and Yuqing Yang. Agent lightning: Train any AI agents with reinforcement learning, 2025. URL <https://arxiv.org/abs/2508.03680>. arXiv preprint arXiv:2508.03680.
- [39] Gerald Woo, Chenghao Liu, Akshat Kumar, Caiming Xiong, Silvio Savarese, and Doyen Sahoo. Unified training of universal time series forecasting transformers. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 53140–53164. PMLR, 2024. URL <https://proceedings.mlr.press/v235/woo24a.html>.
- [40] Abhimanyu Das, Weihao Kong, Rajat Sen, and Yichen Zhou. A decoder-only foundation model for time-series forecasting. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 10148–10167. PMLR, 2024. URL <https://proceedings.mlr.press/v235/das24c.html>.

- [41] Benjamin Warner, Antoine Chaffin, Benjamin Clavié, Orion Weller, Oskar Hallström, Said Taghadouini, Alexis Gallagher, Raja Biswas, Faisal Ladhak, Tom Aarsen, et al. Smarter, better, faster, longer: A modern bidirectional encoder for fast, memory efficient, and long context finetuning and inference. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2526–2547, 2025.
- [42] Keller Jordan. 94% on CIFAR-10 in 3.29 seconds on a single GPU, 2024. URL <https://arxiv.org/abs/2404.00498>. arXiv preprint arXiv:2404.00498.
- [43] Zhonghao Wang, Danyu Sun, Sheng Zhou, Haobo Wang, Jiawei Fan, Longtao Huang, and Jiajun Bu. NoisyGL: A comprehensive benchmark for graph neural networks under label noise. In *Advances in Neural Information Processing Systems*, volume 37, pages 38142–38170, 2024. URL <https://openreview.net/forum?id=brxBxj4Dv3>.
- [44] Ricardo Knauer, Marvin Grimm, and Erik Rodner. PMLBmini: A tabular classification benchmark suite for data-scarce applications. In *AutoML 2024 Workshop*, 2024. URL <https://openreview.net/forum?id=XctSyEsBzx>.
- [45] Vitaliy Kinakh and Slava Voloshynovskiy. Tabular data generation using binary diffusion. In *Table Representation Learning Workshop at NeurIPS 2024*, 2024. URL <https://openreview.net/forum?id=lv234j8Hq7>.
- [46] Maximilian Beck, Korbinian Pöppel, Markus Spanring, Andreas Auer, Oleksandra Prudnikova, Michael Kopp, Günter Klambauer, Johannes Brandstetter, and Sepp Hochreiter. xlstm: Extended long short-term memory. *Advances in Neural Information Processing Systems*, 37:107547–107603, 2024.
- [47] James Harrison, John Willes, and Jasper Snoek. Variational bayesian last layers. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=Sx7BIiPzys>.
- [48] Yury Gorishniy, Akim Kotelnikov, and Artem Babenko. TabM: Advancing tabular deep learning with parameter-efficient ensembling. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=Sd4wYYOhmY>.
- [49] Yuxuan Wang, Haixu Wu, Jiayang Dong, Guo Qin, Haoran Zhang, Yong Liu, Yunzhong Qiu, Jianmin Wang, and Mingsheng Long. TimeXer: Empowering transformers for time series forecasting with exogenous variables. In *Advances in Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=INaUQ041T>.
- [50] Yu-Xuan Huang, Wen-Chao Hu, En-Hao Gao, and Yuan Jiang. ABLkit: A python toolkit for abductive learning. *Frontiers of Computer Science*, 18(6):186354, 2024. doi: 10.1007/s11704-024-40085-7.
- [51] Yuankai Luo, Lei Shi, and Xiao-Ming Wu. Classic GNNs are strong baselines: Reassessing GNNs for node classification. In *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=xkljKdGe4E>.
- [52] Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. HybridFlow: A flexible and efficient RLHF framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, 2025. URL <https://arxiv.org/abs/2409.19256>.
- [53] Alexia Jolicoeur-Martineau, Kilian Fatras, and Tal Kachman. Generating and imputing tabular data via diffusion and flow-based gradient-boosted trees. In *Proceedings of The 27th International Conference on Artificial Intelligence and Statistics*, volume 238 of *Proceedings of Machine Learning Research*, pages 1288–1296. PMLR, 2024. URL <https://proceedings.mlr.press/v238/jolicoeur-martineau24a.html>.
- [54] Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autoregressive modeling: Scalable image generation via next-scale prediction. In *Advances in Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=gojL67CfS8>.
- [55] Jiaming Ji, Jiayi Zhou, Hantao Lou, Boyuan Chen, Donghai Hong, Xuyao Wang, Wenqi Chen, Kaile Wang, Rui Pan, Jiahao Li, Mohan Wang, Josef Dai, Tianyi Qiu, Hua Xu, Dong Li, Weipeng Chen, Jun Song, Bo Zheng, and Yaodong Yang. Align anything: Training all-modality models to follow instructions with language feedback, 2024. URL <https://arxiv.org/abs/2412.15838>. arXiv preprint arXiv:2412.15838.
- [56] Abdul Fatir Ansari, Lorenzo Stella, Caner Turkmen, Xiyuan Zhang, Pedro Mercado, Huibin Shen, Oleksandr Shchur, Syama Sundar Rangapuram, Sebastian Pineda Arango, Shubham Kapoor, Jasper Zschiegner, Danielle C. Maddix, Hao Wang, Michael W. Mahoney, Kari Torkkola, Andrew Gordon Wilson, Michael Bohlke-Schneider, and Yuyang Wang. Chronos: Learning the language of time series, 2024. URL <https://arxiv.org/abs/2403.07815>.

- [57] Ahmad Bdeir, Kristian Schwethelm, and Niels Landwehr. Fully hyperbolic convolutional neural networks for computer vision. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=ekz1hN5QNh>.
- [58] Yong Liu, Tengge Hu, Haoran Zhang, Haixu Wu, Shiyu Wang, Lintao Ma, and Mingsheng Long. iTransformer: Inverted transformers are effective for time series forecasting. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=JePfAI8fah>.
- [59] Shiyu Wang, Haixu Wu, Xiaoming Shi, Tengge Hu, Huakun Luo, Lintao Ma, James Y. Zhang, and Jun Zhou. TimeMixer: Decomposable multiscale mixing for time series forecasting. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=7oLshfEIC2>.
- [60] Pin-Yen Huang, Szu-Wei Fu, and Yu Tsao. RankUp: Boosting semi-supervised regression with an auxiliary ranking classifier. In *Advances in Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=d2lPM1Aczs>.
- [61] Shengsheng Lin, Weiwei Lin, Wentai Wu, Haojun Chen, and Junjie Yang. SparseTSF: Modeling long-term time series forecasting with 1k parameters. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 30211–30226. PMLR, 2024. URL <https://proceedings.mlr.press/v235/lin24n.html>.

#	Repository	Task	Cat.	Dataset / Task	Metric	Direction	Anchor
1	llm.c	FineWeb Pretraining	NLP	FineWeb sample + HellaSwag	validation loss	lower	3.425
2	torch-conv-kan	ConvKAN CIFAR-10	CV	CIFAR-10	accuracy	higher	84.170
3	open-r1	Open-R1 MATH-500	LLM	MATH-500	exact match	higher	83.100
4	agent-lightning	Room Selector Tuning	RL	APO room selector	validation accuracy	higher	0.721
5	uni2ts	Uni2TS ETTh1 Forecasting	TS	ETTh1 LSF	forecast error	lower	0.375
6	timesfm	TimesFM Long Horizon	TS	ETTh1 long horizon	WAPE	lower	0.509
7	ModernBERT	ModernBERT MNLI	NLP	GLUE MNLI	accuracy	higher	90.400
8	cifar10-airbench	AirBench CIFAR-10	CV	CIFAR-10	accuracy	higher	94.010
9	NoisyGL	NoisyGL Cora GCN	Graph	Cora + 30% label noise	accuracy	higher	71.060
10	TabMini	TabMini Promoters	SL	molecular biology promoters	AUC	higher	0.930
11	binary-diffusion-tabular	Adult Tabular Diffusion	SL	Adult	test accuracy	higher	85.740
12	xlstm	xLSTM Parity	NLP	formal language Parity	scaled accuracy	higher	1.000
13	vbll	VBLL Yacht Regression	SL	UCI Yacht	RMSE	lower	0.860
14	tabm	TabM California Housing	SL	California Housing	RMSE	lower	0.441
15	TimeXer	TimeXer PJM Forecasting	TS	EPF / PJM	MSE	lower	0.093
16	ABLkit	ABLkit HWF Reasoning	SL	HWF	reasoning accuracy	higher	99.200
17	tunedGNN	tunedGNN Cora GCN	Graph	Cora	accuracy	higher	85.100
18	verl	verl GRPO GSM8K	LLM	GSM8K	accuracy	higher	86.100
19	ForestDiffusion	ForestDiffusion Iris	SL	Iris	F1_fake	higher	0.970
20	VAR	VAR ImageNet 256	CV	ImageNet-1K 256	FID	lower	3.550
21	align-anything	RAGEN Bandit Alignment	RL	RAGEN Bandit	success rate	higher	1.000
22	chronos-forecasting	Chronos Weather Forecasting	TS	monash weather	WQL	lower	0.148
23	HyperbolicCV	HyperbolicCV CIFAR-100	CV	CIFAR-100	accuracy	higher	78.070
24	iTransformer	iTransformer ETTm2 Forecasting	TS	ETTm2 horizon 96	MSE	lower	0.180
25	TimeMixer	TimeMixer ETTm2 Forecasting	TS	ETTm2 horizon 96	MSE	lower	0.175
26	ART	ART 2048	RL	2048 game rollouts	win rate	higher	0.600
27	open-r1-multimodal	Multimodal Open-R1 MathVista	LLM	MathVista-mini	accuracy	higher	51.600
28	semi-supervised-regression	RankUp UTKFace Regression	CV	UTKFace	MAE	lower	4.851
29	SparseTSF	SparseTSF ETTm1 Forecasting	TS	ETTm1 horizon 96	MSE	lower	0.314
30	simpleRL-reason	SimpleRL MATH-500	LLM	MATH-500	accuracy	higher	34.400

Table 6 AgentHPOBench task suite. Each task is built from one executable repository and one scoreable target metric.

6 Appendix

This supplementary material provides additional details on the experimental protocol, task suite, reference baselines, and implementation settings. It also presents complete results, supplementary analyses, and qualitative examples that complement the findings in the main paper.

7 AgentHPOBench Task Suite

AgentHPOBench contains 30 tasks drawn from 30 distinct executable ML repositories associated with recent papers when available [37–61]. Table 6 lists the full task suite. The anchor is taken from a paper, an official repository report, or a documented full setting reproduction.

Table 7 reports the reference baseline performance used for scoring under the limited- and full-budget settings. The baseline configuration of each task is fixed across settings. The full-budget protocol expands the task-specific training budget where applicable. For pretrained inference tasks and tasks without a distinct scalable training stage, the evaluation protocol remains unchanged, so identical baseline values are expected. For example, ART 2048 uses the same fixed evaluation of 25 games with at most 70 moves per game in both settings, and its baseline heuristic wins none of these games, yielding a win rate of zero. For the full-budget study, each selected agent executes the fixed baseline configuration, and the median of the three observations is used as the common full-budget reference for that task. Values are reported in the metric units defined in Table 6 and rounded to three decimal places. All scores are computed from the corresponding full-precision values.

8 Agent Prompt Template

AgentHPOBench standardizes the agent interface through a structured decision schema. At each intervention step, the task script constructs a task-specific context block that contains the task description, target metric, metric direction, current configuration, allowed search space, paper or repository anchor, baseline result, and previous trial history when available. This context is then passed to the decision backend, and the returned

Task	Limited	Full	Task	Limited	Full
FineWeb Pretraining	4.344	3.698	ABLkit HWF Reasoning	97.450	97.600
ConvKAN CIFAR-10	28.970	35.500	tunedGNN Cora GCN	83.500	83.500
Open-R1 MATH-500	1.563	2.200	verl GRPO GSM8K	84.685	84.230
Room Selector Tuning	0.414	0.379	ForestDiffusion Iris	0.901	0.901
Uni2TS ETTh1 Forecasting	1.155	1.144	VAR ImageNet 256	70.713	70.713
TimesFM Long Horizon	0.551	0.551	RAGEN Bandit Alignment	0.168	0.178
ModernBERT MNLI	38.961	63.495	Chronos Weather Forecasting	0.372	0.372
AirBench CIFAR-10	89.090	93.680	HyperbolicCV CIFAR-100	16.390	56.630
NoisyGL Cora GCN	70.000	70.000	iTransformer ETTm2 Forecasting	0.183	0.183
TabMini Promoters	0.928	0.928	TimeMixer ETTm2 Forecasting	0.178	0.178
Adult Tabular Diffusion	74.106	85.519	ART 2048	0.000	0.000
xLSTM Parity	0.011	0.067	Multimodal Open-R1 MathVista	48.800	48.800
VBLL Yacht Regression	1.487	0.467	RankUp UTKFace Regression	34.542	6.427
TabM California Housing	0.536	0.533	SparseTSF ETTm1 Forecasting	0.341	0.340
TimeXer PJM Forecasting	0.133	0.114	SimpleRL MATH-500	15.800	5.200

Table 7 Reference baseline performance $y_{t,0}^{(r)}$ under the limited and full budget settings. Each value is reported in the original metric unit of the corresponding task.

intervention is parsed into a structured configuration before execution. Figure 4 shows the shared prompt template used for local open-weight agents, while Figure 5 shows the compact decision prompt used for API-based agents. Figure 6 provides an example task-specific context, illustrating how concrete trial evidence and the allowed search space are supplied before requesting the next intervention. We use “search space” to denote the task-specific allowed intervention space, namely the configurable fields exposed to the agent and the valid values for each field, rather than the decoding hyperparameters of the agent.

The local and API templates preserve the interfaces used by their respective agent implementations rather than enforcing identical surface wording. Prompt construction, response parsing, configuration validation, retries, and other harness behavior are therefore part of the evaluated agent system. The resulting comparisons should be interpreted as comparisons between complete agent pipelines, not as isolated rankings of the underlying language models.

9 Implementation and Reproducibility Details

Common execution protocol. Unless stated otherwise, all results use the limited-budget protocol. Each task first executes a fixed reference baseline and then permits five sequential interventions. The baseline and every intervention use the same task-specific data split, metric, intervention space, and execution budget. The limited setting uses approximately 10% of the corresponding original training or evaluation budget. The full-budget study changes only this execution budget and retains the task definition, prompt, intervention space, five-decision protocol, result schema, and scoring pipeline. Each decision must return one complete configuration in the structured `NEW_CONFIG` format. Omitted fields retain their current values, and configurations are validated and clamped to the task-specific discrete intervention space before execution. The reported task result is the metric after intervention five, rather than the best intermediate metric.

The benchmark optimizes the objective exposed by each upstream repository. Some repositories report a test-set metric, or a test metric at the checkpoint selected by validation performance, and this repository-defined objective is visible during sequential decision making. AgentHPOBench therefore evaluates optimization

Local open-weight agent prompt

```
1 You are an expert machine learning researcher helping optimize hyperparameters for model
  training.
2
3 ## Task
4 Optimize hyperparameters to {optimization_goal} the target metric within the remaining budget
  .
5 - Metric Direction: {metric_direction}
6
7 ## Current Training Progress
8 - Current Epoch: {epoch}
9 - Budget Remaining: {budget_remaining} epochs out of {total_budget} total
10 - Decision Number: {decision_number}
11
12 ## Recent Training Logs
13 {training_log}
14
15 ## Current Hyperparameters
16 {current_config}
17
18 ## Hyperparameter Search Space
19 {search_space}
20
21 ## Instructions
22 - Be conservative unless the run is clearly plateauing or unstable.
23 - Only return values inside the search space.
24 - If training is improving normally, keeping the current config is acceptable.
25 - Output plain text only.
26 - Do not use markdown code fences, XML tags, or extra sections.
27 - Follow the exact headers below.
28
29 ## Response Format
30 REASONING: <short explanation>
31 NEW_CONFIG: {"learning_rate": 0.05, "batch_size": 128, "optimizer": "sgd"}
32 CONFIDENCE: 0.8
```

Figure 4 Prompt template used for local open-weight agents. The optimization goal is set to maximize for higher-is-better metrics and minimize for lower-is-better metrics.

API-based agent prompt

```
1 Task: choose the next hyperparameter config for {task_name}.
2 Return exactly one JSON object containing only proposed hyperparameter keys and values.
3
4 Current config:
5 {current_config}
6
7 Search space:
8 {search_space}
9
10 Budget remaining: {budget_remaining} of {total_budget}.
11
12 Training history:
13 {training_log}
```

Figure 5 Compact decision prompt used for API-based agents.

of an observable experimental objective. It does not provide a separate hidden test set and should not be interpreted as estimating generalization after adaptive model selection.

Example task-specific context

```
1 You are choosing one hyperparameter configuration for a budget-limited reproduction benchmark
  .
2
3 Task: SparseTSF ETTm1 multivariate long-term forecasting, pred_len=96.
4 Metric: test_mse_at_best_val over the fixed epoch budget, lower is better.
5 Paper anchor: ICML 2024 SparseTSF official long-term forecasting table reports ETTm1 horizon
  -96 MSE=0.314.
6
7 Budget baseline:
8 test_mse_at_best_val=0.340816, config={...}
9
10 Trial history:
11 Trial 0 baseline:
12 config={...}
13 test_mse=0.340816
14 val_mse=0.440882
15
16 Trial 1 intervention_1:
17 config={...}
18 test_mse=0.340816
19 val_mse=0.440882
20
21 Trial 2 intervention_2:
22 config={...}
23 test_mse=0.318475
24 val_mse=0.407163
25
26 Search space:
27 {...}
28
29 Return exactly one line:
30 NEW_CONFIG: {"lr": 0.02, "weight_decay": 0.0, "batch_size": 256, ...}
31
32 Choose the config most likely to reduce test_mse_at_best_val under the fixed budget. Do not
  change epochs, data split, dataset, seq_len, pred_len, model family, or metric.
```

Figure 6 Example task-specific context used to request the next intervention.

Open-weight decision models. Table 8 lists the exact checkpoints and realized generated-token usage for the six open-weight agents under the limited-budget protocol. We load all checkpoints with Hugging Face Transformers using the checkpoint’s chat template and `bf16` weights. Agent decoding is deterministic: temperature is 0, sampling is disabled, and optional thinking output is disabled so that generation begins with the requested structured decision. Token counts are computed from the generated decision text using the tokenizer associated with each checkpoint. They exclude input-prompt tokens. Each checkpoint contributes 450 decisions from 30 tasks, five interventions, and three experiment seeds.

API-based agents. We evaluate DeepSeek-V4-Pro, GPT-5.5, GLM-4.7, GLM-5.1, Kimi-2.6, and Claude Sonnet 4.6 using the same five logical decisions, task contexts, output schema, and configuration validation as the open-weight agents. The request temperature is set to 0 when the endpoint exposes this control. For every decision, the result trace records the provider and model identifier returned by the harness, the raw response, timestamp, token-usage fields when available, and retry or error metadata. Each API agent is evaluated with one complete, timestamped, audited 30-task run. This choice is not presented as a controlled seed replicate: hosted endpoints do not expose an immutable checkpoint build, serving replica, batching state, or a reproducible end-to-end random seed, and these service-side states may change independently of the benchmark. Repeating an API request would therefore measure a mixture of model and serving changes rather than the benchmark stochasticity isolated by the controlled local runs. Table 9 reports the provider-recorded usage of the API evaluation campaign.

Hugging Face checkpoint	Decisions	Total tokens	Mean	Median	P95
Qwen/Qwen3-8B	450	60,636	134.7	127.0	383.5
google/gemma-2-2b-it	450	40,857	90.8	85.5	142.5
meta-llama/Meta-Llama-3.1-8B-Instruct	450	53,700	119.3	123.0	209.0
deepseek-ai/DeepSeek-R1-Distill-Qwen-14B	450	153,673	341.5	130.0	1,380.2
microsoft/Phi-4	450	91,327	202.9	214.0	338.5
Qwen/Qwen3-32B	450	54,771	121.7	125.0	191.5

Table 8 Realized generated-token usage of the open-weight decision models under the limited-budget protocol. P95 denotes the 95th percentile across individual decisions.

API agent	Requests	Total tokens	Tokens/request
Claude Sonnet 4.6	1,695	2,498,302	1,474
GPT-5.5	1,418	2,132,497	1,504
DeepSeek-V4-Pro	1,321	2,000,752	1,515
GLM-5.1	1,296	1,978,744	1,527
Kimi-2.6	1,237	1,922,535	1,554
GLM-4.7	1,231	1,866,319	1,516

Table 9 Provider-recorded API usage during the limited-budget evaluation campaign. Request counts include retries and harness-level calls in addition to the five logical decisions per task.

Each API agent makes 150 accepted logical decisions across the 30 tasks, while the campaign records 1,231–1,695 requests, or approximately 8.2–11.3 requests per accepted decision. The request totals include retries, parsing or validation recovery, and other harness-level calls and therefore are not additional intervention opportunities. Provider-recorded token counts include both prompt and generated tokens and are not directly comparable with the generated-output-only counts in Table 8.

Seeds, repetitions, and aggregation. We run every open-weight agent and each conventional HPO baseline with experiment seeds $s \in \{0, 1, 42\}$. The same three seeds are used consistently across the benchmark harness, optimizer, and stochastic task execution, while dataset splits fixed by an upstream protocol remain unchanged. Random search, TPE, and the fixed-budget BOHB-style method use the same reference baseline, discrete intervention space, and five configuration evaluations as the agents. Their proposal rules are detailed in Appendix 11.1.

For each controlled method, the bounded normalized score, baseline win indicator, and anchor attainment are computed independently for every task and seed. Category and overall metrics are then computed for each seed and reported as the arithmetic mean across the three seeds. Table 10 additionally reports the corresponding sample standard deviation. This preserves equal weight for every benchmark task. The local agent checkpoints, decoding settings, runtime environment, and task random states are explicitly controlled, so these repetitions quantify sensitivity to benchmark execution stochasticity rather than provider-side variation.

No intermediate feedback ablation. The no intermediate feedback condition is paired with the standard feedback run at the task and replicate-seed level. It uses the exact baseline configuration, target metric, and baseline observation recorded by the corresponding standard-feedback run rather than independently re-evaluating the baseline. The baseline metric is therefore available to the agent. However, for all five decisions, the visible history contains only this fixed baseline observation. Metrics, auxiliary outputs, and logs produced by interventions one through four are withheld. The proposed interventions are still executed and recorded normally. Thus, the ablation isolates access to intermediate experimental evidence while holding the initial observation, evaluator seed, task budget, search space, and decision model fixed.

Execution environment and reproducibility resources. The controlled experiments run on Linux development machines equipped with NVIDIA H200 GPUs with 143,771 MiB of visible memory. The orchestration layer uses Python 3.10 or newer. Because the 30 tasks depend on heterogeneous upstream repositories, each task adapter invokes its repository-specific Conda environment rather than forcing all tasks into one dependency stack. Model weights and datasets are downloaded before execution, and the reported runs use offline Hugging Face modes.

For reproducibility, we record the upstream repository version, benchmark adaptations, environment and asset-preparation requirements, model checkpoint, task seeds, baseline configuration, metric extraction rule, intervention space, execution budget, and scoring reference for every task. Detailed setup instructions and machine-readable task specifications will be provided in the public GitHub repository.

Result Validation. We include only task runs that complete the reference baseline and all five interventions, with a valid configuration and metric recorded at every step. Interrupted or malformed runs are excluded and rerun at the task level. All reported aggregates are computed from complete task records. The public GitHub repository includes the corresponding validation and aggregation utilities.

10 Scoring and Aggregation Details

For a fixed budget setting r , let $y_{t,0}^{(r)}$ denote the reference baseline performance for task t reported in Table 7, let $y_{t,k}^{(r)}$ denote the result after intervention k , and let a_t denote the paper or repository anchor. The main task result is $y_{t,K}^{(r)}$, which is obtained after the final intervention rather than selected as the best intermediate result. This convention measures whether an optimizer preserves or refines its improvements after observing the complete trajectory.

Before scoring, every baseline, intervention result, and anchor is converted to a common numeric unit within its task. For example, an accuracy represented as a fraction is converted to a percentage when the corresponding anchor is reported as a percentage. Let $g_t(z) = z$ for a metric in which higher values are better and $g_t(z) = -z$ for a metric in which lower values are better. We define the normalized score as

$$\text{NS}_{t,r} = \frac{g_t(y_{t,K}^{(r)}) - g_t(y_{t,0}^{(r)})}{g_t(a_t) - g_t(y_{t,0}^{(r)})}. \quad (12)$$

A value of 0 matches the reference baseline, a value of 1 matches the anchor, and a negative value indicates degradation. Because a small baseline to anchor gap can give one task disproportionate influence, we bound each task score before aggregation:

$$\text{BNS}_{t,r} = \min\{1, \max\{-1, \text{NS}_{t,r}\}\}. \quad (13)$$

For the task set $\mathcal{T}$, the mean bounded normalized score is

$$\text{MBNS}_r = \frac{1}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} \text{BNS}_{t,r}. \quad (14)$$

The baseline win rate reports the percentage of tasks for which the final result strictly improves over the reference baseline:

$$\text{BWR}_r = \frac{100}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} \mathbb{I}\left[g_t(y_{t,K}^{(r)}) > g_t(y_{t,0}^{(r)})\right]. \quad (15)$$

Ties are not counted as wins. Anchor attainment measures absolute performance relative to the anchor in the

original metric direction:

$$AA_{t,r} = \begin{cases} y_{t,K}^{(r)} / a_t, & \text{if higher values are better,} \\ a_t / y_{t,K}^{(r)}, & \text{if lower values are better.} \end{cases} \quad (16)$$

The mean anchor attainment is

$$MAA_r = \frac{100}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} AA_{t,r}. \quad (17)$$

Thus, MBNS measures bounded improvement over the common reference baseline, BWR measures the coverage of positive improvements, and MAA measures absolute attainment of reported reference performance. MAA may exceed 100% when a result surpasses its anchor.

The reference baseline configuration is fixed across budget settings, but its measured performance can change with the execution budget. Within each budget setting, the same $y_{t,0}^{(r)}$ is used for all agents and conventional optimizers. For the intervention level tables below, $BNS_{t,r,k}$ and $AA_{t,r,k}$ are computed by replacing $y_{t,K}^{(r)}$ with $y_{t,k}^{(r)}$ in the definitions above.

11 Additional Experimental Protocols and Results

This section provides implementation details and supporting results for the conventional HPO baselines and the intermediate feedback ablation reported in the main paper. All methods use the task-specific intervention spaces defined by the benchmark task specifications, begin from the same limited-budget reference baseline, receive five intervention opportunities, and are scored using the result after the fifth intervention. Table 6 summarizes the corresponding tasks, objectives, metric directions, and anchors.

11.1 Conventional HPO Baselines

Implementation. Random search samples every configurable field independently and uniformly from its allowed discrete values. We evaluate random search with seeds 0, 1, and 42.

The TPE baseline uses the observations available before each intervention to rank previous configurations in the direction of the target metric. Proposals are sampled uniformly until at least two executed observations are available. TPE then assigns the best $\lceil 0.35n \rceil$ of the n observations to the good set and samples each field according to its smoothed good to bad frequency ratio. The additive smoothing constant is 1.0, and a proposal uses uniform exploration with probability 0.15 for each field.

Because every intervention in the limited budget protocol receives the same training budget, standard multi fidelity resource allocation is not available. We therefore implement a fixed budget adaptation of BOHB. Proposals are sampled uniformly until at least two executed observations are available. Later proposals rank the observations, retain the best $\lceil n/3 \rceil$ as the current elite set, select a parent with rank based weights, and mutate each field with probability 0.35. A mutated field is sampled from the smoothed good to bad frequency ratio with probability 0.5 and uniformly otherwise. Random search, TPE, and this BOHB adaptation are each evaluated with seeds $\{0, 1, 42\}$. Thus, the BOHB result evaluates its configuration selection policy under the common five intervention protocol, rather than the resource allocation component of standard BOHB.

The conventional optimizers operate on configurations and scalar target values, while the agents additionally process the task description and experimental feedback through their native decision interface. Accordingly, these baselines compare complete optimization systems under a common execution budget. All methods are evaluated under the same five-intervention execution budget. Because every trial receives the same resource budget, the BOHB-style baseline evaluates its configuration-proposal component in this setting. Multi-fidelity resource scheduling is outside the scope of the protocol.

Agent / Method	Mean bounded normalized score							Overall metrics	
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%) MAA (%)
<i>Conventional HPO baselines</i>									
Random search	0.034 ± 0.039	-0.135 ± 0.075	0.299 ± 0.023	-0.463 ± 0.556	0.124 ± 0.192	-0.292 ± 0.102	-0.136 ± 0.097	-0.034 ± 0.051	48.9 ± 10.2 62.6 ± 0.3
TPE	0.020 ± 0.006	-0.110 ± 0.105	0.005 ± 0.101	-0.406 ± 0.526	0.192 ± 0.184	-0.219 ± 0.029	-0.302 ± 0.161	-0.113 ± 0.068	40.0 ± 3.3 62.4 ± 1.8
BOHB variant	-0.062 ± 0.011	-0.006 ± 0.194	0.235 ± 0.111	-0.824 ± 0.305	0.260 ± 0.127	-0.236 ± 0.025	0.153 ± 0.348	0.018 ± 0.056	45.6 ± 7.7 65.3 ± 2.1
<i>Open-weight agents</i>									
Gemma2-2B	0.014 ± 0.011	-0.103 ± 0.130	0.233 ± 0.088	-0.459 ± 0.505	0.005 ± 0.293	-0.171 ± 0.128	0.066 ± 0.059	-0.001 ± 0.015	55.6 ± 5.1 64.2 ± 2.5
DeepSeek-R1-Qwen-14B	0.008 ± 0.014	-0.223 ± 0.061	0.316 ± 0.101	-0.333 ± 0.577	0.074 ± 0.045	-0.271 ± 0.082	0.157 ± 0.174	0.018 ± 0.035	54.4 ± 5.1 64.1 ± 0.8
Qwen3-8B	-0.001 ± 0.050	-0.140 ± 0.048	0.233 ± 0.076	-0.271 ± 0.638	0.158 ± 0.042	-0.219 ± 0.109	0.124 ± 0.171	0.024 ± 0.069	53.3 ± 3.3 65.1 ± 1.0
Llama-3.1-8B	0.019 ± 0.143	-0.142 ± 0.147	0.253 ± 0.051	-0.525 ± 0.463	0.125 ± 0.238	-0.144 ± 0.218	0.172 ± 0.190	0.030 ± 0.033	44.4 ± 10.2 66.3 ± 2.0
Phi-4-14B	0.047 ± 0.032	-0.077 ± 0.138	0.278 ± 0.013	-0.448 ± 0.508	0.306 ± 0.233	-0.098 ± 0.107	0.430 ± 0.075	0.130 ± 0.062	63.3 ± 3.3 66.9 ± 1.9
Qwen3-32B	0.060 ± 0.054	-0.120 ± 0.104	0.285 ± 0.014	-0.302 ± 0.606	0.349 ± 0.037	-0.120 ± 0.060	0.485 ± 0.175	0.148 ± 0.059	60.0 ± 3.3 69.1 ± 0.6

Table 10 Three-seed results for conventional HPO baselines and open-weight agents under the limited-budget protocol. Entries report mean ± sample standard deviation over seeds {0, 1, 42}. Category columns report MBNS. BWR and MAA are computed independently for each seed before aggregation.

Random seed sensitivity. Table 10 reports the variability of all locally executable methods. Each entry is the arithmetic mean and sample standard deviation of the corresponding seed level metric over seeds {0, 1, 42}.

11.2 Statistical Robustness

We additionally assess sensitivity to the composition of the benchmark task suite using 20,000 category-stratified paired bootstrap resamples. Each resample preserves the number of tasks in every research category, and the same sampled tasks are used for all methods. For open-weight agents and conventional HPO baselines, the task-level BNS and anchor attainment values are first averaged over the three controlled seeds and then resampled. The resulting intervals therefore quantify uncertainty associated with task composition, whereas the standard deviations in Table 10 quantify variation across controlled executions. For API agents, which are evaluated once, these intervals reflect sensitivity to benchmark task composition only and should not be interpreted as uncertainty across repeated API executions.

Interval definitions. A task-bootstrap 95% confidence interval is obtained by repeatedly resampling tasks with replacement within each research category, recomputing the aggregate metric for each resample, and taking the 2.5th and 97.5th percentiles of the resulting distribution. It measures the sensitivity of an aggregate result to the composition of the benchmark task suite. A paired MBNS difference is computed as $\text{MBNS}(A) - \text{MBNS}(B)$ using the same resampled tasks for both methods. A positive difference favors Method A, while a negative difference favors Method B. If its 95% confidence interval includes zero, the observed ordering is not stable under variation in task composition.

The bootstrap intervals show that benchmark composition contributes non-negligible uncertainty, particularly for methods whose gains are concentrated in a small number of categories or tasks. Claude Sonnet 4.6 retains the strongest point estimates across the four reported summaries. Qwen3-32B and Phi-4-14B have similar task-composition uncertainty among open-weight agents. The three conventional HPO intervals are also broad under the final-step criterion. These intervals are intended as a robustness diagnostic rather than a multiple-comparison significance test. Small differences between methods should therefore be interpreted together with the paired comparisons reported below.

11.3 Best-So-Far Performance

The main results use the configuration produced at the fifth intervention, which evaluates whether a method preserves and refines improvements throughout the full trajectory. As a complementary diagnostic, Table 12 reports the best result observed among interventions one through five. For each task, the best intervention according to the task-specific metric direction is scored against the same common reference baseline used in the main results. The reference baseline itself is not included among the candidate interventions. For methods evaluated with three seeds, scoring is performed independently for each task and seed before averaging across seeds and tasks, matching the aggregation used in the main results.

Agent / Method	MBNS [95% CI]	MAA (%) [95% CI]	Median BNS	BWR (%)
<i>Conventional HPO baselines</i>				
Random search	−0.034 [−0.153, 0.082]	62.6 [52.5, 72.2]	0.009	48.9
TPE	−0.113 [−0.265, 0.045]	62.4 [51.9, 72.3]	−0.030	40.0
BOHB variant	0.018 [−0.122, 0.161]	65.3 [55.5, 74.5]	0.012	45.6
<i>Open-weight agents</i>				
Gemma2-2B	−0.001 [−0.154, 0.143]	64.2 [55.0, 73.2]	0.003	55.6
DeepSeek-R1-Qwen-14B	0.018 [−0.141, 0.169]	64.1 [54.1, 73.9]	0.007	54.4
Llama-3.1-8B	0.030 [−0.118, 0.183]	66.3 [57.3, 75.0]	−0.041	44.4
Qwen3-8B	0.024 [−0.127, 0.172]	65.1 [55.8, 74.2]	−0.010	53.3
Phi-4-14B	0.130 [0.001, 0.256]	66.9 [57.8, 75.9]	0.066	63.3
Qwen3-32B	0.148 [0.016, 0.283]	69.1 [60.3, 77.7]	0.058	60.0
<i>API agents</i>				
GLM-5.1	0.080 [−0.084, 0.240]	67.0 [57.4, 76.4]	0.036	56.7
Kimi-2.6	0.110 [−0.054, 0.260]	70.4 [61.0, 79.8]	0.012	56.7
GLM-4.7	0.112 [−0.049, 0.268]	67.8 [58.2, 77.2]	0.076	60.0
DeepSeek-V4-Pro	0.175 [−0.017, 0.352]	70.1 [61.6, 78.5]	0.109	63.3
GPT-5.5	0.305 [0.174, 0.433]	76.7 [66.7, 86.7]	0.103	66.7
Claude Sonnet 4.6	0.407 [0.264, 0.541]	79.5 [66.6, 93.6]	0.382	76.7

Table 11 Task-composition robustness of the evaluated methods under the limited-budget protocol. Intervals are percentile 95% confidence intervals from 20,000 category-stratified paired bootstrap resamples of the 30 tasks. Median BNS and BWR are point estimates.

This analysis distinguishes the quality of the best configuration discovered within the intervention budget from the ability to retain it at the final step. Claude Sonnet 4.6 remains the strongest method overall, reaching an MBNS of 0.469, a BWR of 90.0%, and an MAA of 80.5%. It also leads on CV, Graph, LLM, and SL, while GPT-5.5 leads on RL, TPE on TS, and random search on NLP. Compared with their final-step results, the overall MBNS of the three conventional HPO baselines improves by 0.273–0.411 under best-so-far selection, indicating that they often discover useful configurations but do not consistently finish with them.

Under this incumbent-style view, random search, TPE, and the BOHB variant obtain overall MBNS values of 0.325, 0.298, and 0.291, respectively, exceeding all evaluated open-weight agents. Phi-4-14B and Qwen3-32B reach 0.197 and 0.195. This ranking reversal clarifies that the final-step metric combines search quality with the ability to preserve or refine an earlier gain, whereas standard HPO commonly returns the incumbent. The strongest API agents remain competitive under best-so-far selection, with Claude Sonnet 4.6 and GPT-5.5 reaching 0.469 and 0.347. The corresponding seed variation and task-bootstrap intervals are reported below.

Table 13 separates execution variation from sensitivity to benchmark composition. The three conventional HPO methods have overlapping best-so-far task-bootstrap intervals, as do Phi-4-14B and Qwen3-32B.

Table 14 directly bootstraps task-level differences between selected methods. Under the final-step criterion, Claude Sonnet 4.6 has a positive paired difference relative to GPT-5.5, and Qwen3-32B has a positive difference relative to the BOHB variant. The interval for Phi-4-14B versus Qwen3-32B includes zero. Under best-so-far selection, Claude Sonnet 4.6 remains ahead of GPT-5.5, while the interval for GPT-5.5 versus random search includes zero. Random search has a positive paired difference relative to Phi-4-14B, whereas its differences from TPE and the BOHB variant are inconclusive. These results support reporting both selection criteria without treating small point-estimate differences as definitive rankings.

11.4 Representative Decision Traces

Table 15 compares five agents on the same tunedGNN Cora GCN task. For the three open-weight agents, we show the seed-0 trace from the controlled three-seed evaluation so that each row represents one executable

Agent / Method	Mean bounded normalized score							Overall metrics		
	NLP (3)	CV (5)	TS (7)	Graph (2)	RL (3)	LLM (4)	SL (6)	Overall	BWR (%)	MAA (%)
Conventional HPO baselines										
Random search	0.089	0.179	0.629	0.011	0.481	-0.097	0.515	0.325	71.1	72.7
TPE	0.088	0.138	0.682	-0.192	0.426	-0.090	0.447	0.298	74.4	71.4
BOHB variant	0.015	0.225	0.570	-0.167	0.305	-0.061	0.538	0.291	67.8	70.4
Open-weight agents										
Gemma2-2B	0.020	0.170	0.259	-0.459	0.125	-0.091	0.142	0.089	62.2	66.3
DeepSeek-R1-Qwen-14B	0.018	0.051	0.320	-0.333	0.404	-0.206	0.181	0.112	63.3	67.1
Qwen3-8B	0.016	0.123	0.303	-0.271	0.194	-0.038	0.180	0.125	63.3	66.7
Llama-3.1-8B	0.019	0.045	0.291	-0.177	0.299	-0.035	0.215	0.134	56.7	68.7
Qwen3-32B	0.074	0.070	0.289	-0.302	0.375	-0.079	0.508	0.195	66.7	70.4
Phi-4-14B	0.050	0.123	0.282	-0.281	0.413	-0.064	0.459	0.197	70.0	69.0
API agents										
GLM-5.1	-0.088	0.171	0.286	0.031	0.032	0.009	0.713	0.235	70.0	69.1
Kimi-2.6	-0.050	0.122	0.277	0.031	0.486	-0.052	0.684	0.261	70.0	71.4
GLM-4.7	-0.088	0.197	0.283	0.000	0.061	-0.044	0.689	0.228	66.7	69.6
DeepSeek-V4-Pro	-0.027	0.096	0.510	0.094	0.621	0.052	0.544	0.316	73.3	72.8
GPT-5.5	-0.028	0.164	0.375	0.281	0.822	0.119	0.589	0.347	73.3	77.5
Claude Sonnet 4.6	-0.013	0.258	0.519	0.877	0.710	0.206	0.746	0.469	90.0	80.5

Table 12 Best-so-far AgentHPOBench results under the limited-budget protocol. For each task, the best observed result among interventions one through five is selected and scored. Category columns report MBNS, while BWR and MAA are computed over all 30 tasks. This diagnostic complements the final-step results in the main paper.

Agent / Method	Best-so-far MBNS	Seed SD	Task-bootstrap 95% CI
<i>Conventional HPO baselines</i>			
Random search	0.325	0.082	[0.199, 0.447]
TPE	0.298	0.048	[0.179, 0.417]
BOHB variant	0.291	0.040	[0.187, 0.396]
<i>Open-weight agents</i>			
Gemma2-2B	0.089	0.008	[-0.071, 0.241]
DeepSeek-R1-Qwen-14B	0.112	0.052	[-0.010, 0.234]
Qwen3-8B	0.125	0.061	[-0.016, 0.262]
Llama-3.1-8B	0.134	0.028	[0.003, 0.267]
Phi-4-14B	0.197	0.039	[0.065, 0.327]
Qwen3-32B	0.195	0.060	[0.066, 0.327]
<i>API agents</i>			
GLM-5.1	0.235	–	[0.086, 0.381]
Kimi-2.6	0.261	–	[0.139, 0.380]
GLM-4.7	0.228	–	[0.076, 0.374]
DeepSeek-V4-Pro	0.316	–	[0.198, 0.433]
GPT-5.5	0.347	–	[0.221, 0.470]
Claude Sonnet 4.6	0.469	–	[0.343, 0.588]

Table 13 Uncertainty estimates for best-so-far MBNS. Seed SD is the sample standard deviation over seeds {0, 1, 42} and is reported only for locally controlled methods. Task-bootstrap intervals use the same 20,000 category-stratified paired resamples.

configuration trajectory. The API-agent rows show their single evaluation. All displayed traces start

Selection criterion	Method A – Method B	Paired MBNS difference [95% CI]
Final step	Claude Sonnet 4.6 – GPT-5.5	0.102 [0.007, 0.208]
Final step	Phi-4-14B – Qwen3-32B	−0.018 [−0.071, 0.034]
Final step	Qwen3-32B – BOHB variant	0.131 [0.024, 0.238]
Best so far	Claude Sonnet 4.6 – GPT-5.5	0.122 [0.055, 0.207]
Best so far	GPT-5.5 – Random search	0.022 [−0.116, 0.156]
Best so far	Random search – Phi-4-14B	0.127 [0.029, 0.232]
Best so far	Random search – TPE	0.026 [−0.029, 0.089]
Best so far	Random search – BOHB variant	0.033 [−0.018, 0.091]
Best so far	Phi-4-14B – Qwen3-32B	0.003 [−0.048, 0.053]

Table 14 Selected paired method comparisons under the final-step and best-so-far criteria. Each entry is Method A minus Method B. The intervals use 20,000 category-stratified paired task-bootstrap resamples. Controlled methods are first averaged over their three matched seeds at the task level.

Agent	Configurations selected at interventions 1–5	Test accuracy (%)	Qualitative pattern
Claude Sonnet 4.6	I_1 : lr=0.005, hidden=256, dropout=0.5, layer norm=True; I_2 : retain B except lr=0.002; I_3 : retain I_2 and set residual=True; I_4 – I_5 : retain I_3	82.2 → 83.8 → 85.2 → 85.2 → 85.2	Recovers from a harmful joint change, isolates one architectural change, and retains the improved configuration.
GPT-5.5	I_1 : lr=0.005, dropout=0.5; I_2 : retain B except lr=0.002; I_3 : retain I_2 except layers=2; I_4 – I_5 : retain I_3	82.2 → 83.8 → 84.4 → 84.4 → 84.4	Uses a conservative correction, tests a single change to model depth, and retains the improved configuration.
Qwen3-32B	I_1 : lr=0.002, hidden=256, layers=4; I_2 : retain B except lr=0.002; I_3 – I_5 : retain I_2	79.4 → 83.8 → 83.8 → 83.8 → 83.8	Recovers from an aggressive first proposal but stops exploring after a modest improvement.
Llama3-3.1-8B	I_1 : lr=0.002, hidden=256, dropout=0.5, weight decay=0; I_2 : return to B ; I_3 : return to I_1 ; I_4 : retain I_1 except lr=0.001; I_5 : retain I_1 except layers=4	85.0 → 83.5 → 85.0 → 84.5 → 81.0	Finds a strong configuration early but continues exploring and discards it at the final intervention.
Gemma2-2B	I_1 – I_5 : retain B	83.5 → 83.5 → 83.5 → 83.5 → 83.5	Repeats the baseline configuration without testing an alternative.

Table 15 Decision traces on tunedGNN Cora GCN under the limited budget protocol. B denotes the shared baseline, and I_i denotes intervention i . The accuracy column reports the outcomes of I_1 – I_5 . For compactness, configurations are described relative to B or a referenced earlier intervention.

from the shared baseline $B = (\text{lr} = 0.001, \text{hidden} = 512, \text{layers} = 3, \text{dropout} = 0.7, \text{weight decay} = 0.0005, \text{layer norm} = \text{False}, \text{residual} = \text{False})$, which obtains 83.5% test accuracy at the epoch with the highest validation accuracy. Holding the task, baseline, and intervention space fixed reveals distinct responses to the same type of experimental feedback. Claude Sonnet 4.6 and GPT-5.5 recover from harmful initial changes and preserve subsequent improvements. Qwen3-32B also recovers but stops exploring after a modest gain, whereas Llama-3.1-8B discards its strongest configuration at the final intervention. Gemma2-2B repeatedly executes the baseline without testing an alternative.

12 Metric Sensitivity

Metric sensitivity. Some tasks have a small gap between the limited-budget reference baseline and the reported anchor. In such cases, modest execution noise can produce a relatively large normalized change. Bounding each task score to $[-1, 1]$ prevents an arbitrarily large contribution from one task, but does not remove sensitivity near a small denominator and can cause score saturation. We therefore report BWR, MAA, median BNS, task-level results, and task-composition bootstrap intervals alongside MBNS. The current benchmark does not separately estimate a noise-based minimum meaningful difference from repeated no-op

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	6.053	5.868	5.931	5.931	6.057	6.053	5.931	5.931	5.931	5.931	5.931	5.931
ConvKAN CIFAR-10	26.883	23.183	24.917	27.930	33.660	17.647	38.370	26.250	39.730	25.180	27.370	13.950
Open-R1 MATH-500	2.200	17.600	15.133	2.200	21.600	18.133	45.000	45.000	1.800	1.800	2.200	46.000
Room Selector Tuning	0.195	0.379	0.161	0.057	0.448	0.276	0.517	1.000	0.000	0.000	0.414	0.862
Uni2TS ETTh1 Forecasting	1.141	0.398	0.398	1.151	0.398	1.179	0.375	0.375	1.150	1.248	1.131	0.375
TimesFM Long Horizon	0.511	0.509	0.524	0.509	0.511	0.511	0.509	0.509	0.551	0.551	0.551	0.509
ModernBERT MNLI	39.803	35.446	41.481	40.051	50.382	35.446	35.446	35.446	35.446	35.446	35.446	35.446
AirBench CIFAR-10	89.170	89.303	89.580	89.170	89.720	88.757	89.190	89.010	89.220	89.220	89.090	88.570
NoisyGL Cora GCN	67.733	67.900	67.467	67.733	66.400	67.600	70.000	69.200	70.000	70.000	70.000	68.600
TabMini Promoters	0.896	0.958	0.800	0.896	0.930	0.868	0.925	0.928	0.928	0.928	0.928	0.956
Adult Tabular Diffusion	85.560	85.560	85.560	85.560	85.918	85.560	87.224	86.548	85.519	85.519	85.519	87.454
xLSTM Parity	0.017	-0.031	0.021	0.017	-0.009	0.021	-0.021	-0.021	0.011	0.011	0.011	0.021
VBLL Yacht Regression	1.754	1.776	1.754	1.754	1.754	1.754	1.663	0.530	0.657	0.657	0.657	0.465
TabM California Housing	0.519	0.519	0.519	0.519	0.519	0.519	0.530	0.530	0.530	0.530	0.530	0.530
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.133	0.127
ABLkit HWF Reasoning	97.350	97.333	97.500	97.733	95.800	97.317	97.450	97.050	96.550	96.900	97.350	97.150
tunedGNN Cora GCN	81.267	73.400	81.267	81.267	80.167	80.833	82.400	82.200	82.900	82.900	82.900	82.200
verl RPO GSM8K	83.902	83.573	84.155	83.472	84.054	84.205	84.610	85.216	84.913	85.064	85.064	84.761
ForestDiffusion Iris	0.954	0.954	0.954	0.954	0.954	0.947	0.979	0.979	0.979	0.979	0.979	0.979
VAR ImageNet 256	88.906	83.735	70.713	75.917	81.729	70.713	70.713	72.862	70.713	70.713	70.713	75.143
RAGEN Bandit Alignment	0.686	0.730	0.664	0.723	0.531	0.506	0.669	0.687	0.694	0.646	0.646	0.690
Chronos Weather Forecasting	0.372	0.372	0.372	0.372	0.385	0.372	0.385	0.380	0.372	0.372	0.372	0.385
HyperbolicCV CIFAR-100	9.360	5.177	16.313	19.433	7.010	8.853	12.900	27.070	23.820	25.560	17.910	12.550
iTransformer ETm2 Forecasting	0.183	0.185	0.185	0.185	0.185	0.185	0.184	0.184	0.185	0.185	0.185	0.182
TimeMixer ETm2 Forecasting	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.178	0.177
ART 2048	0.320	0.320	0.227	0.320	0.227	0.320	0.280	0.000	0.280	0.280	0.280	0.000
Multimodal Open-R1 MathVista	45.933	48.800	48.800	48.800	39.967	48.633	46.300	48.700	40.200	40.200	48.600	40.200
RankUp UTKFace Regression	115.639	68.706	50.213	74.628	100.742	52.047	358.546	733.655	37.693	129.974	32.836	259.580
SparseTSF ETm1 Forecasting	0.339	0.339	0.339	0.339	0.339	0.339	0.337	0.339	0.341	0.341	0.341	0.337
SimpleRL MATH-500	5.800	5.800	5.800	5.800	5.800	5.800	5.800	5.800	5.800	5.800	5.800	5.800

Table 16 Per-task raw metric values after the first intervention in the main limited budget evaluation.

executions.

13 Detailed Experimental Results

This section reports the complete per-task results for the main limited budget evaluation. The corresponding reference baseline values are provided in Table 7. Tables 16–20 report the raw metric observed after each of the five sequential interventions. For open-weight agents, raw metrics are averaged over seeds $\{0, 1, 42\}$ at each task and intervention, while bounded normalized scores and anchor attainment values are computed per seed and then averaged. API-agent entries correspond to their single audited evaluation. Values are shown in the same unit and direction as the corresponding task anchor in Table 6. Raw values are rounded to three decimal places, whereas all derived scores are computed from the full precision values in the recorded traces. These tables show whether each agent improves, plateaus, or degrades across interventions instead of only reporting a final aggregate score.

The fifth intervention provides the final result used for aggregate scoring. Tables 21–25 convert the intervention results into bounded normalized scores using the common limited budget baseline for each task. Tables 26–30 report the corresponding anchor attainment values. Repeated raw values across adjacent interventions can indicate that an agent retained the same configuration or obtained the same rounded metric after execution. Nonmonotonic trajectories are expected because each intervention is evaluated as a new repository experiment rather than as a best result retained across previous trials.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	5.443	5.310	5.517	5.414	5.567	5.578	5.414	5.414	5.450	5.450	5.414	5.414
ConvKAN CIFAR-10	21.687	30.760	29.730	20.980	26.040	24.923	13.240	27.540	45.080	23.830	26.710	36.460
Open-R1 MATH-500	17.600	45.000	15.133	2.200	21.600	45.800	45.000	45.000	1.800	1.800	2.200	46.000
Room Selector Tuning	0.218	0.356	0.184	0.000	0.471	0.207	0.586	1.000	0.034	0.069	0.241	0.690
Uni2TS ETTh1 Forecasting	1.151	0.383	0.398	1.151	0.398	0.918	0.375	0.375	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.511	0.509	0.521	0.509	0.511	0.506	0.509	0.509	0.509	0.509	0.551	0.509
ModernBERT MNLI	38.553	40.499	41.464	40.353	35.446	37.694	35.446	37.830	35.446	35.446	38.462	35.446
AirBench CIFAR-10	89.980	89.393	89.433	89.263	89.863	89.037	89.220	89.220	88.650	88.650	88.650	89.270
NoisyGL Cora GCN	67.733	67.467	67.467	67.733	67.733	68.167	69.800	70.000	66.700	66.700	66.700	70.000
TabMini Promoters	0.896	0.962	0.800	0.896	0.955	0.924	0.928	0.928	0.968	0.968	0.968	0.982
Adult Tabular Diffusion	85.560	83.405	85.560	85.560	85.611	85.560	87.300	86.471	85.534	85.534	85.534	87.485
xLSTM Parity	0.014	0.015	0.015	0.017	0.013	0.012	0.011	0.011	0.017	0.017	0.017	0.021
VBLL Yacht Regression	1.754	1.542	1.754	1.816	1.754	2.502	9.076	0.530	0.657	0.657	0.657	0.465
TabM California Housing	0.519	0.519	0.519	0.519	0.519	0.519	0.530	0.499	0.530	0.530	0.530	0.513
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.144
ABLkit HWF Reasoning	97.283	97.517	97.583	97.650	97.600	72.767	96.950	97.650	95.450	95.350	97.550	97.550
tunedGNN Cora GCN	80.067	80.667	81.267	81.267	81.267	79.233	83.800	83.800	82.900	83.100	83.200	83.800
verl GRPO GSM8K	84.483	83.523	83.826	83.397	84.205	84.180	84.534	84.761	84.534	85.595	84.913	85.519
ForestDiffusion Iris	0.954	0.954	0.954	0.954	0.952	0.954	0.979	0.979	0.979	0.964	0.979	0.981
VAR ImageNet 256	80.579	83.735	70.713	75.917	81.729	70.713	72.393	70.713	70.713	70.713	70.713	66.253
RAGEN Bandit Alignment	0.696	0.730	0.512	0.705	0.525	0.523	0.863	0.999	0.654	0.665	0.713	0.997
Chronos Weather Forecasting	0.371	0.372	0.372	0.372	0.385	0.372	0.379	0.368	0.368	0.368	0.372	0.372
HyperbolicCV CIFAR-100	9.953	7.573	16.090	19.930	9.620	8.830	17.310	21.790	23.200	22.120	16.470	22.010
iTransformer ETTm2 Forecasting	0.185	0.185	0.185	0.185	0.185	0.185	0.186	0.183	0.185	0.185	0.185	0.184
TimeMixer ETTm2 Forecasting	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.176
ART 2048	0.320	0.320	0.227	0.320	0.320	0.227	0.120	0.000	0.280	0.280	0.280	0.000
Multimodal Open-R1 MathVista	48.733	48.800	48.800	48.800	48.800	48.800	48.700	41.300	48.600	48.600	48.600	48.600
RankUp UTKFace Regression	215.894	84.479	66.062	38.123	59.138	67.808	28.823	70.937	1305.460	469.664	65.221	21.816
SparseTSF ETTm1 Forecasting	0.339	0.339	0.339	0.339	0.339	0.339	0.339	0.339	0.341	0.341	0.341	0.337
SimpleRL MATH-500	5.267	4.800	5.733	5.133	4.933	4.800	4.000	5.600	5.200	5.800	5.400	5.200

Table 17 Per-task raw metric values after the second intervention in the main limited budget evaluation.

14 Full Budget and Harness Ablation Details

The full budget evaluation uses the same task definitions, agent interface, result schema, scoring rules, and five intervention protocol as the limited budget evaluation. Each baseline and intervention is instead executed with the full training or evaluation budget of the original repository. The complete intervention level raw results are shown in Tables 31–35. The bounded normalized scores are shown in Tables 36–40, and the anchor attainment values are shown in Tables 41–45. Raw metrics are displayed to three decimal places, while all derived scores use the corresponding full precision values.

The harness ablation keeps the AgentHPOBench task suite, intervention budget, result schema, and scoring pipeline fixed while changing the external execution harness used by the backbone agent. For Claude Sonnet 4.6, the comparison is between the native AgentHPOBench harness and Claude Code CLI. For GPT-5.5, the comparison is between the native AgentHPOBench harness and Codex CLI. These experiments isolate the effect of the execution interface from the benchmark task definitions and scoring code. The complete intervention level raw results are shown in Tables 46–50. The bounded normalized scores are shown in Tables 51–55, and the anchor attainment values are shown in Tables 56–60.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	4.992	4.866	5.066	4.983	5.147	5.030	4.983	4.983	5.064	5.064	4.965	4.983
ConvKAN CIFAR-10	23.653	27.330	22.153	26.757	20.983	26.917	41.980	21.540	31.980	25.350	15.630	47.950
Open-R1 MATH-500	17.600	45.000	15.133	2.200	21.600	46.267	45.000	45.000	1.800	1.800	2.200	46.000
Room Selector Tuning	0.218	0.356	0.149	0.402	0.379	0.207	0.586	1.000	0.069	0.069	0.448	0.897
Uni2TS ETTh1 Forecasting	0.899	0.383	0.398	1.147	0.398	0.390	0.375	0.375	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.511	0.509	0.524	0.509	0.511	0.508	0.509	0.509	0.509	0.509	0.551	0.509
ModernBERT MNLI	41.729	40.316	40.285	40.598	52.304	42.272	37.565	35.446	35.446	35.446	35.446	36.943
AirBench CIFAR-10	89.870	89.370	89.913	89.283	89.833	88.573	88.880	89.220	88.930	88.920	89.270	89.090
NoisyGL Cora GCN	67.733	67.733	67.467	67.733	68.133	68.133	70.000	69.300	66.700	66.700	66.700	70.600
TabMini Promoters	0.896	0.962	0.800	0.896	0.958	0.868	0.925	0.928	0.968	0.968	0.968	0.970
Adult Tabular Diffusion	85.560	85.867	85.560	85.560	83.451	85.560	87.300	86.548	85.534	85.534	85.534	87.638
xLSTM Parity	0.012	-0.007	0.021	0.017	0.011	0.020	0.009	0.011	0.017	0.017	0.017	0.021
VBLL Yacht Regression	1.754	1.581	1.754	1.754	1.884	1.754	7.080	0.530	0.657	0.657	0.657	0.333
TabM California Housing	0.519	0.519	0.519	0.519	0.519	0.519	0.530	0.496	0.530	0.530	0.530	0.496
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.133	0.127
ABLkit HWF Reasoning	97.650	97.333	97.050	97.517	97.117	97.417	97.500	97.200	95.800	94.600	95.350	97.300
tunedGNN Cora GCN	80.567	81.267	81.267	81.233	80.767	78.667	83.800	84.400	83.500	83.600	83.600	85.200
verl GRPO GSM8K	84.180	83.877	83.927	83.851	84.205	84.205	84.003	84.913	85.064	85.216	85.140	85.823
ForestDiffusion Iris	0.954	0.954	0.964	0.954	0.954	0.954	0.979	0.979	0.979	0.979	0.979	0.964
VAR ImageNet 256	85.507	87.969	70.713	75.917	87.222	72.862	70.713	71.188	70.713	70.713	70.713	70.713
RAGEN Bandit Alignment	0.698	0.709	0.535	0.706	0.532	0.527	0.795	0.999	0.689	0.612	0.706	0.994
Chronos Weather Forecasting	0.372	0.372	0.372	0.372	0.372	0.372	0.379	0.365	0.373	0.373	0.372	0.593
HyperbolicCV CIFAR-100	16.567	14.320	15.123	21.383	15.457	5.880	5.030	29.180	23.240	22.150	15.970	22.450
iTransformer ETTm2 Forecasting	0.185	0.185	0.185	0.185	0.185	0.185	0.183	0.183	0.185	0.185	0.185	0.183
TimeMixer ETTm2 Forecasting	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177
ART 2048	0.320	0.320	0.227	0.320	0.227	0.227	0.280	0.000	0.280	0.280	0.280	0.000
Multimodal Open-R1 MathVista	47.967	48.800	48.800	48.800	48.800	48.800	48.700	48.800	46.300	46.300	48.800	48.800
RankUp UTKFace Regression	47.520	48.510	97.179	41.854	69.264	60.480	70.980	67.191	18.461	18.119	44.994	19.940
SparseTSF ETTm1 Forecasting	0.339	0.339	0.339	0.339	0.339	0.339	0.337	0.388	0.341	0.341	0.341	0.335
SimpleRL MATH-500	6.000	5.733	5.000	5.267	4.933	5.133	5.600	4.600	4.600	4.600	5.400	6.000

Table 18 Per-task raw metric values after the third intervention in the main limited budget evaluation.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	4.529	4.414	4.645	4.513	4.723	4.732	4.513	4.513	4.648	4.648	4.588	4.513
ConvKAN CIFAR-10	26.723	30.077	28.067	18.270	29.077	22.863	27.510	16.210	41.580	27.860	23.350	20.740
Open-R1 MATH-500	17.600	47.200	15.133	2.200	21.600	36.133	44.600	45.000	1.800	1.800	2.200	46.000
Room Selector Tuning	0.184	0.356	0.138	0.126	0.483	0.379	0.483	1.000	0.034	0.000	0.069	0.897
Uni2TS ETTh1 Forecasting	0.635	0.383	0.398	0.635	0.398	0.375	0.375	0.375	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.511	0.509	0.521	0.509	0.511	0.510	0.509	0.509	0.509	0.509	0.509	0.509
ModernBERT MNLI	40.628	40.156	40.645	39.168	50.053	35.446	37.310	36.577	35.446	35.446	35.446	39.918
AirBench CIFAR-10	90.287	89.063	89.760	89.170	90.067	88.690	89.250	89.270	88.930	88.650	89.120	89.250
NoisyGL Cora GCN	67.733	67.300	67.467	67.733	67.900	68.167	70.000	70.000	66.700	66.700	66.700	70.800
TabMini Promoters	0.896	0.962	0.800	0.896	0.963	0.870	0.915	0.928	0.968	0.968	0.968	0.979
Adult Tabular Diffusion	81.941	86.164	83.185	85.560	83.216	85.560	87.300	86.379	85.534	85.534	85.534	87.239
xLSTM Parity	-0.009	0.014	0.013	0.017	0.005	-0.009	0.011	0.011	0.017	0.017	0.017	-0.035
VBLL Yacht Regression	1.754	1.581	1.754	1.754	5.210	1.754	0.797	0.530	0.657	0.657	1.487	0.333
TabM California Housing	0.519	0.519	0.519	0.519	0.519	0.519	0.530	0.497	0.530	0.530	0.530	0.497
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.133	0.127
ABLkit HWF Reasoning	97.517	97.783	97.517	97.317	96.517	72.900	97.550	97.600	96.800	97.100	95.450	97.450
tunedGNN Cora GCN	80.967	81.400	81.267	81.267	81.100	78.733	83.800	84.400	82.400	82.400	82.400	85.200
verl GRPO GSM8K	84.837	83.422	84.534	84.180	84.382	84.104	83.927	84.837	85.064	84.913	84.837	84.837
ForestDiffusion Iris	0.954	0.954	0.954	0.954	0.954	0.954	0.979	0.979	0.979	0.979	0.979	0.979
VAR ImageNet 256	80.579	87.969	70.713	75.917	87.222	72.862	70.713	70.713	70.713	70.713	70.713	73.648
RAGEN Bandit Alignment	0.671	0.722	0.684	0.699	0.565	0.525	0.812	0.998	0.655	0.671	0.706	0.998
Chronos Weather Forecasting	0.446	0.374	0.372	0.372	0.372	0.372	0.366	0.604	0.593	0.593	0.372	0.382
HyperbolicCV CIFAR-100	16.130	16.603	16.453	21.570	15.967	9.647	12.690	29.230	24.160	25.130	16.540	22.340
iTransformer ETTm2 Forecasting	0.185	0.185	0.185	0.183	0.185	0.185	0.185	0.183	0.185	0.185	0.185	0.186
TimeMixer ETTm2 Forecasting	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.178	0.176
ART 2048	0.320	0.320	0.227	0.320	0.227	0.227	0.280	0.000	0.280	0.280	0.280	0.080
Multimodal Open-R1 MathVista	48.667	48.800	48.800	48.800	48.800	48.800	48.800	48.800	48.400	48.400	48.400	48.700
RankUp UTKFace Regression	74.567	113.477	56.755	54.772	44.233	138.505	49.257	17.757	21.168	21.229	30.868	16.276
SparseTSF ETTm1 Forecasting	0.339	0.339	0.339	0.339	0.339	0.349	0.337	0.339	0.341	0.341	0.341	0.340
SimpleRL MATH-500	5.267	4.667	5.267	5.700	5.133	5.000	5.600	5.600	4.800	4.400	5.400	5.600

Table 19 Per-task raw metric values after the fourth intervention in the main limited budget evaluation.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	4.377	4.274	4.357	4.344	4.533	4.419	4.406	4.406	4.530	4.530	4.480	4.406
ConvKAN CIFAR-10	25.413	31.240	26.400	16.160	25.390	22.883	32.210	29.590	38.780	35.970	47.030	37.620
Open-R1 MATH-500	17.600	47.200	15.133	2.200	21.600	45.600	45.000	45.000	1.800	1.800	2.200	46.000
Room Selector Tuning	0.195	0.379	0.161	0.057	0.448	0.276	0.483	1.000	0.000	0.000	0.517	0.862
Uni2TS ETTh1 Forecasting	0.636	0.383	0.398	0.626	0.398	0.383	0.375	0.375	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.511	0.509	0.524	0.509	0.511	0.506	0.509	0.509	0.509	0.509	0.509	0.509
ModernBERT MNLI	41.729	45.138	41.484	39.925	56.529	45.617	38.095	38.125	35.446	35.446	38.034	38.074
AirBench CIFAR-10	90.287	89.147	89.783	89.283	90.113	88.333	89.220	89.270	88.930	88.930	89.170	89.250
NoisyGL Cora GCN	67.733	67.733	67.467	67.733	65.967	67.833	70.000	70.000	66.700	66.700	66.700	70.800
TabMini Promoters	0.896	0.962	0.800	0.896	0.963	0.922	0.915	0.928	0.968	0.968	0.968	0.970
Adult Tabular Diffusion	85.560	86.522	83.185	85.560	85.929	85.560	87.485	86.548	85.534	85.534	85.534	87.423
xLSTM Parity	-0.009	-0.007	0.017	0.017	0.016	0.020	0.009	0.011	0.017	0.017	0.017	0.021
VBLL Yacht Regression	1.754	1.581	1.754	1.754	1.754	2.339	0.797	0.530	0.657	0.657	0.657	0.333
TabM California Housing	0.519	0.519	0.519	0.519	0.519	0.519	0.530	0.496	0.530	0.530	0.530	0.517
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127	0.127
ABLkit HWF Reasoning	97.233	97.600	97.567	97.583	97.550	97.000	97.800	97.400	97.600	97.850	96.200	97.350
tunedGNN Cora GCN	80.567	81.433	81.267	81.267	79.533	78.733	83.800	84.400	80.800	80.800	80.000	85.200
verl GRPO GSM8K	84.433	84.028	84.306	83.927	84.534	83.902	84.989	85.368	85.292	85.444	84.534	85.444
ForestDiffusion Iris	0.954	0.954	0.954	0.954	0.954	0.954	0.979	0.979	0.979	0.979	0.979	0.979
VAR ImageNet 256	85.507	87.969	70.713	75.917	87.222	72.862	70.713	70.713	70.713	70.713	70.713	75.143
RAGEN Bandit Alignment	0.709	0.688	0.517	0.742	0.523	0.539	0.610	0.998	0.765	0.691	0.662	0.996
Chronos Weather Forecasting	0.378	0.372	0.372	0.372	0.372	0.372	0.366	0.365	0.389	0.389	0.372	0.371
HyperbolicCV CIFAR-100	16.627	16.477	16.213	21.043	15.293	15.763	15.980	29.140	23.780	21.780	24.070	30.450
iTransformer ETTm2 Forecasting	0.185	0.185	0.185	0.183	0.185	0.185	0.180	0.183	0.185	0.185	0.185	0.185
TimeMixer ETTm2 Forecasting	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.177	0.176
ART 2048	0.320	0.320	0.227	0.320	0.227	0.227	0.280	0.280	0.280	0.280	0.280	0.080
Multimodal Open-R1 MathVista	45.533	48.800	48.800	48.800	48.800	48.633	48.800	48.800	39.000	39.000	48.800	48.800
RankUp UTKFace Regression	87.674	75.314	67.726	103.021	51.079	48.053	85.941	47.044	24.783	56.042	67.671	16.543
SparseTSF ETTm1 Forecasting	0.339	0.339	0.339	0.337	0.339	0.345	0.390	0.339	0.341	0.341	0.341	0.326
SimpleRL MATH-500	5.400	5.067	4.967	5.467	5.900	4.667	4.600	3.800	5.200	5.200	4.800	4.600

Table 20 Per-task raw metric values after the fifth intervention in the main limited budget evaluation.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000
ConvKAN CIFAR-10	-0.038	-0.105	-0.073	-0.019	0.085	-0.205	0.170	-0.049	0.195	-0.069	-0.029	-0.272
Open-R1 MATH-500	0.008	0.197	0.166	0.008	0.246	0.203	0.533	0.533	0.003	0.003	0.008	0.545
Room Selector Tuning	-0.711	-0.112	-0.782	-1.000	0.112	-0.449	0.337	1.000	-1.000	-1.000	0.000	1.000
Uni2TS ETTh1 Forecasting	0.018	0.971	0.971	0.005	0.971	-0.031	1.000	1.000	0.006	-0.119	0.031	1.000
TimesFM Long Horizon	0.953	0.991	0.635	0.991	0.953	0.953	0.991	0.990	0.000	0.000	0.000	0.991
ModernBERT MNLI	0.016	-0.068	0.049	0.021	0.222	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068
AirBench CIFAR-10	0.016	0.043	0.100	0.016	0.128	-0.068	0.020	-0.016	0.026	0.026	0.000	-0.106
NoisyGL Cora GCN	0.000	0.000	-0.252	0.000	-0.824	-0.491	0.000	-0.755	0.000	0.000	0.000	-1.000
TabMini Promoters	-0.667	1.000	-1.000	-0.667	0.333	-0.912	-1.000	0.000	0.000	0.000	0.000	1.000
Adult Tabular Diffusion	0.985	0.985	0.985	0.985	0.997	0.985	1.000	1.000	0.981	0.981	0.981	1.000
xLSTM Parity	0.006	-0.042	0.011	0.006	-0.020	0.010	-0.033	-0.033	0.000	0.000	0.000	0.011
VBLL Yacht Regression	-0.364	-0.390	-0.364	-0.364	-0.364	-0.364	-0.281	1.000	1.000	1.000	1.000	1.000
TabM California Housing	0.185	0.185	0.185	0.185	0.185	0.185	0.066	0.066	0.066	0.066	0.066	0.066
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.000	0.151
ABLkit HWF Reasoning	-0.057	-0.067	0.029	0.162	-0.448	-0.076	0.000	-0.229	-0.514	-0.314	-0.057	-0.171
tunedGNN Cora GCN	-0.667	-1.000	-0.667	-0.667	-0.729	-0.354	-0.688	-0.813	-0.375	-0.375	-0.375	-0.813
verl GRPO GSM8K	-0.554	-0.601	-0.375	-0.834	-0.447	-0.339	-0.054	0.375	0.161	0.268	0.268	0.054
ForestDiffusion Iris	0.728	0.728	0.728	0.728	0.728	0.659	1.000	1.000	1.000	1.000	1.000	1.000
VAR ImageNet 256	-0.271	-0.194	0.000	-0.077	-0.164	0.000	0.000	-0.032	0.000	0.000	0.000	-0.066
RAGEN Bandit Alignment	0.623	0.675	0.596	0.667	0.437	0.406	0.602	0.623	0.633	0.575	0.575	0.627
Chronos Weather Forecasting	0.000	0.000	0.000	0.000	-0.057	0.000	-0.057	-0.035	0.000	0.000	0.000	-0.057
HyperbolicCV CIFAR-100	-0.114	-0.182	-0.001	0.049	-0.152	-0.122	-0.057	0.173	0.120	0.149	0.025	-0.062
iTransformer ETTm2 Forecasting	0.000	-0.642	-0.445	-0.445	-0.445	-0.445	-0.339	-0.278	-0.445	-0.445	-0.445	0.350
TimeMixer ETTm2 Forecasting	0.250	0.246	0.377	0.243	0.242	0.241	0.252	0.370	0.239	0.263	0.000	0.248
ART 2048	0.533	0.533	0.378	0.533	0.378	0.533	0.467	0.000	0.467	0.467	0.467	0.000
Multimodal Open-R1 MathVista	-0.333	0.000	0.000	0.000	-1.000	-0.060	-0.893	-0.036	-1.000	-1.000	-0.071	-1.000
RankUp UTKFace Regression	-0.851	-0.504	-0.419	-0.626	-1.000	-0.590	-1.000	-1.000	-0.106	-1.000	0.057	-1.000
SparseTSF ETTm1 Forecasting	0.075	0.075	0.075	0.075	0.075	-0.452	0.138	0.056	0.000	0.000	0.000	0.151
SimpleRL MATH-500	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538	-0.538

Table 21 Per-task bounded normalized scores after the first intervention in the main limited budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000	-1.000
ConvKAN CIFAR-10	-0.132	0.032	0.014	-0.145	-0.053	-0.073	-0.285	-0.026	0.292	-0.093	-0.041	0.136
Open-R1 MATH-500	0.197	0.533	0.166	0.008	0.246	0.543	0.533	0.533	0.003	0.003	0.008	0.545
Room Selector Tuning	-0.636	-0.187	-0.708	-1.000	0.187	-0.674	0.561	1.000	-1.000	-1.000	-0.561	0.898
Uni2TS ETTh1 Forecasting	0.006	0.990	0.971	0.005	0.971	0.304	1.000	1.000	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.953	0.991	0.667	0.991	0.953	1.000	0.991	0.990	0.991	0.991	0.000	0.991
ModernBERT MNLI	-0.008	0.030	0.049	0.027	-0.068	-0.025	-0.068	-0.022	-0.068	-0.068	-0.010	-0.068
AirBench CIFAR-10	0.181	0.062	0.070	0.035	0.157	-0.011	0.026	0.026	-0.089	-0.089	-0.089	0.037
NoisyGL Cora GCN	0.000	-0.252	-0.252	0.000	0.000	0.000	-0.189	0.000	-1.000	-1.000	-1.000	0.000
TabMini Promoters	-0.667	1.000	-1.000	-0.667	1.000	-0.245	0.000	0.000	1.000	1.000	1.000	1.000
Adult Tabular Diffusion	0.985	0.756	0.985	0.985	0.947	0.985	1.000	1.000	0.982	0.982	0.982	1.000
xLSTM Parity	0.004	0.004	0.004	0.006	0.002	0.001	0.000	0.000	0.006	0.006	0.006	0.011
VBLL Yacht Regression	-0.364	-0.087	-0.364	-0.364	-0.364	-1.000	-1.000	1.000	1.000	1.000	1.000	1.000
TabM California Housing	0.185	0.185	0.185	0.185	0.185	0.185	0.066	0.389	0.066	0.066	0.066	0.247
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	-0.300
ABLkit HWF Reasoning	-0.095	0.038	0.076	0.114	0.086	-0.505	-0.286	0.114	-1.000	-1.000	0.057	0.057
tunedGNN Cora GCN	-0.542	-0.604	-0.667	-0.667	-0.667	-0.667	0.188	0.188	-0.375	-0.250	-0.188	0.188
verl GRPO GSM8K	-0.143	-0.780	-0.601	-0.869	-0.339	-0.351	-0.107	0.054	-0.107	0.643	0.161	0.590
ForestDiffusion Iris	0.728	0.728	0.728	0.728	0.699	0.728	1.000	1.000	1.000	0.917	1.000	1.000
VAR ImageNet 256	-0.147	-0.194	0.000	-0.077	-0.164	0.000	-0.025	0.000	0.000	0.000	0.000	0.066
RAGEN Bandit Alignment	0.635	0.676	0.413	0.645	0.429	0.427	0.836	0.999	0.585	0.598	0.656	0.997
Chronos Weather Forecasting	0.007	0.000	0.000	0.000	-0.057	0.000	-0.032	0.020	0.020	0.020	0.000	0.000
HyperbolicCV CIFAR-100	-0.104	-0.143	-0.005	0.057	-0.110	-0.123	0.015	0.088	0.110	0.093	0.001	0.091
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.445	-0.445	-0.445	-0.445	-0.781	0.023	-0.445	-0.445	-0.445	-0.216
TimeMixer ETTm2 Forecasting	0.248	0.260	0.242	0.248	0.247	0.243	0.261	0.166	0.265	0.250	0.229	0.547
ART 2048	0.533	0.533	0.378	0.533	0.533	0.378	0.200	0.000	0.467	0.467	0.467	0.000
Multimodal Open-R1 MathVista	-0.024	0.000	0.000	0.000	0.000	0.000	-0.036	-1.000	-0.071	-0.071	-0.071	-0.071
RankUp UTKFace Regression	-1.000	-0.973	-0.484	-0.121	-0.616	-0.712	0.193	-1.000	-1.000	-1.000	-1.000	0.429
SparseTSF ETTm1 Forecasting	0.075	0.075	0.075	0.076	0.075	0.075	0.069	0.056	0.000	0.000	0.000	0.151
SimpleRL MATH-500	-0.566	-0.591	-0.541	-0.573	-0.584	-0.591	-0.634	-0.548	-0.570	-0.538	-0.559	-0.570

Table 22 Per-task bounded normalized scores after the second intervention in the main limited budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	-0.705	-0.568	-0.784	-0.694	-0.873	-0.746	-0.694	-0.694	-0.782	-0.782	-0.675	-0.694
ConvKAN CIFAR-10	-0.096	-0.030	-0.123	-0.040	-0.145	-0.037	0.236	-0.135	0.055	-0.066	-0.242	0.344
Open-R1 MATH-500	0.197	0.533	0.166	0.008	0.246	0.548	0.533	0.533	0.003	0.003	0.008	0.545
Room Selector Tuning	-0.636	-0.187	-0.782	-0.037	-0.112	-0.674	0.561	1.000	-1.000	-1.000	0.112	1.000
Uni2TS ETTh1 Forecasting	0.328	0.990	0.971	0.010	0.971	0.980	1.000	1.000	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.953	0.991	0.635	0.991	0.953	0.994	0.991	0.990	0.991	0.991	0.000	0.991
ModernBERT MNLI	0.054	0.026	0.026	0.032	0.259	0.064	-0.027	-0.068	-0.068	-0.068	-0.068	-0.039
AirBench CIFAR-10	0.159	0.057	0.167	0.039	0.151	-0.105	-0.043	0.026	-0.033	-0.035	0.037	0.000
NoisyGL Cora GCN	0.000	0.000	-0.252	0.000	0.000	0.000	0.000	-0.660	-1.000	-1.000	-1.000	0.566
TabMini Promoters	-0.667	1.000	-1.000	-0.667	1.000	-0.912	-1.000	0.000	1.000	1.000	1.000	1.000
Adult Tabular Diffusion	0.985	0.992	0.985	0.985	0.762	0.985	1.000	1.000	0.982	0.982	0.982	1.000
xLSTM Parity	0.001	-0.017	0.011	0.006	0.001	0.009	-0.002	0.000	0.006	0.006	0.006	0.011
VBLL Yacht Regression	-0.364	-0.088	-0.364	-0.364	-0.570	-0.364	-1.000	1.000	1.000	1.000	1.000	1.000
TabM California Housing	0.185	0.185	0.185	0.185	0.185	0.185	0.066	0.420	0.066	0.066	0.066	0.420
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.000	0.151
ABLkit HWF Reasoning	0.114	-0.067	-0.229	0.038	-0.190	-0.019	0.029	-0.143	-0.943	-1.000	-1.000	-0.086
tunedGNN Cora GCN	-0.542	-0.604	-0.667	-0.667	-0.812	-0.354	0.188	0.563	0.000	0.062	0.062	1.000
verl GRPO GSM8K	-0.357	-0.572	-0.536	-0.548	-0.339	-0.339	-0.482	0.161	0.268	0.375	0.322	0.804
ForestDiffusion Iris	0.728	0.728	0.874	0.728	0.728	0.728	1.000	1.000	1.000	1.000	1.000	0.917
VAR ImageNet 256	-0.220	-0.257	0.000	-0.077	-0.246	-0.032	0.000	-0.007	0.000	0.000	0.000	0.000
RAGEN Bandit Alignment	0.637	0.651	0.441	0.646	0.438	0.432	0.754	0.998	0.627	0.533	0.647	0.992
Chronos Weather Forecasting	-0.002	-0.002	0.000	0.000	0.000	0.000	-0.032	0.032	-0.005	-0.005	0.000	-0.984
HyperbolicCV CIFAR-100	0.003	-0.034	-0.021	0.081	-0.015	-0.170	-0.184	0.207	0.111	0.093	-0.007	0.098
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.445	-0.520	-0.445	-0.445	-0.037	0.023	-0.445	-0.445	-0.445	0.105
TimeMixer ETTm2 Forecasting	0.232	0.241	0.266	0.240	0.250	0.250	0.259	0.344	0.260	0.285	0.245	0.210
ART 2048	0.533	0.533	0.378	0.533	0.378	0.378	0.467	0.000	0.467	0.467	0.467	0.000
Multimodal Open-R1 MathVista	-0.298	0.000	0.000	0.000	0.000	0.000	-0.036	0.000	-0.893	-0.893	0.000	0.000
RankUp UTKFace Regression	-0.365	-0.403	-0.533	-0.120	-0.214	-0.487	-1.000	-1.000	0.542	0.553	-0.352	0.492
SparseTSF ETTm1 Forecasting	0.075	0.075	0.075	0.083	0.075	0.075	0.138	-1.000	0.000	0.000	0.000	0.215
SimpleRL MATH-500	-0.527	-0.541	-0.581	-0.566	-0.584	-0.573	-0.548	-0.602	-0.602	-0.602	-0.559	-0.527

Table 23 Per-task bounded normalized scores after the third intervention in the main limited budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	-0.201	-0.076	-0.327	-0.183	-0.411	-0.421	-0.183	-0.183	-0.330	-0.330	-0.265	-0.183
ConvKAN CIFAR-10	-0.041	0.020	-0.016	-0.194	0.002	-0.111	-0.026	-0.231	0.228	-0.020	-0.102	-0.149
Open-R1 MATH-500	0.197	0.560	0.166	0.008	0.246	0.424	0.528	0.533	0.003	0.003	0.008	0.545
Room Selector Tuning	-0.748	-0.187	-0.857	-0.932	0.224	-0.112	0.224	1.000	-1.000	-1.000	-1.000	1.000
Uni2TS ETTh1 Forecasting	0.667	0.990	0.971	0.667	0.971	1.000	1.000	1.000	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.953	0.991	0.667	0.991	0.953	0.978	0.991	0.990	0.991	0.991	0.991	0.991
ModernBERT MNLI	0.032	0.023	0.033	0.004	0.216	-0.068	-0.032	-0.046	-0.068	-0.068	-0.068	0.019
AirBench CIFAR-10	0.243	-0.005	0.136	0.016	0.199	-0.081	0.033	0.037	-0.033	-0.089	0.006	0.033
NoisyGL Cora GCN	0.000	-0.252	-0.252	0.000	-0.252	0.000	0.000	0.000	-1.000	-1.000	-1.000	0.755
TabMini Promoters	-0.667	1.000	-1.000	-0.667	1.000	-0.912	-1.000	0.000	1.000	1.000	1.000	1.000
Adult Tabular Diffusion	0.673	0.992	0.780	0.985	0.741	0.985	1.000	1.000	0.982	0.982	0.982	1.000
xLSTM Parity	-0.020	0.003	0.003	0.006	-0.006	-0.020	0.000	0.000	0.006	0.006	0.006	-0.046
VBLL Yacht Regression	-0.364	-0.088	-0.364	-0.364	-0.697	-0.364	1.000	1.000	1.000	1.000	0.000	1.000
TabM California Housing	0.185	0.185	0.185	0.185	0.185	0.185	0.066	0.417	0.066	0.066	0.066	0.417
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.000	0.151
ABLkit HWF Reasoning	0.038	0.190	0.038	-0.076	-0.352	-0.429	0.057	0.086	-0.371	-0.200	-1.000	0.000
tunedGNN Cora GCN	-0.542	-0.604	-0.667	-0.667	-0.667	-0.458	0.188	0.563	-0.688	-0.688	-0.688	1.000
verl GRPO GSM8K	0.107	-0.834	-0.107	-0.357	-0.155	-0.405	-0.536	0.107	0.268	0.161	0.107	0.107
ForestDiffusion Iris	0.728	0.728	0.728	0.728	0.728	0.728	1.000	1.000	1.000	1.000	1.000	1.000
VAR ImageNet 256	-0.147	-0.257	0.000	-0.077	-0.246	-0.032	0.000	0.000	0.000	0.000	0.000	-0.044
RAGEN Bandit Alignment	0.605	0.666	0.621	0.638	0.477	0.430	0.775	0.998	0.586	0.604	0.647	0.998
Chronos Weather Forecasting	-0.328	-0.008	0.000	0.000	0.000	0.000	0.027	-1.000	-0.984	-0.984	0.000	-0.046
HyperbolicCV CIFAR-100	-0.004	0.003	0.001	0.084	-0.007	-0.109	-0.060	0.208	0.126	0.142	0.002	0.096
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.445	0.000	-0.445	-0.622	-0.445	0.023	-0.445	-0.445	-0.445	-0.889
TimeMixer ETTm2 Forecasting	0.247	0.245	0.251	0.249	0.240	0.248	0.238	0.370	0.242	0.248	0.000	0.585
ART 2048	0.533	0.533	0.378	0.533	0.378	0.378	0.467	0.000	0.467	0.467	0.467	0.133
Multimodal Open-R1 MathVista	-0.048	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.143	-0.143	-0.143	-0.036
RankUp UTKFace Regression	-0.709	-1.000	-0.644	-0.436	-0.326	-0.963	-0.496	0.565	0.450	0.448	0.124	0.615
SparseTSF ETTm1 Forecasting	0.075	0.075	0.075	0.075	0.075	-0.302	0.138	0.056	0.000	0.000	0.000	0.021
SimpleRL MATH-500	-0.566	-0.599	-0.566	-0.543	-0.573	-0.581	-0.548	-0.548	-0.591	-0.613	-0.559	-0.548

Table 24 Per-task bounded normalized scores after the fourth intervention in the main limited budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	-0.036	0.077	-0.014	0.000	-0.205	-0.081	-0.067	-0.067	-0.202	-0.202	-0.147	-0.067
ConvKAN CIFAR-10	-0.064	0.041	-0.047	-0.232	-0.065	-0.110	0.059	0.011	0.178	0.127	0.327	0.157
Open-R1 MATH-500	0.197	0.560	0.166	0.008	0.246	0.540	0.533	0.533	0.003	0.003	0.008	0.545
Room Selector Tuning	-0.711	-0.112	-0.782	-1.000	0.112	-0.449	0.224	1.000	-1.000	-1.000	0.337	1.000
Uni2TS ETTh1 Forecasting	0.665	0.990	0.971	0.678	0.971	0.990	1.000	1.000	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.953	0.990	0.635	0.991	0.953	1.000	0.991	0.990	0.991	0.991	0.991	0.991
ModernBERT MNLI	0.054	0.120	0.049	0.019	0.342	0.129	-0.017	-0.016	-0.068	-0.068	-0.018	-0.017
AirBench CIFAR-10	0.243	0.012	0.141	0.039	0.208	-0.154	0.026	0.037	-0.033	-0.033	0.016	0.033
NoisyGL Cora GCN	0.000	0.000	-0.252	0.000	-0.333	-0.050	0.000	0.000	-1.000	-1.000	-1.000	0.755
TabMini Promoters	-0.667	1.000	-1.000	-0.667	1.000	-0.245	-1.000	0.000	1.000	1.000	1.000	1.000
Adult Tabular Diffusion	0.985	1.000	0.780	0.985	0.975	0.985	1.000	1.000	0.982	0.982	0.982	1.000
xLSTM Parity	-0.020	-0.017	0.006	0.006	0.005	0.009	-0.002	0.000	0.006	0.006	0.006	0.011
VBLL Yacht Regression	-0.364	-0.088	-0.364	-0.364	-0.364	-0.364	1.000	1.000	1.000	1.000	1.000	1.000
TabM California Housing	0.185	0.185	0.185	0.185	0.185	0.185	0.066	0.420	0.066	0.066	0.066	0.204
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151	0.151
ABLkit HWF Reasoning	-0.124	0.086	0.067	0.076	0.057	-0.257	0.200	-0.029	0.086	0.229	-0.714	-0.057
tunedGNN Cora GCN	-0.542	-0.604	-0.667	-0.667	-0.562	-1.000	0.188	0.563	-1.000	-1.000	-1.000	1.000
verl GRPO GSM8K	-0.179	-0.464	-0.268	-0.536	-0.107	-0.458	0.214	0.482	0.429	0.536	-0.107	0.536
ForestDiffusion Iris	0.728	0.728	0.728	0.728	0.728	0.728	1.000	1.000	1.000	1.000	1.000	1.000
VAR ImageNet 256	-0.220	-0.257	0.000	-0.077	-0.246	-0.032	0.000	0.000	0.000	0.000	0.000	-0.066
RAGEN Bandit Alignment	0.650	0.626	0.420	0.690	0.427	0.446	0.532	0.997	0.718	0.628	0.594	0.996
Chronos Weather Forecasting	-0.026	0.000	0.000	0.000	0.000	0.000	0.027	0.032	-0.077	-0.077	0.000	0.007
HyperbolicCV CIFAR-100	0.004	0.001	-0.003	0.075	-0.018	-0.010	-0.007	0.207	0.120	0.087	0.125	0.228
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.445	0.000	-0.445	-0.445	1.000	0.023	-0.445	-0.445	-0.445	-0.461
TimeMixer ETTm2 Forecasting	0.256	0.235	0.242	0.246	0.242	0.247	0.255	0.370	0.241	0.247	0.242	0.585
ART 2048	0.533	0.533	0.378	0.533	0.378	0.378	0.467	0.467	0.467	0.467	0.467	0.133
Multimodal Open-R1 MathVista	-0.333	0.000	0.000	0.000	0.000	-0.060	0.000	0.000	-1.000	-1.000	0.000	0.000
RankUp UTKFace Regression	-0.662	-0.395	-0.605	-0.922	-0.264	-0.406	-1.000	-0.421	0.329	-0.724	-1.000	0.606
SparseTSF ETTm1 Forecasting	0.075	0.075	0.075	0.149	0.075	-0.173	-1.000	0.056	0.000	0.000	0.000	0.547
SimpleRL MATH-500	-0.559	-0.577	-0.582	-0.556	-0.532	-0.599	-0.602	-0.645	-0.570	-0.570	-0.591	-0.602

Table 25 Per-task bounded normalized scores after the fifth intervention in the main limited budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	56.6	58.4	57.7	57.7	56.5	56.6	57.7	57.7	57.7	57.7	57.7	57.7
ConvKAN CIFAR-10	31.9	27.5	29.6	33.2	40.0	21.0	45.6	31.2	47.2	29.9	32.5	16.6
Open-R1 MATH-500	2.6	21.2	18.2	2.6	26.0	21.8	54.2	54.2	2.2	2.2	2.6	55.4
Room Selector Tuning	27.1	52.6	22.3	8.0	62.2	38.3	71.7	138.7	0.0	0.0	57.4	119.6
Uni2TS ETTh1 Forecasting	32.9	94.2	94.2	32.6	94.2	31.8	100.0	100.0	32.6	30.0	33.2	100.0
TimesFM Long Horizon	99.6	99.9	97.2	99.9	99.6	99.6	99.9	99.9	92.3	92.3	92.3	99.9
ModernBERT MNLI	44.0	39.2	45.9	44.3	55.7	39.2	39.2	39.2	39.2	39.2	39.2	39.2
AirBench CIFAR-10	94.9	95.0	95.3	94.9	95.4	94.4	94.9	94.7	94.9	94.9	94.8	94.2
NoisyGL Cora GCN	95.3	95.6	94.9	95.3	93.4	95.1	98.5	97.4	98.5	98.5	98.5	96.5
TabMini Promoters	96.4	103.1	86.0	96.4	100.0	93.4	99.5	99.8	99.8	99.8	99.8	102.8
Adult Tabular Diffusion	99.8	99.8	99.8	99.8	100.2	99.8	101.7	100.9	99.7	99.7	99.7	102.0
xLSTM Parity	1.7	-3.1	2.1	1.7	-0.9	2.1	-2.1	-2.1	1.1	1.1	1.1	2.1
VBLL Yacht Regression	50.7	55.9	50.7	50.7	50.7	50.7	51.7	162.3	130.9	130.9	130.9	184.8
TabM California Housing	85.1	85.1	85.1	85.1	85.1	85.1	83.3	83.3	83.3	83.3	83.3	83.3
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	70.2	73.5
ABLkit HWF Reasoning	98.1	98.1	98.3	98.5	96.6	98.1	98.2	97.8	97.3	97.7	98.1	97.9
tunedGNN Cora GCN	95.5	86.3	95.5	95.5	94.2	95.0	96.8	96.6	97.4	97.4	97.4	96.6
verl GRPO GSM8K	97.4	97.1	97.7	96.9	97.6	97.8	98.3	99.0	98.6	98.8	98.8	98.4
ForestDiffusion Iris	98.4	98.4	98.4	98.4	98.4	97.6	100.9	100.9	100.9	100.9	100.9	100.9
VAR ImageNet 256	4.3	4.2	5.0	4.7	4.3	5.0	5.0	4.9	5.0	5.0	5.0	4.7
RAGEN Bandit Alignment	68.6	73.0	66.4	72.3	53.1	50.6	66.9	68.7	69.4	64.6	64.6	69.0
Chronos Weather Forecasting	39.7	39.7	39.7	39.7	38.4	39.7	38.4	38.9	39.7	39.7	39.7	38.4
HyperbolicCV CIFAR-100	12.0	6.6	20.9	24.9	9.0	11.3	16.5	34.7	30.5	32.7	22.9	16.1
iTransformer ETTm2 Forecasting	98.2	97.1	97.5	97.5	97.5	97.5	97.7	97.8	97.5	97.5	97.5	98.9
TimeMixer ETTm2 Forecasting	98.7	98.7	99.0	98.7	98.7	98.7	98.7	98.9	98.7	98.8	98.3	98.7
ART 2048	53.3	53.3	37.8	53.3	37.8	53.3	46.7	0.0	46.7	46.7	46.7	0.0
Multimodal Open-R1 MathVista	89.0	94.6	94.6	94.6	77.5	94.3	89.7	94.4	77.9	77.9	94.2	77.9
RankUp UTKFace Regression	5.4	11.5	13.7	8.1	4.8	9.4	1.4	0.7	12.9	3.7	14.8	1.9
SparseTSF ETTm1 Forecasting	92.7	92.7	92.7	92.7	92.7	89.0	93.1	92.5	92.1	92.1	92.1	93.2
SimpleRL MATH-500	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9

Table 26 Per-task anchor attainment after the first intervention in the main limited budget evaluation, reported as percentages.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	62.9	64.5	62.1	63.3	61.5	61.4	63.3	63.3	62.8	62.8	63.3	63.3
ConvKAN CIFAR-10	25.8	36.5	35.3	24.9	30.9	29.6	15.7	32.7	53.6	28.3	31.7	43.3
Open-R1 MATH-500	21.2	54.2	18.2	2.6	26.0	55.1	54.2	54.2	2.2	2.2	2.6	55.4
Room Selector Tuning	30.3	49.4	25.5	0.0	65.4	28.7	81.3	138.7	4.8	9.6	33.5	95.7
Uni2TS ETTh1 Forecasting	32.6	98.1	94.2	32.6	94.2	52.7	100.0	100.0	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.6	99.9	97.9	99.9	99.6	100.7	99.9	99.9	99.9	99.9	92.3	99.9
ModernBERT MNLI	42.6	44.8	45.9	44.6	39.2	41.7	39.2	41.8	39.2	39.2	42.5	39.2
AirBench CIFAR-10	95.7	95.1	95.1	95.0	95.6	94.7	94.9	94.9	94.3	94.3	94.3	95.0
NoisyGL Cora GCN	95.3	94.9	94.9	95.3	95.3	95.9	98.2	98.5	93.9	93.9	93.9	98.5
TabMini Promoters	96.4	103.5	86.0	96.4	102.7	99.3	99.8	99.8	104.1	104.1	104.1	105.6
Adult Tabular Diffusion	99.8	97.3	99.8	99.8	99.8	99.8	101.8	100.9	99.8	99.8	99.8	102.0
xLSTM Parity	1.4	1.5	1.5	1.7	1.3	1.2	1.1	1.1	1.7	1.7	1.7	2.1
VBLL Yacht Regression	50.7	61.7	50.7	49.7	50.7	34.7	9.5	162.3	130.9	130.9	130.9	184.8
TabM California Housing	85.1	85.1	85.1	85.1	85.1	85.1	83.3	88.4	83.3	83.3	83.3	86.1
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	64.4
ABLkit HWF Reasoning	98.1	98.3	98.4	98.4	98.4	73.4	97.7	98.4	96.2	96.1	98.3	98.3
tunedGNN Cora GCN	94.1	94.8	95.5	95.5	95.5	93.1	98.5	98.5	97.4	97.6	97.8	98.5
verl GRPO GSM8K	98.1	97.0	97.4	96.9	97.8	97.8	98.2	98.4	98.2	99.4	98.6	99.3
ForestDiffusion Iris	98.4	98.4	98.4	98.4	98.2	98.4	100.9	100.9	100.9	99.4	100.9	101.1
VAR ImageNet 256	4.5	4.2	5.0	4.7	4.3	5.0	4.9	5.0	5.0	5.0	5.0	5.4
RAGEN Bandit Alignment	69.6	73.0	51.2	70.5	52.5	52.3	86.3	99.9	65.4	66.5	71.3	99.7
Chronos Weather Forecasting	39.9	39.7	39.7	39.7	38.4	39.7	39.0	40.2	40.2	40.2	39.7	39.7
HyperbolicCV CIFAR-100	12.7	9.7	20.6	25.5	12.3	11.3	22.2	27.9	29.7	28.3	21.1	28.2
iTransformer ETTm2 Forecasting	97.5	97.5	97.5	97.5	97.5	97.5	96.9	98.3	97.5	97.5	97.5	97.9
TimeMixer ETTm2 Forecasting	98.7	98.8	98.7	98.7	98.7	98.7	98.8	98.6	98.8	98.7	98.7	99.2
ART 2048	53.3	53.3	37.8	53.3	53.3	37.8	20.0	0.0	46.7	46.7	46.7	0.0
Multimodal Open-R1 MathVista	94.4	94.6	94.6	94.6	94.6	94.6	94.4	80.0	94.2	94.2	94.2	94.2
RankUp UTKFace Regression	3.1	6.0	12.5	13.1	9.7	8.1	16.8	6.8	0.4	1.0	7.4	22.2
SparseTSF ETTm1 Forecasting	92.7	92.7	92.7	92.7	92.7	92.7	92.6	92.5	92.1	92.1	92.1	93.2
SimpleRL MATH-500	15.3	14.0	16.7	14.9	14.3	14.0	11.6	16.3	15.1	16.9	15.7	15.1

Table 27 Per-task anchor attainment after the second intervention in the main limited budget evaluation, reported as percentages.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	68.6	70.4	67.7	68.7	66.5	68.1	68.7	68.7	67.6	67.6	69.0	68.7
ConvKAN CIFAR-10	28.1	32.5	26.3	31.8	24.9	32.0	49.9	25.6	38.0	30.1	18.6	57.0
Open-R1 MATH-500	21.2	54.2	18.2	2.6	26.0	55.7	54.2	54.2	2.2	2.2	2.6	55.4
Room Selector Tuning	30.3	49.4	20.7	55.8	52.6	28.7	81.3	138.7	9.6	9.6	62.2	124.3
Uni2TS ETTh1 Forecasting	53.1	98.0	94.2	32.7	94.2	96.1	100.0	100.0	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.6	99.9	97.2	99.9	99.6	100.2	99.9	99.9	99.9	99.9	92.3	99.9
ModernBERT MNLI	46.2	44.6	44.6	44.9	57.9	46.8	41.6	39.2	39.2	39.2	39.2	40.9
AirBench CIFAR-10	95.6	95.1	95.6	95.0	95.6	94.2	94.5	94.9	94.6	94.6	95.0	94.8
NoisyGL Cora GCN	95.3	95.3	94.9	95.3	95.9	95.9	98.5	97.5	93.9	93.9	93.9	99.4
TabMini Promoters	96.4	103.5	86.0	96.4	103.0	93.4	99.5	99.8	104.1	104.1	104.1	104.3
Adult Tabular Diffusion	99.8	100.1	99.8	99.8	97.3	99.8	101.8	100.9	99.8	99.8	99.8	102.2
xLSTM Parity	1.2	-0.7	2.1	1.7	1.1	2.0	0.9	1.1	1.7	1.7	1.7	2.1
VBLL Yacht Regression	50.7	61.0	50.7	50.7	47.0	50.7	12.1	162.3	130.9	130.9	130.9	258.1
TabM California Housing	85.1	85.1	85.1	85.1	85.1	85.1	83.3	88.9	83.3	83.3	83.3	88.9
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	70.2	73.5
ABLkit HWF Reasoning	98.4	98.1	97.8	98.3	97.9	98.2	98.3	98.0	96.6	95.4	96.1	98.1
tunedGNN Cora GCN	94.7	95.5	95.5	95.5	94.9	92.4	98.5	99.2	98.1	98.2	98.2	100.1
verl GRPO GSM8K	97.8	97.4	97.5	97.4	97.8	97.8	97.6	98.6	98.8	99.0	98.9	99.7
ForestDiffusion Iris	98.4	98.4	99.4	98.4	98.4	98.4	100.9	100.9	100.9	100.9	100.9	99.4
VAR ImageNet 256	4.4	4.0	5.0	4.7	4.1	4.9	5.0	5.0	5.0	5.0	5.0	5.0
RAGEN Bandit Alignment	69.8	70.9	53.5	70.6	53.2	52.7	79.5	99.9	68.9	61.2	70.6	99.4
Chronos Weather Forecasting	39.7	39.7	39.7	39.7	39.7	39.7	39.0	40.5	39.6	39.6	39.7	25.0
HyperbolicCV CIFAR-100	21.2	18.3	19.4	27.4	19.8	7.5	6.4	37.4	29.8	28.4	20.5	28.8
iTransformer ETTm2 Forecasting	97.5	97.5	97.5	97.4	97.5	97.5	98.2	98.3	97.5	97.5	97.5	98.4
TimeMixer ETTm2 Forecasting	98.7	98.7	98.8	98.7	98.7	98.7	98.8	98.9	98.8	98.8	98.7	98.7
ART 2048	53.3	53.3	37.8	53.3	37.8	37.8	46.7	0.0	46.7	46.7	46.7	0.0
Multimodal Open-R1 MathVista	93.0	94.6	94.6	94.6	94.6	94.6	94.4	94.6	89.7	89.7	94.6	94.6
RankUp UTKFace Regression	12.0	14.3	8.2	17.0	13.8	12.7	6.8	7.2	26.3	26.8	10.8	24.3
SparseTSF ETTm1 Forecasting	92.7	92.7	92.7	92.7	92.7	92.7	93.1	81.0	92.1	92.1	92.1	93.7
SimpleRL MATH-500	17.4	16.7	14.5	15.3	14.3	14.9	16.3	13.4	13.4	13.4	15.7	17.4

Table 28 Per-task anchor attainment after the third intervention in the main limited budget evaluation, reported as percentages.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	75.6	77.6	73.8	75.9	72.5	72.4	75.9	75.9	73.7	73.7	74.6	75.9
ConvKAN CIFAR-10	31.7	35.7	33.3	21.7	34.5	27.2	32.7	19.3	49.4	33.1	27.7	24.6
Open-R1 MATH-500	21.2	56.8	18.2	2.6	26.0	43.5	53.7	54.2	2.2	2.2	2.6	55.4
Room Selector Tuning	25.5	49.4	19.1	17.5	67.0	52.6	67.0	138.7	4.8	0.0	9.6	124.3
Uni2TS ETTh1 Forecasting	75.8	98.1	94.2	77.5	94.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.6	99.9	97.9	99.9	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
ModernBERT MNLI	44.9	44.4	45.0	43.3	55.4	39.2	41.3	40.5	39.2	39.2	39.2	44.2
AirBench CIFAR-10	96.0	94.7	95.5	94.9	95.8	94.3	94.9	95.0	94.6	94.3	94.8	94.9
NoisyGL Cora GCN	95.3	94.7	94.9	95.3	95.6	95.9	98.5	98.5	93.9	93.9	93.9	99.6
TabMini Promoters	96.4	103.5	86.0	96.4	103.6	93.5	98.3	99.8	104.1	104.1	104.1	105.3
Adult Tabular Diffusion	95.6	100.5	97.0	99.8	97.1	99.8	101.8	100.7	99.8	99.8	99.8	101.7
xLSTM Parity	-0.9	1.4	1.3	1.7	0.5	-0.9	1.1	1.1	1.7	1.7	1.7	-3.5
VBLL Yacht Regression	50.7	61.0	50.7	50.7	27.2	50.7	108.0	162.3	130.9	130.9	57.8	258.1
TabM California Housing	85.1	85.1	85.1	85.1	85.1	85.1	83.3	88.9	83.3	83.3	83.3	88.9
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	70.2	73.5
ABLkit HWF Reasoning	98.3	98.6	98.3	98.1	97.3	73.5	98.3	98.4	97.6	97.9	96.2	98.2
tunedGNN Cora GCN	95.1	95.7	95.5	95.5	95.3	92.5	98.5	99.2	96.8	96.8	96.8	100.1
verl GRPO GSM8K	98.5	96.9	98.2	97.8	98.0	97.7	97.5	98.5	98.8	98.6	98.5	98.5
ForestDiffusion Iris	98.4	98.4	98.4	98.4	98.4	98.4	100.9	100.9	100.9	100.9	100.9	100.9
VAR ImageNet 256	4.5	4.0	5.0	4.7	4.1	4.9	5.0	5.0	5.0	5.0	5.0	4.8
RAGEN Bandit Alignment	67.1	72.2	68.4	69.9	56.5	52.5	81.2	99.8	65.5	67.1	70.6	99.8
Chronos Weather Forecasting	34.8	39.6	39.7	39.7	39.7	39.7	40.4	24.5	25.0	25.0	39.7	38.7
HyperbolicCV CIFAR-100	20.7	21.3	21.1	27.6	20.5	12.4	16.3	37.4	30.9	32.2	21.2	28.6
iTransformer ETTm2 Forecasting	97.5	97.5	97.5	98.2	97.5	97.2	97.5	98.3	97.5	97.5	97.5	96.7
TimeMixer ETTm2 Forecasting	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.9	98.7	98.7	98.3	99.3
ART 2048	53.3	53.3	37.8	53.3	37.8	37.8	46.7	0.0	46.7	46.7	46.7	13.3
Multimodal Open-R1 MathVista	94.3	94.6	94.6	94.6	94.6	94.6	94.6	94.6	93.8	93.8	93.8	94.4
RankUp UTKFace Regression	8.0	4.3	9.7	10.4	11.3	4.5	9.8	27.3	22.9	22.9	15.7	29.8
SparseTSF ETTm1 Forecasting	92.7	92.7	92.7	92.7	92.7	90.0	93.1	92.5	92.1	92.1	92.1	92.3
SimpleRL MATH-500	15.3	13.6	15.3	16.6	14.9	14.5	16.3	16.3	14.0	12.8	15.7	16.3

Table 29 Per-task anchor attainment after the fourth intervention in the main limited budget evaluation, reported as percentages.

Task	Q8	Q32	Gem	DS14	Phi	Llama	DSV4	GPT	G4.7	G5.1	Kimi	Claude
FineWeb Pretraining	78.3	80.1	78.6	78.8	75.6	77.5	77.7	77.7	75.6	75.6	76.5	77.7
ConvKAN CIFAR-10	30.2	37.1	31.4	19.2	30.2	27.2	38.3	35.2	46.1	42.7	55.9	44.7
Open-R1 MATH-500	21.2	56.8	18.2	2.6	26.0	54.9	54.2	54.2	2.2	2.2	2.6	55.4
Room Selector Tuning	27.1	52.6	22.3	8.0	62.2	38.3	67.0	138.7	0.0	0.0	71.7	119.6
Uni2TS ETTh1 Forecasting	75.8	98.0	94.2	77.7	94.2	98.1	100.0	100.0	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.6	99.9	97.2	99.9	99.6	100.7	99.9	99.9	99.9	99.9	99.9	99.9
ModernBERT MNLI	46.2	49.9	45.9	44.2	62.5	50.5	42.1	42.2	39.2	39.2	42.1	42.1
AirBench CIFAR-10	96.0	94.8	95.5	95.0	95.9	94.0	94.9	95.0	94.6	94.6	94.9	94.9
NoisyGL Cora GCN	95.3	95.3	94.9	95.3	92.8	95.5	98.5	98.5	93.9	93.9	93.9	99.6
TabMini Promoters	96.4	103.5	86.0	96.4	103.5	99.2	98.3	99.8	104.1	104.1	104.1	104.3
Adult Tabular Diffusion	99.8	100.9	97.0	99.8	100.2	99.8	102.0	100.9	99.8	99.8	99.8	102.0
xLSTM Parity	-0.9	-0.7	1.7	1.7	1.6	2.0	0.9	1.1	1.7	1.7	1.7	2.1
VBLL Yacht Regression	50.7	61.0	50.7	50.7	50.7	45.0	108.0	162.3	130.9	130.9	130.9	258.1
TabM California Housing	85.1	85.1	85.1	85.1	85.1	85.1	83.3	88.9	83.3	83.3	83.3	85.4
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
ABLkit HWF Reasoning	98.0	98.4	98.4	98.4	98.3	97.8	98.6	98.2	98.4	98.6	97.0	98.1
tunedGNN Cora GCN	94.7	95.7	95.5	95.5	93.5	92.5	98.5	99.2	94.9	94.9	94.0	100.1
verl GRPO GSM8K	98.1	97.6	97.9	97.5	98.2	97.4	98.7	99.1	99.1	99.2	98.2	99.2
ForestDiffusion Iris	98.4	98.4	98.4	98.4	98.4	98.4	100.9	100.9	100.9	100.9	100.9	100.9
VAR ImageNet 256	4.4	4.0	5.0	4.7	4.1	4.9	5.0	5.0	5.0	5.0	5.0	4.7
RAGEN Bandit Alignment	70.9	68.8	51.7	74.2	52.3	53.9	61.0	99.8	76.5	69.1	66.2	99.6
Chronos Weather Forecasting	39.2	39.7	39.7	39.7	39.7	39.7	40.4	40.5	38.0	38.0	39.7	39.9
HyperbolicCV CIFAR-100	21.3	21.1	20.8	27.0	19.6	20.2	20.5	37.3	30.5	27.9	30.8	39.0
iTransformer ETTm2 Forecasting	97.5	97.5	97.5	98.2	97.5	97.5	100.1	98.3	97.5	97.5	97.5	97.5
TimeMixer ETTm2 Forecasting	98.8	98.7	98.7	98.7	98.7	98.7	98.8	98.9	98.7	98.7	98.7	99.3
ART 2048	53.3	53.3	37.8	53.3	37.8	37.8	46.7	46.7	46.7	46.7	46.7	13.3
Multimodal Open-R1 MathVista	88.2	94.6	94.6	94.6	94.6	94.3	94.6	94.6	75.6	75.6	94.6	94.6
RankUp UTKFace Regression	8.2	10.1	9.3	5.4	12.1	10.9	5.6	10.3	19.6	8.7	7.2	29.3
SparseTSF ETTm1 Forecasting	92.7	92.7	92.7	93.2	92.7	90.9	80.5	92.5	92.1	92.1	92.1	96.3
SimpleRL MATH-500	15.7	14.7	14.4	15.9	17.2	13.6	13.4	11.0	15.1	15.1	14.0	13.4

Table 30 Per-task anchor attainment after the fifth intervention in the main limited budget evaluation, reported as percentages.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	3.548	3.548	3.529
ConvKAN CIFAR-10	41.390	36.860	35.500
Open-R1 MATH-500	22.000	2.200	46.000
Room Selector Tuning	0.379	0.069	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509
ModernBERT MNLI	35.450	35.450	35.450
AirBench CIFAR-10	93.420	93.560	93.460
NoisyGL Cora GCN	70.000	69.800	70.400
TabMini Promoters	0.928	0.968	0.982
Adult Tabular Diffusion	85.520	85.530	87.480
xLSTM Parity	0.067	0.067	0.999
VBLL Yacht Regression	0.334	0.334	0.294
TabM California Housing	0.504	0.504	0.504
TimeXer PJM Forecasting	0.121	0.121	0.121
ABLkit HWF Reasoning	96.700	96.800	96.000
tunedGNN Cora GCN	82.900	82.900	82.300
verl GRPO GSM8K	84.460	84.000	83.240
ForestDiffusion Iris	0.979	0.979	0.979
VAR ImageNet 256	70.710	70.710	72.680
RAGEN Bandit Alignment	0.996	0.997	0.997
Chronos Weather Forecasting	0.372	0.372	0.385
HyperbolicCV CIFAR-100	54.370	56.200	78.170
iTransformer ETTm2 Forecasting	0.185	0.185	0.182
TimeMixer ETTm2 Forecasting	0.175	0.175	0.175
ART 2048	0.280	0.280	0.000
Multimodal Open-R1 MathVista	40.200	40.200	40.200
RankUp UTKFace Regression	7.690	8.910	5.790
SparseTSF ETTm1 Forecasting	0.340	0.340	0.340
SimpleRL MATH-500	5.000	4.800	5.800

Table 31 Per-task raw metric values after the first intervention in the full budget evaluation.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	3.508	3.508	3.466
ConvKAN CIFAR-10	35.580	60.550	48.220
Open-R1 MATH-500	22.000	2.200	46.000
Room Selector Tuning	0.379	0.000	0.690
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509
ModernBERT MNLI	35.450	35.450	35.450
AirBench CIFAR-10	93.610	93.560	93.730
NoisyGL Cora GCN	69.800	69.800	69.000
TabMini Promoters	0.968	0.968	0.970
Adult Tabular Diffusion	85.530	85.530	87.640
xLSTM Parity	0.298	1.000	1.000
VBLL Yacht Regression	0.334	0.334	0.341
TabM California Housing	0.504	0.504	0.494
TimeXer PJM Forecasting	0.121	0.121	0.122
ABLkit HWF Reasoning	95.350	95.350	97.200
tunedGNN Cora GCN	83.100	83.200	83.800
verl GRPO GSM8K	84.530	84.690	85.370
ForestDiffusion Iris	0.979	0.979	0.981
VAR ImageNet 256	70.710	70.710	64.000
RAGEN Bandit Alignment	0.996	0.998	0.997
Chronos Weather Forecasting	0.368	0.368	0.368
HyperbolicCV CIFAR-100	57.140	53.200	76.580
iTransformer ETTm2 Forecasting	0.185	0.185	0.185
TimeMixer ETTm2 Forecasting	0.174	0.175	0.180
ART 2048	0.280	0.280	0.000
Multimodal Open-R1 MathVista	48.600	48.600	48.700
RankUp UTKFace Regression	6.060	6.070	5.610
SparseTSF ETTm1 Forecasting	0.340	0.340	0.341
SimpleRL MATH-500	4.400	4.800	7.500

Table 32 Per-task raw metric values after the second intervention in the full budget evaluation.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	3.488	3.488	3.435
ConvKAN CIFAR-10	29.200	50.820	41.630
Open-R1 MATH-500	22.000	2.200	45.800
Room Selector Tuning	0.379	0.414	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509
ModernBERT MNLI	35.450	59.790	67.010
AirBench CIFAR-10	93.680	93.560	93.680
NoisyGL Cora GCN	69.800	69.800	70.400
TabMini Promoters	0.968	0.968	0.982
Adult Tabular Diffusion	85.530	85.530	87.420
xLSTM Parity	0.298	0.298	1.000
VBLL Yacht Regression	0.334	0.334	0.302
TabM California Housing	0.504	0.504	0.493
TimeXer PJM Forecasting	0.121	0.121	0.114
ABLkit HWF Reasoning	95.500	95.500	97.450
tunedGNN Cora GCN	82.600	82.700	83.900
verl GRPO GSM8K	84.990	86.050	85.290
ForestDiffusion Iris	0.979	0.979	0.979
VAR ImageNet 256	70.710	70.710	78.770
RAGEN Bandit Alignment	0.994	0.996	0.997
Chronos Weather Forecasting	0.373	0.373	0.372
HyperbolicCV CIFAR-100	54.680	54.640	75.090
iTransformer ETTm2 Forecasting	0.185	0.185	0.184
TimeMixer ETTm2 Forecasting	0.175	0.175	0.175
ART 2048	0.280	0.280	0.080
Multimodal Open-R1 MathVista	46.300	46.300	48.600
RankUp UTKFace Regression	5.450	6.450	6.220
SparseTSF ETTm1 Forecasting	0.340	0.340	0.325
SimpleRL MATH-500	2.800	4.400	5.400

Table 33 Per-task raw metric values after the third intervention in the full budget evaluation.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	3.476	3.476	3.415
ConvKAN CIFAR-10	32.950	49.040	39.630
Open-R1 MATH-500	22.000	2.200	45.800
Room Selector Tuning	0.379	0.138	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509
ModernBERT MNLI	35.450	35.450	67.540
AirBench CIFAR-10	93.680	93.560	93.740
NoisyGL Cora GCN	69.800	69.800	70.900
TabMini Promoters	0.968	0.968	0.965
Adult Tabular Diffusion	85.530	85.530	87.240
xLSTM Parity	0.298	0.298	1.000
VBLL Yacht Regression	0.334	0.334	0.404
TabM California Housing	0.504	0.504	0.493
TimeXer PJM Forecasting	0.121	0.121	0.119
ABLkit HWF Reasoning	97.750	96.850	96.100
tunedGNN Cora GCN	82.400	82.400	83.900
verl GRPO GSM8K	84.760	85.670	86.660
ForestDiffusion Iris	0.979	0.979	0.979
VAR ImageNet 256	70.710	70.710	80.490
RAGEN Bandit Alignment	0.995	0.997	0.998
Chronos Weather Forecasting	0.593	0.593	0.372
HyperbolicCV CIFAR-100	50.450	52.380	74.820
iTransformer ETTm2 Forecasting	0.185	0.185	0.186
TimeMixer ETTm2 Forecasting	0.174	0.176	0.175
ART 2048	0.280	0.280	0.160
Multimodal Open-R1 MathVista	48.400	48.400	46.300
RankUp UTKFace Regression	17.310	22.490	5.570
SparseTSF ETTm1 Forecasting	0.340	0.340	0.335
SimpleRL MATH-500	2.800	5.400	5.400

Table 34 Per-task raw metric values after the fourth intervention in the full budget evaluation.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	3.468	3.468	3.403
ConvKAN CIFAR-10	59.570	33.280	28.470
Open-R1 MATH-500	22.000	2.200	46.000
Room Selector Tuning	0.379	0.069	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509
ModernBERT MNLI	35.450	35.450	67.970
AirBench CIFAR-10	93.680	93.490	93.730
NoisyGL Cora GCN	69.800	69.800	70.800
TabMini Promoters	0.968	0.968	0.982
Adult Tabular Diffusion	85.530	85.530	87.420
xLSTM Parity	0.298	0.298	1.000
VBLL Yacht Regression	0.334	0.334	0.356
TabM California Housing	0.504	0.504	0.505
TimeXer PJM Forecasting	0.121	0.121	0.114
ABLkit HWF Reasoning	97.500	97.550	97.450
tunedGNN Cora GCN	81.600	83.500	83.900
verl GRPO GSM8K	85.600	84.990	84.690
ForestDiffusion Iris	0.979	0.979	0.979
VAR ImageNet 256	70.710	70.710	82.390
RAGEN Bandit Alignment	0.997	0.998	0.996
Chronos Weather Forecasting	0.389	0.389	0.370
HyperbolicCV CIFAR-100	57.770	54.460	74.380
iTransformer ETTm2 Forecasting	0.185	0.183	0.185
TimeMixer ETTm2 Forecasting	0.175	0.174	0.174
ART 2048	0.280	0.280	0.160
Multimodal Open-R1 MathVista	39.000	39.000	48.800
RankUp UTKFace Regression	6.150	6.270	5.380
SparseTSF ETTm1 Forecasting	0.340	0.340	0.323
SimpleRL MATH-500	4.200	5.600	3.800

Table 35 Per-task raw metric values after the fifth intervention in the full budget evaluation.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	0.550	0.550	0.619
ConvKAN CIFAR-10	0.121	0.028	0.000
Open-R1 MATH-500	0.245	0.000	0.541
Room Selector Tuning	0.000	-0.908	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.991
ModernBERT MNLI	-1.000	-1.000	-1.000
AirBench CIFAR-10	-0.788	-0.364	-0.667
NoisyGL Cora GCN	0.000	-0.189	0.377
TabMini Promoters	0.000	1.000	1.000
Adult Tabular Diffusion	0.000	0.069	1.000
xLSTM Parity	0.000	0.000	0.999
VBLL Yacht Regression	0.339	0.339	0.440
TabM California Housing	0.308	0.308	0.308
TimeXer PJM Forecasting	-0.331	-0.331	-0.331
ABLkit HWF Reasoning	-0.562	-0.500	-1.000
tunedGNN Cora GCN	-0.375	-0.375	-0.750
verl GRPO GSM8K	0.122	-0.122	-0.527
ForestDiffusion Iris	1.000	1.000	1.000
VAR ImageNet 256	0.000	0.000	-0.029
RAGEN Bandit Alignment	0.995	0.996	0.996
Chronos Weather Forecasting	0.000	0.000	-0.057
HyperbolicCV CIFAR-100	-0.105	-0.020	1.000
iTransformer ETTm2 Forecasting	-0.445	-0.445	0.350
TimeMixer ETTm2 Forecasting	0.869	0.847	0.897
ART 2048	0.467	0.467	0.000
Multimodal Open-R1 MathVista	-1.000	-1.000	-1.000
RankUp UTKFace Regression	-0.803	-1.000	0.404
SparseTSF ETTm1 Forecasting	0.000	0.000	-0.006
SimpleRL MATH-500	-0.007	-0.014	0.021

Table 36 Per-task bounded normalized scores after the first intervention in the full budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	0.698	0.698	0.850
ConvKAN CIFAR-10	0.002	0.515	0.261
Open-R1 MATH-500	0.245	0.000	0.541
Room Selector Tuning	0.000	-1.000	0.908
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.991
ModernBERT MNLI	-1.000	-1.000	-1.000
AirBench CIFAR-10	-0.212	-0.364	0.152
NoisyGL Cora GCN	-0.189	-0.189	-0.943
TabMini Promoters	1.000	1.000	1.000
Adult Tabular Diffusion	0.069	0.069	1.000
xLSTM Parity	0.247	1.000	1.000
VBLL Yacht Regression	0.339	0.339	0.321
TabM California Housing	0.308	0.308	0.425
TimeXer PJM Forecasting	-0.331	-0.331	-0.381
ABLkit HWF Reasoning	-1.000	-1.000	-0.250
tunedGNN Cora GCN	-0.250	-0.188	0.188
verl GRPO GSM8K	0.162	0.243	0.608
ForestDiffusion Iris	1.000	1.000	1.000
VAR ImageNet 256	0.000	0.000	0.100
RAGEN Bandit Alignment	0.996	0.997	0.997
Chronos Weather Forecasting	0.020	0.020	0.020
HyperbolicCV CIFAR-100	0.024	-0.160	0.931
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.528
TimeMixer ETTm2 Forecasting	1.000	1.000	-0.821
ART 2048	0.467	0.467	0.000
Multimodal Open-R1 MathVista	-0.071	-0.071	-0.036
RankUp UTKFace Regression	0.236	0.229	0.517
SparseTSF ETTm1 Forecasting	0.000	0.000	-0.027
SimpleRL MATH-500	-0.027	-0.014	0.079

Table 37 Per-task bounded normalized scores after the second intervention in the full budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	0.769	0.769	0.965
ConvKAN CIFAR-10	-0.129	0.315	0.126
Open-R1 MATH-500	0.245	0.000	0.539
Room Selector Tuning	0.000	0.101	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.991
ModernBERT MNLI	-1.000	-0.138	0.131
AirBench CIFAR-10	0.000	-0.364	0.000
NoisyGL Cora GCN	-0.189	-0.189	0.377
TabMini Promoters	1.000	1.000	1.000
Adult Tabular Diffusion	0.069	0.069	1.000
xLSTM Parity	0.247	0.247	1.000
VBLL Yacht Regression	0.339	0.339	0.422
TabM California Housing	0.308	0.308	0.429
TimeXer PJM Forecasting	-0.331	-0.331	0.000
ABLkit HWF Reasoning	-1.000	-1.000	-0.094
tunedGNN Cora GCN	-0.563	-0.500	0.250
verl GRPO GSM8K	0.406	0.973	0.568
ForestDiffusion Iris	1.000	1.000	1.000
VAR ImageNet 256	0.000	0.000	-0.120
RAGEN Bandit Alignment	0.993	0.995	0.997
Chronos Weather Forecasting	-0.005	-0.005	0.000
HyperbolicCV CIFAR-100	-0.091	-0.093	0.861
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.216
TimeMixer ETTm2 Forecasting	1.000	1.000	1.000
ART 2048	0.467	0.467	0.133
Multimodal Open-R1 MathVista	-0.893	-0.893	-0.071
RankUp UTKFace Regression	0.620	-0.012	0.129
SparseTSF ETTm1 Forecasting	0.000	0.000	0.572
SimpleRL MATH-500	-0.082	-0.027	0.007

Table 38 Per-task bounded normalized scores after the third intervention in the full budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	0.813	0.813	1.000
ConvKAN CIFAR-10	-0.052	0.278	0.085
Open-R1 MATH-500	0.245	0.000	0.539
Room Selector Tuning	0.000	-0.706	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.991
ModernBERT MNLI	-1.000	-1.000	0.150
AirBench CIFAR-10	0.000	-0.364	0.182
NoisyGL Cora GCN	-0.189	-0.189	0.849
TabMini Promoters	1.000	1.000	1.000
Adult Tabular Diffusion	0.069	0.069	1.000
xLSTM Parity	0.247	0.247	1.000
VBLL Yacht Regression	0.339	0.339	0.161
TabM California Housing	0.308	0.308	0.436
TimeXer PJM Forecasting	-0.331	-0.331	-0.252
ABLkit HWF Reasoning	0.094	-0.469	-0.937
tunedGNN Cora GCN	-0.688	-0.688	0.250
verl GRPO GSM8K	0.284	0.771	1.000
ForestDiffusion Iris	1.000	1.000	1.000
VAR ImageNet 256	0.000	0.000	-0.146
RAGEN Bandit Alignment	0.994	0.997	0.998
Chronos Weather Forecasting	-0.984	-0.984	0.000
HyperbolicCV CIFAR-100	-0.288	-0.198	0.848
iTransformer ETTm2 Forecasting	-0.445	-0.445	-0.889
TimeMixer ETTm2 Forecasting	1.000	0.791	1.000
ART 2048	0.467	0.467	0.267
Multimodal Open-R1 MathVista	-0.143	-0.143	-0.893
RankUp UTKFace Regression	-1.000	-1.000	0.545
SparseTSF ETTm1 Forecasting	0.000	0.000	0.189
SimpleRL MATH-500	-0.082	0.007	0.007

Table 39 Per-task bounded normalized scores after the fourth intervention in the full budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	0.841	0.841	1.000
ConvKAN CIFAR-10	0.495	-0.046	-0.144
Open-R1 MATH-500	0.245	0.000	0.541
Room Selector Tuning	0.000	-0.908	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.991
ModernBERT MNLI	-1.000	-1.000	0.166
AirBench CIFAR-10	0.000	-0.576	0.152
NoisyGL Cora GCN	-0.189	-0.189	0.755
TabMini Promoters	1.000	1.000	1.000
Adult Tabular Diffusion	0.069	0.069	1.000
xLSTM Parity	0.247	0.247	1.000
VBLL Yacht Regression	0.339	0.339	0.283
TabM California Housing	0.308	0.308	0.301
TimeXer PJM Forecasting	-0.331	-0.331	0.000
ABLkit HWF Reasoning	-0.062	-0.031	-0.094
tunedGNN Cora GCN	-1.000	0.000	0.250
verl GRPO GSM8K	0.730	0.406	0.243
ForestDiffusion Iris	1.000	1.000	1.000
VAR ImageNet 256	0.000	0.000	-0.174
RAGEN Bandit Alignment	0.996	0.997	0.995
Chronos Weather Forecasting	-0.077	-0.077	0.007
HyperbolicCV CIFAR-100	0.053	-0.101	0.828
iTransformer ETTm2 Forecasting	-0.445	0.000	-0.461
TimeMixer ETTm2 Forecasting	0.916	1.000	1.000
ART 2048	0.467	0.467	0.267
Multimodal Open-R1 MathVista	-1.000	-1.000	0.000
RankUp UTKFace Regression	0.178	0.098	0.667
SparseTSF ETTm1 Forecasting	0.000	0.000	0.646
SimpleRL MATH-500	-0.034	0.014	-0.048

Table 40 Per-task bounded normalized scores after the fifth intervention in the full budget evaluation. Scores are bounded to $[-1, 1]$.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	96.5	96.5	97.0
ConvKAN CIFAR-10	49.2	43.8	42.2
Open-R1 MATH-500	26.5	2.6	55.4
Room Selector Tuning	52.6	9.6	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9
ModernBERT MNLI	39.2	39.2	39.2
AirBench CIFAR-10	99.4	99.5	99.4
NoisyGL Cora GCN	98.5	98.2	99.1
TabMini Promoters	99.8	104.1	105.6
Adult Tabular Diffusion	99.7	99.8	102.0
xLSTM Parity	6.7	6.7	99.9
VBLL Yacht Regression	257.5	257.5	292.0
TabM California Housing	87.5	87.5	87.5
TimeXer PJM Forecasting	77.0	77.0	77.0
ABLkit HWF Reasoning	97.5	97.6	96.8
tunedGNN Cora GCN	97.4	97.4	96.7
verl GRPO GSM8K	98.1	97.6	96.7
ForestDiffusion Iris	100.9	100.9	100.9
VAR ImageNet 256	5.0	5.0	4.9
RAGEN Bandit Alignment	99.6	99.6	99.7
Chronos Weather Forecasting	39.7	39.7	38.4
HyperbolicCV CIFAR-100	69.6	72.0	100.1
iTransformer ETTm2 Forecasting	97.5	97.5	98.9
TimeMixer ETTm2 Forecasting	99.8	99.8	99.8
ART 2048	46.7	46.7	0.0
Multimodal Open-R1 MathVista	77.9	77.9	77.9
RankUp UTKFace Regression	63.1	54.5	83.8
SparseTSF ETTm1 Forecasting	92.4	92.4	92.3
SimpleRL MATH-500	14.5	14.0	16.9

Table 41 Per-task anchor attainment after the first intervention in the full budget evaluation, reported as percentages.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	97.6	97.6	98.8
ConvKAN CIFAR-10	42.3	71.9	57.3
Open-R1 MATH-500	26.5	2.6	55.4
Room Selector Tuning	52.6	0.0	95.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9
ModernBERT MNLI	39.2	39.2	39.2
AirBench CIFAR-10	99.6	99.5	99.7
NoisyGL Cora GCN	98.2	98.2	97.1
TabMini Promoters	104.1	104.1	104.3
Adult Tabular Diffusion	99.8	99.8	102.2
xLSTM Parity	29.8	100.0	100.0
VBLL Yacht Regression	257.5	257.5	251.9
TabM California Housing	87.5	87.5	89.4
TimeXer PJM Forecasting	77.0	77.0	76.3
ABLkit HWF Reasoning	96.1	96.1	98.0
tunedGNN Cora GCN	97.6	97.8	98.5
verl GRPO GSM8K	98.2	98.4	99.1
ForestDiffusion Iris	100.9	100.9	101.1
VAR ImageNet 256	5.0	5.0	5.5
RAGEN Bandit Alignment	99.6	99.8	99.7
Chronos Weather Forecasting	40.2	40.2	40.2
HyperbolicCV CIFAR-100	73.2	68.1	98.1
iTransformer ETTm2 Forecasting	97.5	97.5	97.3
TimeMixer ETTm2 Forecasting	100.4	100.1	97.2
ART 2048	46.7	46.7	0.0
Multimodal Open-R1 MathVista	94.2	94.2	94.4
RankUp UTKFace Regression	80.1	80.0	86.4
SparseTSF ETTm1 Forecasting	92.4	92.4	92.2
SimpleRL MATH-500	12.8	14.0	21.8

Table 42 Per-task anchor attainment after the second intervention in the full budget evaluation, reported as percentages.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	98.2	98.2	99.7
ConvKAN CIFAR-10	34.7	60.4	49.5
Open-R1 MATH-500	26.5	2.6	55.1
Room Selector Tuning	52.6	57.4	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9
ModernBERT MNLI	39.2	66.1	74.1
AirBench CIFAR-10	99.6	99.5	99.6
NoisyGL Cora GCN	98.2	98.2	99.1
TabMini Promoters	104.1	104.1	105.6
Adult Tabular Diffusion	99.8	99.8	102.0
xLSTM Parity	29.8	29.8	100.0
VBLL Yacht Regression	257.5	257.5	285.0
TabM California Housing	87.5	87.5	89.4
TimeXer PJM Forecasting	77.0	77.0	81.7
ABLkit HWF Reasoning	96.3	96.3	98.2
tunedGNN Cora GCN	97.1	97.2	98.6
verl GRPO GSM8K	98.7	99.9	99.1
ForestDiffusion Iris	100.9	100.9	100.9
VAR ImageNet 256	5.0	5.0	4.5
RAGEN Bandit Alignment	99.4	99.6	99.7
Chronos Weather Forecasting	39.6	39.6	39.7
HyperbolicCV CIFAR-100	70.0	70.0	96.2
iTransformer ETTm2 Forecasting	97.5	97.5	97.9
TimeMixer ETTm2 Forecasting	100.2	100.1	100.1
ART 2048	46.7	46.7	13.3
Multimodal Open-R1 MathVista	89.7	89.7	94.2
RankUp UTKFace Regression	89.0	75.2	77.9
SparseTSF ETTm1 Forecasting	92.4	92.4	96.6
SimpleRL MATH-500	8.1	12.8	15.7

Table 43 Per-task anchor attainment after the third intervention in the full budget evaluation, reported as percentages.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	98.5	98.5	100.3
ConvKAN CIFAR-10	39.1	58.3	47.1
Open-R1 MATH-500	26.5	2.6	55.1
Room Selector Tuning	52.6	19.1	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9
ModernBERT MNLI	39.2	39.2	74.7
AirBench CIFAR-10	99.6	99.5	99.7
NoisyGL Cora GCN	98.2	98.2	99.8
TabMini Promoters	104.1	104.1	103.8
Adult Tabular Diffusion	99.8	99.8	101.7
xLSTM Parity	29.8	29.8	100.0
VBLL Yacht Regression	257.5	257.5	212.7
TabM California Housing	87.5	87.5	89.5
TimeXer PJM Forecasting	77.0	77.0	78.0
ABLkit HWF Reasoning	98.5	97.6	96.9
tunedGNN Cora GCN	96.8	96.8	98.6
verl GRPO GSM8K	98.4	99.5	100.6
ForestDiffusion Iris	100.9	100.9	100.9
VAR ImageNet 256	5.0	5.0	4.4
RAGEN Bandit Alignment	99.5	99.7	99.8
Chronos Weather Forecasting	25.0	25.0	39.7
HyperbolicCV CIFAR-100	64.6	67.1	95.8
iTransformer ETTm2 Forecasting	97.5	97.5	96.7
TimeMixer ETTm2 Forecasting	100.4	99.7	100.2
ART 2048	46.7	46.7	26.7
Multimodal Open-R1 MathVista	93.8	93.8	89.7
RankUp UTKFace Regression	28.0	21.6	87.1
SparseTSF ETTm1 Forecasting	92.4	92.4	93.7
SimpleRL MATH-500	8.1	15.7	15.7

Table 44 Per-task anchor attainment after the fourth intervention in the full budget evaluation, reported as percentages.

Task	Q32	DS-R1	Claude
FineWeb Pretraining	98.7	98.7	100.6
ConvKAN CIFAR-10	70.8	39.5	33.8
Open-R1 MATH-500	26.5	2.6	55.4
Room Selector Tuning	52.6	9.6	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9
ModernBERT MNLI	39.2	39.2	75.2
AirBench CIFAR-10	99.6	99.4	99.7
NoisyGL Cora GCN	98.2	98.2	99.6
TabMini Promoters	104.1	104.1	105.6
Adult Tabular Diffusion	99.8	99.8	102.0
xLSTM Parity	29.8	29.8	100.0
VBLL Yacht Regression	257.5	257.5	241.6
TabM California Housing	87.5	87.5	87.4
TimeXer PJM Forecasting	77.0	77.0	81.7
ABLkit HWF Reasoning	98.3	98.3	98.2
tunedGNN Cora GCN	95.9	98.1	98.6
verl GRPO GSM8K	99.4	98.7	98.4
ForestDiffusion Iris	100.9	100.9	100.9
VAR ImageNet 256	5.0	5.0	4.3
RAGEN Bandit Alignment	99.7	99.8	99.6
Chronos Weather Forecasting	38.0	38.0	39.9
HyperbolicCV CIFAR-100	74.0	69.8	95.3
iTransformer ETTm2 Forecasting	97.5	98.2	97.5
TimeMixer ETTm2 Forecasting	99.9	100.3	100.4
ART 2048	46.7	46.7	26.7
Multimodal Open-R1 MathVista	75.6	75.6	94.6
RankUp UTKFace Regression	78.9	77.3	90.2
SparseTSF ETTm1 Forecasting	92.4	92.4	97.2
SimpleRL MATH-500	12.2	16.3	11.0

Table 45 Per-task anchor attainment after the fifth intervention in the full budget evaluation, reported as percentages.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	5.931	5.771	5.931	5.859
ConvKAN CIFAR-10	13.950	32.050	26.250	19.970
Open-R1 MATH-500	46.000	45.000	45.000	45.000
Room Selector Tuning	0.862	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509	0.509
ModernBERT MNLI	35.450	35.450	35.450	35.450
AirBench CIFAR-10	88.570	88.930	89.010	89.010
NoisyGL Cora GCN	68.600	70.100	69.200	69.200
TabMini Promoters	0.956	0.982	0.928	0.928
Adult Tabular Diffusion	87.450	87.440	86.550	87.240
xLSTM Parity	0.021	-0.021	-0.021	-0.021
VBLL Yacht Regression	0.465	0.465	0.530	0.697
TabM California Housing	0.530	0.530	0.530	0.530
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127
ABLkit HWF Reasoning	97.150	97.900	97.050	97.400
tunedGNN Cora GCN	82.200	82.800	82.200	83.800
verl GRPO GSM8K	84.760	83.620	85.220	83.700
ForestDiffusion Iris	0.979	0.979	0.979	0.979
VAR ImageNet 256	75.140	72.860	72.860	72.860
RAGEN Bandit Alignment	0.690	0.728	0.686	0.746
Chronos Weather Forecasting	0.385	0.385	0.380	0.368
HyperbolicCV CIFAR-100	12.550	12.530	27.070	13.240
iTransformer ETTm2 Forecasting	0.182	0.184	0.184	0.184
TimeMixer ETTm2 Forecasting	0.177	0.176	0.177	0.177
ART 2048	0.000	0.000	0.000	0.000
Multimodal Open-R1 MathVista	40.200	40.200	48.700	40.200
RankUp UTKFace Regression	259.580	394.830	733.660	1376.850
SparseTSF ETTm1 Forecasting	0.337	0.335	0.339	0.339
SimpleRL MATH-500	5.800	5.800	5.800	5.800

Table 46 Per-task raw metric values after the first intervention in the harness ablation evaluation.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	5.414	5.284	5.414	5.224
ConvKAN CIFAR-10	36.460	13.800	27.540	18.820
Open-R1 MATH-500	46.000	45.000	45.000	45.000
Room Selector Tuning	0.690	0.690	1.000	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509	0.509
ModernBERT MNLI	35.450	42.590	37.830	37.620
AirBench CIFAR-10	89.270	89.250	89.220	89.090
NoisyGL Cora GCN	70.000	70.400	70.000	70.000
TabMini Promoters	0.982	0.970	0.928	0.928
Adult Tabular Diffusion	87.480	87.300	86.470	87.240
xLSTM Parity	0.021	0.001	0.011	0.011
VBLL Yacht Regression	0.465	0.465	0.530	0.321
TabM California Housing	0.513	0.513	0.499	0.511
TimeXer PJM Forecasting	0.144	0.144	0.127	0.127
ABLkit HWF Reasoning	97.550	94.350	97.650	97.050
tunedGNN Cora GCN	83.800	83.100	83.800	84.100
verl GRPO GSM8K	85.520	84.230	84.760	83.780
ForestDiffusion Iris	0.981	0.979	0.979	0.981
VAR ImageNet 256	66.250	72.680	70.710	75.920
RAGEN Bandit Alignment	0.997	0.995	0.999	0.998
Chronos Weather Forecasting	0.372	0.368	0.368	0.372
HyperbolicCV CIFAR-100	22.010	20.730	21.790	28.590
iTransformer ETTm2 Forecasting	0.184	0.184	0.183	0.183
TimeMixer ETTm2 Forecasting	0.176	0.177	0.177	0.177
ART 2048	0.000	0.000	0.000	0.360
Multimodal Open-R1 MathVista	48.600	48.700	41.300	48.600
RankUp UTKFace Regression	21.820	15.810	70.940	27.780
SparseTSF ETTm1 Forecasting	0.337	0.335	0.339	0.339
SimpleRL MATH-500	5.200	5.400	5.600	5.200

Table 47 Per-task raw metric values after the second intervention in the harness ablation evaluation.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	4.983	4.761	4.983	4.761
ConvKAN CIFAR-10	47.950	42.400	21.540	22.880
Open-R1 MATH-500	46.000	47.200	45.000	45.000
Room Selector Tuning	0.897	0.966	1.000	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509	0.509
ModernBERT MNLI	36.940	44.330	35.450	35.450
AirBench CIFAR-10	89.090	88.790	89.220	89.220
NoisyGL Cora GCN	70.600	69.000	69.300	70.800
TabMini Promoters	0.970	0.982	0.928	0.928
Adult Tabular Diffusion	87.640	87.440	86.550	87.480
xLSTM Parity	0.021	0.021	0.011	0.009
VBLL Yacht Regression	0.333	0.348	0.530	0.479
TabM California Housing	0.496	0.497	0.496	0.507
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127
ABLkit HWF Reasoning	97.300	97.250	97.200	97.600
tunedGNN Cora GCN	85.200	83.800	84.400	82.200
verl GRPO GSM8K	85.820	84.000	84.910	82.870
ForestDiffusion Iris	0.964	0.979	0.979	0.979
VAR ImageNet 256	70.710	78.770	71.190	66.250
RAGEN Bandit Alignment	0.994	0.997	0.999	0.995
Chronos Weather Forecasting	0.593	0.368	0.365	0.365
HyperbolicCV CIFAR-100	22.450	22.500	29.180	29.780
iTransformer ETTm2 Forecasting	0.183	0.186	0.183	0.183
TimeMixer ETTm2 Forecasting	0.177	0.176	0.177	0.177
ART 2048	0.000	0.360	0.000	0.120
Multimodal Open-R1 MathVista	48.800	48.600	48.800	48.700
RankUp UTKFace Regression	19.940	15.440	67.190	16.500
SparseTSF ETTm1 Forecasting	0.335	0.337	0.388	0.339
SimpleRL MATH-500	6.000	5.200	4.600	5.600

Table 48 Per-task raw metric values after the third intervention in the harness ablation evaluation.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	4.513	4.347	4.513	4.340
ConvKAN CIFAR-10	20.740	24.420	16.210	27.060
Open-R1 MATH-500	46.000	47.200	45.000	47.200
Room Selector Tuning	0.897	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509	0.509
ModernBERT MNLI	39.920	46.500	36.580	37.750
AirBench CIFAR-10	89.250	89.220	89.270	89.220
NoisyGL Cora GCN	70.800	70.400	70.000	70.800
TabMini Promoters	0.979	0.970	0.928	0.925
Adult Tabular Diffusion	87.240	87.350	86.380	87.480
xLSTM Parity	-0.035	0.021	0.011	0.011
VBLL Yacht Regression	0.333	0.333	0.530	0.321
TabM California Housing	0.497	0.495	0.497	0.496
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127
ABLkit HWF Reasoning	97.450	97.850	97.600	97.350
tunedGNN Cora GCN	85.200	82.900	84.400	84.100
verl GRPO GSM8K	84.840	83.850	84.840	83.320
ForestDiffusion Iris	0.979	0.971	0.979	0.979
VAR ImageNet 256	73.650	80.490	70.710	64.000
RAGEN Bandit Alignment	0.999	1.000	0.998	0.999
Chronos Weather Forecasting	0.382	0.504	0.604	0.364
HyperbolicCV CIFAR-100	22.340	30.270	29.230	27.710
iTransformer ETTm2 Forecasting	0.186	0.183	0.183	0.183
TimeMixer ETTm2 Forecasting	0.176	0.177	0.177	0.177
ART 2048	0.080	0.160	0.000	0.560
Multimodal Open-R1 MathVista	48.700	46.300	48.800	48.800
RankUp UTKFace Regression	16.280	45.040	17.760	74.350
SparseTSF ETTm1 Forecasting	0.340	0.326	0.339	0.339
SimpleRL MATH-500	5.600	7.300	5.600	6.700

Table 49 Per-task raw metric values after the fourth intervention in the harness ablation evaluation.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	4.406	4.199	4.406	4.194
ConvKAN CIFAR-10	37.620	21.930	29.590	23.950
Open-R1 MATH-500	46.000	47.200	45.000	47.200
Room Selector Tuning	0.862	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	0.375	0.375	0.375	0.375
TimesFM Long Horizon	0.509	0.509	0.509	0.509
ModernBERT MNLI	38.070	44.180	38.130	38.270
AirBench CIFAR-10	89.250	89.220	89.270	89.090
NoisyGL Cora GCN	70.800	70.900	70.000	70.800
TabMini Promoters	0.970	0.982	0.928	0.925
Adult Tabular Diffusion	87.420	87.470	86.550	87.530
xLSTM Parity	0.021	0.021	0.011	0.011
VBLL Yacht Regression	0.333	0.297	0.530	0.321
TabM California Housing	0.517	0.500	0.496	0.497
TimeXer PJM Forecasting	0.127	0.127	0.127	0.127
ABLkit HWF Reasoning	97.350	97.250	97.400	97.750
tunedGNN Cora GCN	85.200	83.800	84.400	84.100
verl GRPO GSM8K	85.440	83.620	85.370	83.930
ForestDiffusion Iris	0.979	0.979	0.979	0.964
VAR ImageNet 256	75.140	82.060	70.710	67.260
RAGEN Bandit Alignment	0.997	0.999	0.998	0.997
Chronos Weather Forecasting	0.370	0.365	0.365	0.454
HyperbolicCV CIFAR-100	30.450	33.060	29.140	25.760
iTransformer ETTm2 Forecasting	0.185	0.183	0.183	0.183
TimeMixer ETTm2 Forecasting	0.176	0.182	0.177	0.177
ART 2048	0.080	0.240	0.280	0.000
Multimodal Open-R1 MathVista	48.800	48.800	48.800	48.800
RankUp UTKFace Regression	16.540	16.690	47.040	21.900
SparseTSF ETTm1 Forecasting	0.326	0.319	0.339	0.339
SimpleRL MATH-500	4.600	6.700	3.800	4.600

Table 50 Per-task raw metric values after the fifth intervention in the harness ablation evaluation.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	-1.000	-1.000	-1.000	-1.000
ConvKAN CIFAR-10	-0.272	0.056	-0.049	-0.163
Open-R1 MATH-500	0.545	0.533	0.533	0.533
Room Selector Tuning	1.000	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.990	0.991
ModernBERT MNLI	-0.068	-0.068	-0.068	-0.068
AirBench CIFAR-10	-0.106	-0.033	-0.016	-0.016
NoisyGL Cora GCN	-1.000	0.094	-0.755	-0.755
TabMini Promoters	1.000	1.000	0.000	0.000
Adult Tabular Diffusion	1.000	1.000	1.000	1.000
xLSTM Parity	0.011	-0.033	-0.033	-0.033
VBLL Yacht Regression	1.000	1.000	1.000	1.000
TabM California Housing	0.066	0.066	0.066	0.066
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151
ABLkit HWF Reasoning	-0.171	0.257	-0.229	-0.029
tunedGNN Cora GCN	-0.813	-0.437	-0.813	0.188
verl GRPO GSM8K	0.054	-0.750	0.375	-0.697
ForestDiffusion Iris	1.000	1.000	1.000	1.000
VAR ImageNet 256	-0.066	-0.032	-0.032	-0.032
RAGEN Bandit Alignment	0.627	0.673	0.623	0.694
Chronos Weather Forecasting	-0.057	-0.057	-0.035	0.020
HyperbolicCV CIFAR-100	-0.062	-0.063	0.173	-0.051
iTransformer ETTm2 Forecasting	0.350	-0.216	-0.278	-0.278
TimeMixer ETTm2 Forecasting	0.248	0.530	0.370	0.369
ART 2048	0.000	0.000	0.000	0.000
Multimodal Open-R1 MathVista	-1.000	-1.000	-0.036	-1.000
RankUp UTKFace Regression	-1.000	-1.000	-1.000	-1.000
SparseTSF ETTm1 Forecasting	0.151	0.215	0.056	0.056
SimpleRL MATH-500	-0.538	-0.538	-0.538	-0.538

Table 51 Per-task bounded normalized scores after the first intervention in the harness ablation evaluation. Scores are bounded to $[-1, 1]$.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	-1.000	-1.000	-1.000	-0.957
ConvKAN CIFAR-10	0.136	-0.275	-0.026	-0.184
Open-R1 MATH-500	0.545	0.533	0.533	0.533
Room Selector Tuning	0.898	0.898	1.000	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.990	0.991
ModernBERT MNLI	-0.068	0.071	-0.022	-0.026
AirBench CIFAR-10	0.037	0.033	0.026	0.000
NoisyGL Cora GCN	0.000	0.377	0.000	0.000
TabMini Promoters	1.000	1.000	0.000	0.000
Adult Tabular Diffusion	1.000	1.000	1.000	1.000
xLSTM Parity	0.011	-0.010	0.000	0.000
VBLL Yacht Regression	1.000	1.000	1.000	1.000
TabM California Housing	0.247	0.247	0.389	0.267
TimeXer PJM Forecasting	-0.300	-0.300	0.151	0.151
ABLkit HWF Reasoning	0.057	-1.000	0.114	-0.229
tunedGNN Cora GCN	0.188	-0.250	0.188	0.375
verl GRPO GSM8K	0.590	-0.322	0.054	-0.643
ForestDiffusion Iris	1.000	1.000	1.000	1.000
VAR ImageNet 256	0.066	-0.029	0.000	-0.077
RAGEN Bandit Alignment	0.997	0.994	0.999	0.997
Chronos Weather Forecasting	0.000	0.020	0.020	0.001
HyperbolicCV CIFAR-100	0.091	0.070	0.088	0.198
iTransformer ETTm2 Forecasting	-0.216	-0.278	0.023	0.023
TimeMixer ETTm2 Forecasting	0.547	0.245	0.166	0.370
ART 2048	0.000	0.000	0.000	0.600
Multimodal Open-R1 MathVista	-0.071	-0.036	-1.000	-0.071
RankUp UTKFace Regression	0.429	0.631	-1.000	0.228
SparseTSF ETTm1 Forecasting	0.151	0.215	0.056	0.056
SimpleRL MATH-500	-0.570	-0.559	-0.548	-0.570

Table 52 Per-task bounded normalized scores after the second intervention in the harness ablation evaluation. Scores are bounded to $[-1, 1]$.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	-0.694	-0.453	-0.694	-0.453
ConvKAN CIFAR-10	0.344	0.243	-0.135	-0.110
Open-R1 MATH-500	0.545	0.560	0.533	0.533
Room Selector Tuning	1.000	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.990	0.991
ModernBERT MNLI	-0.039	0.104	-0.068	-0.068
AirBench CIFAR-10	0.000	-0.061	0.026	0.026
NoisyGL Cora GCN	0.566	-0.943	-0.660	0.755
TabMini Promoters	1.000	1.000	0.000	0.000
Adult Tabular Diffusion	1.000	1.000	1.000	1.000
xLSTM Parity	0.011	0.011	0.000	-0.002
VBLL Yacht Regression	1.000	1.000	1.000	1.000
TabM California Housing	0.420	0.417	0.420	0.310
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151
ABLkit HWF Reasoning	-0.086	-0.114	-0.143	0.086
tunedGNN Cora GCN	1.000	0.188	0.563	-0.813
verl GRPO GSM8K	0.804	-0.482	0.161	-1.000
ForestDiffusion Iris	0.917	1.000	1.000	1.000
VAR ImageNet 256	0.000	-0.120	-0.007	0.066
RAGEN Bandit Alignment	0.992	0.996	0.998	0.994
Chronos Weather Forecasting	-0.984	0.020	0.032	0.032
HyperbolicCV CIFAR-100	0.098	0.099	0.207	0.217
iTransformer ETTm2 Forecasting	0.105	-0.998	0.023	0.023
TimeMixer ETTm2 Forecasting	0.210	0.530	0.344	0.168
ART 2048	0.000	0.600	0.000	0.200
Multimodal Open-R1 MathVista	0.000	-0.071	0.000	-0.036
RankUp UTKFace Regression	0.492	0.643	-1.000	0.608
SparseTSF ETTm1 Forecasting	0.215	0.151	-1.000	0.056
SimpleRL MATH-500	-0.527	-0.570	-0.602	-0.548

Table 53 Per-task bounded normalized scores after the third intervention in the harness ablation evaluation. Scores are bounded to $[-1, 1]$.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	-0.183	-0.002	-0.183	0.004
ConvKAN CIFAR-10	-0.149	-0.082	-0.231	-0.035
Open-R1 MATH-500	0.545	0.560	0.533	0.560
Room Selector Tuning	1.000	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.990	0.991
ModernBERT MNLI	0.019	0.147	-0.046	-0.024
AirBench CIFAR-10	0.033	0.026	0.037	0.026
NoisyGL Cora GCN	0.755	0.377	0.000	0.755
TabMini Promoters	1.000	1.000	0.000	-1.000
Adult Tabular Diffusion	1.000	1.000	1.000	1.000
xLSTM Parity	-0.046	0.011	0.000	0.000
VBLL Yacht Regression	1.000	1.000	1.000	1.000
TabM California Housing	0.417	0.440	0.417	0.420
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151
ABLkit HWF Reasoning	0.000	0.229	0.086	-0.057
tunedGNN Cora GCN	1.000	-0.375	0.563	0.375
verl GRPO GSM8K	0.107	-0.590	0.107	-0.965
ForestDiffusion Iris	1.000	1.000	1.000	1.000
VAR ImageNet 256	-0.044	-0.146	0.000	0.100
RAGEN Bandit Alignment	0.998	1.000	0.998	0.998
Chronos Weather Forecasting	-0.046	-0.588	-1.000	0.037
HyperbolicCV CIFAR-100	0.096	0.225	0.208	0.184
iTransformer ETTm2 Forecasting	-0.889	0.153	0.023	0.023
TimeMixer ETTm2 Forecasting	0.585	0.254	0.370	0.369
ART 2048	0.133	0.267	0.000	0.933
Multimodal Open-R1 MathVista	-0.036	-0.893	0.000	0.000
RankUp UTKFace Regression	0.615	-0.354	0.565	-1.000
SparseTSF ETTm1 Forecasting	0.021	0.547	0.056	0.056
SimpleRL MATH-500	-0.548	-0.457	-0.548	-0.489

Table 54 Per-task bounded normalized scores after the fourth intervention in the harness ablation evaluation. Scores are bounded to $[-1, 1]$.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	-0.067	0.158	-0.067	0.163
ConvKAN CIFAR-10	0.157	-0.128	0.011	-0.091
Open-R1 MATH-500	0.545	0.560	0.533	0.560
Room Selector Tuning	1.000	1.000	1.000	1.000
Uni2TS ETTh1 Forecasting	1.000	1.000	1.000	1.000
TimesFM Long Horizon	0.991	0.991	0.990	0.991
ModernBERT MNLI	-0.017	0.101	-0.016	-0.013
AirBench CIFAR-10	0.033	0.026	0.037	0.000
NoisyGL Cora GCN	0.755	0.849	0.000	0.755
TabMini Promoters	1.000	1.000	0.000	-1.000
Adult Tabular Diffusion	1.000	1.000	1.000	1.000
xLSTM Parity	0.011	0.011	0.000	0.000
VBLL Yacht Regression	1.000	1.000	1.000	1.000
TabM California Housing	0.204	0.385	0.420	0.417
TimeXer PJM Forecasting	0.151	0.151	0.151	0.151
ABLkit HWF Reasoning	-0.057	-0.114	-0.029	0.171
tunedGNN Cora GCN	1.000	0.188	0.563	0.375
verl GRPO GSM8K	0.536	-0.750	0.482	-0.536
ForestDiffusion Iris	1.000	1.000	1.000	0.917
VAR ImageNet 256	-0.066	-0.169	0.000	0.051
RAGEN Bandit Alignment	0.996	0.999	0.997	0.997
Chronos Weather Forecasting	0.007	0.032	0.032	-0.364
HyperbolicCV CIFAR-100	0.228	0.270	0.207	0.152
iTransformer ETTm2 Forecasting	-0.461	0.087	0.023	0.023
TimeMixer ETTm2 Forecasting	0.585	-1.000	0.370	0.370
ART 2048	0.133	0.400	0.467	0.000
Multimodal Open-R1 MathVista	0.000	0.000	0.000	0.000
RankUp UTKFace Regression	0.606	0.601	-0.421	0.426
SparseTSF ETTm1 Forecasting	0.547	0.805	0.056	0.056
SimpleRL MATH-500	-0.602	-0.489	-0.645	-0.602

Table 55 Per-task bounded normalized scores after the fifth intervention in the harness ablation evaluation. Scores are bounded to $[-1, 1]$.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	57.7	59.4	57.7	58.5
ConvKAN CIFAR-10	16.6	38.1	31.2	23.7
Open-R1 MATH-500	55.4	54.2	54.2	54.2
Room Selector Tuning	119.6	138.7	138.7	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9	99.9
ModernBERT MNLI	39.2	39.2	39.2	39.2
AirBench CIFAR-10	94.2	94.6	94.7	94.7
NoisyGL Cora GCN	96.5	98.6	97.4	97.4
TabMini Promoters	102.8	105.6	99.8	99.8
Adult Tabular Diffusion	102.0	102.0	100.9	101.7
xLSTM Parity	2.1	-2.1	-2.1	-2.1
VBLL Yacht Regression	184.8	184.9	162.3	123.5
TabM California Housing	83.3	83.3	83.3	83.3
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5
ABLkit HWF Reasoning	97.9	98.7	97.8	98.2
tunedGNN Cora GCN	96.6	97.3	96.6	98.5
verl GRPO GSM8K	98.4	97.1	99.0	97.2
ForestDiffusion Iris	100.9	100.9	100.9	100.9
VAR ImageNet 256	4.7	4.9	4.9	4.9
RAGEN Bandit Alignment	69.0	72.8	68.7	74.6
Chronos Weather Forecasting	38.4	38.4	38.9	40.2
HyperbolicCV CIFAR-100	16.1	16.0	34.7	17.0
iTransformer ETTm2 Forecasting	98.9	97.9	97.8	97.8
TimeMixer ETTm2 Forecasting	98.7	99.2	98.9	98.9
ART 2048	0.0	0.0	0.0	0.0
Multimodal Open-R1 MathVista	77.9	77.9	94.4	77.9
RankUp UTKFace Regression	1.9	1.2	0.7	0.4
SparseTSF ETTm1 Forecasting	93.2	93.7	92.5	92.5
SimpleRL MATH-500	16.9	16.9	16.9	16.9

Table 56 Per-task anchor attainment after the first intervention in the harness ablation evaluation, reported as percentages.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	63.3	64.8	63.3	65.6
ConvKAN CIFAR-10	43.3	16.4	32.7	22.4
Open-R1 MATH-500	55.4	54.2	54.2	54.2
Room Selector Tuning	95.7	95.7	138.7	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9	99.9
ModernBERT MNLI	39.2	47.1	41.8	41.6
AirBench CIFAR-10	95.0	94.9	94.9	94.8
NoisyGL Cora GCN	98.5	99.1	98.5	98.5
TabMini Promoters	105.6	104.3	99.8	99.8
Adult Tabular Diffusion	102.0	101.8	100.9	101.7
xLSTM Parity	2.1	0.1	1.1	1.1
VBLL Yacht Regression	184.8	184.9	162.3	267.7
TabM California Housing	86.1	86.1	88.4	86.4
TimeXer PJM Forecasting	64.4	64.4	73.5	73.5
ABLkit HWF Reasoning	98.3	95.1	98.4	97.8
tunedGNN Cora GCN	98.5	97.6	98.5	98.8
verl GRPO GSM8K	99.3	97.8	98.4	97.3
ForestDiffusion Iris	101.1	100.9	100.9	101.1
VAR ImageNet 256	5.4	4.9	5.0	4.7
RAGEN Bandit Alignment	99.7	99.5	99.9	99.8
Chronos Weather Forecasting	39.7	40.2	40.2	39.8
HyperbolicCV CIFAR-100	28.2	26.6	27.9	36.6
iTransformer ETTm2 Forecasting	97.9	97.8	98.3	98.3
TimeMixer ETTm2 Forecasting	99.2	98.7	98.6	98.9
ART 2048	0.0	0.0	0.0	60.0
Multimodal Open-R1 MathVista	94.2	94.4	80.0	94.2
RankUp UTKFace Regression	22.2	30.7	6.8	17.5
SparseTSF ETTm1 Forecasting	93.2	93.7	92.5	92.5
SimpleRL MATH-500	15.1	15.7	16.3	15.1

Table 57 Per-task anchor attainment after the second intervention in the harness ablation evaluation, reported as percentages.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	68.7	71.9	68.7	71.9
ConvKAN CIFAR-10	57.0	50.4	25.6	27.2
Open-R1 MATH-500	55.4	56.8	54.2	54.2
Room Selector Tuning	124.3	133.9	138.7	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9	99.9
ModernBERT MNLI	40.9	49.0	39.2	39.2
AirBench CIFAR-10	94.8	94.4	94.9	94.9
NoisyGL Cora GCN	99.4	97.1	97.5	99.6
TabMini Promoters	104.3	105.6	99.8	99.8
Adult Tabular Diffusion	102.2	102.0	100.9	102.0
xLSTM Parity	2.1	2.1	1.1	0.9
VBLL Yacht Regression	258.1	247.0	162.3	179.6
TabM California Housing	88.9	88.9	88.9	87.1
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5
ABLkit HWF Reasoning	98.1	98.0	98.0	98.4
tunedGNN Cora GCN	100.1	98.5	99.2	96.6
verl GRPO GSM8K	99.7	97.6	98.6	96.2
ForestDiffusion Iris	99.4	100.9	100.9	100.9
VAR ImageNet 256	5.0	4.5	5.0	5.4
RAGEN Bandit Alignment	99.4	99.6	99.9	99.5
Chronos Weather Forecasting	25.0	40.2	40.5	40.5
HyperbolicCV CIFAR-100	28.8	28.8	37.4	38.1
iTransformer ETTm2 Forecasting	98.4	96.5	98.3	98.3
TimeMixer ETTm2 Forecasting	98.7	99.2	98.9	98.6
ART 2048	0.0	60.0	0.0	20.0
Multimodal Open-R1 MathVista	94.6	94.2	94.6	94.4
RankUp UTKFace Regression	24.3	31.4	7.2	29.4
SparseTSF ETTm1 Forecasting	93.7	93.2	81.0	92.5
SimpleRL MATH-500	17.4	15.1	13.4	16.3

Table 58 Per-task anchor attainment after the third intervention in the harness ablation evaluation, reported as percentages.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	75.9	78.8	75.9	78.9
ConvKAN CIFAR-10	24.6	29.0	19.3	32.1
Open-R1 MATH-500	55.4	56.8	54.2	56.8
Room Selector Tuning	124.3	138.7	138.7	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9	99.9
ModernBERT MNLI	44.2	51.4	40.5	41.8
AirBench CIFAR-10	94.9	94.9	95.0	94.9
NoisyGL Cora GCN	99.6	99.1	98.5	99.6
TabMini Promoters	105.3	104.3	99.8	99.5
Adult Tabular Diffusion	101.7	101.9	100.7	102.0
xLSTM Parity	-3.5	2.1	1.1	1.1
VBLL Yacht Regression	258.1	257.9	162.3	267.7
TabM California Housing	88.9	89.2	88.9	88.9
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5
ABLkit HWF Reasoning	98.2	98.6	98.4	98.1
tunedGNN Cora GCN	100.1	97.4	99.2	98.8
verl GRPO GSM8K	98.5	97.4	98.5	96.8
ForestDiffusion Iris	100.9	100.1	100.9	100.9
VAR ImageNet 256	4.8	4.4	5.0	5.5
RAGEN Bandit Alignment	99.8	100.0	99.8	99.9
Chronos Weather Forecasting	38.7	29.4	24.5	40.7
HyperbolicCV CIFAR-100	28.6	38.8	37.4	35.5
iTransformer ETTm2 Forecasting	96.7	98.5	98.3	98.3
TimeMixer ETTm2 Forecasting	99.3	98.8	98.9	98.9
ART 2048	13.3	26.7	0.0	93.3
Multimodal Open-R1 MathVista	94.4	89.7	94.6	94.6
RankUp UTKFace Regression	29.8	10.8	27.3	6.5
SparseTSF ETTm1 Forecasting	92.3	96.3	92.5	92.5
SimpleRL MATH-500	16.3	21.2	16.3	19.5

Table 59 Per-task anchor attainment after the fourth intervention in the harness ablation evaluation, reported as percentages.

Task	AH-Claude	CC-CLI	AH-GPT	Codex-CLI
FineWeb Pretraining	77.7	81.6	77.7	81.7
ConvKAN CIFAR-10	44.7	26.1	35.2	28.5
Open-R1 MATH-500	55.4	56.8	54.2	56.8
Room Selector Tuning	119.6	138.7	138.7	138.7
Uni2TS ETTh1 Forecasting	100.0	100.0	100.0	100.0
TimesFM Long Horizon	99.9	99.9	99.9	99.9
ModernBERT MNLI	42.1	48.9	42.2	42.3
AirBench CIFAR-10	94.9	94.9	95.0	94.8
NoisyGL Cora GCN	99.6	99.8	98.5	99.6
TabMini Promoters	104.3	105.6	99.8	99.5
Adult Tabular Diffusion	102.0	102.0	100.9	102.1
xLSTM Parity	2.1	2.1	1.1	1.1
VBLL Yacht Regression	258.1	289.2	162.3	267.7
TabM California Housing	85.4	88.3	88.9	88.9
TimeXer PJM Forecasting	73.5	73.5	73.5	73.5
ABLkit HWF Reasoning	98.1	98.0	98.2	98.5
tunedGNN Cora GCN	100.1	98.5	99.2	98.8
verl GRPO GSM8K	99.2	97.1	99.1	97.5
ForestDiffusion Iris	100.9	100.9	100.9	99.4
VAR ImageNet 256	4.7	4.3	5.0	5.3
RAGEN Bandit Alignment	99.6	99.9	99.8	99.7
Chronos Weather Forecasting	39.9	40.5	40.5	32.6
HyperbolicCV CIFAR-100	39.0	42.3	37.3	33.0
iTransformer ETTm2 Forecasting	97.5	98.4	98.3	98.3
TimeMixer ETTm2 Forecasting	99.3	96.2	98.9	98.9
ART 2048	13.3	40.0	46.7	0.0
Multimodal Open-R1 MathVista	94.6	94.6	94.6	94.6
RankUp UTKFace Regression	29.3	29.1	10.3	22.1
SparseTSF ETTm1 Forecasting	96.3	98.4	92.5	92.5
SimpleRL MATH-500	13.4	19.5	11.0	13.4

Table 60 Per-task anchor attainment after the fifth intervention in the harness ablation evaluation, reported as percentages.