

On-Policy Self-Distillation without Any Supervision

Yijiang Li[♣] Bingyang Wang[♡] Yijun Liang[◇] Yunjie Tian[♣]
Di Fu[♣] Nuno Vasconcelos[♣]

[♣]UC San Diego [♡]Georgia Institute of Technology
[◇]University of Maryland, College Park [♣]ByteDance
{yijiangli, nuno}@ucsd.edu

Abstract

On-policy (Self-)Distillation (OPD / OPSD) has shown strong potential for post-training large language models (LLMs). However, existing methods still rely heavily on external supervision, including ground-truth signals, environmental feedback, or guidance from larger models, and therefore fall short of genuine “self”-distillation. In this study, we show that on-policy self-distillation can be achieved using only a model’s own generations via internal consistency. We propose unsupervised on-policy self-distillation (U-OPSD). U-OPSD first samples multiple rollouts and constructs a pseudo solution by majority vote under a self-consistency threshold. It then conditions a teacher distribution on the shortest pseudo-solution and distills it into prefixes of the model’s longest incorrect completion, allowing the model to correct itself precisely where it is confidently wrong. Across diverse benchmarks, base models, and training settings, U-OPSD consistently improves over the base models and matches or surpasses supervised methods with ground truth (GT) such as OPSD and GRPO. On AIME24, AIME25, HMMT25, MATH500, and AMC23, U-OPSD improves over the base model by 8.5% and 10.7% on Qwen3 non-thinking mode at 4B and 8B scales, and outperforms OPSD by 3.2% and 2.3% on average, respectively. In thinking mode, U-OPSD stays on par with OPSD, ahead by 0.9% at 4B and level at 8B and surpassing GRPO by 0.7% and 1.1%, respectively.

1 Introduction

Post-training has emerged as a key driver of advances in the reasoning capabilities of large language models (LLMs), with progress largely propelled by supervised fine-tuning (SFT) [Ye et al., 2025, Wen et al., 2025], knowledge distillation from stronger teachers [Abdin et al., 2025, Lu and Thinking Machines Lab, 2025], and reinforcement learning with verifiable rewards (RLVR) [MiniMax et al., 2025, DeepSeek-AI et al., 2025, Team et al., 2025].

Among the many recipes, *on-policy distillation* bridges SFT and RL by training on the model’s own generations, reducing the train-inference mismatch [Gu et al., 2024, Agarwal et al., 2024] and catastrophic forgetting [Shenfeld et al., 2026b] of teacher-forced SFT, while retaining dense token-level supervision instead of sparse scalar rewards. Subsequent work has continued the effort of OPD along its objective, supervision, and systems dimensions. DistiLLM [Ko et al., 2024] introduces skewed KL, while DistiLLM-2 applies asymmetric objectives to teacher- and student-generated responses [Ko et al., 2025]. Other work stabilizes long-horizon OPD by restricting supervision to teacher-supported tokens and masking unreliable signals [Fu et al., 2026], or reduces its systems overhead by precomputing teacher scores under a teacher-consistent offline pipeline [Wu et al., 2026]. More recent analyses further identify teacher–student mismatch and length exploitation as key failure modes, motivating clipped and log-compressed token-level guidance [Wang et al., 2026]. Nevertheless, these methods still heavily rely on a separate strong teacher model for guidance.

On-policy *self*-distillation (OPSD) [Zhao et al., 2026] pushes this further by removing the need for a stronger teacher model – a single LLM plays both roles, where the teacher (student itself) conditions on the ground-truth solution, whereas the student sees only the problem. Subsequent work identifies information leakage and instability [Yang et al., 2026], redesigns the privileged context [Ye et al., 2026, Penalzoa et al., 2026, Sang et al., 2026a], and extends it to agentic setups [Liu et al., 2026a, Yang et al., 2026].

The privileged context, however, is also its own bottleneck. Existing OPD and OPSD methods rely on external supervision, such as ground-truth solutions, environmental feedback, or guidance from larger models. Thus, the model is self-distilled only in the sense that the teacher and student share parameters; the information that makes the teacher more capable still comes from outside the model. This dependence limits scalability to unlabeled problems and restricts applicability in domains where supervision is costly, unreliable, or unavailable. We therefore ask: *Does the teacher in on-policy self-distillation need a ground-truth solution? Can a model construct its own privileged context and perform genuine self-distillation?*

We answer with U-OPSD, an unsupervised on-policy self-distillation method that requires no external supervision. Our key observation is that although an individual rollout may be unreliable, agreement among multiple independently sampled rollouts provides an endogenous confidence signal. This makes it possible to derive both the teacher reference and the student trajectories entirely from the model’s own on-policy samples. Formally, for each unlabeled problem $x \sim \mathcal{U}$, we sample G independent rollouts $y^{(1)}, \dots, y^{(G)} \stackrel{\text{i.i.d.}}{\sim} \bar{\pi}(\cdot \mid x)$, where $\mathcal{U}$ is the unlabeled problem distribution, G is the number of rollouts per problem, and $\bar{\pi} \triangleq \pi_{\text{sg}[\theta]}$ denotes a stop-gradient copy of the current policy π_θ . We extract the final answers from each rollout as $a^{(g)} = \text{Ans}(y^{(g)})$, where $\text{Ans}(\cdot)$ denotes the answer-extraction and canonicalization function, and obtain the vote-based *pseudo-answer* $\tilde{a}(x) = \arg \max_a \sum_{g=1}^G \mathbb{1}[a^{(g)} = a]$, where $\mathbb{1}[\cdot]$ is the indicator function.

The rollouts are then partitioned into agreeing and disagreeing multisets $\mathcal{Y}_x^+ = \{y^{(g)} : a^{(g)} = \tilde{a}(x)\}$, $\mathcal{Y}_x^- = \{y^{(g)} : a^{(g)} \neq \tilde{a}(x)\}$. When the winning vote fraction reaches a self-consistency threshold τ , the shortest agreeing rollout $y^+ \in \arg \min_{y \in \mathcal{Y}_x^+} |y|$ serves as the *pseudo-solution*, while the disagreeing rollouts in $\mathcal{Y}_x^-$ serve as the student trajectories. By distilling the teacher distribution conditioned on the pseudo-solution into the student along prefixes of the model’s disagreeing completions, U-OPSD achieves continual improvement through on-policy self-distillation without any external supervision.

$$\mathcal{L}_{\text{U-OPSD}}(\theta) = \mathbb{E}_{x \sim \mathcal{U}} \mathbb{E}_{\{y^{(g)}\}_{g=1}^G \sim \bar{\pi}(\cdot \mid x)} \left[\mathbb{1}[\mathcal{Y}_x^- \neq \emptyset] \frac{1}{|\mathcal{Y}_x^-|} \sum_{y^- \in \mathcal{Y}_x^-} \frac{1}{|y^-|} \sum_{n=1}^{|y^-|} D_\beta(\bar{\pi}(\cdot \mid x, y^+, y_{<n}^-) \parallel \pi_\theta(\cdot \mid x, y_{<n}^-)) \right]. \quad (1)$$

Here, $|y^-|$ denotes the token length of a disagreeing rollout, and $y_{<n}^-$ denotes its prefix before token position n . The function $D_\beta(P \parallel Q)$ denotes a divergence between the teacher and student next-token distributions, such as the forward KL divergence $D_{\text{KL}}(P \parallel Q)$.

We evaluate U-OPSD on five mathematical reasoning benchmarks across six Qwen3 configurations: 4B and 8B models in both non-thinking and thinking modes, together with Qwen3-4B-Instruct-2507 and Qwen3-30B-A3B-Instruct-2507. Across all configurations, U-OPSD improves over the base model, by 8.5–10.7 points in non-thinking mode, 1.9–2.2 in thinking mode, and 1.7–1.8 on the Instruct models. U-OPSD also improves over prior self-rewarding RL methods by a large margin, i.e., on average 7.0–11.3% in non-thinking mode and 0.8–1.4% in thinking mode, showing that consensus is substantially more effective as conditioning context for token-level distillation than as a scalar reward for policy optimization. Without any external supervision, U-OPSD is still on par with or better than supervised SFT, GRPO, and OPSD with GT labels, with gains of up to 10.9, 8.9, and 3.2 points, respectively, while tying OPSD only in the 8B thinking setting.

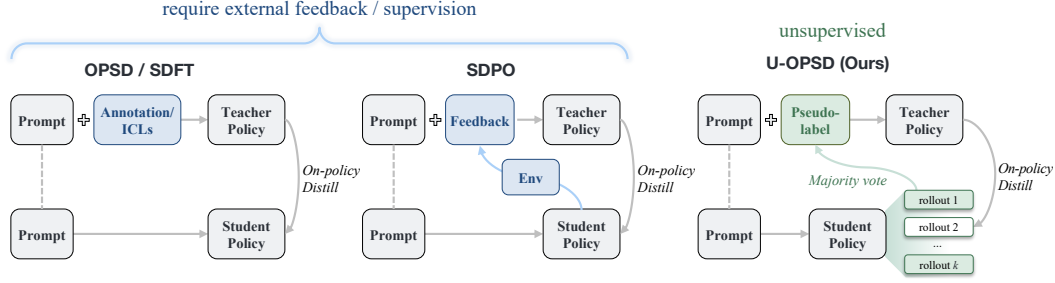


Figure 1: Comparison between OPSD / SDFT with ground-truth solution or ICLs (left), SDPO with rich feedback from the environment (middle) and our U-OPSD without any supervision.

2 Related work

Self-rewarding Reinforcement Learning. Although RLVR has proven effective at strengthening LLM reasoning [Shao et al., 2024, DeepSeek-AI et al., 2025], it hinges on curated ground-truth labels, whose cost and scarcity quickly become the limiting factor [Yue et al., 2025]. A growing body of work replaces external verification with reward signals the model derives from its own behavior on unlabeled data. Among these intrinsic signals, confidence-based rewards are especially appealing: a model’s certainty in its own output—captured directly as self-certainty [Zhao et al., 2025b, Li et al., 2025] or inversely through predictive entropy [Prabhudesai et al., 2025, Zhang et al., 2025]—yields a dense, label-free reward that requires no extra sampling infrastructure and correlates well with answer correctness. Agreement across sampled solutions offers a complementary signal, as exploited by majority voting [Wang et al., 2023] and test-time training on self-consistency [Zuo et al., 2025]. These methods build on earlier self-rewarding language models [Yuan et al., 2024b] and self-play supervision [Chen et al., 2024], and the paradigm has since broadened to unsupervised self-training [Xu et al., 2025, Fang et al., 2025], self-correction guided by the model’s own judgments [Xiong et al., 2025], and zero-data self-evolution in which models construct their own curricula [Zhao et al., 2025a, Huang et al., 2025, Liu et al., 2025].

On-policy (self-) distillation. On-policy distillation trains on student-generated trajectories, allowing a teacher to provide dense token-level supervision at states visited by the student and reducing the train–inference mismatch of off-policy distillation [Gu et al., 2024, Agarwal et al., 2024]. On-policy self-distillation removes the separate teacher by letting the same model act under asymmetric contexts, with the teacher conditioned on verified solutions [Zhao et al., 2026], demonstrations or in-context examples [Shenfeld et al., 2026a], privileged observations [Penaloza et al., 2026], or environmental feedback [Hübötter et al., 2026]. Subsequent work explores alternative conditioning signals [Sang et al., 2026b], derives process supervision from externally verified successful and unsuccessful trajectories [Tan and Hong, 2026], or modulates token-level supervision according to teacher reliability [Ke et al., 2026, Liu et al., 2026b]. U-OPSD instead constructs the teacher reference from rollout agreement and identifies correction targets through rollout disagreement, without annotations, demonstrations, environmental feedback, gold answers, or externally verified outcomes.

Self-training, self-distillation and consistency. Self-training improves models using supervision derived from their own generations. Existing methods select or refine self-generated data using answer verification and reward signals [Zelikman et al., 2022, Yuan et al., 2023, Gulcehre et al., 2023], as well as confidence, consistency, and iterative self-improvement [Huang et al., 2022, Liang et al., 2026]. More broadly, self-distillation transfers knowledge across different instances or views of the same model, including previous model generations and intermediate optimization snapshots [Furlanello et al., 2018, Yang et al., 2018]. Other approaches distill across architectural branches or augmented views [Zhang et al., 2019, Caron et al., 2021], while recent work extends self-distillation to foundation models using diverse reasoning traces or multiple self-teachers [Wu et al., 2025, Jin et al., 2026]. Self-consistency originally aggregates multiple reasoning paths through majority voting at inference time [Wang et al., 2023], while subsequent methods turn agreement into sequence-level preferences [Prasad et al., 2024], pseudo-labels or scalar reinforcement-learning rewards [Zuo et al.,

2025, Shafayat et al., 2025], or model-generated feedback and preferences [Yuan et al., 2024a]. U-OPSD connects self-consistency with on-policy self-distillation by using consensus to construct an instance-specific self-teacher and transferring dense next-token distributional supervision along prefixes of consensus-disagreeing rollouts.

3 Method

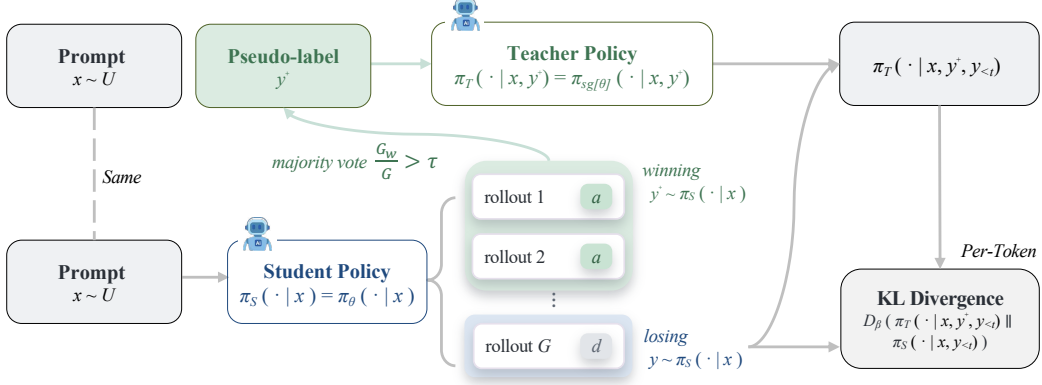


Figure 2: Overview of Unsupervised On-policy Self-Distillation (U-OPSD), which replaces ground-truth supervision in On-Policy Self-distillation with pseudo-labels generated from the model’s own majority-vote consensus.

3.1 Preliminaries

Notation. Let π_θ be an LLM defining next-token distributions $\pi_\theta(\cdot | c)$ over a vocabulary $\mathcal{V}$ for a context c , and let $\bar{\pi} \triangleq \pi_{\text{sg}[\theta]}$ be the same network with gradients detached, so that sampling from or scoring under $\bar{\pi}$ carries no gradient. For a sequence y , $y_{<t}$ denotes its prefix, and $\text{Ans}(y) \in \mathcal{A} \cup \{\emptyset\}$ the final answer parsed from it, where $\mathcal{A}$ is the space of admissible answers and $\emptyset$ marks a generation from which no answer can be parsed (Appendix C). Supervised post-training draws from a labeled corpus $\mathcal{S} = \{(x, y^*)\}$ of problems with reference solutions and gold answers $a^* = \text{Ans}(y^*)$; U-OPSD uses only unlabeled problems $x \sim \mathcal{U}$. Throughout, D_β denotes the generalized Jensen–Shannon divergence between distributions on $\mathcal{V}$, whose $\beta \rightarrow 0$ limit is the forward KL.

Group Relative Policy Optimization: sparse signal by verifiable reward. GRPO [Shao et al., 2024] optimizes the policy with a verifiable reward normalized within a group of sampled rollouts: for each problem it samples G rollouts $y^{(1)}, \dots, y^{(G)}$, scores them with $r^{(g)} = \mathbb{1}[\text{Ans}(y^{(g)}) = a^*]$, and normalizes within the group, $A^{(g)} = (r^{(g)} - \text{mean}\{r^{(j)}\}_{j=1}^G) / \text{std}\{r^{(j)}\}_{j=1}^G$, so that all tokens of a rollout share one sequence-level advantage. The policy is then updated on the clipped surrogate

$$\mathcal{L}_{\text{GRPO}}(\theta) = -\mathbb{E}_{x \sim \mathcal{S}} \mathbb{E}_{\{y^{(g)}\}_{g=1}^G \sim \bar{\pi}(\cdot | x)} \frac{1}{G} \sum_{g=1}^G \frac{1}{|y^{(g)}|} \sum_{t=1}^{|y^{(g)}|} \min\left(\rho_t^{(g)} A^{(g)}, \text{clip}\left(\rho_t^{(g)}, 1-\varepsilon, 1+\varepsilon\right) A^{(g)}\right), \quad (2)$$

where $\rho_t^{(g)} = \pi_\theta(y_t^{(g)} | x, y_{<t}^{(g)}) / \bar{\pi}(y_t^{(g)} | x, y_{<t}^{(g)})$ is the importance ratio to the behaviour policy and ε is the clipping range. The supervision is the gold answer a^* , and the signal is sparse: it is sequence-level, and vanishes whenever all G rewards coincide.

On-policy distillation: dense signal by external teacher. On-policy distillation (OPD) addresses this sparsity by retaining the model’s own rollouts as training trajectories while replacing the scalar reward with dense supervision from a teacher’s next-token distribution. The student is conditioned only on the problem x , matching inference time, while the teacher receives a possibly richer context c . Writing π_T for the teacher, these methods share the form

$$\mathcal{L}_{\text{OPD}}(\theta) = \mathbb{E}_x \mathbb{E}_{y \sim \bar{\pi}(\cdot|x)} \sum_{t=1}^{|y|} D_\beta(\pi_T(\cdot | c, y_{<t}) \parallel \pi_\theta(\cdot | x, y_{<t})), \quad (3)$$

which yields dense token-level supervision at states the student actually visits. Variants differ only in the choice of teacher π_T and the context c it receives. OPD [Gu et al., 2024, Agarwal et al., 2024, Lu and Thinking Machines Lab, 2025] takes π_T to be a separate, typically stronger model with $c = x$; the supervision is dense, but it resides in an external teacher that must already surpass the model being trained.

On-policy self-distillation. OPSD [Zhao et al., 2026] takes a further step by constructing the teacher and student from the same language model under different conditioning contexts, removing the external teacher and supplying a *gold solution* in its place. The student policy observes only the problem statement x , matching inference time, while the teacher policy conditions on both the problem statement x and the GT solution y^* :

$$\pi_S(\cdot | x) \triangleq \pi_\theta(\cdot | x), \quad \pi_T(\cdot | x, y^*) \triangleq \bar{\pi}(\cdot | x, y^*).$$

Given a problem x paired with a GT solution y^* , OPSD samples the full next-token distribution from both policies, then minimizes a token-level divergence between them:

$$\mathcal{L}_{\text{OPSD}}(\theta) = \mathbb{E}_{(x, y^*) \sim \mathcal{S}} \mathbb{E}_{y \sim \bar{\pi}(\cdot|x)} \sum_{t=1}^{|y|} D_\beta(\pi_T(\cdot | x, y^*, y_{<t}) \parallel \pi_S(\cdot | x, y_{<t})). \quad (4)$$

Because the teacher sees y^* , its next-token distribution along the student’s trajectory encodes what a model that already knows the solution would do at each position, and matching it distills solution-conditioned behavior into the solution-free policy. Following the strongest OPSD configuration, we use $\beta = 0$ (forward KL, teacher $\rightarrow$ student) with per-token point-wise clipping for stability. Teacher and student share parameters, yet OPSD still requires external supervision, i.e., the reference solution y^* .

Across Eqs. (3)–(4), external supervision enters as the gold answer a^* , the external teacher π_T , or the reference solution y^* .

3.2 U-OPSD: On-Policy Self-Distillation without Any Supervision

Despite on-policy training, these methods remain externally supervised. RLVR relies on gold answers for verification, OPD on a stronger teacher, and OPSD and related work on privileged teacher contexts such as GT solutions [Zhao et al., 2026], demonstrations [Shenfeld et al., 2026a], or environmental feedback [Hübotter et al., 2026] (see the left of Figure 1). U-OPSD removes this dependence by enabling the model to construct its own privileged context through internal consistency, i.e., a majority vote over its own rollouts that identifies a pseudo-solution in place of y^* , while the resulting conditional teacher distribution is distilled into the student on the disagreeing rollouts (Figure 1, right).

(1) Sample. For each prompt, draw G rollouts $y^{(1)}, \dots, y^{(G)} \sim \bar{\pi}(\cdot | x)$ at the training temperature and parse $a^{(g)} = \text{Ans}(y^{(g)}) \in \mathcal{A} \cup \{\emptyset\}$ (i.e., extract the final answer $a^{(g)}$ from `\boxed{\dots}` with normalization and canonicalization; see Appendix C). $\emptyset$ marks rollouts without a parsable final answer (usually truncations), which we call *invalid*.

(2) Vote. Among the valid answers, we define the pseudo-answer $\tilde{a}(x)$ as the plurality vote, breaking ties uniformly at random [Wang et al., 2023]. This vote partitions the rollouts into agreeing and disagreeing sets $\mathcal{Y}_x^+ = \{y^{(g)} : a^{(g)} = \tilde{a}(x)\}$, $\mathcal{Y}_x^- = \{y^{(g)} : a^{(g)} \neq \tilde{a}(x)\}$. Invalid rollouts belong to neither set, as an incomplete generation provides evidence of neither a correct nor an incorrect belief. We quantify vote confidence using the self-consistency score $c(x) = \frac{1}{G} \sum_{g=1}^G \mathbb{1}[a^{(g)} = \tilde{a}(x)]$.

The score is normalized by the total number of sampled rollouts G , rather than only by the number of valid rollouts where truncated generations reduce confidence. If $c(x) < \tau$, the prompt is treated as unlabeled and contributes no gradient in the training step. We set $\tau = 1/2$ for an absolute majority.

(3) Distill. Given a valid majority vote, we select an agreeing rollout from $y^+ \in \mathcal{Y}_x^+$ as the teacher reference in place of y^* and distill the teacher into the student on the disagreeing rollouts $\mathcal{Y}_x^-$. Substituting the pseudo solution (x, y^+) into Eq. (4) yields

$$\mathcal{L}_{\text{U-OPSD}}(\theta) = \sum_{i \in W_k} \sum_{t=1}^{|y^{(i)}|} D_\beta \left(\bar{\pi}(\cdot \mid x, y^+, y_{<t}^{(i)}) \parallel \pi_\theta(\cdot \mid x, y_{<t}^{(i)}) \right). \quad (5)$$

The above skips two classes of samples: those for which the model cannot form a sufficiently consistent vote ($c(x) < \tau$), making the pseudo-answer unreliable, and those for which all valid rollouts already agree ($\mathcal{Y}_x^- = \emptyset$), leaving no disagreement to correct. Training therefore focuses on the model’s competence frontier: prompts for which it can consistently identify a plausible solution but still assigns substantial probability to conflicting trajectories. This curriculum emerges directly from the model’s own voting statistics, without external difficulty labels or scheduling.

Unlike OPSD, U-OPSD requires no labeled pair (x, y^*) ; its privileged context is constructed entirely from the model’s own on-policy rollouts. Unlike conventional majority-vote self-training, it does not simply imitate the selected response under teacher-forced prefixes. Instead, it transfers the solution-conditioned next-token distribution along the model’s own disagreeing trajectories, providing dense corrective supervision precisely at the prefixes that lead toward answers inconsistent with the model’s consensus. In this way, U-OPSD enables iterative on-policy self-evolution and self-improvement.

Algorithm 1 U-OPSD: unsupervised on-policy self-distillation (one prompt)

Require: prompt x ; student π_θ ; detached teacher $\bar{\pi}$; rollouts G ; threshold τ

- 1: sample $y^{(1)}, \dots, y^{(G)} \stackrel{\text{i.i.d.}}{\sim} \bar{\pi}(\cdot \mid x)$ ▷ on-policy, training temperature
 - 2: $a^{(g)} \leftarrow \text{Ans}(y^{(g)})$ for all g ▷ $\emptyset$ if unparsable
 - 3: $\tilde{a}(x) \leftarrow \text{plurality of } \{a^{(g)} : a^{(g)} \neq \emptyset\}$; $c(x) \leftarrow \frac{1}{G} \sum_g \mathbb{1}[a^{(g)} = \tilde{a}(x)]$
 - 4: $\mathcal{Y}_x^+ \leftarrow \{y^{(g)} : a^{(g)} = \tilde{a}(x)\}$; $\mathcal{Y}_x^- \leftarrow \{y^{(g)} : a^{(g)} \notin \{\tilde{a}(x), \emptyset\}\}$
 - 5: **if** $c(x) < \tau$ **or** $\mathcal{Y}_x^- = \emptyset$ **then**
 - 6: **return** ▷ vote not trusted, or nothing to correct
 - 7: **end if**
 - 8: select $y^+ \in \mathcal{Y}_x^+$ and $\mathcal{B}_x^- \subseteq \mathcal{Y}_x^-$ ▷ design choices; defaults: shortest agreeing, one uniform disagreeing
 - 9: minimize $\frac{1}{|\mathcal{B}_x^-|} \sum_{y^- \in \mathcal{B}_x^-} \sum_{t=1}^{|y^-|} D_\beta(\bar{\pi}(\cdot \mid x, y^+, y_{<t}^-) \parallel \pi_\theta(\cdot \mid x, y_{<t}^-))$
-

4 Experiments

4.1 Setup

Models and datasets. We adopt four variants of Qwen3 [Yang et al., 2025], including Qwen3-4B, Qwen3-8B, Qwen3-30B-A3B-Instruct-2507 and Qwen3-4B-Instruct-2507. For Qwen3-4B and Qwen3-8B, we train them in both non-thinking and thinking modes. In all experiments, the same checkpoint serves as both student and teacher. For the training set, we adopt a 30k subset of OpenThoughts [Guha et al., 2025] following OPSD; U-OPSD uses only the problem statements, never the solution field. We compare against three supervised baselines trained on the same prompts: SFT on their gold solutions, GRPO with binary outcome rewards verified against the gold answer, and OPSD, which conditions the teacher on the gold solution.

Evaluation and benchmarks. We adopt five competition-level math reasoning benchmarks: AIME24, AIME25, and HMMT25 at avg@12, and MATH500 [Hendrycks et al., 2021, Lightman et al., 2024] and AMC23 at avg@4. We follow OPSD’s protocol for decoding using vLLM at

temperature 1.0 with maximum generation length 38k, in the same reasoning mode the model was trained in.

For U-OPSD and OPSD, we evaluate checkpoints every 25 steps up to 150 steps and report the best score. For GRPO and SFT, we follow OPSD’s setup: for GRPO, we report the peak performance within 500 training steps. For SFT, we train on the same number of samples as OPSD. For TTRL, RENT and Intuitior, we adopt the same training setup as U-OPSD, i.e., training with the same rollout budget and the same prompt set.

Implementation details. We follow most of OPSD’s training recipe [Zhao et al., 2026]: we use forward KL ($\beta=0$) over the full vocabulary with per-token pointwise clipping as the objective. We also adopt a teacher fixed to the initial policy rather than the running one to ensure fair comparison. Both choices are supported by ablations in Zhao et al. [2026]. We use LoRA of rank 64 ($\alpha=128$) on all attention and MLP projections, a learning rate of 5×10^{-6} , gradient-norm clipping at 0.1, and sampling at temperature 1.1 with top- p 0.95 and top- k 20. All runs are trained for 150 steps with a checkpoint every 25.

For U-OPSD, we introduce two unique hyperparameters: for each prompt, we generate $G=8$ rollouts independently, filtered by confidence threshold $\tau=0.5$ (default unless specified otherwise), where supervised OPSD uses 32 prompts and a single rollout. We also increase the maximum completion length from 1,024 to 4,096 tokens, as U-OPSD requires rollouts to reach a boxed final answer; Zhao et al. [2026] report comparable performance between these two token budgets in their setting. For reasoning-mode experiments, following OPSD, we keep the teacher in reasoning mode and distill its behavior into a student in non-reasoning mode, while evaluating the resulting model in reasoning mode. For non-reasoning experiments, both the teacher and student are in non-reasoning mode during training, and evaluation is likewise conducted in non-reasoning mode.

Table 1: Performance comparison on math reasoning benchmarks for Qwen3 models with non-thinking mode.

Method		AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
<i>Qwen3-4B</i>							
<i>w/ GT.</i>	Base	25.83	17.78	10.83	84.10	66.25	40.96
	+ SFT	26.67	19.72	13.06	84.85	69.38	42.73
	+ GRPO	25.00	22.50	15.00	86.20	80.62	45.86
	+ OPSD	32.22	20.83	16.39	85.75	76.25	46.29
<i>w/o GT.</i>	+ TTRL	25.00	20.83	11.94	83.60	67.50	41.77
	+ RENT	22.22	20.28	11.39	84.00	74.38	42.45
	+ Intuitior	23.89	20.00	11.67	83.70	70.62	41.98
	+ U-OPSD	37.50	27.78	14.44	86.50	81.25	49.49
<i>Qwen3-8B</i>							
<i>w/ GT.</i>	Base	27.50	23.33	13.61	84.05	69.38	43.57
	+ SFT	26.94	21.67	11.94	84.10	72.50	43.43
	+ GRPO	30.56	21.94	13.06	87.85	73.75	45.43
	+ OPSD	41.67	28.06	18.33	87.15	85.00	52.04
<i>w/o GT.</i>	+ TTRL	27.22	21.11	13.06	84.45	71.88	43.54
	+ RENT	28.33	21.67	10.83	84.00	70.00	42.97
	+ Intuitior	26.11	22.50	11.67	84.20	73.12	43.52
	+ U-OPSD	45.56	34.72	18.61	89.55	83.12	54.31

4.2 Main results

Non-thinking mode. Table 1 reports the results in non-thinking mode. U-OPSD achieves average scores of 49.49 and 54.31 on Qwen3-4B and Qwen3-8B, improving over the corresponding base models by 8.5 and 10.7 points. Despite using no ground-truth solutions, U-OPSD outperforms all supervised baselines, including SFT, GRPO, and OPSD, exceeding OPSD by 3.2 and 2.3 points at the two model scales. These gains are consistent across benchmarks: U-OPSD obtains the best result on four of the five benchmarks for both models. In contrast, the label-free RL baselines improve over the base models by at most 1.5 points under the same rollout budget. This comparison highlights

Table 2: Thinking mode, per benchmark at step 150, under the protocol of Table 1. Shading and bold as in that table.

	Method	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
<i>Qwen3-4B</i>							
<i>w/ GT.</i>	Base	74.17	64.72	45.56	94.80	95.00	74.85
	+ SFT	73.06	69.17	41.67	95.40	94.38	74.73
	+ GRPO	73.89	69.44	43.61	95.45	99.38	76.35
	+ OPSD	75.28	68.06	43.06	95.20	99.38	76.20
<i>w/o GT.</i>	+ TTRL	72.78	68.33	45.56	95.90	96.25	75.76
	+ RENT	74.72	65.83	43.06	95.25	99.38	75.65
	+ Intuitor	76.39	68.33	42.78	95.35	97.50	76.07
	+ U-OPSD	76.39	68.06	46.94	95.75	98.12	77.05
<i>Qwen3-8B</i>							
<i>w/ GT.</i>	Base	75.56	66.67	45.00	96.35	96.88	76.09
	+ SFT	76.39	69.72	43.89	95.80	95.00	76.16
	+ GRPO	76.94	69.17	47.78	95.70	95.00	76.92
	+ OPSD	80.83	69.72	46.67	95.75	96.88	77.97
<i>w/o GT.</i>	+ TTRL	77.22	68.61	46.94	95.75	96.25	76.95
	+ RENT	77.50	70.28	45.83	95.95	96.25	77.16
	+ Intuitor	76.94	70.28	44.17	96.20	95.62	76.64
	+ U-OPSD	76.94	71.39	47.50	96.00	98.12	77.99

Table 3: Qwen3-30B-A3B-Instruct-2507, non-thinking, scored as pass@1 rather than average@ n : generation i of every problem forms one single-sample run, and $i = 1, 2, 3$ give three estimates, reported as mean $\pm$ population standard deviation. Each arm is shown at the checkpoint with the best five-benchmark mean under this metric. Because the metric differs from Tables 1 and 2, the two are not comparable and the numbers are kept apart. Bold marks the best value in each column.

Model	Method	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
Qwen3-30B-A3B-Instruct-2507	Base	80.00 $\pm$ 0.00	63.33 $\pm$ 2.72	43.33 $\pm$ 2.72	96.33 $\pm$ 0.25	95.83 $\pm$ 1.18	75.77 $\pm$ 0.85
	OPSD	78.89 $\pm$ 3.14	61.11 $\pm$ 3.14	47.78 $\pm$ 1.57	97.20 $\pm$ 0.43	96.67 $\pm$ 2.36	76.33 $\pm$ 1.58
	U-OPSD	75.56 $\pm$ 5.67	65.56 $\pm$ 4.16	50.00 $\pm$ 0.00	97.00 $\pm$ 0.43	99.17 $\pm$ 1.18	77.46 $\pm$ 2.09
Qwen3-4B-Instruct-2507	Base	66.67 $\pm$ 7.20	53.33 $\pm$ 5.44	27.78 $\pm$ 4.16	93.87 $\pm$ 0.34	93.33 $\pm$ 1.18	67.00 $\pm$ 2.25
	OPSD	62.22 $\pm$ 5.09	52.22 $\pm$ 5.09	31.11 $\pm$ 5.09	94.93 $\pm$ 0.64	95.00 $\pm$ 0.00	67.10 $\pm$ 1.13
	U-OPSD	68.89 $\pm$ 5.67	57.78 $\pm$ 1.57	28.89 $\pm$ 3.14	94.20 $\pm$ 0.86	94.17 $\pm$ 1.18	68.78 $\pm$ 1.70

the advantage of using consensus-derived solutions as privileged teacher context for token-level distillation, rather than reducing them to scalar rewards.

Thinking mode. Table 2 presents the results in thinking mode. U-OPSD reaches 77.05 on Qwen3-4B and 77.99 on Qwen3-8B, improving over the base models by 2.2 and 1.9 points, respectively. It matches or slightly exceeds supervised OPSD and consistently outperforms GRPO in average performance. The smaller gains relative to non-thinking mode suggest that consensus-based self-distillation is most effective when the base model is sufficiently reliable to produce informative consensus while retaining substantial room for improvement; the stronger thinking-mode models leave less such headroom.

Instruction-tuned models. Table 3 further evaluates U-OPSD on two instruction-tuned checkpoints using pass@1. U-OPSD improves Qwen3-30B-A3B-Instruct-2507 from 75.77 to 77.46 and Qwen3-4B-Instruct-2507 from 67.00 to 68.78, achieving the highest average performance on both models. It also surpasses supervised OPSD by 1.1 and 1.7 points on average, though on Qwen3-4B-Instruct-2507 OPSD leads on HMMT25, MATH500 and AMC23. The result on Qwen3-30B-A3B-Instruct-2507 demonstrates that the same training recipe transfers effectively to a substantially larger mixture-of-experts model without model-specific hyperparameter tuning.

Training curves. Figure 3 plots the first four checkpoints of the Qwen3-4B runs on AIME24, AIME25 and MATH500 in both modes. The two modes separate immediately. In thinking mode

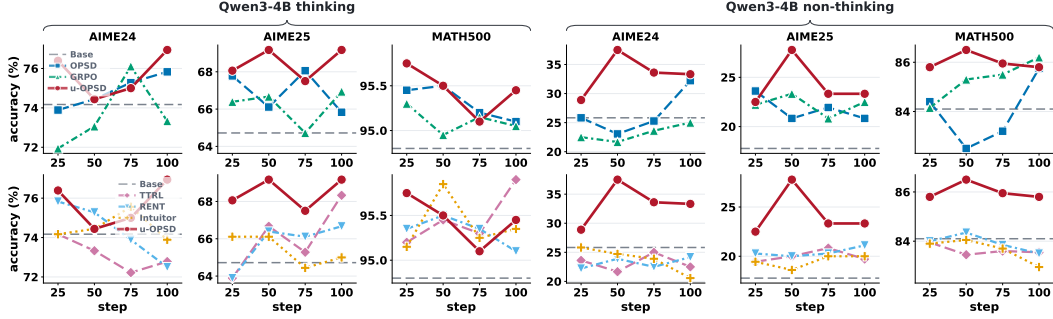


Figure 3: Training curves of the Qwen3-4B runs quoted in Tables 1 and 2, on AIME24, AIME25 and MATH500 over the first four checkpoints, in thinking (left three columns) and non-thinking mode (right three); the dashed line is the base model. **Top:** U-OPSD against the supervised arms. **Bottom:** U-OPSD against the label-free ones. The axis counts checkpoints: U-OPSD saves every 25 steps and GRPO every 50, so the GRPO points span its steps 50–200. The two modes separate at a glance—in non-thinking mode U-OPSD breaks away from every other arm, while in thinking mode all methods stay within about two points of base.

every method stays within about two points of the base model and the ordering changes from checkpoint to checkpoint, with the whole MATH500 panel spanning less than a point. The label-free baselines track the base model closely in both U-OPSD and in OPSD. In non-thinking mode U-OPSD is above every other method at every checkpoint on both AIME benchmarks, against the supervised and the label-free baselines alike, and its curves peak at step 50 rather than at the last checkpoint; on MATH500 the other methods catches up to the same level by step 100.

4.3 Ablation and analysis

Pseudo-label quality. On 64 training prompts under the full training configuration ($G=8$, 4096-token budget, $\tau=0.5$), 96.3% of rollouts yield a parsable boxed answer, 94.0% of prompts clear the self-consistency threshold and receive a pseudo-label, and 86.7% of those pseudo-labels match the gold answer from data source (used in supervised methods). Fewer than 10% of valid rollouts disagree with their prompt’s vote, so the distillation set is small and concentrated.

Divergence computation strategy. Full-vocabulary logit distillation [Agarwal et al., 2024] evaluates D_β over the entire vocabulary at each position, giving a proper token-level divergence between the two policies. Sampled-token distillation [Lu and Thinking Machines Lab, 2025] evaluates teacher and student log-probabilities only at the token the student sampled, and uses that term as a scalar advantage inside a policy-gradient objective. OPSD [Zhao et al., 2026] reports the full-distribution objective to be the stronger of the two under gold supervision, and because U-OPSD changes the teacher’s conditioning context rather than its objective, the open question is whether that preference survives once the privileged context is a pseudo-solution. Table 6 shows that it does, and by a wider margin: the full-distribution objective leads by 17.8 points on AIME25 and 7.5 on HMMT25, against 2.0 and 2.7 under gold supervision. Exposing the student to the entire teacher distribution therefore matters at least as much when that teacher is conditioned on the model’s own consensus.

Self-consistency threshold. The threshold τ decides which prompts are allowed to supervise. Figure 4 (left) sweeps it and the ranking is monotone: accepting every prompt ($\tau=0$) is best at 59.21, against 53.93 for the default and 44.40 at $\tau=0.9$ at step 150, with the best-checkpoint series ordered the same way. Accuracy falls monotonically as the threshold rises, so the filtering costs more than the label noise it removes.

Rollouts per prompt. G , number of rollouts per prompt, controls both the resolution of the vote and the pool from which disagreeing rollouts are drawn, and it is the dominant cost term, since the sampling cost grows linearly in G . Figure 4 (middle) shows the return is real but soon saturating: $G=4$ and $G=8$ are indistinguishable at 56.99 and 57.10 at the best checkpoint, $G=12$ gains 4.7

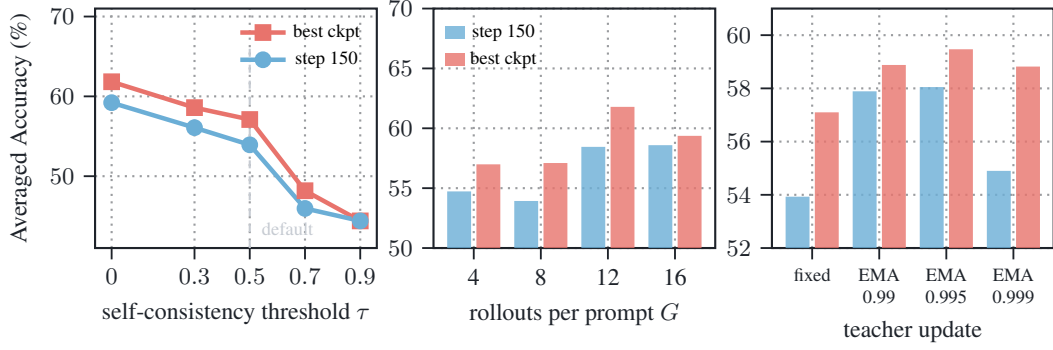


Figure 4: Configuration ablations, on Qwen3-8B non-thinking with longest-1. The vertical axis is accuracy averaged over the five evaluation benchmarks: AIME24, AIME25 and HMMT25 at avg@12, and MATH500 and AMC23 at avg@4. **Left:** self-consistency threshold τ , the fraction of valid rollouts that must agree for a prompt to receive a pseudo-label. **Middle:** rollouts per prompt G , at $\tau=0.5$. **Right:** how the teacher is updated; “fixed” freezes it at the initial policy and is our default, while the EMA rows let it track the student at the given decay. Per-benchmark numbers in Tables 10, 11 and 12.

Table 4: Performance under combinations of the teacher-reference selection (rows) and the distillation-target selection (columns), on Qwen3-8B non-thinking, $G=8$, $\tau=0.5$, $k=1$. Each cell is the five-benchmark average at the best checkpoint in 25–150, with the step given in parentheses. “label-only” strips the teacher’s reference down to the boxed pseudo-label.

Teacher ref. \ distill	longest	random	shortest
label-only	43.40 (125)	43.00 (100)	41.55 (25)
shortest (default)	57.10 (125)	54.37 (75)	55.23 (150)
random	57.96 (75)	56.93 (75)	55.77 (75)
longest	59.00 (75)	57.90 (100)	55.01 (125)

points over the default, and $G=16$ gives back half of that. We keep $G=8$ elsewhere because it is OPSD’s own generation budget and makes the comparison in Tables 1 and 2 cost-matched, but $G=12$ is the better operating point when generation is not the constraint.

Teacher update. OPSD [Zhao et al., 2026] freezes the teacher at the initial policy, which under LoRA means evaluating the base weights with the adapter disabled. We report the frozen teacher elsewhere because it is OPSD’s setting and keeps the comparison in Tables 1 and 2 matched. Yet, Figure 4 (right) and Table 12 show that the EMA settings offer more room for improvement: the best, at decay 0.995, gains 2.4 points over the frozen default at the best checkpoint and 4.1 at step 150, and the two faster decays land within 0.2 points of each other at step 150.

Teacher reference and distillation target. Table 4 crosses which agreeing rollout the teacher is conditioned on against which disagreeing rollout is distilled. Both axes favour the longest rollout, and the best cell conditions the teacher on the longest agreeing rollout. When the shortest is distilled the three references fall within 0.8 points of each other. Further stripping the reference to the boxed pseudo-label costs 11.4 to 15.6 points and puts all three label-only cells at or below the base model’s 43.57. Effective distillation requires the teacher to condition on the longer, full reasoning trace rather than only the final answer.

Selection of disagreeing rollouts. Table 5 sweeps the number of disagreeing rollouts cap $k \in \{1, 2, 3, \text{select all no cap}\}$ and longest 1 rollout under random selection. Every capped variant exceeds the supervised baseline in every cell, so U-OPSD’s effectiveness does not depend on the student-rollout selection tactic. Among them disagree-1 is the most consistent, leading in four of the five benchmarks tested at step 150, while disagree-3 attains the single best AIME25 checkpoint and ties longest-1 for the best on HMMT25, at the cost of larger swings. Removing the cap is clearly worst:

Table 5: Ablation of the disagreeing-rollout selection policy (matched decay schedule). Each cell shows step 150 / best checkpoint in 25–150. All variants use $G=8$, $\tau=0.5$.

Variant	AIME24	AIME25	HMMT25	MATH500	AMC23
OPSD (supervised)	27.50 / 27.50	20.00 / 23.61	12.50 / 13.33	83.80 / 84.65	71.88 / 72.50
disagree-1 (default)	33.89 / 35.28	27.78 / 27.78	14.72 / 16.11	87.60 / 87.60	79.38 / 79.38
disagree-2	29.72 / 31.11	23.33 / 27.50	15.28 / 16.67	86.20 / 86.30	75.62 / 80.00
disagree-3	27.78 / 34.72	25.83 / 31.11	13.33 / 18.33	85.45 / 87.10	72.50 / 76.25
disagree-all (no cap)	29.44 / 30.83	22.50 / 25.83	10.00 / 13.33	85.25 / 86.00	73.75 / 74.38
longest-1	33.06 / 34.72	23.33 / 26.67	14.72 / 18.33	85.50 / 86.80	73.75 / 78.12

Table 6: Comparison of divergence computation strategy: Full vocabulary is logit distillation over every token [Agarwal et al., 2024]; sampled token evaluates the two policies only at the token the student drew [Lu and Thinking Machines Lab, 2025]; top- k rows truncate the teacher to its k largest entries. We report on Qwen3-8B non-thinking at the best checkpoint.

Variant	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
Student token	29.44	19.72	12.78	84.70	70.62	43.45
top- k	20	50.00	37.78	19.44	90.20	88.12
	50	48.06	37.50	24.17	89.45	85.62
	100	53.89	43.33	20.56	91.65	85.62
	200	51.67	40.00	22.50	90.15	88.75
Full-vocabulary	53.89	37.50	20.28	89.90	85.62	57.10

disagree-all leads no column, and its step-150 HMMT25 score of 10.00 falls below the base model at 10.83, one of only two step-150 cells in the table below base.

Teacher vocabulary truncation. Table 6 tests k , the number of teacher entries the token-level divergence is restricted to, from 20 to the full vocabulary. The best checkpoints fall under top-50/100/200 and do not improve further with the full vocabulary. The top- k truncation is a practical optimization that reduces the cost of computing the divergence. The student token-only variant is the sampled-token objective of Lu and Thinking Machines Lab [2025], which is 13.7 points below the default and 15.6 below the best checkpoint, so it is not competitive under pseudo-label supervision.

Divergence choice. OPSD uses forward KL with $\beta=0$ and it rewards a student that concentrates on one mode of the teacher and tolerates dropping the rest. Table 7 shows the preference towards forward KL is stronger under U-OPSD. Using symmetric Jensen–Shannon divergence (JSD) costs 13.8 points, which puts it level with the untrained model, and reverse KL does not produce a converged model. The collapse under reverse KL is gradual and one-directional: generations average 2.7k characters at step 25, 12k at step 50, 76k at step 75, and 99k — the token ceiling — from step 125 on, while the fraction of rollouts that yield a parsable boxed answer falls from 99% to 33%. Inspection of the completions shows a loss of termination rather than cohesive reasoning (e.g., a phrase, a $\text{\LaTeX}$ command pair, or a nesting bracket repeated until the token budget runs out).

5 Limitations

Scope. Our experiments cover one model family (Qwen3, at 4B and 8B and in both reasoning modes) and one domain (competition mathematics) with automatically checkable final answers. The voting mechanism requires an extractable, canonicalizable answer; extending U-OPSD to open-ended generation would require replacing exact-match voting with a softer consensus.

The size of the advantage is regime-dependent. The gain over supervised OPSD is large in non-thinking mode and less in thinking mode. U-OPSD exceeds OPSD by 3.2 and 2.3 points at 4B and 8B in Table 1, and by 0.9 and 0.02 points in Table 2; the improvement over the base model shrinks in the same way, from 8.5 and 10.7 points to 2.2 and 1.9. Thinking-mode base accuracy is already 74.9 and 76.1, and thinking-mode rollouts are far longer, so a 150-step budget covers many fewer completed votes per token spent. Readers should therefore treat consensus as a *stronger replacement*

Table 7: Divergence family D_β under U-OPSD, on Qwen3-8B non-thinking, longest-1, $G=8$, $\tau=0.5$. Each arm is shown at its best checkpoint in 25–150. Objective names follow Zhao et al. [2026], who report the same comparison under gold supervision.

Objective	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
Base	27.50	23.33	13.61	84.05	69.38	43.57
Forward KL $\text{KL}(\pi_T \parallel \pi_S)$, $\beta=0$ (default)	53.89	37.50	20.00	89.75	84.38	57.10
Reverse KL $\text{KL}(\pi_S \parallel \pi_T)$, $\beta=1$	<i>training diverges (not scored)</i>					
JSD ($\beta=0.5$)	29.44	21.94	12.22	83.70	69.38	43.34

for gold solutions in the non-thinking regime we measured and as a *match* for them in the thinking regime, rather than as a uniform improvement on on-policy self-distillation.

Dependence on base-model competence. Majority-vote supervision reproduces whichever answer the base model already produces most often, so it is bounded by that answer’s accuracy. Our probe measured 13.3% wrong pseudo-labels in-domain, and we did not measure training dynamics under deliberately corrupted votes. Mechanisms for detecting or down-weighting low-quality consensus (e.g., by vote margin) are natural next steps.

Variance and repeats. We mitigated variance by evaluating every checkpoint with 12 samples, spanning five benchmarks, and confirming the main effect under two schedules and three method variants, but seed-replicated error bars for every training setup are pending and will be added in a revision.

6 Conclusion

We showed that the ground-truth solution in on-policy self-distillation can be replaced by the model’s own majority-vote consensus: the agreeing rollout serves as the teacher’s reference, and distillation is applied only to self-inconsistent rollouts. With the OPSD recipe otherwise untouched, this label-free variant outperforms its supervised counterpart on the five-benchmark average, and a grid over two model sizes and both reasoning modes shows the advantage reproduces at both scales in non-thinking mode and a tie in thinking mode, where the base model is already strong enough that little headroom remains. The result suggests that, in the regime of on-policy self-distillation—a base model competent enough to vote well and fallible enough to have headroom—the binding constraint is not access to gold solutions but the machinery for surfacing and correcting the model’s own inconsistencies, a machinery that requires no supervision.

References

- Marah Abdin, Sahaj Agarwal, Ahmed Awadallah, Vidhisha Balachandran, Harkirat Behl, Lingjiao Chen, Gustavo de Rosa, Suriya Gunasekar, Mojan Javaheripi, Neel Joshi, Piero Kauffmann, Yash Lara, Caio César Teodoro Mendes, Arindam Mitra, Besmira Nushi, Dimitris Papailiopoulos, Olli Saarikivi, Shital Shah, Vaishnavi Shrivastava, Vibhav Vineet, Yue Wu, Safoora Yousefi, and Guoqing Zheng. Phi-4-reasoning technical report, 2025. URL <https://arxiv.org/abs/2504.21318>.
- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=3zKtaqxLhW>.
- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9650–9660, 2021.
- Zixiang Chen, Yihe Deng, Huizhuo Yuan, Kaixuan Ji, and Quanquan Gu. Self-play fine-tuning converts weak language models to strong language models. In *International Conference on Machine Learning (ICML)*, 2024.

- DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Wenkai Fang, Shunyu Liu, Yang Zhou, et al. Serl: Self-play reinforcement learning for large language models with limited data. *arXiv preprint arXiv:2505.20347*, 2025.
- Yuqian Fu, Haohuan Huang, Kaiwen Jiang, Jiakai Liu, Zhuo Jiang, Yuanheng Zhu, and Dongbin Zhao. Revisiting on-policy distillation: Empirical failure modes and simple fixes. *arXiv preprint arXiv:2603.25562*, 2026. doi: 10.48550/arXiv.2603.25562. URL <https://arxiv.org/abs/2603.25562>.
- Tommaso Furlanello, Zachary C. Lipton, Michael Tschannen, Laurent Itti, and Anima Anandkumar. Born again neural networks. In *Proceedings of the 35th International Conference on Machine Learning*, pages 1607–1616, 2018.
- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. MiniLLM: Knowledge distillation of large language models. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://arxiv.org/abs/2306.08543>.
- Etash Guha, Ryan Marten, Sedrick Keh, Negin Raoof, Georgios Smyrnis, Hritik Bansal, Marianna Nezhurina, Jean Mercat, Trung Vu, Zayne Sprague, et al. OpenThoughts: Data recipes for reasoning models. *arXiv preprint arXiv:2506.04178*, 2025. doi: 10.48550/arXiv.2506.04178. URL <https://arxiv.org/abs/2506.04178>.
- Caglar Gulcehre, Tom Le Paine, Srivatsan Srinivasan, Ksenia Konyushkova, Lotte Weerts, Abhishek Sharma, Aditya Siddhant, Alex Ahern, Miaosen Wang, Chenjie Gu, Wolfgang Macherey, Arnaud Doucet, Orhan Firat, and Nando de Freitas. Reinforced self-training (ReST) for language modeling. *arXiv preprint arXiv:2308.08998*, 2023.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. In *Advances in Neural Information Processing Systems (NeurIPS) Datasets and Benchmarks Track*, 2021.
- Chengsong Huang, Wenhao Yu, Xiaoyang Wang, Hongming Zhang, et al. R-zero: Self-evolving reasoning llm from zero data. *arXiv preprint arXiv:2508.05004*, 2025.
- Jiaxin Huang, Shixiang Shane Gu, Le Hou, Yuexin Wu, Xuezhi Wang, Hongkun Yu, and Jiawei Han. Large language models can self-improve. *arXiv preprint arXiv:2210.11610*, 2022.
- Jonas Hübner, Frederike Lübeck, Lejs Behric, Anton Baumann, Marco Bagatella, Daniel Marta, Ido Hakimi, Idan Shenfeld, Thomas Kleine Buening, Carlos Guestrin, and Andreas Krause. Reinforcement learning via self-distillation. *arXiv preprint arXiv:2601.20802*, 2026.
- Yiqiao Jin, Yiyang Wang, Lucheng Fu, Yijia Xiao, Yinyi Luo, Haoxin Liu, B. Aditya Prakash, Josiah Hester, Jindong Wang, and Srikanth Kumar. UniSD: Towards a unified self-distillation framework for large language models. *arXiv preprint arXiv:2605.06597*, 2026.
- Junlong Ke, Zichen Wen, Weijia Li, Conghui He, and Linfeng Zhang. Respecting self-uncertainty in on-policy self-distillation for efficient LLM reasoning. *arXiv preprint arXiv:2605.13255*, 2026.
- Jongwoo Ko, Sungnyun Kim, Tianyi Chen, and Se-Young Yun. DistiLLM: Towards streamlined distillation for large language models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 24872–24895. PMLR, 2024. URL <https://proceedings.mlr.press/v235/ko24c.html>.
- Jongwoo Ko, Tianyi Chen, Sungnyun Kim, Tianyu Ding, Luming Liang, Ilya Zharkov, and Se-Young Yun. DistiLLM-2: A contrastive approach boosts the distillation of LLMs. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 31044–31062. PMLR, 2025. URL <https://proceedings.mlr.press/v267/ko25a.html>.

- Pengyi Li, Matvey Skripkin, Alexander Zubrey, Andrey Kuznetsov, and Ivan Oseledets. Confidence is all you need: Few-shot rl fine-tuning of language models. *arXiv preprint arXiv:2506.06395*, 2025.
- Yijun Liang, Hengguang Zhou, Ming Li, Lichen Li, Cho-Jui Hsieh, and Tianyi Zhou. Self-evolving visual questioner. *arXiv preprint arXiv:2606.13929*, 2026.
- Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *International Conference on Learning Representations (ICLR)*, 2024.
- Bo Liu, Leon Guertler, Simon Yu, Zichen Liu, et al. Spiral: Self-play on zero-sum games incentivizes reasoning via multi-agent multi-turn reinforcement learning. *arXiv preprint arXiv:2506.24119*, 2025.
- Haoran Liu, Yuwei Zhang, Xiyao Li, Bohan Lyu, and Jingbo Shang. HERO: Hindsight-enhanced reflection from environment observations for agentic self-distillation. *arXiv preprint arXiv:2606.11559*, 2026a.
- Xiaogeng Liu, Xinyan Wang, Yingzi Ma, Yechao Zhang, and Chaowei Xiao. When are teacher tokens reliable? position-weighted on-policy self-distillation for reasoning. *arXiv preprint arXiv:2605.21606*, 2026b.
- Kevin Lu and Thinking Machines Lab. On-policy distillation. *Thinking Machines Lab: Connectionism*, October 2025. doi: 10.64434/tml.20251026. URL <https://thinkingmachines.ai/blog/on-policy-distillation>.
- MiniMax, :, Aili Chen, Aonian Li, Bangwei Gong, Binyang Jiang, Bo Fei, Bo Yang, Boji Shan, Changqing Yu, Chao Wang, Cheng Zhu, Chengjun Xiao, Chengyu Du, Chi Zhang, Chu Qiao, Chunhao Zhang, Chunhui Du, Congchao Guo, Da Chen, Deming Ding, Dianjun Sun, Dong Li, Enwei Jiao, Haigang Zhou, Haimo Zhang, Han Ding, Haohai Sun, Haoyu Feng, Huaiguang Cai, Haichao Zhu, Jian Sun, Jiaqi Zhuang, Jiaren Cai, Jiayuan Song, Jin Zhu, Jingyang Li, Jinhao Tian, Jinli Liu, Junhao Xu, Junjie Yan, Junteng Liu, Junxian He, Kaiyi Feng, Ke Yang, Kecheng Xiao, Le Han, Leyang Wang, Lianfei Yu, Liheng Feng, Lin Li, Lin Zheng, Linge Du, Lingyu Yang, Lunbin Zeng, Minghui Yu, Mingliang Tao, Mingyuan Chi, Mozhi Zhang, Mujie Lin, Nan Hu, Nongyu Di, Peng Gao, Pengfei Li, Pengyu Zhao, Qibing Ren, Qidi Xu, Qile Li, Qin Wang, Rong Tian, Ruitao Leng, Shaoxiang Chen, Shaoyu Chen, Shengmin Shi, Shitong Weng, Shuchang Guan, Shuqi Yu, Sichen Li, Songquan Zhu, Tengfei Li, Tianchi Cai, Tianrun Liang, Weiyu Cheng, Weize Kong, Wenkai Li, Xiancai Chen, Xiangjun Song, Xiao Luo, Xiao Su, Xiaobo Li, Xiaodong Han, Xinzhu Hou, Xuan Lu, Xun Zou, Xuyang Shen, Yan Gong, Yan Ma, Yang Wang, Yiqi Shi, Yiran Zhong, Yonghong Duan, Yongxiang Fu, Yongyi Hu, Yu Gao, Yuanxiang Fan, Yufeng Yang, Yuhao Li, Yulin Hu, Yunan Huang, Yunji Li, Yunzhi Xu, Yuxin Mao, Yuxuan Shi, Yuze Wenren, Zehan Li, Zelin Li, Zhanxu Tian, Zhengmao Zhu, Zhenhua Fan, Zhenzhen Wu, Zhichao Xu, Zhihang Yu, Zhiheng Lyu, Zhuo Jiang, Zibo Gao, Zijia Wu, Zijian Song, and Zijun Sun. Minimax-ml: Scaling test-time compute efficiently with lightning attention, 2025. URL <https://arxiv.org/abs/2506.13585>.
- Emiliano Penaloza, Dheeraj Vattikonda, Nicolas Gontier, Alexandre Lacoste, Laurent Charlin, and Massimo Caccia. Privileged information distillation for language models. *arXiv preprint arXiv:2602.04942*, 2026.
- Mihir Prabhudesai et al. Maximizing confidence alone improves reasoning. *arXiv preprint arXiv:2505.22660*, 2025.
- Archiki Prasad, Weizhe Yuan, Richard Yuanzhe Pang, Jing Xu, Maryam Fazel-Zarandi, Mohit Bansal, Sainbayar Sukhbaatar, Jason Weston, and Jane Yu. Self-consistency preference optimization. *arXiv preprint arXiv:2411.04109*, 2024.
- Hejian Sang, Yuanda Xu, Zhengze Zhou, Ran He, Zhipeng Wang, and Jiachen Sun. CRISP: Compressed reasoning via iterative self-policy distillation. *arXiv preprint arXiv:2603.05433*, 2026a.

- Hejian Sang, Yuanda Xu, Zhengze Zhou, Ran He, Zhipeng Wang, and Jiachen Sun. On-policy self-distillation for reasoning compression. *arXiv preprint arXiv:2603.05433*, 2026b.
- Sheikh Shafayat, Fahim Tajwar, Ruslan Salakhutdinov, Jeff Schneider, and Andrea Zanette. Can large reasoning models self-train? *arXiv preprint arXiv:2505.21444*, 2025.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, et al. Deepseek-math: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Idan Shenfeld, Mehul Damani, Jonas Hübner, and Pulkit Agrawal. Self-distillation enables continual learning. *arXiv preprint arXiv:2601.19897*, 2026a.
- Idan Shenfeld, Jyothish Pari, and Pulkit Agrawal. RL’s razor: Why online reinforcement learning forgets less. In *The Fourteenth International Conference on Learning Representations*, 2026b. URL <https://openreview.net/forum?id=7HNR4V44>.
- Zhiqian Tan and Yinrong Hong. Self-supervised on-policy distillation for reasoning language models. *arXiv preprint arXiv:2605.17497*, 2026.
- 5 Team, Aohan Zeng, Xin Lv, Qinkai Zheng, Zhenyu Hou, Bin Chen, Chengxing Xie, Cunxiang Wang, Da Yin, Hao Zeng, Jiajie Zhang, Kedong Wang, Lucen Zhong, Mingdao Liu, Rui Lu, Shulin Cao, Xiaohan Zhang, Xuancheng Huang, Yao Wei, Yean Cheng, Yifan An, Yilin Niu, Yuanhao Wen, Yushi Bai, Zhengxiao Du, Zihan Wang, Zilin Zhu, Bohan Zhang, Bosi Wen, Bowen Wu, Bowen Xu, Can Huang, Casey Zhao, Changpeng Cai, Chao Yu, Chen Li, Chendi Ge, Chenghua Huang, Chenhui Zhang, Chenxi Xu, Chenzheng Zhu, Chuang Li, Congfeng Yin, Daoyan Lin, Dayong Yang, Dazhi Jiang, Ding Ai, Erle Zhu, Fei Wang, Gengzheng Pan, Guo Wang, Hailong Sun, Haitao Li, Haiyang Li, Haiyi Hu, Hanyu Zhang, Hao Peng, Hao Tai, Haoke Zhang, Haoran Wang, Haoyu Yang, He Liu, He Zhao, Hongwei Liu, Hongxi Yan, Huan Liu, Huilong Chen, Ji Li, Jiajing Zhao, Jiamin Ren, Jian Jiao, Jiani Zhao, Jianyang Yan, Jiaqi Wang, Jiayi Gui, Jiayue Zhao, Jie Liu, Jijie Li, Jing Li, Jing Lu, Jingsen Wang, Jingwei Yuan, Jingxuan Li, Jingzhao Du, Jinhua Du, Jinxin Liu, Junkai Zhi, Junli Gao, Ke Wang, Lekang Yang, Liang Xu, Lin Fan, Lindong Wu, Lintao Ding, Lu Wang, Man Zhang, Minghao Li, Minghuan Xu, Mingming Zhao, Mingshu Zhai, Pengfan Du, Qian Dong, Shangde Lei, Shangqing Tu, Shangtong Yang, Shaoyou Lu, Shijie Li, Shuang Li, Shuang-Li, Shuxun Yang, Sibao Yi, Tianshu Yu, Wei Tian, Weihang Wang, Wenbo Yu, Weng Lam Tam, Wenjie Liang, Wentao Liu, Xiao Wang, Xiaohan Jia, Xiaotao Gu, Xiaoying Ling, Xin Wang, Xing Fan, Xingru Pan, Xinyuan Zhang, Xinze Zhang, Xiuqing Fu, Xunkai Zhang, Yabo Xu, Yandong Wu, Yida Lu, Yidong Wang, Yilin Zhou, Yiming Pan, Ying Zhang, Yingli Wang, Yingru Li, Yinpei Su, Yipeng Geng, Yitong Zhu, Yongkun Yang, Yuhang Li, Yuhao Wu, Yujiang Li, Yunan Liu, Yunqing Wang, Yuntao Li, Yuxuan Zhang, Zezhen Liu, Zhen Yang, Zhengda Zhou, Zhongpei Qiao, Zhuoer Feng, Zhuorui Liu, Zichen Zhang, Zihan Wang, Zijun Yao, Zikang Wang, Ziqiang Liu, Ziwei Chai, Zixuan Li, Zuodong Zhao, Wenguang Chen, Jidong Zhai, Bin Xu, Minlie Huang, Hongning Wang, Juanzi Li, Yuxiao Dong, and Jie Tang. Glm-4.5: Agentic, reasoning, and coding (arc) foundation models, 2025. URL <https://arxiv.org/abs/2508.06471>.
- Rui Wang, Hongru Wang, Yi Chen, Boyang Xue, Tianqing Fang, Wenhao Yu, and Kam-Fai Wong. Demystifying on-policy distillation: Roles, pathologies, and regulations. *arXiv preprint arXiv:2607.13399*, 2026. doi: 10.48550/arXiv.2607.13399. URL <https://arxiv.org/abs/2607.13399>.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *International Conference on Learning Representations (ICLR)*, 2023.
- Liang Wen, Yunke Cai, Fenrui Xiao, Xin He, Qi An, Zhenyu Duan, Yimin Du, Junchen Liu, Lifu Tang, Xiaowei Lv, Haosheng Zou, Yongchao Deng, Shousheng Jia, and Xiangzheng Zhang. Light-r1: Curriculum SFT, DPO and RL for long COT from scratch and beyond. In Georg Rehm and Yunyao Li, editors, *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 6: Industry Track)*, pages 318–327, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-288-6. doi: 10.18653/v1/2025.acl-industry.24. URL <https://aclanthology.org/2025.acl-industry.24/>.

- Guande Wu, Huan Song, Yawei Wang, Qiaojing Yan, Yijun Tian, Lin Lee Cheong, and Panpan Xu. SDRT: Enhance vision-language models by self-distillation with diverse reasoning traces. *arXiv preprint arXiv:2503.01754*, 2025.
- Yecheng Wu, Song Han, and Hai Cai. Lightning OPD: Efficient post-training for large reasoning models with offline on-policy distillation. *arXiv preprint arXiv:2604.13010*, 2026. doi: 10.48550/arXiv.2604.13010. URL <https://arxiv.org/abs/2604.13010>.
- Wei Xiong, Hanning Zhang, Chenlu Ye, Lichang Chen, Nan Jiang, and Tong Zhang. Self-rewarding correction for mathematical reasoning. *arXiv preprint arXiv:2502.19613*, 2025.
- Fangzhi Xu, Hang Yan, Chang Ma, Haiteng Zhao, et al. Genius: A generalizable and purely unsupervised self-training framework for advanced reasoning. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2025.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Chenglin Yang, Lingxi Xie, Chi Su, and Alan L. Yuille. Snapshot distillation: Teacher–student optimization in one generation. *arXiv preprint arXiv:1812.00123*, 2018.
- Chenxu Yang, Chuanyu Qin, Qingyi Si, Minghui Chen, Naibin Gu, Dingyu Yao, Zheng Lin, Weiping Wang, Jiaqi Wang, and Nan Duan. Self-distilled RLVR. *arXiv preprint arXiv:2604.03128*, 2026.
- Tianzhu Ye, Li Dong, Xun Wu, Shaohan Huang, and Furu Wei. On-policy context distillation for language models. *arXiv preprint arXiv:2602.12275*, 2026.
- Yixin Ye, Zhen Huang, Yang Xiao, Ethan Chern, Shijie Xia, and Pengfei Liu. LIMO: Less is more for reasoning. In *Second Conference on Language Modeling*, 2025. URL <https://openreview.net/forum?id=T2TZ0RY4Zk>.
- Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Xian Li, Sainbayar Sukhbaatar, Jing Xu, and Jason Weston. Self-rewarding language models. *arXiv preprint arXiv:2401.10020*, 2024a.
- Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Xian Li, Sainbayar Sukhbaatar, Jing Xu, and Jason Weston. Self-rewarding language models. *arXiv preprint arXiv:2401.10020*, 2024b.
- Zheng Yuan, Hongyi Yuan, Chengpeng Li, Guanting Dong, Keming Lu, Chuanqi Tan, Chang Zhou, and Jingren Zhou. Scaling relationship on learning mathematical reasoning with large language models. *arXiv preprint arXiv:2308.01825*, 2023.
- Yang Yue, Zhiqi Chen, Rui Lu, et al. Does reinforcement learning really incentivize reasoning capacity in llms beyond the base model? *arXiv preprint arXiv:2504.13837*, 2025.
- Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah D. Goodman. Star: Bootstrapping reasoning with reasoning. *arXiv preprint arXiv:2203.14465*, 2022.
- Linfeng Zhang, Jiebo Song, Anni Gao, Jingwei Chen, Chenglong Bao, and Kaisheng Ma. Be your own teacher: Improve the performance of convolutional neural networks via self distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3713–3722, 2019.
- Qingyang Zhang, Haitao Wu, Changqing Zhang, et al. Right question is already half the answer: Fully unsupervised llm reasoning incentivization. *arXiv preprint arXiv:2504.05812*, 2025.
- Andrew Zhao, Yiran Wu, Yang Yue, Tong Wu, Quentin Xu, et al. Absolute zero: Reinforced self-play reasoning with zero data. *arXiv preprint arXiv:2505.03335*, 2025a.
- Siyan Zhao, Zhihui Xie, Mengchen Liu, Jing Huang, Guan Pang, Feiyu Chen, and Aditya Grover. Self-distilled reasoner: On-policy self-distillation for large language models. *arXiv preprint arXiv:2601.18734*, 2026.
- Xuandong Zhao et al. Learning to reason without external rewards. *arXiv preprint arXiv:2505.19590*, 2025b.
- Yuxin Zuo et al. Ttrl: Test-time reinforcement learning. *arXiv preprint arXiv:2504.16084*, 2025.

A Reproduction of OPSD

Reproduction check. Before any unsupervised experiment we reproduced OPSD itself with the released code and hyperparameters. Across the 30 (checkpoint, benchmark) points published in the OPSD repository, our reproduction matches to within ± 4 points avg@12 with no systematic direction (Table 8), consistent with sampling noise at 12 samples on 30-problem benchmarks. All supervised OPSD numbers below are from *our* reproduction under conditions identical to the unsupervised runs.

Table 8: Reproduction of published OPSD results with the released code and hyperparameters (avg@12, temperature 1.0). “pub.” denotes the numbers published in the official OPSD repository; “ours” our rerun. Checkpoint columns are steps 50/75/100/150, matching the checkpoints published for this configuration.

Config	Bench	base		checkpoints		
Qwen3-4B (non-thinking)	AIME24 pub.	23.1	20.3	27.5	31.1	32.8
	AIME24 ours	22.2	23.1	27.2	32.2	31.9
	AIME25 pub.	21.4	21.4	20.8	21.1	21.9
	AIME25 ours	17.8	20.8	23.1	20.8	21.1
	HMMT25 pub.	10.8	11.1	13.1	16.4	14.4
	HMMT25 ours	12.2	10.6	12.8	16.4	11.7

B Does GRPO’s gain survive a change of reasoning mode at evaluation time?

Every arm in Tables 1 and 2 is trained and evaluated in the same reasoning mode (both off or both on), which leaves open whether a method’s gain is a property of the model or of the mode it was tuned in. We ran GRPO in all combinations of modes, and its LoRA update is small enough that the model remains usable under either prompt format. We therefore take the two thinking-trained GRPO runs and score them again with the non-thinking prompt, against the non-thinking base. Table 9 reports the best five-benchmark performance of each combination.

Table 9: GRPO under matched and mismatched reasoning modes. Each row is the best of ten checkpoints (steps 50–500) by five-benchmark mean, scored at temperature 1.0 against the base model in the evaluation mode of that row. The two “thinking $\rightarrow$ non-thinking” rows reuse the checkpoints of the rows above them; only the evaluation prompt differs.

Train	Eval	Step	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.	Δ base
<i>Qwen3-4B</i>									
thinking	thinking	300	73.89	69.44	43.61	95.45	99.38	76.35	+1.79
thinking	non-thinking	500	25.00	21.39	13.89	83.75	76.25	44.06	+2.62
non-thinking	non-thinking	200	25.00	22.50	15.00	86.20	80.62	45.86	+4.43
<i>Qwen3-8B</i>									
thinking	thinking	250	76.94	69.17	47.78	95.70	95.00	76.92	+0.66
thinking	non-thinking	100	27.22	22.50	13.33	85.20	67.50	43.15	+1.20
non-thinking	non-thinking	500	30.56	21.94	13.06	87.85	73.75	45.43	+3.48

At both scales the mismatched arm is beaten by the arm trained in the evaluation mode, by 1.8 points at 4B (+2.62 vs +4.43) and by 2.3 at 8B (+1.20 vs +3.48) — gaps larger than GRPO’s entire same-mode gain in thinking mode (+1.79 and +0.66). Bold marks the better of the two non-thinking rows within each model, and the non-thinking-trained arm takes every contested column at 8B and four of five at 4B.

Two details are worth flagging for anyone reading the mismatched rows closely. First, the 4B mismatched peak rests on a single checkpoint: steps 50–450 all sit within one point of base (39.98–42.27) and only step 500 jumps to 44.06, so that +2.62 should not be read as a trend. The 8B mismatched arm is better behaved, clearing base at nine of ten checkpoints. Second, the transfer is not symmetric across benchmarks — AIME24 improves at every 8B checkpoint under the mismatched

prompt, while AIME25 falls below base at six of ten. We did not run the reverse direction (non-thinking-trained checkpoints scored with the thinking prompt), so this appendix bounds mode dependence in one direction only.

C Answer extraction and canonicalization

Answers are extracted from the last `\boxed{...}` span with a brace-matching scanner. Specifically, the methods below are applied in order: stripping `\text{...}` wrappers, thin-space and spacing commands, and trailing units; splitting trailing equalities (“ $x = 2021$ ” $\rightarrow$ “2021”); normalizing `\frac`, `\dfrac`, and plain-slash fraction forms to a common representation; and mapping terminating decimals to canonical fractions (e.g., $0.5 \rightarrow 1/2$). Two answers are considered equal if their canonical forms match exactly. On the training distribution this parser extracts an answer from 96.3% of rollouts at the 4096-token budget (Section 4.3).

D Additional experimental details

Hardware and runtime. All training runs use 8 GPUs (80 GB class) with colocated vLLM generation. An U-OPSD run (150 steps, $G=8$, 4096-token budget) takes roughly 9 hours; supervised OPSD roughly 3.5 hours. Evaluating one (checkpoint, benchmark) cell takes 0.5–1.5 hours on 4 GPUs with vLLM (12 samples per problem on the 30-problem contest sets; 4 samples on MATH500/AMC23).

Skipped prompts. With $G=8$ and $\tau=0.5$, roughly 94% of prompts receive a pseudo-label; among labeled prompts, those whose valid rollouts all agree contribute no distillation loss. The per-prompt distilled-row count is therefore at most k and can be zero; batches are formed at the prompt level so optimizer steps remain synchronized across data-parallel workers.

Sequence budgets. Student rollouts and teacher scoring use a 20,000-token maximum context. U-OPSD raises the completion budget from OPSD’s 1024 to 4096 tokens because voting requires completed answers; Section 4.3 quantifies extraction quality at this budget.

E Additional ablation tables with per-benchmark breakdown

See Table 10 for the self-consistency threshold τ ablation, Table 11 for the number of rollouts per prompt G ablation, Table 12 for the teacher update ablation, and Table 13 for the learning-rate ablation.

Table 10: Self-consistency threshold τ on Qwen3-8B non-thinking, longest-1, $G=8$. Each cell shows step 150 / best checkpoint in 25–150. τ is the fraction of valid rollouts that must agree for a prompt to receive a pseudo-label; $\tau=0$ accepts every prompt.

τ	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
0	53.33 / 57.50	41.39 / 46.67	22.50 / 27.22	90.70 / 92.15	88.12 / 89.38	59.21 / 61.83
0.3	50.83 / 53.33	34.44 / 41.67	20.28 / 23.06	89.85 / 90.65	85.00 / 88.12	56.08 / 58.59
0.5	43.06 / 53.89	35.83 / 37.50	20.28 / 20.28	88.00 / 89.90	82.50 / 85.62	53.93 / 57.10
0.7	32.78 / 37.50	23.61 / 26.67	13.06 / 14.44	85.95 / 87.70	74.38 / 76.25	45.96 / 48.18
0.9	32.22 / 32.22	20.83 / 22.50	13.61 / 13.61	84.70 / 84.85	70.62 / 72.50	44.40 / 44.40

Table 11: Number of rollouts per prompt G on Qwen3-8B non-thinking, longest-1, $\tau=0.5$. Each cell shows step 150 / best checkpoint in 25–150.

G	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
4	47.22 / 50.28	35.83 / 37.78	18.06 / 21.11	88.15 / 90.20	84.38 / 87.50	54.73 / 56.99
8	43.06 / 53.89	35.83 / 37.50	20.28 / 20.28	88.00 / 89.90	82.50 / 85.62	53.93 / 57.10
12	53.61 / 57.22	40.83 / 43.33	20.56 / 26.39	91.00 / 92.00	86.25 / 90.00	58.45 / 61.79
16	51.67 / 55.28	41.67 / 44.17	22.22 / 22.22	89.90 / 89.90	87.50 / 87.50	58.59 / 59.37

Table 12: How the teacher is updated, on Qwen3-8B non-thinking, longest-1, $G=8$, $\tau=0.5$. Each cell shows step 150 / best checkpoint in 25–150. “fixed” freezes the teacher at the initial policy (the base model with the adapter disabled), which is OPSD’s own setting and ours everywhere else; the EMA rows let the teacher track the student at the given decay.

Teacher	AIME24	AIME25	HMMT25	MATH500	AMC23	Avg.
fixed	43.06 / 53.89	35.83 / 37.50	20.28 / 20.28	88.00 / 89.90	82.50 / 85.62	53.93 / 57.10
EMA 0.999	43.61 / 52.78	36.67 / 41.39	18.33 / 23.33	88.40 / 90.50	87.50 / 87.50	54.90 / 58.82
EMA 0.99	52.78 / 54.17	39.72 / 43.89	23.33 / 23.33	89.85 / 91.00	83.75 / 86.88	57.89 / 58.88
EMA 0.995	54.17 / 55.00	40.28 / 43.33	21.94 / 22.50	90.10 / 90.75	83.75 / 89.38	58.05 / 59.47

Table 13: Learning-rate schedule ablation: best AIME24 checkpoint (avg@12) per method under an effectively-constant LR (30-epoch horizon, $\approx 5 \times 10^{-6}$ throughout) vs. the matched 150-step linear decay used throughout Tables 1 and 2. The constant-LR column is OPSD’s native configuration, so the released figure is directly comparable there; no released run exists under the decayed schedule.

Method	Constant LR	Linear decay
OPSD (supervised)	32.22	27.50
as released	32.8	–
disagree-1	37.50	35.28
disagree-2	32.78	31.11
disagree-3	33.61	34.72
disagree-all	33.61	30.83
longest-1	31.94	34.72