

The Low-Frequency Trap: Video–Language Models Fail at Simple Event Bookkeeping

Sarvesh Baskar^{1*}, Zikui Cai^{1*}, Shayan Shabih^{1*}, Anirudh Satheesh¹, Muhammad R. Islam¹,
Udari Madhushani Sehwag², Tom Goldstein¹, Furong Huang¹

¹University of Maryland, College Park, USA ²Scale AI, USA

🔗 Code: [The-Low-Frequency-Trap](#) 📁 Dataset: [Sarvesh-369/Low-Frequency-Trap](#)

🌐 Project Page: [low-frequency-trap.github.io](#)

Abstract

Real-world video benchmarks provide broad coverage, but their fixed clips entangle event count, rate, duration, and visual complexity, making failure modes hard to isolate. While existing programmatic benchmarks offer better control, they primarily score only the final answer rather than auditing reported events against executable ground truth. To bridge this gap, we introduce trace-grounded parametric profiling for event counting in three controlled video tasks, bouncing-ball wall contacts, visual blinks, and categorical state transitions. Across 2,190 videos, we vary event count N and frequency F while holding rendering fixed. Each video includes an executable event trace for capability-surface estimation and timestamp-level evaluation. Our results reveal a staged temporal failure. At an 80% reliability threshold, Gemini 3.6 Flash reliably counts persistent state transitions up to 12 events at 0.5 and 1.0 Hz, yet demonstrates no reliable positive-count region for transient blinking events. Thus, event representation (persistent or transient) dictates whether a model initially accesses the evidence – a limitation that compounds as count and frequency increase. In the high-count, high-frequency regime, only 0.2% of final counts are correct and the model recovers just 18.1% of true events. To test if visual access is the primary bottleneck, we increase sampling rate. Although this boosts Bounce Ball accuracy from 19.6% to 29.3%, the reported sequence agrees with the ground truth only 3.7% of the time. Extra frames can therefore inflate final scores without producing faithful event recovery. Different prompting strategies yield similarly limited gains, and evaluations on real-world videos show the same concentration of success at low event counts. Ultimately, trace-grounded profiling shifts video evaluation from aggregate accuracy metrics to a detailed diagnostic of where temporal reasoning fails and whether the reported evidence actually supports the final answer.

1 Introduction

Video-language models have advanced rapidly, demonstrating strong performance across standard video benchmarks (Fu et al. 2025; Liu et al. 2024; Chandrasegaran et al. 2024; Mangalam, Akshulakov, and Malik 2023; Li et al. 2024b). These benchmarks provide useful breadth and ranking leaderboards, but they rarely identify why a model fails. Natural clips jointly vary visual clutter, camera motion, event density,

duration, and semantics, so an error cannot be attributed to a specific temporal demand. The programmatically synthesized benchmarks considered here offer more control (Lu et al. 2025; Li et al. 2024a), but primarily score only a final answer. They therefore do not reveal whether a model missed events, confused their timing, lost track of a sequence, or made an error only when aggregating it.

We address this gap with trace-grounded parametric profiling for visual event counting (Figure 1). We construct simple controlled video tasks based on bouncing-ball wall contacts, visual blinks, and categorical state transitions. We vary event count N because it determines the number of observations a model must retain and aggregate, and event frequency F because it determines how closely successive events are separated in time. These two parameters capture complementary temporal demands while remaining independently controllable. We hold rendering, semantics, and task rules fixed so that the resulting boundary can be attributed to temporal demand rather than changes in visual content. Other factors that shape real-world video understanding, including clutter, camera motion, occlusion, semantic complexity, and temporal parameters such as event duration, irregularity, and inter-event variability, are outside the scope of this controlled study. The natural-video transfer evaluation does not isolate these factors, it tests only whether the failure patterns identified under controlled variations of N and F persist in more realistic videos. Every video is paired with an executable ground-truth trace containing event times, state changes, and cumulative counts. This design maps reliable operating regions over the $N \times F$ space and tests model-reported events against the sequence that actually occurred.

The results are consistent with a staged and representation-dependent temporal failure. Under an 80% reliability target, Gemini 3.6 Flash counts persistent state transitions through $N = 12$ at 0.5 and 1.0 Hz, whereas blinking has no reliable positive-count region. In the high-count, high-frequency region, only 0.2% of final counts are correct and Gemini recovers just 18.1% of the true events. Increasing frame density raises Bounce Ball accuracy from 19.6% to 29.3%, yet the reported sequence agrees with the ground truth only 3.7% of the time. Thus, additional visual evidence can improve the final answer without producing faithful event recovery. Prompting yields similarly limited gains, and natural repeated-

*Equal Contribution.

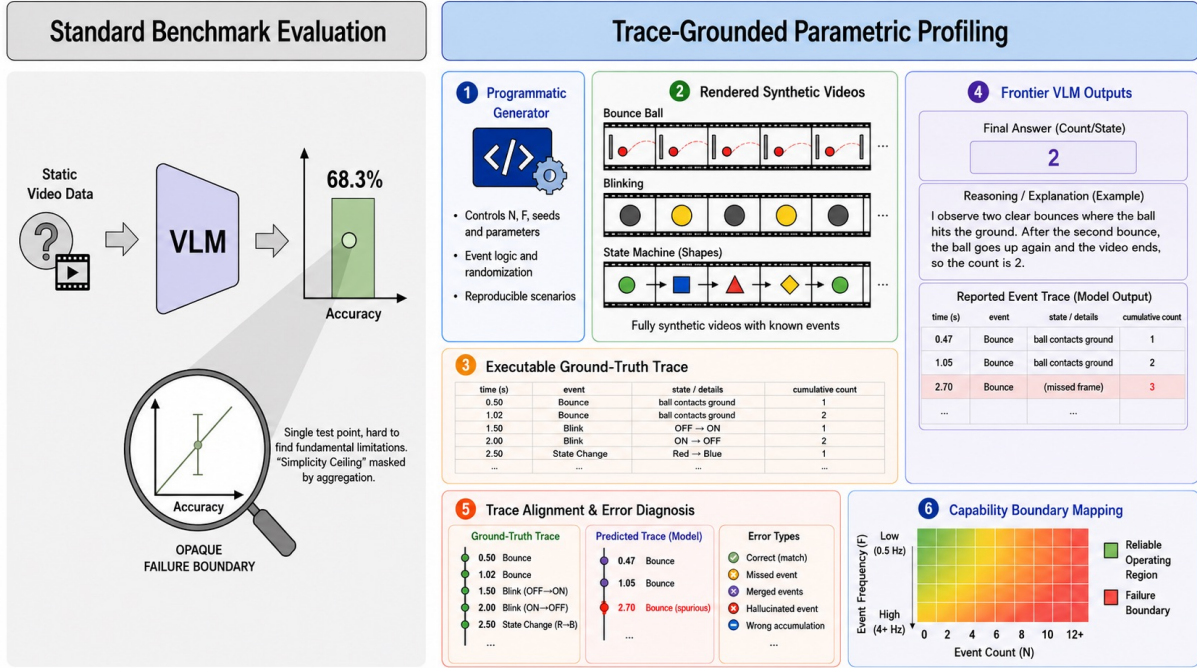


Figure 1: Overview of trace-grounded parametric profiling. Unlike standard benchmark evaluation based on a single aggregate accuracy score, our framework generates controlled videos with executable event traces.

event videos show the same concentration of success at low event counts. Together, these findings are consistent with a staged failure involving event access followed by sequence retention and aggregation. Our paper makes four primary contributions.

- We introduce a controlled evaluation framework that replaces a single aggregate score with capability surfaces over event count and frequency.
- We provide a trace-grounded benchmark that audits model-reported events against executable ground truth.
- We conduct targeted interventions using denser sampling, event-centered keyframes, and prompt variants to diagnose whether errors arise from limited visual evidence, event localization, or reasoning over the recovered sequence.
- We show why final-answer accuracy alone can mischaracterize temporal reasoning and provide evidence that the controlled failure pattern extends to natural repeated-event videos.

2 Related Work

Video-language evaluation. Recent video-language models combine strong visual encoders with long-context reasoning, including Qwen, InternVL, and Molmo families (Bai et al. 2025; Wang et al. 2025; Clark et al. 2026). Existing benchmarks assess broad temporal understanding on fixed, heterogeneous clips, including Video-MME, TempCompass, HourVideo, EgoSchema, MVBench, LongVideoBench, Mementos, VideoNIAH, VideoCogQA, Video-MMLU, Video-Vista, CinePile, Video-MMMU, and V-STaR (Fu et al. 2025;

Liu et al. 2024; Chandrasegaran et al. 2024; Mangalam, Akshulakov, and Malik 2023; Li et al. 2024b; Wu et al. 2024; Wang et al. 2024; Lu et al. 2025; Li et al. 2024a; Song et al. 2025; Li et al. 2024c; Rawal et al. 2024; Hu et al. 2025; Cheng et al. 2026). VideoReasonBench additionally tests multi-step reasoning over videos with partially observed state changes (Liu et al. 2025). Studies of visual shortcuts, temporal perturbations, and benchmark confounds likewise show that final-answer scores can conceal weak temporal access or brittle reasoning (Fu et al. 2024; Tong et al. 2024; Cores et al. 2025; Feng et al. 2025; Yue et al. 2024; Lu et al. 2024; Chen et al. 2024; Hao et al. 2025). Our framework complements this literature by holding rendering and semantics fixed while sweeping explicit event-load and event-rate demands.

Controlled diagnostic evaluation. Controlled visual benchmarks, from CLEVR to recent physical-reasoning probes, isolate factors that are entangled in natural data (Johnson et al. 2017; Chow et al. 2025; Xiang et al. 2025; Qiu et al. 2025). Complementary analyses such as RCI ask whether a benchmark genuinely requires global visual reasoning (Agarwal et al. 2025). We use the same diagnostic principle for video. Programmatic generation gives exact event boundaries and permits matched interventions, while the natural-video study tests whether the resulting diagnosis transfers beyond the controlled setting.

Grounded video evaluation. MORSE-500 demonstrates the value of fully scripted, controllable videos for stress-testing multimodal reasoning (Cai et al. 2025). TransRAC studies repetitive-action counting from natural video (Hu et al. 2022), but does not evaluate model-reported temporal

traces. The closest related trace evaluation we found is Visual Reasoning Tracer, which evaluates object-level intermediate reasoning traces in images (Yuan et al. 2025). Our setting differs because the renderer produces a temporal event schedule. We align a model-reported event sequence with that schedule to distinguish unsupported correct counts from faithful event recovery. Appendix E provides a detailed comparison with controlled video benchmarks and intermediate-trace evaluations.

3 Controlled Profiling and Trace Evaluation

Real-world video benchmarks entangle event count, event rate, duration, visual complexity, and semantic content, making it difficult to isolate the source of a model failure. We address this limitation with programmatically generated videos whose event structure is known exactly. Each video is paired with an executable trace produced by the same event schedule used for rendering. Appendix A provides the complete task specifications and supplied-frame examples.

Model evaluation setup. We select Gemini 3.6 Flash as the primary deployed video-language model because it is a frontier model that supports native video input. We use Qwen3-VL-235B, a large open-weight model from a distinct family, as a supplementary cross-system check. This tests qualitative robustness, not universality across VLMs. Each model uses its native video interface and the same zero-shot template instantiated for each domain, without per-cell tuning. Input configurations provide Gemini with 1 FPS and Qwen with 2 FPS; these are supplied sampling rates, not undocumented internal processing. We retain default provider decoding and preprocessing. Full prompts are provided in Appendix C. Detailed model configurations and cross-model boundary summaries appear in Appendix B.3.

3.1 Controlled Temporal Task Space

Each video is defined by a domain d , event count N , event frequency F , and random seed s . Figure 2 defines an event as a wall contact in `Bounce_ball`, an on-pulse in `Blinking`, or a categorical transition in `State_machine`. The seed varies color, geometry, trajectory, initial state, orientation, and start delay while preserving the event schedule.

We evaluate

$$\mathcal{N} = \{0, 1, 2, 3, 4, 5, 6, 8, 10, 12\}$$

and

$$\mathcal{F} = \{0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0\} \text{ Hz}$$

Every clip is 24 seconds long. The active sequence spans approximately N/F , the remaining static frames occur before or after it, with allocation randomized by s . Thus, N changes event load and active retention span, not total duration. To balance grid coverage and visual variation, we generate $S = 10$ videos per (N, F) . Let $\hat{y}_{d,N,F,s}$ be the prediction of model $\mathcal{M}_\theta$. The observed cell accuracy is

$$\hat{p}_\theta^d(N, F) = \frac{1}{S} \sum_{s=1}^S \mathbb{I}[\hat{y}_{d,N,F,s} = N] \quad (1)$$

where $\mathbb{I}[\cdot]$ equals one when the prediction is correct and zero otherwise. The full evaluation contains $(1+9 \times 8) \times 10 = 730$ videos per domain and 2190 videos across all three domains.

For $N = 0$, frequency is inapplicable, so we render ten no-event controls at nominal $F = 1.0$ Hz, they are excluded from trace ratios. The profile therefore measures event load and active retention span, rather than isolated arithmetic counting.

3.2 Executable Traces and Metrics

For a video containing N events, the renderer produces

$$\mathcal{T}^* = (t_i, e_i, s_i^-, s_i^+, c_i)_{i=1}^N, \quad c_i = c_{i-1} + 1, \quad c_0 = 0, \quad (2)$$

where t_i is the event timestamp, e_i is the event type, s_i^- and s_i^+ are the states before and after the event, and c_i is the cumulative count. The trace is generated before inference and is not supplied to the model in the baseline condition.

When trace reporting is requested, the model returns M timestamped events and a final count $\hat{y}$, which we parse before scoring. Events are aligned one-to-one within the rate-relative window $\delta(F) = 1/(2F)$, half the inter-event period. It ranges from 1.0 s at 0.5 Hz to 0.125 s at 4.0 Hz, so adjacent windows do not overlap. Let K be the aligned pairs. Prompting, matching, and fixed-window sensitivity results are in Appendix C.15.

For one video, N is the true number of events, M is the number reported by the model, K is the number of aligned event pairs, and $\hat{y}$ is the reported final count. $\mathbb{I}[\cdot]$ equals one when its condition holds and zero otherwise. The main evaluation metrics are

$$\begin{aligned} \text{Acc} &= \mathbb{I}[\hat{y} = N], & \text{P} &= \frac{K}{M}, & \text{R} &= \frac{K}{N}, \\ \text{F}_1 &= \frac{2\text{PR}}{\text{P} + \text{R}}, & \text{VOR} &= \frac{M}{N} \end{aligned} \quad (3)$$

Here Acc is final-answer exact match, P is precision, R is recall, and F_1 is their harmonic mean. Precision measures supported reported events and recall measures recovered true events. The Visual Observation Ratio (VOR) measures count bias. Over eligible positive-event videos $\mathcal{E}$, the Accidental Correctness Rate (ACR) and Reasoning Failure Rate (RFR) are

$$\begin{aligned} \text{ACR} &= \frac{1}{|\mathcal{E}|} \sum_{v \in \mathcal{E}} \mathbb{I}[\hat{y}_v = N_v] \mathbb{I}[\text{F}_{1,v} < 0.80], \\ \text{RFR} &= \frac{1}{|\mathcal{E}|} \sum_{v \in \mathcal{E}} \mathbb{I}[\hat{y}_v \neq N_v] \mathbb{I}[\text{F}_{1,v} \geq 0.80] \end{aligned} \quad (4)$$

Here $\mathcal{E}$ is the set of eligible positive-event videos, v indexes one video, N_v is its true event count, $\hat{y}_v$ is its reported final count, and $\text{F}_{1,v}$ is the trace score for that video. Thus ACR identifies correct counts unsupported by a sufficiently faithful trace, whereas RFR identifies incorrect counts despite a sufficiently faithful trace.

When $M = 0$, precision and F_1 are zero. We average trace scores over eligible videos; $\text{VOR} < 1$ indicates under-reporting and $\text{VOR} > 1$ over-reporting.

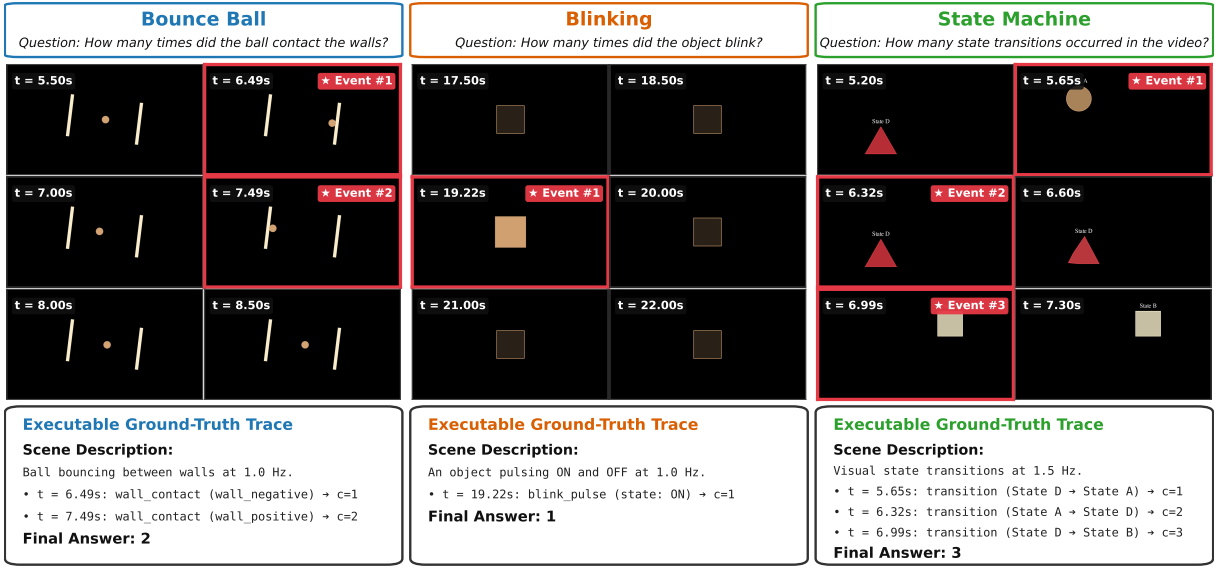


Figure 2: **Controlled videos and executable traces.** For each (N, F) , the renderer records event times, state changes, and cumulative count c_i for alignment with model-reported timestamps.

3.3 Experimental Protocol and Operating Boundaries

Unparseable final answers are incorrect and malformed traces receive no matches. Interventions use the same videos and seeds. Sampling and prompting alter one requested component; event-centered keyframes are an upper-bound visual-access condition because they may reveal N .

We use $\tau = 0.80$ as a stringent operational reliability target. A cell must be correct on at least 8 of 10 randomized renderings. The threshold summarizes the full surface rather than providing a confidence bound; the cell-wise accuracy surfaces remain available for inspection. Appendix B.5 reports seed-level variation and boundary robustness. Let $\mathcal{N}_+ = \mathcal{N} \setminus \{0\}$ denote positive counts. Here d indexes a visual domain, θ identifies the evaluated model, and $\hat{\mathcal{P}}_\theta^d(N, F)$ is its observed exact-match accuracy from Equation 1 at count N and frequency F . For domain d and fixed frequency F , the count boundary is

$$N_\tau^{*,d}(F) = \max \left\{ n \in \mathcal{N}_+ \mid \min_{\substack{n' \in \mathcal{N}_+ \\ n' \leq n}} \hat{\mathcal{P}}_\theta^d(n', F) \geq \tau \right\} \quad (5)$$

Here n is a candidate positive count and n' ranges over each tested positive count up to n . The outer maximum selects the largest candidate whose lowest observed accuracy across that prefix meets τ . Thus, it is the largest tested count for which accuracy remains at least 80% at that count and every smaller positive count. If accuracy is below 80% at $N = 1$, we report the count boundary as $N_\tau^{*,d}(F) < 1$. The $N = 0$ condition is treated separately as a no-event control.

For domain d and fixed count N , the complementary operational frequency boundary is

$$F_\tau^{*,d}(N) = \max \left\{ f \in \mathcal{F} \mid \min_{\substack{f' \in \mathcal{F} \\ f' \leq f}} \hat{\mathcal{P}}_\theta^d(N, f') \geq \tau \right\} \quad (6)$$


Here f is a candidate tested frequency and f' ranges over every tested frequency no greater than f . The outer maximum selects the highest candidate whose lowest observed accuracy across that lower-frequency prefix meets τ . It is therefore the largest tested event rate for which accuracy remains at least 80% at that rate and every lower tested rate. If the model fails at the lowest tested rate of 0.5 Hz, we report the frequency boundary as $F_\tau^{*,d}(N) < 0.5$ Hz. Together, the count and frequency boundaries describe complementary slices of the two-dimensional reliable operating region.

4 Mapping Reliable Operating Regions


Figure 3 reports capability surfaces across the complete $N \times F$ grid. Its Gemini panel reports Gemini 3.6 Flash accuracy. We apply the Section 3.3 boundary definitions with the 80% operational target. A reliable cell has at least eight correct answers from ten randomized renderings. The $N = 0$ column shows correct no-event responses.

Role of input sampling. The profiles evaluate complete end-to-end systems. Gemini receives 1 FPS input and Qwen 2 FPS input, so sampling and interface remain confounds. Higher-density frame sequences in Section 6 probe whether sampling contributes to high-frequency failures.

Gemini count boundaries. Bounce Ball reaches $N = 10$ only at 0.5 Hz and fails the target at the first positive count from 1.0 to 4.0 Hz. Blinking has no reliable positive-count region. State Machine is reliable through $N = 12$ at 0.5 and 1.0 Hz, contracts to $N = 2$ at 1.5 Hz, and is generally limited to $N = 1$ above it.

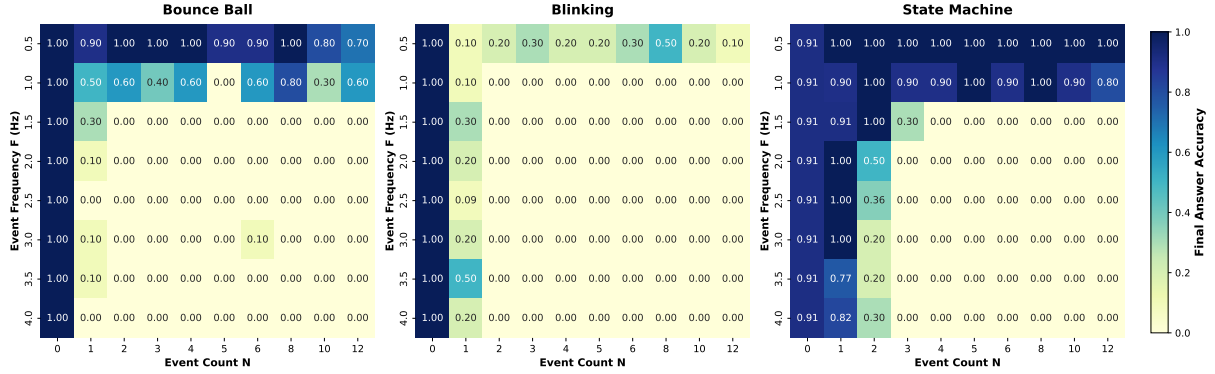

(a) Gemini 3.6 Flash capability surfaces across synthetic domains.

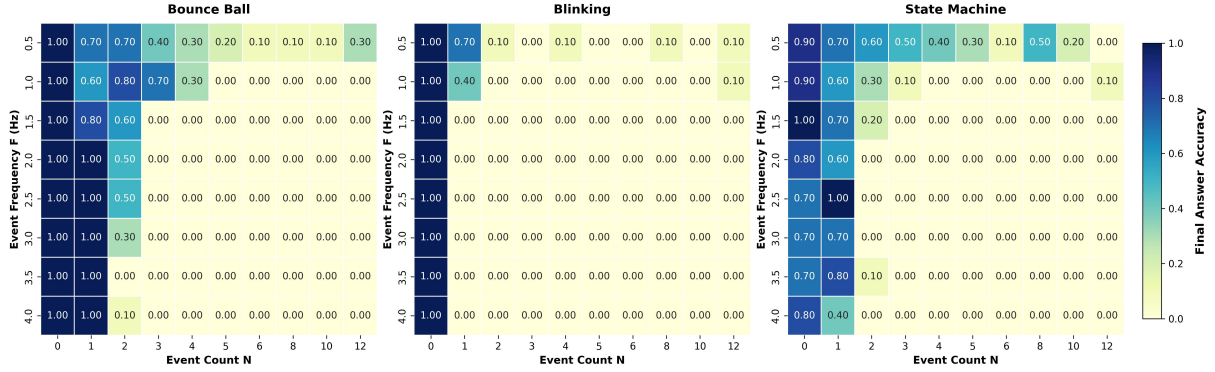

(b) Supplementary Qwen3-VL-235B system profile across synthetic domains.

Figure 3: **Capability surfaces across synthetic domains.** Final-answer exact match over event count N and frequency F for Bounce Ball, Blinking, and State Machine. Gemini supports the broadest region for persistent State Machine transitions. Qwen shows the same concentration of accuracy at low counts and frequencies.

Gemini frequency boundaries. Bounce Ball is generally reliable only through 0.5 Hz, while Blinking has no reliable positive-count frequency region. State Machine reaches 3.0 Hz at $N = 1$, 1.5 Hz at $N = 2$, and 1.0 Hz from $N = 3$ through $N = 12$. Bounce Ball has an isolated $N = 8$ exception at 1.0 Hz, but its $N = 12$ accuracy is already below target at the lowest tested frequency. The contiguous-boundary rule prevents isolated successes after a failure from being treated as a reliable operating region.

Operating-region interpretation. There is no universal count or frequency threshold. Persistent State Machine transitions yield the broadest region, but the domains also vary visual form and semantics. With fixed 24-second clips, active span grows as N/F , so the surfaces profile joint event load and retention span. They characterize the full model and input pipeline, not the language model component in isolation.

Supplementary Qwen comparison. Figure 3b supplies a supplementary Qwen3-VL-235B system check. Bounce Ball and Blinking have no broad reliable region, and State Machine reaches $N = 1$ only in isolated 2.5- and 3.5-Hz cells. Qwen has no contiguous frequency region for positive counts because it fails at 0.5 Hz. Although its geometry differs from Gemini, neither system retains a broad high-count region. Full-

resolution capability heatmaps appear in Appendix B, and Appendix B.3 reports the model configurations and boundary summaries.

5 Diagnosing Trace-Level Failures

Final-answer exact match indicates whether the reported count is correct, but not whether the model reports timestamps aligned with the event sequence. Table 1 compares Gemini’s reported timestamps with executable traces using the rate-relative alignment in Section 3.2. Part A reports results by visual domain, Part B groups the $N \times F$ surface into four operating regions, and Part C reports the interventions discussed in Section 6. These are behavioral output measures, not direct observations of latent reasoning.

Trace fidelity follows event representation. Across domains, macro-average final exact match is 21.1%, while timestamp recall is 31.2% and trace F_1 is 36.4%. State Machine performs best in both final prediction and timestamp recovery, with 37.1% exact match and 53.9% trace F_1 . Blinking performs worst, with 6.4% exact match and 18.6% trace F_1 . Bounce Ball lies between these extremes. This ordering matches the operating regions in Figure 3a. It is consistent with persistent event displays producing more recoverable

Evaluation Domain / Region	Final EM (%)	VOR	Trace P (%)	Trace R (%)	Trace F_1 (%)	ACR (%)	RFR (%)
Part A. Trace Evaluation by Task Domain							
Bounce Ball	19.6%	0.71	59.2%	31.5%	36.6%	3.9%	3.6%
Blinking	6.4%	0.60	42.2%	13.8%	18.6%	2.4%	0.3%
State Machine	37.1%	0.74	72.5%	48.1%	53.9%	10.8%	3.1%
Macro Average	21.1%	0.68	58.0%	31.2%	36.4%	5.7%	2.3%
Part B. Trace Evaluation across ($N \times F$) Capability Regions							
Low Count, Low Freq	47.7%	1.19	50.2%	45.6%	45.5%	15.3%	4.2%
High Count, Low Freq	29.2%	0.57	72.7%	46.1%	51.8%	1.8%	4.5%
Low Count, High Freq	17.2%	1.12	21.7%	12.4%	14.9%	14.2%	0.3%
High Count, High Freq	0.2%	0.28	70.7%	18.1%	27.7%	0.2%	0.0%
Part C. Trace Diagnosis of Bounce Ball Interventions							
<i>Visual Evidence Family</i>							
Native + Structured (Baseline)	19.6%	0.71	59.2%	31.5%	36.6%	3.9%	3.6%
Dense Sampling (4 FPS)	29.3%	0.72	4.7%	3.3%	3.7%	28.3%	0.4%
Event-Centered Keyframes	68.6%	1.07	10.0%	9.8%	9.7%	68.3%	0.0%
<i>Prompting and Reasoning Family</i>							
Direct Answer [†]	20.4%	1.16	45.6%	40.2%	38.5%	7.5%	3.2%
Structured Trace	19.6%	0.71	59.2%	31.5%	36.6%	3.9%	3.6%
Multi-Turn Verification	20.3%	0.40	15.9%	9.5%	10.1%	18.2%	0.6%
Thinking / CoT	19.5%	2.13	33.8%	48.5%	36.9%	14.3%	2.1%
Role Prompting	19.3%	1.52	37.2%	44.9%	37.6%	10.8%	2.1%

Table 1: **Timestamp-recovery evaluation for Gemini 3.6 Flash.** Trace metrics use $\delta(F) = 1/(2F)$ and positive-event trials. Final EM includes no-event controls. Part B uses $N \leq 3$, $N \geq 5$, $F \leq 2.0$, and $F \geq 2.5$ Hz. Part C evaluates Bounce Ball. [†]Direct Answer scores voluntarily reported timestamps.

reported timestamps, while not isolating persistence from other domain differences.

The error pattern changes with count and frequency. In the low-count, low-frequency region, the Visual Observation Ratio is 1.19, so the model reports more timestamps than occur. Precision is 50.2%, and 15.3% of trials have a correct final answer despite a low-fidelity reported trace. Some correct counts therefore coexist with unmatched reported timestamps.

At high count and low frequency, the Visual Observation Ratio falls to 0.57, indicating substantial under-reporting. Precision rises to 72.7%, but recall remains only 46.1%. The model is usually accurate about the timestamps it does report, while omitting much of the sequence.

This effect is strongest at high count and high frequency. The model reports only 28% as many timestamps as occur, and trace recall falls to 18.1%, while precision remains 70.7%. The dominant high-load signature is therefore incomplete reported-timestamp recovery rather than broad over-reporting. Separating missed events from merged events would require a richer type- and order-aware alignment than used here.

The regional comparison reveals two distinct output regimes. At low load, excess reports and accidental correct counts are consistent with a mixture of unmatched and compensating events. At high load, reported events are comparatively well supported but far too few, which is consistent with omission or merging dominating the failure. The final integer alone would obscure this shift in error pattern.

Failure can also occur after event recovery. Most degradation is associated with incomplete reported traces, but timestamp recovery does not fully determine the final answer. RFR reaches 4.5% in the high-count, low-frequency region. In these cases, the reported trace meets the F_1 criterion but the final count remains incorrect, which is consistent with an output-level trace-to-answer aggregation mismatch.

6 What Moves the Boundary?

We choose Bounce Ball for interventions because each wall contact requires spatial localization of an interaction as well as temporal separation, retention, and accumulation of repeated events. We test whether its failures arise from temporal sampling, event localization, or inference format. Figure 4 reports accuracy averaged across frequencies. Appendix C.10 contains the complete intervention surfaces, and Table 1 Part C contains trace metrics.

Denser sampling improves low-count temporal access. Gemini’s native-video interface uses approximately 1 FPS in our setup. Explicit 4-FPS sampling raises overall accuracy from 19.6% to 29.3%, and 10 FPS is reliable for one event through 4.0 Hz. The recovery does not extend to longer sequences, and no stable high-count region emerges. The 4-FPS trace F_1 is only 3.7%, while 28.3% of trials have a correct answer with a low-fidelity trace. Better counts therefore need not reflect faithful event recovery.

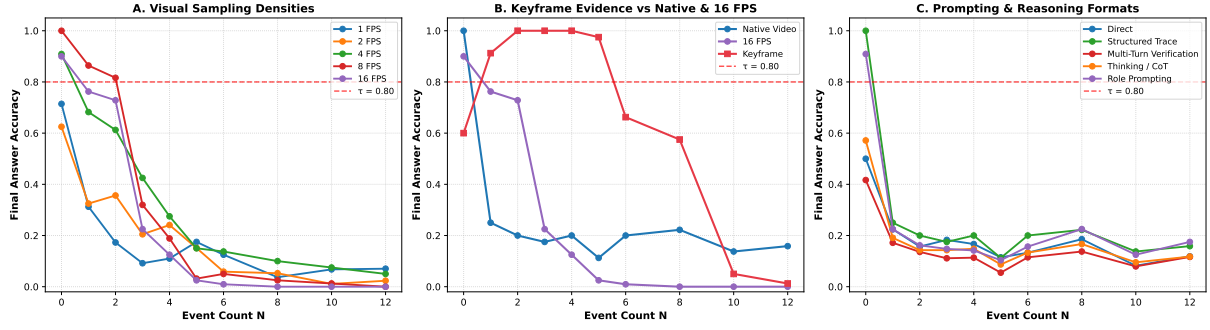


Figure 4: **Bounce Ball interventions.** Final-answer exact match averaged over frequencies. Sampling helps low counts, event-centered frames help through $N = 5$, and prompting does not expand the reliable region.

Keyframe evidence produces the largest recovery. For each ground-truth event at t_i , we provide keyframes at $t_i - 0.1$, t_i , and $t_i + 0.1$ seconds. This removes event search from the complete video. Accuracy rises to 68.6% and is near-perfect through $N = 5$, but falls to 0.66 at $N = 6$, 0.57 at $N = 8$, and nearly zero at $N \geq 10$. Localization is therefore important, but retention or accumulation still limits longer sequences. The trace F_1 remains 9.7%, and 68.3% of trials have a correct answer with a low-fidelity trace. Because one frame group is supplied per true event, this is an upper-bound visual-access condition.

Reasoning formats do not provide consistent recovery. Direct answering, structured tracing, multi-turn verification, thinking, and role prompting yield 19.3% to 20.4% accuracy. Thinking raises recall to 48.5% but over-reports events with a Visual Observation Ratio of 2.13 and 33.8% precision. Structured tracing is more precise at 59.2%, but recovers only 31.5% of true events. No prompting format expands the reliable count or frequency region.

Together, the interventions show that improved visual access does not eliminate the high-count boundary.

7 Natural-Video Boundary Transfer

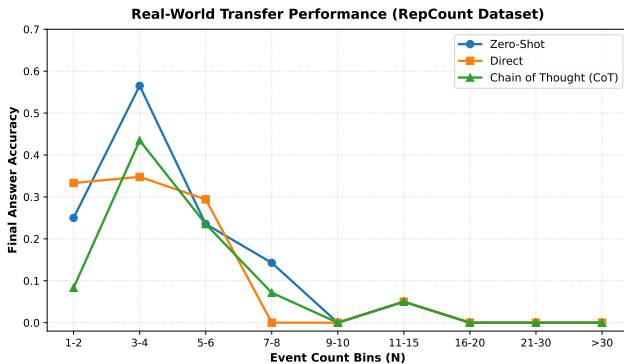


Figure 5: **Natural-video count-pattern check.** Exact-match accuracy on 152 TransRAC clips (Hu et al. 2022). All prompting formats concentrate accuracy in low-count bins.

Figure 5 reports exact-match accuracy by event-count bin

for the three prompting formats. We use 151 clips from TransRAC with repetition annotations (Hu et al. 2022), grouped by event count. Each clip is evaluated once with zero-shot, direct-answer, and chain-of-thought prompting for 456 trials. These natural videos contain camera motion, clutter, occlusion, and variable lighting. Frequency cannot be controlled independently, so this is a count-pattern check rather than a replication of the $N \times F$ surface. It reports final-answer exact match by count bin and does not apply trace-level evaluation. Accuracy concentrates in low-count bins $N \leq 4$, and no prompting format establishes a stable high-count region. This supports the qualitative prediction that reliability declines as repeated-event load rises despite natural variation, without claiming matched absolute accuracy or a specific causal mechanism. Natural videos therefore test external relevance of the controlled pattern, not whether the synthetic and natural distributions are identical. Outcomes above six events are sparse and often zero across prompting formats.

8 Conclusion and Discussion

Beyond benchmark scoring. This work maps reliable temporal regions and intervention effects. Controlled $N \times F$ profiles separate visibility, resolution, sequence length, and aggregation.

What the diagnosis reveals. Results are consistent with staged failure involving event access, retention, and aggregation. State Machine is easier than Blinking, but performance declines with sequence length. Keyframes provide one frame group per event, yet their residual decline shows visual search is insufficient.

Why executable traces and interventions matter. Final answers cannot distinguish access from downstream failures. Alignment reveals unmatched, under-reported, and over-reported events; joint metrics expose answer-trace mismatches. Interventions test alternatives.

Limitations. The study uses clean, regularly spaced repeated events, and increasing N at fixed F raises event load and span. Only two systems are profiled synthetically. Natural-video evaluation neither controls frequency nor uses executable traces. Reported traces are behavioural evidence, not direct access to latent computation.

Acknowledgments

Baskar, Cai, Shabihi, Satheesh, Islam, and Huang are supported by DARPA HR001124S0029-AIQ-FP-019, National Science Foundation TRAILS Institute (2229885). Private support was provided by Open Philanthropy and Apple. The Authors acknowledge the National Artificial Intelligence Research Resource (NAIRR) Pilot for contributing to this research result.

References

- Agarwal, A.; Patel, H. L.; Panda, S.; Meghwani, H.; Singh, J.; Dua, K.; Li, P.; Sheng, T.; Ravi, S.; and Roth, D. 2025. RCI: A Score for Evaluating Global and Local Reasoning in Multimodal Benchmarks. *arXiv:2509.23673*.
- Bai, S.; Cai, Y.; Chen, R.; Chen, K.; Chen, X.; Cheng, Z.; Deng, L.; Ding, W.; Gao, C.; Ge, C.; Ge, W.; Guo, Z.; Huang, Q.; Huang, J.; Huang, F.; Hui, B.; Jiang, S.; Li, Z.; Li, M.; Li, M.; Li, K.; Lin, Z.; Lin, J.; Liu, X.; Liu, J.; Liu, C.; Liu, Y.; Liu, D.; Liu, S.; Lu, D.; Luo, R.; Lv, C.; Men, R.; Meng, L.; Ren, X.; Ren, X.; Song, S.; Sun, Y.; Tang, J.; Tu, J.; Wan, J.; Wang, P.; Wang, P.; Wang, Q.; Wang, Y.; Xie, T.; Xu, Y.; Xu, H.; Xu, J.; Yang, Z.; Yang, M.; Yang, J.; Yang, A.; Yu, B.; Zhang, F.; Zhang, H.; Zhang, X.; Zheng, B.; Zhong, H.; Zhou, J.; Zhou, F.; Zhou, J.; Zhu, Y.; and Zhu, K. 2025. Qwen3-VL Technical Report. *arXiv:2511.21631*.
- Cai, Z.; Wang, A.; Satheesh, A.; Nakhawa, A.; Jae, H.; Powell, K.; Liu, M.; Jay, N.; Oh, S.; Wang, X.; Liang, Y.; Goldstein, T.; and Huang, F. 2025. MORSE-500: A Programmatically Controllable Video Benchmark to Stress-Test Multimodal Reasoning. *arXiv:2506.05523*.
- Chandrasegaran, K.; Gupta, A.; Hadzic, L. M.; Kota, T.; He, J.; Eyzaguirre, C.; Durante, Z.; Li, M.; Wu, J.; and Fei-Fei, L. 2024. HourVideo: 1-Hour Video-Language Understanding. In *Advances in Neural Information Processing Systems*, volume 37, 53168–53197.
- Chen, L.; Li, J.; Dong, X.; Zhang, P.; Zang, Y.; Chen, Z.; Duan, H.; Wang, J.; Qiao, Y.; Lin, D.; and Zhao, F. 2024. Are We on the Right Way for Evaluating Large Vision-Language Models? *arXiv:2403.20330*.
- Cheng, Z.; Hu, J.; Liu, Z.; Si, C. P.; Li, W.; and Gong, S. 2026. V-STaR: Benchmarking Video-LLMs on Video Spatio-Temporal Reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Findings*.
- Chow, W.; Mao, J.; Li, B.; Seita, D.; Guizilini, V.; and Wang, Y. 2025. PhysBench: Benchmarking and Enhancing Vision-Language Models for Physical World Understanding. In *International Conference on Learning Representations*.
- Clark, C.; Zhang, J.; Ma, Z.; Park, J. S.; Salehi, M.; Tripathi, R.; Lee, S.; Ren, Z.; Kim, C. D.; Yang, Y.; Shao, V.; Yang, Y.; Huang, W.; Gao, Z.; Anderson, T.; Zhang, J.; Jain, J.; Stoica, G.; Han, W.; Farhadi, A.; and Krishna, R. 2026. Molmo2: Open Weights and Data for Vision-Language Models with Video Understanding and Grounding. *arXiv:2601.10611*.
- Cores, D.; Dorkenwald, M.; Mucientes, M.; Snoek, C. G. M.; and Asano, Y. M. 2025. Lost in Time: A New Temporal Benchmark for VideoLLMs. In *36th British Machine Vision Conference 2025, BMVC 2025*. BMVA.
- Feng, B.; Lai, Z.; Li, S.; Wang, Z.; Wang, S.; Huang, P.; and Cao, M. 2025. Breaking Down Video LLM Benchmarks: Knowledge, Spatial Perception, or True Temporal Understanding? *arXiv preprint arXiv:2505.14321*.
- Fu, C.; Dai, Y.; Luo, Y.; Li, L.; Ren, S.; Zhang, R.; Wang, Z.; Zhou, C.; Shen, Y.; Zhang, M.; Chen, P.; Li, Y.; Lin, S.; Zhao, S.; Li, K.; Xu, T.; Zheng, X.; Chen, E.; Shan, C.; He, R.; and Sun, X. 2025. Video-MME: The First-Ever Comprehensive Evaluation Benchmark of Multi-modal LLMs in Video Analysis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 24108–24118.
- Fu, X.; Hu, Y.; Li, B.; Feng, Y.; Wang, H.; Lin, X.; Roth, D.; Smith, N. A.; Ma, W.-C.; and Krishna, R. 2024. BLINK: Multimodal Large Language Models Can See but Not Perceive. *arXiv:2404.12390*.
- Hao, Y.; Gu, J.; Wang, H. W.; Li, L.; Yang, Z.; Wang, L.; and Cheng, Y. 2025. Can MLLMs Reason in Multimodality? EMMA: An Enhanced MultiModal Reasoning Benchmark. In *Proceedings of the 42nd International Conference on Machine Learning (ICML 2025)*.
- Hu, H.; Dong, S.; Zhao, Y.; Lian, D.; Li, Z.; and Gao, S. 2022. TransRAC: Encoding Multi-scale Temporal Correlation with Transformers for Repetitive Action Counting. *arXiv preprint arXiv:2204.01018*.
- Hu, K.; Wu, P.; Pu, F.; Xiao, W.; Zhang, Y.; Yue, X.; Li, B.; and Liu, Z. 2025. Video-MMMU: Evaluating Knowledge Acquisition from Multi-Discipline Professional Videos. *arXiv preprint arXiv:2501.13826*.
- Johnson, J.; Hariharan, B.; van der Maaten, L.; Fei-Fei, L.; Zitnick, C. L.; and Girshick, R. 2017. CLEVR: A Diagnostic Dataset for Compositional Language and Elementary Visual Reasoning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2901–2910.
- Li, C.; Chen, Q.; Li, Z.; Tao, F.; and Zhang, Y. 2024a. VideoCogQA: A Controllable Benchmark for Evaluating Cognitive Abilities in Video-Language Models. *arXiv:2411.09105*.
- Li, K.; Wang, Y.; He, Y.; Li, Y.; Wang, Y.; Liu, Y.; Wang, Z.; Xu, J.; Chen, G.; Luo, P.; Wang, L.; and Qiao, Y. 2024b. MVBench: A Comprehensive Multi-modal Video Understanding Benchmark. *arXiv:2311.17005*.
- Li, Y.; Chen, X.; Hu, B.; Wang, L.; Shi, H.; and Zhang, M. 2024c. Videovista: A versatile benchmark for video understanding and reasoning. *arXiv preprint arXiv:2406.11303*.
- Liu, Y.; Li, S.; Liu, Y.; Wang, Y.; Ren, S.; Li, L.; Chen, S.; Sun, X.; and Hou, L. 2024. TempCompass: Do Video LLMs Really Understand Videos? In *Findings of the Association for Computational Linguistics: ACL 2024*. Association for Computational Linguistics.
- Liu, Y.; Ouyang, K.; Wu, H.; Liu, Y.; Sui, L.; Li, X.; Zhong, Y.; Charles, Y.; Zhou, X.; and Sun, X. 2025. VideoReason-Bench: Can MLLMs Perform Vision-Centric Complex Video Reasoning? *arXiv preprint arXiv:2505.23359*.

- Lu, H.; Huo, Y.; Du, Y.; Zhao, Z.; Guo, L.; Wang, B.; Chen, W.; and Liu, J. 2025. Needle In A Video Haystack: A Scalable Synthetic Evaluator for Video MLLMs. In Yue, Y.; Garg, A.; Peng, N.; Sha, F.; and Yu, R., eds., *International Conference on Learning Representations*, volume 2025, 99750–99782.
- Lu, P.; Bansal, H.; Xia, T.; Liu, J.; Li, C.; Hajishirzi, H.; Cheng, H.; Chang, K.-W.; Galley, M.; and Gao, J. 2024. MathVista: Evaluating Mathematical Reasoning of Foundation Models in Visual Contexts. *arXiv:2310.02255*.
- Mangalam, K.; Akshulakov, R.; and Malik, J. 2023. EgoSchema: A Diagnostic Benchmark for Very Long-form Video Language Understanding. In Oh, A.; Naumann, T.; Globerson, A.; Saenko, K.; Hardt, M.; and Levine, S., eds., *Advances in Neural Information Processing Systems*, volume 36, 46212–46244. Curran Associates, Inc.
- Qiu, S.; Guo, S.; Song, Z.-Y.; Sun, Y.; Cai, Z.; Wei, J.; Luo, T.; Yin, Y.; Zhang, H.; Hu, Y.; et al. 2025. Phybench: Holistic evaluation of physical perception and reasoning in large language models. *arXiv preprint arXiv:2504.16074*.
- Rawal, R.; Saifullah, K.; Farr'e, M.; Basri, R.; Jacobs, D.; Somepalli, G.; and Goldstein, T. 2024. Cinepile: A long video question answering dataset and benchmark. *arXiv preprint arXiv:2405.08813*.
- Shojaee, P.; Mirzadeh, I.; Alizadeh, K.; Horton, M.; Bengio, S.; and Farajtabar, M. 2025. The Illusion of Thinking: Understanding the Strengths and Limitations of Reasoning Models via the Lens of Problem Complexity. *arXiv:2506.06941*.
- Song, E.; Chai, W.; Xu, W.; Xie, J.; Liu, Y.; and Wang, G. 2025. Video-MMLU: A Massive Multi-Discipline Lecture Understanding Benchmark. *arXiv:2504.14693*.
- Sun, Y.; Hu, S.; Zhou, G.; Zheng, K.; Hajishirzi, H.; Dziri, N.; and Song, D. 2025. OMEGA: Can LLMs Reason Outside the Box in Math? Evaluating Exploratory, Compositional, and Transformative Generalization. *arXiv:2506.18880*.
- Tong, J.; Tang, J.; Li, H.; Mou, Y.; Zhang, M.; Zhao, J.; Wen, Y.; Song, F.; Zhan, J.; Lu, Y.; Tao, C.; Guo, Z.; Yu, J.; Cheng, T.; Xi, Z.; Jiang, C.; Yin, Z.; Zheng, Y.; Ge, W.; Chen, G.; Gui, T.; Qiu, X.; Zhang, Q.; and Huang, X. 2025. Game-RL: Synthesizing Multimodal Verifiable Game Data to Boost VLMs' General Reasoning. *arXiv:2505.13886*.
- Tong, S.; Liu, Z.; Zhai, Y.; Ma, Y.; LeCun, Y.; and Xie, S. 2024. Eyes Wide Shut? Exploring the Visual Shortcomings of Multimodal LLMs. *arXiv:2401.06209*.
- Wang, W.; Gao, Z.; Gu, L.; Pu, H.; Cui, L.; Wei, X.; Liu, Z.; Jing, L.; Ye, S.; Shao, J.; Wang, Z.; Chen, Z.; Zhang, H.; Yang, G.; Wang, H.; Wei, Q.; Yin, J.; Li, W.; Cui, E.; Chen, G.; Ding, Z.; Tian, C.; Wu, Z.; Xie, J.; Li, Z.; Yang, B.; Duan, Y.; Wang, X.; Hou, Z.; Hao, H.; Zhang, T.; Li, S.; Zhao, X.; Duan, H.; Deng, N.; Fu, B.; He, Y.; Wang, Y.; He, C.; Shi, B.; He, J.; Xiong, Y.; Lv, H.; Wu, L.; Shao, W.; Zhang, K.; Deng, H.; Qi, B.; Ge, J.; Guo, Q.; Zhang, W.; Zhang, S.; Cao, M.; Lin, J.; Tang, K.; Gao, J.; Huang, H.; Gu, Y.; Lyu, C.; Tang, H.; Wang, R.; Lv, H.; Ouyang, W.; Wang, L.; Dou, M.; Zhu, X.; Lu, T.; Lin, D.; Dai, J.; Su, W.; Zhou, B.; Chen, K.; Qiao, Y.; Wang, W.; and Luo, G. 2025. InternVL3.5: Advancing Open-Source Multimodal Models in Versatility, Reasoning, and Efficiency. *arXiv:2508.18265*.
- Wang, X.; Wei, J.; Schuurmans, D.; Le, Q.; Chi, E.; Narang, S.; Chowdhery, A.; and Zhou, D. 2022. Self-consistency improves chain of thought reasoning in language models. *arXiv preprint arXiv:2203.11171*.
- Wang, X.; Zhou, Y.; Liu, X.; Lu, H.; Xu, Y.; He, F.; Yoon, J.; Lu, T.; Liu, F.; Bertasius, G.; Bansal, M.; Yao, H.; and Huang, F. 2024. Mementos: A Comprehensive Benchmark for Multimodal Large Language Model Reasoning over Image Sequences. In Ku, L.-W.; Martins, A.; and Srikumar, V., eds., *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 416–442. Bangkok, Thailand: Association for Computational Linguistics.
- Wu, H.; Li, D.; Chen, B.; and Li, J. 2024. LongVideoBench: A Benchmark for Long-context Interleaved Video-Language Understanding. *arXiv:2407.15754*.
- Xiang, K.; Li, H.; Zhang, T. J.; Huang, Y.; Liu, Z.; Qu, P.; He, J.; Chen, J.; Yuan, Y.-J.; Han, J.; Xu, H.; Li, H.; Sachan, M.; and Liang, X. 2025. SeePhys: Does Seeing Help Thinking? – Benchmarking Vision-Based Physics Reasoning. *arXiv:2505.19099*.
- Yuan, H.; Sun, Y.; Li, Y.; Zhang, T.; Deng, X.; Ding, H.; Qi, L.; Wang, A.; Li, X.; and Yang, M.-H. 2025. Visual Reasoning Tracer: Object-Level Grounded Reasoning Benchmark. *arXiv preprint arXiv:2512.05091*.
- Yue, X.; Ni, Y.; Zhang, K.; Zheng, T.; Liu, R.; Zhang, G.; Stevens, S.; Jiang, D.; Ren, W.; Sun, Y.; Wei, C.; Yu, B.; Yuan, R.; Sun, R.; Yin, M.; Zheng, B.; Yang, Z.; Liu, Y.; Huang, W.; Sun, H.; Su, Y.; and Chen, W. 2024. MMMU: A Massive Multi-discipline Multimodal Understanding and Reasoning Benchmark for Expert AGI. *arXiv:2311.16502*.
- Zelikman, E.; Wu, Y.; Mu, J.; and Goodman, N. 2022. Star: Bootstrapping reasoning with reasoning. *Advances in Neural Information Processing Systems*, 35: 15476–15488.

Contents

1	Introduction	1
2	Related Work	2
3	Controlled Profiling and Trace Evaluation	3
3.1	Controlled Temporal Task Space	3
3.2	Executable Traces and Metrics	3
3.3	Experimental Protocol and Operating Boundaries	4
4	Mapping Reliable Operating Regions	4
5	Diagnosing Trace-Level Failures	5
6	What Moves the Boundary?	6
7	Natural-Video Boundary Transfer	7
8	Conclusion and Discussion	7
A	Benchmark Setup and Model Specifications	10
A.1	Task and Renderer Specifications	10
A.2	Supplied Frame Sequences	11
A.3	Model Configurations	11
B	Capability Boundaries and Statistical Robustness	12
B.1	Qwen3-VL Scale Comparison	12
B.2	InternVL3.5 Scale and Domain Comparison	12
B.3	Operational Boundary Summary	12
B.4	Seed-Level Variation	12
B.5	Operational Boundary Robustness	13
C	Interventions, Prompts, and Trace Evaluation	13
C.1	Domain Task Questions	13
C.2	Experiment 1: Full $N \times F$ Matrix Boundary Sweep	13
C.3	Experiment 2: Frame Sampling Density Interventions	13
C.4	Experiment 3: Oracle Keyframe Evidence Interventions	13
C.5	Experiment 4: Prompting & Reasoning Mode Interventions	14
C.6	Experiment 5: MORSE Trace Diagnosis & Error Taxonomy	14
C.7	Real-World Transfer Evaluation Prompts	14
C.8	Output Parsing and Evaluation	15
C.9	Cross-Model Prompting Results	15
C.10	Frame-Sampling Density Sweeps	15
C.11	Event-Centered Keyframe Extraction	15
C.12	Complete Gemini Intervention Analyses	15
C.13	Open-Model Keyframe and Sampling Interventions	15
C.14	GPT-5.6 Sol Frame-Sequence Interventions & API Limitations	15
C.15	Trace Extraction and Matching Algorithm	17
C.16	Aggregate Trace Error Summary	18
D	Computational Cost Analysis	18

E	Extended Related Work	18
E.1	Video-Language Benchmarks and Controlled Evaluation	18
E.2	Programmatic Video and Intermediate Traces	19
F	Qualitative Trace Examples and Taxonomy Profiling	19
F.1	Case-Selection Protocol	20
F.2	Faithful Event Recovery (Correct Matches)	20
F.3	Missed Events (Under-Reporting / Perception Failure)	20
F.4	Hallucinated Events (Over-Reporting / Spurious Detection)	20
F.5	Wrong Accumulation (Reasoning Failure Ratio / RFR)	20
F.6	Accidental Correctness (Accidental Correctness Ratio / ACR)	20
F.7	Temporally Displaced Events	20

Appendix Overview

This appendix provides the extended evidence, methodological detail, and reproducibility material that support the main paper’s central finding: current video–language models can fail at elementary event bookkeeping as temporal load increases. The sections below connect each supplement directly to a component of the main-paper argument.

- **Section A** specifies the controlled Manim-based task renderer, supplied frame sequences, and model configurations. These details establish that the capability boundary is measured on videos with known temporal ground truth.
- **Section B** provides the full capability heatmaps, cross-model boundary summaries, seed-level variation, and operational boundary robustness, showing how performance changes across event count, frequency, scale, and domain.
- **Section C** details diagnostic interventions (prompting formats, sampling density sweeps, and oracle keyframes) alongside trace extraction, matching algorithms, and error auditing.
- **Section D** provides the complete computational API financial cost analysis across all experiments and visual domains.
- **Section E** situates the benchmark within the broader video-language and programmatic video literature.
- **Section F** provides representative qualitative trace examples across all 6 diagnostic failure categories.

A Benchmark Setup and Model Specifications

A.1 Task and Renderer Specifications

Each synthetic instance is specified by a visual domain d , event count N , event frequency F , and rendering seed s . We use Bounce Ball wall contacts, Blinking on-pulses, and State Machine categorical transitions. The task question asks for the number of target events in the rendered video.

Manim Animation Engine and Trace Generation. We construct all synthetic video benchmarks using the Manim¹ mathematical animation engine in Python. Manim is chosen because it allows programmatic, frame-accurate control over spatial trajectories, visual state transitions, and rendering framerates without visual compression artifacts or timing jitter. For each trial (d, N, F, s) :

1. **Event Scheduling:** Given count N and frequency F , a deterministic event scheduler calculates the ground-truth event timestamps $t_1, t_2, \dots, t_N$ within the active temporal window.
2. **Manim Video Rendering:** Manim scenes procedurally animate visual elements (wall collisions in `bounce_ball`, visual pulse opacities in `blinking`, and categorical node highlights in `state_machine`) matching the exact timestamps t_i .
3. **Executable Trace Generation:** Simultaneously during scene construction, the renderer logs an executable ground-truth trace

$$\mathcal{T}^* = ((t_i, e_i, s_i^-, s_i^+, c_i))_{i=1}^N,$$

where t_i is the event timestamp, e_i is the event type, s_i^- and s_i^+ are the states before and after the event, and c_i is the running cumulative count. Executing the trace returns the final count $c_N = N$.

We evaluate $N \in \{0, 1, 2, 3, 4, 5, 6, 8, 10, 12\}$ and $F \in \{0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0\}$ Hz. Every clip has a fixed duration of 24 seconds. The active event sequence occupies approximately N/F seconds. The remaining time is filled with static frames before or after the active sequence, with the allocation determined by the rendering seed. Thus the design varies event load and active temporal span without changing total duration.

For each positive-count (N, F) cell, we render ten randomized videos. The seed changes nuisance appearance factors, including color, geometry, trajectory, initial state, orientation, and start delay, while preserving the event schedule. The $N = 0$ control is rendered ten times at nominal $F = 1.0$ Hz and is excluded from positive-event trace ratios. This yields 730 videos per domain and 2,190 videos across the three domains.

Rationale for Capability Axes, Parameter Ranges, and Granularity. We select Event Count (N) and Event Frequency (F) as orthogonal capability axes to isolate two complementary failure modes in video-language models: temporal working memory load (N) and temporal perceptual resolution (F). The frequency range $F \in [0.5, 4.0]$ Hz spans from 0.5 Hz (consecutive events separated by 2.0s, well within standard VLM 1–2 FPS sampling windows) up to 4.0 Hz (0.25s spacing), deliberately pushing models beyond standard VLM frame-sampling resolution. The count range $N \in [0, 12]$ includes $N = 0$ as a no-event negative control and extends up to $N = 12$, which fills the entire 24-second clip duration at the minimum frequency $F = 0.5$ Hz ($N/F = 12/0.5 = 24$ s). Sweep granularity uses finer steps

at low event counts ($N \in \{1, 2, 3, 4, 5, 6\}$) to precisely locate the onset of breakdown, and wider steps at high loads ($N \in \{8, 10, 12\}$). This parametric design generalizes to any temporal accounting task by defining a target event primitive, sweeping event load N and occurrence rate F , and auditing predicted responses against executable ground-truth traces.

A.2 Supplied Frame Sequences

The reported sampling rates describe the frames supplied to the evaluated systems, not undocumented internal video processing. Gemini receives native video at approximately 1 FPS in our setup and Qwen receives 2 FPS. The Bounce Ball visual-access study reuses the same generated videos and seed identifiers while changing one source of evidence at a time. Frame-sampling conditions provide regularly sampled frame sequences at the selected density. The event-centered keyframe condition supplies three frames around each true event, at $t_i - 0.1$, t_i , and $t_i + 0.1$ seconds. This condition removes the need to search the full video for event locations, but it still requires the model to retain and aggregate the supplied event evidence. The frame interventions therefore diagnose whether a change in final-answer accuracy is compatible with improved external visual access, without attributing the change to any particular internal mechanism.

A.3 Model Configurations

The main synthetic evaluation compares Gemini 3.6 Flash and Qwen3-VL-235B. Both systems receive the same domain-specific zero-shot question and use their native video interfaces. Gemini is supplied approximately 1 FPS and Qwen 2 FPS. These rates are external input settings. They should not be interpreted as measurements of either system’s internal temporal processing.

Table 2 reports the configuration, domain-level exact-match accuracy, and maximum count boundary for the available cross-model profiles. The table shows that State Machine is the strongest domain for every listed model, while the reliable count prefix remains short for most open-model configurations. The 38B InternVL variant reaches the largest open-model count boundary of six, but this remains below Gemini’s boundary of twelve.

Table 3 compares the main-paper Gemini macro average with pooled open-model trace metrics. Although the two render sets differ slightly, both instantiate the same three tasks and the same N -by- F design. The comparison is therefore task-matched rather than paired. As detailed in Appendix C.15, these statistics evaluate timestamps expressed in the model response and constitute behavioural evidence rather than direct measurements of internal representations.

Gemini attains the highest pooled trace F_1 (36.4%). Among the open models, Qwen3-VL-8B attains the highest reported-trace F_1 (15.8%), but exhibits severe over-reporting ($VOR = 13.04$). Qwen3-VL-32B and Qwen3-VL-235B instead under-report events ($VOR = 0.43$ and 0.21 , respectively). InternVL yields nonzero final-answer accuracy but no extractable timestamped events. Accordingly, its zero trace values characterize the format of its visible responses, rather than establishing that the model observed no events. A controlled cross-model trace-fidelity comparison would require

¹<https://github.com/3b1b/manim>

Model	Input	Bounce EM (%)	Blink EM (%)	State EM (%)	Max. count boundary
Gemini 3.6 Flash	1 FPS	19.6	6.4	37.1	12
Qwen3-VL-8B	2 FPS	12.4	10.9	26.6	2
Qwen3-VL-32B	2 FPS	15.5	13.2	26.2	1
Qwen3-VL-235B	2 FPS	19.2	12.0	26.4	1
InternVL3.5-8B	16 frames	9.0	11.2	26.2	3
InternVL3.5-30B-A3B	16 frames	9.2	10.4	24.5	3
InternVL3.5-38B	16 frames	12.8	9.9	32.0	6

Table 2: **Cross-model temporal-profile summary.** Exact-match accuracy is reported separately for Bounce Ball, Blinking, and State Machine across 730 trials per domain. The maximum count boundary is the largest reliable contiguous positive-count prefix observed at any tested frequency and domain.

Model	EM (%)	VOR	P (%)	R (%)	Trace F_1 (%)	ACR (%)	RFR (%)
Gemini 3.6 Flash	21.1	0.68	58.0	31.2	36.4	5.7	2.3
Qwen3-VL-8B	16.6	13.04	21.0	18.8	15.8	6.9	1.4
Qwen3-VL-32B	18.3	0.43	21.2	14.0	14.8	9.3	1.5
Qwen3-VL-235B	19.2	0.21	18.4	10.0	11.4	10.3	1.1
InternVL3.5-8B	15.5	0.00	0.0	0.0	0.0	15.5	0.0
InternVL3.5-30B-A3B	14.7	0.00	0.0	0.0	0.0	13.7	0.0
InternVL3.5-38B	18.2	0.00	0.0	0.0	0.0	13.8	0.0

Table 3: **Task-matched cross-model trace metrics across temporal domains.** Macro averages reported on task-matched videos, with 730 trials per domain. Metrics score only explicit, parser-recognized timestamps and do not infer events from free-form text.

a common structured-output prompt; the present results compare the evidence each model externalizes under its available protocol.

B Capability Boundaries and Statistical Robustness

This section provides full-resolution capability surfaces for the primary evaluation and extended model-family comparisons. Each cell reports final-answer exact match for a controlled event-count and event-frequency condition. The family plots provide a qualitative cross-architecture check of whether the low-count concentration observed in the primary profiles recurs at other model scales. Figures 11 and 12 provide the Qwen3-VL family and InternVL3.5 family profiles, respectively.

B.1 Qwen3-VL Scale Comparison

Figure 11 compares Qwen3-VL-8B, Qwen3-VL-32B, and Qwen3-VL-235B on the State Machine task. Across the three scales, accuracy is concentrated at small event counts and falls sharply once the count exceeds four, including at the lowest tested frequency. Larger scales improve some easy cells, but the figure does not show a broad high-count region at slow event rates. Thus, scale changes the level of accuracy in parts of the surface but does not remove the count-dependent boundary in this task.

B.2 InternVL3.5 Scale and Domain Comparison

Figure 12 extends the comparison to InternVL3.5-8B, InternVL3.5-30B-A3B, and InternVL3.5-38B across State

Machine, Blinking, and Bounce Ball. The family shares the same qualitative shape across domains. Performance is strongest in the small-count regime and contracts as event count grows, including in low-frequency conditions where events are well separated. These figures report end-to-end system behaviour under controlled inputs; they do not identify the internal mechanism producing the boundary. Their value is to show that the boundary pattern is not restricted to one Qwen configuration or to one temporal domain.

B.3 Operational Boundary Summary

For each model, domain, and fixed frequency, the count boundary is the largest positive count whose tested prefix meets the 80% operational target. The frequency boundary is defined analogously at a fixed count. This contiguous-prefix rule prevents a later isolated success from being reported as a reliable operating region. We use the cross-model comparison as a qualitative robustness check, not as a claim of universality across video-language models.

B.4 Seed-Level Variation

Each synthetic cell contains ten independently randomized renderings. For a cell with k correct answers, the reported accuracy is $k/10$. Seed-level uncertainty is summarized with a two-sided 95% Wilson score interval for selected headline cells and intervention comparisons. The full heatmaps retain the cell-wise accuracy rather than replacing the surface with a single aggregate score.

Table 4 reports the interval summary for the baseline and key intervention comparisons. The baseline interval does

not overlap the event-centered-keyframe interval, and the keyframe improvement is much larger than the corresponding sampling improvement. These intervals quantify uncertainty in the aggregate exact-match estimates, while the heatmaps retain the variation across individual (N, F) cells.

B.5 Operational Boundary Robustness

We use $\tau = 0.80$ as an operational reliability target. A cell is reliable when at least eight of ten renderings are correct. At fixed frequency, the count boundary is the largest tested positive count for which that count and every smaller tested positive count meet the target. At fixed count, the frequency boundary applies the same rule over increasing tested frequencies. This definition is descriptive and does not treat the threshold as a confidence bound.

C Interventions, Prompts, and Trace Evaluation

This appendix documents all domain task questions, prompt condition templates, and input formatting instructions across the 5 core experiments defined in our controlled evaluation framework.

C.1 Domain Task Questions

For every experimental trial across all 5 experiments, the model receives the visual video input paired with a zero-shot domain task question requesting the total count of target events. The exact questions per benchmark domain are:

Benchmark Task Questions

Bounce Ball Domain:

"How many times did the ball contact the walls?"

Blinking Domain:

"How many times did the object blink?"

State Machine Domain:

"How many state transitions occurred in the video?"

C.2 Experiment 1: Full $N \times F$ Matrix Boundary Sweep

Motivation & Protocol. Experiment 1 establishes the baseline operational capability boundary (x^*) across Event Count ($N \in [0, 1, 2, 3, 4, 5, 6, 8, 10, 12]$) and Event Frequency ($F \in [0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0]$ Hz). All trials in Experiment 1 use the `structured_trace` prompt baseline on native video inputs.

Experiment 1: Structured Trace Baseline Prompt (`structured_trace`)

Question: question
Observe the video carefully and provide a step-by-step reasoning trace tracking every event, its timestamp (in seconds), and the running count. Format your response as follows: 1. Step-by-Step Event Ledger (timestamp, event type, running count) 2. Final Answer inside `\boxed{}` (e.g. `\boxed{4}`)

C.3 Experiment 2: Frame Sampling Density Interventions

Motivation & Protocol. Experiment 2 tests whether performance breakdown at high frequencies ($F \geq 2.0$ Hz) stems from temporal perceptual sampling limits or downstream temporal reasoning limits. It evaluates 7 sampling densities (native_video, 1, 2, 4, 8, 10, 16 FPS) paired with the structured trace prompt:

Experiment 2: Frame Sampling Density Intervention Prompt

[INPUT MODE: Supplied Frame Grid at FPS FPS]
Question: question
Observe the video carefully and provide a step-by-step reasoning trace tracking every event, its timestamp (in seconds), and the running count. Format your response as follows: 1. Step-by-Step Event Ledger (timestamp, event type, running count) 2. Final Answer inside `\boxed{}` (e.g. `\boxed{4}`)

C.4 Experiment 3: Oracle Keyframe Evidence Interventions

Motivation & Protocol. Experiment 3 isolates video frame search from temporal tallying by supplying perfect oracle visual keyframes. For each ground-truth event at t_i , frame triplets at $(t_i - 0.1s, t_i, t_i + 0.1s)$ are extracted and provided directly to the model.

Experiment 3: Oracle Keyframe Evidence Prompt (`oracle_evidence`)

[ORACLE EVIDENCE AVAILABLE: Key event windows extracted at $t_i \pm 0.1s$]
Question: question
Observe the video carefully and provide a step-by-step reasoning trace tracking every event, its timestamp (in seconds), and the running count. Format your response as follows: 1. Step-by-Step Event Ledger (timestamp, event type, running count) 2. Final Answer inside `\boxed{}` (e.g. `\boxed{4}`)

Condition	Correct Runs	Total Runs	Accuracy (%)	Lower Interval (%)	Upper Interval (%)
Gemini native-video baseline	143	730	19.6	16.9	22.6
Gemini 4-FPS sampling	214	730	29.3	26.1	32.7
Gemini event-centered keyframes	501	730	68.6	65.2	71.9

Table 4: **Gemini seed-level variation for Bounce Ball interventions.** Each condition has 730 trials. Intervals are two-sided 95% Wilson score intervals for final-answer exact match.

C.5 Experiment 4: Prompting & Reasoning Mode Interventions

Motivation & Protocol. Experiment 4 measures the impact of prompt structures, reasoning formats, self-correction, and system instructions on capability breakdown. It evaluates 5 distinct prompt conditions:

Experiment 4.1: Direct Answer Condition (*direct*)

Question: question
Observe the video carefully. Provide your final answer formatted inside `\boxed{}` (e.g. `\boxed{4}`).

Experiment 4.2: Structured Trace Condition (*structured_trace*)

Question: question
Observe the video carefully and provide a step-by-step reasoning trace tracking every event, its timestamp (in seconds), and the running count. Format your response as follows: 1. Step-by-Step Event Ledger (timestamp, event type, running count) 2. Final Answer inside `\boxed{}` (e.g. `\boxed{4}`)

Experiment 4.3: Multi-Turn Verification Condition (*multi_turn_verification*)

Question: question
First, carefully list every detected event with its approximate timestamp and current count. Second, audit your event list to verify whether any events were missed, merged, or double-counted. Finally, state your verified final answer inside `\boxed{}` (e.g. `\boxed{4}`).

Experiment 4.4: Thinking / Chain-of-Thought Condition (*thinking*)

Question: question
Use deep step-by-step video analysis. Thoroughly analyze the temporal video sequence frame-by-frame, count all target visual events, and output your final count inside `\boxed{}` (e.g. `\boxed{4}`).

Experiment 4.5: Role Prompting Condition (*role_prompting*)

System Instruction: You are an expert video analytics systems auditor specializing in fine-grained temporal event verification.
Question: question
Apply rigorous visual event auditing. Log all timestamped visual transitions and state your final answer inside `\boxed{}` (e.g. `\boxed{4}`).

C.6 Experiment 5: MORSE Trace Diagnosis & Error Taxonomy

Motivation & Protocol. Experiment 5 audits intermediate model reasoning traces against executable ground-truth traces to measure Trace Precision (P), Recall (R), Trace F_1 , Accidental Correctness Rate (ACR), and Reasoning Failure Rate (RFR).

Experiment 5: MORSE Executable Trace Diagnostic Prompt

Question: question
Observe the video carefully and provide a step-by-step reasoning trace tracking every event, its timestamp (in seconds), and the running count. Format your response as follows: 1. Step-by-Step Event Ledger (timestamp, event type, running count) 2. Final Answer inside `\boxed{}` (e.g. `\boxed{4}`)

C.7 Real-World Transfer Evaluation Prompts

To evaluate model transfer performance on real-world physical activity videos (e.g., the RepCount / TransRAC benchmark), we test zero-shot, chain-of-thought (*cot*), and direct prompt conditions using the following exact templates:

Real-World Zero-Shot Prompt (*zero_shot*)

How many times does the person perform the repetitive exercise in this video? Show your reasoning and put the final answer in `\boxed{}`.

Real-World Chain-of-Thought Prompt (cot)

How many times does the person perform the repetitive exercise in this video? First, describe what exercise is being performed. Then, enumerate each individual repetition you observe, noting approximately when each one occurs. Finally, provide your total count. Put the final answer in \boxed{ }.

Real-World Direct Answer Prompt (direct)

Count the number of exercise repetitions in this video. Reply with only a number.

C.8 Output Parsing and Evaluation

We parse the final integer from each response, treating an unparseable answer as incorrect. Trace extraction is described in Appendix C.15. Briefly, only explicit timestamps in the visible response are treated as reported events; ordinal descriptions and final counts alone do not yield timestamps. Consequently, the trace metrics quantify the evidence externalized by each prompting condition. Direct-answer outputs are scored for exact match, and any trace score is based solely on timestamps voluntarily included in the response.

C.9 Cross-Model Prompting Results

Table 5 places all available Qwen3-VL-8B and InternVL3.5-8B prompt conditions beside the corresponding Gemini reference conditions. The render sets differ slightly but share the Bounce Ball task and parameterization.

Gemini’s prompt variants have similar final-answer accuracy but substantially different reported-evidence profiles. The available Qwen conditions exhibit a related separation. Multi-turn produces the highest final-answer exact match (13.5%) and trace F_1 (13.4%) among the listed Qwen variants, whereas Direct and CoT exhibit substantial over-reporting and low precision. InternVL produces nonzero final answers in every condition but no extractable timestamps. These results distinguish the evidence expressed under each prompt from any unobserved internal reasoning process. In particular, the table shows that changing the requested reasoning format can change the visible trace substantially without establishing a corresponding change in temporal capability.

C.10 Frame-Sampling Density Sweeps

All visual-access interventions evaluate Bounce Ball, Blinking, and State Machine visual tasks using the same rendered videos and seeds as the native-video baseline. The sampling sweep changes only the density of supplied frames. The main paper reports the corresponding Gemini results. This appendix provides the complete cross-domain Gemini and open-model visual-access evidence below.

C.11 Event-Centered Keyframe Extraction

For each true event at time t_i , the keyframe condition provides the frame triplet

$$\mathcal{K}_i = \{I(t_i - 0.1\text{s}), I(t_i), I(t_i + 0.1\text{s})\}.$$

This is an upper-bound visual-access probe because one frame group is provided for every true event. It removes the need to search the full video for event locations while preserving the requirement to retain and aggregate event evidence.

C.12 Complete Gemini Intervention Analyses

Figures 6, 7, and 8 present the 3-panel intervention analysis across visual sampling densities, keyframe evidence, and prompting formats for all three benchmark domains.

Full cell-by-cell 12-panel capability surface heatmaps for Bounce Ball (Figure 13), Blinking (Figure 14), and State Machine (Figure 15) are detailed in the heatmap section preceding the qualitative examples. Denser regular sampling improves a limited low-count portion of the surface, whereas event-centered keyframes extend accuracy on discrete physical contact domains (Bounce Ball exact match increases from 19.5% baseline up to 68.6%). However, on the State Machine domain, oracle keyframe evidence causes a severe performance collapse for Gemini 3.6 Flash (exact match drops from 36.8% baseline and 40.7% under 4 FPS down to 6.3%). Because state transitions represent categorical mode shifts requiring continuous temporal context to verify state persistence, stripping non-event frames removes the background state history necessary for sequential state tracking.

C.13 Open-Model Keyframe and Sampling Interventions

On the State Machine domain, supplying event-centered keyframe evidence substantially improves open-model exact match. For Qwen3-VL-8B, exact match increases from 26.6% under native video (800 trials) to 69.4% under event-centered keyframes (720 trials), a gain of +42.8 percentage points. For InternVL3.5-8B, keyframe triplets improve exact match from 26.2% to 32.1% (+5.9 points).

C.14 GPT-5.6 Sol Frame-Sequence Interventions & API Limitations

Unlike native video models, GPT-5.6 Sol does not accept raw container video files directly. Instead, videos are manually sampled into ordered sequences of image frames before being passed to the API.

API Frame Ceiling & Token Context Limitations. During multi-density sampling sweeps, GPT-5.6 Sol encountered strict API payload constraints. Specifically, the deployment environment enforces a maximum limit of 50 images per request (BadRequestError: Too many images in request: 51, maximum allowed: 50). Consequently, 24-second videos sampled at higher densities (4 FPS = 96 frames, 8 FPS = 192 frames, 10 FPS = 240 frames, 16 FPS = 384 frames) failed due to payload size and token context window limits. Evaluation was successfully completed for 1 FPS (24 frames $\leq$ 50), 2 FPS (48 frames $\leq$ 50), Oracle Keyframe Evidence ($\approx$ 3*N* frames), and 2-FPS prompting interventions (direct, structured_trace, multi_turn_verification, thinking, role_prompting). Table 6 provides the

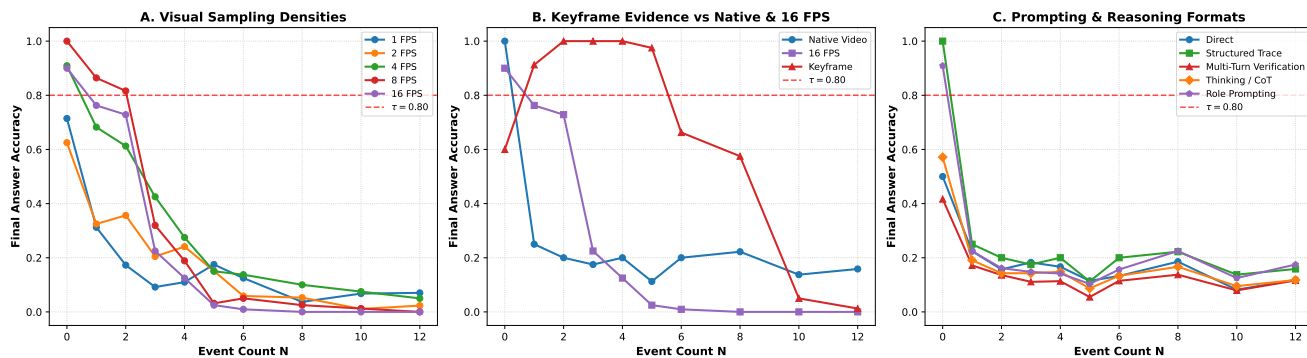


Figure 6: **Bounce Ball interventions.** Final-answer exact match averaged over frequencies across visual sampling densities, keyframe evidence, and prompting strategies.

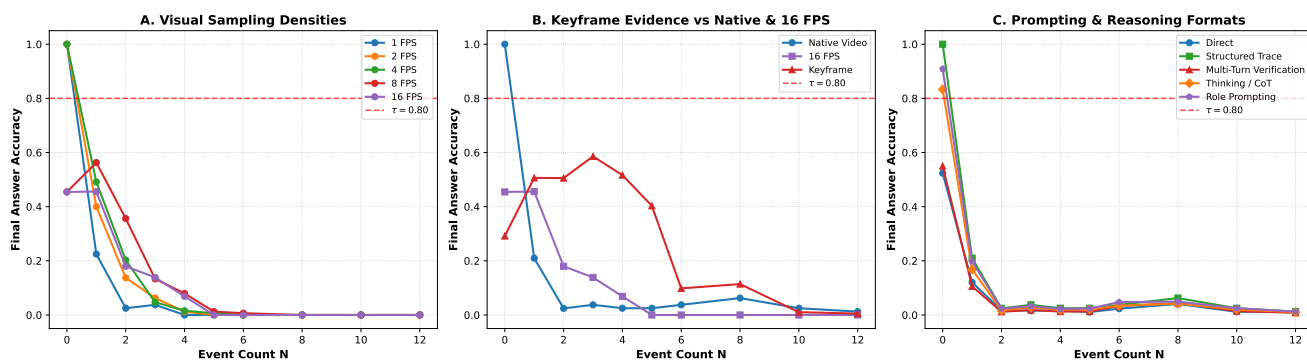


Figure 7: **Blinking interventions.** Final-answer exact match averaged over frequencies across visual sampling densities, keyframe evidence, and prompting strategies.

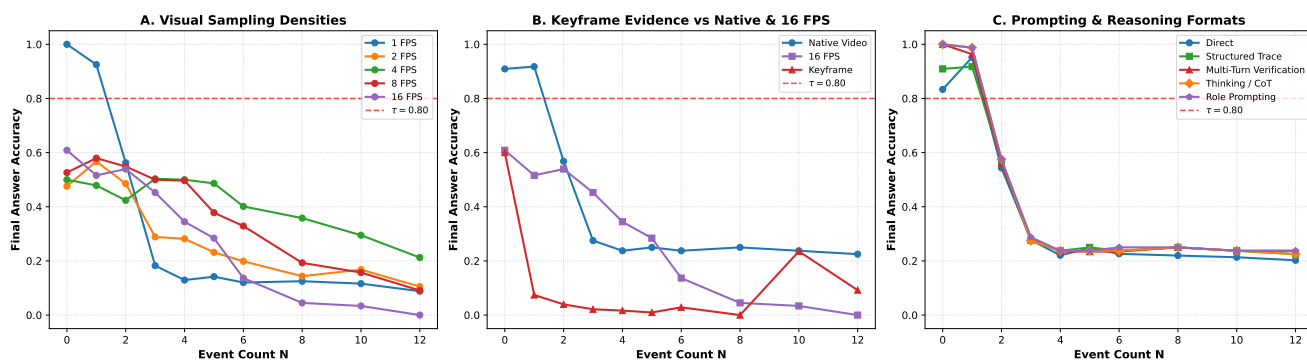


Figure 8: **State Machine interventions.** Final-answer exact match averaged over frequencies across visual sampling densities, keyframe evidence, and prompting strategies.

Model	Prompt	EM (%)	VOR	P (%)	R (%)	Trace F_1 (%)	ACR (%)	RFR (%)
Gemini 3.6 Flash	Direct	20.4	1.16	45.6	40.2	38.5	7.5	3.2
Gemini 3.6 Flash	Structured trace	19.6	0.71	59.2	31.5	36.6	3.9	3.6
Gemini 3.6 Flash	Multi-turn	20.3	0.40	15.9	9.5	10.1	18.2	0.6
Gemini 3.6 Flash	Thinking / CoT	19.5	2.13	33.8	48.5	36.9	14.3	2.1
Gemini 3.6 Flash	Role prompt	19.3	1.52	37.2	44.9	37.6	10.8	2.1
Qwen3-VL-8B	Direct	12.4	28.76	16.8	17.5	13.0	4.9	1.7
Qwen3-VL-8B	CoT	8.2	18.69	11.1	30.5	11.6	2.6	0.8
Qwen3-VL-8B	Multi-turn	13.5	0.26	23.8	11.5	13.4	4.7	1.7
Qwen3-VL-8B-Thinking	CoT	10.2	0.17	10.9	4.3	5.4	5.6	0.4
InternVL3.5-8B	Direct	9.0	0.00	0.0	0.0	0.0	9.9	0.0
InternVL3.5-8B	CoT	9.8	0.00	0.0	0.0	0.0	9.0	0.0
InternVL3.5-8B	Multi-turn	9.8	0.00	0.0	0.0	0.0	10.7	0.0

Table 5: **Task-matched cross-model prompting and trace summary on Bounce Ball.** All model profiles evaluate 730 trials per domain. All trace metrics use frequency-relative timestamp matching and score only explicit, parser-recognized timestamps.

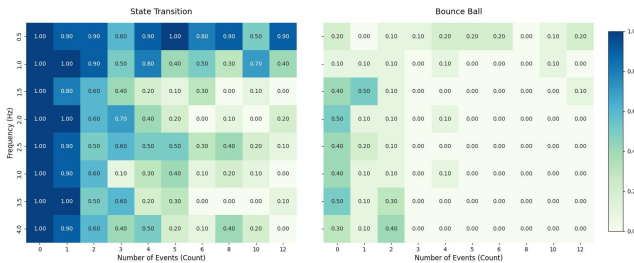


Figure 9: **Qwen3-VL-8B-Instruct under denser frame sampling (10 FPS).** Exact-match capability surfaces across temporal counting tasks under 10-FPS supplied-frame preprocessing. The figure provides an open-model counterpart to the visual-access interventions.

quantitative trace summary across protocols, and the corresponding capability surfaces are reported in Figure 16 (Blinking) and Figure 17 (State Machine).

Keyframe Breakdown on State Transitions vs Flash Events.

On the Blinking task, supplying oracle keyframe triplets ($\pm 0.1s$ around event timestamps) elevates GPT-5.6 Sol exact match from 7.1% (1 FPS) and 14.4% (2 FPS) up to 76.4%, as isolated keyframe thumbnails directly capture the visual flash on-pulse. Conversely, on the State Machine task, oracle keyframes yield low exact match (8.5%), whereas continuous 2-FPS frame sampling achieves GPT-5.6 Sol’s highest performance (55.5%–58.8% exact match). This discrepancy highlights a fundamental domain difference: while discrete flash events can be identified from isolated keyframes, tracking state machine transitions requires continuous intermediate visual context to verify color/state persistence and track cumulative state history. Stripping non-event frames removes the intermediate state evidence necessary to track sequential transitions across the video.

C.15 Trace Extraction and Matching Algorithm

For every evaluation record, we retrieve the executable trace emitted by the renderer for the corresponding video and

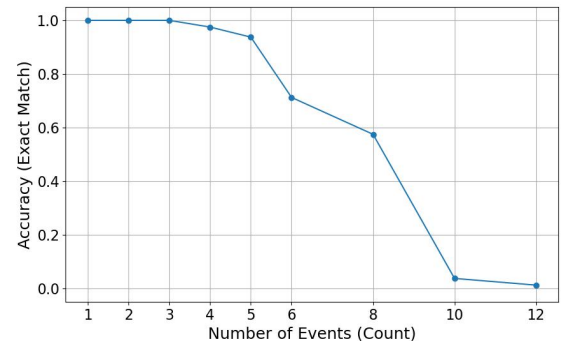


Figure 10: **Oracle keyframe evidence intervention analysis for Qwen3-VL-8B-Instruct.** Exact-match accuracy across event count and frequency when models are supplied with oracle event-centered keyframe triplets versus baseline video sampling.

deduplicate repeated event entries in the log. Gemini is prompted to produce a structured event ledger, from which we extract explicit minute–second entries. For the open models, whose responses are free-form, we extract minute–second and decimal-second expressions preceded by temporal cues such as “at”, “from”, or “frame”. Mentions within 0.1 seconds are deduplicated. Ordinal descriptions and final counts alone do not create reported events. This conservative procedure avoids assigning timestamps that the model did not provide, while making trace metrics conditional on the temporal evidence externalized in the response.

For a ground-truth trace with N events and a model report with M events, we form candidate pairs whose timestamps differ by at most $\delta(F) = 1/(2F)$. This rate-relative tolerance ranges from 1.0 second at 0.5 Hz to 0.125 second at 4.0 Hz and keeps adjacent true-event windows disjoint. We choose a one-to-one matching that maximizes the number of aligned pairs K , breaking ties by the smallest total timestamp deviation.

An unmatched true event contributes to a miss and an

Model / Intervention Protocol	EM (%)	VOR	P (%)	R (%)	Trace F_1 (%)	ACR (%)	RFR (%)
GPT-5.6 Sol (1 FPS Structured Trace)	21.9	0.88	87.5	62.2	63.9	15.8	29.7
GPT-5.6 Sol (2 FPS Structured Trace)	34.9	0.86	86.4	60.4	60.7	21.9	21.4
GPT-5.6 Sol (2 FPS Direct Answer)	35.5	0.01	1.4	1.4	1.4	34.1	0.0
GPT-5.6 Sol (2 FPS Multi-Turn)	35.1	0.39	66.1	38.6	44.6	12.6	5.7
GPT-5.6 Sol (2 FPS Thinking / CoT)	29.9	0.05	12.8	4.5	5.6	27.3	0.4
GPT-5.6 Sol (2 FPS Role Prompt)	39.5	0.48	58.6	39.9	42.4	25.8	13.5
GPT-5.6 Sol (Oracle Keyframes)	42.5	1.18	81.2	79.6	71.1	20.4	34.9

Table 6: **GPT-5.6 Sol intervention trace evaluation summary.** Macro averages reported on non-errored task-matched evaluation records across sampling densities, oracle keyframes, and prompting formats.

unmatched reported event contributes to an unsupported report. The reported trace then yields precision K/M , recall K/N , trace F_1 , and the Visual Observation Ratio M/N . When $M = 0$, precision and trace F_1 are defined as zero. A correct final count with trace $F_1 < 0.80$ contributes to ACR, while an incorrect final count with trace $F_1 \geq 0.80$ contributes to RFR.

C.16 Aggregate Trace Error Summary

Table 7 defines the task-general taxonomy used for the case inventory. State-specific discrepancies are treated as instances of misidentified events rather than as a separate type.

Table 8 aggregates these categories over all positive-count videos for each model. Matched, missed, hallucinated, displaced, and misidentified entries are event-level counts. Wrong accumulation is a video-level count. We report zero merged or collapsed events because no visible response was manually verified to combine multiple true events into one report. Gemini has the largest number of matched events, while the open-model rows show either many unmatched timestamp entries or no parser-recognized temporal report. The latter should not be read as absence of visual processing. It means that the visible answer did not provide timestamped evidence under the extraction rule.

Table 9 reports the sensitivity of the trace metrics to the timestamp-matching tolerance. Final-answer exact match and VOR are unchanged because they do not depend on pairing. Precision, recall, and trace F_1 increase as the tolerance widens, as expected. The selected rate-relative tolerance lies between the fixed settings and preserves non-overlapping matching windows for adjacent events at every tested frequency.

D Computational Cost Analysis

To ensure full transparency and reproducible benchmarking standards, we record financial API costs incurred across all evaluation protocols. In total, across all 5 core experimental sweeps and real-world transfer evaluations across all three visual domains, the benchmark evaluation processed 37,924 individual evaluation trials, incurring a total financial API evaluation cost of \$3,661.78 USD.

Table 10 presents the high-level cost breakdown across experiments. The vast majority of financial expenditure (\$3,426.86 USD, or 93.6% of total cost) was consumed by Experiment 2 (Frame Sampling Density Interventions), as high sampling densities (8–16 FPS) convert 24-second

videos into long sequences of image patches, creating massive context window loads across all three visual domains.

As detailed in Table 11, increasing frame sampling rates from native video (1 FPS equivalent, \$19.02) up to 16 FPS (\$1,348.43) scales input processing costs exponentially. Importantly, despite supplying $16\times$ more visual frames and spending over \$3,420 USD on multi-frame density interventions across domains, the fundamental Low-Frequency Trap failure boundary remains completely intact. While extra visual frames provide minor bumps in final-integer count accuracy on `bounce_ball` (from 19.6% to 29.3%), the faithful step-by-step trace agreement remains near zero (3.7%), and models fail completely at high frequencies ($F \geq 2.0$ Hz). Thus, supplying higher-density visual inputs merely inflates evaluation costs exponentially without resolving the underlying architectural VLM bottleneck in temporal tracking and event bookkeeping. Table 12 reports the domain-wise resource allocation across `state_machine` (\$1,249.46 USD), `bounce_ball` (\$1,247.40 USD), and `blinking` (\$1,146.10 USD).

E Extended Related Work

This section situates the paper against the work most directly relevant to controlled video evaluation and trace-grounded diagnosis.

E.1 Video-Language Benchmarks and Controlled Evaluation

Video-MME, TempCompass, HourVideo, EgoSchema, MVBench, LongVideoBench, Mementos, VideoNIAH, VideoCogQA, and Video-MMLU evaluate complementary aspects of video understanding (Fu et al. 2025; Liu et al. 2024; Chandrasegaran et al. 2024; Mangalam, Akshulakov, and Malik 2023; Li et al. 2024b; Wu et al. 2024; Wang et al. 2024; Lu et al. 2025; Li et al. 2024a; Song et al. 2025). VideoReasonBench focuses more specifically on multi-step reasoning over videos that contain partially observed state changes (Liu et al. 2025). These resources are complementary to our study, but their examples are fixed. Event count, event rate, duration, and visual complexity are not independently swept. In contrast, our generator changes count and frequency while holding the event semantics and rendering family fixed, which makes the resulting capability boundary directly interpretable.

Controlled visual benchmarks provide a useful precedent for this design. CLEVR and recent physics-oriented probes

Type	Definition
Correct match	A reported event aligns one-to-one with a true event within the timestamp tolerance and has the correct available event attribute.
Missed event	A true event has no aligned reported event.
Merged or collapsed events	The visible response explicitly combines two or more true events into one report. This type is assigned only when the response supports that interpretation.
Hallucinated event	A reported event has no aligned true event.
Temporally displaced event	A report corresponds to the appropriate event in the sequence but falls outside the timestamp tolerance.
Misidentified event	A timestamp aligns, but the reported event attribute is incorrect, such as the contacted wall, blink phase, or resulting state.
Wrong accumulation	The reported event sequence is sufficiently faithful with trace $F_1 \geq 0.80$, but the final count is incorrect.

Table 7: **Task-general trace-error taxonomy.** The first six types concern individual reported or true events. Wrong accumulation concerns the relationship between an otherwise faithful report and the final answer.

Error type	Gemini 3.6 Flash	Qwen 3-VL-8B	Qwen 3-VL-32B	Qwen 3-VL-235B	InternVL 3.5-8B	InternVL 3.5-30B-A3B	InternVL 3.5-38B
True events	12,240	12,223	12,223	12,223	12,223	12,223	12,223
Matched events	3,907	2,458	1,678	1,130	0	0	0
Missed events	8,333	9,765	10,545	11,093	12,223	12,223	12,223
Merged events	0	0	0	0	0	0	0
Hallucinated events	2,096	88,506	2,348	931	0	0	0
Displaced events	448	245	402	142	0	0	0
Misidentified events	1,556	737	518	200	0	0	0
Wrong accumulation	50	34	34	23	0	0	0
Videos	2,160	2,160	2,160	2,160	2,160	2,160	2,160

Table 8: **Aggregate trace-error counts by model.** Counts aggregate all positive-count videos across Bounce Ball, Blinking, and State Machine. Matched, missed, hallucinated, displaced, and misidentified rows count events. Wrong accumulation counts videos with an incorrect final answer and trace $F_1 \geq 0.80$. A displaced event is an order-aligned timestamp outside the tolerance. A misidentified event has an aligned timestamp but an incorrect available event attribute. Merged events require explicit visible evidence and are not inferred from missing timestamps. Gemini and open-model sets contain 12,240 and 12,223 true events, respectively.

use controlled scenes to isolate compositional or physical-reasoning factors (Johnson et al. 2017; Chow et al. 2025; Xiang et al. 2025; Qiu et al. 2025). We extend that diagnostic philosophy to temporal event bookkeeping and then test the controlled finding on natural repeated-event videos.

E.2 Programmatic Video and Intermediate Traces

Recent controllable-video benchmarks use fully scripted clips and scalable task difficulty to stress-test multimodal reasoning. Our contribution is orthogonal to this controlled generation. Every video in our study is paired with a renderer-produced event schedule, which lets us score a model-reported event sequence rather than only its final answer.

Visual Reasoning Tracer is the closest precedent for evaluating intermediate visual reasoning traces. It assesses object-level traces in images against ground-truth visual annotations (Yuan et al. 2025). Our setting differs in both modality and supervision. We evaluate temporal event sequences in video, and the reference trace is generated directly by the renderer. This permits timestamp-aware matching and separates missed or hallucinated events from errors in final count aggregation.

Broader work on reasoning evaluation motivates treating a

final answer or a long rationale with care. Self-consistency and STaR improve or bootstrap language-model reasoning (Wang et al. 2022; Zelikman et al. 2022), while recent stress tests expose failures that emerge as reasoning tasks become more compositional or difficult (Shojaee et al. 2025; Sun et al. 2025). In multimodal settings, EMMA, RCI, and Game-RL study reasoning capability, visual-information requirements, or verifiable task generation (Hao et al. 2025; Agarwal et al. 2025; Tong et al. 2025). These are useful context, but none supplies a renderer-generated temporal event schedule against which a video model’s reported event sequence can be aligned.

F Qualitative Trace Examples and Taxonomy Profiling

This appendix presents representative model responses alongside the corresponding rendered key-event frame strips and executable ground-truth traces across all 6 diagnostic taxonomy categories. To ensure clear visual resolution while fitting comfortably within publication page height limits, each 5-sample category is presented across two page-optimized full-width figure panels: **Part 1** (Cases 1–3) and **Part 2** (Cases 4–5).

Matching Tolerance Strategy	Acc (%)	VOR	Precision (%)	Recall (%)	Trace F_1 (%)	ACR (%)
Fixed $\delta = 1.0$ s	21.1	0.68	75.6	41.2	47.6	1.9
Fixed $\delta = 0.5$ s	21.1	0.68	67.8	35.2	41.3	6.4
Fixed $\delta = 0.25$ s	21.1	0.68	49.7	21.7	27.2	14.2
Rate-Relative $\delta = \frac{1}{2F}$	21.1	0.68	58.0	31.2	36.4	5.7

Table 9: **Trace-metric sensitivity to timestamp tolerance for the Gemini 3.6 Flash baseline.** Final EM averages the full grid; VOR, precision, recall, trace F_1 , and ACR average positive-event trials only. The rate-relative tolerance $\delta(F) = 1/(2F)$ bounds matching within each event’s unique inter-event half-period.

Experiment / Protocol	Trials	Input Tokens	Output Tokens	Total Tokens	Cost (\$USD)
Exp 1: Baseline $N \times F$ Matrix Sweep	2,203	3,659,556	1,803,571	5,463,127	\$19.02
Exp 2: Frame Density Interventions (1–16 FPS)	20,102	2,438,029,486	15,172,075	2,453,201,561	\$3,426.86
Exp 3: Oracle Keyframe Evidence Interventions	3,449	45,757,799	3,050,018	48,807,817	\$89.47
Exp 4: Prompting Strategies & Thinking Modes	11,714	18,905,824	10,567,098	29,472,922	\$107.61
Real-World Transfer (RepCount / TransRAC)	456	8,014,360	906,931	8,921,291	\$18.82
Total Benchmark Evaluation	37,924	2,514,367,025	31,499,693	2,545,866,718	\$3,661.78

Table 10: **Comprehensive benchmark evaluation cost and token usage breakdown across all three visual domains.** Summarizes total evaluation trials, input/output token counts, and financial API costs across all 5 core experiments and real-world transfer evaluation.

F.1 Case-Selection Protocol

Qualitative cases were sampled from Gemini 3.6 Flash structured-trace predictions across all three synthetic benchmark domains (bounce_ball, blinking, and state_machine). For every sample card:

1. **Event Frame Strips:** Every ground-truth event timestamp $t_e \in \text{GT_events}$ is captured at its exact physical occurrence timestamp (highlighted with a green event boundary badge and timestamp label), complemented by context frames placed in start/end intervals.
2. **Executable vs Reported Alignment:** Model-reported timestamps in the step-by-step event ledger are aligned against ground-truth event timestamps using a rate-relative matching tolerance ($\tau_{\text{match}} = 1.0\text{s}$).
3. **Taxonomy Classification:** Samples are assigned to mutually exclusive failure categories based on final integer exact match and trace precision/recall/ F_1 .

F.2 Faithful Event Recovery (Correct Matches)

Figures 18 and 19 present representative cases where Gemini 3.6 Flash achieves perfect trace alignment ($F_1 = 100\%$, Precision = 100%, Recall = 100%). In low-count, low-frequency operating regions (e.g., $N = 5$, $F = 0.5$), the model accurately logs every wall contact timestamp in sequential order, leading to a correct final integer count ($\hat{y} = N$).

F.3 Missed Events (Under-Reporting / Perception Failure)

Figures 20 and 21 illustrate perception failures under high temporal load ($N \geq 8$, $F \geq 1.5\text{Hz}$). As event frequency increases, visual evidence becomes compressed in time. Gemini under-reports the sequence, omitting intermediate wall collisions (e.g., reporting only 1 or 2 timestamps for an 8-event video), resulting in severe recall degradation.

F.4 Hallucinated Events (Over-Reporting / Spurious Detection)

Figures 22 and 23 show over-reporting failures typical of low-load operating regions. The model generates spurious timestamps for wall contacts or state transitions during continuous motion intervals where no physical event occurred, lowering trace precision ($P < 50\%$).

F.5 Wrong Accumulation (Reasoning Failure Ratio / RFR)

Figures 24 and 25 demonstrate Reasoning Failure Ratio (RFR). Here, the model successfully maintains a 100% accurate step-by-step event ledger in its reasoning response ($F_1 \geq 80\%$), but fails at the final aggregation step—outputting an incorrect integer in ‘boxed{ }’ (e.g., declaring $\hat{y} = 4$ or $\hat{y} = 5$ despite correctly listing all 5 or 6 timestamped events). This isolates a distinct trace-to-answer accumulation failure.

F.6 Accidental Correctness (Accidental Correctness Ratio / ACR)

Figures 26 and 27 present Accidental Correctness (ACR). In these trials, the final integer prediction matches ground truth ($\hat{y} = N$), but the underlying event trace is severely degraded ($F_1 < 40\%$) with missing or hallucinated timestamps. Relying solely on final-answer exact match would misclassify these ungrounded responses as successful temporal reasoning.

F.7 Temporally Displaced Events

Figures 28 and 29 illustrate temporal displacement, where the model detects the presence and sequence of visual transitions, but assigns boundary timestamps that drift beyond the 1.0s tolerance window relative to physical ground truth.

Frame Density	Trials	Input Tokens	Output Tokens	Cost (\$USD)
Native Video	2,203	3,659,556	1,803,571	\$19.02
1 FPS	2,862	58,130,830	2,004,410	\$95.80
2 FPS	2,933	115,870,930	2,206,109	\$167.95
4 FPS	3,428	225,535,430	2,479,566	\$313.27
8 FPS	3,453	452,188,230	2,633,080	\$662.41
10 FPS	3,554	589,062,945	2,692,969	\$839.01
16 FPS	3,872	997,241,121	3,155,941	\$1,348.43

Table 11: **Cost breakdown by frame sampling density across all tasks (Experiment 2).** Demonstrates how frame sampling rate converts video inputs into large image-patch token sequences, scaling input processing costs.

Visual Domain / Task	Trials	Input Tokens	Output Tokens	Cost (\$USD)
state_machine	13,141	910,900,516	9,798,474	\$1,249.46
bounce_ball	10,363	778,500,899	10,729,970	\$1,247.40
blinking	13,964	816,951,250	10,064,318	\$1,146.10
repcount (Real-World)	456	8,014,360	906,931	\$18.82
Total	37,924	2,514,367,025	31,499,693	\$3,661.78

Table 12: **Evaluation cost and token usage breakdown by visual domain.** Summarizes computational allocation across synthetic video domains and real-world transfer datasets.

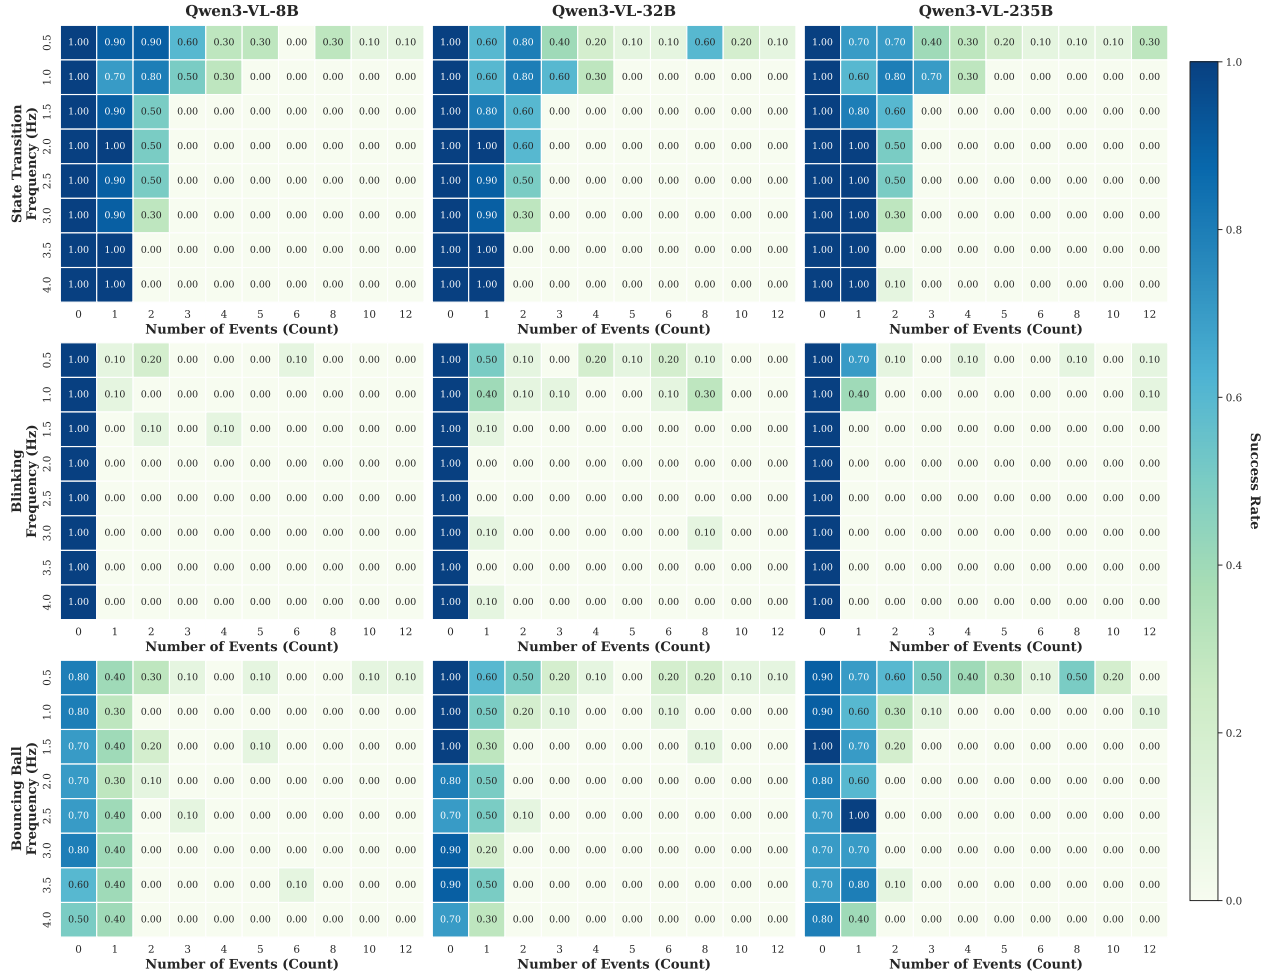


Figure 11: **Qwen3-VL family capability heatmaps.** Final-answer exact match across event count and frequency for State Machine transitions. The panels compare Qwen3-VL-8B, Qwen3-VL-32B, and Qwen3-VL-235B.

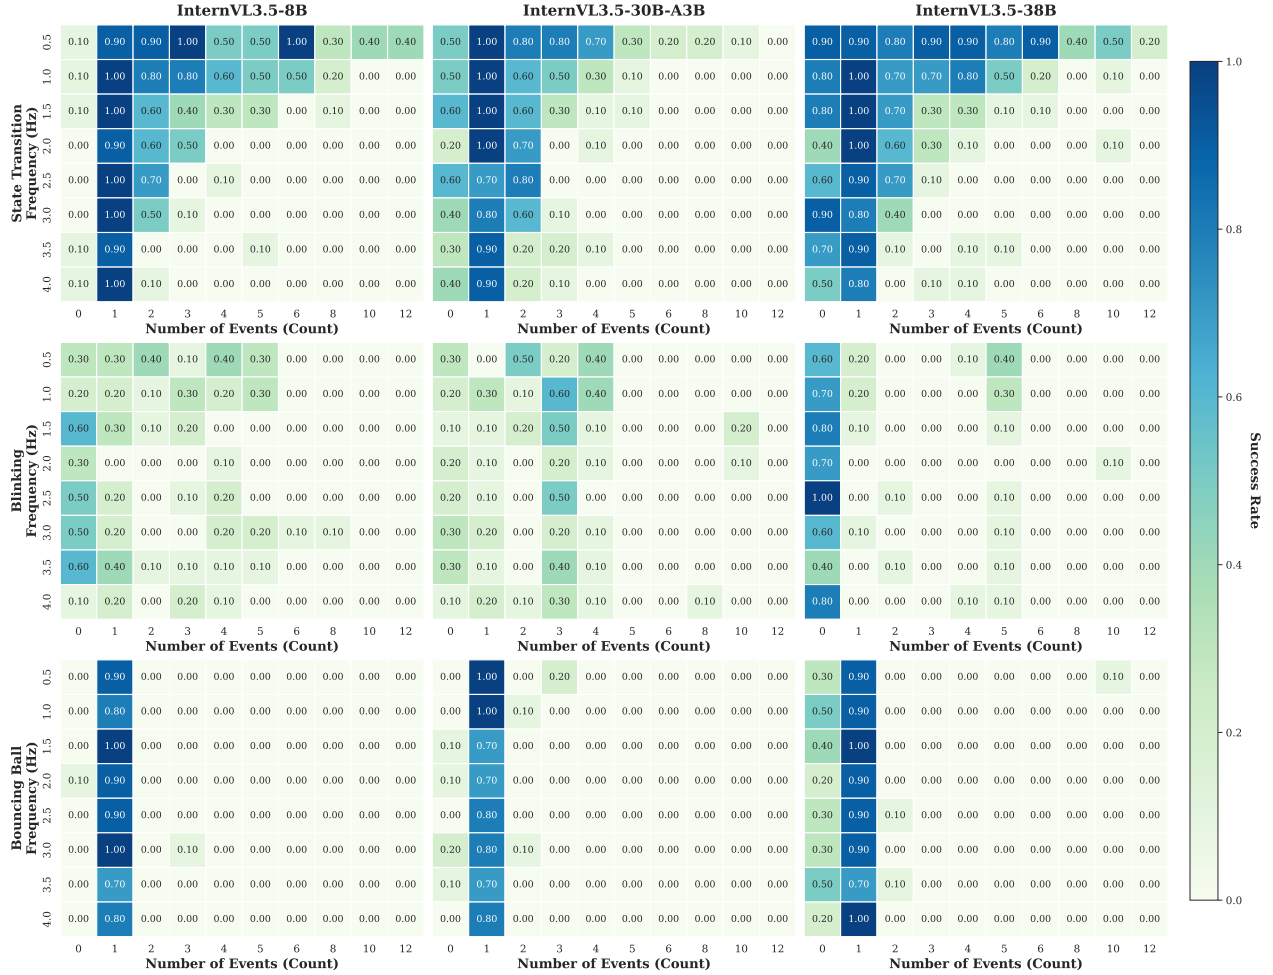


Figure 12: **InternVL3.5 family capability heatmaps.** Final-answer exact match across event count and frequency for State Machine, Blinking, and Bounce Ball. Columns compare the evaluated InternVL3.5 scales.

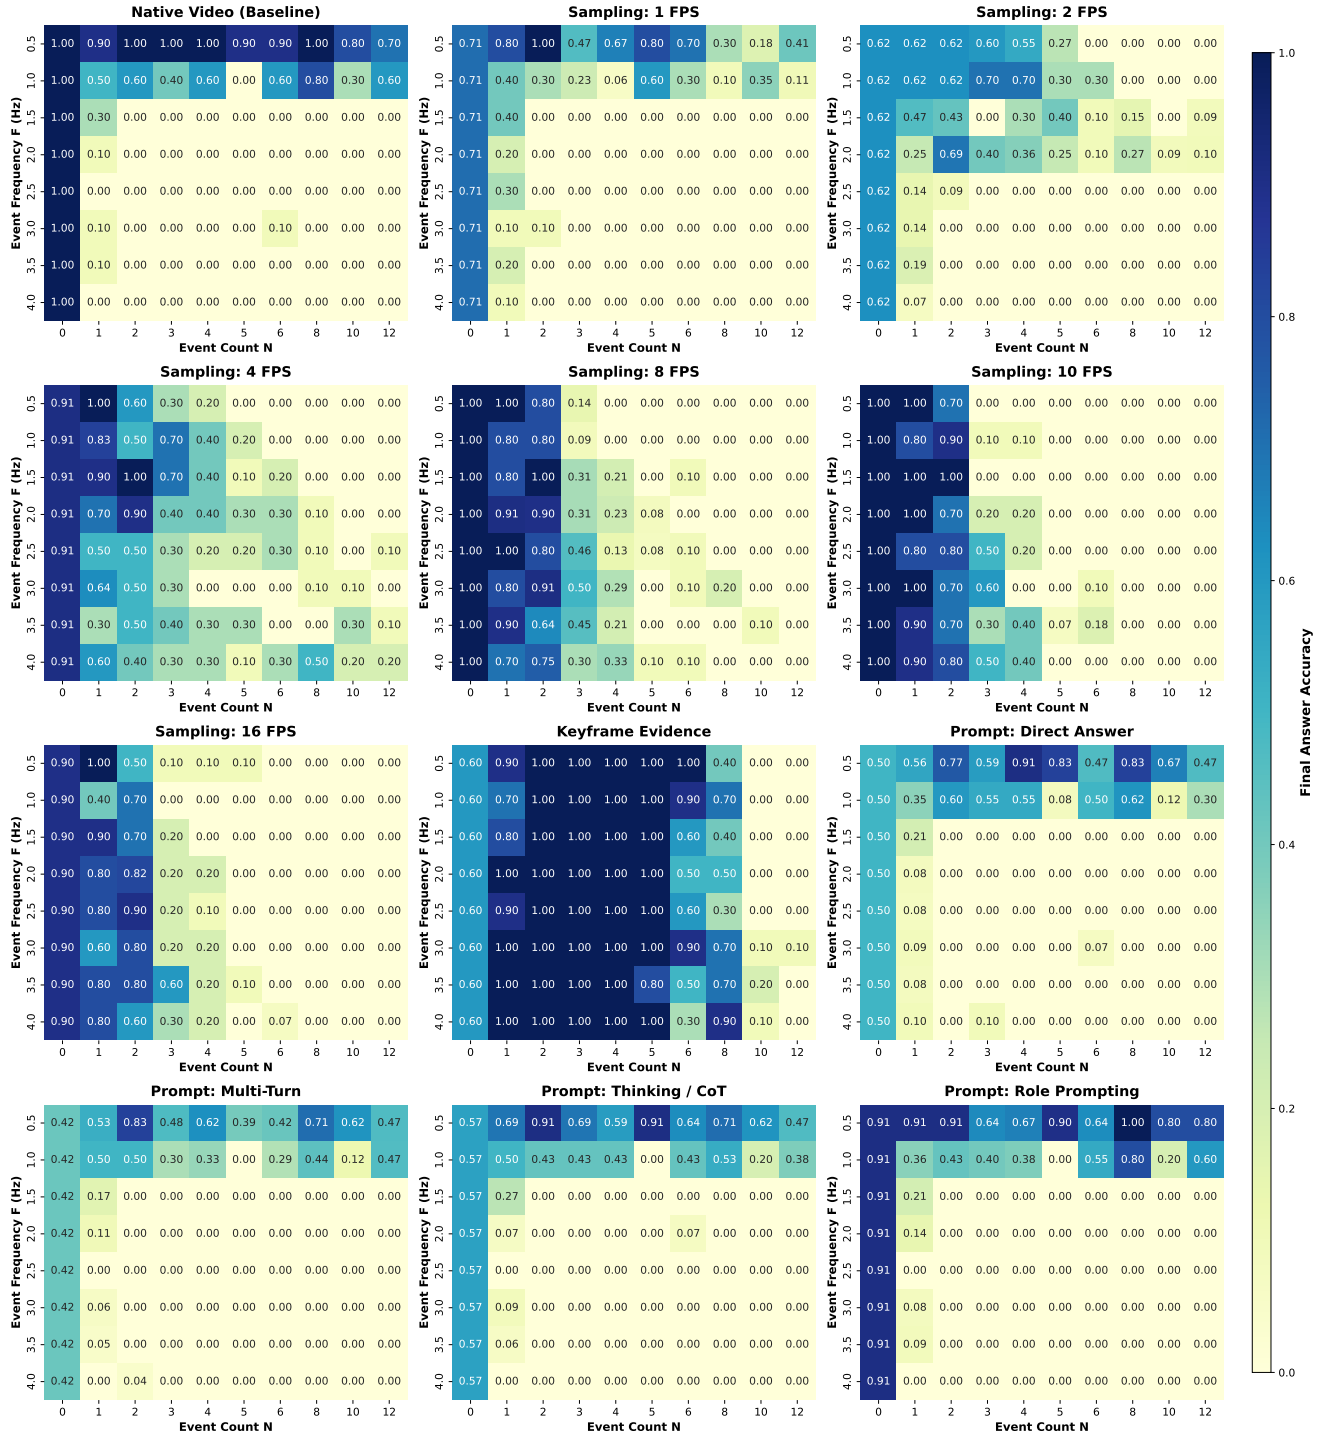


Figure 13: Complete Gemini visual-access intervention surfaces on Bounce Ball. Final-answer exact-match accuracy for native video, supplied frame-sampling densities, and event-centered keyframes.

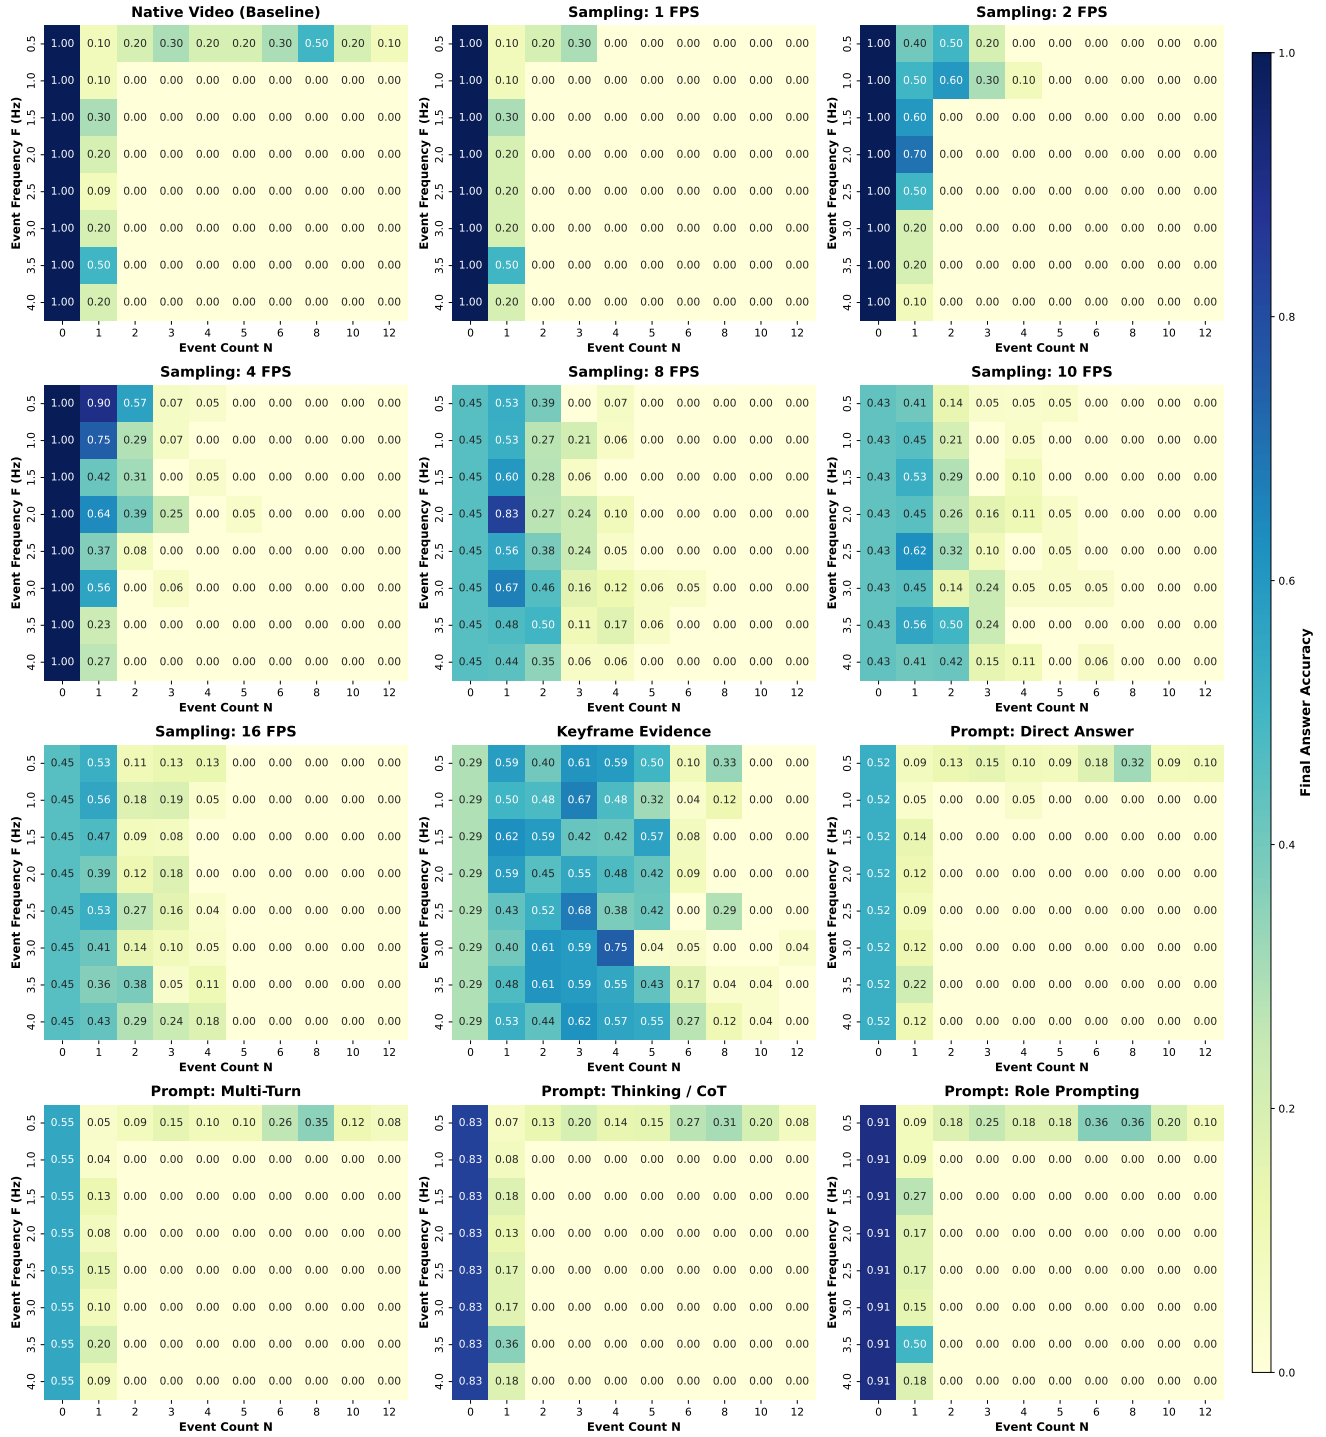


Figure 14: Complete Gemini visual-access intervention surfaces on Blinking. Final-answer exact-match accuracy for native video, supplied frame-sampling densities, and event-centered keyframes.

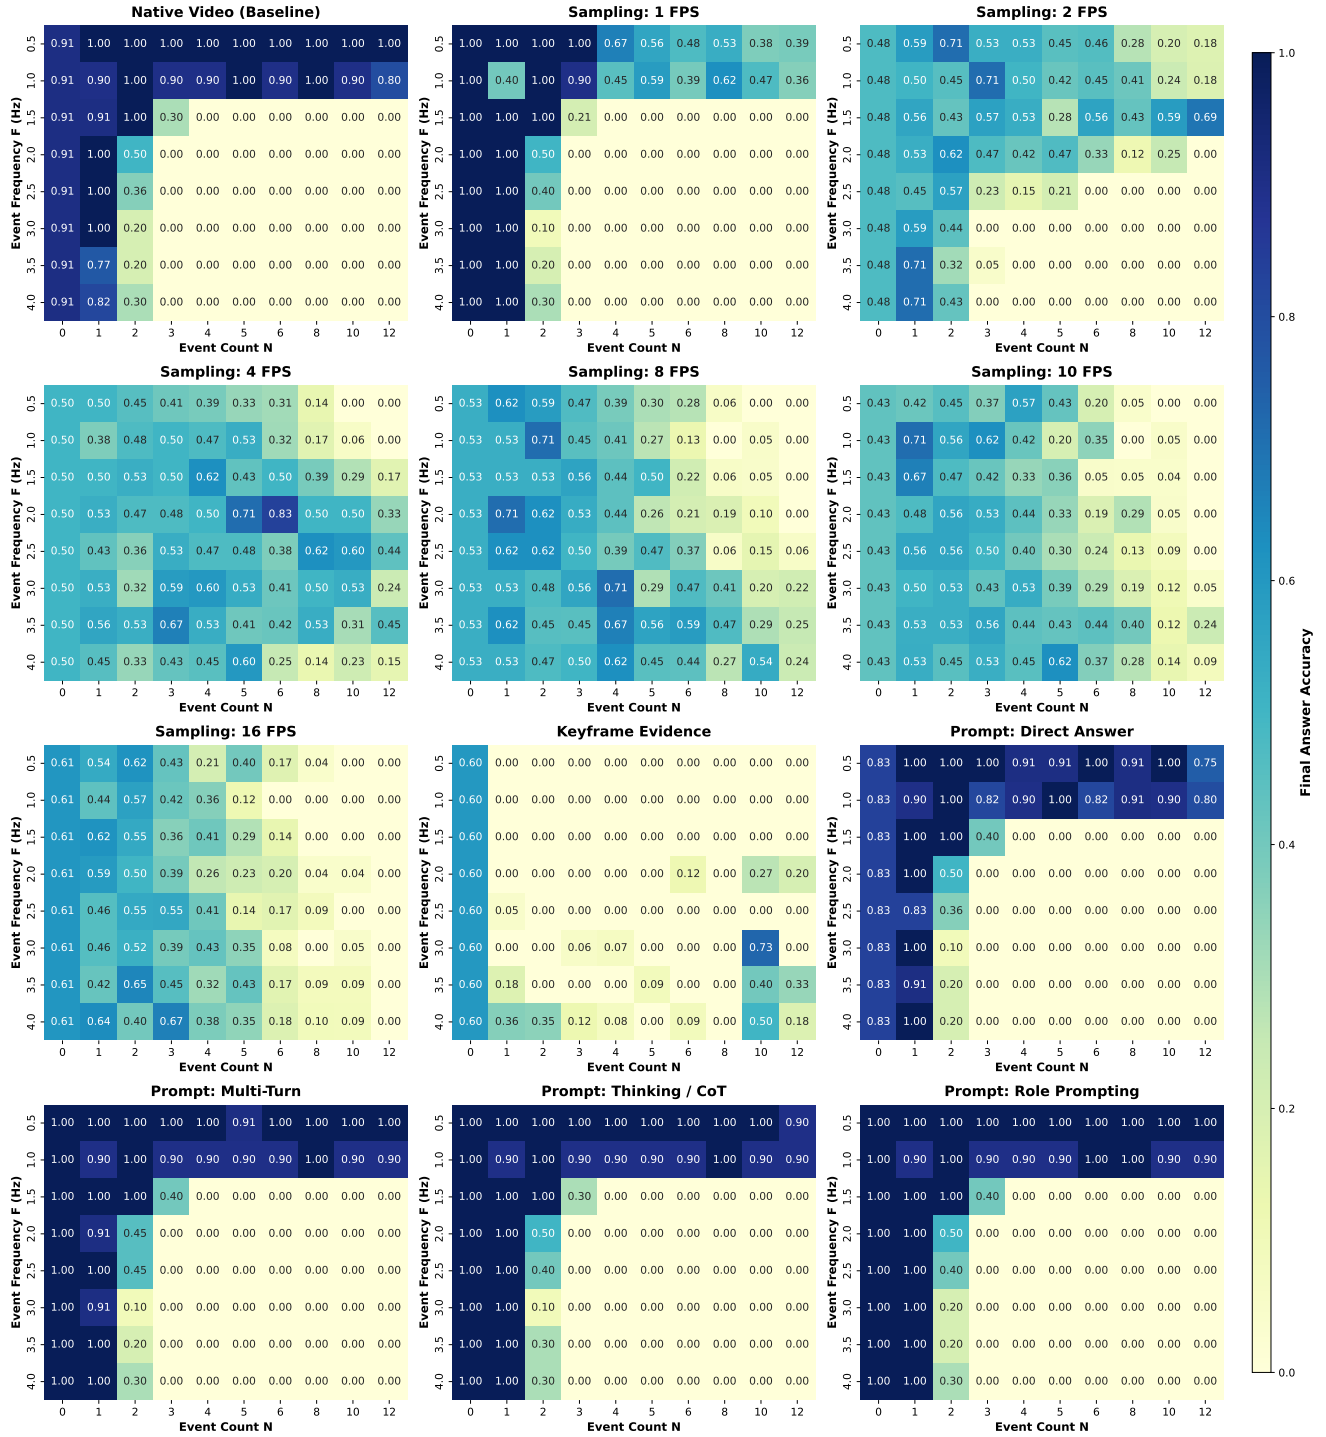


Figure 15: Complete Gemini visual-access intervention surfaces on State Machine. Final-answer exact-match accuracy for native video, supplied frame-sampling densities, and event-centered keyframes.

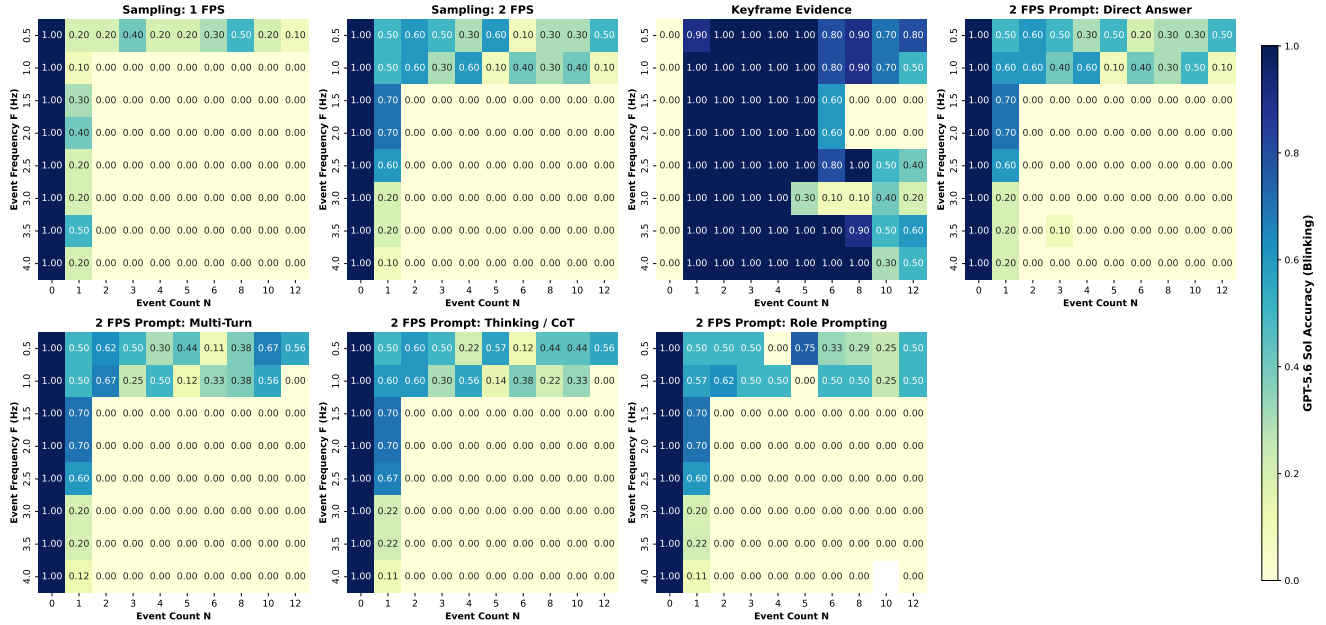


Figure 16: **GPT-5.6 Sol capability surfaces on Blinking.** Final-answer exact-match accuracy under 1–2 FPS sampling densities, oracle keyframes, and 2-FPS prompting interventions.

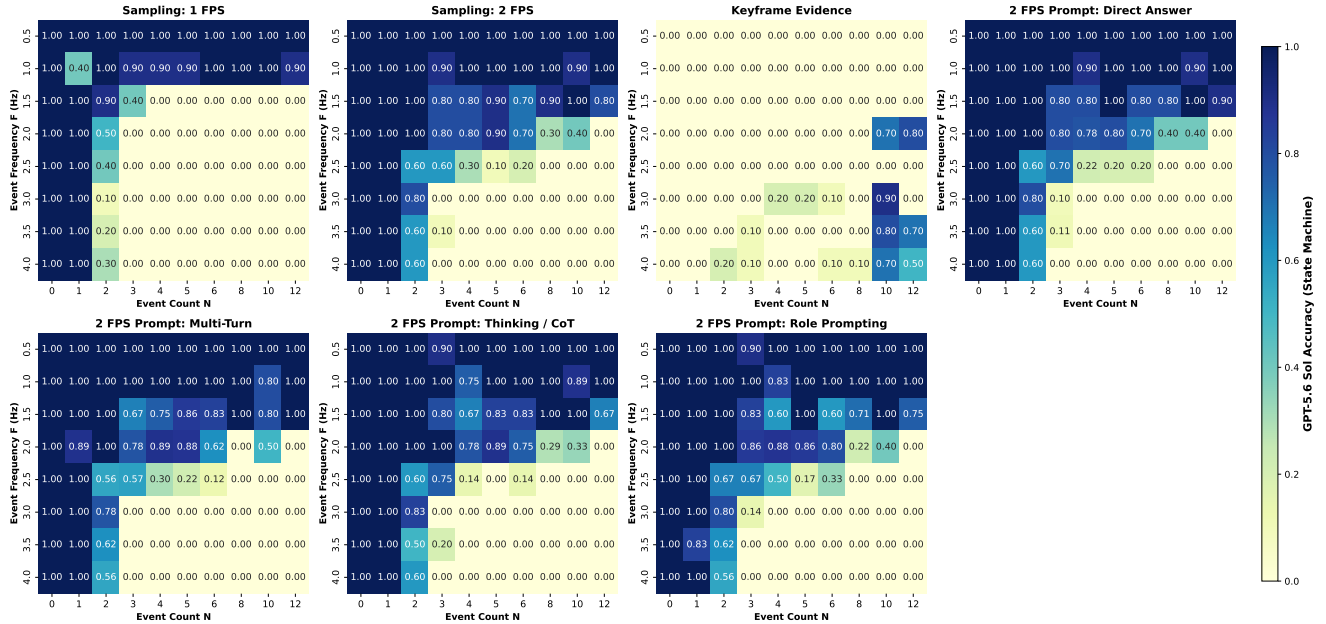


Figure 17: **GPT-5.6 Sol capability surfaces on State Machine.** Final-answer exact-match accuracy under 1–2 FPS sampling densities, oracle keyframes, and 2-FPS prompting interventions.

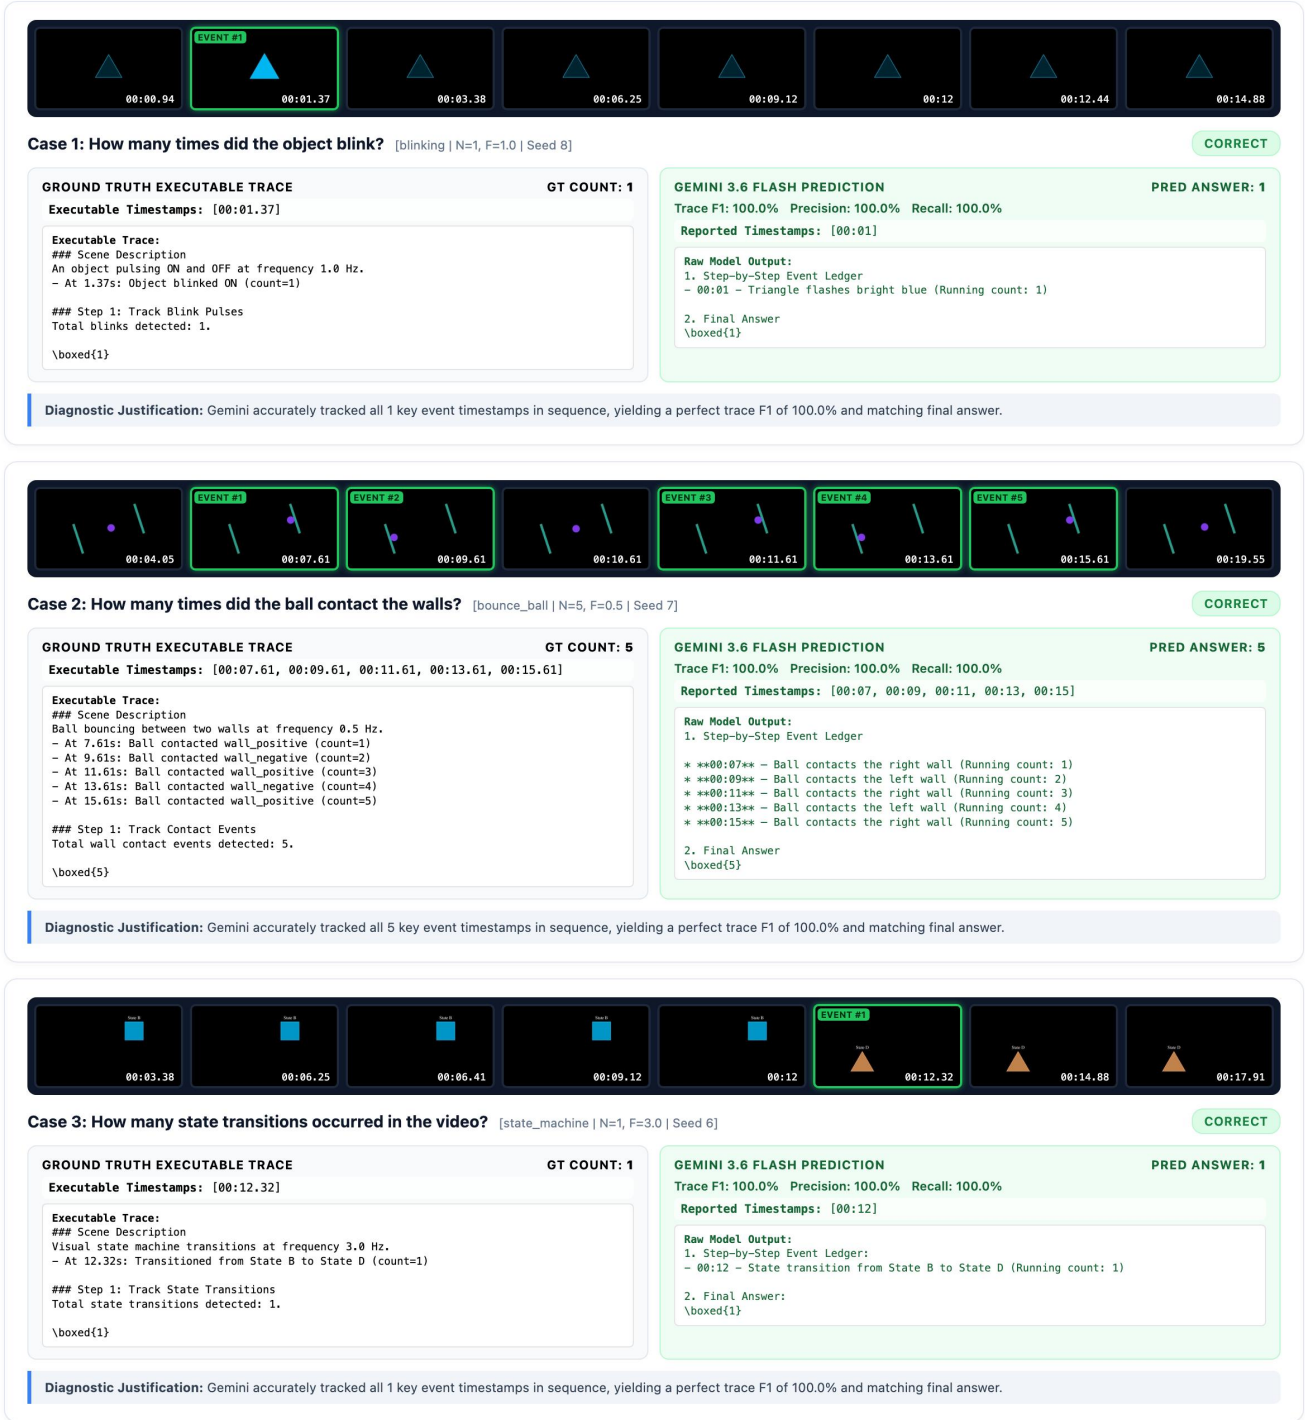


Figure 18: **Faithful Event Recovery (Part 1: Cases 1–3):** Gemini 3.6 Flash accurately tracks all key event timestamps and running counts on blinking, bounce_ball, and state_machine, achieving 100% Trace F_1 and matching final integer counts.

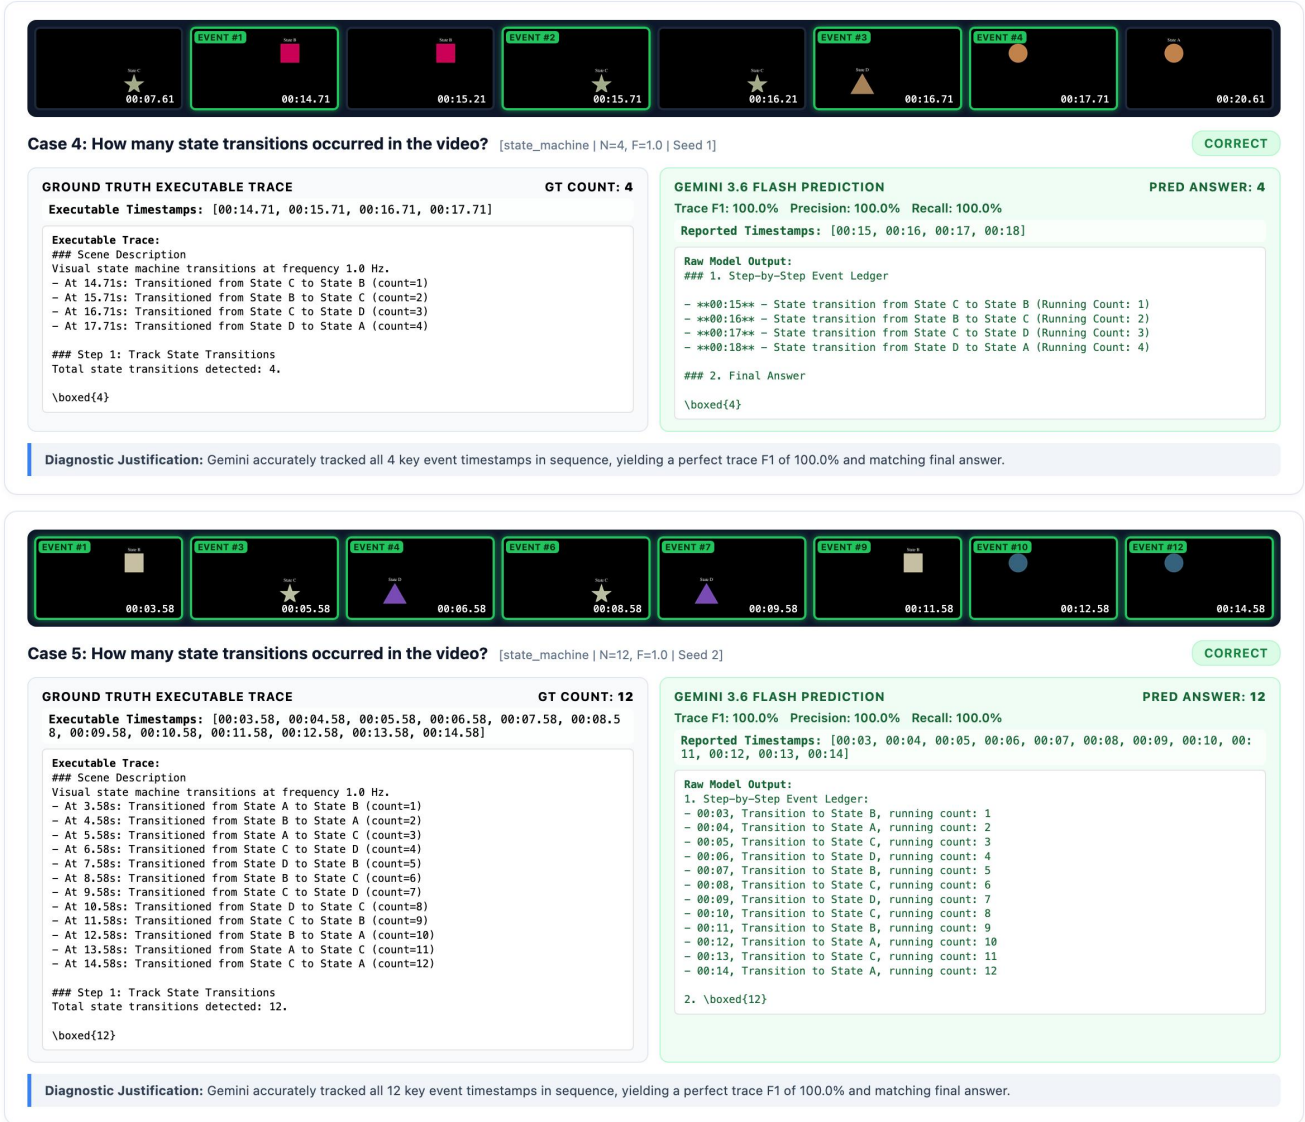


Figure 19: **Faithful Event Recovery (Part 2: Cases 4–5):** Additional faithful event recovery profiles on `state_machine` across low-frequency operating conditions ($N \leq 12$, $F \leq 1.0\text{Hz}$).

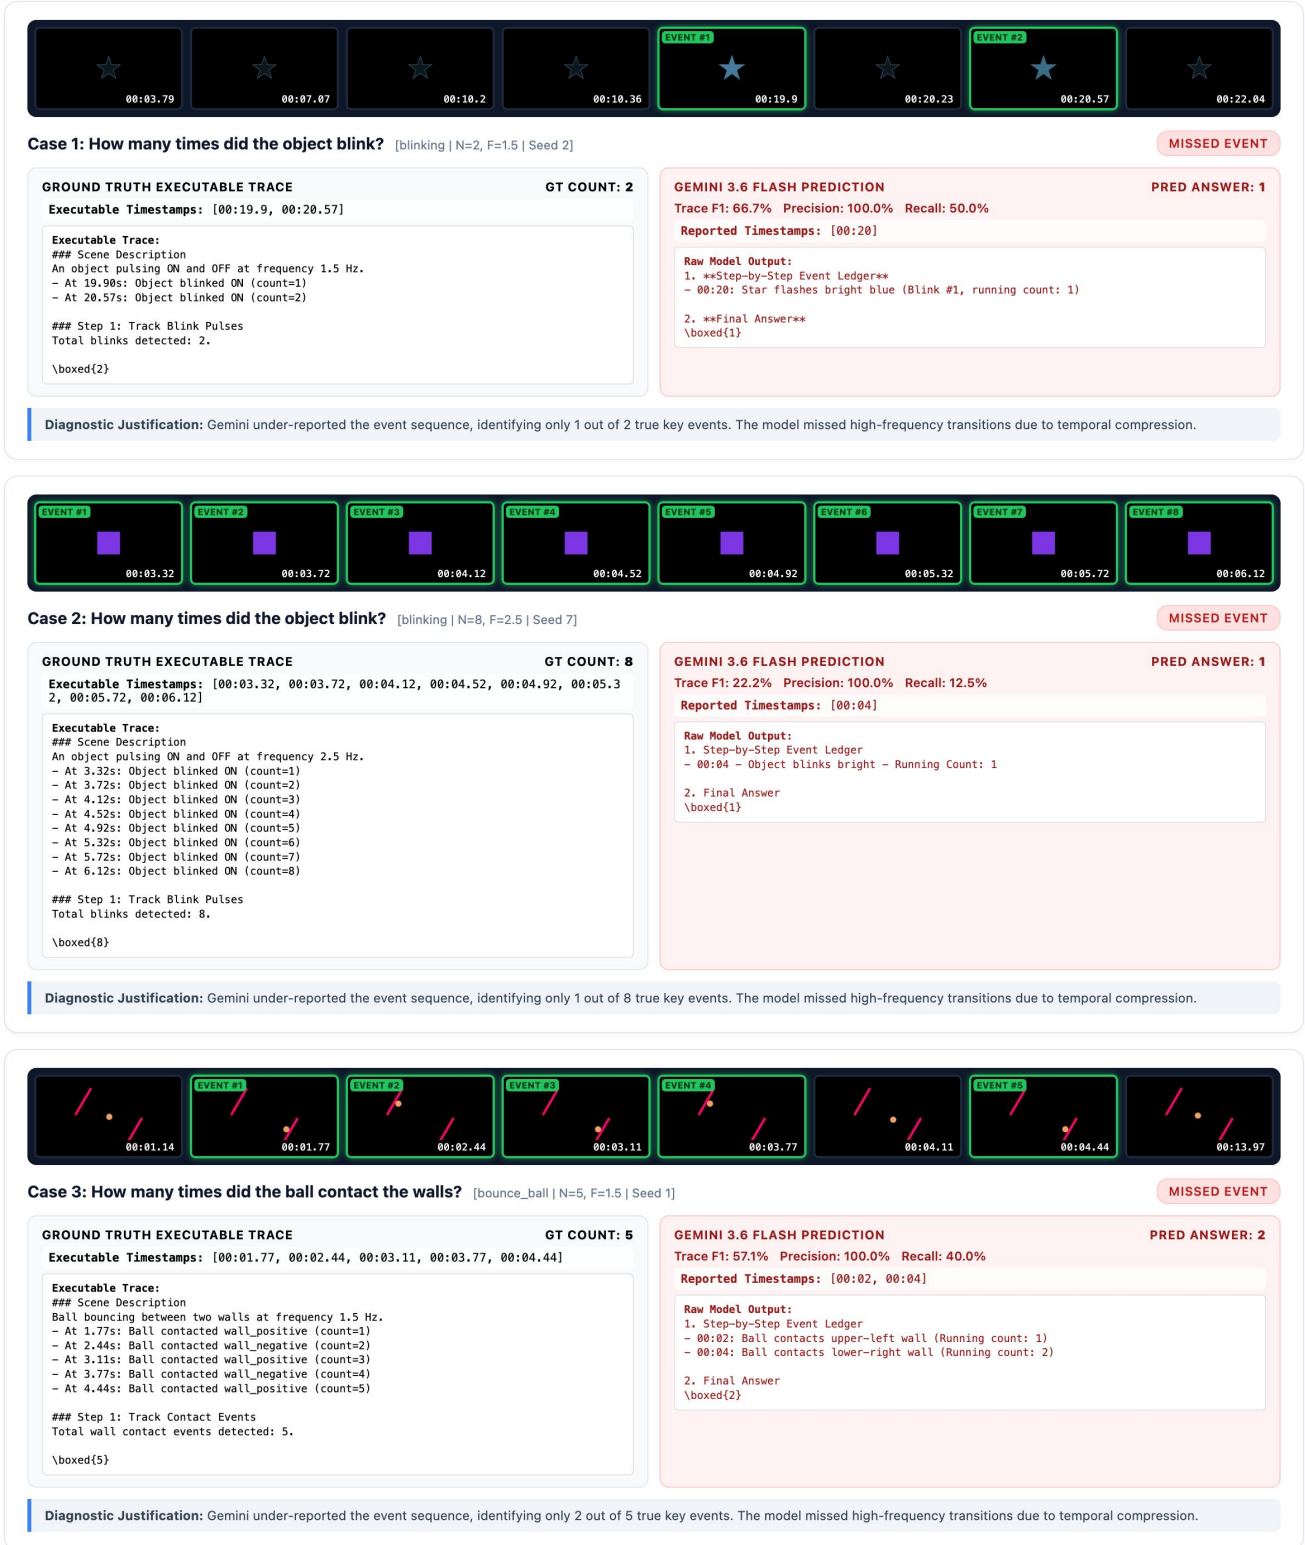


Figure 20: **Missed Events / Under-Reporting (Part 1: Cases 1–3):** Under high temporal load ($N \geq 2$, $F \geq 1.5\text{Hz}$), Gemini omits intermediate event transitions on `blinking` and `bounce_ball`, reporting only a fraction of true timestamps (Trace Recall $< 60\%$).



Figure 21: **Missed Events / Under-Reporting (Part 2: Cases 4–5):** Severe recall degradation under compressed inter-event timing on state_machine.

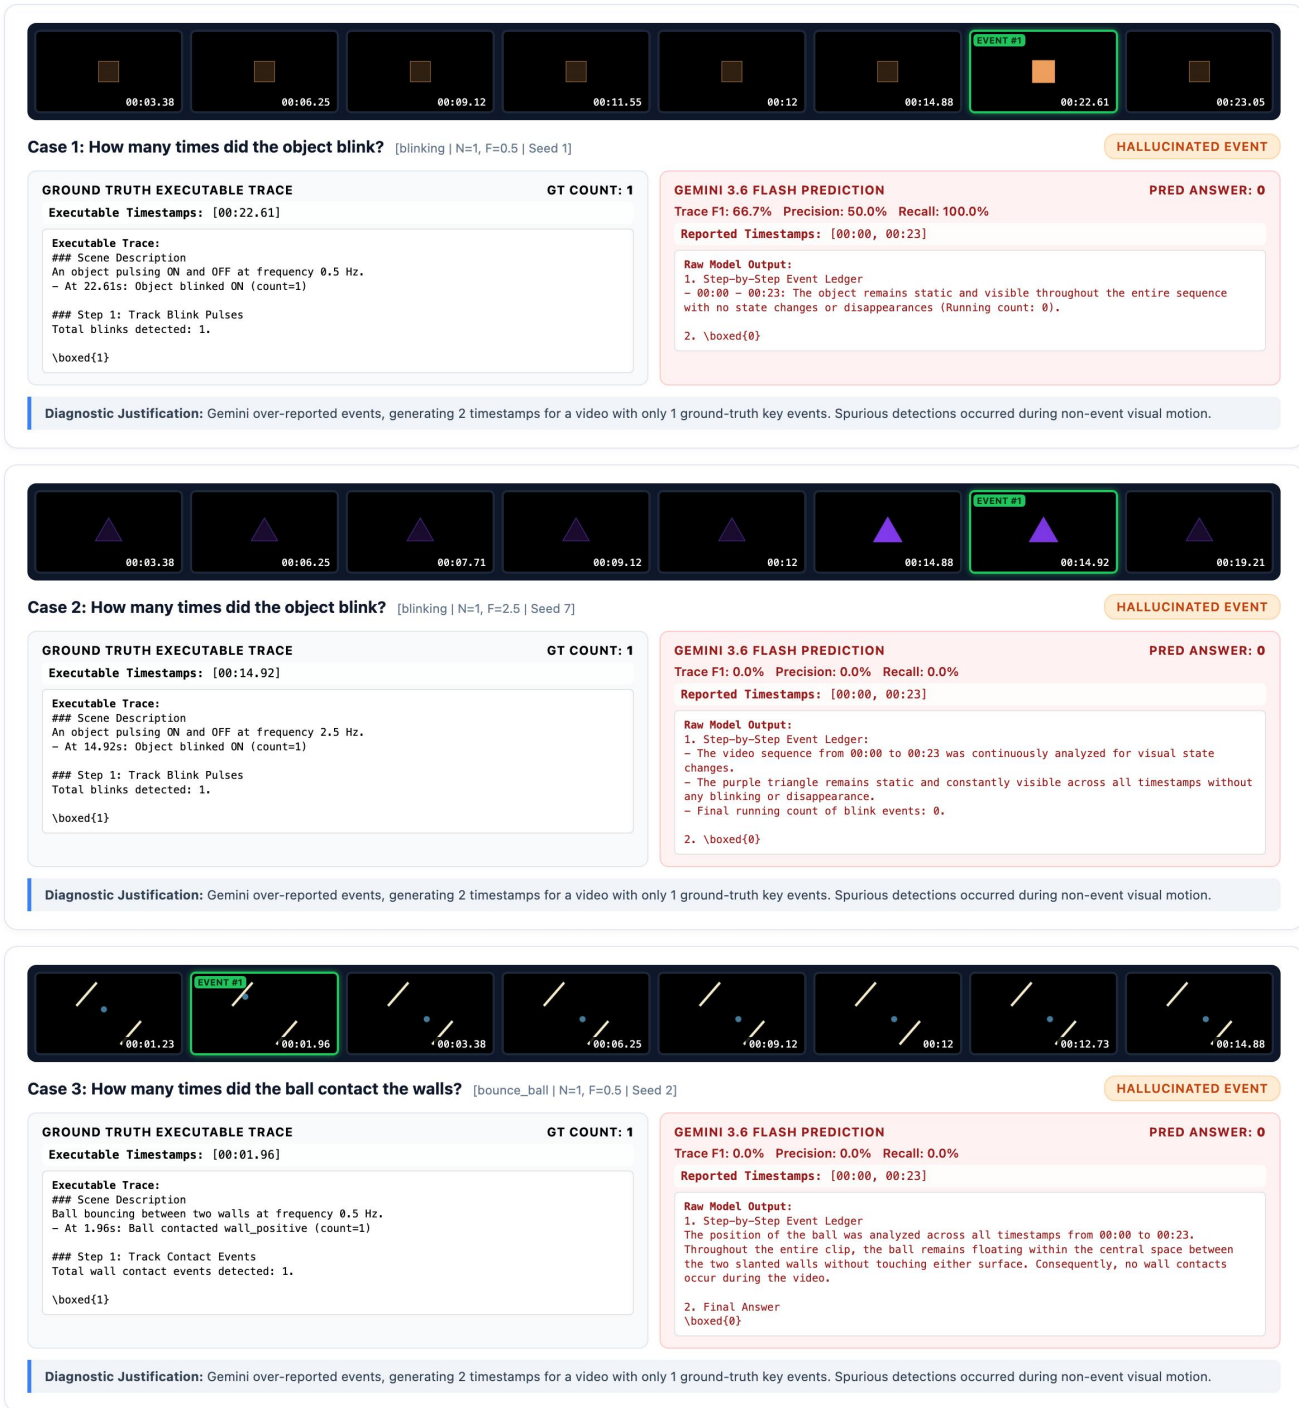


Figure 22: **Hallucinated Events / Over-Reporting (Part 1: Cases 1–3):** Spurious event generation on `blinking` and `bounce_ball`. Gemini logs non-existent boundary collisions and state transitions during continuous motion, degrading Trace Precision ($P < 50\%$).

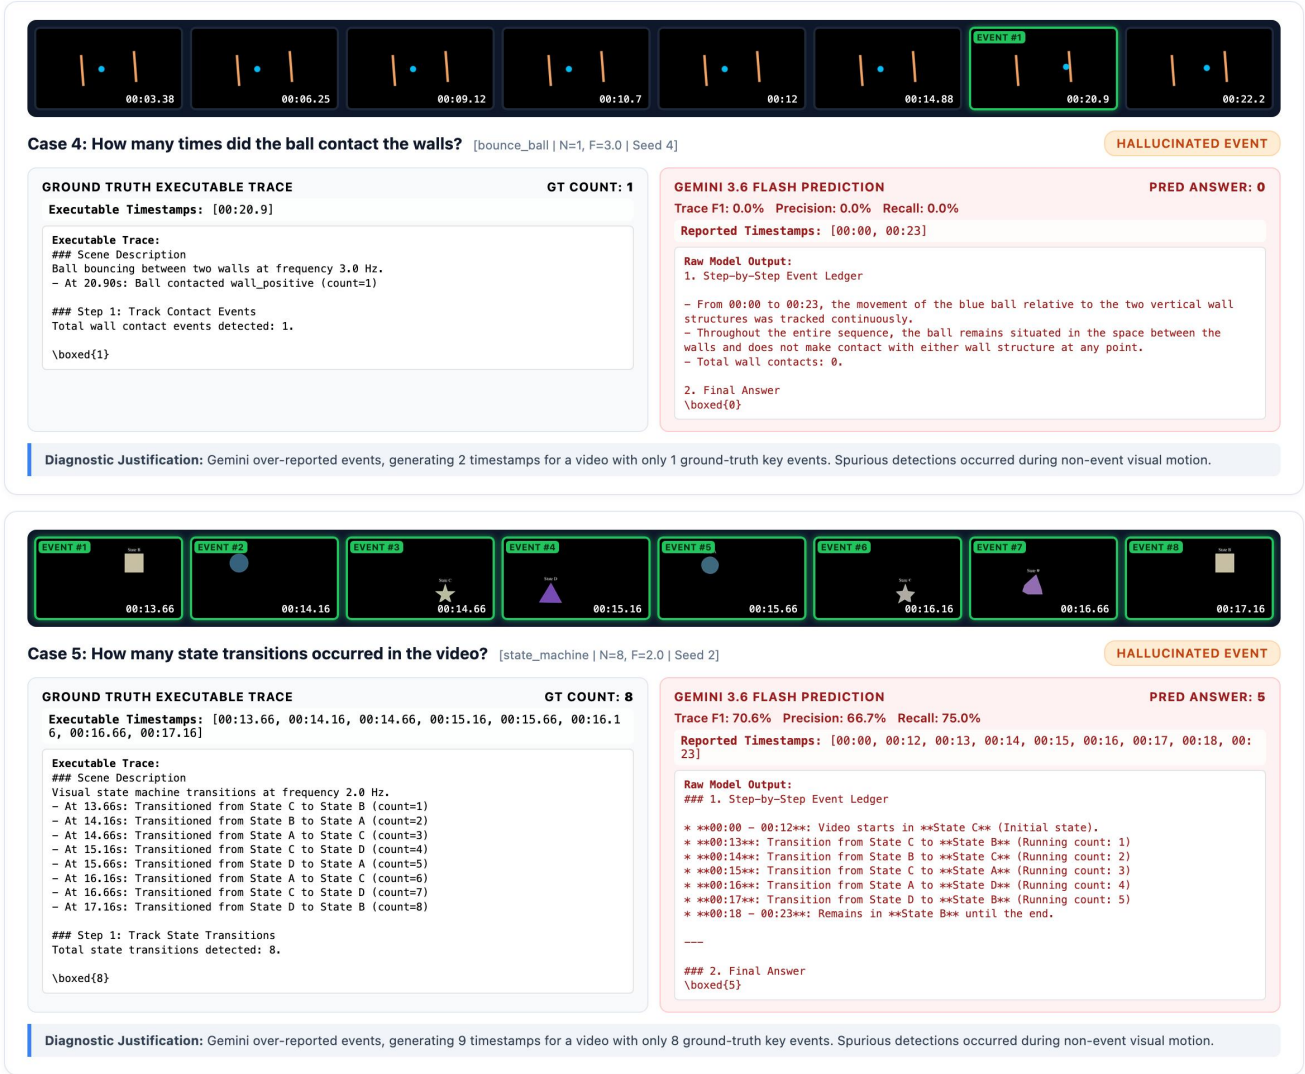


Figure 23: **Hallucinated Events / Over-Reporting (Part 2: Cases 4–5):** Over-reporting profiles on bounce_ball and state_machine.

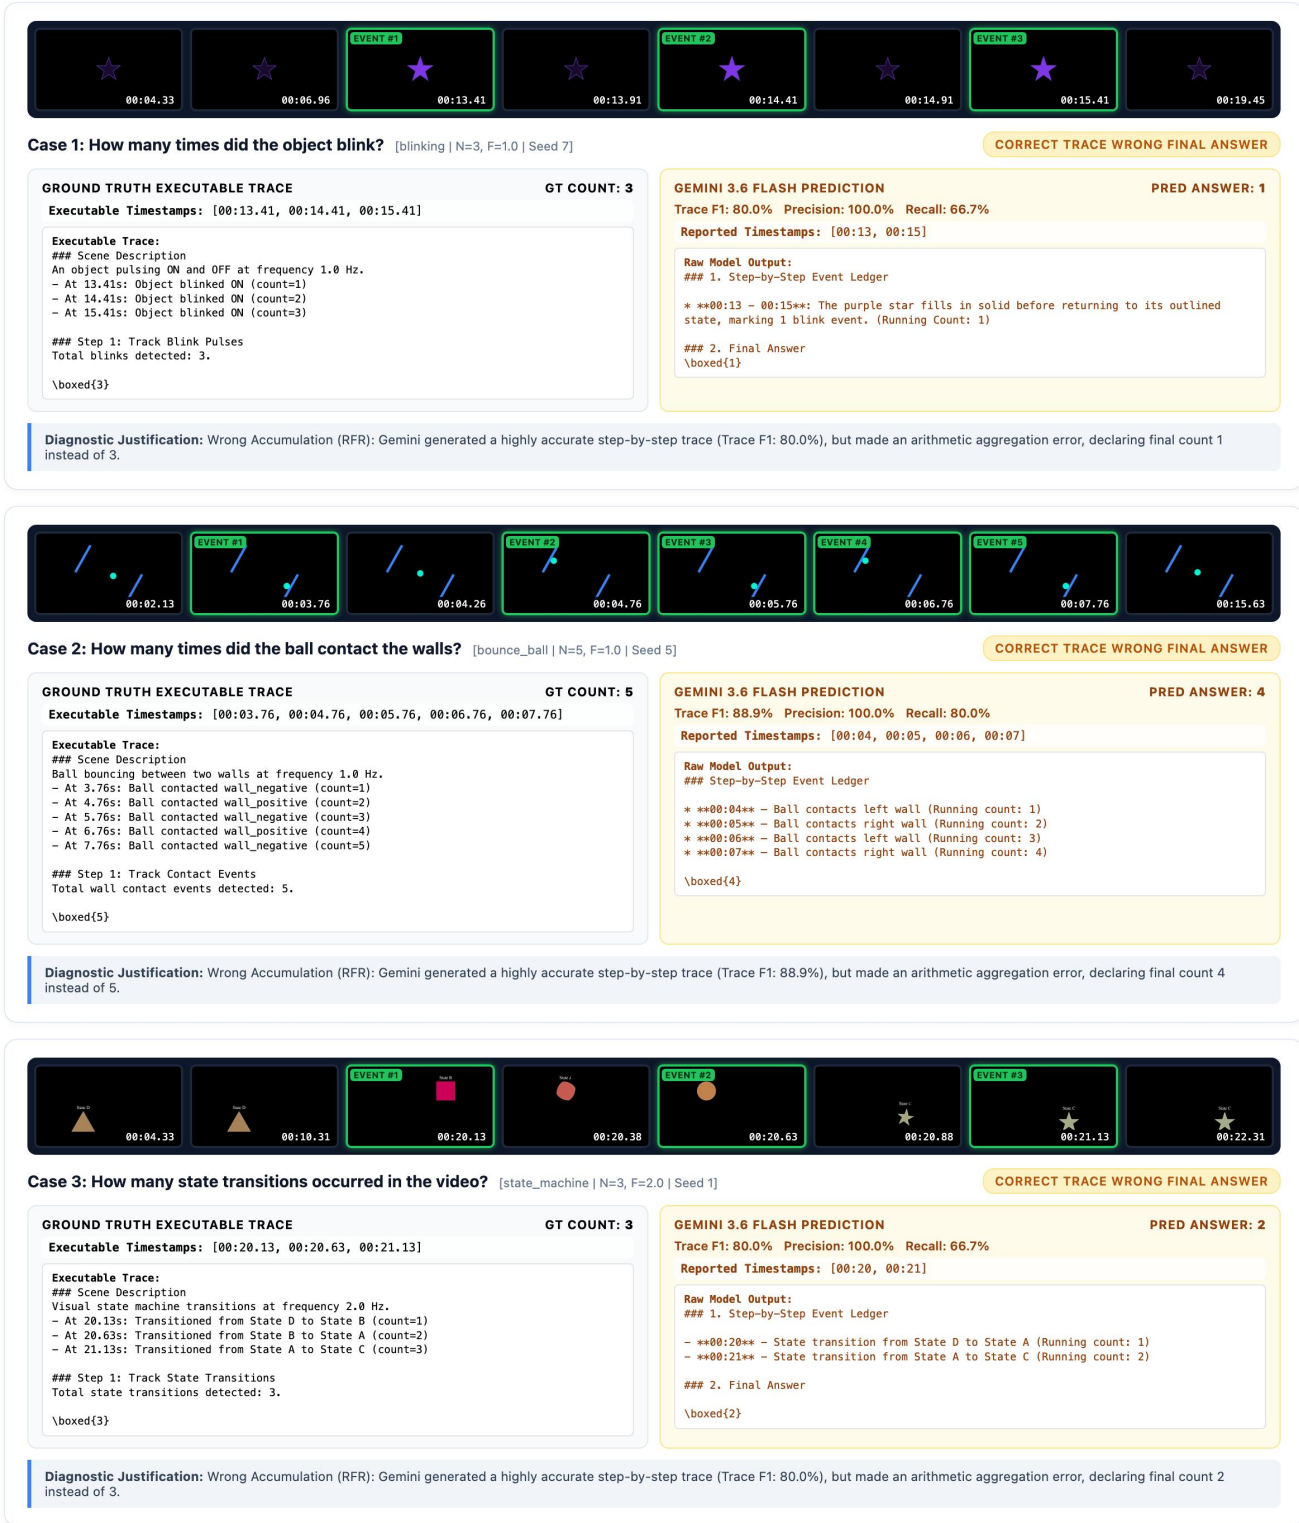


Figure 24: **Wrong Accumulation / Reasoning Failure Ratio (Part 1: Cases 1–3):** Disconnect between trace maintenance and final answer output on `blinking`, `bounce_ball`, and `state_machine`. Gemini logs an accurate event ledger ($F_1 \geq 80\%$), but miscalculates the final integer aggregation in `\boxed{ }`.



GROUND TRUTH EXECUTABLE TRACE **GT COUNT: 12**

Executable Timestamps: [00:05.6, 00:06.26, 00:06.93, 00:07.6, 00:08.26, 00:08.93, 00:09.6, 00:10.26, 00:10.93, 00:11.6, 00:12.26, 00:12.93]

Executable Trace:

Scene Description

Visual state machine transitions at frequency 1.5 Hz.

- At 5.60s: Transitioned from State B to State C (count=1)
- At 6.26s: Transitioned from State C to State D (count=2)
- At 6.93s: Transitioned from State D to State C (count=3)
- At 7.60s: Transitioned from State C to State A (count=4)
- At 8.26s: Transitioned from State A to State D (count=5)
- At 8.93s: Transitioned from State D to State C (count=6)
- At 9.60s: Transitioned from State C to State A (count=7)
- At 10.26s: Transitioned from State A to State B (count=8)
- At 10.93s: Transitioned from State B to State C (count=9)
- At 11.60s: Transitioned from State C to State B (count=10)
- At 12.26s: Transitioned from State B to State C (count=11)
- At 12.93s: Transitioned from State C to State A (count=12)

Step 1: Track State Transitions

Total state transitions detected: 12.

\boxed{12}

GEMINI 3.6 FLASH PREDICTION **PRED ANSWER: 8**

Trace F1: 80.0% Precision: 100.0% Recall: 66.7%

Reported Timestamps: [00:05, 00:06, 00:07, 00:08, 00:09, 00:10, 00:11, 00:12]

Raw Model Output:

To determine the total number of state transitions, we track each instance where the displayed shape and label change from one state to another throughout the video sequence.

- Step-by-Step Event Ledger
 - 00:05: Transition from State B to State C (Running count: 1)
 - 00:06: Transition from State C to State D (Running count: 2)
 - 00:07: Transition from State D to State A (Running count: 3)
 - 00:08: Transition from State A to State D (Running count: 4)
 - 00:09: Transition from State D to State A (Running count: 5)
 - 00:10: Transition from State A to State C (Running count: 6)
 - 00:11: Transition from State C to State B (Running count: 7)
 - 00:12: Transition from State B to State A (Running count: 8)
- Final Answer

\boxed{8}

Figure 25: **Wrong Accumulation / Reasoning Failure Ratio (Part 2: Cases 4–5):** Additional RFR instances on state_machine isolating arithmetic aggregation failures despite faithful trace records.

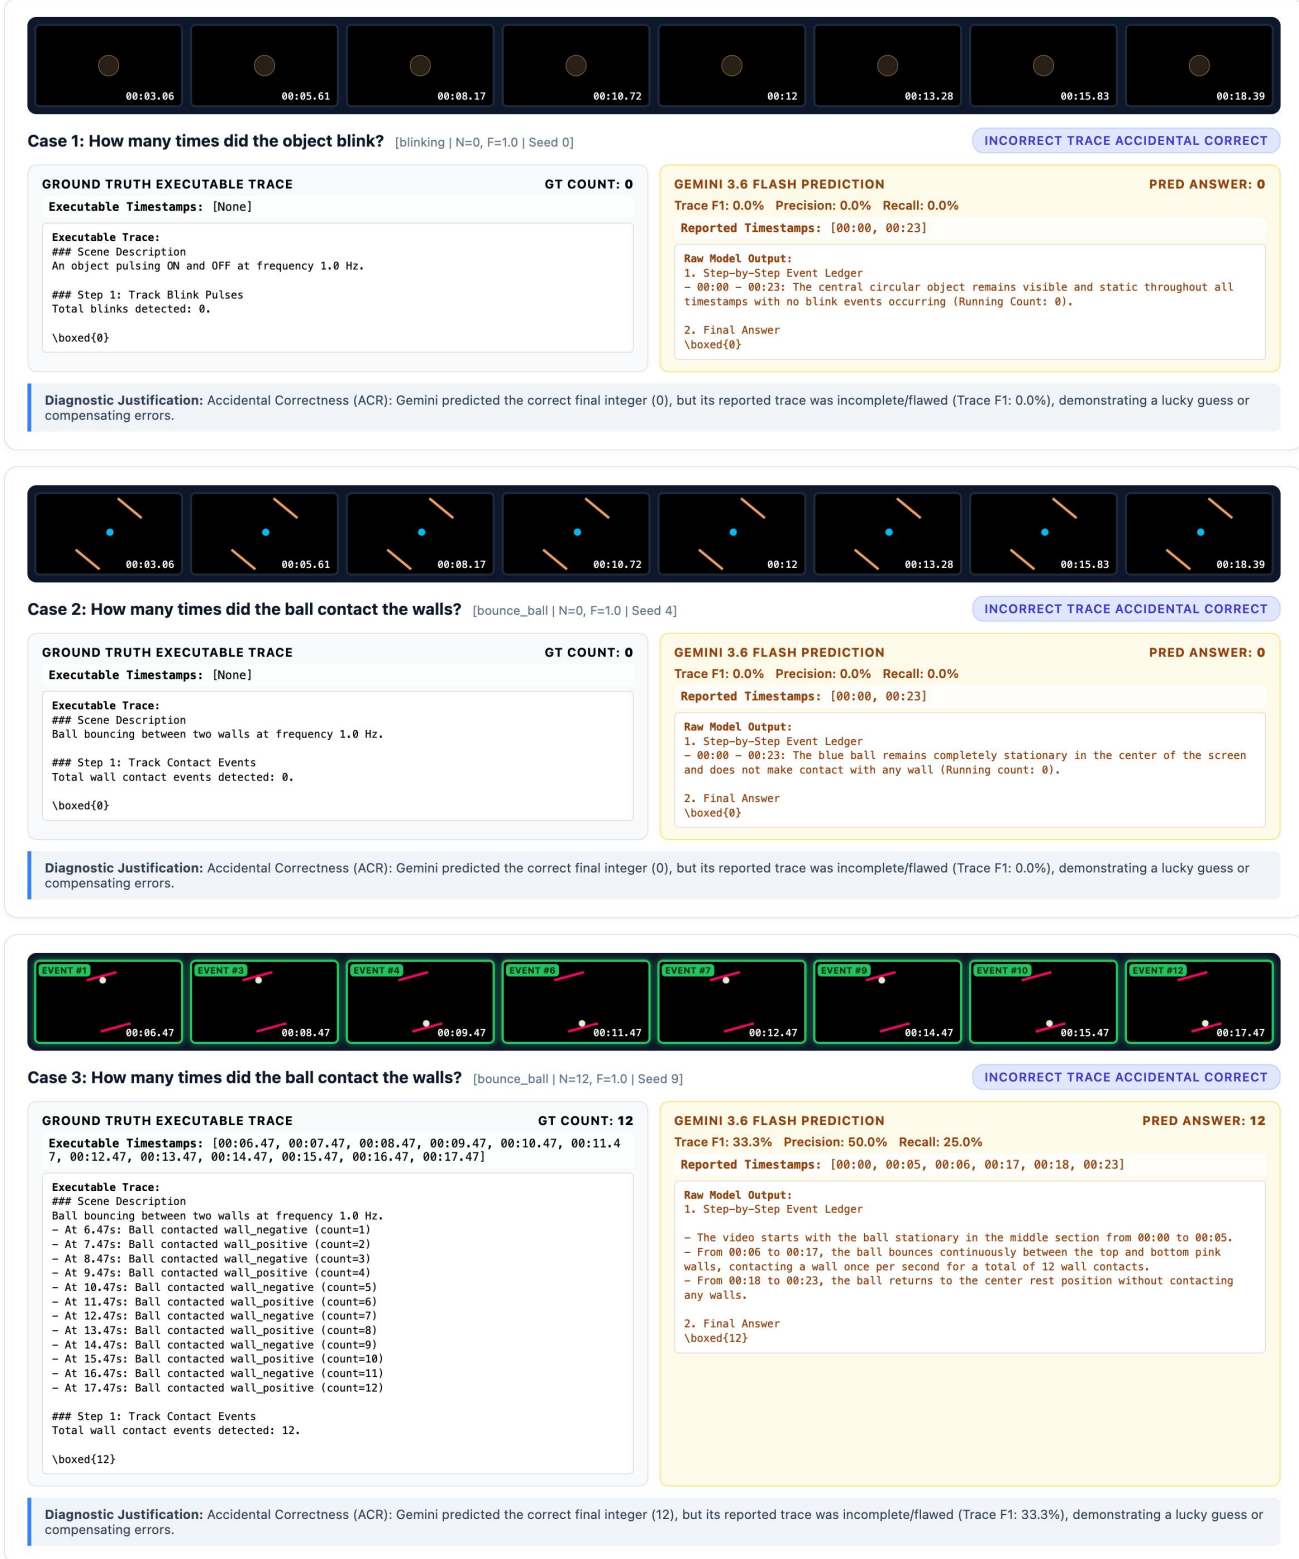


Figure 26: **Accidental Correctness / ACR (Part 1: Cases 1–3):** Unfaithful final counting on `blinking` and `bounce_ball`. The final integer prediction matches ground truth ($\hat{y} = N$), but the intermediate reasoning trace is severely degraded ($F_1 < 40\%$).

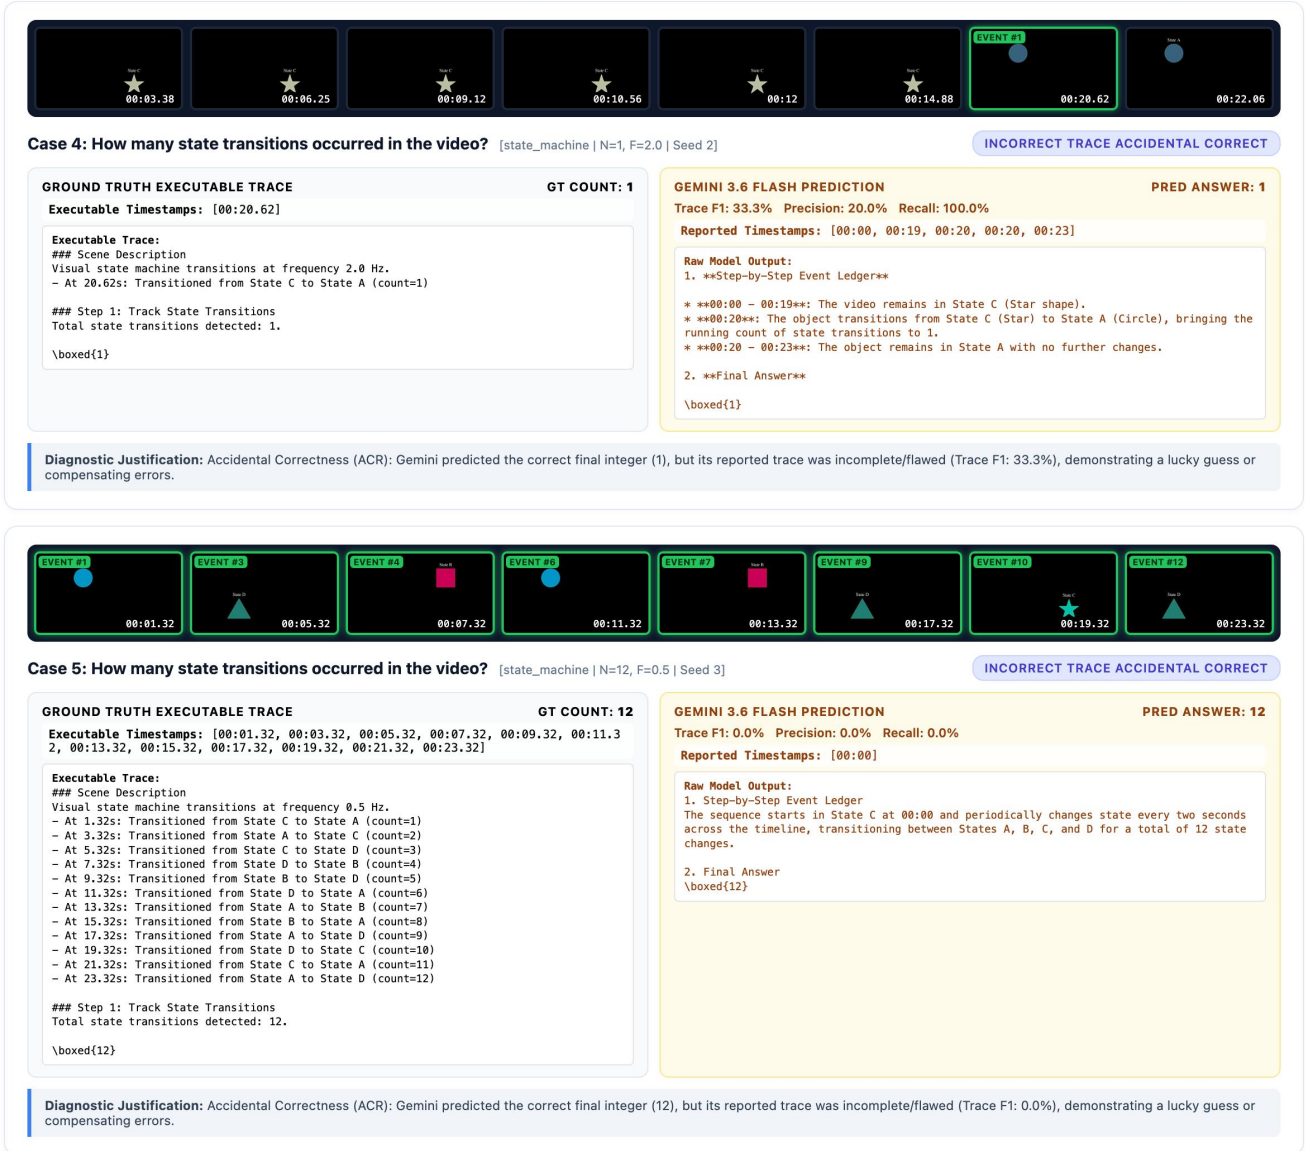


Figure 27: **Accidental Correctness / ACR (Part 2: Cases 4–5):** Unverified correct answers on state_machine masking underlying temporal perception failures.

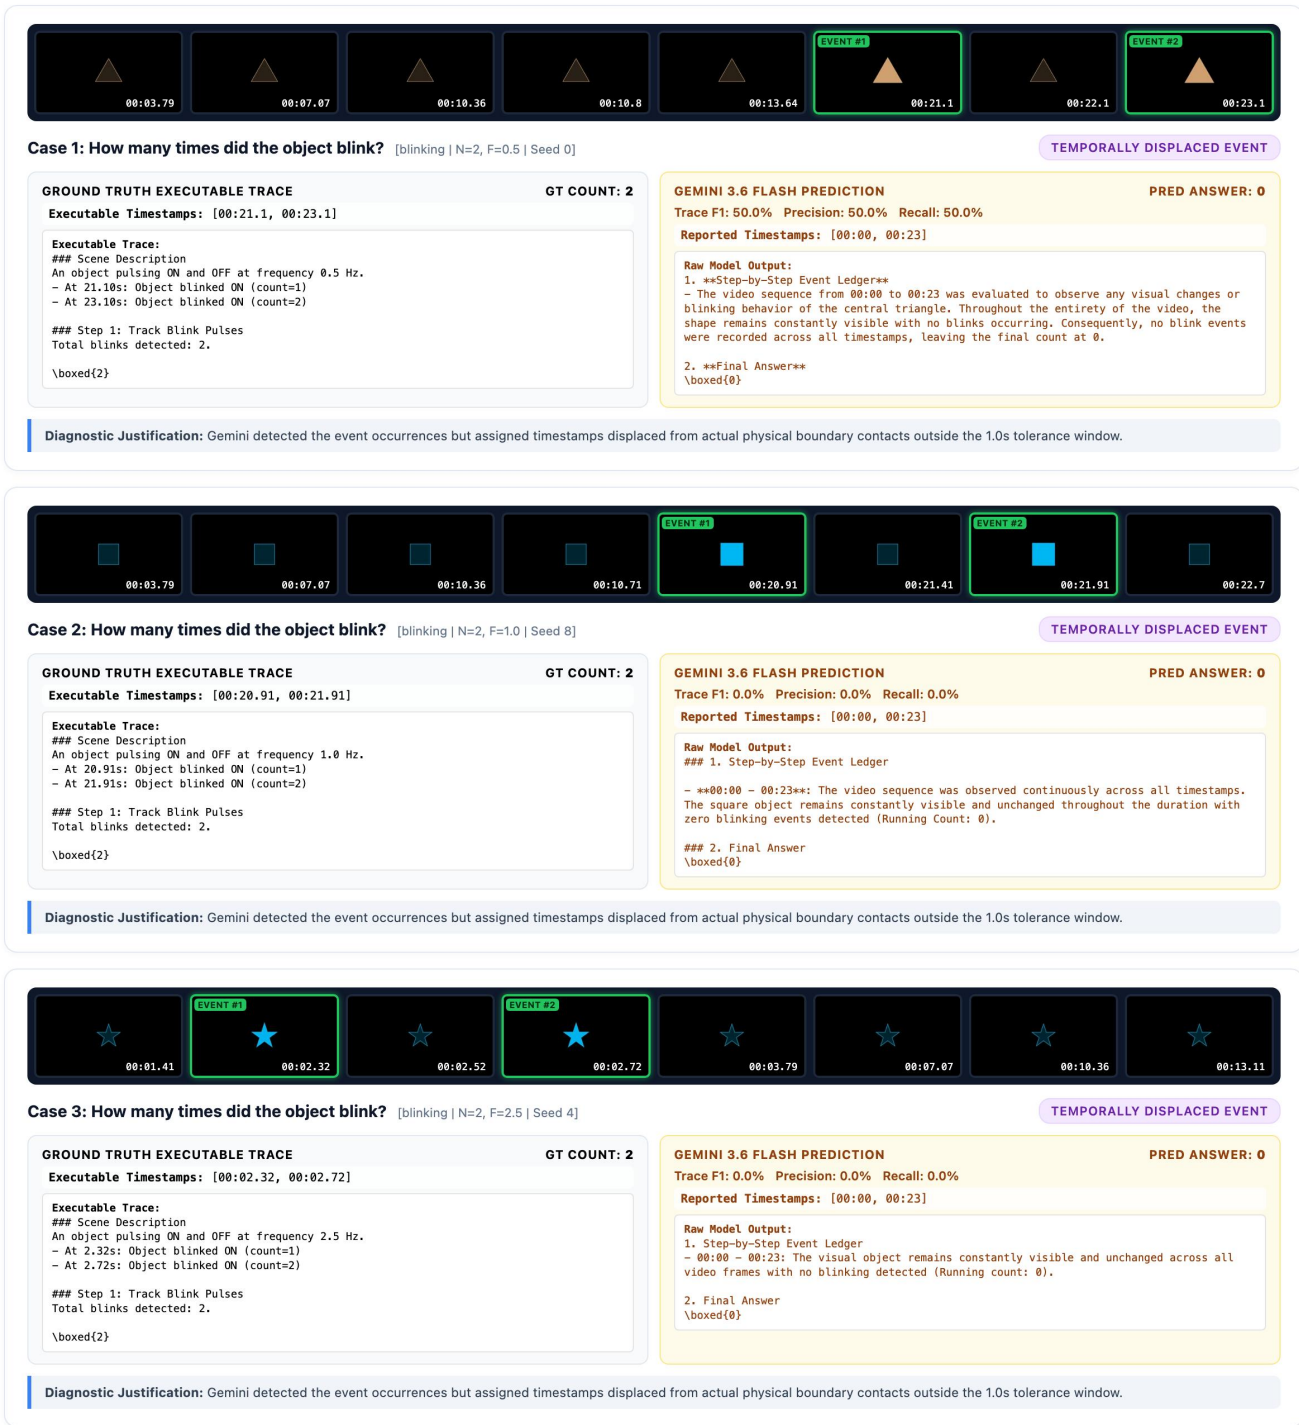


Figure 28: **Temporally Displaced Events (Part 1: Cases 1–3):** Timestamp boundary offset on blinking. Gemini detects event occurrences, but reported seconds fall outside the 1.0s tolerance window relative to ground truth.



Figure 29: Temporally Displaced Events (Part 2: Cases 4–5): Temporal boundary drift profiles on `blinking` and `state_machine`.