

LookAgain: Closed-Loop GUI Grounding with Visually Grounded Reflection

Renshan Zhang¹, Haoyang Meng², Yixiao He², Rui Shao^{1,3,*}, April Hua Liu⁴, Liqiang Nie^{1,3,*}

¹Harbin Institute of Technology, Shenzhen ²Beijing University of Posts and Telecommunications

³Shenzhen Loop Area Institute ⁴Shanghai University of Finance and Economics
zhangrenshan@stu.hit.edu.cn rshaojimmy@gmail.com nieliqiang@gmail.com

<https://github.com/iLearn-Lab/LookAgain>

Abstract

Recent graphical user interface (GUI) grounders have significantly advanced single-shot accuracy on standard benchmarks, yet their performance degrades sharply on small targets, densely packed controls and out-of-distribution interfaces. We attribute this gap to a paradigmatic limitation shared by existing approaches: none of them treats a produced coordinate as a hypothesis to be reflected upon and revised under new visual evidence. This manifests as three coupled issues: 1) **Lack of post-hoc reflection**. The prediction is frozen at the moment of emission, leaving no internal mechanism to challenge or refine it. 2) **Visual evidence decoupled from the prediction**. The auxiliary visual evidence is gathered to support the upcoming coordinate rather than to scrutinise the one already committed to. 3) **Refinement over views, not over predictions**. The iterative zoom-in refines the inspected region instead of inheriting a previous coordinate as a spatial prior to be corrected. In this paper, we propose **LookAgain**, a closed-loop GUI grounder driven by **post-prediction visual reflection**. LookAgain reformulates grounding as a multi-turn *predict-look-again-refine* process with two primitives: “locate” posts a coordinate hypothesis, renders a marker on the image and appends a local patch of the predicted region. It anchors the next reasoning step to the previous prediction as a spatial prior; “confirm” accepts or rejects the hypothesis and terminates the procedure. We train the LookAgain grounder with SFT on constructed reflective trajectories as a cold start, followed by GRPO with terminal grounding correctness as the sole reward. Extensive experiments show that LookAgain consistently improves performance on both refusal-aware and general GUI grounding benchmarks, achieving state-of-the-art results. Comprehensive ablations further verify the effectiveness of the proposed framework.

Introduction

Graphical user interface (GUI) grounding, which maps a natural-language instruction to a precise on-screen coordinate, has become a fundamental capability for screen-operating agents (Qin et al. 2025; Lyu et al. 2026; Zhou et al. 2026a; Chen et al. 2025). Early works such as SeeClick (Cheng et al. 2024), OS-Atlas (Wu et al. 2025b) and UI-TARS (Qin et al. 2025) have substantially advanced single-shot accuracy on standard benchmarks. However, their performance degrades sharply small targets and densely

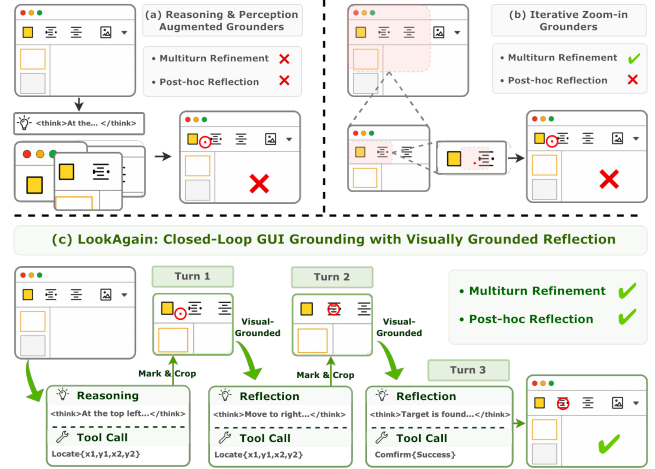


Figure 1: Comparison between existing GUI grounding paradigms and LookAgain. Existing methods either improve reasoning and perception before prediction or refine visual views across turns, but do not perform post-hoc reflection on a predicted coordinate. LookAgain instead turns grounding into a closed-loop predict-look-again-refine process through marker-based cropping and visually grounded reflection.

packed layouts. Such grounding errors remain the dominant source of cascading failures in downstream agents.

To narrow this gap, recent efforts strengthen GUI grounders along several directions. Reasoning-augmented grounders strengthen the textual chain of thought that precedes coordinate emission through tailored training objectives (Chen et al. 2026b) or reward shaping (Zhou et al. 2026b; Tang et al. 2026). Attention-guided perception grounders enrich a single forward pass with auxiliary attention signals (Wu et al. 2026) or multi-view evidence (Zhang et al. 2026) to mitigate the difficulty of perceiving small or cluttered elements. Iterative zoom-in grounders (Luo et al. 2025b; Wu et al. 2025a) further allow the model to consume additional cropped views across multiple turns before committing to a final coordinate. These works further improve grounding accuracy. However, they still lack a protocol that allows the model to reflect on previously produced coordinates, ultimately bounding their effectiveness.

*Corresponding author.

We attribute the remaining gap to a limitation shared by existing grounders. Although recent methods strengthen reasoning, perception, or iterative refinement through zoom-in rounds, none of them treats a produced coordinate as a hypothesis to be reflected upon and revises under new visual evidence. Specifically, we identify three coupled issues:

1) Lack of post-hoc reflection. Existing grounders commit to a coordinate without ever treating it as a hypothesis to be reflected. The prediction is therefore frozen at the moment of emission, leaving no internal mechanism through which the model can challenge or update its own decision.

2) Visual evidence decoupled from the prediction. Auxiliary views and attention maps are gathered to support the upcoming prediction. They are not used to scrutinise it afterwards. The visual evidence the model relies on is therefore never aligned with the hypothesis it ultimately commits to.

3) Refinement over views, not over predictions. In iterative zoom-in, each round refines the region under inspection rather than a concrete coordinate. The model never inherits a previous prediction as a spatial prior. Independent re-samples thus yield diminishing returns on difficult cases.

To resolve these issues, we revisit GUI grounding from the perspective of what happens *after* a prediction is made, rather than how to better perceive or reason before it. Self-refinement in language modelling (Shinn et al. 2023) suggests that critiquing one’s own output is more effective than thinking longer up front. However, purely textual self-critique cannot tell whether a predicted pixel actually hosts the requested element. We therefore propose *visually grounded reflection*. The model first emits a coordinate hypothesis. It is then presented with a high-resolution view of that exact location and decides whether to commit or to refine. Grounding is thus reformulated from a one-shot regression into a closed *predict–look–again–refine* process.

We instantiate this paradigm as a multi-turn tool-use protocol with two primitives. A “locate” call posts a coordinate hypothesis on the screen. A marker is rendered at the box center on the original image. A high-resolution patch around the predicted region is then cropped and appended to the model’s context. A “confirm” call accepts the current hypothesis or rejects the instruction as inapplicable, and terminates the procedure. At each turn the model first reasons in a thinking block and then chooses to issue another locate for refinement or to terminate via confirm. The reasoning is therefore anchored to what the model just claimed to see. This design enforces three properties: (i) every reasoning step is conditioned on the model’s own previous prediction; (ii) every newly observed view is summoned by, and tied to, that prediction; and (iii) refinement inherits the spatial prior of the previous round instead of restarting from scratch.

To realise this paradigm, we build a two-stage training pipeline. We first construct multi-turn reflective grounding trajectories, in which each sample interleaves reasoning, “locate” hypotheses, marker-annotated high-resolution patches and a terminating “confirm” call. These trajectories serve as a cold-start corpus for supervised fine-tuning (SFT), teaching the model the tool-use format and the basic predict–look–again–refine behaviour. We then further optimise the model with Group Relative Policy Optimisation (GRPO), using a

simple outcome reward of grounding correctness at the terminating step. This stage encourages the model to issue refinements only when they improve the final coordinate and to commit when the current hypothesis is already accurate.

We evaluate LookAgain on extensive GUI grounding benchmarks. LookAgain-8B achieves 73.0 overall accuracy on OSWorld-G, improving over the base Qwen3-VL-8B by 21.7 points. It further reaches 84.5 on MMBench-L2-GUI and brings especially large gains on challenging benchmarks such as UIVision (+15.5) and ScreenSpot-Pro (+13.1). These results show that revisiting a predicted coordinate under newly grounded visual evidence leads to more reliable grounding decisions. We also conduct extensive ablations, which consistently validate the effectiveness of the proposed closed-loop reflection paradigm and training recipe.

We summarise our main contributions as follows:

- We propose **LookAgain**, a closed-loop GUI grounding paradigm driven by visually grounded reflection. It turns grounding into a multi-turn *predict–look–again–refine* loop where `locate` and `confirm` primitives anchor reflection to the model’s previous prediction.
- We design a two-stage SFT+GRPO recipe that cold-starts the reflective behaviour on constructed multi-turn trajectories and refines it with terminal grounding correctness as the sole reward.
- Extensive experiments demonstrate that LookAgain consistently improves performance of both refusal-aware and general GUI grounding. Comprehensive ablations further validate the effectiveness of the proposed framework.

Related Works

GUI Grounding. Recent advances in multimodal understanding (Shao et al. 2019; Shao, Wu, and Liu 2023; Shao et al. 2024), multimodal large language models (MLLMs) (Zhang et al. 2025; Li et al. 2025b) and vision-language-action models (Li et al. 2026b,a; Hu et al. 2026; Li et al. 2025c) have demonstrated the potential of grounding visual understanding into action decisions. Building on this progress, GUI grounding aims to map a natural-language instruction to an on-screen coordinate. Existing grounders predominantly cast this as a one-shot regression, in which a MLLM takes the screenshot and instruction and directly emits the coordinate in a single forward pass (Cheng et al. 2024; Gou et al. 2025; Wu et al. 2025b; Yang et al. 2025b; Qin et al. 2025). Representative efforts include SeeClick (Cheng et al. 2024) with grounding-oriented pretraining and OS-Atlas (Wu et al. 2025b) scaling to larger cross-platform GUI corpora. However, this forces the model to commit a coordinate without explicit deliberation. It also restricts the evidence to one global observation that is rarely sufficient for small elements, leading to substantial accuracy degradation (Li et al. 2025a; Nayak et al. 2025).

Reasoning-Augmented Grounding. To address the lack of explicit deliberation, a line of reasoning-augmented grounders strengthens the chain-of-thought reasoning before coordinate emission (Lu et al. 2026; Luo et al. 2025a; Liu et al. 2025; Zhou et al. 2026b; Tang et al. 2026; Chen

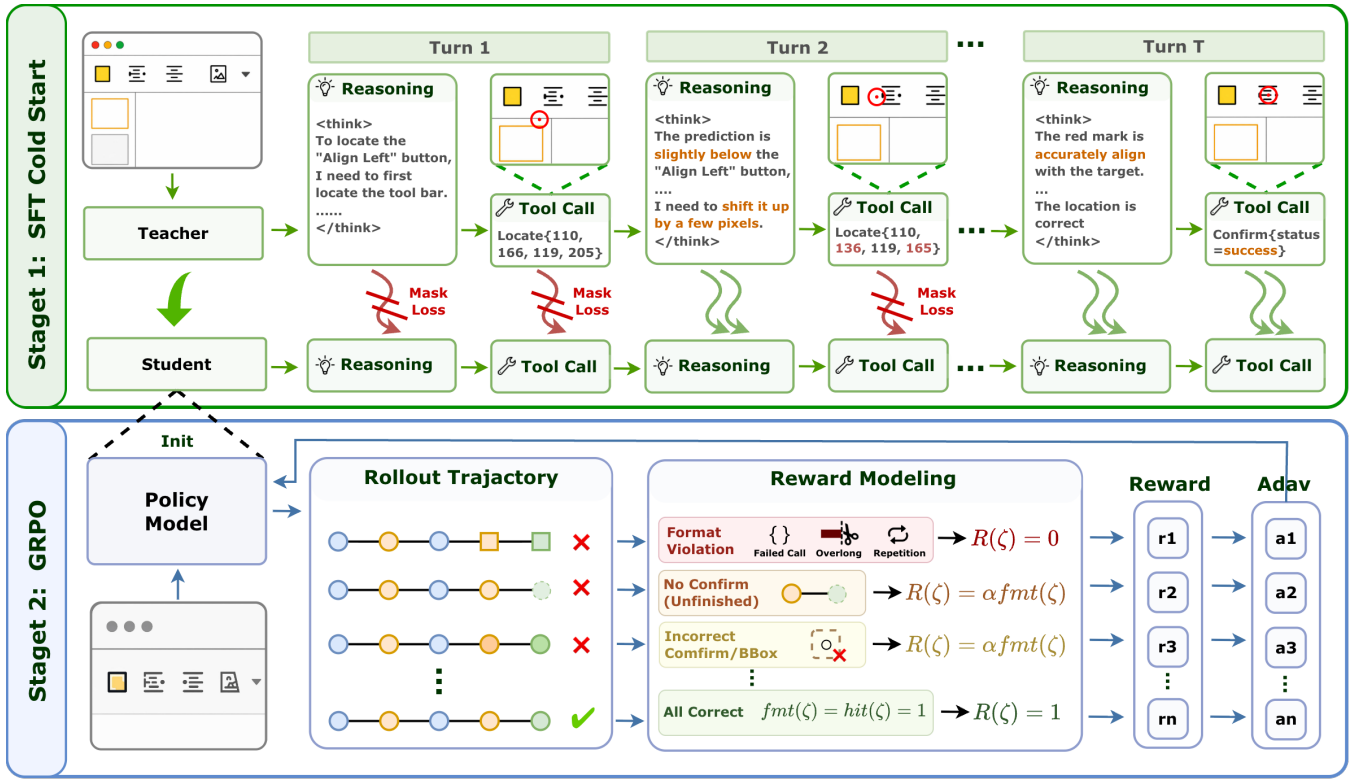


Figure 2: Overall training framework of LookAgain. The model is first cold-started by supervised fine-tuning on teacher-generated reflective trajectories with selective loss masking. It is then further optimized by GRPO with simple rule-based rewards over rollout trajectories.

et al. 2026b). For example, UI-R1 (Lu et al. 2026) and GUI-R1 (Luo et al. 2025a) introduce R1-style (Guo et al. 2025) reasoning to enhance the deliberation prior to grounding. GUI-G1 (Zhou et al. 2026b) and GUI-G2 (Tang et al. 2026) further design geometry-aware reward shaping, providing a stronger learning signal. UI-INS (Chen et al. 2026b) instead reshapes the grounding reasoning by recasting the instruction as multi-perspective rationales. These methods substantially improve grounding accuracy, yet their reasoning is still produced before the coordinate is emitted and thus brings in no new visual evidence to verify the previous prediction.

Perception-Augmented Grounding. To address the perception bottleneck on small elements, another line of work augments the visual evidence available to the grounder (Wu et al. 2026; Chen et al. 2026a; Zhang et al. 2026). For example, GUI-Actor (Wu et al. 2026) and V2P (Chen et al. 2026a) read out attention maps to localise relevant patches before coordinate emission. MVP (Zhang et al. 2026) instead runs independent inference on several attention-guided crops and aggregates the predictions via spatial clustering. These methods enrich the evidence supporting the upcoming coordinate, yet never turn it back to scrutinise one already committed to.

Iterative Zoom-in. To overcome the limitations of single-pass grounding, iterative zoom-in methods have emerged that progressively narrow the inspected region across multiple rounds. RegionFocus (Luo et al. 2025b) performs vi-

sual test-time scaling by repeatedly selecting salient regions guided by the model’s own reasoning. DiMo-GUI (Wu et al. 2025a) further leverages modality-aware visual reasoning to decide where to crop at each step. However, these multi-round procedures only refine the inspected region without explicitly reflecting on the previous prediction. In this work, we treat each prediction as a hypothesis to be revisited, iterating over coordinates rather than over views and turning naive zoom-in into a closed predict–look-again–refine loop.

Method

We present **LookAgain**, a closed-loop GUI grounder that reformulates grounding as a multi-turn *predict–look-again–refine* process. We first formalise the protocol that drive visually grounded reflection, then describe the two-stage training pipeline that instills the reflective behaviour.

Closed-Loop Grounding via Visually Grounded Reflection

Problem reformulation. Given a screenshot I and a natural-language instruction q , conventional grounders learn a one-shot mapping $f_\theta : (I, q) \mapsto \hat{p} \in [0, 1000]^2$ that emits a single normalised click point. We instead model grounding as a sequential decision process $\pi_\theta : (I, q, h_{<t}) \mapsto a_t$, where at each turn t the policy inspects the dialogue history $h_{<t}$ (the original screenshot, prior thoughts, prior prediction and

associated visual patches) and emits a thought τ_t followed by exactly one tool call $a_t \in \{\text{LOCATE}, \text{CONFIRM}\}$. The episode terminates as soon as a CONFIRM is issued, and the centre of the last LOCATE call is taken as the final prediction.

The LOCATE primitive. A call $\text{LOCATE}(x_1, y_1, x_2, y_2)$ with $x_i, y_i \in [0, 1000]$ posts a coordinate hypothesis on the original screenshot. The tool then performs three operations to create visual evidence for further reflection: (i) it computes the bounding-box centre (c_x, c_y) and overlays a visual marker consisting of a small solid red dot at (c_x, c_y) enclosed by a hollow red ring, producing an annotated copy I'_t of the original image; (ii) it crops I'_t into 512×512 patch P_t centred at (c_x, c_y) ; (iii) it appends the P_t to the dialogue history as the tool response. In this way, every patch the model later inspects is the direct visual consequence of its own previous prediction. The hypothesis therefore becomes the addressable subject of the next reasoning step rather than a frozen, unreviewable output.

The CONFIRM primitive. A call $\text{CONFIRM}(\text{status})$ commits the location or refuses the instruction and terminates the episode. $\text{STATUS}=\text{success}$ commits the centre of the most recent LOCATE as the final prediction. $\text{STATUS}=\text{failed}$, accompanied by a free-text *feedback*, declares the instruction infeasible on the given screenshot. It allows the model to abstain rather than emit an arbitrary coordinate.

Closed Grounding Loop. The two primitives are composed into a closed loop that runs for as many turns as the model deems necessary. At each turn the policy is required to first emit a `<think>...</think>` block τ and then exactly one tool call a , conditioned on the running context $h_{<t} = (I, q, \tau_1, a_1, P_1, \dots, \tau_{t-1}, a_{t-1}, P_{t-1})$. The thought is thus anchored either (i) to the marker-annotated patch from its previous hypothesis, enabling *post-hoc* reflection on whether the red dot actually landed on the target element, or (ii) for the first turn, to the raw screenshot alone. The loop accumulates evidence rather than overwriting it. All previously rendered patches P_t are retained in $h_{<t}$, so the model can compare consecutive hypotheses against each other and against the original screenshot. A LOCATE call in turn $t+1$ thus inherits turn t 's coordinate as an explicit spatial prior to be refined, rather than restarting the search from scratch, and the loop closes when the model is confident enough to issue a CONFIRM or when the maximum turn limit is reached.

Analysis of Direct Closed-Loop Grounding. We first examine whether the proposed closed-loop grounding strategy can be directly transferred to different foundation models. As shown in Fig. 3, applying the closed-loop grounding procedure to Gemini3.1-Pro (Google 2026) brings a clear improvement on OSWorld-G-Refine (Xie et al. 2026). However, directly applying the same strategy to Qwen3-VL-8B-Instruct (Bai et al. 2025) does not yield similar gains. Instead, the performance drops due to incorrectly revising originally correct predictions. We hypothesize that this degradation stems from the absence of explicit reflection and refinement. Unlike Gemini, which can naturally produce reflective reasoning before refining its prediction, Qwen3-VL-8B-Instruct (Bai et al. 2025) directly predicts the ground-

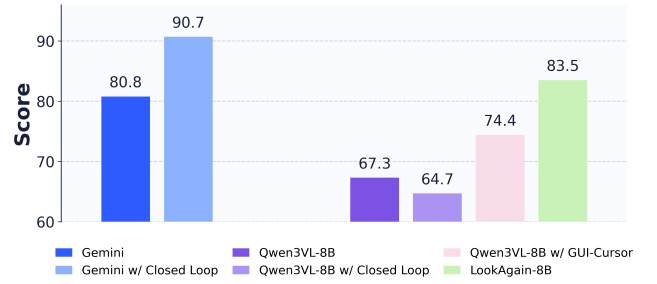


Figure 3: Direct application of closed-loop grounding across different backbones on OSWorld-G-Refine. Benefiting from effective reflection and refinement, Gemini3.1-Pro achieves a substantial improvement. In contrast, Qwen3-VL-8B-Instruct degrades due to the lack of effective reflection, and such reflective behavior cannot be effectively elicited by GUI-Cursor style training, which only gains limited improvement. LookAgain learns this reflection capability through our two-stage pipeline and achieves a significant improvement.

ing result without such an intermediate reasoning process. Moreover, this reflection and refinement pattern is not easily elicited by direct reinforcement learning alone. To verify this, we train the closed-loop grounding policy following GUI-Cursor (Zhao et al. 2025). Although the model learns a certain degree of reflective behavior, the gain remains limited. We also provide qualitative comparisons of their reflection traces in the **Appendix**. These observations motivate our two-stage training pipeline.

Two-Stage Training: SFT Cold Start and GRPO

We train LookAgain in two stages. The first stage instills the predict–look–again–refine tool-use behavior on synthetic reflective trajectories distilled from a teacher model. The second stage uses reinforcement learning to push the model towards trajectories whose terminal commitment is actually correct, while suppressing degenerate behaviours such as malformed tool calls and locate repetition.

Stage 1: Supervised Cold Start on Reflective Trajectories

Trajectory collection. We collect $(I, q, \mathbf{b}^*)$ grounding triples from publicly available GUI grounding corpora, where $\mathbf{b}^*$ is the ground-truth bounding box. For each retained triple we obtain a multi-turn reflective trajectory by rolling out a strong teacher VLM (Google 2026) under the aforementioned tool-use protocol. At every turn the teacher first produces a `<think>` block and then issues a LOCATE or CONFIRM tool call, while the environment executes the call and returns the marker-annotated patch or terminate. We retain a trajectory only if it terminates with $\text{CONFIRM}(\text{success})$ and the centre of the last LOCATE falls inside $\mathbf{b}^*$. This filtering yields a corpus of self-consistent reflective trajectories in which every `<think>` block is conditioned on the visual evidence rendered by the preceding hypothesis.

SFT objective. Let $\mathcal{D}_{\text{SFT}} = \{(I^{(i)}, q^{(i)}, \zeta^{(i)})\}_{i=1}^N$ denote the corpus, where each trajectory $\zeta^{(i)} =$

$(\tau_1^{(i)}, a_1^{(i)}, P_1^{(i)}, \dots, \tau_{T_i}^{(i)}, a_{T_i}^{(i)})$ is composed of thoughts τ_t , tool calls a_t and marker-annotated patches P_t , with a_t being a LOCATE for $t < T_i$ and a CONFIRM at $t = T_i$. Patch tokens are always masked from the loss. For the assistant-emitted tokens we apply a *turn-selective* mask that reflects which parts of a teacher trajectory carry a credible learning signal. Concretely, let $T_i^* = T_i - 1$ denote the index of the final LOCATE (the one whose centre fell inside $\mathbf{b}^*$ by construction) and $\tau_{T_i}^{(i)}, a_{T_i}^{(i)}$ the closing thought and CONFIRM. We define the trainable token set $\mathcal{S}(\zeta^{(i)})$ as follows:

- If $T_i^* = 1$ (the very first LOCATE was already correct), $\mathcal{S}$ contains every assistant token, i.e. τ_1, a_1, τ_2, a_2 are all supervised.
- Otherwise, the first turn’s $\tau_1^{(i)}$ and $a_1^{(i)}$ are masked out, since both the reflection-free opening thought and the wrong opening hypothesis carry no useful signal. For intermediate turns $1 < t < T_i^*$, only the LOCATE call $a_t^{(i)}$ is masked while the preceding thought $\tau_t^{(i)}$ remains supervised, since this thought is a genuine post-hoc reflection on the previous marker-annotated patch even though the refined coordinate still misses. The final correcting turn $t = T_i^*$ and the closing CONFIRM turn $t = T_i$ are fully supervised.

The training objective is then

$$\mathcal{L}_{\text{SFT}}(\theta) = - \sum_{i=1}^N \sum_{u \in \mathcal{S}(\zeta^{(i)})} \log \pi_\theta(u \mid I^{(i)}, q^{(i)}, h_{<u}^{(i)}). \quad (1)$$

This selective scheme cold-starts the model with three behaviours at once: emitting an accurate first hypothesis when the screenshot is unambiguous (from one-shot-correct trajectories), reflecting critically on a marker-annotated patch of one’s own wrong hypothesis (from supervised intermediate thoughts), and committing the refined coordinate via CONFIRM (from fully supervised final turns), without ever imitating a coordinate that the teacher itself got wrong.

Stage 2: Reinforcement Learning with GRPO To directly optimise the final grounding outcome instead of merely imitating teacher trajectories, we further train the model with Group Relative Policy Optimisation (GRPO) under a rule-based reward.

Trajectory-level reward. For each rollout ζ on input $(I, q, \mathbf{b}^*)$, let $\hat{\mathbf{b}}$ denote the bbox of the last LOCATE in ζ and $s \in \{\text{success}, \text{failed}, \emptyset\}$ the status of the terminating CONFIRM, where $\emptyset$ means no CONFIRM is issued. We define

$$\text{hit}(\zeta) = \mathbb{I}[s = \text{success}] \cdot \mathbb{I}[\text{c}(\hat{\mathbf{b}}) \in \mathbf{b}^*], \quad (2)$$

$$\text{fmt}(\zeta) = \mathbb{I}[\neg \text{Violation}(\zeta)], \quad (3)$$

where $\text{c}(\cdot)$ returns the bbox centre. Specifically, if the current sample is a refusal sample, we instead define

$$\text{hit}(\zeta) = \mathbb{I}[s = \text{failed}].$$

The $\text{Violation}(\zeta)$ is true if any of the following holds: (i) the rollout has a malformed tool call; (ii) the same LOCATE bbox

is emitted more than K times in ζ ; (iii) the trajectory was truncated by the response-length cap. The final reward is

$$R(\zeta) = \alpha \cdot \text{fmt}(\zeta) + \beta \cdot \text{hit}(\zeta). \quad (4)$$

Note that the hit term is gated on a successful CONFIRM, i.e. an intermediate LOCATE that happens to fall on the target but is never committed earns no hit credit. This forces the policy to treat CONFIRM as a genuine commitment rather than an afterthought. It also eliminates a degenerate rollout pattern in which an early trajectory is accidentally correct on the first LOCATE but then collapses into post-correct rambling. Moreover, we zero out both reward terms when any of the three violations occurs. This helps GRPO to see a clean negative signal for runaway loops, instead of still earning the hit reward whenever a violating trajectory happens to contain a GT-aligned LOCATE.

GRPO objective. For each prompt $(I, q, \mathbf{b}^*)$ we sample a group of G rollouts $\{\zeta_g\}_{g=1}^G$ from the current policy under the defined multi-turn protocol, compute $\{R(\zeta_g)\}$ via Eq. (4), and form group-normalised advantages

$$A_g = \frac{R(\zeta_g) - \mu_R}{\sigma_R + \varepsilon}, \quad (5)$$

where μ_R and σ_R are the within-group mean and standard deviation of R . The policy is updated with the GRPO algorithm

$$\mathcal{J}_{\text{GRPO}}(\theta) = \mathbb{E} \left[\frac{1}{G} \sum_{g=1}^G \frac{1}{|\mathcal{U}_g|} \sum_{u \in \mathcal{U}_g} (\mathcal{M}_{g,u}(\theta) - \lambda \hat{\mathbb{D}}_{\text{KL}}(u)) \right], \quad (6)$$

with the clipped surrogate

$$\mathcal{M}_{g,u}(\theta) = \min(r_{g,u}(\theta) A_g, \text{clip}(r_{g,u}(\theta), 1-\epsilon, 1+\epsilon) A_g), \quad (7)$$

where $r_{g,u}(\theta) = \pi_\theta(u|\cdot) / \pi_{\theta_{\text{old}}}(u|\cdot)$ is the per-token importance ratio, $\mathcal{U}_g$ is the set of assistant-emitted tokens in ζ_g , and ϵ, λ are the clip range and KL coefficient.

Experiments

We implement LookAgain on the Qwen3-VL (Bai et al. 2025) series. For more training details, please refer to **Appendix**.

Main Results

Results on Refusal-Aware GUI Grounding Table 1 summarizes the results on OSWorld-G (Xie et al. 2026) and VenusBench-GD (Zhou et al. 2025). Overall, LookAgain achieves the best performance among models of comparable scale on both benchmarks, showing that the proposed multi-turn grounding paradigm substantially improves both standard grounding and refusal behavior.

On OSWorld-G (Xie et al. 2026), LookAgain-8B reaches 74.7 on Standard, 57.4 on Refusal, and 73.0 Overall, outperforming the base Qwen3-VL-8B (Bai et al. 2025) by 21.7 points overall, respectively. Notably, many strong GUI models achieve competitive standard grounding accuracy but nearly fail on refusal cases. In contrast, LookAgain improves refusal performance substantially while still increasing standard grounding accuracy, indicating that the gains do not

Model	OSWorld-G			VenusBench-GD		
	Standard	Refusal	Overall	Standard	Refusal	Overall
$\leq 8B$						
GTA1-7B (Yang et al. 2025a)	60.9	0.0	55.1	54.3	0.0	46.4
UI-TARS-1.5-7B (Qin et al. 2025)	58.4	0.0	52.8	47.6	0.2	40.7
OpenCUA-7B (Wang et al. 2026b)	-	-	55.3	56.4	0.0	48.2
UI-Venus-7B (Gu et al. 2025)	60.4	-	54.6	57.4	0.0	49.0
GUI-Cursor (Zhao et al. 2025)	64.1	0.0	58.0	-	-	-
Holo1.5-7B (Company 2025a)	-	-	-	59.7	0.0	51.0
VISTA-8B (Qiu et al. 2026)	-	-	62.4	-	-	-
VISTA-8B w/ MVP (Zhang et al. 2026)	-	-	63.1	-	-	-
Qwen3-VL-8B* (Bai et al. 2025)	56.7	-	51.3	62.3	57.3	61.5
LookAgain-8B	74.7	57.4	73.0	69.7	70.6	69.8
$\geq 30B$						
GTA1-32B (Yang et al. 2025a)	72.1	0.0	65.2	68.9	0.0	58.8
OpenCUA-32B (Wang et al. 2026b)	-	-	-	58.6	0.0	50.1
UI-Venus-72B (Gu et al. 2025)	68.8	-	62.2	73.5	51.3	70.2
Holo1.5-72B (Company 2025a)	-	-	-	73.7	0.0	62.9
Qwen3-VL-32B* (Bai et al. 2025)	67.0	-	60.6	65.6	55.1	64.1
LookAgain-32B	78.4	50.0	75.7	71.3	69.6	71.1

Table 1: **Results of LookAgain on OSWorld-G and Venus-GD.** *standard* denotes the subset consisting of all non-refusal samples. * denotes the results evaluated in this work.

Model	SSPro	UIVision	MMB-L2-GUI
$\leq 8B$			
UI-TARS-1.5-7B (Qin et al. 2025)	35.7	22.3	64.3
OpenCUA-7B (Wang et al. 2026b)	50.0	29.7	-
GTA1-7B (Yang et al. 2025a)	50.1	-	78.5
UI-Venus-7B (Gu et al. 2025)	50.8	26.5	79.9
GUI-Owl-7B (Ye et al. 2025)	54.9	-	80.5
Holo2-8B (Company 2025b)	58.9	35.1	84.5
Qwen3-VL-8B* (Bai et al. 2025)	47.1	23.3	79.3
LookAgain-8B	60.2	38.8	84.5
$\geq 30B$			
OpenCUA-32B (Wang et al. 2026b)	55.3	33.3	-
GUI-Owl-32B (Ye et al. 2025)	58.0	-	83.0
GTA1-32B (Yang et al. 2025a)	63.6	-	83.4
OpenCUA-72B (Wang et al. 2026b)	60.8	37.3	-
UI-Venus-72B (Gu et al. 2025)	61.9	36.8	86.3
Qwen3-VL-32B* (Bai et al. 2025)	54.5	32.7	84.2
LookAgain-32B	61.5	47.9	88.4

Table 2: **Overall results of LookAgain across three GUI-grounding benchmarks.** * denotes our evaluated results.

come from conservative prediction or over-refusal, but from better target verification. The same advantage carries over to the larger backbone, where LookAgain-32B lifts the base Qwen3-VL-32B (Bai et al. 2025) by +15.1 and attains the best overall accuracy.

A similar trend is also observed on VenusBench-GD (Zhou et al. 2025), where LookAgain-8B achieves 69.8 overall score, outperforming Qwen3-VL-8B (Bai et al. 2025) by 8.3 points. LookAgain-32B also gains 7.0 improvement. This result suggests that explicit re-checking before final local-

ization is particularly effective in both general and refusal grounding tasks. **We also provide the results on OSWorld-G-Refine (Xie et al. 2026) in Appendix.**

Results on General GUI Grounding Table 2 further reports results on Screenspot-Pro (Li et al. 2025a), UIVision (Nayak et al. 2025), and MMBench-L2-GUI (Wang et al. 2025). LookAgain-8B achieves 60.2 on Screenspot-Pro (Li et al. 2025a), 38.8 on UIVision (Nayak et al. 2025), and 84.5 on MMBench-L2-GUI (Wang et al. 2025). Compared with the base Qwen3-VL-8B model, it gains +13.1, +15.5, and +5.2 points increment, respectively. LookAgain-32B also improves Qwen3-VL-32B by +7.0, +15.2, and +4.2 points on the three benchmarks. The results indicate that LookAgain improves not only refusal handling, but also general-purpose grounding robustness. Notably, these benchmarks all require fine-grained grounding under diverse layouts and substantial visual ambiguity. This demonstrates that the visually grounded reflection ability of LookAgain facilitates fine-grained element recognition across diverse categories.

Analysis on the prediction bounding box counts. To better understand when LookAgain tends to perform more iterative grounding, we analyze the relationship between the relative target size and the average number of predicted bounding boxes. As shown in Figure 4, there is a clear inverse relationship between the target-to-image area ratio and the average number of predicted bounding boxes, i.e. smaller targets generally lead to larger prediction counts. It is consistently observed both across benchmarks and across globally grouped samples by bbox area ratio. This indicates that LookAgain can effectively use more rounds to gather finer-grained visual details for reflection and verification when the target occupies a smaller portion of the image, which is particularly beneficial for small-object localization. We further provide

Model	SSPro	UIVision	Venus-GD
Qwen3-VL-8B* (Bai et al. 2025)	47.1	23.3	61.5
+ GRPO-Single Turn w/o refusal	55.7	31.9	66.6
+ GRPO-Single Turn w/ refusal	47.6	26.2	65.4
LookAgain-8B	60.2	38.8	69.8

Table 3: **Comparison with single-turn grounding.** We compare the base model, a single-turn GRPO variant, and the full LookAgain model to analyze the effect of the proposed multi-turn look-again mechanism.

SFT	GRPO	OSG-R	UIVision	Venus-GD
		67.8	23.3	61.5
✓		73.5	37.5	60.6
✓	✓	81.0	38.8	69.8

Table 4: **Pipeline ablation of LookAgain.** We study the contributions of SFT and GRPO in the full training pipeline.

more analysis on the prediction bbox counts in **Appendix**.

Ablation Study

Effect of multi-turn reflection. To validate that the performance gain mainly comes from the proposed multi-turn reflection mechanism rather than RL alone, we compare the base Qwen3-VL-8B, a GRPO-Single Turn variant, and the full LookAgain model in Table 3.

Compared with the base model, single-turn GRPO brings only limited gains, e.g. improving performance from 47.1 to only 47.6 on SreenSpot-Pro. This marginal improvement suggest that directly training a single-turn policy to jointly handle standard grounding and refusal is suboptimal. In particular, learning to refuse within the same single-step decision process can interfere with standard grounding, increasing erroneous refusals on normal samples. In contrast, the LookAgain model boosts the performance to 60.2, substantially outperforming the single-turn variant. Even when the single-turn variant is relieved of refusal and reaches its best of 55.7 on SreenSpot-Pro, it still falls clearly short of LookAgain, showing that the gain stems from multi-turn reflection itself rather than from simply avoiding the refusal burden. We attribute this improvement to the multi-turn look-again procedure, which separates verification from immediate final prediction and therefore better balances accurate grounding with appropriate refusal.

Generality across base backbones. To verify the generalization ability of LookAgain beyond a single backbone, we apply the same strategy to Qwen3.5-9B (Qwen Team 2026). As shown in Table 5, LookAgain improves the performance of Qwen3.5-9B to 84.9 on OSWorld-G-R, 49.9 on UIVision, and 72.1 on Venus-GD. The large and consistent gains across all benchmarks suggest that LookAgain is not tightly coupled to a particular model family and can serve as a general enhancement recipe for GUI grounding models.

Pipeline ablation. To study the contribution of each training stage, we further conduct a pipeline ablation. As shown in

Model	OSG-R	UIVision	Venus-GD
Qwen3.5-9B* (Qwen Team 2026)	74.6	34.5	59.2
+ GRPO-Single Turn w/ refusal	78.3	40.8	61.8
LookAgain-9B	84.9	49.9	72.1

Table 5: **Backbone generalization of LookAgain.** The performance of LookAgain when instantiated on the Qwen3.5-9B backbone.

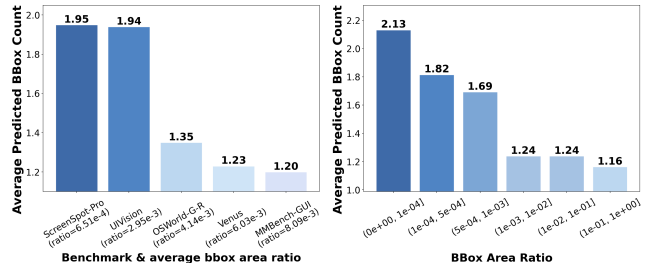


Figure 4: **Relationship between target size and prediction count in LookAgain.** The left figure shows the average number of predicted bounding boxes for each benchmark, together with the corresponding average target area ratio. The right figure shows the average number of predicted bounding boxes after grouping samples by target area ratio. The results suggest that LookAgain tends to perform more rounds of reflection for smaller targets, which helps collect finer-grained visual details for localization.

Table 4, adding only SFT improves OSWorld-G-R and UIVision to 73.5 and 37.5, but slightly decreases Venus-GD to 60.6, indicating that supervised tuning helps the model learn the interaction format and coarse grounding behavior, yet is insufficient for reliable refusal-aware decision making. When GRPO is further added on top of the SFT model, performance rises sharply to 81.0, 38.8, and 69.8. We therefore conclude that the two stages are complementary. SFT provides a stable initialization for the multi-turn grounding process, while GRPO further strengthens verification, target discrimination, and refusal calibration.

Conclusion

To address the lack of post-hoc verification in GUI grounding, we propose LookAgain, a closed-loop grounding framework based on visually grounded reflection. LookAgain reformulates grounding as a multi-turn process of prediction, reflection and refinement, where *locate* generates a prediction with a marker-annotated local patch, and *confirm* commits the result. By grounding refinement in evidence elicited from previous hypothesis, LookAgain enables explicit reflection and correction before final commitment. We further introduce a two-stage training pipeline that cold-starts reflective grounding on constructed trajectories and optimizes terminal correctness through reinforcement learning. Extensive experiments show the superior performance of LookAgain.

References

- Bai, S.; Cai, Y.; Chen, R.; Chen, K.; Chen, X.; Cheng, Z.; Deng, L.; Ding, W.; Gao, C.; Ge, C.; et al. 2025. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*.
- Chen, G.; Zhou, X.; Shao, R.; Lyu, Y.; Zhou, K.; Wang, S.; Li, W.; Li, Y.; Qi, Z.; and Nie, L. 2025. Less is more: Empowering gui agent with context-aware simplification. In *2025 IEEE/CVF International Conference on Computer Vision (ICCV)*, 5901–5911. IEEE.
- Chen, J.; Chen, L.; Wang, D.; Su, Q.; Chu, Z.; Hao, B.; Gan, L.; Zhuang, C.; and Gu, J. 2026a. V2P: Visual Attention Calibration for GUI Grounding via Background Suppression and Center Peaking. *arXiv preprint arXiv:2601.06899*.
- Chen, L.; Zhou, H.; chenglin cai; Zhang, J.; Tong, P.; Zhang, X.; Kong, Q.; Liu, C.; Liu, Y.; Wang, W.; Wang, Y.; Jin, Q.; and HOI, S. 2026b. UI-Ins: Enhancing GUI Grounding with Multi-Perspective Instruction as Reasoning. In *The Fourteenth International Conference on Learning Representations*.
- Cheng, K.; Sun, Q.; Chu, Y.; Xu, F.; YanTao, L.; Zhang, J.; and Wu, Z. 2024. Seeclick: Harnessing gui grounding for advanced visual gui agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 9313–9332.
- Company, H. 2025a. Holo1.5 - Open Foundation Models for Computer Use Agents.
- Company, H. 2025b. Holo2 - Open Foundation Models for Navigation and Computer Use Agents.
- Feizi, A.; Nayak, S.; Jian, X.; Lin, K. Q.; Li, K.; Awal, R.; Lù, X. H.; Obando-Ceron, J.; Rodriguez, J. A.; Chapados, N.; et al. 2025. Grounding Computer Use Agents on Human Demonstrations. *arXiv preprint arXiv:2511.07332*.
- Google. 2026. Gemini 3.1 Pro Preview.
- Gou, B.; Wang, D. R.; Zheng, B.; Xie, Y.; Chang, C.; Shu, Y.; Sun, H.; and Su, Y. 2025. Navigating the digital world as humans do: Universal visual grounding for gui agents. In *International Conference on Learning Representations*, volume 2025, 30851–30883.
- Gu, Z.; Zeng, Z.; Xu, Z.; Zhou, X.; Shen, S.; Liu, Y.; Zhou, B.; Meng, C.; Xia, T.; Chen, W.; et al. 2025. Ui-venus technical report: Building high-performance ui agents with rft. *arXiv preprint arXiv:2508.10833*.
- Guo, D.; Yang, D.; Zhang, H.; Song, J.; Wang, P.; Zhu, Q.; Xu, R.; Zhang, R.; Ma, S.; Bi, X.; et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*.
- Hu, B.; Li, Z.; Shao, R.; Chen, J.; Liu, A. H.; Zheng, W.; and Nie, L. 2026. From Abstraction to Instantiation: Learning Behavioral Representation for Vision-Language-Action Model. In *International Conference on Learning Representations*.
- Li, C.-L.; Sohn, K.; Yoon, J.; and Pfister, T. 2021. Cut-paste: Self-supervised learning for anomaly detection and localization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 9664–9674.
- Li, K.; Meng, Z.; Lin, H.; Luo, Z.; Tian, Y.; Ma, J.; Huang, Z.; and Chua, T.-S. 2025a. Screenspot-pro: Gui grounding for professional high-resolution computer use. In *Proceedings of the 33rd ACM International Conference on Multimedia*, 8778–8786.
- Li, W.; Hu, B.; Shao, R.; Shen, L.; and Nie, L. 2025b. Lionfs: Fast & slow video-language thinker as online video assistant. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 3240–3251. IEEE.
- Li, W.; Zhang, R.; Shao, R.; Fang, Z.; Zhou, K.; Tian, Z.; and Nie, L. 2026a. Semanticvla: Semantic-aligned sparsification and enhancement for efficient robotic manipulation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 18397–18405.
- Li, W.; Zhang, R.; Shao, R.; He, J.; and Nie, L. 2026b. CogVLA: Cognition-aligned vision-language-action models via instruction-driven routing & sparsification. *Advances in neural information processing systems*, 38: 137646–137675.
- Li, Z.; Xie, Y.; Shao, R.; Chen, G.; Guan, W.; Jiang, D.; Wang, Y.; and Nie, L. 2025c. Optimus-3: Dual-router aligned mixture-of-experts agent with dual-granularity reasoning-aware policy optimization. *arXiv preprint arXiv:2506.10357*.
- Liu, Y.; Li, P.; Xie, C.; Hu, X.; Han, X.; Zhang, S.; Yang, H.; and Wu, F. 2025. Infigui-r1: Advancing multimodal gui agents from reactive actors to deliberative reasoners. *arXiv preprint arXiv:2504.14239*.
- Lu, Z.; Chai, Y.; Guo, Y.; Yin, X.; Liu, L.; Wang, H.; Xiao, H.; Ren, S.; Zhao, P.; Liu, G.; et al. 2026. Ui-r1: Enhancing efficient action prediction of gui agents by reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 17608–17616.
- Luo, R.; Wang, L.; He, W.; Chen, L.; Li, J.; and Xia, X. 2025a. Gui-r1: A generalist r1-style vision-language action model for gui agents. *arXiv preprint arXiv:2504.10458*.
- Luo, T.; Logeswaran, L.; Johnson, J.; and Lee, H. 2025b. Visual test-time scaling for gui agent grounding. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 19989–19998.
- Lyu, Y.; Chen, G.; Shao, R.; Guan, W.; and Nie, L. 2026. Personalalign: Hierarchical implicit intent alignment for personalized gui agent with long-term user-centric records. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 36074–36089.
- Nayak, S.; Jian, X.; Lin, K. Q.; Rodriguez, J. A.; Kalsi, M.; Chapados, N.; Özsu, M. T.; Agrawal, A.; Vazquez, D.; Pal, C.; et al. 2025. UI-Vision: A Desktop-centric GUI Benchmark for Visual Perception and Interaction. In *International Conference on Machine Learning*, 45817–45851. PMLR.
- Qin, Y.; Ye, Y.; Fang, J.; Wang, H.; Liang, S.; Tian, S.; Zhang, J.; Li, J.; Li, Y.; Huang, S.; et al. 2025. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*.
- Qiu, X.; Zhang, Y.; Jia, H.; Shen, S.; Meng, C.; and Zhu, L. 2026. VISTA: View-Consistent Self-Verified Training for GUI Grounding. *arXiv preprint arXiv:2606.14579*.

- Qwen Team. 2026. Qwen3.5: Towards Native Multimodal Agents.
- Shao, R.; Lan, X.; Li, J.; and Yuen, P. C. 2019. Multi-adversarial discriminative deep domain generalization for face presentation attack detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 10023–10031.
- Shao, R.; Wu, T.; and Liu, Z. 2023. Detecting and grounding multi-modal media manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 6904–6913.
- Shao, R.; Wu, T.; Wu, J.; Nie, L.; and Liu, Z. 2024. Detecting and grounding multi-modal media manipulation and beyond. *IEEE Transactions on Pattern Analysis and Machine Intelligence*.
- Shinn, N.; Cassano, F.; Gopinath, A.; Narasimhan, K.; and Yao, S. 2023. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36: 8634–8652.
- Tang, F.; Gu, Z.; Lu, Z.; Liu, X.; Shen, S.; Meng, C.; Wang, W.; Zhang, W.; Shen, Y.; Lu, W.; et al. 2026. GUI-G²: Gaussian Reward Modeling for GUI Grounding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 33214–33222.
- Wang, W.; Li, X.; Guo, H.; Yu, W.; Fang, T.; Mi, H.; Yu, D.; and Zhang, S. 2026a. Measure Twice, Click Once: Co-evolving Proposer and Visual Critic via Reinforcement Learning for GUI Grounding. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 20964–20984.
- Wang, X.; Wang, B.; Lu, D.; Yang, J.; Xie, T.; Wang, J.; Deng, J.; Guo, X.; Xu, Y.; Wu, C.; et al. 2026b. Opencua: Open foundations for computer-use agents. *Advances in Neural Information Processing Systems*, 38: 139756–139806.
- Wang, X.; Wu, Z.; Xie, J.; Ding, Z.; Yang, B.; Li, Z.; Liu, Z.; Li, Q.; Dong, X.; Chen, Z.; et al. 2025. Mmbench-gui: Hierarchical multi-platform evaluation framework for gui agents. *arXiv preprint arXiv:2507.19478*.
- Wu, H.; Chen, H.; Cai, Y.; Liu, C.; Ye, Q.; Yang, M.-H.; and Wang, Y. 2025a. Dimo-gui: Advancing test-time scaling in gui grounding via modality-aware visual reasoning. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, 26257–26267.
- Wu, Q.; Cheng, K.; Yang, R.; Zhang, C.; Yang, J.; Jiang, H.; Mu, J.; Peng, B.; Qiao, B.; Tan, R.; et al. 2026. Gui-actor: Coordinate-free visual grounding for gui agents. *Advances in Neural Information Processing Systems*, 38: 15101–15128.
- Wu, Z.; Wu, Z.; Xu, F.; Wang, Y.; Sun, Q.; Jia, C.; Cheng, K.; Ding, Z.; Chen, L.; Liang, P. P.; et al. 2025b. OS-ATLAS: Foundation action model for generalist GUI agents. In *International Conference on Learning Representations*, volume 2025, 5090–5108.
- Xie, T.; Deng, J.; Li, X.; Yang, J.; Wu, H.; Chen, J.; Hu, W.; Wang, X.; Xu, Y.; Wang, Z.; et al. 2026. Scaling computer-use grounding via user interface decomposition and synthesis. *Advances in Neural Information Processing Systems*, 38.
- Yang, Y.; Li, D.; Dai, Y.; Yang, Y.; Luo, Z.; Zhao, Z.; Hu, Z.; Huang, J.; Saha, A.; Chen, Z.; et al. 2025a. Gta1: Gui test-time scaling agent. *arXiv preprint arXiv:2507.05791*.
- Yang, Y.; Wang, Y.; Li, D.; Luo, Z.; Chen, B.; Huang, C.; and Li, J. 2025b. Aria-ui: Visual grounding for gui instructions. In *Findings of the Association for Computational Linguistics: ACL 2025*, 22418–22433.
- Ye, J.; Zhang, X.; Xu, H.; Liu, H.; Wang, J.; Zhu, Z.; Zheng, Z.; Gao, F.; Cao, J.; Lu, Z.; et al. 2025. Mobile-agent-v3: Fundamental agents for gui automation. *arXiv preprint arXiv:2508.15144*.
- Zhang, R.; Shao, R.; Chen, G.; Zhang, M.; Zhou, K.; Guan, W.; and Nie, L. 2025. Falcon: Resolving visual redundancy and fragmentation in high-resolution multimodal large language models via visual registers. In *2025 IEEE/CVF International Conference on Computer Vision (ICCV)*, 23530–23540. IEEE.
- Zhang, Y.; Pan, Z.; Zeng, Z.; Shen, S.; Meng, C.; and Zhu, L. 2026. Mvp: Multiple view prediction improves gui grounding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 27482–27492.
- Zhao, Y.; Chen, W.-N.; Inan, H. A.; Kessler, S.; Wang, L.; Wutschitz, L.; Yang, F.; Zhang, C.; Minervini, P.; Rajmohan, S.; et al. 2025. Learning gui grounding with spatial reasoning from visual feedback. *arXiv preprint arXiv:2509.21552*.
- Zhou, B.; Huang, Z.; Guo, Y.; Gu, Z.; Xia, T.; Luo, Z.; Tang, F.; Kong, D.; Shang, Y.; Ou, S.; et al. 2025. VenusBenchmark: A Comprehensive Multi-Platform GUI Benchmark for Diverse Grounding Tasks. *arXiv preprint arXiv:2512.16501*.
- Zhou, X.; Chen, G.; Xie, Y.; Li, Z.; Zhou, K.; Wang, S.; Yang, S.; Tian, Z.; and Shao, R. 2026a. Hiconagent: History context-aware policy optimization for gui agents. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Zhou, Y.; Dai, S.; Wang, S.; Zhou, K.; Jia, Q.; and Xu, J. 2026b. Gui-g1: Understanding rl-zero-like training for visual grounding in gui agents. *Advances in Neural Information Processing Systems*, 38: 95683–95705.

Implementation Details

Dataset. We build the training data by combining open-source grounding datasets with trajectory synthesis under our proposed closed-loop grounding protocol. Specifically, we manually filter the GroundCUA dataset (Feizi et al. 2025) and retain 20k high-quality grounding samples. We further collect 30k samples from the open-source OS-Atlas dataset (Wu et al. 2025b). Based on this mixed dataset, we use Gemini3.1-Pro (Google 2026) to generate multi-turn grounding trajectories following the closed-loop grounding protocol. In particular, the model is prompted to reason about the target region, iteratively make grounding predictions, and verify its own outputs through confirmation turns. We retain only those trajectories whose final prediction correctly localizes the ground-truth bounding box and is further validated by the confirmation step. This process yields about 70k multi-turn grounding trajectories with reflective thinking traces for SFT. The 20k manually filtered high-quality grounding samples also serve as the training data for RL training.

Refusal Data Construction. To enable the model to handle inapplicable instructions where the referred element does not exist in the image, we further construct refusal data from public datasets. Inspired by CutPaste (Li et al. 2021), we adopt a similar synthesis strategy that takes the grounding samples in OS-Atlas (Wu et al. 2025b) as the source data to automatically create refusal samples. Specifically, for each source sample, we randomly select one of the four sides surrounding the ground-truth bounding box. We then crop a patch of the same size from that side and paste it onto the original bounding-box region. In this way, the target element referred to by the instruction is overwritten and no longer exists in the image, turning the sample into a valid refusal case. To minimize synthesis artifacts, we further apply feathering to the patch boundaries, producing a smooth transition between the pasted patch and its surroundings. This suppresses visible seams from the manual compositing. Finally, we use Gemini3.1-Pro (Google 2026) to generate multi-turn trajectories for these refusal samples following the same closed-loop grounding protocol. We retain only those whose final `confirm` step correctly verifies that the target element does not exist. The resulting refusal samples and trajectories are mixed into the training data described above.

Training. We implement LookAgain on the Qwen3-VL-8B-Instruct and Qwen3-VL-32B-Instruct (Bai et al. 2025). For supervised fine-tuning, we use about 70k multi-turn grounding trajectories, among which about 600 are refusal trajectories. We train the model for 1 epoch. The training batch size and learning rate are set to 256 and 5×10^{-6} , respectively. For reinforcement learning, we adopt the GRPO (Guo et al. 2025) algorithm and use about 20k training samples, including about 300 refusal samples. We train the model for 3 epochs in this stage, and set the maximum number of interaction rounds to 6 for both RL training and evaluation. The reward coefficients are set to $\alpha = 0.1$ and $\beta = 0.9$. The batch size, learning rate, rollout, and KL loss coefficient are set to 256, 2×10^{-6} , 8, and 1×10^{-3} , respectively. The system prompt and tool definitions used by LookAgain are shown in Fig. 8 and Fig. 9, respectively.

Model	Standard	Refusal	Overall
$\leq 8B$			
GTA1-7B (Yang et al. 2025a)	74.9	0.0	67.7
UI-TARS-1.5-7B (Qin et al. 2025)	71.0	0.0	64.2
UI-Venus-7B (Gu et al. 2025)	65.0	-	58.8
Qwen3-VL-8B* (Bai et al. 2025)	70.1	-	63.4
LookAgain-8B	83.5	57.4	81.0
$\geq 30B$			
GTA1-32B (Yang et al. 2025a)	79.8	0.0	72.2
OpenCUA-32B (Wang et al. 2026b)	76.8	7.4	70.2
UI-Venus-72B (Gu et al. 2025)	77.9	-	70.4
Qwen3-VL-32B* (Bai et al. 2025)	79.9	-	72.3
LookAgain-32B	86.3	50.0	82.8

Table 6: **Results of LookAgain on OSWorld-G-Refine.** *Standard* denotes the subset consisting of all non-refusal samples. * denotes the results evaluated by ourself.

We use 16 and 32 H100-80G GPU for training LookAgain 8B and 32B, respectively. All evaluations are repeated three times to ensure negligible fluctuation in results.

More Experiments

Results on OSWorld-G-Refine. We further include the results on OSWorld-G-Refine (Xie et al. 2026) in Table 6. Similar to the observations on OSWorld-G (Xie et al. 2026), LookAgain achieves strong performance on both the standard and refusal subsets, showing its effectiveness in both regular grounding scenarios and refusal-aware evaluation settings.

Relationship between target size and prediction behavior. To further validate the relationship between the average number of predicted bounding boxes and the target size, we additionally plot the distribution of the number of bbox predictions under different benchmarks. As shown in Figure 5, a consistent trend across benchmarks can be observed. When the target area ratio becomes smaller, the model tends to produce more predictions to supplement missing details and further refine the localization results. This observation is aligned with the main discussion in the paper, and further supports that smaller target sizes encourage a more refinement-oriented prediction behavior.

Training dynamics. We further analyze the training dynamics of the proposed LookAgain. As shown in Figure 6, as training proceeds, the validation accuracy and the average number of predicted bounding boxes increase simultaneously. This suggests that the model gradually learns to improve grounding through multiple rounds of reflection. Notably, the increase in prediction count is accompanied by better validation performance, indicating that the model is not merely generating more boxes, but producing more effective refinements. We also observe that the predicted bounding box count tends to stabilize and even slightly decrease in the later stage of training, while the validation accuracy continues to improve. This trend suggests that the model gradually shifts from producing more candidate refinements to making more efficient and precise refinement decisions.

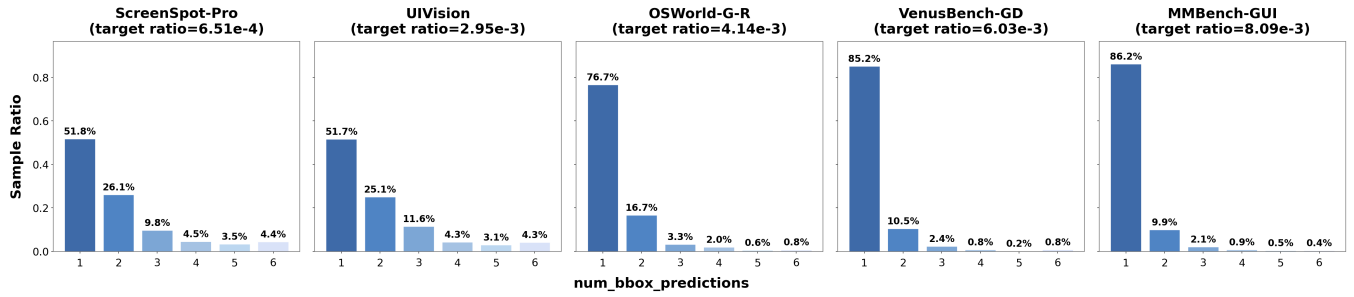


Figure 5: **Distribution of the number of predicted bounding boxes across different benchmarks.** Each subplot shows the distribution of bounding box prediction counts on one benchmark, with the corresponding target area ratio reported in the title. Consistent with the main discussion in the paper, smaller target area ratios are associated with a larger number of predicted boxes, suggesting that the model tends to produce more predictions to supplement missing details and further refine the localization results.

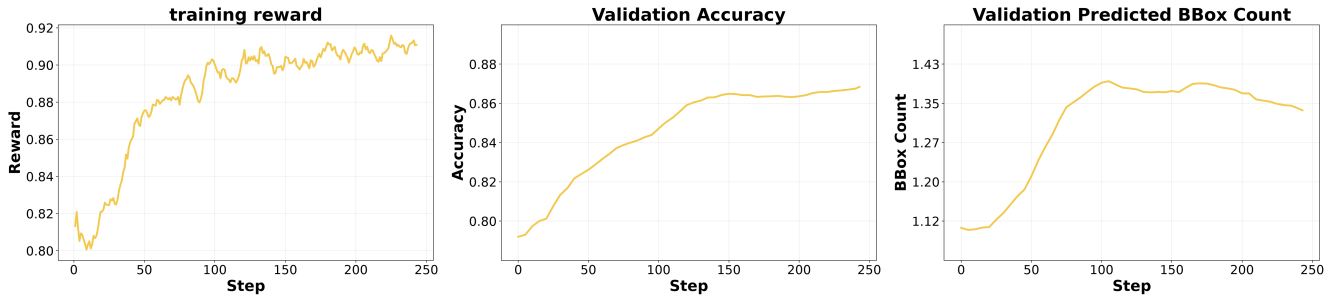


Figure 6: **Training dynamics of LookAgain.** From left to right, the three plots present the training reward, the validation accuracy, and the average number of predicted bounding boxes on the validation set, respectively. The synchronized increase in validation accuracy and predicted bounding box count suggests that, as training progresses, the model gradually learns to improve grounding by producing more effective refinements through multiple rounds of reflection.

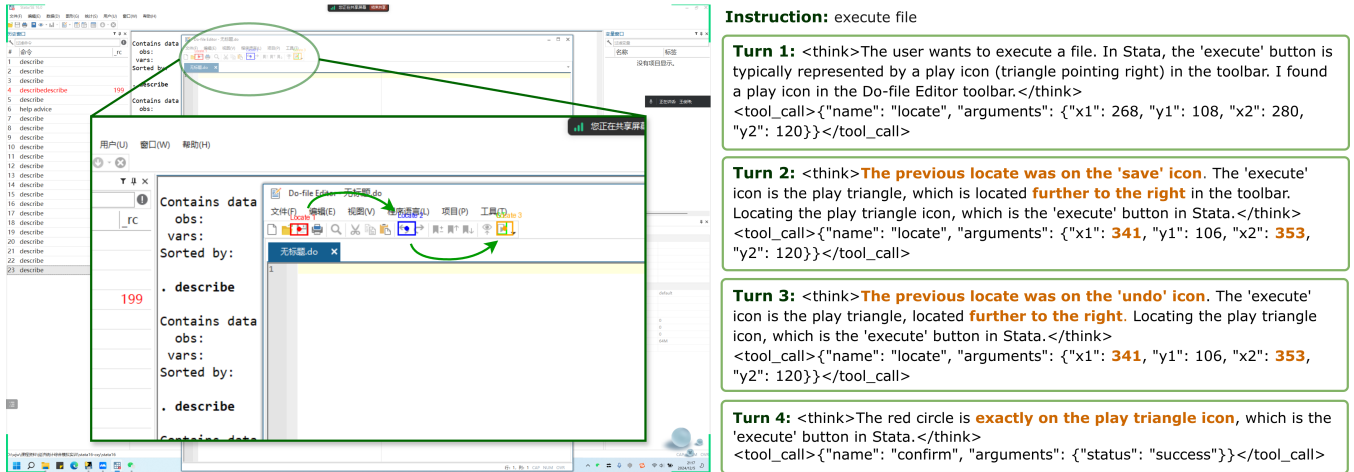


Figure 7: **A qualitative example illustrating the reflection and refinement capability of LookAgain.** The case shows that LookAgain progressively revises its previous predictions by identifying incorrect toolbar icons and refining the grounding result over multiple turns. This example demonstrates that LookAgain can improve GUI grounding through explicit reflection and iterative refinement.

Comparison with Related Methods

We further compare LookAgain with several recent approaches that also challenge the reliability of single-shot co-

ordinate prediction. Although these methods share the same high-level motivation that GUI grounding can benefit from

System Prompt

Role

- An agent with strong computer knowledge, designed to locate GUI elements on desktop computer given a screenshot and an instruction.
- The user provides tools to help you locate the GUI elements. You are allowed to make one tool call each turn before getting any tool response.
- You need to output the coordinate in relative coordinate [0,1000].
- Your goal is to make the center of bounding box falls on the target element. As a bonus, you should try your best to make the bounding box cover all interactive area of the target element.

Important Notes

- You should first use `locate` tool to get bounding box coordinates for the element. The bounding box area will be used to perform mouse action such as clicking, dragging, so it is important to make sure the coordinate is accurate and the bounding box should cover all area that is interactive.
- After `locate` tool is called, you will get an image patch around the bounding box, and you will have a red circle with a marker in its center to indicate where the coordinate is. Then, you will need to use `confirm` tool to check if the location is correct enough.
- If you use `confirm` with status “success”, the procedure ends and downstream system gets the coordinates.
- It’s possible for the user to come up with some instruction that is not applicable (no answer) in this screenshot, you should use `confirm` tool with status `failed` and write the reason in `feedback` field.
- If the instruction is applicable and the current location is not correct enough, continue to call `locate` with a better bounding box.

Figure 8: System prompt used by LookAgain.

Method	OSG	OSG-R	UIV
Propose-then-Critic-8B (Wang et al. 2026a)	59.6	-	28.5
Qwen3-VL-8B w/ MVP (Zhang et al. 2026)	-	72.7	31.9
LookAgain-8B	73.0	81.0	38.8

Table 7: Comparison with related multi-prediction methods. OSG, OSG-R, and UIV denote OSWorld-G, OSWorld-G-Refine, and UI-Vision, respectively.

additional visual evidence beyond one raw prediction, they realize this motivation in different forms. We show that LookAgain provides a more effective closed-loop mechanism for using such evidence through both quantitative comparison and qualitative analysis.

Comparison with MVP. MVP (Zhang et al. 2026) introduces a multi-view proposal strategy for GUI grounding. It constructs multiple views of the same interface and performs grounding independently on each view. The resulting coordinates are then aggregated through clustering to produce the final prediction. This design improves grounding robustness by collecting diverse coordinate hypotheses. However, the role of these multiple predictions is mainly to provide statistical consensus. Since each hypothesis is produced independently, the model does not explicitly inspect a previous prediction, identify why it may be wrong, or refine it based on visual feedback. In this sense, MVP provides multiple proposals but does not establish a reflect-and-refine loop. In

contrast, LookAgain turns each prediction into a visible hypothesis and uses the corresponding local evidence to decide whether to confirm or revise it. This makes the correction process prediction-conditioned rather than merely proposal-aggregated. As shown in Table 7, LookAgain-8B outperforms MVP across both benchmarks, suggesting that grounding reflection in the model’s own previous action is more effective than aggregating independently generated proposals.

Comparison with Propose-then-Critic. Propose-then-Critic (Wang et al. 2026a) further introduces a critic into the grounding process. It first generates a set of candidate predictions. These candidates are then rendered with visual identifiers, and a critic selects the most plausible one as the final answer. Compared with MVP, it introduces a more explicit judgment step and can be viewed as an initial form of reflection. Nevertheless, the critic mainly performs discrimination among pre-defined candidates. Its final answer is still bounded by the coverage and quality of the candidate set produced in the first stage. LookAgain instead formulates GUI grounding as an iterative closed-loop process. Rather than selecting from fixed candidates, it marks its previous prediction on the screen and observes the corresponding local context. When the marked location is inconsistent with the instruction, LookAgain can make a new prediction based on this visual feedback. This enables LookAgain to actively revise its own prediction trajectory rather than only judge a pre-defined candidate set. As shown in Table 7, LookAgain-8B outperforms Propose-then-Critic-8B on both benchmarks,

Tools Definition

Tool 1

- type: function
- function.name: locate
- function.description: locate the element by bounding box
- function.parameters.type: object
- function.parameters.properties:
 - x1: integer; bounding box's top left corner x coordinate of the element. Should between 0-1000
 - y1: integer; bounding box's top left corner y coordinate of the element. Should between 0-1000
 - x2: integer; bounding box's bottom right corner x coordinate of the element. Should between 0-1000
 - y2: integer; bounding box's bottom right corner y coordinate of the element. Should between 0-1000
- function.parameters.required: [x1, y1, x2, y2]

Tool 2

- type: function
- function.name: confirm
- function.description: Confirm the location of the element or confirm that the instruction is not applicable
- function.parameters.type: object
- function.parameters.properties:
 - status: string; enum = [success, failed]; Status of the confirmation. Should be one of 'success', 'failed'
 - feedback: string; Feedback of the confirmation. Should have this field when status=failed
- function.parameters.required: [status]

Figure 9: Tools definition used by the grounding agent.

indicating that a critic-style selection step is less effective than iterative, visually grounded revision.

Qualitative Results

Case Study We provide a qualitative example in Figure 7 to illustrate the reflection and refinement capability of Look-Again. In this case, the model is asked to execute a file in the Stata interface. Instead of identifying the correct target in a single step, LookAgain progressively revises its prediction by recognizing that the previously selected locations correspond to incorrect toolbar icons, such as the save or undo button, and then shifts its attention to the correct play icon. This example shows that LookAgain can explicitly reflect on its previous predictions and refine the grounding result through iterative correction, leading to a more accurate final decision.

Reflection Trajectory Comparison. To complement the quantitative comparison of direct closed-loop grounding in the paper, we provide reflection traces in Fig. 10, where four grounders are given the same grounding sample. We visualize their turn-by-turn trajectories on the corresponding annotated screenshots. As shown in Fig. 10(a), Qwen3-VL-8B-Instruct (Bai et al. 2025) issues a single LOCATE that lands on the adjacent list-view button and then immediately emits CONFIRM(success) without any intervening reason-

ing. Since no <think> block is produced, the model never inspects the marker-annotated patch returned for its own hypothesis, and the initial error is committed as the final prediction. This exactly matches the failure mode analyzed in paper. It is in the absence of explicit reflection, the closed loop degenerates into a one-shot prediction, which is why directly transferring the strategy to Qwen3-VL-8B-Instruct fails to bring gains.

In contrast, as shown in Fig. 10(b), Gemini3.1-Pro (Google 2026) exhibits the intended reflection behavior. Its first LOCATE also falls on the list-view button, but in Turn 2 it explicitly recognizes the mistake and reasons about the correct spatial relation, shifting the coordinate onto the icon-view target before confirming in Turn 3. The Turn-1 hypothesis is treated as an addressable spatial prior to be refined rather than a frozen output, which is precisely the mechanism behind its substantial improvement.

However, as shown in Fig. 10(c), directly training Qwen3-VL-8B-Instruct with GUI-Cursor (Zhao et al. 2025) style method elicits only superficial reflection. The model emits a <think> block, yet its Turn-2 reasoning hallucinates success, and it confirms without performing any actual refinement. This corroborates our observation that the reflect-and-refine pattern cannot be reliably induced by direct reinforcement learning alone, and explains the limited gain of the GUI-Cursor variant.

Instruction: Click the playlist format button (which is formatted as for small blocks inside one bigger block) in the top-right corner of the "Select one or more files to open" window.


(a) Reflection Trajectory of Qwen3-VL-8B

Turn 1

{bbox: [737, 197, 757, 226]}

Turn 2

{status: success}

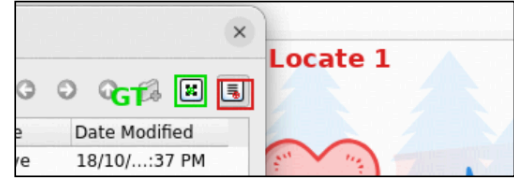

(b) Reflection Trajectory of Gemini3.1-Pro

Turn 1


<think>The user wants to click the button formatted as four small blocks (icon view) in the top-right corner of the file selection dialog. I'm estimating the location based on the layout of a standard file dialog.</think>{bbox: [735, 195, 755, 215]}

Turn 2

<think>The previous location was the list view button. The four small blocks button is to the left of it, so I am adjusting the x coordinate to the left.</think>{bbox: [713, 194, 733, 215]}

Turn 3

<think>The bounding box now correctly highlights the icon view button (formatted as four small blocks), which corresponds to the "playlist format" instruction in the top right of the file dialog.</think>{confirm: success}

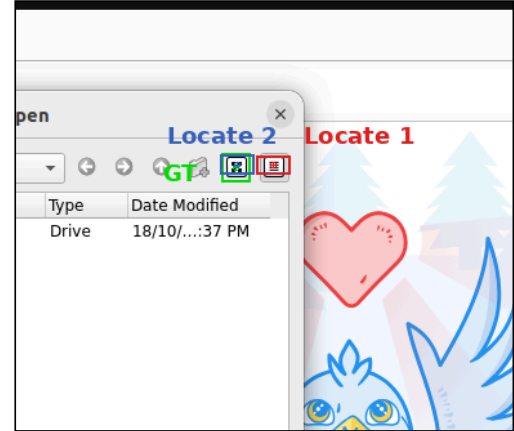


(c) Reflection Trajectory of Qwen3-VL-8B w/ GUI-Cursor

Turn 1

<think>The target element is a button in the top-right corner of the "Select one or more files to open" window, which is formatted as four small blocks inside one bigger block. The cursor is currently at the center of the image, which is far from the target button. I need to move the cursor to the top-right corner of the window to locate the button.</think>{point: [744, 207]}

Turn 2

<think>The target element is a button in the top-right corner of the "Select one or more files to open" window, which is formatted as four small blocks inside one bigger block. The cursor is now positioned at the top-right corner of the window, directly on the button that matches the description. The hotspot is correctly placed on the target.</think>{status: success}

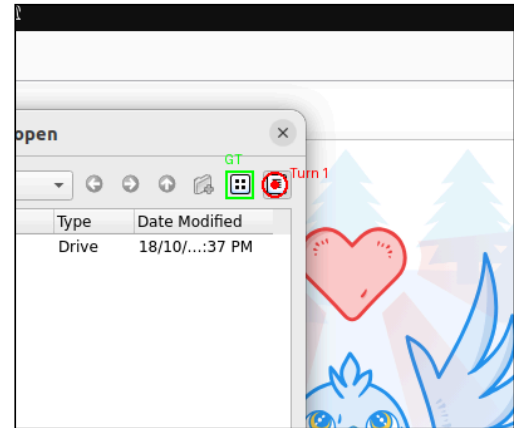

(d) Reflection Trajectory of LookAgain-8B

Turn 1

<think>The user wants to click the playlist format button in the top-right corner of the "Select one or more files to open" window. This button is represented by an icon with small blocks inside a larger block. I found this icon at the specified location.</think>{bbox: [738, 194, 758, 215]}

Turn 2

<think>The previous location was on the list format button. The playlist format button is the one with small blocks inside a bigger block, which is the one to the left of the list format button. I will adjust the coordinates.</think>{bbox: [714, 194, 734, 215]}

Turn 3

<think>The red circle is centered on the playlist format button, which has small blocks inside a bigger block. This matches the user's instruction.</think>{status: success}

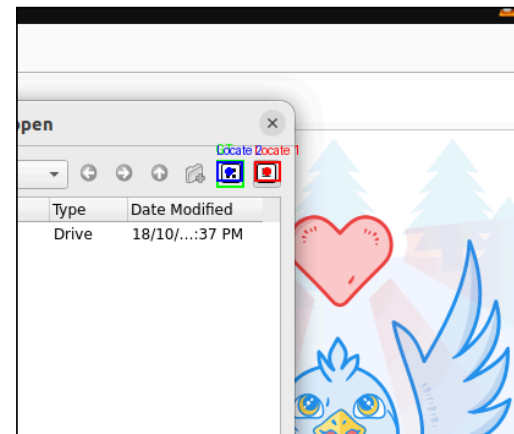


Figure 10: **Reflection trajectory comparison of four grounders.** Turn-by-turn trajectories of (a) Qwen3-VL-8B-Instruct, (b) Gemini3.1-Pro w/ closed-loop protocol, (c) the GUI-Cursor variant, and (d) LookAgain-8B, showing that only Gemini3.1-Pro and LookAgain-8B perform genuine reflect-and-refine, whereas the others commit an unreflective or hallucinated prediction.

Finally, as shown in Fig. 10(d), LookAgain-8B reproduces the reflective pattern of the much stronger Gemini3.1-Pro within an 8B backbone. Its first `LOCATE` lands on the list-view button, Turn 2 correctly diagnoses the error and moves the coordinate left, and Turn 3 verifies that the red ring is centered on the four-block icon before issuing `CONFIRM`. This side-by-side comparison demonstrates that our two-stage pipeline instills genuine, visually grounded reflection—rather than the mimicry seen in Fig. 10(c), thereby accounting for the significant improvement reported.

Broader Impact and Potential Risk

Our approach employs readily available LLMs, which means it inherently shares some of their limitations. This includes the potential for hallucinating ungrounded text or producing biased results. We recommend conducting a thorough investigation into its safety and fairness for the intended use before applying it in practice.