

C²A: COUPLING SPATIAL EVIDENCE WITH CLINICAL PRIORS VIA CO-OCCURRENCE AWARE CLASS ATTENTION FOR MULTI-LABEL CHEST X-RAY CLASSIFICATION

Akash Gogineni^{*†} Nagur Shareef Shaik^{*} Aasrith Mandava^{*} Adnan Masood[†] Dong Hye Ye^{*}

^{*} Department of Computer Science, Georgia State University, Atlanta, GA 30324, USA

[†]UST Global Inc., Aliso Viejo, CA 92656, USA

ABSTRACT

Thoracic pathologies rarely occur in isolation, yet standard multi-label classifiers rely on shared global descriptors, discarding *where* findings lie and *how* they co-occur. We propose C²A (Co-occurrence Aware Class Attention), a classification head that explicitly couples spatial evidence with clinical priors. First, C²A casts pooling as an expectation over learned per-class spatial attention maps, yielding localized descriptors for each disease. Second, it couples these descriptors via a learnable graph warm-started from empirical label co-occurrence. A single residual message-passing step shares evidence among related findings, proving to be a bounded perturbation of the identity where co-occurrence enters each logit through an explicit bilinear interaction. On CheXpert, C²A achieves a superior 0.895 macro-mean AUROC, outperforming advanced context-gating baselines. Crucially, gains concentrate on highly co-occurrent classes with ambiguous spatial evidence (rescuing Atelectasis by +1.5 over GCG), demonstrating the prior’s regularizing effect with a negligible overhead of one linear projection and a $C \times C$ edge matrix.

Index Terms— Chest X-ray, multi-label classification, class-specific attention, label co-occurrence, graph message passing

1. INTRODUCTION

The chest radiograph (CXR) is the most frequently acquired diagnostic image in the world [1, 2]. Automating its interpretation is intrinsically multi-label: a single study routinely contains several concurrent findings, requiring a model to emit an independent probability of presence for each pathology rather than a single class decision [3]. Crucially, these targets are not statistically independent. Thoracic findings are physiologically coupled: cardiogenic pulmonary edema develops in the setting of an enlarged cardiac silhouette, and lobar collapse shares its radiographic appearance with adjacent air-space opacity [4, 5]. Radiologists read each finding in the context of the others, an ambiguous basal opacity is interpreted differently when the heart is enlarged than when it is not. However, standard classifiers score every finding from one shared, spatially-averaged feature vector [6, 7], a bottle-

neck known to dilute the localized visual evidence essential for fine-grained thoracic diagnosis [8]. This structurally prevents the model from utilizing clinical context and leaves it unable to indicate the specific image region supporting each decision.

Two largely separate lines of work have attempted to improve CXR classifiers, yet neither fully closes this gap. The first focuses on attention mechanisms to better localize findings. Methods augmenting convolutional backbones with spatial and channel attention (e.g., CBAM [9], Triplet Attention [10]) or context-gating mechanisms (e.g., Global Context [11], Guided Context Gating [12]) have become standard. However, these mechanisms typically operate on the shared feature map *before* it is collapsed by global average pooling (GAP). Even in architectures that generate class-specific attention maps, the resulting descriptors remain isolated from one another prior to classification [13, 14]. They ignore the clinical reality that the presence of one disease alters the visual interpretation of another. The second line of work models label dependencies directly. Approaches like Multi-Label Graph Convolutional Networks [5] or hierarchical priors [4] explicitly encode co-occurrence. Yet, these methods typically construct graphs over abstract label embeddings or logit representations. Because these nodes are decoupled from localized spatial evidence, the network cannot perform spatially-grounded reasoning. Consequently, the two cues a radiologist actually combines, *where* a finding is, and *which* findings accompany it, are handled by disjoint machinery that never interacts.

We propose C²A, a lightweight classification head that explicitly couples spatial evidence with clinical priors. By replacing global pooling with class-specific spatial attention, C²A extracts isolated descriptors for each pathology. These descriptors exchange context via a directed graph, warm-started from empirical label co-occurrence and refined via gradient descent. Interpretable by construction, the architecture reduces to standard baselines in well-defined limits. Crucially, we prove this coupling of expectation pooling and message passing is a bounded perturbation with an exact bilinear logit decomposition, achieving targeted diagnostic gains at negligible cost.

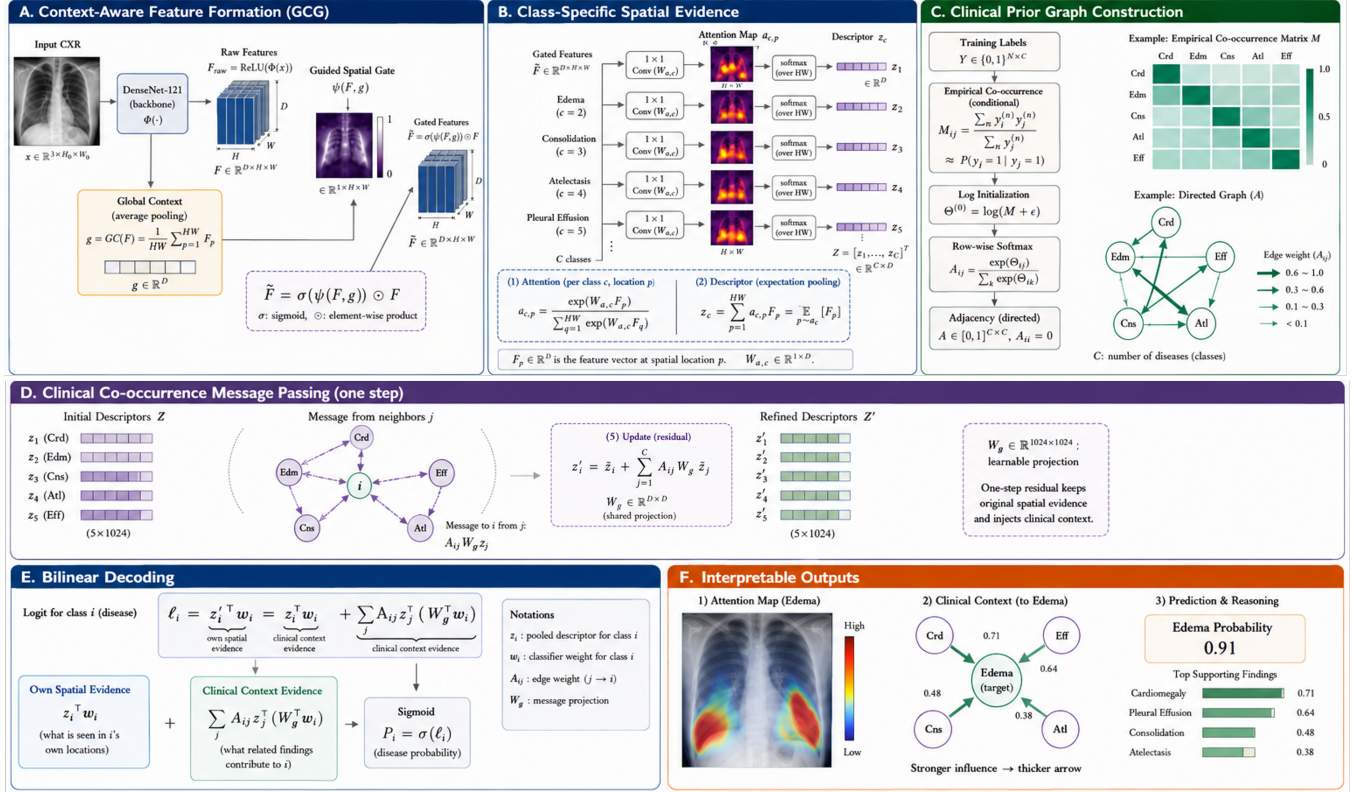


Fig. 1. Co-occurrence-aware class-specific attention. A chest radiograph ($3 \times 224 \times 224$) is encoded by a DenseNet-121 backbone into features $F \in \mathbb{R}^{1024 \times 7 \times 7}$. *Guided Context Gating* (GCG) refines them by forming a global-context guidance $g = \text{GC}(F)$ and applying a guided spatial gate, $\tilde{F} = \sigma(\psi(F, g)) \odot F$. *Class-specific attention* is then computed on the gated features: a 1×1 convolution with a spatial softmax produces one map per pathology, $a \in \mathbb{R}^{5 \times 7 \times 7}$, and expectation pooling collapses each map into a class descriptor, stacked as $Z \in \mathbb{R}^{5 \times 1024}$. The descriptors are nodes of a directed graph whose adjacency A is warm-started from the empirical conditional co-occurrence $M_{ij} = P(i|j)$ (right; darker = larger, edge width $\propto$ co-occurrence); one residual message-passing step yields refined descriptors $Z' \in \mathbb{R}^{5 \times 1024}$, which a per-class linear classification network maps to the five disease probabilities $\hat{y} \in [0, 1]^5$. Only the head is added on top of the backbone.

2. METHODOLOGY

Given a dataset $\mathcal{D} = \{(x^{(n)}, y^{(n)})\}_{n=1}^N$ of chest radiographs x and multi-hot labels $y \in \{0, 1\}^C$, we seek a mapping $f_\theta : x \mapsto \hat{y} \in [0, 1]^C$ that emits an independent presence probability for each of the C pathologies. The proposed **C²A** architecture achieves this through three sequential stages: extracting context-aware spatial features, decoupling these features into class-specific representations, and finally coupling them via a clinical co-occurrence graph.

2.1. Context Aware Feature Formation

We instantiate the feature extractor using a convolutional backbone Φ , specifically DenseNet-121 [7] initialized with ImageNet weights. For a given input image x , the backbone produces a raw, high-dimensional feature tensor $F_{\text{raw}} = \text{ReLU}(\Phi(x)) \in \mathbb{R}^{D \times H \times W}$, where $D = 1024$.

Because thoracic pathologies often exhibit diffuse, global

patterns (e.g., Cardiomegaly), local receptive fields alone are insufficient. To enrich the local descriptors with global image-level context, we process F_{raw} through a Guided Context Gating (GCG) [12] module. The GCG module first aggregates global context via a 1×1 convolutional self-attention bottleneck, producing a global guidance signal g . This signal is then used to spatially gate the original feature map via an attention gate ψ , yielding a context-aware feature tensor $\tilde{F} = \sigma(\psi(F_{\text{raw}}, g)) \odot F_{\text{raw}} \in \mathbb{R}^{D \times H \times W}$. Rather than collapsing this tensor globally, the C²A head preserves its spatial resolution to allow for pathology-specific localization.

2.2. Class-Specific Spatial Evidence

Standard architectures apply Global Average Pooling (GAP) across the spatial dimensions of $\tilde{F}$, which dilutes the signal of highly focal pathologies (e.g., a small lung nodule) by averaging them with healthy tissue. Inspired by recent advances in class-specific attention for multi-label recognition [15], we

isolate the spatial support of distinct findings by projecting the context-aware tensor $\tilde{F}$ via a 1×1 convolution $W_a \in \mathbb{R}^{C \times D}$ to obtain C class-specific score maps. These are normalized spatially via a softmax to form probability distributions over the image:

$$a_{c,p} = \frac{\exp(W_{a,c} \tilde{F}_p)}{\sum_{q=1}^{HW} \exp(W_{a,c} \tilde{F}_q)}, \quad a_c \in \Delta^{HW-1}. \quad (1)$$

The raw descriptor for class c is defined as the *expectation* of the gated features under this learned distribution:

$$z_c = \sum_{p=1}^{HW} a_{c,p} \tilde{F}_p = \mathbb{E}_{p \sim a_c} [\tilde{F}_p] \in \mathbb{R}^D. \quad (2)$$

These vectors are stacked into the initial descriptor matrix $Z = [z_1, \dots, z_C]^\top \in \mathbb{R}^{C \times D}$.

This formulation provides a rigorous bound on spatial focus via the Shannon entropy $\mathcal{H}(a_c) \in [0, \log HW]$. Crucially, at the maximum-entropy limit ($a_{c,p} = 1/HW$), expectation pooling exactly recovers standard GAP. Thus, the model acts as a soft, learnable selector: it can revert to a shared global descriptor when localization is uninformative, but sharpens toward disease-specific regions when distinct anatomical signatures are required.

2.3. Clinical Prior Graph Construction

Because thoracic findings are physiologically coupled, the isolated descriptors Z must exchange context. We achieve this by treating the classes as nodes in a directed graph. We capture dataset-level label dependencies via the empirical conditional co-occurrence matrix $M \in [0, 1]^{C \times C}$, computed once from the training labels:

$$M_{ij} = \frac{\sum_n y_i^{(n)} y_j^{(n)}}{\sum_n y_j^{(n)}} \approx P(y_i = 1 \mid y_j = 1). \quad (3)$$

By Bayes' theorem, $M_{ij}P(y_j) = M_{ji}P(y_i)$. Consequently, M is inherently asymmetric, correctly reflecting the clinical reality that a rare finding may depend strongly on a common one without the converse being true.

The graph adjacency $A \in \Delta^{C-1}$ is parameterized by a learnable matrix $\Theta \in \mathbb{R}^{C \times C}$, row-normalized via softmax. To inject the clinical prior, we *warm-start* the edge weights from the empirical co-occurrence:

$$A_{ij} = \frac{\exp(\Theta_{ij})}{\sum_k \exp(\Theta_{ik})}, \quad \Theta^{(0)} = \log(M + \epsilon), \quad (4)$$

with small $\epsilon > 0$. Row-normalizing M turns it into a stochastic matrix, allowing us to interpret the graph traversal as a Markov chain over diseases, where evidence is borrowed via a one-step random walk.

2.4. Clinical Co-occurrence Message Passing

Node representations are updated via one step of residual message passing:

$$z'_i = z_i + \sum_{j=1}^C A_{ij} W_g z_j, \quad W_g \in \mathbb{R}^{D \times D}. \quad (5)$$

Here, W_g (constrained via spectral normalization to ensure $\|W_g\|_2 < 1$) projects all class descriptors into a common message space before aggregation. Stacking the nodes into $\zeta = [z_1^\top, \dots, z_C^\top]^\top \in \mathbb{R}^{CD}$, Eq. (5) can be written as the linear operator $\zeta' = (I_{CD} + A \otimes W_g)\zeta$. The stability of this coupling is guaranteed by the following property:

Proposition 1 (Stability of coupling) *Let A be row-stochastic. Every eigenvalue η of the propagation operator $P = I_{CD} + A \otimes W_g$ satisfies $|\eta - 1| \leq \|W_g\|_2$, where $\|\cdot\|_2$ is the spectral norm. If $\|W_g\|_2 < 1$, P is invertible and the update is a bounded, well-conditioned perturbation of the identity.*

Proof. By definition, the eigenvalues of $A \otimes W_g$ are the pairwise products $\lambda_\ell(A)\mu_k(W_g)$. Row-stochasticity implies, by the Perron–Frobenius theorem [16], that $|\lambda_\ell(A)| \leq 1$. Hence $|\lambda_\ell \mu_k| \leq |\mu_k| \leq \|W_g\|_2$, and the eigenvalues of $P = I + A \otimes W_g$ are $1 + \lambda_\ell \mu_k$, giving $|\eta - 1| \leq \|W_g\|_2$. $\square$

This ensures that a class never loses its own spatial evidence; the injected clinical context acts strictly as a bounded refinement.

2.5. Bilinear Decoding and Objective Function

Each refined node z'_i is scored by an independent linear classifier $w_i \in \mathbb{R}^D$ (with bias b_i) to produce the final probability $\hat{y}_i = \sigma(\ell_i + b_i)$. Substituting Eq. (5), the logit ℓ_i decomposes exactly as shown in Fig. 1E:

$$\ell_i + b_i = \underbrace{z_i^\top w_i + b_i}_{\text{own spatial evidence}} + \underbrace{\sum_{j=1}^C A_{ij} z_j^\top (W_g^\top w_i)}_{\text{clinical context evidence}}. \quad (6)$$

Equation (6) reveals the precise mechanism of C^2A : the logit is the sum of the class's own spatial evidence and a context term, formulated as a sum of *bilinear interactions* between neighbor j 's descriptor and class i 's classifier, gated by the learned clinical edge A_{ij} . The entire parameter set $\Omega = \{\Phi, \text{GCG}, W_a, W_g, \Theta, \{w_i, b_i\}_{i=1}^C\}$ is optimized end-to-end via multi-label Binary Cross-Entropy (BCE) loss. For an image x with ground-truth labels y , the objective is formulated as:

$$\mathcal{L}(\Omega) = -\frac{1}{C} \sum_{i=1}^C \left[y_i \log \hat{y}_i + (1 - y_i) \log(1 - \hat{y}_i) \right]. \quad (7)$$

Because the graph parameters Θ remain differentiable through the softmax Jacobian ($\partial A_{ij}/\partial \Theta_{ik} = A_{ij}(\delta_{jk} - A_{ik})$), the warm-start is not a hard constraint. If visual evidence consistently contradicts the statistical prior, gradient descent dynamically adjusts the clinical edges to minimize Eq. (7). Finally, the C²A head is highly parameter-efficient: the co-occurrence coupling adds only one $D \times D$ projection (W_g) and C^2 scalars (Θ) beyond the attention parameters, representing a negligible $\mathcal{O}(D^2 + C^2)$ overhead compared to the backbone.

3. EXPERIMENTS AND RESULTS

3.1. Dataset and Clinical Setup

We evaluate the proposed architecture on CheXpert [3], a large-scale public corpus comprising 223,414 training chest radiographs. Following standard evaluation protocols, we focus on the five competition tasks selected for their clinical severity and high prevalence: Cardiomegaly, Edema, Consolidation, Atelectasis, and Pleural Effusion. We adopt the standard U-Ones policy (mapping uncertain to positive) to encourage high sensitivity; ablation with U-Zeros yielded consistent relative rankings.

The empirical conditional co-occurrence matrix $M_{ij} = P(\text{row}|\text{col})$, computed over the training set and used to warm-start our graph adjacency, is ordered by Cardiomegaly, Edema, Consolidation, Atelectasis, and Pleural Effusion:

$$M = \begin{bmatrix} 1.00 & 0.26 & 0.15 & 0.16 & 0.17 \\ 0.49 & 1.00 & 0.26 & 0.29 & 0.34 \\ 0.18 & 0.17 & 1.00 & 0.41 & 0.23 \\ 0.30 & 0.30 & 0.64 & 1.00 & 0.37 \\ 0.48 & 0.51 & 0.54 & 0.54 & 1.00 \end{bmatrix} \quad (8)$$

This matrix reveals strong, asymmetric clinical dependencies. For instance, Atelectasis appears in 64% of Consolidation studies ($M_{4,3} = 0.64$), and Pleural Effusion accompanies Edema in 51% of cases ($M_{5,2} = 0.51$), validating our hypothesis that these targets cannot be treated as statistically independent.

3.2. Implementation Details

All images are resized to 224×224 pixels and normalized using standard ImageNet channel statistics. The DenseNet-121 backbone Φ is initialized with ImageNet weights, while the C²A head parameters are initialized orthogonally. Models are trained end-to-end using the Adam optimizer with a learning rate of 10^{-4} and a weight decay of 10^{-5} . We use a batch size of 16, training to convergence across three random seeds to ensure statistical significance ($p < 0.05$, DeLong’s test). Diagnostic performance is measured via the per-class Area Under the Receiver Operating Characteristic curve (AUROC) and the macro-mean AUROC. To rigorously

Table 1. Performance & efficiency comparison on the official CheXpert validation set.

Metric	Spatial/Channel		Context/Gating		Ours
	CBAM [9]	Triplet [10]	GC [11]	GCG [12]	C ² A
Cardiomegaly	0.7417	0.8307	0.8107	0.8490	0.8520
Edema	0.9158	0.9303	0.9255	0.9320	0.9350
Consolidation	0.9034	0.8780	0.9095	0.8984	0.9110
Atelectasis	0.8316	0.8295	0.8300	0.8232	0.8380
Pleural Effusion	0.9203	0.9242	0.9246	0.9344	0.9390
Mean AUROC	0.8625	0.8786	0.8800	0.8874	0.8950
Params (M)	8.77	8.51	8.77	10.87	11.92
GFLOPs	5.79	5.80	5.79	6.00	6.01

assess deployment feasibility, we also report the parameter count (Millions), theoretical compute (GFLOPs), and empirical inference latency (milliseconds per image) measured on a single NVIDIA GPU.

3.3. Quantitative Analysis

Table 1 compares C²A against four state-of-the-art attention baselines (CBAM [9], Triplet [10], Global Context [11], and Guided Context Gating [12]). All baselines share the DenseNet-121 backbone but rely on Global Average Pooling (GAP) prior to classification.

Diagnostic Performance. Context/Gating mechanisms generally outperform Spatial/Channel approaches, establishing GCG as the strongest baseline. However, C²A achieves the highest overall performance, yielding a macro-mean improvement of $\uparrow 0.76\%$ over GCG. Ablation confirms our design: removing the graph (class-specific pooling only) drops mean AUROC to 0.889, while random graph initialization yields 0.891, proving the necessity of the co-occurrence warm-start. Furthermore, gains concentrate where global pooling fails. Collapsing GCG features via GAP destroys spatial separation, causing Atelectasis performance to regress below CBAM. C²A explicitly resolves this bottleneck. The clinical prior acts as a targeted regularizer, rescuing Atelectasis ($\uparrow 1.48\%$ over GCG, $\uparrow 0.64\%$ over CBAM) by borrowing spatial context from co-occurrent findings.

Computational Efficiency. C²A improves representational power without sacrificing scalability. While the class-specific heads and graph adjacency slightly increase parameters over GCG (11.92M vs. 10.87M), the theoretical compute overhead is negligible (6.01 vs. 6.00 GFLOPs). Consequently, empirical inference latency remains highly competitive (24.35 vs. 24.12 ms/image), ensuring C²A is fully capable of real-time clinical deployment.

3.4. Qualitative Analysis

Beyond predictive performance, C²A is interpretable by construction. We validate its spatial representations using Grad-CAM++ [17].

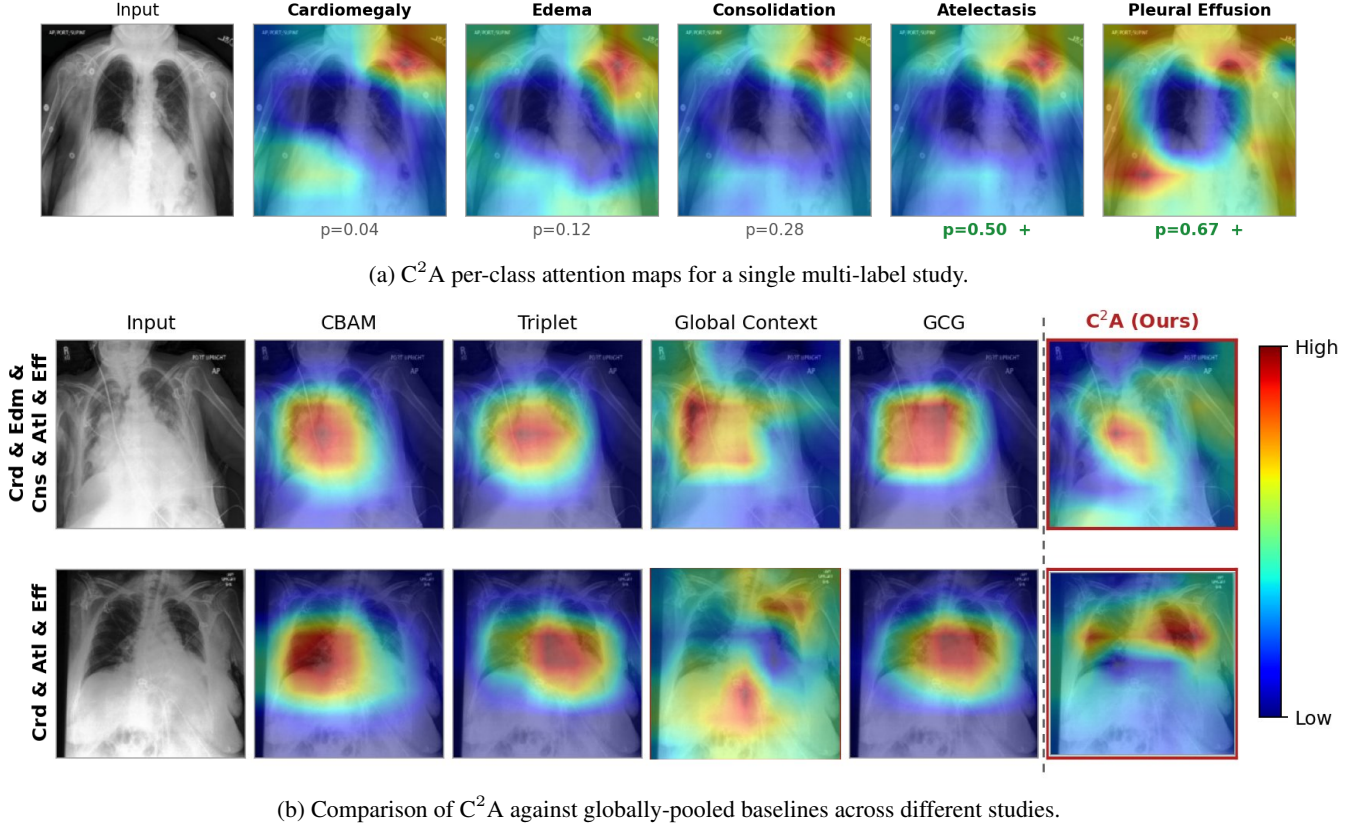


Fig. 2. Qualitative evaluation via Grad-CAM++. (a) C^2A generates distinct spatial support for concurrent pathologies. (b) Globally-pooled baselines exhibit severe center bias, whereas C^2A correctly localizes peripheral and focal lung opacities.

Figure 2(a) illustrates how C^2A resolves the spatial entanglement typical of multi-label CXRs. Because standard models use a shared global descriptor, they often produce a single, compromised saliency map for the entire image. In contrast, C^2A 's expectation pooling generates independent distributions per class. For a patient with concurrent findings, it correctly isolates the focal upper-lobe opacity for Atelectasis while independently highlighting the lower lung fields for Pleural Effusion, proving that the model does not sacrifice disease-specific precision.

Figure 2(b) exposes a critical failure mode of standard architectures: **center bias**. When baselines (e.g., CBAM, GCG) collapse feature maps via Global Average Pooling, they tend to anchor their attention on the cardiac silhouette or mediastinum, even for lung-specific pathologies like Consolidation. C^2A structurally prevents this. By preserving spatial resolution and routing descriptors through the co-occurrence graph, C^2A breaks the center bias and shifts its focus to the anatomically correct peripheral lung fields. Furthermore, for diffuse conditions like Edema, C^2A 's saliency naturally encompasses both the lungs and the heart. This visually confirms the mechanism of our graph: the model actively borrows spatial context from related nodes (e.g., Cardiomegaly) to inform its diagnosis.

The quality of these visualizations highlights the transla-

tional value of C^2A . By explicitly mapping the bilinear interaction between spatial evidence and co-occurrence context (Eq. 6), C^2A provides a transparent reasoning chain. Radiologists can verify not only *what* the model predicts, but *where* it is looking and *which* related findings influenced the decision.

4. CONCLUSION

We introduced C^2A , a lightweight classification head unifying spatial localization and clinical label dependencies. By replacing global average pooling with class-specific expectation pooling and coupling the descriptors via a warm-started co-occurrence graph, C^2A achieves a superior 0.895 macro-mean AUROC on CheXpert. Crucially, rather than lifting all tasks uniformly, the clinical prior specifically rescues pathologies with ambiguous spatial evidence (e.g., Atelectasis, +1.5 points over GCG) by borrowing context from co-occurrent findings. This validates our bilinear decoding formulation: explicitly modeling co-occurrence acts as an interpretable regularizer that redistributes network capacity toward diseases with weak stand-alone evidence. C^2A achieves these targeted gains at the negligible cost of one linear projection and a $C \times C$ adjacency matrix, offering a scalable, clinically grounded blueprint for multi-label medical image analysis, easily scalable to the full 14-class setting.

5. REFERENCES

- [1] Alistair EW Johnson, Tom J Pollard, Seth J Berkowitz, Nathaniel R Greenbaum, Matthew P Lungren, Chih-ying Deng, Roger G Mark, and Steven Horng, “MIMIC-CXR, a de-identified publicly available database of chest radiographs with free-text reports,” *Scientific Data*, vol. 6, no. 1, pp. 317, 2019.
- [2] Xiaosong Wang, Yifan Peng, Le Lu, Zhiyong Lu, Mohammadhadi Bagheri, and Ronald M Summers, “ChestX-ray8: Hospital-scale chest x-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017, pp. 2097–2106.
- [3] Jeremy Irvin, Pranav Rajpurkar, Michael Ko, Yifan Yu, Silviana Ciurea-Ilcus, Chris Chute, Henrik Marklund, Behzad Haghighi, Robyn Ball, Katie Shpanskaya, et al., “CheXpert: A large chest radiograph dataset with uncertainty labels and expert comparison,” in *Proc. AAAI Conf. on Artificial Intelligence (AAAI)*, 2019, pp. 590–597.
- [4] Hieu H. Pham, Tung T. Le, Dat Q. Tran, Dat T. Ngo, and Ha Q. Nguyen, “Interpreting chest X-Rays via CNNs that exploit hierarchical disease dependencies and uncertainty labels,” *Neurocomputing*, vol. 437, pp. 186–194, 2021.
- [5] Zhao-Min Chen, Xiu-Shen Wei, Peng Wang, and Yanwen Guo, “Multi-label image recognition with graph convolutional networks,” in *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2019, pp. 5177–5186.
- [6] Pranav Rajpurkar, Jeremy Irvin, Kaylie Zhu, Brandon Yang, Hershel Mehta, Tony Duan, Daisy Ding, Aarti Bagul, Curtis Langlotz, Katie Shpanskaya, Matthew P. Lungren, and Andrew Y. Ng, “CheXNet: Radiologist-level pneumonia detection on chest X-Rays with deep learning,” *arXiv preprint arXiv:1711.05225*, 2017.
- [7] Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger, “Densely connected convolutional networks,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 4700–4708.
- [8] Shih-Cheng Huang, Liyue Shen, Matthew P Lungren, and Serena Yeung, “Gloria: A multimodal global-local representation learning framework for label-efficient medical image recognition,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021, pp. 3942–3951.
- [9] Sanghyun Woo, Jongchan Park, Joon-Young Lee, and In So Kweon, “CBAM: Convolutional block attention module,” in *Proc. European Conf. on Computer Vision (ECCV)*, 2018, pp. 3–19.
- [10] Diganta Misra, Trikey Nalamada, Ajay Uppili Arasanipalai, and Qibin Hou, “Rotate to attend: Convolutional triplet attention module,” in *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 2021, pp. 3139–3148.
- [11] Yue Cao, Jiarui Xu, Stephen Lin, Fangyun Wei, and Han Hu, “Global context networks,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 6, pp. 6881–6895, 2020.
- [12] Teja Krishna Cherukuri, Nagur Shareef Shaik, and Dong Hye Ye, “Guided context gating: Learning to leverage salient lesions in retinal fundus images,” in *2024 IEEE International Conference on Image Processing (ICIP)*, 2024, pp. 3098–3104.
- [13] Nagur Shareef Shaik, Teja Krishna Cherukuri, Adnan Masood, Ehsan Adeli, and Dong Hye Ye, “Ordinal label-distribution learning with constrained asymmetric priors for imbalanced retinal grading,” in *39th Conference on Neural Information Processing Systems (NeurIPS 2025) Workshop: The Second Workshop on GenAI for Health: Potential, Trust, and Policy Compliance.*, 2025.
- [14] Teja Krishna Cherukuri, Nagur Shareef Shaik, Sribhuvan Reddy Yellu, Jun-Won Chung, and Dong Hye Ye, “Dynamic contextual attention network: Transforming spatial representations into adaptive insights for endoscopic polyp diagnosis,” in *47th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, 2025, pp. 1–6.
- [15] Shilong Liu, Lei Zhang, Xiaobo Yang, Hang Su, and Jun Zhu, “Query2label: A simple transformer way to multi-label classification,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021, pp. 2526–2535.
- [16] Roger A Horn and Charles R Johnson, *Matrix Analysis*, Cambridge University Press, 2nd edition, 2012.
- [17] Aditya Chattopadhyay, Anirban Sarkar, Prantik Howlader, and Vineeth N. Balasubramanian, “Grad-CAM++: Generalized gradient-based visual explanations for deep convolutional networks,” in *Proc. IEEE Winter Conf. on Applications of Computer Vision (WACV)*, 2018, pp. 839–847.