

From Diagnosis to Correction: Benchmarking and Improving Real-World Table Parsing

Jutao Xiao^{1,2*}, Yuan Qu^{2*}, Dongsheng Ma^{3*}, Fan Wu², Tianyao He², Weihong Li², Jie Yang², Yu Qiao² ✉, Bin Wang² ✉, Conghui He² ✉

¹Zhejiang University, ²Shanghai Artificial Intelligence Laboratory, ³Peking University
xiaojutao@zju.edu.cn, heconghui@pjlab.org.cn

Recent document parsers achieve table TEDS scores above 93 on OmniDocBench v1.6, yet community feedback and our audit reveal persistent failures on complex real-world tables. To quantify this gap, we introduce **TableParseMap**, a diagnostic benchmark of 916 real-world tables organized into five challenging scenarios and nine failure types. The strongest evaluated parser achieves only 85.03 TEDS, showing that aggregate benchmark scores conceal substantial weaknesses. Our analysis attributes these failures to three complementary limitations: large tables exceed the reliable processing scale of a single pass, weak or ambiguous visual cues hinder structure perception, and the reconstructed table may remain visually inconsistent with the image. We therefore propose **DEC** (Decompose–Enhance–Correct), a visual-consistency-guided agentic framework that improves frozen table parsers without retraining. DEC uses a general VLM as the controller: Decompose partitions large tables along structure-aware boundaries, Enhance exposes weak visual evidence and reparses transformed views, and Correct diagnoses and repairs residual errors. A Visual Consistency Gate (VC-Gate) selectively triggers intervention, while a Visual Consistency Ranker (VC-Ranker) verifies candidate updates and supports rollback without ground-truth HTML at inference time. We further derive a 1,977-table Consensus-Hard Set from 4,556 candidates through offline metrics and cross-model consensus. Across three frozen parsers, DEC improves TEDS by 1.57 points on average; on TableParseMap, gains reach 1.89 points overall, 2.62 on structural errors, and 5.66 on large tables.

* Equal contribution ✉ Corresponding author

1 Introduction

Recent document parsing models have achieved steadily improving performance on public benchmarks. On OmniDocBench v1.6, PaddleOCR-VL-1.6 and MinerU2.5-Pro obtain overall scores of 96.34 and 95.75, respectively, with table TEDS scores of 94.76 and 93.42 [1, 2, 3]. However, these strong benchmark results do not fully match users’ experience in real-world deployments. We collect table-recognition-related issues from the MinerU community and find frequent reports of large tables, borderless layouts, missing content, duplicated outputs, row–column misalignment, and incorrect merged cells.

To quantify and explain this gap, we construct TableParseMap, a fine-grained diagnostic benchmark containing 916 complex table images from real-world applications. We systematically review the outputs of MinerU2.5-Pro, PaddleOCR-VL-1.6, GLM-OCR [4], and Qwen3.5-397B-A17B [5], and organize recurring problems into five challenging scenarios and nine failure types. The five scenarios characterize where parsers are likely to struggle, while the nine failure types describe how they fail through recurring structural and textual errors such as omission, misalignment, duplicated output, and incorrect merged cells. TableParseMap thus exposes model behaviors hidden by aggregate scores from

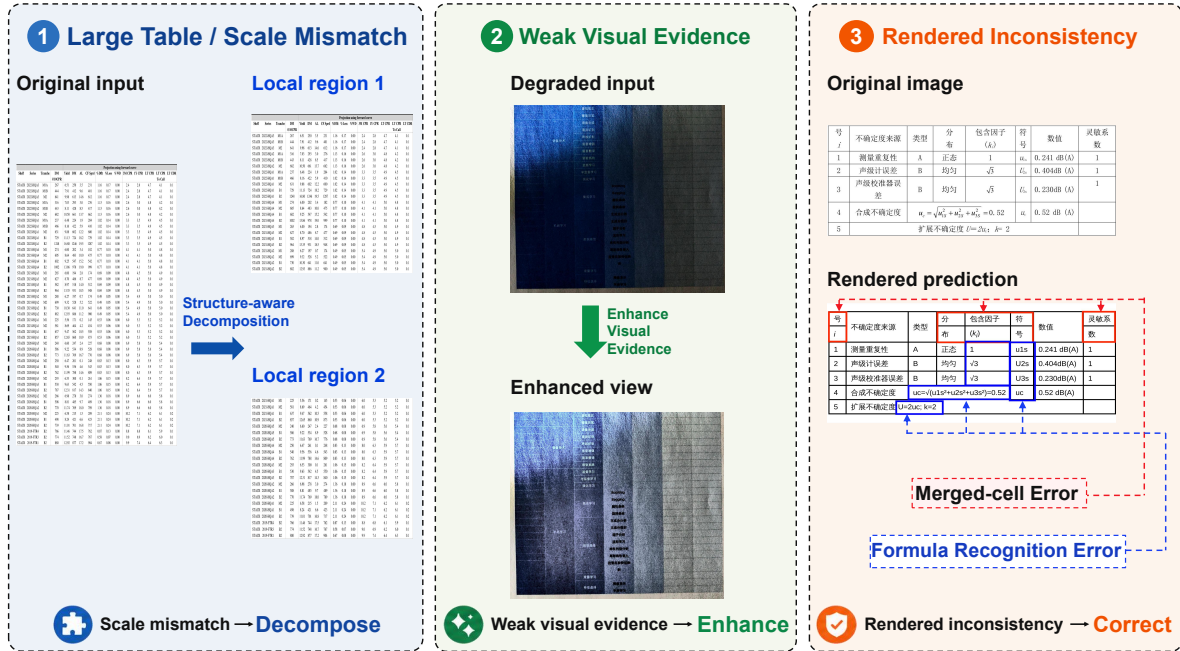


Figure 1: Representative DEC interventions for scale mismatch, weak visual evidence, and rendered inconsistency.

two complementary perspectives: input scenarios and output failures. On this benchmark, MinerU2.5-Pro, the strongest evaluated model, achieves only 85.03 TEDS and falls below 80 on the Implicit Semantic scenario.

The failures revealed by TableParseMap point to three complementary limitations. First, finite input resolution, visual-token capacity, and output length make large tables difficult to process completely in a single pass. Second, weak or ambiguous visual cues may prevent reliable structure recovery even when the full table is visible. Third, the reconstructed table may remain visually inconsistent with the image. Addressing these long-tail failures through continual data collection and retraining requires additional annotation, computation, and access to model parameters, making it unsuitable for fixed deployments or closed-source systems. Existing split-and-merge methods are typically embedded within dedicated table recognition networks [6, 7, 8], while recent agentic methods mainly diagnose and revise outputs after initial parsing [9, 10]. The former cannot be readily applied to frozen parsers, whereas the latter cannot recover content or visual evidence missed during the initial parsing process.

Based on these observations, we propose DEC (Decompose–Enhance–Correct), a visual-consistency-guided agentic framework that requires no retraining of the base parser, with representative interventions illustrated in Fig. 1. **Decompose** selects structure-aware split points and partitions large tables into local blocks that the parser can process reliably. **Enhance** uses image-based tools to expose weak structural cues and re-invokes the frozen parser. **Correct** compares the table image with the current rendered prediction to diagnose and repair residual inconsistencies. DEC further introduces a Visual Consistency Gate (VC-Gate) to determine whether intervention is needed and a Visual Consistency Ranker (VC-Ranker) to verify candidate updates and support rollback. Together, they enable selective and reliable intervention without ground-truth HTML at inference time.

To evaluate DEC on samples that challenge multiple parsers, we design an automated screening protocol inspired by the Cross-Model Consistency Verification strategy in MinerU2.5-Pro. The protocol combines offline metrics and cross-model consensus to identify samples that remain difficult across

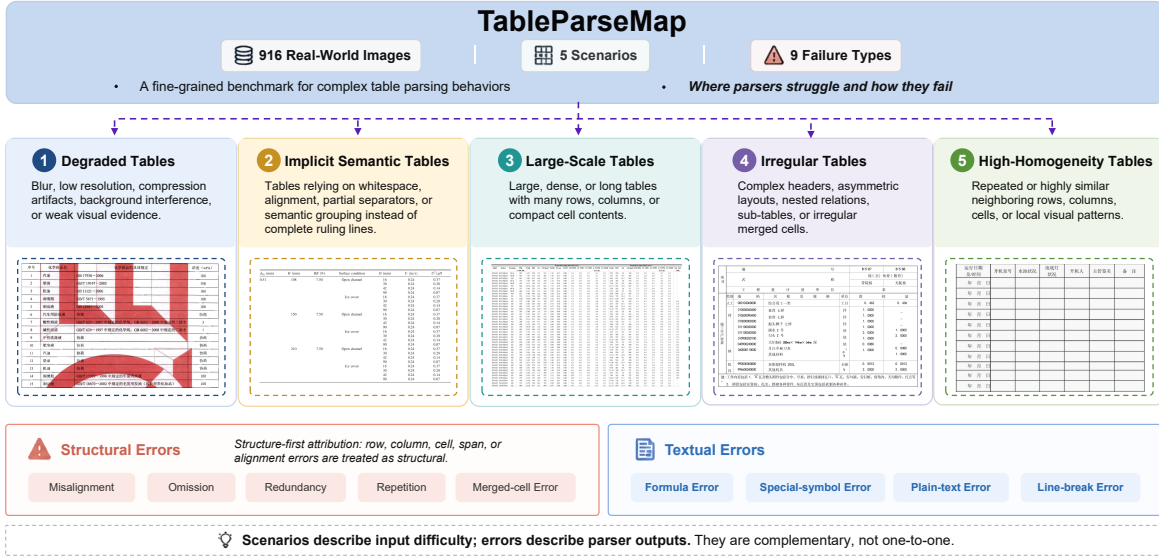


Figure 2: Overview of TableParseMap. The benchmark contains 916 real-world table images and characterizes parser behavior through five challenging input scenarios and nine failure types. The scenario taxonomy describes where parsers struggle, while the structure-first error taxonomy describes how they fail.

heterogeneous parsers. We apply it to 4,556 candidate samples drawn from public benchmarks, real-world data, and TableParseMap, yielding a Consensus-Hard Set of 1,977 tables. Five representative baselines achieve only 66.10–70.92 TEDS on this set, indicating that it remains challenging across different parsers. Because screening is driven by unified metrics and model outputs rather than a fixed manually selected list, the protocol can be rerun as parsers improve to refresh the cross-model difficulty boundary.

Our experiments cover three frozen parsers and two controller scales. Across all evaluation settings, DEC improves TEDS by 1.57 points on average. On TableParseMap, it improves the overall TEDS of the three base parsers by an average of 1.89 points, with average gains of 2.62 points on structural errors and 5.66 points on Large Scale Tables. Fine-grained analyses and ablation studies further validate the contributions of the three stages, the visual tools, and the runtime decision modules.

Our main contributions are summarized as follows:

- **Benchmark.** We introduce TableParseMap, a diagnostic benchmark of 916 real-world complex tables with five challenging scenarios and nine failure types for fine-grained parser analysis.
- **Framework.** We propose DEC, a visual-consistency-guided agentic framework for progressive inference-time intervention over frozen table parsers, with VC-Gate and VC-Ranker enabling selective routing, verification, and rollback without ground-truth HTML.
- **Evaluation.** We derive a 1,977-table Consensus-Hard Set through automated cross-model screening and evaluate DEC across three frozen parsers and two controller scales, achieving an average TEDS gain of 1.57 points.

2 Related Work

2.1 Table Parsing Models

Table parsing has evolved from handcrafted line and coordinate rules to data-driven detection and structure recognition [11, 12]. Later methods model relations, grids, logical coordinates, object queries, or HTML sequences to recover two-dimensional structure [13, 6, 14, 15, 16, 17, 18, 19]. Recent table and document VLMs further unify table recognition with broader visual table understanding or full-page parsing [20, 21, 22, 23, 24, 25], although general VLMs still exhibit limitations in spatial and formatting understanding [26]. Instruction-guided methods further improve difficult table structures through dedicated training [27]. Most improvements, however, require retraining and cannot directly extend deployed or closed-source parsers. DEC instead keeps the parser frozen and improves difficult cases through inference-time decomposition, enhancement, and correction.

2.2 Table Benchmarks

ICDAR 2013 and cTDaR standardized early table detection and structure recognition, while PubTabNet and PubTables-1M expanded image-to-HTML evaluation and annotation scale [28, 29, 13, 30]. Recent document and OCR benchmarks broaden domain and acquisition coverage [1, 31, 32, 33, 34], but primarily report aggregate scores or coarse groups. TableParseMap complements them by jointly characterizing challenging input scenarios and resulting parser failures, while the Consensus-Hard Set concentrates cross-model difficult cases for targeted evaluation.

2.3 Agentic Parsing and Runtime Verification

Test-time refinement improves outputs through iterative critique and revision without retraining [35]. Text-based post-OCR correction further repairs recognition and reading-order errors using dedicated correction models [36]. OCR-Agent and ParseFixer apply iterative refinement to OCR and document parsing, with ParseFixer combining a frozen parser with selective correction and rollback [10, 9]. Multi-model agreement has also been explored as a training-free signal for sample-level OCR reliability, output selection, and adaptive routing [37]. Related work also uses render-based or visual-equivalence signals for table evaluation and refinement [38, 39, 40]. Existing correction and agentic methods remain largely post-hoc, while visual verification is often used only as a reward or final evaluator. DEC couples them throughout inference, using visual consistency to control decomposition, evidence enhancement, correction, and update acceptance.

3 TableParseMap

We introduce TableParseMap, a diagnostic benchmark designed to quantify where table parsers struggle and how they fail on complex real-world tables. Unlike benchmarks that summarize performance with a single aggregate score, TableParseMap organizes parser behavior from two complementary views: challenging input scenarios and observed output failures.

3.1 Benchmark Construction

Model Audit and Sample Selection. We construct TableParseMap by systematically auditing real parser failures. We run MinerU2.5-Pro, PaddleOCR-VL-1.6, GLM-OCR, and Qwen3.5-397B-A17B on real-world table data and manually compare their outputs with the original images. Consolidating recurring failures across the four models yields nine output error types, which we associate with five high-risk input scenarios. We then sample tables targeting these scenarios and assign each image one

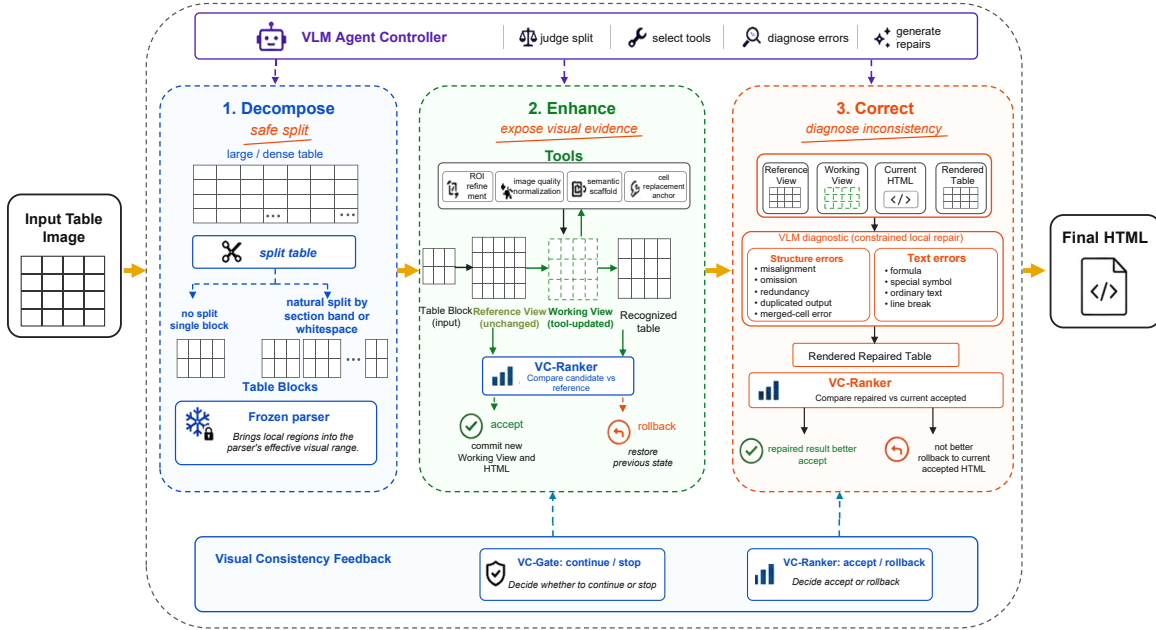


Figure 3: Overview of DEC. A general VLM controls Decompose, Enhance, and Correct over a frozen table parser, while VC-Gate and VC-Ranker govern stage triggering, candidate acceptance, and fallback.

canonical tag through expert review, producing 916 annotated images. Because this process intentionally targets recurrent failures, TableParseMap supports diagnostic analysis rather than accuracy estimation under a natural table distribution.

3.2 Taxonomy and Annotation Protocol

Dual-View Taxonomy. Each image receives exactly one of 14 canonical tags, grouped into text errors, structural errors, and challenging input scenarios. The 331 text-error samples cover character recognition, line breaks, formulas, and special symbols. The 307 structural-error samples cover omission, misalignment, redundancy, duplicated output, and merged-cell errors. The remaining 278 images form five scenario categories: implicit semantic tables, degraded visual evidence, highly similar patterns, irregular or rare structures, and large tables. Scenario tags describe input conditions under which parsers struggle, whereas error tags describe failures observed in parser outputs. Figure 2 summarizes the five challenging input scenarios, while representative examples of all nine parser failure types are provided in Appendix A.

Structure-First Annotation. When multiple phenomena appear in the same sample, annotators assign the tag corresponding to the dominant failure or input condition. We follow a structure-first rule to avoid assigning multiple labels to a single underlying error. For example, if a missing cell also causes its text to disappear, the sample is labeled as a structural omission because the text loss is a consequence of the structural error. A text-error label is used only when the table structure is correct and the cell content itself is misrecognized.

4 Method

4.1 Overview

Given a table image I , a frozen base parser R_θ first produces an initial structured representation, such as HTML, $Y_{\text{base}} = R_\theta(I)$. Building on the three recurring limitations revealed by TableParseMap—scale mismatch, weak or ambiguous visual evidence, and residual inconsistency between the reconstructed table and the input image—we propose Decompose–Enhance–Correct (DEC), a progressive inference-time framework over the frozen parser.

DEC addresses these limitations through three stages. **Decompose** partitions large tables into locally manageable regions; **Enhance** exposes existing but difficult-to-recognize visual evidence through image-based tools; and **Correct** diagnoses and repairs residual inconsistencies by jointly inspecting the reference image, the current structured prediction, and its rendering. DEC uses the frozen parser R_θ as the recognition executor and a general vision-language model A_ϕ as the controller. VC-Gate G_η determines whether further intervention is required, whereas VC-Ranker S_ω evaluates whether a tentative update improves visual consistency and governs candidate acceptance and fallback.

4.2 Visual-Consistency Decision Models

At inference time, ground-truth HTML is unavailable. DEC therefore controls stage triggering and state updates through the visual consistency between the original table image I and the deterministic rendering $\rho(Y)$ of a parsing result Y . We decouple this ground-truth-free quality assessment into two complementary decisions: whether the current result is acceptable and whether a tentative result is better than the current one.

VC-Gate G_η predicts the acceptability of a result, while VC-Ranker S_ω assigns a relative visual-consistency score under the same reference image:

$$g_\eta(Y | I) = G_\eta(I, \rho(Y)), s_\omega(Y | I) = S_\omega(I, \rho(Y)), \quad (1)$$

where $g_\eta(Y | I) \in \{0, 1\}$. VC-Gate determines whether the base result should enter DEC and whether the output of Enhance still requires Correct. For a current result Y and a tentative result $\tilde{Y}$, DEC defines the acceptance decision as

$$\text{Accept}(\tilde{Y}, Y | I) = \mathbb{I} \left[s_\omega(\tilde{Y} | I) > s_\omega(Y | I) + \delta \right] \quad (2)$$

This rule governs candidate acceptance in Enhance and Correct and is also used for post-merge verification.

4.3 Decompose–Enhance–Correct

4.3.1 Decompose

Decompose handles tables whose scale or density exceeds the effective visual range of the base parser. Rather than uniformly downscaling the input or applying arbitrary crops, the agent invokes `split_table` to identify structurally safe boundaries from whitespace and subtable cues while avoiding cuts through cells or merged regions. This process produces K reference image blocks:

$$\left\{ I_k^{\text{ref}} \right\}_{k=1}^K = \mathcal{D}(I; A_\phi) \quad (3)$$

Tables that do not require decomposition are treated as $K = 1$ with $I_1^{\text{ref}} = I$. Each block is subsequently processed by Enhance and Correct, and the block-level results are merged only when $K > 1$.

4.3.2 Enhance

Enhance exposes visual evidence that is present in the image but difficult for the base parser to recognize. For each block, DEC maintains an immutable *Reference View* I_k^{ref} for visual-consistency evaluation and an editable *Working View* $I_k^{(r)}$ for tool-based enhancement, initialized as $I_k^{(0)} = I_k^{\text{ref}}$. The corresponding initial parsing result is defined as

$$Y_{k,E}^{(0)} = \begin{cases} Y_{\text{base}}, & K = 1, \\ R_{\theta}(I_k^{\text{ref}}), & K > 1 \end{cases} \quad (4)$$

The enhancement tools perform table-region refinement, image-quality normalization, sparse structural scaffolding, and removable cell anchoring. These transformations expose existing visual evidence without adding target text or directly modifying the candidate HTML.

At round r , the agent selects an enhancement action $a_{k,r}$ based on the Reference View, the current Working View, and previous tool feedback. The selected transformation generates a tentative Working View, which is reparsed by the frozen parser:

$$\tilde{I}_k^{(r+1)} = T_{a_{k,r}}(I_k^{(r)}), \quad \tilde{Y}_{k,E}^{(r+1)} = R_{\theta}(\tilde{I}_k^{(r+1)}) \quad (5)$$

Using I_k^{ref} as the evaluation reference, DEC evaluates the tentative image–HTML state according to Eq. (2). If accepted, it commits the tentative state; otherwise, it rolls back to the previous state. Enhance terminates when no further tool action is proposed or the maximum number of rounds is reached. The retained Working View and parsing result are denoted by I_k^{work} and Y_k^{enh} , respectively.

4.3.3 Correct

After Enhance, VC-Gate evaluates Y_k^{enh} . If the result is accepted, DEC skips correction and sets $Y_k^{\text{final}} = Y_k^{\text{enh}}$; otherwise, it initializes the correction trajectory as $Y_{k,C}^{(0)} = Y_k^{\text{enh}}$. At each round t , the agent jointly examines the Reference View, Working View, current HTML, and its rendering. It first diagnoses image–HTML inconsistencies and then generates a corrected candidate conditioned on the diagnosis:

$$\begin{aligned} D_k^{(t)} &= A_{\phi}^{\text{diag}} \left(I_k^{\text{ref}}, I_k^{\text{work}}, Y_{k,C}^{(t)}, \rho(Y_{k,C}^{(t)}) \right), \\ \tilde{Y}_{k,C}^{(t+1)} &= A_{\phi}^{\text{repair}} \left(I_k^{\text{ref}}, I_k^{\text{work}}, Y_{k,C}^{(t)}, D_k^{(t)} \right) \end{aligned} \quad (6)$$

Here, A_{ϕ}^{diag} and A_{ϕ}^{repair} are two prompt-conditioned calls to the same VLM rather than separate models. Diagnosis is guided by the predefined failure taxonomy, while repair generates a revised complete HTML grounded in the available visual evidence. No sample-level scene or error labels from TableParseMap are used during inference, and the agent may abstain when the available visual evidence is insufficient.

If $\text{Accept}(\tilde{Y}_{k,C}^{(t+1)}, Y_{k,C}^{(t)} \mid I_k^{\text{ref}}) = 1$, DEC commits the corrected candidate as $Y_{k,C}^{(t+1)}$; otherwise, it retains $Y_{k,C}^{(t)}$ and terminates the current correction trajectory. Correct also stops when no further error is diagnosed or the maximum number of rounds is reached. The retained correction result is denoted by Y_k^{final} .

4.4 Merge and Final Verification

When $K = 1$, DEC directly returns the block-level result Y_1^{final} . When $K > 1$, the independently processed HTML results are temporarily converted to OTSL[41], aligned and concatenated according

From Diagnosis to Correction: Benchmarking and Improving Real-World Table Parsing

Parser	DEC Controller	Overall	CCOCR	In-house	OCRBenchv2	Real5	Wild	TableParse Map
Qwen3.5-397B	–	66.52/76.68	76.20/80.81	68.84/79.89	73.22/78.63	54.89/71.02	53.24/67.57	74.86/80.93
Qwen3.5-35B	–	66.10/76.45	76.98/82.54	66.78/78.47	70.20/76.25	54.00/70.19	51.82/66.52	76.72/82.55
MinerU2.5-Pro	–	70.92/81.11	75.62/81.54	75.84/85.73	84.49/90.25	56.74/73.12	53.68/68.21	79.38/85.39
	Qwen3.5-397B	72.18/82.19	77.52/83.08	76.98/86.67	85.69/91.39	57.57/73.74	55.76/69.79	80.91/86.79
	Qwen3.5-35B	72.14/82.11	76.89/83.01	76.96/86.59	85.36/91.00	57.86/73.84	55.21/69.41	80.85/86.72
PaddleOCR-VL-1.6	–	67.50/77.90	66.57/75.00	69.25/80.54	75.72/82.49	57.61/72.42	54.40/68.18	75.74/82.57
	Qwen3.5-397B	69.41/79.58	69.77/77.32	70.80/82.04	79.03/85.30	58.32/73.22	56.35/69.14	78.17/84.74
	Qwen3.5-35B	68.82/78.96	69.90/77.46	70.80/82.02	77.21/83.53	58.29/72.97	56.18/68.89	77.05/83.77
GLM-OCR	–	69.13/79.80	77.20/83.92	72.25/83.33	79.52/86.57	57.74/73.36	55.40/69.35	75.66/82.84
	Qwen3.5-397B	70.68/81.01	78.78/84.98	73.87/84.54	82.39/88.82	58.19/73.65	56.22/69.69	77.86/84.75
	Qwen3.5-35B	70.13/80.57	79.38/84.96	72.98/83.86	81.10/87.63	58.44/74.02	56.17/69.85	76.68/83.73

Table 1: Results on the 1,977-table Consensus-Hard Set. Cells report TEDS/TEDS-S, and Overall is sample-weighted across the six sources. Qwen3.5-397B/35B denote Qwen3.5-397B-A17B/35B-A3B; TableParseMap contains its 602-sample subset.

Parser	Overall (N = 916)	Text Errors (N = 331)	Structural Errors (N = 307)	Implicit Semantic (N = 52)	Degraded Tables (N = 66)	High Homogeneity (N = 57)	Irregular Tables (N = 52)	Large-Scale Tables (N = 51)
MinerU2.5-Pro	<u>85.03</u> / <u>89.73</u>	86.13 / 93.04	<u>84.93</u> /88.22	78.12/84.35	84.92/89.03	86.57/88.42	<u>82.26</u> / <u>85.69</u>	86.67/89.32
PaddleOCR-VL-1.6	81.86/87.22	83.09/89.93	82.01/86.47	71.68/79.42	84.79/89.07	81.86/83.18	78.90/82.71	82.56/88.84
GLM-OCR	79.50/84.88	81.61/89.03	80.51/84.31	72.48/80.01	79.99/85.63	71.08/72.95	76.82/81.00	78.38/82.68
Qwen3.5-397B	80.78/85.72	79.73/87.47	73.39/77.31	79.18 / 84.93	83.74/87.38	76.14/77.58	73.88/77.05	<u>92.26</u> / <u>94.30</u>
Qwen3.5-35B	81.21/86.11	78.98/85.90	83.45/87.33	76.00/82.60	83.20/86.36	81.29/82.39	77.07/81.40	89.03/92.29
DeepSeek-OCR-2	54.36/62.56	60.83/70.25	56.09/63.46	56.51/66.55	51.90/60.84	36.52/40.68	44.60/53.47	32.89/39.18
Unlimited-OCR	64.15/70.17	62.86/70.20	66.97/71.93	64.90/72.84	67.99/73.06	60.22/63.46	63.58/67.13	54.78/63.59
Youtu-Parsing	77.71/84.04	76.86/85.51	78.90/83.73	72.95/80.50	76.63/83.40	<u>86.66</u> / <u>89.31</u>	78.25/83.41	71.87/75.61
MinerU2.5-Pro + DEC	86.19 / 90.79	<u>85.89</u> / <u>92.86</u>	86.70 / 89.98	<u>78.35</u> / <u>84.61</u>	<u>86.49</u> / <u>90.35</u>	89.32 / 90.38	82.67 / 86.09	92.69 / 94.37
PaddleOCR-VL-1.6 + DEC	83.76/88.89	83.55/90.45	84.65/88.77	73.58/80.87	87.61 / 91.27	84.53/85.84	80.51/84.26	87.58/92.65
GLM-OCR + DEC	82.11/87.47	82.55/90.18	83.96/87.68	74.60/82.16	80.17/85.24	77.92/79.90	80.82/84.29	84.32/88.49

Table 2: Fine-grained TEDS/TEDS-S results on TableParseMap. Text and Structural are aggregate error groups; the remaining columns are five challenging scenarios. +DEC uses Qwen3.5-397B with VC-Gate. Best and second-best values are bold and underlined.

to the original spatial arrangement $\mathcal{P}$ of the image blocks, and then converted back to HTML:

$$Y_{\text{merge}} = \psi_{\text{O} \rightarrow \text{H}} \left(\mathcal{M}_{\text{OTSL}} \left(\{ \psi_{\text{H} \rightarrow \text{O}}(Y_k^{\text{final}}) \}_{k=1}^K; \mathcal{P} \right) \right) \quad (7)$$

Although each block has been verified independently, merging may introduce global inconsistencies such as duplicated boundary rows, missing content, or cross-block misalignment. DEC therefore performs post-merge verification only when Decompose is triggered. Using the complete image I as the reference, VC-Ranker compares Y_{merge} with the initial full-table result Y_{base} , and the final output is

$$Y^* = \begin{cases} Y_{\text{merge}}, & \text{Accept}(Y_{\text{merge}}, Y_{\text{base}} \mid I) = 1, \\ Y_{\text{base}}, & \text{otherwise} \end{cases} \quad (8)$$

This verification requires one additional rendering and one VC-Ranker inference, without rerunning the base parser.

(a) Stage-wise Progression					(b) Update-Selection Strategy			
Setting	TEDS		Incremental Gain		Strategy	After Enhance		Final
	TEDS	TEDS-S	TEDS	TEDS-S		TEDS	TEDS-S	TEDS
Parser Baseline	67.503	77.896	–		Accept All	66.816 / 77.497	68.549 / 79.341	29.34%
+ Decompose	67.791	78.128	+0.288	+0.232	Agent Self-Judge	66.938 / 77.562	68.897 / 79.257	13.45%
+ Enhance	68.323	78.548	+0.532	+0.420	VC-Ranker	68.323 / 78.548	69.410 / 79.576	12.65%
Full DEC	69.410	79.576	+1.087	+1.028				

Table 3: Mechanism ablations on the Consensus-Hard Set. (a) Stage-wise progression. (b) Update-selection strategies; Reg. Rate is the proportion of samples falling below the shared parser baseline.

5 Experiments

5.1 Experimental Setup

Evaluation protocol. We evaluate DEC under three complementary settings. Main results use the 1,977-table Consensus-Hard Set, fine-grained analysis uses the complete 916-table TableParseMap, and routing efficiency is measured on the complete six-source pool of 4,556 tables.

Consensus-Hard Set. Starting from 4,556 candidates drawn from CCOCR, In-house data, OCR-Benchv2, Real5-OmniDocBench, Wild-OmniDocBench, and TableParseMap, we run MinerU2.5-Pro, PaddleOCR-VL-1.6, GLM-OCR, and Qwen3.5-397B-A17B. Selection is independent of VC-Gate: a sample is retained when at least two parsers obtain TEDS below 0.90, followed by stratified sampling across the six sources to form the final 1,977-table set. This consensus rule avoids tailoring evaluation to isolated failures of a single parser. Because the resulting set targets difficult cases rather than the original data distribution, we also report results on the complete public benchmarks.

Models and metrics. We evaluate MinerU2.5-Pro, PaddleOCR-VL-1.6, and GLM-OCR as frozen base parsers, each paired with Qwen3.5-397B-A17B or Qwen3.5-35B-A3B as the DEC controller. For direct comparison on TableParseMap, we additionally include both Qwen models, DeepSeek-OCR-2 [42], Unlimited-OCR [43], and YoutuParsing [44]. Unless otherwise specified, DEC uses Qwen3.5-397B-A17B as the controller, and mechanism ablations use PaddleOCR-VL-1.6 as the base parser. We report TEDS and TEDS-S on a 0–100 scale using shared annotations, HTML normalization, and metric implementation; Overall on Consensus-Hard is sample-weighted.

Inference configuration. Both controllers use deterministic decoding with reasoning disabled. Correct runs for at most three rounds, and candidate updates are accepted using a VC-Ranker margin of $\delta = 0.05$. All routing and acceptance thresholds are fixed before testing. VC-Gate and VC-Ranker are trained on data disjoint from all evaluation sets, and neither model accesses ground-truth HTML or offline TEDS at inference time.

Further details on source preprocessing, Consensus-Hard construction, VC-Gate and VC-Ranker training, metric aggregation, and efficiency accounting are provided in Appendix B.

5.2 Main Results

As shown in Table 1, DEC consistently improves all three frozen base parsers under both controller configurations, with gains observed across all six source subsets. Qwen3.5-397B yields average improvements of 1.57 TEDS and 1.32 TEDS-S points across the three parsers, while the smaller Qwen3.5-35B still achieves average gains of 1.18 and 1.11 points, respectively. The larger controller generally provides stronger improvements, although the comparable results on MinerU2.5-Pro indicate that DEC does

Setting	TEDS / TEDS-S $\uparrow$	DEC Trigger Rate	Extra Parser Calls per Input $\downarrow$	Controller Calls per Input $\downarrow$
PaddleOCR-VL-1.6 (No DEC)	82.988 / 88.420	0%	0.000	0.000
Always-on DEC	84.449 / 89.641	100%	0.924	4.185
VC-Gate + DEC	84.413 / 89.614	43.0%	0.487	2.725

Table 4: Routing efficiency on the complete 4,556-table pool using PaddleOCR-VL-1.6. Extra parser calls exclude initial parsing; controller calls exclude VC-Gate and VC-Ranker.

not depend on the largest controller. In contrast, direct parsing with either general VLM performs substantially worse than the specialized parsers on Real5 and Wild. These results show that DEC transfers across base parsers, data sources, and controller scales, whereas directly scaling a general VLM does not reliably address difficult real-world table parsing.

5.3 Fine-Grained Analysis on TableParseMap

Table 2 compares eight direct-parsing baselines and three DEC-enhanced parsers across two aggregate error groups and five scenario categories, with results for the nine individual error types provided in Appendix A. The direct baselines exhibit distinct capability profiles: MinerU2.5-Pro performs best overall and on the aggregated text and structural error groups, Qwen3.5-397B is strongest on Implicit Semantic and Large-Scale Tables, and Youtu achieves the strongest direct-parsing result on High-Homogeneity Tables. These variations show that aggregate performance alone obscures parser-specific strengths and weaknesses.

DEC improves the overall TEDS of MinerU2.5-Pro, PaddleOCR-VL-1.6, and GLM-OCR by 1.16, 1.90, and 2.61 points, respectively. The gains are consistently larger on structural errors than on text errors, indicating that DEC is particularly effective at repairing structural failures. Improvements are also pronounced on Large-Scale Tables, where all three parsers gain approximately 5–6 TEDS points, supporting the effectiveness of Decompose. The slight 0.24-point regression of MinerU2.5-Pro on text errors suggests that DEC does not uniformly improve every error category.

5.4 Ablation Study

Stage-wise Contribution. Table 3(a) shows that Decompose, Enhance, and Correct provide successive improvements, with Correct contributing the largest incremental gain. Full DEC improves the parser baseline by 1.907 TEDS and 1.680 TEDS-S points. Although Decompose is triggered for only 178 of the 1,977 samples, it improves TEDS/TEDS-S by 3.202/2.575 points on this targeted subset, confirming its effectiveness on large tables despite its diluted full-set gain.

Visual-Consistency Ranking. Table 3(b) shows that unconditionally accepting all proposals degrades both metrics after Enhance and results in a 29.34% final regression rate. Agent Self-Judge filters many harmful updates but remains inferior to the independently trained VC-Ranker. VC-Ranker with rollback achieves the highest intermediate and final scores while reducing the regression rate to 12.65%, demonstrating the importance of independent candidate verification.

Additional controlled ablations show that fixed splitting and indiscriminate enhancement both degrade performance, confirming that the gains of Decompose and Enhance arise from agent-guided intervention rather than operation alone; detailed results are provided in Appendix C.

5.5 Routing and Efficiency

Table 4 shows that VC-Gate triggers DEC on only 43.0% of inputs while retaining 97.5% of the TEDS gain and 97.8% of the TEDS-S gain achieved by Always-on DEC. Compared with always-on execution, routing reduces extra parser calls by 47.3% and controller calls by 34.9%. Moreover, the routed subset improves from 71.454 to 74.763 TEDS, indicating that VC-Gate concentrates intervention on inputs that are substantially more likely to benefit from DEC. Detailed stage-wise iteration statistics further show that Enhance and Correct usually terminate well before their maximum budgets; see Appendix D.

6 Conclusion

We introduce TableParseMap, a diagnostic benchmark of 916 real-world tables organized into five challenging scenarios and nine failure types. Its fine-grained analysis reveals recurring limitations in processing scale, visual evidence, and output consistency that motivate DEC, a visual-consistency-guided agentic framework for frozen table parsers. DEC uses a general VLM controller to progressively Decompose, Enhance, and Correct parser outputs, while VC-Gate and VC-Ranker enable selective intervention and verified updates without ground-truth HTML at inference time. We further derive a 1,977-table Consensus-Hard Set for cross-model hard-case evaluation. Across three frozen parsers and two controller scales, DEC consistently improves parsing quality, achieving an average gain of 1.57 TEDS points. These results support inference-time collaboration between specialized parsers and general VLMs without retraining. Limitations and future directions are discussed in Appendix E.

References

- [1] Linke Ouyang, Yuan Qu, Hongbin Zhou, Jiawei Zhu, Rui Zhang, Qunshu Lin, Bin Wang, Zhiyuan Zhao, Man Jiang, Xiaomeng Zhao, et al. Omnidocbench: Benchmarking diverse pdf document parsing with comprehensive annotations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 24838–24848, 2025.
- [2] Bin Wang, Tianyao He, Linke Ouyang, Fan Wu, Zhiyuan Zhao, Tao Chu, Yuan Qu, Zhenjiang Jin, Weijun Zeng, Ziyang Miao, et al. Mineru2. 5-pro: Pushing the limits of data-centric document parsing at scale, 2026.
- [3] Zelun Zhang, Hongen Liu, Suyin Liang, Yubo Zhang, Yiqing Xiang, Jiaxuan Liu, Ting Sun, Manhui Lin, Yue Zhang, Changda Zhou, et al. Paddleocr-v1-1.6: Expanding the frontier of document parsing with under-optimized region refinement and progressive post-training, 2026.
- [4] Shuaiqi Duan, Yadong Xue, Weihang Wang, Zhe Su, Huan Liu, Sheng Yang, Guobing Gan, Guo Wang, Zihan Wang, Shengdong Yan, et al. Glm-ocr technical report, 2026.
- [5] Qwen Team. Qwen3. 5-omni technical report, 2026.
- [6] Zhenrong Zhang, Jianshu Zhang, Jun Du, and Fengren Wang. Split, embed and merge: An accurate table structure recognizer. *Pattern Recognition*, 126:108565, 2022.
- [7] Zengyuan Guo, Yuechen Yu, Pengyuan Lv, Chengquan Zhang, Haojie Li, Zhihui Wang, Kun Yao, Jingtuo Liu, and Jingdong Wang. Trust: An accurate and end-to-end table structure recognizer using splitting-based transformers, 2022.
- [8] Chunxia Qin, Zhenrong Zhang, Pengfei Hu, Chenyu Liu, Jiefeng Ma, and Jun Du. Semv3: A fast and robust approach to table separation line detection, 2024.
- [9] LeKai Yu, Hao Liu, Kun Wang, Zhiran Li, Ruping Cao, Fan Liu, and Yupeng Hu. Parsefixer: An agentic framework for document parsing via selective multimodal correction, 2026.
- [10] Shimin Wen, Zeyu Zhang, Xingdou Bian, Hongjie Zhu, Lulu He, Layi Shama, Daji Ergu, and Ying Cai. Ocr-agent: Agentic ocr with capability and memory reflection, 2026.

- [11] Sebastian Schreiber, Stefan Agne, Ivo Wolf, Andreas Dengel, and Sheraz Ahmed. Deepdesrt: Deep learning for detection and structure recognition of tables in document images. In *2017 14th IAPR international conference on document analysis and recognition (ICDAR)*, volume 1, pages 1162–1167. IEEE, 2017.
- [12] Xinyi Zheng, Douglas Burdick, Lucian Popa, Xu Zhong, and Nancy Xin Ru Wang. Global table extractor (gte): A framework for joint table identification and cell structure recognition using visual context. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 697–706, 2021. doi:[10.1109/WACV48630.2021.00074](https://doi.org/10.1109/WACV48630.2021.00074).
- [13] Xu Zhong, Elaheh ShafieiBavani, and Antonio Jimeno Yepes. Image-based table recognition: data, model, and evaluation. In *European conference on computer vision*, pages 564–580. Springer, 2020.
- [14] Ahmed Nassar, Nikolaos Livathinos, Maksym Lysak, and Peter Staar. Tableformer: Table structure understanding with transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4614–4623, 2022.
- [15] Sachin Raja, Ajoy Mondal, and CV Jawahar. Visual understanding of complex table structures from document images. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 2299–2308, 2022.
- [16] Weihong Lin, Zheng Sun, Chixiang Ma, Mingze Li, Jiawei Wang, Lei Sun, and Qiang Huo. Tsrformer: Table structure recognition with transformers. In *Proceedings of the 30th ACM international conference on multimedia*, pages 6473–6482, 2022.
- [17] Jiawei Wang, Weihong Lin, Chixiang Ma, Mingze Li, Zheng Sun, Lei Sun, and Qiang Huo. Robust table structure recognition with dynamic queries enhanced detection transformer. *Pattern Recognition*, 144:109817, 2023. doi:[10.1016/j.patcog.2023.109817](https://doi.org/10.1016/j.patcog.2023.109817).
- [18] Hangdi Xing, Feiyu Gao, Rujiao Long, Jiajun Bu, Qi Zheng, Liangcheng Li, Cong Yao, and Zhi Yu. Lore: Logical location regression network for table structure recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 2992–3000, 2023.
- [19] Yongshuai Huang, Ning Lu, Dapeng Chen, Yibo Li, Zecheng Xie, Shenggao Zhu, Liangcai Gao, and Wei Peng. Improving table structure recognition with visual-alignment sequential coordinate modeling. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11134–11143, 2023.
- [20] Weichao Zhao, Hao Feng, Qi Liu, Jingqun Tang, Binghong Wu, Lei Liao, Shu Wei, Yongjie Ye, Hao Liu, Wengang Zhou, et al. Tabpedia: Towards comprehensive visual table understanding with concept synergy. *Advances in Neural Information Processing Systems*, 37:7185–7212, 2024.
- [21] Hao Liu, Xin Li, Mingming Gong, Bing Liu, Yunfei Wu, Deqiang Jiang, Yinsong Liu, and Xing Sun. Grab what you need: Rethinking complex table structure recognition with flexible components deliberation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 3603–3611, 2024.
- [22] ShengYun Peng, Aishwarya Chakravarthy, Seongmin Lee, Xiaojing Wang, Rajarajeswari Balasubramanian, and Duen Horng Chau. Unitable: Towards a unified framework for table recognition via self-supervised pretraining, 2024.
- [23] Zhenrong Zhang, Shuhang Liu, Pengfei Hu, Jiefeng Ma, Jun Du, Jianshu Zhang, and Yu Hu. Unitabnet: bridging vision and language models for enhanced table structure recognition. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 6131–6143, 2024.
- [24] Junbo Niu, Zheng Liu, Zhuangcheng Gu, Bin Wang, Linke Ouyang, Zhiyuan Zhao, Tao Chu, Tianyao He, Fan Wu, Qintong Zhang, et al. Mineru2. 5: A decoupled vision-language model for efficient high-resolution document parsing, 2025.
- [25] Cheng Cui, Ting Sun, Suyin Liang, Tingquan Gao, Zelun Zhang, Jiaxuan Liu, Xueqing Wang, Changda Zhou, Hongen Liu, Manhui Lin, et al. Paddleocr-vl: Boosting multilingual document parsing via a 0.9 b ultra-compact vision-language model, 2025.
- [26] Shiyu Xia, Junyu Xiong, Haoyu Dong, Jianbo Zhao, Yuzhang Tian, Mengyu Zhou, Yeye He, Shi Han, and Dongmei Zhang. Vision language models for spreadsheet understanding: Challenges and opportunities. In *Proceedings of the 3rd Workshop on Advances in Language and Vision Research (ALVR)*, pages 116–128, 2024.

- [27] Boming Chen, Zining Wang, Zhentao Guo, Jianqiang Liu, Chen Duan, Yu Gu, Pengfei Yan, et al. Instructtable: Improving table structure recognition through instructions, 2026.
- [28] Max Göbel, Tamir Hassan, Ermelinda Oro, and Giorgio Orsi. Icdar 2013 table competition. In *2013 12th international conference on document analysis and recognition*, pages 1449–1453. IEEE, 2013.
- [29] Liangcai Gao, Yilun Huang, Hervé Déjean, Jean-Luc Meunier, Qinqin Yan, Yu Fang, Florian Kleber, and Eva Lang. Icdar 2019 competition on table detection and recognition (ctdar). In *2019 International conference on document analysis and recognition (ICDAR)*, pages 1510–1515. IEEE, 2019.
- [30] Brandon Smock, Rohith Pesala, and Robin Abraham. Pubtables-1m: Towards comprehensive table extraction from unstructured documents. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4634–4642, 2022.
- [31] Zhibo Yang, Jun Tang, Zhaohai Li, Pengfei Wang, Jianqiang Wan, Humen Zhong, Xuejing Liu, Mingkun Yang, Peng Wang, Shuai Bai, et al. Cc-ocr: A comprehensive and challenging ocr benchmark for evaluating large multimodal models in literacy. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21744–21754, 2025.
- [32] Ling Fu, Zhebin Kuang, Jiajun Song, Mingxin Huang, Biao Yang, Yuzhe Li, Linghao Zhu, Qidi Luo, Xinyu Wang, Hao Lu, et al. Ocrbench v2: An improved benchmark for evaluating large multimodal models on visual text localization and reasoning. *Advances in Neural Information Processing Systems*, 38, 2026.
- [33] Gengluo Li, Pengyuan Lyu, Chengquan Zhang, Huawen Shen, Liang Wu, Xingyu Wan, Gangyan Zeng, Han Hu, Can Ma, and Yu Zhou. Towards real-world document parsing via realistic scene synthesis and document-aware training, 2026.
- [34] Changda Zhou, Ziyue Gao, Xueqing Wang, Tingquan Gao, Cheng Cui, Jing Tang, and Yi Liu. Real5-omnidocbench: A full-scale physical reconstruction benchmark for robust document parsing in the wild, 2026.
- [35] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, et al. Self-refine: Iterative refinement with self-feedback. *Advances in neural information processing systems*, 36:46534–46594, 2023.
- [36] Gyuho Shim, Seongtae Hong, and Heui-Seok Lim. Revise: A framework for revising ocred text in practical information systems with data contamination strategy. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 6: Industry Track)*, pages 1423–1434, 2025.
- [37] Yulong Zhang, Tianyi Liang, Xinyue Huang, Erfei Cui, Guoqing Wang, Xu Guo, Chenhui Li, and Gongshen Liu. Consensus entropy: Harnessing multi-vlm agreement for self-verifying and self-improving ocr, 2025.
- [38] Jiarui Zhang, Yuliang Liu, Zijun Wu, Guosheng Pang, Zhili Ye, Yupei Zhong, Junteng Ma, Tao Wei, Haiyang Xu, Weikai Chen, et al. Monkeyocr v1. 5 technical report: Unlocking robust document parsing for complex patterns, 2025.
- [39] Qintong Zhang, Junyuan Zhang, Zhifei Ren, Linke Ouyang, Zichen Wen, Junbo Niu, Yuan Qu, Bin Wang, Ka-Ho Chow, Conghui He, et al. Docr-inspector: Fine-grained and automated evaluation of document parsing with vlm, 2025.
- [40] Ziyu Liu, Shengyuan Ding, Xinyu Fang, Xuanlang Dai, Penghui Yang, Jianze Liang, Jiaqi Wang, Kai Chen, Dahua Lin, and Yuhang Zang. Visual-erm: Reward modeling for visual equivalence, 2026.
- [41] Maksym Lysak, Ahmed Nassar, Nikolaos Livathinos, Christoph Auer, and Peter Staar. Optimized table tokenization for table structure recognition. In *International Conference on Document Analysis and Recognition*, pages 37–50. Springer, 2023.
- [42] Haoran Wei, Yaofeng Sun, and Yukun Li. Deepseek-ocr 2: Visual causal flow, 2026.
- [43] Youyang Yin, Huanhuan Liu, Qunyi Xie, Chaorun Liu, Shiqi Yang, Shaohua Wang, Zhanlong Liu, Hao Zou, Jinyue Chen, Shu Wei, et al. Unlimited ocr works, 2026.

- [44] Kun Yin, Yunfei Wu, Bing Liu, Zhongpeng Cai, Xiaotian Li, Huang Chen, Xin Li, Haoyu Cao, Yinsong Liu, Deqiang Jiang, et al. Youtu-parsing: Perception, structuring and recognition via high-parallelism decoding, 2026.

A TableParseMap: Construction and Fine-Grained Analysis

This section supplements the main paper with detailed descriptions of the benchmark construction and annotation protocol, complete category-wise results, and corresponding examples covering all five challenging scenarios and nine parser error types.

Benchmark Construction and Annotation

Scope and purpose. TableParseMap is a diagnostic benchmark containing 916 manually selected and annotated real-world table images. It is designed to reveal both where table parsers struggle and how they fail.

At the benchmark level, TableParseMap provides two complementary diagnostic views: five challenging scenarios and nine representative parser failure types. To avoid overlapping evaluation subsets and cross-category contamination, each image is assigned exactly one canonical label according to its dominant difficulty factor. The 14 category-level subsets are therefore mutually exclusive.

Construction. We construct TableParseMap through a systematic review of errors produced by multiple strong table parsers, including MinerU2.5-Pro, Qwen3.5-397B-A17B, PaddleOCR-VL-1.6, and GLM-OCR. Their outputs are manually compared with the corresponding table images to identify recurring visual conditions and failure patterns. Multi-model outputs are used to discover failure-prone samples and consolidate recurring phenomena. The final samples and labels are manually selected according to the dominant factor.

Ground-truth annotation and quality control. Ground-truth HTML is manually annotated from the source table images. Annotators recover the row-column organization, header hierarchy, merged-cell relations, and cell content. Each annotation is then manually reviewed against the original image by another annotator. Disagreements or annotation errors are corrected during review, while incomplete, duplicated, or visually ambiguous samples are removed. Before evaluation, the final annotations are normalized into a consistent HTML representation. Sensitive information is masked during curation, and the redacted samples are manually checked to ensure that masking does not remove content or structural evidence required for evaluation.

Where Parsers Struggle: Scenarios

The five scenario subsets characterize complementary challenges arising from visual quality, implicit structural cues, table scale, layout irregularity, and local homogeneity. Their definitions and distributions are summarized in Table 5.

How Parsers Fail: Error Types

The nine failure types are divided into structural and textual errors. Structural errors affect table topology, cell organization, or row-column correspondence and therefore often have a substantial impact on downstream usability. Textual errors are assigned only when the table structure is essentially correct and the primary failure lies in cell-content recognition.

Structural-first annotation rule. When structural and textual symptoms co-occur, TableParseMap follows a structural-first rule. Any failure that changes row, column, cell, alignment, omission, repetition, or span relations is assigned to the structural group, even when text is consequently missing or misplaced. A textual label is used only when the table structure remains correct and the dominant error lies in the recognized cell content. When multiple difficulty factors are present, annotators select

Scenario	Samples	Definition
Degraded Tables	66	Table images are affected by quality degradation such as blur, low resolution, compression artifacts, background interference, or geometric distortion. These factors weaken the visibility of text, boundaries, and alignment cues, increasing the risk of content-recognition errors, structural reconstruction failures, and omissions.
Implicit Semantic Tables	52	Tables lack complete and explicit borders, and their row-column organization must be inferred not only from textual semantics but also from whitespace, text alignment, partial separators, and the plausibility of the overall layout. Local visual cues may be misleading, requiring global structural and semantic reasoning to determine the correct cell correspondences.
Large-Scale Tables	51	Tables have large spatial dimensions, many rows or columns, or highly dense content. Their scale may exceed the model’s limited input resolution, visual-token budget, or effective perceptual range, resulting in omitted content, row-column misalignment, or incomplete structural reconstruction.
Irregular Tables	52	Tables deviate from conventional grid structures and may contain complex headers, asymmetric layouts, nested relations, local subtables, or unusual merged-cell patterns. The absence of stable structural regularities makes their row-column organization and hierarchy difficult to recover.
High-Homogeneity Tables	57	Neighboring rows, columns, cell contents, or blank regions exhibit highly similar and repetitive visual or textual patterns. Such homogeneity makes counting and correspondence difficult, frequently leading to misalignment, omission, or repeated output.
Total	278	

Table 5: The five mutually exclusive scenario subsets in TableParseMap.

the factor that most directly explains the dominant parsing difficulty. This single-label design prevents the same sample from being counted repeatedly across correlated categories.

Upon publication, we will release the TableParseMap annotations, category definitions, benchmark manifests, and evaluation code.

Complete Fine-Grained Results

Table 2 reports results on all 916 TableParseMap samples, including the two aggregate output-error groups and all five challenging input scenarios. We further decompose the structural- and textual-error groups into five structural error types and four textual error types in Tables 7 and 8, respectively. All +DEC rows use Qwen3.5-397B-A17B as the controller with VC-Gate routing.

The aggregate results reveal distinct parser-specific capability profiles. MinerU2.5-Pro performs best among direct parsers overall and on both aggregate error groups, while Qwen3.5-397B performs strongly on Implicit Semantic and Large-Scale Tables. DEC improves all three frozen parsers overall, with its gains concentrated primarily on structural errors and difficult large-scale inputs.

The error-type results provide a more detailed view of these improvements. As shown in Table 7, DEC substantially improves repetition and merged-cell errors across the frozen parsers. PaddleOCR-VL-1.6 improves on all five structural error types, while GLM-OCR obtains particularly large gains on misalignment and repetition. For MinerU2.5-Pro, the largest structural gains occur on repetition and merged-cell errors.

In contrast, the textual-error results in Table 8 are more mixed. DEC improves most textual categories

Group	Error Type	Samples	Definition
Structural Errors	Misalignment	54	The table content is largely preserved without clear omission or redundancy, but is assigned to an incorrect row, column, or cell position.
	Omission	52	One or more cells, rows, columns, or local table regions visible in the source image are missing from the parsed output.
	Redundancy	50	The parsed output introduces additional cells, rows, columns, structural regions, or content that are not supported by the source image.
	Repetition	46	The same source cell, row, column, or table fragment is generated more than once. Although repetition can be regarded as a specific form of redundancy, it is treated separately because of its distinctive appearance and diverse triggering conditions.
	Merged-cell Error	105	The parser reconstructs rowspan, colspan, or other merged-cell relations incorrectly, including under-merging, where cells that should be merged remain separated, and over-merging, where distinct cells are incorrectly merged.
Textual Errors	Formula Error	154	Mathematical formulas, their internal structures, subscripts, superscripts, operators, or formula symbols are recognized incorrectly.
	Special-symbol Error	87	Special symbols, dashed or underlined content, list markers, units, or uncommon characters are omitted, substituted, or confused, such as confusion between <code></code> and punctuation.
	Plain-text Error	36	Ordinary text, numbers, or punctuation are recognized incorrectly while the table structure and cell correspondence remain correct. This category includes errors involving handwriting, uncommon characters, character deformation, and other general OCR failures.
	Line-break Error	54	Line breaks, paragraph boundaries, or multi-line organization within a cell are reconstructed incorrectly, such as splitting text that should remain continuous or merging numbered items that should remain on separate lines.
Total		638	

Table 6: The nine mutually exclusive parser failure types in TableParseMap. Structural errors affect table topology or the correspondence between content and cells, whereas textual errors occur when the table structure is essentially correct but the content within cells is recognized or organized incorrectly. The benchmark contains 307 structural-error samples and 331 textual-error samples.

for PaddleOCR-VL-1.6 and GLM-OCR, but slightly reduces MinerU2.5-Pro on formula, plain-text, and line-break errors. This explains the small regression of MinerU2.5-Pro on the aggregate textual-error group and indicates that inference-time intervention is more consistently beneficial for structural recovery than for already strong text recognition.

Representative Cases

Figures 4 and 5 provide representative examples of all nine parser failure types in TableParseMap. Each case contrasts the source table with a parser output, while the highlighted regions indicate the dominant discrepancy used for category assignment.

As illustrated in Figure 5, textual categories are assigned only when the table structure and cell correspondence remain essentially correct. The distinction therefore depends on the affected content representation: formulas preserve their special internal syntax, special-symbol errors concern non-standard visual tokens, plain-text errors cover general character recognition, and line-break errors alter the organization of otherwise recognized multi-line content.

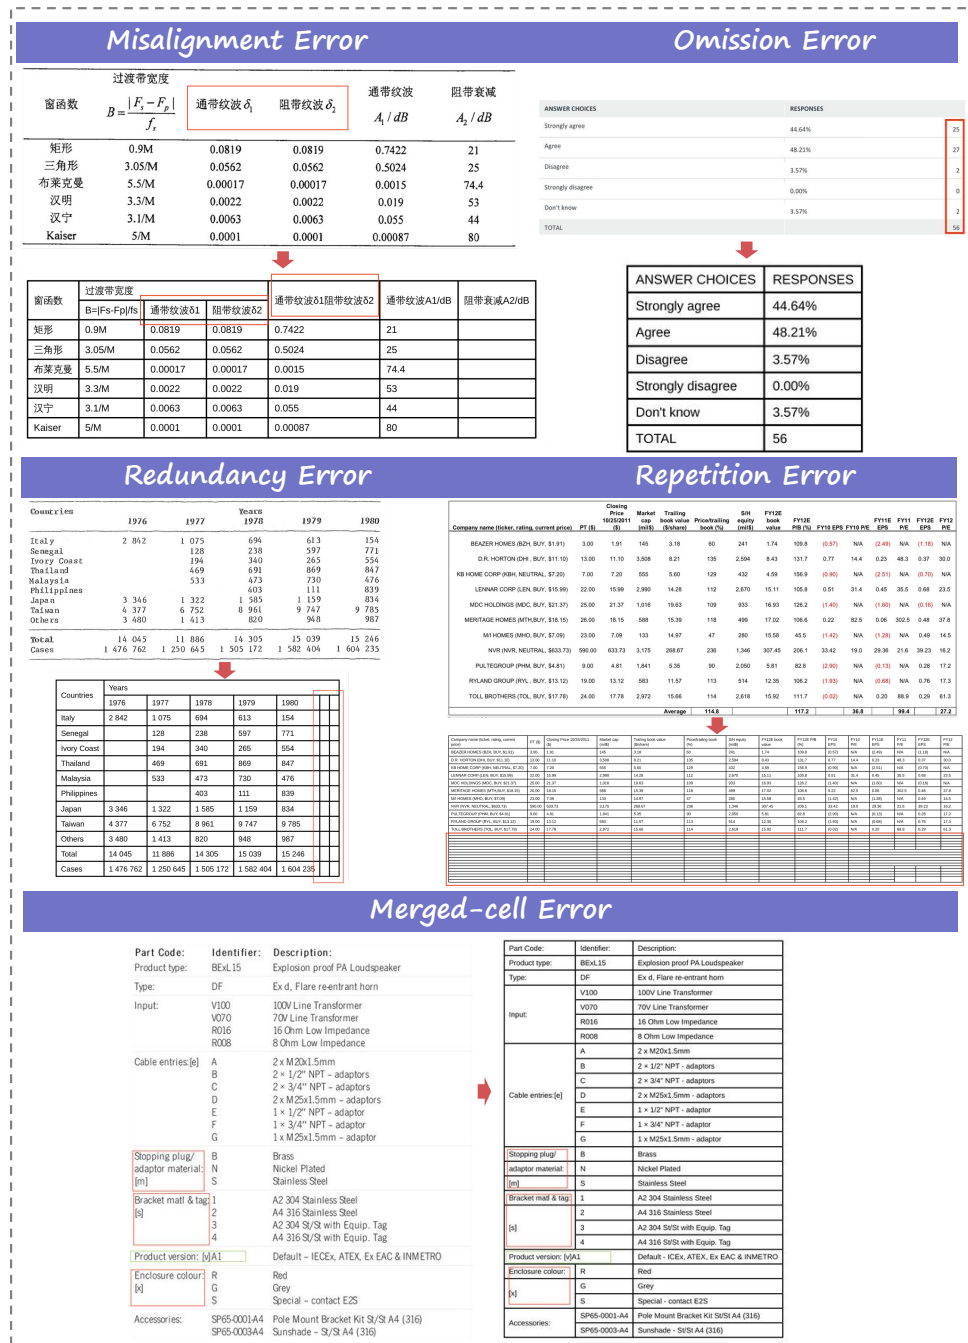


Figure 4: Representative cases of the five structural-error types in TableParseMap. Misalignment preserves most table content but assigns it to incorrect rows, columns, or cells. Omission removes visible cells or structural regions, whereas Redundancy introduces content or structure unsupported by the source image. Repetition emits the same source region more than once. Merged-cell Error incorrectly recovers cell-span relations through under-merging or over-merging. Highlighted regions mark the dominant structural discrepancy in each example.

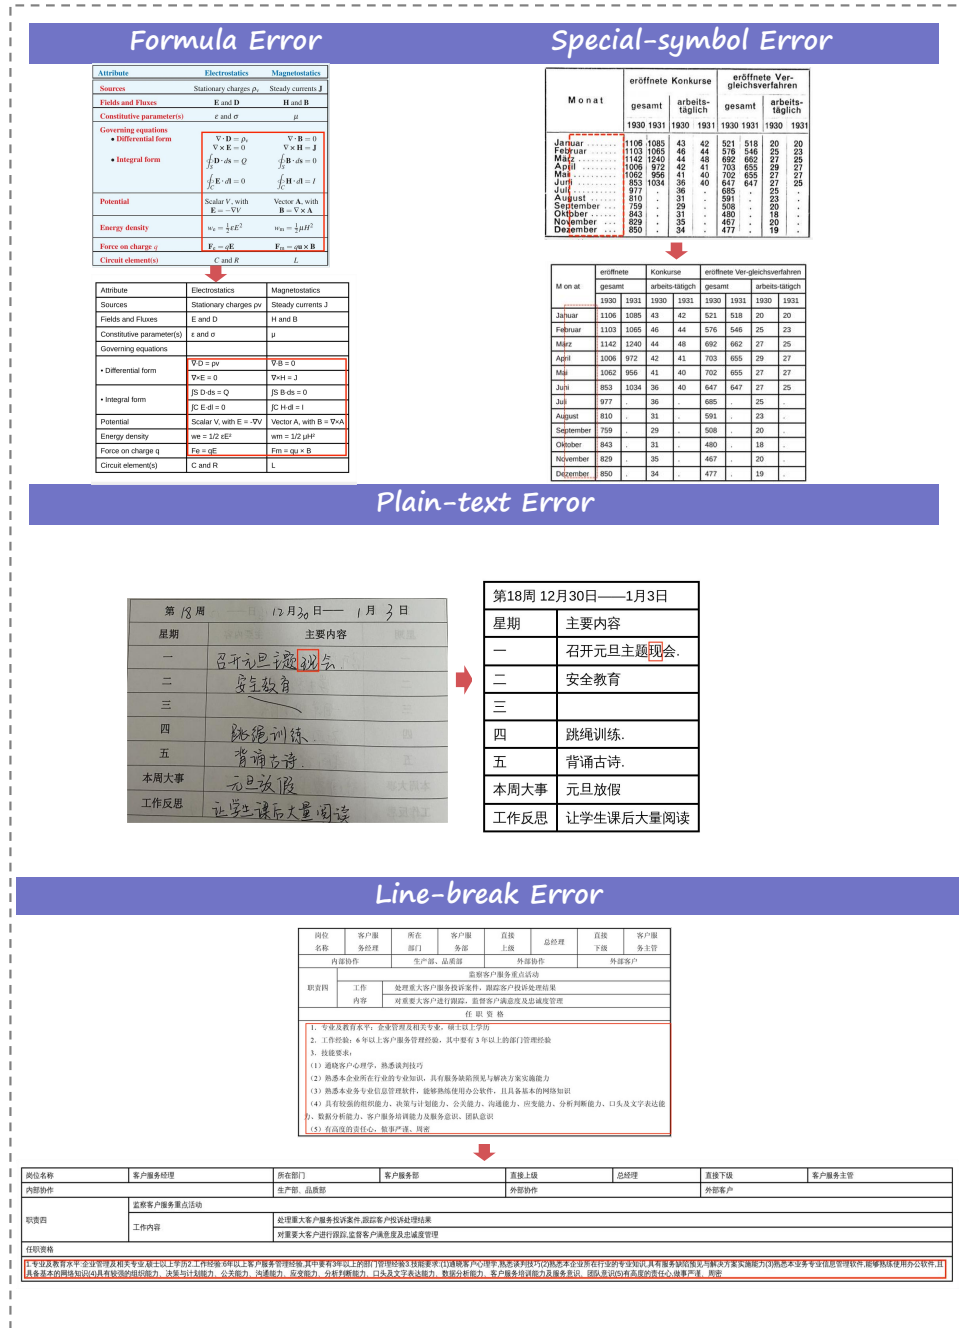


Figure 5: Representative cases of the four textual-error types in TableParseMap. Formula Error covers incorrect transcription of mathematical expressions or their internal structure. Special-symbol Error includes omitted or confused symbols, markers, underlines, and other uncommon characters. Plain-text Error captures ordinary OCR failures involving text, numbers, punctuation, or handwritten content. Line-break Error concerns incorrect organization of multi-line content within an otherwise structurally correct cell. Highlighted regions indicate the corresponding content-recognition error.

Parser	Misalignment (N = 54)	Omission (N = 52)	Redundancy (N = 50)	Repetition (N = 46)	Merged-cell Error (N = 105)
MinerU2.5-Pro	87.30/90.01	87.10/90.80	<u>89.91/91.90</u>	<u>84.69/87.16</u>	80.39/84.73
PaddleOCR-VL-1.6	85.52/89.79	83.21/87.96	85.80/89.43	77.96/82.83	79.58/84.20
GLM-OCR	79.20/82.64	83.85/88.47	86.23/88.58	77.28/81.31	78.23/82.39
Qwen3.5-397B	80.60/85.18	83.19/87.17	77.29/81.01	35.45/36.04	79.61/84.70
Qwen3.5-35B	86.91/ <u>90.46</u>	82.37/86.18	87.68/91.60	83.20/85.18	80.31/85.19
DeepSeek-OCR-2	57.93/66.38	64.23/71.98	58.50/64.39	33.37/38.09	59.92/68.40
Unlimited-OCR	72.81/77.73	73.37/77.61	70.97/75.89	57.26/63.19	63.16/68.09
Youtu-Parsing	83.62/87.71	81.31/85.57	83.91/87.61	66.32/72.21	78.39/83.97
MinerU2.5-Pro + DEC	<u>87.50/90.08</u>	<u>87.07/90.99</u>	90.92/92.57	87.38/89.66	83.69/88.22
PaddleOCR-VL-1.6 + DEC	87.83/91.63	84.55/89.48	89.25/91.63	81.72/86.02	<u>82.17/86.78</u>
GLM-OCR + DEC	85.57/88.81	84.64/89.04	86.93/88.79	82.56/ <u>87.17</u>	82.05/86.13

Table 7: Complete TEDS/TEDS-S results on the five structural-error types in TableParseMap. +DEC uses Qwen3.5-397B with VC-Gate. Best and second-best values are bold and underlined, respectively.

Parser	Formula Error (N = 154)	Special-symbol Error (N = 87)	Plain-text Error (N = 36)	Line-break Error (N = 54)
MinerU2.5-Pro	85.32/94.76	<u>84.32/89.46</u>	86.13/94.22	91.37/93.12
PaddleOCR-VL-1.6	85.12/93.34	79.15/85.58	80.66/89.29	85.26/ <u>87.63</u>
GLM-OCR	81.57/91.13	79.64/85.82	80.36/90.10	85.73/87.51
Qwen3.5-397B	80.10/90.81	77.52/83.74	76.41/84.11	84.44/86.22
Qwen3.5-35B	80.62/89.77	75.09/80.98	82.22/87.66	78.45/81.63
DeepSeek-OCR-2	63.83/75.60	55.57/62.00	59.38/72.18	61.74/66.97
Unlimited-OCR	67.00/77.85	48.56/53.20	66.70/73.24	71.51/73.73
Youtu-Parsing	80.02/91.69	71.67/77.98	72.37/82.47	79.20/82.02
MinerU2.5-Pro + DEC	84.98/ <u>94.57</u>	84.59/89.71	<u>84.87/92.83</u>	<u>91.31/93.12</u>
PaddleOCR-VL-1.6 + DEC	<u>85.13/93.82</u>	80.55/86.59	81.42/89.57	85.36/ <u>87.63</u>
GLM-OCR + DEC	83.44/93.24	79.75/86.43	81.31/90.47	85.29/87.25

Table 8: Complete TEDS/TEDS-S results on the four textual-error types in TableParseMap. +DEC uses Qwen3.5-397B with VC-Gate. Best and second-best values are bold and underlined, respectively.

B Training and Evaluation Details

Evaluation Protocol and Metrics

Evaluation settings. We use three evaluation sets for complementary purposes. The main comparison is conducted on the 1,977-table Consensus-Hard Set, which focuses on samples that remain difficult for multiple heterogeneous parsers. Fine-grained behavior analysis is performed on the complete 916-table TableParseMap. Routing and efficiency are evaluated on the complete six-source evaluation pool of 4,556 tables, using PaddleOCR-VL-1.6 as the base parser.

The evaluation pool contains six sources: CCOCR, the In-house TR Benchmark, OCRBenchv2, TableParseMap, Real5, and Wild. CCOCR and OCRBenchv2 are established public benchmarks. Real5 and Wild originate from page-level OmniDocBench data rather than isolated table images; MinerU and PP-DocLayoutV3 are used to detect table regions, and GPT-5.2 assists in verifying crop completeness and crop-HTML correspondence.

Source	Source Pool	Selected
CCOCR	300	118
OCRBenchv2	694	259
In-house TR	413	278
TableParseMap	916	602
Real5	1,902	614
Wild	331	106
Total	4,556	1,977

Table 9: Source composition of the Consensus-Hard Set.

DEC evaluation configuration. We evaluate DEC with MinerU2.5-Pro, PaddleOCR-VL-1.6, and GLM-OCR as frozen base parsers. Unless otherwise stated, Qwen3.5-397B-A17B is used as the frozen controller. The controller adopts deterministic decoding with reasoning mode disabled. For each table or decomposed region, Enhance invokes four evidence-preserving tools, while Correct performs at most three repair rounds. A candidate update is accepted only when its VC-Ranker score exceeds that of the current result by a margin of $\delta = 0.05$; otherwise, the previous result is retained. The same margin is used to verify merged outputs when Decompose is activated.

Consensus-Hard construction. We run MinerU2.5-Pro, PaddleOCR-VL-1.6, GLM-OCR, and Qwen3.5-397B-A17B on every candidate in the 4,556-table source pool. For sample I , let $m_j(I)$ denote the TEDS score obtained by the j -th parser. A sample is selected when at least two parsers score below 0.90:

$$h(I) = \mathbb{I} \left[\sum_{j=1}^4 \mathbb{I} (m_j(I) < 0.90) \geq 2 \right] \quad (9)$$

Requiring failure from multiple heterogeneous parsers reduces the influence of an isolated model-specific weakness. Table 9 reports the final source composition.

TEDS and TEDS-S. TEDS measures similarity between the tree representations of the predicted and ground-truth HTML tables [30]. Let T_{pred} and T_{gt} denote the corresponding trees and $d_{\text{tree}}(\cdot, \cdot)$ their tree-edit distance. We compute

$$\text{TEDS} = 1 - \frac{d_{\text{tree}}(T_{\text{pred}}, T_{\text{gt}})}{\max(|T_{\text{pred}}|, |T_{\text{gt}}|)} \quad (10)$$

TEDS jointly reflects table structure and cell content. TEDS-S uses the same normalized tree-edit formulation but removes cell-text differences, thereby focusing on row-column organization, node presence, and rowspan/colspan relations. Both metrics range from 0 to 1 and are multiplied by 100 in all reported tables.

Before scoring, predicted and ground-truth HTML are normalized into the same canonical representation. For a dataset $\mathcal{D}$ containing N samples, the reported score is

$$M(\mathcal{D}) = \frac{100}{N} \sum_{i=1}^N M_i, \quad M \in \{\text{TEDS}, \text{TEDS-S}\} \quad (11)$$

(a) Decomposition Strategy			(b) Enhancement Strategy		
Strategy	TEDS / TEDS-S	Gain over No Split	Strategy	TEDS / TEDS-S	Gain over No Enhance
		TEDS / TEDS-S			TEDS / TEDS-S
No Split	82.565 / 88.841	–	No Enhance	67.791 / 78.128	–
Fixed Split	81.960 / 87.569	−0.605 / −1.272	Agent Selective	68.323 / 78.548	+0.532 / +0.420
Agent-Guided Split	87.268 / 92.167	+4.703 / +3.326	Always Apply All	65.980 / 76.538	−1.811 / −1.590

Table 10: Ablations of agent-guided control. (a) Decomposition strategies on the 51-table Large-Scale subset. (b) Enhancement strategies on the Consensus-Hard Set. All experiments use PaddleOCR-VL-1.6 with Qwen3.5-397B-A17B.

For Consensus-Hard, Overall is the sample-weighted average over all 1,977 samples, so each table contributes equally regardless of its source subset.

Efficiency accounting. The *DEC trigger rate* is the proportion of inputs routed beyond the initial parser result. *Extra parser calls per input* exclude the initial whole-image parsing call shared by the parser-only baseline and DEC, and count additional calls caused by decomposition or reparsing transformed views. *Controller calls per input* count actual invocations of the general VLM during Decompose, Enhance, and Correct. Stage-wise invocation statistics report the actual number of Enhance tool calls and Correct diagnosis/repair rounds, rather than their maximum permitted budgets.

Training of VC-Gate and VC-Ranker

Both VC-Gate and VC-Ranker are initialized from Qwen3-VL-8B-Instruct and trained through full-parameter optimization. Both models are trained for three epochs on eight GPUs with a per-device batch size of one. We use AdamW with a base learning rate of 1×10^{-5} , a vision-encoder learning rate of 1×10^{-6} , a weight decay of 0.01, and cosine decay. Training uses BF16 precision and DeepSpeed ZeRO-3.

VC-Gate is trained as a binary visual-consistency classifier on approximately 44K image-render examples. Candidates with offline TEDS at least 0.95 are treated as positive examples, candidates below 0.85 are treated as negative examples, and candidates in the ambiguous interval $[0.85, 0.95)$ are excluded. VC-Ranker is trained as a scalar reward model on approximately 21K pairwise comparisons using a Bradley-Terry ranking objective. Candidate pairs are constructed from different predictions of the same reference table, and only pairs whose TEDS scores differ by at least 0.20 are retained. The higher-scoring candidate is treated as the preferred result.

For both corpora, 1% of the data is held out for validation. All candidates derived from the same reference image are assigned to the same split, preventing reference-image overlap between training and validation.

C Agent-Guided Control

As shown in Table 3(a), both Decompose and Enhance provide incremental gains to the complete framework. We further examine whether these gains arise from informed agent decisions or merely from applying splitting and enhancement operations.

Agent-guided decomposition. Table 10(a) examines whether the benefit of Decompose comes from splitting itself or from selecting safe structural boundaries. On the same 51 large tables, fixed splitting decreases TEDS and TEDS-S by 0.605 and 1.272 points, respectively, indicating that mechanical partitioning can cut through local content or disrupt cross-region structure. In contrast, agent-guided

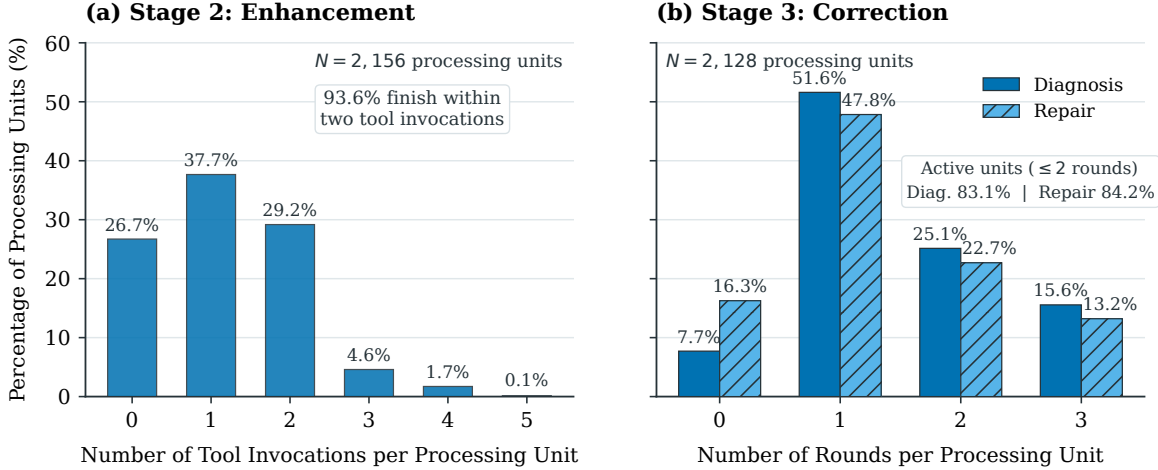


Figure 6: Distribution of the actual computation executed by Enhance and Correct. A processing unit is either an unsplit table or a region produced by Decompose. Left: enhancement-tool invocations. Right: diagnosis and repair rounds during Correct. Percentages above the bars are computed over all processing units; the right-panel annotation reports proportions among active units.

splitting improves the unsplit baseline by 4.703 TEDS and 3.326 TEDS-S points and outperforms fixed splitting by 5.307 and 4.598 points. Effective decomposition therefore depends on visual reasoning over the table structure rather than merely reducing the image size.

Agent-guided enhancement. Table 10(b) evaluates whether Enhance benefits from selective tool use rather than image transformation alone. Starting from the same Stage-2 inputs, Agent Selective improves No Enhance by 0.532 TEDS and 0.420 TEDS-S points. Applying all enhancement tools indiscriminately instead reduces the scores by 1.811 and 1.590 points, causing Agent Selective to outperform it by 2.343 TEDS and 2.010 TEDS-S points. Visual transformations are therefore not universally beneficial; the controller must match each tool to the available visual evidence and avoid unnecessary intervention.

D Routing and Efficiency Analysis

VC-Gate Routing

Table 4 compares parser-only execution, Always-on DEC, and VC-Gate routing on the complete 4,556-table pool.

VC-Gate triggers DEC on only 43.0% of inputs while retaining 97.5% of the TEDS gain and 97.8% of the TEDS-S gain achieved by Always-on DEC. Relative to always-on execution, routing reduces extra parser calls by 47.3% and controller calls by 34.9%. The remaining differences of only 0.036 TEDS and 0.027 TEDS-S show that most reliable first-pass outputs can bypass further intervention without sacrificing the overall benefit of DEC.

Stage-Wise Invocation Statistics

Beyond input-level routing, we measure how frequently the controller terminates Enhance and Correct before reaching their maximum budgets.

As shown in Figure 6, 26.7% of the 2,156 Enhance processing units require no image transformation, while 37.7% and 29.2% terminate after one and two tool invocations, respectively. Thus, 93.6% finish within at most two invocations, only 6.4% require more than two, and 0.1% reach the maximum budget of five. The controller therefore usually identifies a useful transformation or terminates the stage without exhausting the available tools.

Correct exhibits a similar early-stopping pattern over 2,128 processing units. One round is the most common outcome, accounting for 51.6% of diagnosis sequences and 47.8% of repair sequences. Only 15.6% and 13.2% reach the maximum of three diagnosis and repair rounds, respectively. Among units on which the corresponding operation is activated, 83.1% of diagnosis sequences and 84.2% of repair sequences finish within two rounds. Together with VC-Gate routing, these results show that DEC concentrates computation on difficult inputs while usually terminating well before its maximum inference budget.

E Limitations and Future Work

DEC incurs additional parser and controller calls compared with direct parsing, although VC-Gate substantially reduces unnecessary intervention. Its effectiveness also depends on the reliability of VC-Gate and VC-Ranker and on the fidelity of HTML rendering, which may cause beneficial candidates to be rejected or harmful updates to be accepted. Moreover, TEDS-based metrics may over-penalize local structural deviations that have limited impact on readability or downstream utility. Future work will investigate lighter controllers, stronger visual-consistency models, finer-grained tool-routing policies, and evaluation protocols that jointly consider structural accuracy, visual fidelity, and task utility.

F DEC Tool Implementation Details

DEC uses one decomposition tool in Stage 1 and four visual-intervention tools in Stage 2. Table 11 summarizes the tools in experiments. Stage 3 does not invoke an external tool; instead, the controller directly diagnoses and edits the current structured prediction.

Structure-aware decomposition. The `split_table` tool is considered when the estimated table scale exceeds a predefined threshold. Rather than applying a fixed cut, the controller inspects the table layout and adjusts candidate boundaries to avoid cutting through rows, cells, or spanning structures. Each resulting region independently passes through Enhance and Correct. The final regional HTML predictions are converted to OTSL, vertically aligned, and merged into a complete table. For decomposed inputs only, the merged prediction is finally compared with the immutable whole-image baseline, and the baseline is retained when the merge cannot be reliably verified.

Reference–working view separation. Stage 2 maintains an immutable reference image I^{ref} and a mutable working image I^{work} . At each round, the controller either selects one enhancement tool or terminates the stage, with at most five tool invocations per processing unit. After a tool modifies I^{work} , the frozen base parser is immediately rerun to produce a new HTML candidate. The current and proposed predictions are rendered, and VC-Ranker compares both candidates against the same immutable reference image. A proposal is committed only when

$$s_{\text{proposal}} > s_{\text{current}} + \delta, \quad (12)$$

where δ follows the acceptance margin specified in the final evaluation configuration. Otherwise, both the image and HTML are rolled back to the previous accepted state. The controller receives

Stage	Tool	Purpose	Main implementation
Decompose	<code>split_table</code>	Partitions large tables into locally tractable regions.	Estimates table scale, lets the controller inspect and adjust candidate split boundaries.
Enhance	<code>semantic_scaffold</code>	Makes implicit semantic regions more explicit.	The controller proposes normalized regions corresponding to headers, section rows, stub columns, or metric groups. The regions are indicated by translucent overlays.
Enhance	<code>table_roi_refiner</code>	Removes irrelevant context outside the table.	The controller predicts a table bounding box, optional padding, and exclusion regions.
Enhance	<code>image_quality_normalizer</code>	Improves weak contrast and locally degraded visual evidence.	Applies image statistics, automatic contrast adjustment, and mild sharpening when the measured visual quality is insufficient; otherwise, it returns the input unchanged.
Enhance	<code>cell_anchor</code>	Disambiguates repetitive rows and visually similar cells.	Detects a grid, recognizes selected cells, temporarily replaces their contents with unique anchors, reparses the modified image, and restores the original contents in the resulting HTML.

Table 11: Tools enabled in theDEC experiments.

only a compact execution history containing the selected tool, its arguments, a result summary, the consistency scores, and the acceptance decision.

Enhancement tools. The `semantic_scaffold` tool introduces sparse visual cues for semantically meaningful regions but does not insert textual labels or directly edit HTML. The `table_roi_refiner` removes only clearly irrelevant context outside the table; near-full-image crops are treated as no-ops, while excessively small or incomplete regions are rejected. The `image_quality_normalizer` is a image-processing procedure. It uses image statistics to determine whether automatic contrast adjustment or mild sharpening is required.

The `cell_anchor` tool targets tables with repetitive or visually ambiguous cells. It constructs candidate cell regions, and temporarily replaces a small number of reliably recognized cells with unique markers. After reparsing, the markers are replaced with their original contents in HTML. The complete proposal is rejected when an expected marker is missing, duplicated, or cannot be restored unambiguously.