

DISTMoE: Private-data Rehearsal-free Routing in Mixture-of-Experts for Distributed Instruction Tuning

Mainak Singha¹ Niccolò Biondi¹ Elisa Ricci^{1,2} Subhankar Roy³

¹University of Trento, Italy ²Fondazione Bruno Kessler, Italy

³University of Bergamo, Italy

{mainak.singha, niccolo.biondi, e.ricci}@unitn.it, subhankar.roy@unibg.it

Abstract

Multimodal Large Language Models (MLLMs) have shown strong multimodal instruction-following ability, but adapting them to diverse visual-language domains typically assumes centralized data access and costly joint training. This is restrictive when data is distributed across private, domain-specific, or permission-limited clients. To this end, we propose DISTMoE, a mixture-of-experts (MoE) approach for distributed visual instruction tuning. In each layer of the language decoder it augments the public feedforward network (FFN) with a client-specific private FFN expert, with the goal to acquire domain-specific knowledge. However, independent expert training causes the private FFNs to learn representation of different scale and magnitudes, making merging the experts difficult. To reduce client-specific drift, we introduce a public-anchored expert composition stage that updates only routers and lightweight private projection adapters on a mix of *local* client data and public data, via an isotropic regularization loss, therefore making it *cross-client rehearsal-free composition*. During inference, DISTMoE performs modular routing over public and private experts, enabling token-wise domain composition without explicit domain labels. Experiments across diverse visual-language benchmarks show that DISTMoE enables flexible expert reuse, effective domain adaptation, and competitive performance while preserving modular control over client-specific knowledge. Codes are available at <https://github.com/mainaksingha01/DistMoE>.

1 Introduction

Multimodal Large Language Models (MLLMs) [2] have excelled in visual instruction following and reasoning by aligning visual encoders with Large Language Models (LLMs). These gains are often driven by scaling model size [3, 4] and augmenting visual instruction tuning data [5, 6]. Although impressive, such training paradigms present two challenges from training and deployment perspective: (i) a centralized access to all the training data, and (ii) high computation and memory costs during deployment. Thus, it calls for visual instruction tuning approaches that can be trained in a distributed manner and that result in models with a lower computational footprint during inference.

Mixture-of-Experts (MoE) approach [7, 8, 9] presents a promising solution towards this goal, as opposed to dense models, it allows to scale models while activating only a subset of the parameters (or *experts*) both during training and inference [1], as well as enables distributed training [10]. For example, MoE-LLaVA [1], MoE-based visual instruction tuning approach, have shown that sparse expert routing can improve MLLM efficiency while maintaining competitive visual understanding and reduced hallucination with fewer activated parameters than dense baselines. Despite the advantage, MoE-LLaVA assumes centralized access to training data and requires joint training of experts and routers (see Fig. 1). This assumption is restrictive, as visual instruction tuning data can be privately

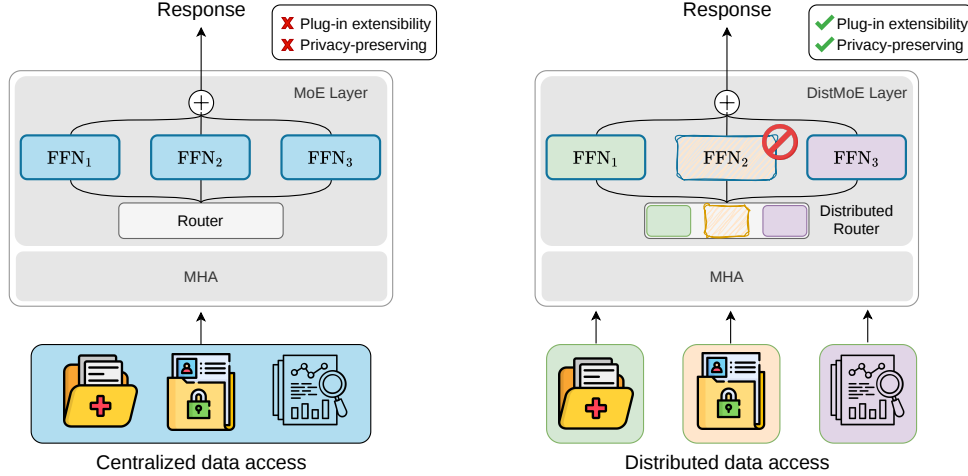


Figure 1: Centralized MoE tuning vs. DISTMOE. **Left:** Centralized MoE methods [1] rely on joint access to domain-specific data. **Right:** DISTMOE independently trains domain-specific private experts with distributed data access and composes them via a distributed router. This enables experts to be flexibly *added*, *removed*, or *reused* at inference time depending on the application needs

maintained [11]. Moreover, once such data is utilized to jointly train a MoE model in a centralized setup, it becomes difficult to control, remove, and selectively disable its influence during inference.

A set of works [10, 12, 13] takes an important step towards flexible data use in LLMs, by independently training experts on private *domain-specific* data slices (e.g., coding, maths, news) and merging them into a unified model through the MoE approach. In detail, a router is trained that learns to combine the domain-specific experts during inference. However, it still requires a *rehearsal* of a subset of the private data from all domains to learn the router, which can still be a bottleneck in extremely privacy-sensitive applications. While FlexOlmo [12] proposes a technique to merge the experts without further tuning the router, independent expert tuning can cause the experts to diverge making routing scores during inference not comparable. This issue can further be exacerbated in visual instruction tuning as it has been shown that a model can learn to ignore visual information [14].

In this work, we propose Distributed MoE (DISTMOE), a *cross-client rehearsal-free composition* MoE approach [7] for distributed visual instruction tuning (see Fig. 1). The novelty of DISTMOE lies in how each expert is trained, so that it later facilitates seamless merging of experts without using any rehearsal data. In detail, following FlexOlmo, we first independently train *private* experts, one per domain, by initializing it from a *public* model, to acquire domain-specific knowledge. However, different from FlexOlmo, during expert-training, we introduce a lightweight and privacy-preserving approach to ensure that the private expert remains anchored to the public expert that is shared across all the clients. This is enforced by imposing a Gaussian structure [15] on the residuals between the public and private feature representations in the intermediate layers of the Transformer. In addition, we calibrate the router using a mix of public and strictly client-specific private data. As a result, the representation and routing scores across domains become comparable, making merging straightforward during inference. The native MoE architecture endows flexibility to DISTMOE by enabling computation-efficient sparse routing and seamless exclusion of sensitive domain-specific knowledge during inference.

Our contributions are: *i)* We introduce DISTMOE, a MoE architecture-based approach, for distributed visual instruction tuning in MLLMs. *ii)* To facilitate seamless composition of knowledge across experts, we introduce a novel *cross-client rehearsal-free composition* technique that calibrates private experts and the associated router weights without relying on joint access to private data from all clients. *iii)* We conducted experiments on several multimodal evaluation benchmarks to evaluate in-domain and cross-domain generalization. Our results demonstrate the effectiveness and flexibility of DISTMOE.

2 Related Works

Visual instruction tuning, pioneered by LLaVA [16], has emerged as a successful recipe for building multimodal LLMs from pre-trained models for addressing tasks such as visual question answering (VQA). It aligns visual encoder (e.g., CLIP [17]) with LLM decoder (e.g., Vicuna [18]) using GPT generated instruction-following data [2]. However, methods like LLaVA relies on the assumption that all the instruction tuning data is available simultaneously. Instead, in real-world applications, introduction of new tasks and domains requires the model to learn dynamically over time. This has shifted the research focus towards Continual Visual Instruction Tuning (CVIT) [19, 20, 21, 22, 23, 24], where the goal is to learn continually while avoiding catastrophic forgetting by employing regularization techniques. A characteristic assumption made in CVIT is that tasks arrive sequentially and therefore, the employed regularization techniques are specifically designed towards striking a balance between stability and plasticity. We argue that as training becomes more and more decentralized on heterogeneous hardware [25], enforcing regularization while learning a new task is limiting and impractical. Moreover, as argued in the work [26], very often task boundaries cannot be clearly demarcated in vision-language tasks. Thus, we seek a more general and flexible framework that can enable *distributed* visual instruction tuning, where knowledge can be acquired independently and consolidated post-hoc without explicitly accounting for task type or arrival order.

Model merging provides a practical way to combine independently trained models into a unified system [27] without requiring access to raw training data or expensive computation. Existing methods mainly include weight averaging or output ensembling. Weight averaging approaches, such as Model Soups [28], combine models fine-tuned from the same initialization, while output ensembling methods, such as Branch-Train-Merge (BTM) [29], merge predictions from models trained independently in different domains. While model merging inherently offers more flexibility than regularization-based continual learning approaches, model merging is prone to interference between parameters of constituent models, resulting in performance drops [30]. To resolve this, additional steps are typically involved, such as selective merging or post-hoc fine-tuning. These additional steps introduce challenges in a purely distributed setup, where data is locally maintained.

Mixture-of-Experts (MoE) tuning, originally designed to scale deep networks [7] without increasing computation, dynamically selects feedforward networks or *experts* using Top-K routing scheme that activates only a fraction of the total number of parameters. It has been successfully applied to scale LLM training [9, 31], vision-language tasks [32, 33, 8, 1] and privacy-preserving learning [10, 12, 13]. For instance, MoE-LLaVA [1] extends MoE tuning to visual instruction tuning through training experts on different domains, but requires joint access to the union of all expert-training datasets. Similar to our setup, more privacy-friendly approaches, such as Branch-Train-Mix (BTX) [10], FlexOlmo [12] and BAR [13], were proposed that first independently train models and later combine them using MoE routing. However, all these approaches are designed for LLMs and assume access to *rehearsal* training data to learn the routing mechanism. In contrast, our proposed DISTMoE is specifically designed for distributed visual instruction tuning and is completely *cross-client rehearsal-free composition*.

3 Distributed Visual Instruction Tuning

3.1 Problem Formulation

Let $\mathcal{D} = \{(I_i, q_i, y_i) \mid i \in \mathbb{N}\}$ denote a dataset of image, a textual query, and the target answer tuples. In visual instruction tuning (e.g., LLaVA [16]), the goal is to jointly train and/or fine-tune pre-trained LLM, vision transformer (ViT) [17] and a multimodal projector to predict the target y given image and query (I, q) pair at the input. The prediction is defined as:

$$\hat{y} = f_{\theta}(I, q) = f_{\theta_{\text{llm}}}(f_{\theta_{\text{mm}}}(f_{\theta_{\text{vis}}}(I)), q), \quad (1)$$

where $f_{\theta_{\text{vis}}}$ is the vision encoder that processes the input image I , $f_{\theta_{\text{mm}}}$ is the multimodal projector, and $f_{\theta_{\text{llm}}}$ is the LLM decoder; and $\theta = \{\theta_{\text{vis}}, \theta_{\text{mm}}, \theta_{\text{llm}}\}$ are the parameters of the model f_{θ} .

Similar to [12], in distributed visual instruction tuning, we assume that the instruction tuning dataset $\mathcal{D} = \{\mathcal{D}_1, \dots, \mathcal{D}_M\}$ is a collection of locally maintained datasets, spread among M clients. Each client m is considered to possess *domain-specific* instruction tuning dataset $\mathcal{D}_m$ that is private. In addition, we assume access to a public dataset $\mathcal{D}_{\text{pub}}$ that is available to all clients. Our objective

is to obtain a single model f_θ that is constructed by combining the knowledge of the clients, each independently trained on $\mathcal{D}_m$, without requiring joint access to the private datasets.

3.2 Preliminaries

The idea of MoE [7, 9], originally designed to scale a LLM’s capacity without a proportional increase in computation, has been extended for visual instruction tuning in MoE-LLaVA [1]. The main goal remains the same: constructing a sparse multimodal model with high learning capacity but with a constant computational cost. We note that this setup in MoE-LLaVA lends well while learning from diverse instruction tuning datasets as one Feed Forward Network (FFN) or *expert*, in the LLM decoder, can specialize on each domain-specific dataset. Then, as in standard MoE, a learned router in the decoder can redirect the input tokens (both visual and text) to relevant domain experts.

More formally, let $\mathcal{V} = [v_1, \dots, v_P]$ denote the sequence of P tokens corresponding to the image I from the multimodal projector $f_{\theta_{\text{mm}}}$, and $\mathcal{T} = [t_1, \dots, t_N]$ be the sequence of N text tokens corresponding to the input query q . These tokens are concatenated and fed to the LLM decoder, which comprise of stacked multi-head self-attention (MSA) and FFN blocks. MoE-LLaVA additionally consists of a MoE layer, comprised of multiple expert FFNs and a router. Denoting the expert FFNs as $\mathcal{E} = [e_1, \dots, e_M]$; and the router, which is a linear layer, predicts the probability of each token being assigned to the i -th expert as:

$$\alpha_i = \text{softmax}(\mathbf{x})_i = \frac{\exp(g(\mathbf{x})_i)}{\sum_j^M \exp(g(\mathbf{x})_j)}, \quad (2)$$

where $\mathbf{x}$ denotes the intermediate representation of a token; $g(\mathbf{x})_i = \mathbf{x}^\top \mathbf{r}_i$ and $\mathbf{r}_i$ are the logit score and router weight corresponding to the i -th FFN, respectively. For each token in a sequence, the top- k highest probabilities are selected, which are then used to compute a weighted-sum representation as:

$$\mathbf{o} = \text{MoE}(\mathbf{x}) = \sum_{i=1}^k \alpha_i \cdot \mathcal{E}_i(\mathbf{x}), \quad (3)$$

where $\mathbf{o}$ is the output of the MoE layer. MoE-LLaVA trains both the experts and the router with next-token prediction and router balancing loss, in a *centralized* fashion, by having joint access to all the domain-specific datasets. However, joint access presents as a bottleneck in the distributed visual instruction tuning task. While in theory, each expert FFN $\mathcal{E}_m$ can be trained independently on $\mathcal{D}_m$, and later merged as in FlexOlmo [12], it still requires rehearsal of the private data to learn the router.

4 DISTMOE: Private-data Rehearsal-free Routing in MoE MLLMs

To support a more modular and privacy-preserving approach to visual instruction tuning, we propose DISTMOE, based on MoE architecture. The key idea behind DISTMOE is to train the experts on private data in a novel way, so that during inference the router does not need any additional training on the combined private data. We split the training phase in two stages: (i) In Stage-I (see Sec. 4.1.1) we acquire domain-specific knowledge by training a "two-expert" MoE network, where we initialize each private expert $\mathcal{E}_m$ from a public FFN $\mathcal{E}_{\text{pub}}$ trained on generic public data. (ii) In Stage-II (see Sec. 4.1.2) we calibrate routing of tokens, so that during inference, the experts can simply be merged to behave like a standard MoE router trained on all the domain-specific data jointly. Fig. 2 and Algorithm 1 in Appendix A summarizes the resulting training and inference procedure.

4.1 Training

Standard MoE training, as in MoE-LLaVA, trains experts on domain-specific datasets jointly. In the distributed setup, this is infeasible, and training experts in isolation can cause them to diverge from each other, making merging during inference difficult. While FlexOlmo proposes to use the public $\mathcal{E}_{\text{pub}}$ as an *anchor* to induce a coordination effect among private experts, we observe that private experts can still drift from the anchor, and thus from one another. To address this, as shown in Fig. 2, DISTMOE separates *expert knowledge acquisition* (i.e., Stage-I) from *expert composition* (i.e., Stage-II). Unless otherwise stated, private experts are trained within each layer of the decoder.

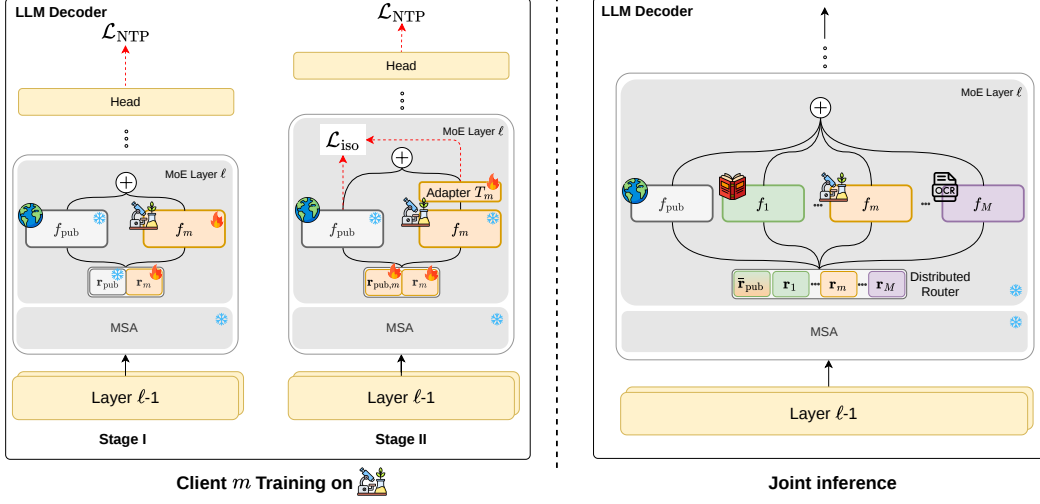


Figure 2: Overview of DISTMOE. **Left.** In Stage-I each client independently trains a private FFN by initializing from a shared public FFN. In Stage-II we freeze the experts, and recalibrate routing using isotropic residual regularization and next-token prediction loss utilizing a mix of public and private data. **Right.** At inference, DISTMOE composes the shared public expert and calibrated private experts through sparse routing without explicit domain labels.

4.1.1 Stage-I: Expert knowledge acquisition

Following FlexOlmo, we dedicate Stage-I to accomplish two goals: (i) acquire domain-specific knowledge on a private dataset $\mathcal{D}_m$, and (ii) prepare the experts to coordinate with each other. More specifically, we construct a MoE model with two experts: a public FFN $\mathcal{E}_{\text{pub}}$ and a private FFN $\mathcal{E}_m$ initialized from pre-trained $\mathcal{E}_{\text{pub}}$. During training, we freeze the parameters of the attention layers and $\mathcal{E}_{\text{pub}}$, and update only the private expert and its corresponding router parameters using the next-token prediction loss $\mathcal{L}_{\text{NTP}}$ on $\mathcal{D}_m$. As a result, for a token with hidden state $\mathbf{x}$, the router learns to predict the probability of being assigned to the public or private expert. The MoE layer output is given as:

$$\mathbf{o} = \alpha_{\text{pub}} \mathcal{E}_{\text{pub}}(\mathbf{x}) + \alpha_m \mathcal{E}_m(\mathbf{x}), \quad (4)$$

where α_{pub} and α_m are the probabilities of being assigned to the public and private experts, respectively. Intuitively, the public expert $\mathcal{E}_{\text{pub}}$ serves as a shared anchor for all experts, while the two-way router learns a mechanism that enables their integration into a unified MoE architecture.

While Stage-I leads to knowledge acquisition, empirically, we found that this approach introduced by FlexOlmo still falls short of producing optimal routers for joint inference across all domains. We hypothesize that this occurs for two reasons. *First*, the public router is never trained on public data, and thus, cannot sufficiently distinguish between information sources. *Second*, Eq. (4) cannot guarantee that the outputs $\mathbf{o}$ from different clients will intrinsically have compatible magnitudes or directions. As a result of this, it makes the private router scores across clients not comparable.

4.1.2 Stage-II: Expert composition

In Stage-II we address the mismatch of router scores across clients. While a straightforward approach is to collect a small subset of private data from each client to fine-tune the merged router [12, 10], we do so *without* collecting private data from other clients. We introduce a lightweight adapter $T_m(\cdot)$ on top of the private expert $\mathcal{E}_m$ with the aim to encourage the output of the private expert to be comparable with that of the public expert $\mathcal{E}_{\text{pub}}$. We intentionally choose the adapter to be *linear* because here the goal is not to acquire new knowledge. In addition, we unlock the parameters of the two-way router in a client m to recalibrate the routing between the public and private expert. All other parameters of the model are kept frozen, making this stage computationally lighter than Stage-I.

Let us denote $\mathbf{h}_{\text{pub}} = \mathcal{E}_{\text{pub}}(\mathbf{x})$ and $\tilde{\mathbf{h}}_m = T_m(\mathcal{E}_m(\mathbf{x}))$ be the representation of the public expert and the projected representation of the private expert, respectively. We define the *client residual* as:

$$\Delta_m(\mathbf{x}) = \tilde{\mathbf{h}}_m - \mathbf{h}_{\text{pub}}. \quad (5)$$

The client residual measures how a private expert output deviates from the shared public expert after linear projection. Ideally, we want the residuals to have a comparable scale across clients. Inspired by LeJEPa [15] that imposes isotropic Gaussian structure on learned representations, we impose a common residual distribution across clients by forcing the residual in each client to follow an isotropic Gaussian distribution. This leads the private experts trained on different datasets produce outputs with comparable residual scale around the same shared public expert. Formally, let $\mathcal{B}_m$ denote the token-level residuals in a mini-batch of client m . For sampled unit directions $\{\mathbf{a}_s\}_{s=1}^S$, we define

$$\mathcal{L}_{\text{iso}} = \frac{1}{S} \sum_{s=1}^S \text{EP}(\{\mathbf{a}_s^\top \Delta_m(\mathbf{x}) : \mathbf{x} \in \mathcal{B}_m\}, \mathcal{N}(0, 1)), \quad (6)$$

where $\text{EP}(\cdot, \mathcal{N}(0, 1))$ is the Epps–Pulley discrepancy between the projected residuals and a standard Gaussian¹. Because all clients are calibrated against the same public expert and isotropic Gaussian target, DISTMOE makes the private experts more comparable for distributed MoE composition.

In addition to imposing Gaussian structure on the residuals, we recalibrate the router by fine-tuning the router parameters corresponding to both the public and private expert. As we formalize later in Proposition 1, this is crucial because inference-time expert influence is controlled by both the client-residual magnitude and recalibrated routing scores. Formally, the Stage-II objective is

$$\mathcal{L}_{\text{Stage-II}} = \mathcal{L}_{\text{NTP}} + \lambda \mathcal{L}_{\text{iso}}, \quad (7)$$

where both $\mathcal{L}_{\text{NTP}}$ and $\mathcal{L}_{\text{iso}}$ are optimized on a mixed dataset $\mathcal{D}_m^{\text{mix}} = \mathcal{D}_m \cup \mathcal{D}_{\text{pub}}$, where $\mathcal{D}_{\text{pub}}$ is small subset of the publicly available dataset used for training the public model; and λ is a hyperparameter for balancing the two losses. Since, $\mathcal{D}_m^{\text{mix}}$ does not contain private data from other clients, expert composition in DISTMOE remains rehearsal-free, unlike the prior works [12, 10, 13].

4.2 Inference

During inference, we employ a standard MoE approach to combine the expert models $\mathcal{E}_m$ along with the public expert $\mathcal{E}_{\text{pub}}$. After Stage-II, each client m contributes a calibrated private expert $\mathcal{E}_m$, router weights $\mathbf{r}_m$ and bias b_m , and a linear adapter $T_m(\cdot)$, while the shared public expert remains common across clients. Note that as the public expert is shared among clients, each client possesses their own public router weights $\mathbf{r}_{\text{pub},m}$. Therefore, we average the public-route parameters learned during Stage-II as $\bar{\mathbf{r}}_{\text{pub}} = \frac{1}{M} \sum_{m=1}^M \mathbf{r}_{\text{pub},m}$. As our method is based on the MoE approach, it also supports different types of routing during inference, such as sparse top- K routing (as noted in Eq. (3)) and soft routing involving all experts.

4.3 Discussion

Next, we discuss why Stage-II can alleviate the issue highlighted in Sec. 4.1.1. Following the MoE routing rule in Eq. 2, we denote by α_{pub} and $\{\alpha_m\}_{m=1}^M$ the routing weights assigned to the public expert and the M private experts, respectively. Under sparse top- K routing, non-selected routes are assigned zero weight. The routed output is

$$\mathbf{o} = \alpha_{\text{pub}} \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m \tilde{\mathbf{h}}_m. \quad (8)$$

Using the client residual $\Delta_m = \tilde{\mathbf{h}}_m - \mathbf{h}_{\text{pub}}$, and the normalization $\alpha_{\text{pub}} + \sum_{m=1}^M \alpha_m = 1$, Eq. 8 can be rewritten as

$$\mathbf{o} = \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m \Delta_m. \quad (9)$$

The algebraic derivation of Eq. 9 is provided in Appendix B. This equation shows why Stage-II regularizes the client residuals rather than the full expert outputs. At inference, the private experts do not contribute as isolated outputs; they contribute through their residuals relative to the shared public expert. Therefore, the effect of expert m is determined by two factors: the routing weight α_m , which is learned by the router, and the residual Δ_m , which determines the direction and magnitude of the representation shift introduced by that expert. If two clients receive similar routing weights but produce residuals with very different norms, the larger-residual expert can dominate the mixture regardless of whether it is semantically more relevant.

¹Given $\{u_i\}_{i=1}^B$, $\text{EP} = B \int |\hat{\varphi}(t) - \varphi_0(t)|^2 \varphi_0(t) dt$, where $\hat{\varphi}(t) = \frac{1}{B} \sum_{i=1}^B \exp(itu_i)$ and $\varphi_0(t) = \exp(-t^2/2)$.

Proposition 1. *For the routed output in Eq. 9, the deviation from the shared public expert is bounded by the routing-weighted residual magnitudes:*

$$\|\mathbf{o} - \mathbf{h}_{\text{pub}}\|_2 \leq \sum_{m=1}^M \alpha_m \|\Delta_m\|_2. \quad (10)$$

The proof follows from Eq. 9, the triangle inequality, and the non-negativity of the routing weights; the full proof is given in Appendix B. Proposition 1 formalizes the main reason for the isotropic residual loss. The router learns how much mass to assign to each private expert, but the actual representation shift also depends on $\|\Delta_m\|_2$. If different clients produce residuals with incompatible scales, the mixture can be influenced by representation magnitude rather than by the learned routing weights alone. By regularizing client residuals around the same public expert and the same isotropic Gaussian target, Stage-II makes these residuals more comparable while preserving client specialization. This supports cross-client rehearsal-free composition of independently trained experts in the final distributed MoE model.

5 Experimental Results

Experimental setup. We train DISTMOE with five client domains: COCO [34], GQA [35], OCRVQA [36], VQA^T: TextVQA [37], and Visual Genome (VG) [38], treating each dataset as a separate private client. We initialize the shared public model from the MoE-LLaVA stage-2 [1] checkpoint and keep the vision encoder and multimodal connector frozen. In Stage-II, each client calibrates routers/adapters using its private data plus a fixed 19k public subset. We instantiate DISTMOE with Qwen-1.8B [39], and Phi-2.7B [40], and StableLM-1.6B [41] language backbones; all variants use CLIP ViT-L/14 [17] as the frozen vision encoder. We evaluate on image QA benchmarks, including VQA^{v2} [42], GQA, SQA^I: ScienceQA-IMG [43], and VQA^T, as well as general MLLM benchmarks, including POPE [44], MME [45], SEED-Bench [46], LLaVA^W: LLaVA-Bench (in-the-Wild) [16], and MM-Vet [47]. This evaluation covers both in-domain performance on clients’ training datasets and out-of-domain generalization on different multimodal benchmarks. Additional implementation details are provided in Appendix C.

Compared methods. The Public model denotes the MoE-LLaVA stage-2 checkpoint used to initialize the MLLM before client-specific expert adaptation. Offline reference models, such as Qwen-VL, LLaVA-Phi, and MoE-LLaVA, are included as centralized reference points. They represent the upperbound of our distributed approach. We report two MoE-LLaVA references: the original results reported by MoE-LLaVA [1] and a variant trained with joint access to all client datasets. We compare DISTMOE against Model Soup, weighted Model Soup, BTM, and BTX using their standard model-merging or expert-composition procedures. We also report the FlexOlmo-style routing baselines, denoted as FlexOlmo-LoRA and FlexOlmo, which correspond to Stage-I expert acquisition without the Stage-II public-anchored router and adapter calibration. Following [12], we additionally report FlexOlmo-RT, which fine-tunes the merged router after Stage-I using 10k private samples per client dataset plus the same 19k public subset used in our Stage-II. This rehearsal-based baseline serves as an upper-bound reference rather than a rehearsal-free distributed baseline. Finally, we include two variants of DISTMOE: a variant that adapts one private FFN expert per client, and a parameter-efficient LoRA variant that replaces each full private FFN with multiple lightweight LoRA experts. For the LoRA variants, we use $R = 16$ LoRA experts per client with rank $r = 16$ and scaling $\alpha = 32$. Unless otherwise stated, we use top- k routing with $k = 4R$ for LoRA variants and $k = 4$ for all other distributed methods; the effect of varying R is analyzed in Appendix E.


5.1 Results

Tab. 1 shows that DISTMOE achieves strong performance across both image question answering and instruction-following MLLM benchmarks. Across Qwen-1.8B and Phi-2.7B, DISTMOE generally provides the strongest results on image QA benchmarks, indicating that public-anchored routing and residual calibration improve the reuse of independently trained visual-language experts without centralized training. DISTMOE-LoRA is also highly competitive despite its lightweight adaptation, and performs especially well on instruction-following benchmarks such as LLaVA^W and MM-Vet.

FlexOlmo-RT improves over rehearsal-free FlexOlmo by fine-tuning the merged router with pooled private rehearsal data, confirming the value of cross-client router supervision but violating our rehearsal-free setting. Compared with rehearsal-free FlexOlmo, DISTMOE benefits from Stage-II

Table 1: Main results for DISTMoE with Qwen-1.8B and Phi-2.7B. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the model trained with joint access to the datasets used in our distributed setting. FlexOlmo-RT denotes FlexOlmo with Router Training [12].

LLM	Method	Image Question Answering				Benchmark Toolkit				
		VQA ^{v2}	GQA	SQA ^I	VQA ^T	POPE	MME	SEED	LLaVA ^W	MM-Vet
Qwen-1.8B	Offline reference models (upperbound)									
	Qwen-VL	78.80	59.30	67.10	63.80	—	—	—	—	—
	MoE-LLaVA [†]	76.20	61.50	63.10	48.00	87.00	1291.60	—	88.70	25.30
	MoE-LLaVA	72.81	57.29	63.22	44.15	89.32	1230.16	57.08	62.16	15.61
	FlexOlmo-RT	72.36	56.66	62.17	45.19	87.85	1205.85	56.51	64.00	19.70
	Public model	20.96	13.75	58.50	17.72	71.17	402.54	51.17	71.00	18.60
	Model Soup (avg)	68.92	53.18	59.98	40.83	84.55	1154.80	53.82	50.40	14.60
	Model Soup (wtd)	69.18	53.46	60.21	41.18	84.84	1160.35	54.06	51.10	14.70
	BTM	69.73	53.81	60.66	41.87	85.46	1167.92	54.31	52.00	14.80
	BTX	69.46	54.16	60.43	41.52	85.15	1174.63	54.63	52.90	14.90
	FlexOlmo-LoRA	63.45	50.28	59.15	34.46	85.35	938.50	53.20	72.00	21.40
	FlexOlmo	70.01	54.26	60.85	41.70	85.98	1176.35	54.91	52.20	15.00
	DISTMoE-LoRA	65.80	50.51	59.30	33.69	85.68	995.61	53.34	73.50	24.40
	DISTMoE	70.27	55.35	61.03	42.66	86.38	1188.56	55.11	59.90	15.10
Phi-2.7B	Offline reference models (upperbound)									
	LLaVA-Phi	71.40	—	68.40	48.60	85.00	1335.10	—	—	28.90
	MoE-LLaVA [†]	77.60	61.40	68.50	51.40	85.70	1423.00	—	94.10	34.30
	MoE-LLaVA	72.81	57.29	63.22	44.15	89.32	1230.16	57.08	62.16	15.61
	Public model	42.87	32.80	69.26	31.82	80.48	862.53	59.36	73.30	23.20
	Model Soup (avg)	64.89	51.67	59.28	39.57	74.17	1054.37	53.38	42.40	15.70
	Model Soup (wtd)	65.92	52.34	59.89	39.76	74.43	1067.26	54.05	43.20	14.40
	BTM	66.53	52.56	60.56	40.76	72.80	1106.64	52.82	41.70	16.30
	BTX	67.80	52.67	60.24	40.53	73.62	1096.48	51.43	44.40	17.00
	FlexOlmo-LoRA	42.87	32.78	69.41	31.74	80.53	862.53	59.39	72.10	22.30
	FlexOlmo	70.03	54.84	62.77	41.63	74.98	1193.71	58.79	52.00	18.30
	DISTMoE-LoRA	42.89	32.84	69.52	31.77	80.84	862.60	59.38	75.30	23.80
	DISTMoE	71.31	56.53	66.34	41.87	80.50	1291.41	59.96	55.90	19.80

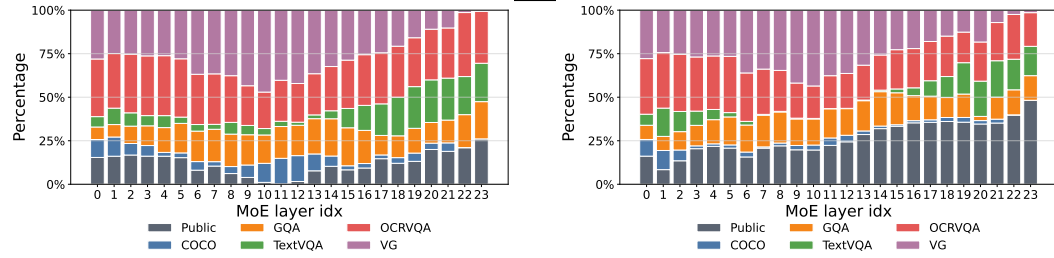

(a) FlexOlmo (perception score: 1176.35).

(b) DISTMoE (perception score: 1188.56).

Figure 3: Top-4 routing mass on MME with Qwen-1.8B, computed as the aggregate normalized router weight assigned to each expert. Compared with FlexOlmo, DISTMoE assigns more routing mass to the public expert while activating private experts, supporting the effect of Stage-II.

public-private calibration, suggesting that flexible expert composition for MLLMs requires calibration mechanisms tailored to multimodal representations rather than a direct transfer of text-only routing. Fig. 3 further illustrates this behavior. FlexOlmo assigns relatively less routing mass to the public expert and relies more heavily on private experts, which can favor client-specific specialization but weakens the shared public expert that carries broadly trained visual-language knowledge. In contrast, DISTMoE assigns substantially more mass to the public expert, especially in later layers, while still activating private experts when useful. This behavior is consistent with the residual view of DISTMoE: private experts contribute calibrated shifts around a shared public anchor, rather than replacing the public expert. As a result, DISTMoE better preserves out-of-domain and general instruction-following capability while retaining client-specific expert reuse.

Model merging baselines such as Model Soup, BTM, and BTX remain competitive on some QA tasks, but their static parameter-level combination lacks token-wise expert selection and modular

Table 2: Effect of Stage-II components in DIST-MoE. Stage-I is included as a reference.

Stage	$T(\cdot)$	$\mathcal{L}_{\text{iso}}$	b_m	GQA	SQA	VQA ^T	POPE
I	—	—	—	54.26	60.85	41.70	85.98
II	✗	✗	✗	54.21	60.42	41.71	85.54
II	✓	✗	✗	54.39	60.55	41.88	85.67
II	✓	✓	✗	54.62	60.71	42.08	85.82
II	✗	✗	✓	54.93	60.96	42.52	86.08
II	✓	✗	✓	55.16	60.88	42.35	86.24
II	✓	✓	✓	55.35	61.03	42.66	86.38

Table 3: Effect of removing individual experts from DISTMoE.

Expert	GQA	SQA	VQA ^T	POPE
Public model	13.75	58.50	17.72	71.17
w/o COCO	54.51	60.29	41.14	86.93
w/o GQA	43.37	61.53	34.82	85.95
w/o OCRVQA	56.28	58.55	40.66	86.80
w/o VG	56.23	59.94	41.81	86.14
w/o TextVQA	55.69	62.42	45.19	84.37
DISTMoE	55.35	61.03	42.66	86.38

control over client-specific knowledge. Offline reference models provide upperbound comparisons, but they assume centralized training or joint access to data and therefore do not address the distributed, rehearsal-free setting targeted by DISTMoE.

Appendices D and F report additional benchmark results and routing visualizations.

5.2 Ablation Studies

Model components. Tab. 2 ablates the Stage-II components of DISTMoE: the client-private adapter $T(\cdot)$, isotropic residual loss $\mathcal{L}_{\text{iso}}$, and client-private bias b_m . The Stage-I row is the reference before Stage-II calibration; Stage-II without these components does not improve over it, showing that mixed-data router calibration alone is insufficient. The full configuration performs best across benchmarks, showing that residual alignment and router calibration are complementary.

Effect of public-data anchoring. Fig. 4 varies the number of public samples used in Stage-II. Without public data, routers and adapters are calibrated only on private data, which can reduce compatibility with the shared MLLM. Adding public samples improves or stabilizes performance, and the gains quickly saturate, showing that a small public subset is sufficient for effective public-private calibration. In DISTMoE Stage-II, we used 19k public samples.




Figure 4: Public-data size in Stage-II.

Top- k expert selection. In addition, we study the effect of the sparse routing budget by varying the number of selected experts in Fig. 5. Smaller values of k encourage stronger sparsity and lower inference cost, but may underuse useful domain experts. Larger values allow more expert composition, but can introduce unnecessary computation and dilute specialization. The results show that a moderate top- k routing budget provides the best trade-off, enabling DISTMoE to combine relevant private experts while maintaining efficient inference.




Figure 5: Top- k routing budget.

Expert flexibility. Tab. 3 removes one client expert at a time during inference. All settings remain stronger than the public model, showing that DISTMoE does not rely on any single private expert. The impact is domain-dependent: removing GQA hurts GQA most, while removing some experts can improve certain metrics, suggesting reduced negative transfer. Overall, DISTMoE offers a robust performance trade-off, maintaining balanced results even when individual client experts are removed.

6 Conclusion

We presented DISTMoE, a rehearsal-free MoE framework for distributed visual instruction tuning. DISTMoE keeps a shared public MLLM as an anchor, learns client-specific private experts locally, and makes them directly comparable through a Stage-II calibration without using any data across clients. At inference, it composes public and private experts via sparse routing. Across diverse vision-language benchmarks, DISTMoE improves over distributed merging and routing baselines, while DISTMoE-LoRA provides a competitive parameter-efficient alternative. These results show

that public-anchored calibration can make independently trained multimodal experts reusable under distributed constraints, offering a practical path toward scalable and controllable MLLMs.

Limitations and future work. Centralized or rehearsal-based MoE training can still perform better on some benchmarks, reflecting the trade-off between unrestricted joint optimization and rehearsal-free distributed adaptation. Moreover, Stage-II in DISTMoE assumes access to a small public calibration set, which, unlike open-source models, may not be available for open-weight models [48], motivating future work on training-free or nearly training-free expert composition.

References

- [1] Bin Lin, Zhenyu Tang, Yang Ye, Jinfa Huang, Junwu Zhang, Yatian Pang, Peng Jin, Munan Ning, Jiebo Luo, and Li Yuan. Moe-llava: Mixture of experts for large vision-language models. *IEEE Transactions on Multimedia*, 2026.
- [2] Davide Caffagni, Federico Cocchi, Luca Barsellotti, Nicholas Moratelli, Sara Sarto, Lorenzo Baraldi, Marcella Cornia, and Rita Cucchiara. The revolution of multimodal large language models: A survey. *Findings of the association for computational linguistics: ACL 2024*, pages 13590–13618, 2024.
- [3] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 24185–24198, 2024.
- [4] Feng Li, Renrui Zhang, Hao Zhang, Yuanhan Zhang, Bo Li, Wei Li, Zejun Ma, and Chunyuan Li. Llava-next-interleave: Tackling multi-image, video, and 3d in large multimodal models. *arXiv preprint arXiv:2407.07895*, 2024.
- [5] Bo Zhao, Boya Wu, MUYANG HE, and Tiejun Huang. Svit: Scaling up visual instruction tuning. *arXiv preprint arXiv:2307.04087*, 2023.
- [6] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. In *European Conference on Computer Vision*, pages 370–387. Springer, 2024.
- [7] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarczyk, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations*, 2017.
- [8] Sheng Shen, Zhewei Yao, Chunyuan Li, Trevor Darrell, Kurt Keutzer, and Yuxiong He. Scaling vision-language models with sparse mixture of experts. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 11329–11344, 2023.
- [9] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [10] Sainbayar Sukhbaatar, Olga Golovneva, Vasu Sharma, Hu Xu, Xi Victoria Lin, Baptiste Rozière, Jacob Kahn, Daniel Li, Wen-tau Yih, Jason Weston, et al. Branch-train-mix: Mixing expert llms into a mixture-of-experts llm. *arXiv preprint arXiv:2403.07816*, 2024.
- [11] Hejie Cui, Lingjun Mao, Xin Liang, Jieyu Zhang, Hui Ren, Quanzheng Li, Xiang Li, and Carl Yang. Biomedical visual instruction tuning with clinician preference alignment. *Advances in neural information processing systems*, 37:96449–96467, 2024.
- [12] Weijia Shi, Akshita Bhagia, Kevin Farhat, Niklas Muennighoff, Pete Walsh, Jacob Morrison, Dustin Schwenk, Shayne Longpre, Jake Poznanski, Allyson Ettinger, et al. Flexolmo: Open language models for flexible data use. *arXiv preprint arXiv:2507.07024*, 2025.
- [13] Jacob Morrison, Sanjay Adhikesaven, Akshita Bhagia, Matei Zaharia, Noah A Smith, and Sewon Min. Train separately, merge together: Modular post-training with mixture-of-experts. *arXiv preprint arXiv:2604.18473*, 2026.

- [14] Zhihan Zhou, Feng Hong, Jiaan Luo, Jiangchao Yao, Dongsheng Li, Bo Han, Ya Zhang, and Yanfeng Wang. Learning to instruct for visual instruction tuning. *Advances in neural information processing systems*, 2025.
- [15] Randall Balestriero and Yann LeCun. Lejepa: Provable and scalable self-supervised learning without the heuristics. *arXiv preprint arXiv:2511.08544*, 2025.
- [16] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36:34892–34916, 2023.
- [17] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021.
- [18] Wei-Lin Chiang, Zhuohan Li, Ziqing Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. See <https://vicuna.lmsys.org> (accessed 14 April 2023), 2(3):6, 2023.
- [19] Cheng Chen, Junchen Zhu, Xu Luo, Heng T Shen, Jingkuan Song, and Lianli Gao. Coin: A benchmark of continual instruction tuning for multimodal large language models. *Advances in neural information processing systems*, 37:57817–57840, 2024.
- [20] Jinpeng Chen, Runmin Cong, Yuzhi Zhao, Hongzheng Yang, Guangneng Hu, Horace Ho Shing Ip, and Sam Kwong. Sefe: Superficial and essential forgetting eliminator for multimodal continual instruction tuning. *arXiv preprint arXiv:2505.02486*, 2025.
- [21] Chongyang Zhao, Mingsong Li, Haodong Lu, and Dong Gong. On token’s dilemma: Dynamic moe with drift-aware token assignment for continual learning of large vision language models. *arXiv preprint arXiv:2603.27481*, 2026.
- [22] Lingyun Song, Ziyao Chen, Kang Pan, Xiaolin Han, Xinbiao Gan, Yudai Pan, Xiaofan Sun, Xiaoqi Wang, and Xuequn Shang. Kss-moe: Knowledge space synergy framework in mixture of experts for continual visual instruction tuning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 25536–25544, 2026.
- [23] Jinghan He, Haiyun Guo, Kuan Zhu, Ming Tang, and Jinqiao Wang. Continual instruction tuning for large multimodal models. *IEEE Transactions on Image Processing*, 2026.
- [24] Didi Zhu, Zhongyisun Sun, Zexi Li, Tao Shen, Ke Yan, Shouhong Ding, Chao Wu, and Kun Kuang. Model tailor: Mitigating catastrophic forgetting in multi-modal large language models. In *International Conference on Machine Learning*, pages 62581–62598. PMLR, 2024.
- [25] Arthur Douillard, Qixuan Feng, Andrei A Rusu, Rachita Chhaparia, Yani Donchev, Adhiguna Kuncoro, Marc’Aurelio Ranzato, Arthur Szlam, and Jiajun Shen. Diloco: Distributed low-communication training of language models. *arXiv preprint arXiv:2311.08105*, 2023.
- [26] Mavina Nikandrou, Lu Yu, Alessandro Suglia, Ioannis Konstas, and Verena Rieser. Task formulation matters when learning continually: A case study in visual question answering. *arXiv preprint arXiv:2210.00044*, 2022.
- [27] Enneng Yang, Li Shen, Guibing Guo, Xingwei Wang, Xiaochun Cao, Jie Zhang, and Dacheng Tao. Model merging in llms, mllms, and beyond: Methods, theories, applications, and opportunities. *ACM Computing Surveys*, 58(8):1–41, 2026.
- [28] Mitchell Wortsman, Gabriel Ilharco, Samir Ya Gadre, Rebecca Roelofs, Raphael Gontijo-Lopes, Ari S Morcos, Hongseok Namkoong, Ali Farhadi, Yair Carmon, Simon Kornblith, et al. Model soups: averaging weights of multiple fine-tuned models improves accuracy without increasing inference time. In *International conference on machine learning*, pages 23965–23998. PMLR, 2022.

- [29] Margaret Li, Suchin Gururangan, Tim Dettmers, Mike Lewis, Tim Althoff, Noah A Smith, and Luke Zettlemoyer. Branch-train-merge: Embarrassingly parallel training of expert language models. *arXiv preprint arXiv:2208.03306*, 2022.
- [30] Prateek Yadav, Derek Tam, Leshem Choshen, Colin A Raffel, and Mohit Bansal. Ties-merging: Resolving interference when merging models. *Advances in neural information processing systems*, 36:7093–7115, 2023.
- [31] Sandhini Agarwal, Lama Ahmad, Jason Ai, Sam Altman, Andy Applebaum, Edwin Arbus, Rahul K Arora, Yu Bai, Bowen Baker, Haiming Bao, et al. gpt-oss-120b & gpt-oss-20b model card. *arXiv preprint arXiv:2508.10925*, 2025.
- [32] Carlos Riquelme, Joan Puigcerver, Basil Mustafa, Maxim Neumann, Rodolphe Jenatton, André Susano Pinto, Daniel Keysers, and Neil Houlsby. Scaling vision with sparse mixture of experts. *Advances in Neural Information Processing Systems*, 34:8583–8595, 2021.
- [33] Basil Mustafa, Carlos Riquelme, Joan Puigcerver, Rodolphe Jenatton, and Neil Houlsby. Multi-modal contrastive learning with limoe: the language-image mixture of experts. *Advances in Neural Information Processing Systems*, 35:9564–9576, 2022.
- [34] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pages 740–755. Springer, 2014.
- [35] Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019.
- [36] Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 947–952, 2019.
- [37] Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- [38] Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A Shamma, et al. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *International journal of computer vision*, 123(1):32–73, 2017.
- [39] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- [40] Mojan Javaheripi and Sébastien Bubeck. Phi-2: The surprising power of small language models. <https://www.microsoft.com/en-us/research/blog/phi-2-the-surprising-power-of-small-language-models/>, December 2023. Microsoft Research Blog.
- [41] Marco Bellagente, Jonathan Tow, Dakota Mahan, Duy Phung, Maksym Zhuravinskyi, Reshith Adithyan, James Baicoianu, Ben Brooks, Nathan Cooper, Ashish Datta, et al. Stable lm 2 1.6 b technical report. *arXiv preprint arXiv:2402.17834*, 2024.
- [42] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017.
- [43] Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in neural information processing systems*, 35:2507–2521, 2022.

- [44] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pages 292–305, 2023.
- [45] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023.
- [46] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*, 2023.
- [47] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*, 2023.
- [48] Stephen Casper, Kyle O’Brien, Shayne Longpre, Elizabeth Seger, Kevin Klyman, Rishi Bommasani, Aniruddha Nrusimha, Ilia Shumailov, Sören Mindermann, Steven Basart, et al. Open technical problems in open-weight ai model risk management. *Transactions on Machine Learning Research*, 2025.
- [49] Junke Wang, Lingchen Meng, Zejia Weng, Bo He, Zuxuan Wu, and Yu-Gang Jiang. To see is to believe: Prompting gpt-4v for better visual instruction tuning. *arXiv preprint arXiv:2311.07574*, 2023.
- [50] Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. Aligning large multi-modal model with robust instruction tuning. *arXiv preprint arXiv:2306.14565*, 2(3):6, 2023.
- [51] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Fanyi Pu, Jingkang Yang, Chunyuan Li, and Ziwei Liu. Mimic-it: Multi-modal in-context instruction tuning. *arXiv preprint arXiv:2306.05425*, 2023.
- [52] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 26296–26306, 2024.

A Pseudocode Algorithm for DISTMOE

Algorithm 1 DISTMOE: Private-data Rehearsal-free Distributed Visual Instruction Tuning

Require: Public MLLM backbone with public FFN layers $\{\mathcal{E}_{\text{pub}}^\ell\}_{\ell=1}^L$ in the LLM; private datasets $\{\mathcal{D}_m\}_{m=1}^M$; public data $\mathcal{D}_{\text{pub}}$.

Ensure: Client experts $\{\mathcal{E}_m^\ell\}$, routers $\{\mathbf{r}_{\text{pub},m}^\ell, \mathbf{r}_m^\ell, b_m^\ell\}$, and adapters $\{T_m^\ell\}$.

```

1: Freeze the vision encoder, multimodal projector, and public FFNs  $\{\mathcal{E}_{\text{pub}}^\ell\}_{\ell=1}^L$ .
2: for each client  $m = 1, \dots, M$  do
3:   for each layer  $\ell = 1, \dots, L$  do
4:     Initialize  $\mathcal{E}_m^\ell \leftarrow \mathcal{E}_{\text{pub}}^\ell$ .
5:     Initialize  $\mathbf{r}_{\text{pub},m}^\ell, \mathbf{r}_m^\ell \leftarrow \mathbf{0}$  and  $b_m^\ell \leftarrow 0$ .
6:   end for
7:   Stage-I: Expert knowledge acquisition
8:   while not converged do
9:     Sample a mini-batch  $(I, q, y) \sim \mathcal{D}_m$ .
10:    for each FFN layer  $\ell$  and token hidden state  $\mathbf{x}^\ell$  do
11:       $z_{\text{pub}} = (\mathbf{x}^\ell)^\top \mathbf{r}_{\text{pub},m}^\ell, \quad z_m = (\mathbf{x}^\ell)^\top \mathbf{r}_m^\ell + b_m^\ell$ .
12:       $[\alpha_{\text{pub},m}^\ell, \alpha_m^\ell] = \text{softmax}([z_{\text{pub}}, z_m])$ .
13:       $\mathbf{o}^\ell = \alpha_{\text{pub},m}^\ell \mathcal{E}_{\text{pub}}^\ell(\mathbf{x}^\ell) + \alpha_m^\ell \mathcal{E}_m^\ell(\mathbf{x}^\ell)$ .
14:    end for
15:    Update only  $\{\mathcal{E}_m^\ell\}_{\ell=1}^L$  and the client routers by minimizing  $\mathcal{L}_{\text{NTP}}$  on  $\mathcal{D}_m$ .
16:  end while
17:  Stage-II: Public-anchored composition calibration
18:  Freeze  $\{\mathcal{E}_{\text{pub}}^\ell\}_{\ell=1}^L$  and  $\{\mathcal{E}_m^\ell\}_{\ell=1}^L$ .
19:  Construct  $\mathcal{D}_m^{\text{mix}} = \mathcal{D}_m \cup \mathcal{D}_{\text{pub}}$ .
20:  while not converged do
21:    Sample a mini-batch  $(I, q, y) \sim \mathcal{D}_m^{\text{mix}}$ .
22:    for each FFN layer  $\ell$  and token hidden state  $\mathbf{x}^\ell$  do
23:       $\mathbf{h}_{\text{pub}}^\ell = \mathcal{E}_{\text{pub}}^\ell(\mathbf{x}^\ell), \quad \tilde{\mathbf{h}}_m^\ell = T_m^\ell(\mathcal{E}_m^\ell(\mathbf{x}^\ell))$ .
24:       $z_{\text{pub}} = (\mathbf{x}^\ell)^\top \mathbf{r}_{\text{pub},m}^\ell, \quad z_m = (\mathbf{x}^\ell)^\top \mathbf{r}_m^\ell + b_m^\ell$ .
25:       $[\alpha_{\text{pub},m}^\ell, \alpha_m^\ell] = \text{softmax}([z_{\text{pub}}, z_m])$ .
26:       $\mathbf{o}^\ell = \alpha_{\text{pub},m}^\ell \mathbf{h}_{\text{pub}}^\ell + \alpha_m^\ell \tilde{\mathbf{h}}_m^\ell$ .
27:       $\Delta_m^\ell = \tilde{\mathbf{h}}_m^\ell - \mathbf{h}_{\text{pub}}^\ell$ .
28:    end for
29:    Compute  $\mathcal{L}_{\text{iso}}$  from the residuals  $\{\Delta_m^\ell\}_{\ell=1}^L$ .
30:    Update  $\{\mathbf{r}_{\text{pub},m}^\ell, \mathbf{r}_m^\ell, b_m^\ell, T_m^\ell\}_{\ell=1}^L$  by minimizing  $\mathcal{L}_{\text{Stage-II}} = \mathcal{L}_{\text{NTP}} + \lambda \mathcal{L}_{\text{iso}}$ .
31:  end while
32:  Inference: Private-data Rehearsal-free modular routing
33:  for each layer  $\ell$  and token hidden state  $\mathbf{x}^\ell$  do
34:     $\bar{\mathbf{r}}_{\text{pub}}^\ell = \frac{1}{M} \sum_{m=1}^M \mathbf{r}_{\text{pub},m}^\ell$ .
35:     $z_{\text{pub}}^\ell = (\mathbf{x}^\ell)^\top \bar{\mathbf{r}}_{\text{pub}}^\ell$ .
36:    for each client expert  $m = 1, \dots, M$  do
37:       $z_m^\ell = (\mathbf{x}^\ell)^\top \mathbf{r}_m^\ell + b_m^\ell$ .
38:    end for
39:     $\mathbf{z}^\ell = [z_{\text{pub}}^\ell, z_1^\ell, \dots, z_M^\ell]$ .
40:    Select active routes  $\mathcal{S}^\ell$  from  $\mathbf{z}^\ell$  using the inference routing policy (e.g. top- $k$  routing).
41:    Normalize routing weights over  $\mathcal{S}^\ell$  to obtain  $\alpha_{\text{pub}}^\ell$  and  $\{\alpha_m^\ell\}_{m=1}^M$ .
42:    Assign zero weight to non-selected routes.
43:     $\mathbf{o}^\ell = \alpha_{\text{pub}}^\ell \mathcal{E}_{\text{pub}}^\ell(\mathbf{x}^\ell) + \sum_{m=1}^M \alpha_m^\ell T_m^\ell(\mathcal{E}_m^\ell(\mathbf{x}^\ell))$ .
44:  end for

```

B Derivation of the Residual Influence Bound

For clarity, we omit the layer index and consider one token representation. The same derivation applies independently at every layer. At inference, routing is performed over $M + 1$ routes: one shared public route and M private routes. Top- K selection assigns zero weight to non-selected routes, so the normalized weights satisfy $\alpha_{\text{pub}} + \sum_{m=1}^M \alpha_m = 1$.

B.1 Mathematical derivation of Eq. 9

The inference-time routed output is

$$\mathbf{o} = \alpha_{\text{pub}} \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m \tilde{\mathbf{h}}_m. \quad (11)$$

The routing weights are normalized over the selected routes, with non-selected routes assigned zero weight:

$$\alpha_{\text{pub}} + \sum_{m=1}^M \alpha_m = 1. \quad (12)$$

For each private expert m , the client residual is defined as

$$\Delta_m = \tilde{\mathbf{h}}_m - \mathbf{h}_{\text{pub}}. \quad (13)$$

Equivalently,

$$\tilde{\mathbf{h}}_m = \mathbf{h}_{\text{pub}} + \Delta_m. \quad (14)$$

Substituting this expression into the routed output gives

$$\mathbf{o} = \alpha_{\text{pub}} \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m (\mathbf{h}_{\text{pub}} + \Delta_m) \quad (15)$$

$$= \left(\alpha_{\text{pub}} + \sum_{m=1}^M \alpha_m \right) \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m \Delta_m. \quad (16)$$

Using the normalization of the routing weights, we obtain

$$\mathbf{o} = \mathbf{h}_{\text{pub}} + \sum_{m=1}^M \alpha_m \Delta_m, \quad (17)$$

which is Eq. 9.

B.2 Proof of Proposition 1

Proposition 1. *For the routed output in Eq. 9, the deviation from the shared public expert is bounded by the routing-weighted residual magnitudes:*

$$\|\mathbf{o} - \mathbf{h}_{\text{pub}}\|_2 \leq \sum_{m=1}^M \alpha_m \|\Delta_m\|_2. \quad (18)$$

Proof. From Eq. 9, we have

$$\mathbf{o} - \mathbf{h}_{\text{pub}} = \sum_{m=1}^M \alpha_m \Delta_m. \quad (19)$$

Taking the Euclidean norm on both sides gives

$$\|\mathbf{o} - \mathbf{h}_{\text{pub}}\|_2 = \left\| \sum_{m=1}^M \alpha_m \Delta_m \right\|_2. \quad (20)$$

Applying the triangle inequality,

$$\left\| \sum_{m=1}^M \alpha_m \Delta_m \right\|_2 \leq \sum_{m=1}^M \|\alpha_m \Delta_m\|_2. \quad (21)$$

Since routing weights are non-negative, $\alpha_m \geq 0$, we have

$$\|\alpha_m \Delta_m\|_2 = \alpha_m \|\Delta_m\|_2. \quad (22)$$

Therefore,

$$\|\mathbf{o} - \mathbf{h}_{\text{pub}}\|_2 \leq \sum_{m=1}^M \alpha_m \|\Delta_m\|_2, \quad (23)$$

which proves the proposition. $\square$

C Additional Experimental Details

C.1 Dataset Details

We construct a distributed visual-instruction tuning setup with five private client domains: COCO [34], GQA [35], OCRVQA [36], VQA^T [37], and Visual Genome (VG) [38]. In Stage-I, each client is trained only on its own private dataset, without accessing data from other clients. In Stage-II, we keep the client-specific dataset for each client and add a small public subset for router and adapter calibration. The public subset contains 19k samples drawn from the Hybrid-FT data group used in MoE-LLaVA, including SViT-157k [5], LVIS-220k [49], LRV-331k [50] and MIMIC-IT-256k [51]. In addition, the public MLLM backbone i.e. Stage-2 MoE-LLaVA checkpoint is already pretrained on approximately 1.5M multimodal instruction data including LLaVA 1.5-558k [52] and the Hybrid-FT data group, while DISTMOE only performs distributed client-specific adaptation on top of this backbone. Tab. 4 summarizes the training data used for public model initialization, private and public data distribution. Below, we also discuss the test dataset along with the evaluation metrics used in our experiments.

C.2 Evaluation Metrics

Academic-task benchmark. In Tab. 6, 8, 10, we use the following multiple evaluation metrics of each dataset. (i) **VQA^{v2}** [42] - Accuracy for *Yes/No*, *Number*, and *Other* questions, together with *Overall* accuracy, which evaluate binary recognition, numerical reasoning, and open-ended visual question answering respectively are reported. (ii) **GQA** [35] - We report *Binary*, *Open*, and overall accuracy (*Acc.*), along with the distribution score (*Dist.*). Binary and open accuracy measure closed-form and open-ended compositional reasoning, while lower *Dist.* indicates less answer-distribution bias. (iii) **SQA**: ScienceQA [43] - We use standard answer accuracy (*Acc.*) and image-grounded accuracy (*IMG-Acc.*). The latter focuses on questions requiring visual evidence rather than language priors. (iv) **VQA^T**: TextVQA [37] - We report answer accuracy, which evaluates the model’s ability to read and reason over text appearing in images. However, in main Tab. 1, we showcase only overall accuracy for VQA^{v2}, GQA, and VQA^T, whereas image-grounded accuracy for SQA dataset.

Instruction-following benchmark. In Tab. 7, 9, 11, we use the following multiple evaluation metrics of each dataset. (i) **POPE** [44] - We report accuracy under *Random*, *Popular*, and *Adversarial* settings, together with their average, that evaluate object hallucination robustness under increasingly challenging negative samples. (ii) **MME** [45] - We report *Perception* and *Cognition* scores. Perception measures visual understanding such as recognition, counting, position, and OCR, while cognition measures higher-level multimodal reasoning. (iii) **SEED-Bench** [46] - We report *All*, *Image*, and *Video* scores, measuring overall performance, static-image understanding, and video-related reasoning. (iv) **LLaVA^W**: LLaVA-Bench (in-the-Wild) [16] - We report *All*, *Complex Reasoning (Comp.)*, *Conversation (Conv.)*, and *Detailed Description (Det.)* scores for open-ended multimodal instruction following. (v) **MM-Vet** [47] - We report overall accuracy, which evaluates integrated multimodal abilities such as recognition, OCR, spatial reasoning, knowledge reasoning, and language generation. However, in main Tab. 1, we report only average accuracy for POPE, perception score for MME, *All* for SEED-Bench and LLaVA^W, and overall accuracy for MM-Vet dataset.

Table 4: **Training data used in DISTMOE.** Stage-I trains each client expert using only its own private dataset. Stage-II uses the same client data together with a small public subset sampled from the Hybrid-FT data group.

Data group	Usage	Source	# Samples
Public backbone pretraining	Initialization	LLaVA-PT group: LLaVA 1.5-558k Hybrid-FT group: SViT-157k, LVIS-220k, LRV-331k, MIMIC-IT-256k	~1.5M
Private client data	Stage-I / II for $\mathcal{E}_1$	COCO	364k
	Stage-I / II for $\mathcal{E}_2$	GQA	72k
	Stage-I / II for $\mathcal{E}_3$	OCR-VQA	80k
	Stage-I / II for $\mathcal{E}_4$	VQA ^T	22k
	Stage-I / II for $\mathcal{E}_5$	Visual Genome (VG)	86k
Public data	Stage-II only	Subset of Hybrid-FT group: SViT-157k, LVIS-220k, LRV-331k, MIMIC-IT-256k	19k

Table 5: **Zero-shot object hallucination evaluation in POPE** dataset for DISTMOE with Qwen-1.8B, Phi-2.7B, and StableLM-1.6B. We report accuracy, F1-score, and the yes-answer ratio under Random, Popular, and Adversarial settings. “Yes” indicates the proportion of positive responses to the given question.

LLM	Method	Random			Popular			Adversarial		
		Acc. $\uparrow$	F1 $\uparrow$	Yes $\downarrow$	Acc. $\uparrow$	F1 $\uparrow$	Yes $\downarrow$	Acc. $\uparrow$	F1 $\uparrow$	Yes $\downarrow$
Qwen-1.8B	Public model	68.38	75.57	77.87	75.90	79.74	68.97	69.23	75.51	75.63
	FlexOlmO-LoRA	86.80	86.48	46.11	86.63	85.54	45.30	82.63	82.51	49.30
	FlexOlmO	86.84	85.75	40.79	86.26	84.83	40.53	84.83	82.99	42.53
	DISTMOE-LoRA	87.08	86.43	43.64	86.67	85.68	43.13	83.30	82.69	46.50
	DISTMOE	88.18	87.51	43.09	86.73	85.83	43.60	84.23	83.59	46.10
Phi-2.7B	Public model	83.54	84.89	57.42	79.37	81.30	60.37	78.53	80.69	61.20
	FlexOlmO-LoRA	83.54	84.85	57.42	79.43	81.35	60.30	78.63	80.77	61.10
	FlexOlmO	74.91	67.98	26.80	75.30	67.66	26.37	74.73	67.15	26.93
	DISTMOE-LoRA	83.95	84.89	57.43	79.82	81.42	60.37	78.76	80.92	61.34
	DISTMOE	80.86	77.39	33.09	80.80	76.79	32.73	79.83	75.91	33.70
StableLM-1.6B	Public model	58.76	71.32	92.23	53.80	68.28	95.67	53.37	68.08	96.10
	FlexOlmO-LoRA	75.62	70.37	28.56	77.45	70.15	28.78	76.04	70.83	30.05
	FlexOlmO	77.84	72.82	30.00	78.07	72.42	29.53	76.87	71.34	30.73
	DISTMOE-LoRA	84.06	82.45	37.96	83.92	81.23	37.65	81.45	78.19	38.20
	DISTMOE	84.98	83.29	38.32	84.27	82.19	38.33	82.27	80.37	40.33

C.3 Additional Implementation Details

We implement DISTMOE on three MoE-LLaVA-Stage2 backbones, using Qwen-1.8B, StableLM-1.6B, and Phi-2.7B as the LLMs, with CLIP ViT-L/14 as the shared vision encoder, in which the input image resolution is set to 336×336 . For each backbone, we replace every LLM FFN with a routed public-private FFN, while keeping the vision encoder and multimodal projector frozen. In the full fine-tuning setting, each private expert is initialized as a full copy of the corresponding public FFN. In the LoRA setting, each client uses $R = 16$ LoRA experts on the linear projection matrices, with rank $r = 16$ and scaling factor $\alpha = 32$. Stage-II freezes all private experts and updates only the routers, router biases, and lightweight adapter $T_m(\cdot)$, which is taken as a linear layer of same input-output dimension of the FFN blocks of the corresponding LLMs. We use top- k routing with $m = 4$ for full experts and $k = 4R = 64$ for LoRA experts. For expert composition, we use $|\mathcal{D}_{\text{pub}}| = 19\text{k}$ public samples, and $\lambda = 10^{-4}$ in Eq. 7. All experiments are conducted on 4 NVIDIA A100 GPUs with 64GB memory each. We train for 1 epoch using AdamW with learning rate 2×10^{-5} , cosine learning-rate scheduling, warmup ratio 0.03, and per-device batch size 4 in both of the training stages.

Table 6: **Detailed academic-task benchmark results with Qwen-1.8B.** We report fine-grained results on VQA^{v2}, GQA, SQA, and VQA^T. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	VQA ^{v2}				GQA				SQA		VQA ^T
	Yes/No ↑	Num. ↑	Other ↑	Overall ↑	Binary ↑	Open ↑	Acc. ↑	Dist. ↓	Acc. ↑	IMG-Acc. ↑	Acc. ↑
<i>Offline reference models (upperbound)</i>											
Qwen-VL	—	—	—	78.80	—	—	59.30	—	—	67.10	63.80
MoE-LLaVA [†]	—	—	—	76.20	—	—	61.50	—	—	63.10	48.00
MoE-LLaVA	88.26	53.46	63.10	72.81	73.56	44.41	57.29	2.07	64.37	63.22	44.15
<i>Individual experts</i>											
COCO	84.41	51.84	58.28	69.94	62.01	34.03	46.88	2.34	60.56	59.24	35.51
GQA	82.65	46.47	56.98	66.36	68.15	37.38	51.62	2.62	38.91	29.75	32.27
VQA ^{OCR}	70.10	29.08	45.21	53.63	39.29	17.13	27.30	2.41	60.25	59.11	36.16
VG	0.01	0.16	6.00	2.87	0.12	0.84	0.51	4.23	41.22	37.83	16.62
VQA ^T	4.27	1.88	39.09	20.52	9.28	16.31	13.09	2.54	56.87	58.75	0.88
Public model	5.65	1.76	38.85	20.96	10.03	16.91	13.75	2.45	55.34	58.50	17.72
Model Soup (avg)	84.92	50.61	59.18	68.92	69.54	39.52	53.18	2.35	60.52	59.98	40.83
Model Soup (wtd)	85.21	50.94	59.43	69.18	69.81	39.86	53.46	2.33	60.83	60.21	41.18
BTM	85.47	51.22	59.72	69.73	70.08	40.18	53.81	2.28	61.36	60.66	41.87
BTX	85.74	51.48	60.03	69.46	70.41	40.54	54.16	2.28	61.12	60.43	41.52
FlexOlmo-LoRA	74.39	45.25	52.94	63.45	61.65	40.63	50.28	1.85	59.33	59.15	34.46
FlexOlmo	85.15	51.67	60.04	70.01	70.32	40.50	54.26	2.26	61.68	60.85	41.70
DISTMoE-LoRA	77.28	47.16	55.47	65.80	62.03	40.73	50.51	1.79	59.21	59.30	33.69
DISTMoE	86.38	52.04	60.64	70.27	71.25	41.87	55.35	2.11	61.94	61.03	42.66

Table 7: **Detailed instruction-following benchmark results with Qwen-1.8B.** We report fine-grained results on POPE, MME, SEED-Bench, LLaVA^W, and MM-Vet. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	POPE				MME		SEED-Bench			LLaVA ^W				MM-Vet
	Rand. ↑	Pop. ↑	Adv. ↑	Avg. ↑	Perc. ↑	Cog. ↑	All. ↑	Img. ↑	Vid. ↑	All ↑	Comp. ↑	Conv. ↑	Det. ↑	Acc. ↑
<i>Offline reference models (upperbound)</i>														
MoE-LLaVA	90.48	88.82	88.67	89.32	1230.16	272.47	57.08	61.47	40.52	62.20	57.20	74.60	52.50	15.60
<i>Individual experts</i>														
COCO	86.49	85.93	82.97	85.13	1057.79	241.52	53.40	58.35	36.81	71.70	73.10	72.50	68.40	20.10
GQA	82.92	83.13	82.07	82.71	1109.63	252.50	14.76	11.76	26.14	58.60	51.90	64.80	63.30	18.10
VQA ^{OCR}	84.47	79.07	77.67	80.40	1122.81	212.14	51.83	55.13	35.42	69.10	68.50	71.50	67.00	17.10
VG	51.58	50.00	50.03	50.54	1.34	2.86	36.09	36.61	34.12	44.70	44.80	50.80	35.60	18.30
VQA ^T	69.28	73.83	67.80	70.30	455.94	190.36	52.23	56.25	37.02	64.30	65.90	67.20	57.70	18.20
Public model	68.38	75.90	69.23	71.17	402.54	176.79	51.17	55.14	36.15	71.00	70.30	79.30	62.50	18.60
Model Soup (avg)	85.31	85.14	83.21	84.55	1154.80	235.42	53.82	57.91	37.84	50.40	45.80	62.40	41.90	14.60
Model Soup (wtd)	85.67	85.39	83.46	84.84	1160.35	239.18	54.06	58.24	38.02	51.10	46.30	63.70	42.40	14.70
BTM	86.39	86.03	83.96	85.46	1167.92	243.61	54.31	58.55	38.21	52.00	46.70	64.90	42.90	14.80
BTX	86.02	85.72	83.71	85.15	1174.63	247.86	54.63	58.91	38.43	52.90	47.10	66.10	43.40	14.90
FlexOlmo-LoRA	86.80	86.63	82.63	85.35	938.50	251.07	53.27	57.35	37.82	72.00	73.00	75.20	66.30	21.40
FlexOlmo	86.84	86.26	84.83	85.98	1176.35	249.29	54.91	59.19	38.67	52.20	47.20	65.60	43.80	15.00
DISTMoE-LoRA	87.08	86.67	83.30	85.68	995.61	231.43	53.34	57.30	38.33	73.50	73.80	79.10	65.30	24.40
DISTMoE	88.18	86.73	84.23	86.38	1188.56	259.29	55.11	59.38	38.94	59.90	53.30	77.50	51.00	15.10

D Additional Experiments

This section provides the object hallucination evaluation results in Tab. 5 and the full per-benchmark breakdowns underlying the aggregate results in Tab. 1. Tabs. 6–9 report detailed results for Qwen-1.8B and Phi-2.7B, while Tabs. 10–11 provide the complete StableLM-1.6B results.

Object Hallucination Evaluation. We evaluate object hallucination using POPE, which formulates hallucination detection as a polling-based object-existence question answering task. Tab. 5 reports results under the *Random*, *Popular*, and *Adversarial* settings, together with F1-score and yes-answer ratio. Across the three backbones, DISTMoE generally improves hallucination robustness over the corresponding public model and distributed baselines. In particular, the full DISTMoE variant

Table 8: **Detailed academic-task benchmark results with Phi-2.7B.** We report fine-grained results on VQA^{v2}, GQA, SQA, and VQA^T. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	VQA ^{v2}				GQA				SQA		VQA ^T
	Yes/No ↑	Num. ↑	Other ↑	Overall ↑	Binary ↑	Open ↑	Acc. ↑	Dist. ↓	Acc. ↑	IMG-Acc. ↑	Acc. ↑
<i>Offline reference models (upper bound)</i>											
LLaVA-Phi	—	—	—	71.40	—	—	—	—	—	68.40	48.60
MoE-LLaVA [†]	—	—	—	77.60	—	—	61.40	—	—	68.50	51.40
MoE-LLaVA	90.30	56.96	66.00	74.99	71.21	44.38	56.69	1.60	73.03	68.37	46.52
<i>Individual experts</i>											
COCO	84.73	47.33	58.96	65.33	62.83	36.86	48.78	2.33	63.43	59.26	36.49
GQA	85.02	48.50	59.68	68.26	67.81	40.99	51.68	2.28	39.99	27.66	32.30
VQA ^{OCR}	71.46	30.57	46.14	51.46	52.40	27.70	39.04	2.15	63.17	59.21	30.67
VG	0.05	0.20	6.25	2.19	31.61	4.00	16.67	3.95	48.15	43.48	1.22
VQA ^T	5.26	1.67	38.42	20.73	0.12	0.37	0.25	4.27	68.22	65.69	0.12
Public model	53.36	7.90	42.13	42.87	51.65	16.81	32.80	2.54	70.69	69.26	31.82
Model Soup (avg)	82.90	45.79	57.18	64.89	66.11	39.11	51.67	2.31	64.68	59.28	39.57
Model Soup (wtd)	83.04	46.28	58.67	65.92	67.26	39.95	52.34	2.29	65.83	59.89	39.76
BTM	83.98	47.07	59.28	66.53	67.54	40.07	52.56	2.27	66.21	60.56	40.76
BTX	83.56	47.29	59.34	67.80	67.82	40.16	52.67	2.26	65.98	60.24	40.53
FlexOlmo-LoRA	53.37	7.89	42.13	42.87	51.60	16.81	32.78	2.55	70.74	69.41	31.74
FlexOlmo	85.18	49.85	61.69	70.03	68.73	43.06	54.84	2.29	67.67	62.77	41.63
DISTMoE-LoRA	53.39	7.91	42.14	42.89	51.67	16.86	32.84	2.55	70.78	69.52	31.77
DISTMoE	87.93	50.39	61.89	71.31	70.95	44.29	56.53	2.13	69.32	66.34	41.87

Table 9: **Detailed instruction-following benchmark results with Phi-2.7B.** We report fine-grained results on POPE, MME, SEED-Bench, LLaVA^W, and MM-Vet. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	POPE				MME		SEED-Bench			LLaVA ^W				MM-Vet
	Rand. ↑	Pop. ↑	Adv. ↑	Avg. ↑	Perc. ↑	Cog. ↑	All. ↑	Img. ↑	Vid. ↑	All ↑	Comp. ↑	Conv. ↑	Det. ↑	Acc. ↑
<i>Offline reference models (upper bound)</i>														
LLaVA-Phi	—	—	—	85.00	1335.10	—	—	—	—	—	—	—	—	28.90
MoE-LLaVA [†]	—	—	—	85.70	1423.00	—	—	—	—	94.10	—	—	—	34.30
MoE-LLaVA	87.39	85.83	83.73	85.65	1331.75	274.64	60.84	66.40	39.79	76.20	78.70	74.40	73.70	20.20
<i>Individual experts</i>														
COCO	80.07	76.13	73.29	76.50	1096.75	250.00	56.01	61.24	36.19	65.70	69.50	63.20	60.70	24.40
GQA	78.47	74.47	73.37	75.44	1074.07	251.79	29.61	27.46	37.74	52.50	47.90	55.10	57.60	16.70
VQA ^{OCR}	63.95	64.93	64.80	64.56	994.06	262.86	58.34	63.44	39.02	61.30	58.80	67.50	57.80	17.60
VG	66.05	73.07	68.27	69.13	598.64	236.07	49.57	53.72	33.83	49.70	48.50	63.40	32.90	16.80
VQA ^T	51.75	50.13	50.13	50.67	71.55	31.07	58.37	63.38	39.39	61.00	59.30	71.30	51.90	23.00
Public model	83.54	79.37	78.53	80.48	862.53	281.07	59.36	64.42	40.17	73.30	77.90	72.90	65.30	23.20
Model Soup (avg)	76.26	73.36	72.89	74.17	1054.37	242.38	53.38	58.17	33.50	42.40	43.70	45.20	44.90	15.70
Model Soup (wtd)	76.72	73.54	73.04	74.43	1067.26	250.40	54.05	59.92	34.78	43.20	44.70	46.20	45.10	14.40
BTM	74.81	72.57	71.03	72.80	1106.64	256.64	52.82	60.16	35.81	41.70	44.30	45.40	44.80	16.30
BTX	75.37	73.14	72.35	73.62	1096.48	252.10	51.43	58.36	33.58	44.40	45.10	46.80	46.30	17.00
FlexOlmo-LoRA	83.54	79.43	78.63	80.53	862.53	281.06	59.39	64.44	40.24	72.10	75.40	72.90	65.00	22.30
FlexOlmo	74.91	75.30	74.73	74.98	1193.71	250.00	58.79	63.80	39.79	52.00	52.60	56.00	45.70	18.30
DISTMoE-LoRA	83.95	79.82	78.76	80.84	862.60	281.07	59.38	64.46	40.14	75.30	77.20	78.60	66.20	23.80
DISTMoE	80.86	80.80	79.83	80.50	1291.41	287.50	59.96	65.00	40.88	55.90	54.10	69.10	42.10	19.80

achieves strong accuracy and F1-score on Qwen-1.8B and StableLM-1.6B, showing that public-anchored routing helps preserve reliable object grounding while reusing domain-specific experts. However, DISTMoE-LoRA is also competitive, especially for Phi-2.7B, indicating that lightweight expert adaptation can still provide effective hallucination mitigation. We also observe that the yes-answer ratio becomes more balanced compared with the public model in several settings, suggesting that DISTMoE reduces the tendency to over-answer “yes” and produces responses more consistent with the visual evidence.

Detailed Results. Tabs. 6 and 7 show the detailed Qwen-1.8B results. Across the fine-grained academic-task metrics, DISTMoE generally improves over the distributed baselines. On instruction-

Table 10: **Detailed academic-task benchmark results with StableLM-1.6B.** We report fine-grained results on VQA^{v2}, GQA, SQA, and VQA^T. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	VQA ^{v2}				GQA				SQA		VQA ^T
	Yes/No ↑	Num. ↑	Other ↑	Overall ↑	Binary ↑	Open ↑	Acc. ↑	Dist. ↓	Acc. ↑	IMG-Acc. ↑	Acc. ↑
<i>Offline reference models (upper bound)</i>											
MoE-LLaVA [†]	—	—	—	76.70	—	—	60.30	—	—	62.60	50.10
MoE-LLaVA	89.37	55.63	67.28	76.65	72.30	44.28	57.90	2.07	58.23	57.96	59.15
<i>Individual experts</i>											
COCO	85.06	50.21	60.35	69.26	62.01	36.25	48.08	2.26	50.04	38.28	44.35
GQA	84.94	49.52	58.93	68.57	66.38	41.39	52.28	2.21	48.01	40.31	37.84
VQA ^{OCR}	84.04	46.41	53.26	65.16	55.38	25.63	39.28	2.25	50.08	47.94	39.35
VG	60.17	16.60	43.19	47.17	30.95	12.51	20.97	2.91	41.22	37.83	11.47
VQA ^T	5.14	2.05	40.51	22.48	0.33	0.60	0.48	4.24	49.75	50.28	2.54
Public model	2.38	6.39	47.95	24.46	12.02	20.69	16.71	2.40	50.70	54.73	27.24
Model Soup (avg)	82.58	49.50	58.99	67.63	64.93	38.78	50.79	2.28	51.93	50.96	42.81
Model Soup (wtd)	83.45	50.02	59.61	68.34	65.62	39.19	51.32	2.26	52.48	51.50	43.26
BTM	84.32	50.57	60.23	69.05	66.98	40.01	52.39	2.21	53.14	52.03	43.71
BTX	85.19	51.07	60.86	69.76	66.30	39.60	51.86	2.24	53.57	52.48	44.16
FlexOlmo-LoRA	72.48	43.68	53.40	62.61	57.38	39.58	47.92	1.96	49.06	42.05	37.42
FlexOlmo	84.05	53.35	63.21	70.67	62.45	42.01	51.39	2.13	50.29	42.64	44.50
DISTMoE-LoRA	76.21	46.82	56.27	64.93	60.25	39.15	49.17	1.85	51.48	50.25	39.40
DISTMoE	86.93	52.11	62.10	71.19	68.35	40.82	53.46	2.19	54.66	53.64	45.06

following benchmarks, DISTMoE-LoRA is particularly strong on LLaVA^W and MM-Vet, showing that the parameter-efficient variant can provide competitive expert composition with lower adaptation cost. The individual experts are often strong on specific domains but vary substantially across benchmarks, motivating routing-based composition rather than relying on a single client expert.

Tabs. 8 and 9 show the same evaluation for Phi-2.7B. The trends are consistent with Qwen-1.8B: DISTMoE improves the strongest distributed performance on most academic-task metrics, while DISTMoE-LoRA remains competitive on instruction-following benchmarks. These results indicate that the gains are not tied to a single language backbone and that public-anchored calibration transfers across MLLM configurations.

StableLM-1.6B Results. Tabs. 10 and 11 report the complete StableLM-1.6B results. The results further support the main findings: DISTMoE improves over model-merging and FlexOlmo-style base-lines on most academic-task metrics, while DISTMoE-LoRA provides strong instruction-following performance, especially on LLaVA^W and MM-Vet. This confirms that the proposed public-private calibration remains effective on a third MLLM backbone.

E Number of LoRA experts in DISTMoE LoRA

We analyze the effect of using multiple LoRA experts per client in Fig. 6. Increasing the number of selected LoRA experts improves performance at first, showing that multiple lightweight experts provide complementary specialization paths and enable richer expert composition. The best performance is obtained with a moderate number of LoRA experts, while further increasing the number of experts slightly degrades performance. This suggests that too many selected LoRA experts may introduce redundant or noisy expert contributions, weakening sparse specialization. Therefore, we use $R = 16$ as the default setting, which provides the best trade-off between adaptation capacity and routing stability.

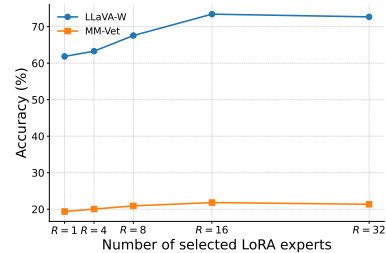


Figure 6: Number of LoRA experts.

Figure 6: Number of LoRA experts.


Table 11: **Detailed instruction-following benchmark results with StableLM-1.6B.** We report fine-grained results on POPE, MME, SEED-Bench, LLaVA^W, and MM-Vet. The Public model denotes the shared backbone before client-specific expert composition. MoE-LLaVA[†] denotes the original results reported in [1], while MoE-LLaVA denotes the offline MoE model trained with joint access to the same client datasets used in our distributed setting.

Method	POPE				MME		SEED-Bench			LLaVA ^W				MM-Vet
	Rand. ↑	Pop. ↑	Adv. ↑	Avg. ↑	Perc. ↑	Cog. ↑	All. ↑	Img. ↑	Vid. ↑	All ↑	Comp. ↑	Conv. ↑	Det. ↑	Acc. ↑
<i>Offline reference models (upper bound)</i>														
MoE-LLaVA [†]	—	—	—	85.70	1318.20	—	—	—	—	86.80	—	—	—	26.90
MoE-LLaVA	85.36	85.61	83.59	84.85	1304.56	233.04	55.42	61.56	36.91	54.20	53.70	68.60	53.50	18.40
<i>Individual experts</i>														
COCO	83.74	83.56	78.28	81.86	1230.27	209.48	48.47	52.31	31.08	69.50	71.00	73.00	60.30	20.60
GQA	83.82	84.01	79.32	82.38	1243.68	211.70	36.69	36.82	29.24	53.00	50.30	66.40	39.80	17.70
VQA ^{OCR}	74.36	74.17	72.90	73.81	1013.82	201.32	47.92	51.51	30.28	61.10	61.80	57.70	61.10	15.50
VG	84.78	77.50	74.20	78.83	649.23	125.71	4.56	5.77	0.05	51.70	51.60	60.30	41.40	20.60
VQA ^T	55.70	53.47	52.57	53.91	462.42	131.43	46.80	50.31	33.48	61.40	58.60	69.30	56.40	21.10
Public model	58.76	53.80	53.37	55.31	518.52	243.57	48.10	52.02	33.27	68.00	71.30	71.30	57.10	20.00
Model Soup (avg)	79.96	79.29	77.41	78.89	1126.25	205.08	50.14	54.96	31.98	48.80	44.70	59.50	43.00	12.70
Model Soup (wtd)	80.73	80.05	78.15	79.64	1134.57	203.11	50.63	55.49	32.29	49.30	45.10	60.10	43.40	12.90
BTM	81.48	80.80	79.61	80.63	1179.35	208.97	51.11	56.02	32.60	49.80	45.60	60.70	43.80	13.00
BTX	82.24	81.55	78.88	80.89	1190.47	210.92	51.60	56.55	32.91	50.20	46.00	61.20	44.20	13.10
FlexOlmo-LoRA	75.62	77.45	76.04	76.37	956.41	200.57	51.49	55.29	31.48	70.40	72.60	73.50	60.20	21.70
FlexOlmo	77.84	78.07	76.87	77.59	1171.74	221.79	52.18	57.01	33.91	50.40	44.50	60.00	49.50	17.70
DISTMoE-LoRA	84.06	83.92	81.45	83.14	1023.57	203.42	52.41	57.05	33.78	73.60	74.00	75.10	63.70	24.50
DISTMoE	84.98	84.27	82.27	83.84	1274.28	216.43	53.94	59.10	34.39	52.80	48.30	64.20	46.50	14.80


F Routing Distributions

We present the routing distributions of DISTMoE in Figs. 7, 8, and 9, corresponding to Qwen-1.8B, Phi-2.7B, and StableLM-1.6B. For each backbone, we compute the top-4 routing mass on representative image-QA and instruction-following benchmarks, where routing mass is the aggregate normalized router weight assigned to each expert across tokens at each MoE layer. The plots show how the router distributes computation between the shared public expert and the client-specific private experts trained on the datasets described in Section C.1.


Across all three backbones, DISTMoE assigns non-trivial routing mass to the public expert while still activating private experts in a benchmark-dependent manner. This indicates that the router does not simply replace the public expert with domain experts; instead, private experts act as calibrated residual contributors around the shared public expert. In most of the datasets, the public route becomes more dominant in later layers, suggesting that later layers rely more on general visual-language and instruction-following knowledge. Conversely, middle layers often show stronger private-expert activity, reflecting the use of domain-specific visual grounding and reasoning features. The comparison among Figs. 7, 8, and 9 further shows that routing behavior is backbone-dependent. Nevertheless, the same qualitative trend holds: DISTMoE produces sparse but non-exclusive expert usage, preserves a stable public pathway, and composes multiple private experts without requiring explicit domain labels.

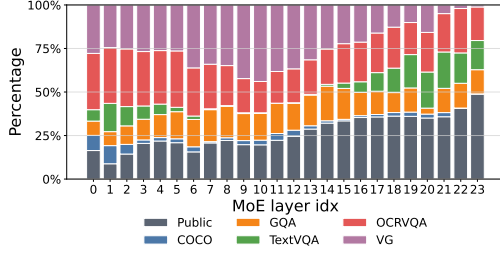


(a) GQA

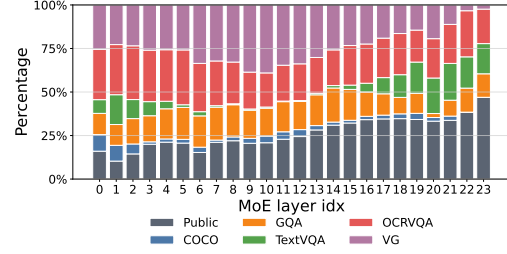


(b) ScienceQA

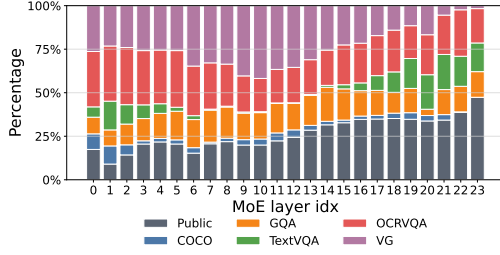


(c) TextVQA

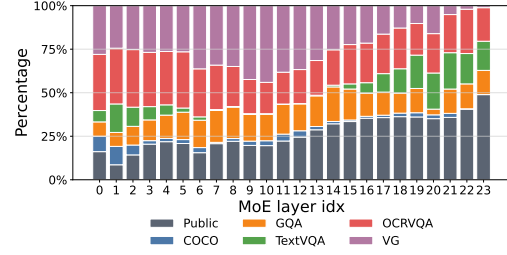

(d) POPE

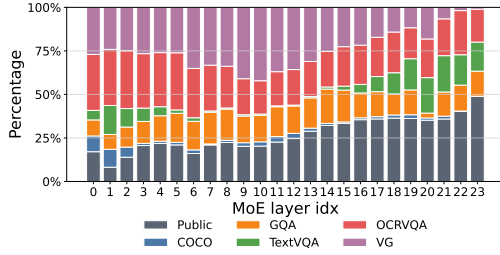


(e) LLaVA-Bench

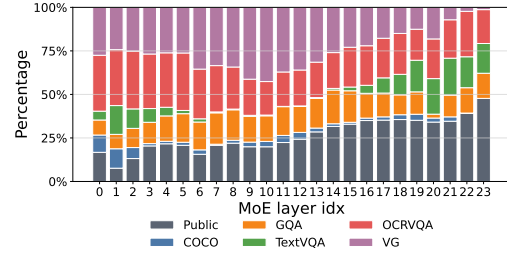


(f) MM-Vet


Figure 7: Top-4 routing mass of DISTMoE with Qwen-1.8B.

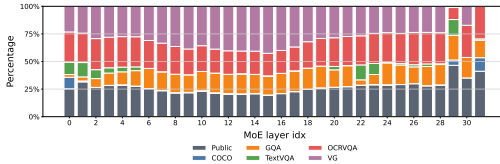


(a) GQA

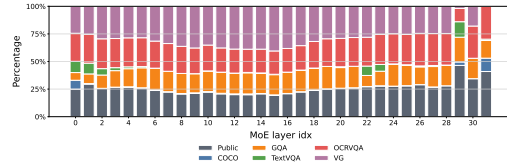


(b) ScienceQA

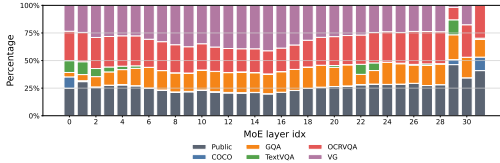


(c) TextVQA

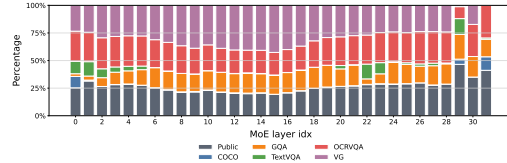

(d) POPE

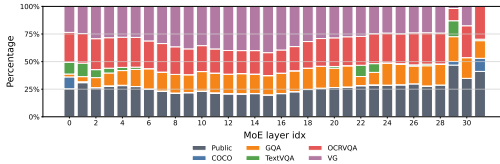


(e) LLaVA-Bench

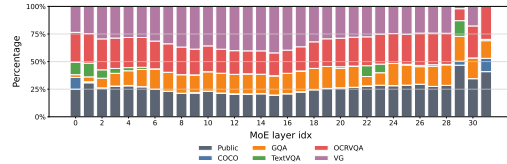


(f) MM-Vet


Figure 8: Top-4 routing mass of DISTMoE with Phi-2.7B.

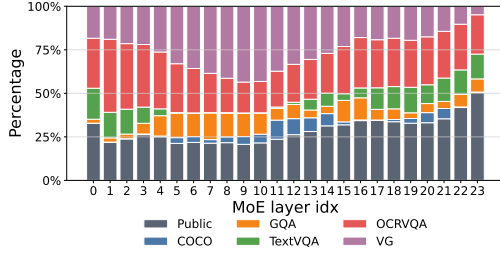


(a) GQA

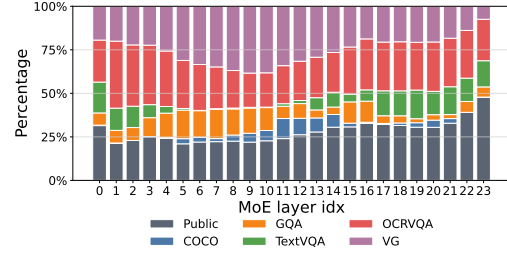


(b) ScienceQA

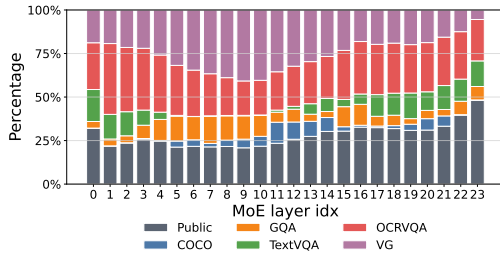


(c) TextVQA

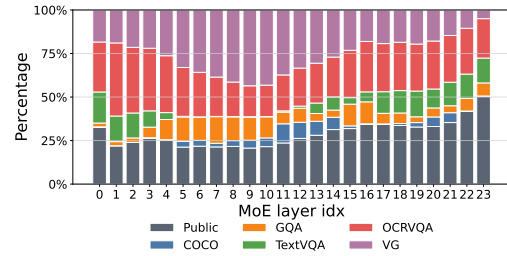

(d) POPE

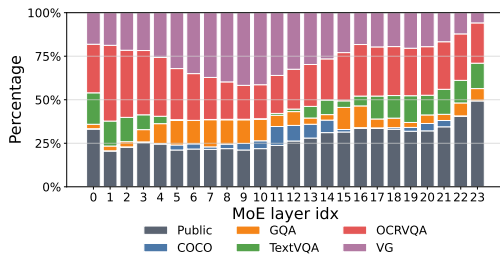

(e) LLaVA-Bench

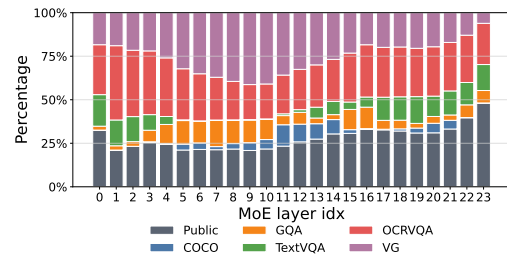

(f) MM-Vet

Figure 9: Top-4 routing mass of DISTMoE with StableLM-1.6B.