

Beyond Hazard Resemblance: Contrastive Event Adjudication for Training-Free Video Anomaly Detection

Wenti Yin¹, Xiang Wang³, Huaxin Zhang¹, Hanqing Wang², Hongbo Shao¹,
Changxin Gao¹, Nong Sang^{1*}

¹Key Laboratory of Image Processing and Intelligent Control, School of Artificial Intelligence and Automation,
Huazhong University of Science and Technology

²The Hong Kong University of Science and Technology (Guangzhou)

³Alibaba Group
{yinwt, nsang}@hust.edu.cn

Abstract

Video anomaly detection (VAD) aims to identify and temporally localize abnormal events in videos. Supervised methods learn anomaly decision boundaries from target-domain annotations but require substantial in-domain data. Existing training-free methods leverage the rich semantic knowledge and reasoning capabilities of pretrained models to interpret visual content, yet these capabilities do not directly define an anomaly decision criterion: richer anomaly descriptions better capture hazard resemblance without resolving abnormality. To this end, we propose Contrastive Event Adjudication for training-free Video Anomaly Detection (CEAVAD), which shifts the unit of inference from isolated anomaly concepts to falsifiable event hypotheses and establishes an inference-time explanatory boundary through the interaction between competing explanations and video evidence. Specifically, CEAVAD first uses public-safety knowledge to construct hazard–benign event contrasts, pairing each hazard mechanism with a generic normal account and a mechanism-specific benign counterpart. It then determines whether the target interval better supports a hazard explanation or its benign competitor, yielding a revisable contrastive boundary proposal for the target. Finally, CEAVAD adjudicates between the competing explanations to determine whether the hazard hypothesis survives the video evidence, supporting both temporally localized anomaly detection and evidence-grounded explanations. Experiments on three widely used VAD benchmarks demonstrate that CEAVAD achieves state-of-the-art performance under the training-free paradigm. Code is available at <https://github.com/lessiYin/CEAVAD>.

1 Introduction

Video anomaly detection (VAD) seeks to identify events that depart from expected behavior and localize them along the video timeline. Classical one-class and unsupervised methods learn regularity from target-domain normal video, using reconstruction, prediction, or memory-based discrepancy as anomaly evidence (Hasan et al. 2016; Liu et al. 2018; Park, Noh, and Ham 2020). Weakly supervised methods instead learn a discriminative boundary from video-level normal and anomalous labels (Sultani, Chen, and Shah 2018; Tian et al. 2021; Wu et al. 2024). Although these paradigms differ in

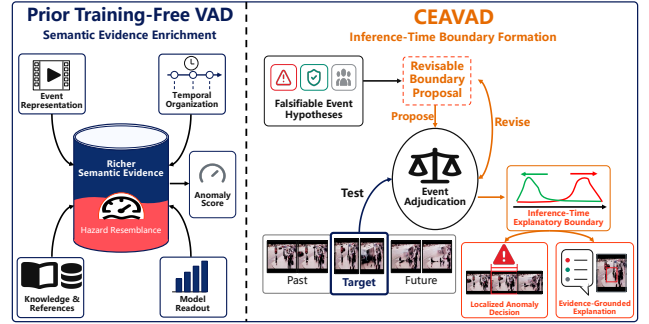


Figure 1: Schematic illustration of the motivation for CEAVAD. Prior training-free VAD enriches semantic evidence, yet semantic evidence alone does not define the anomaly criterion. CEAVAD uses semantic contrast to form a revisable proposal and adjudicates falsifiable event hypotheses against temporally partitioned video evidence, establishing an inference-time explanatory boundary for both localized anomaly decisions and evidence-grounded explanations.

their supervision, both encode the anomaly criterion in parameters fitted to data from the target domain. Deploying the detector in a new environment therefore entails collecting suitable video, defining supervision, or optimizing the model again.

Pretrained foundation models offer a different route. Vision–language pretraining exposes broad visual semantics through natural language (Radford et al. 2021), while large language models (LLMs) and multimodal large language models (MLLMs) provide world knowledge and event-level reasoning without fitting a conventional VAD classifier. Recent training-free methods pursue two broad aims: enriching event evidence through multimodal descriptions, temporal organization, and normal exemplars (Zanella et al. 2024; Dev, Hazari, and Das 2024; Shao et al. 2025; Li et al. 2025; Sun et al. 2026), and strengthening anomaly judgment through induced normality rules, anomaly definitions, and anomaly-sensitive representations (Yang et al. 2024; Pei et al. 2026; Cai et al. 2025, 2026).

These advances improve semantic understanding, yet semantic knowledge alone does not define an anomaly de-

*Corresponding author.

cision boundary. A foundation model may recognize hazard resemblance, but VAD must still determine whether the observed event is abnormal. Hazard support therefore has to be weighed against a generic normal account and a mechanism-specific benign counterpart that shares the hazard’s visual pattern. The distinction is between evidence and criterion: representations, references, and reasoning can enrich evidence, whereas the criterion specifies how an interpretation is proposed, tested, and revised against temporally grounded evidence. Testing and revising candidate interpretations against such evidence establishes an inference-time explanatory boundary for the abnormality judgment. Figure 1 illustrates this boundary-forming interaction.

Our key observation is that this interaction becomes testable by changing the unit of reasoning from an isolated anomaly concept to a falsifiable event hypothesis. A hazard hypothesis should compete simultaneously with a generic normal account and a mechanism-specific benign counterpart that can explain the same observation. Their relative semantic support forms a revisable proposal, while temporally organized video evidence can confirm the hazard, reject it in favor of a benign explanation, or show that the hypothesized event does not occur. The resulting anomaly decision is grounded in which competing explanation survives the visible evidence. Based on this view, we introduce *Contrastive Event Adjudication for Training-Free Video Anomaly Detection* (CEAVAD). CEAVAD first constructs hazard–benign event contrasts from fixed public-safety knowledge. Each contrast pairs a hazard mechanism with a generic normal account, a mechanism-specific benign counterpart, and visible event-state evidence. A frozen vision–language encoder compares each target with the complete description banks and composes their semantic contrasts into a target-specific, revisable boundary proposal. Finally, a frozen MLLM adjudicates the competing explanations using role-separated PAST, TARGET, and FUTURE observations. The target establishes event occurrence in the scored interval, while the surrounding episode tests local normality and the adequacy of the benign explanation. This adjudication yields temporally localized anomaly scores and, from the same evidence, an evidence-grounded explanation.

Our contributions are threefold:

- We distinguish semantic evidence from the anomaly criterion and formulate training-free VAD through *contrastive event adjudication* of falsifiable event hypotheses, establishing an inference-time explanatory boundary by proposing, testing, and revising competing interpretations against temporally organized video evidence.
- We develop CEAVAD, which structures public-safety knowledge as hazard–benign event contrasts, composes evidence from a frozen vision–language encoder into a composite and revisable contrastive boundary proposal, and adjudicates it with role-partitioned episodic evidence, yielding both temporally localized anomaly decisions and evidence-grounded explanations.
- The same fixed system reaches the state of the art among training-free methods on three widely used VAD benchmarks.

2 Related Work

2.1 Video Anomaly Detection

Video anomaly detection is commonly studied under one-class or unsupervised learning and weak supervision. The former learns target-domain normality and uses reconstruction error (Hasan et al. 2016), future-frame prediction (Liu et al. 2018), or memory banks (Park, Noh, and Ham 2020) as anomaly evidence. The latter learns from video-level labels through multiple-instance learning (MIL) ranking (Sultani, Chen, and Shah 2018), with subsequent methods improving temporal supervision through pseudo-label refinement (Feng, Hong, and Zheng 2021), feature-magnitude learning (Tian et al. 2021), or debiased MIL (Lv et al. 2023). VAD-CLIP incorporates transferable vision–language features but still optimizes task-specific branches with weak labels (Wu et al. 2024). Despite different supervision, these methods estimate the anomaly criterion through optimization on VAD data.

2.2 Training-Free Video Anomaly Detection

Recent training-free VAD methods exploit frozen foundation models to avoid task-specific detector optimization. Building on the transferable semantics of vision–language pretraining (Radford et al. 2021), LAVAD generates frame captions, filters them using cross-modal similarity, aggregates their temporal content with an LLM, and refines the resulting anomaly estimates with vision–language similarity (Zanella et al. 2024). MCANet extends this caption-based formulation to visual and audio descriptions and consolidates their temporal semantics with an LLM (Dev, Hazari, and Das 2024). AnomalyRuler instead induces scenario-specific normality rules from a few normal reference videos and applies those rules deductively at test time (Yang et al. 2024).

Subsequent work improves the temporal organization of foundation-model inference. EventVAD models a dynamic spatiotemporal graph, detects event boundaries from unsupervised statistical signals, and uses hierarchical prompting for event-level MLLM reasoning (Shao et al. 2025). VADTree uses a pretrained generic event-boundary detector to build an adaptive coarse-to-fine hierarchy, removes redundant nodes, and integrates multi-granularity scores through inter-cluster node correlation (Li et al. 2025). Related tuning-free approaches extract anomaly cues from internal MLLM representations: HiProbe-VAD selects informative intermediate hidden states for scoring, temporal localization, and explanation (Cai et al. 2025), whereas HeadHunt-VAD derives detection features from a sparse set of anomaly-sensitive attention heads (Cai et al. 2026).

External knowledge further enriches training-free inference: DR-VAD uses real-world anomaly definitions to guide structured temporal reasoning (Pei et al. 2026), while RAG4VAD retrieves normal exemplars to refine a scene-aware normality baseline and explain deviations (Sun et al. 2026). CEAVAD instead distinguishes evidence from the anomaly criterion, treating competing explanations as falsifiable event hypotheses and adjudicating a revisable contrastive boundary proposal against temporally organized video evidence.

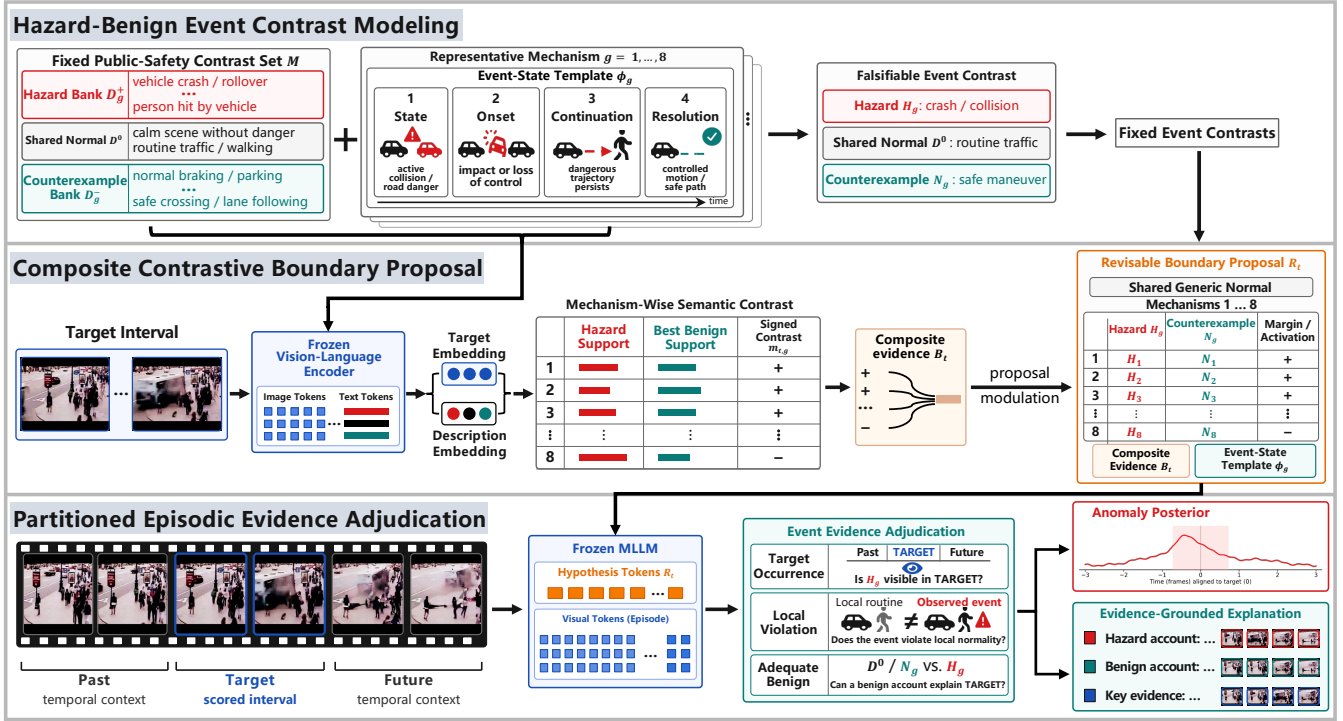


Figure 2: Overview of the CEAVID framework. First, hazard–benign event contrast modeling structures fixed public-safety knowledge into falsifiable mechanism-level hypotheses with event-state templates. Next, a frozen vision–language encoder computes mechanism-wise semantic contrasts and conditions their proposal margins on a composite semantic proposal score, producing a revisable boundary proposal. Finally, a frozen MLLM adjudicates the proposal with role-separated PAST, TARGET, and FUTURE observations, yielding the two-token anomaly score and an evidence-grounded explanation.

3 Method

Video anomaly detection (VAD) identifies abnormal events and localizes them on the video timeline. Given a video $V = \{I_f\}_{f=1}^F$, we divide it into target intervals $\{W_t\}_{t=1}^T$, assign each interval an anomaly score $p_t \in [0, 1]$, and map these scores to a frame-aligned sequence $s(V) = (s_1, \dots, s_F)$. We propose *Contrastive Event Adjudication for Training-Free Video Anomaly Detection* (CEAVAD), which performs this inference with frozen pretrained models and no target-domain parameter fitting. CEAVAD casts each target as a competition between falsifiable hazard and benign event hypotheses, establishing an inference-time *explanatory boundary* through their interaction with video evidence. Target-level semantic contrast forms a revisable boundary proposal, which CEAVAD then adjudicates against temporally organized video evidence.

The framework comprises three stages. First, CEAVAD organizes fixed public-safety knowledge into hazard–benign event contrasts, pairing each hazard with a generic normal account and a mechanism-specific benign alternative (Sec. 3.1). Second, a frozen vision–language encoder contrasts the target against these explanations and composes their evidence into a revisable boundary proposal (Sec. 3.2). Third, a frozen MLLM adjudicates the proposal with role-separated PAST, TARGET, and FUTURE evidence, yielding the two-token anomaly score and, on demand, an evidence-grounded ex-

planation (Sec. 3.3). Figure 2 illustrates the complete flow and the information passed between these stages.

3.1 Hazard–Benign Event Contrast Modeling

CEAVAD first represents public-safety knowledge as a fixed contrast set $\mathcal{M} = \{\mathcal{M}_g\}_{g=1}^G$ with $G = 8$. Each mechanism is modeled as

$$\mathcal{M}_g = (\mathcal{D}_g^+, \mathcal{D}_g^0, \mathcal{D}_g^-, \Phi_g), \quad (1)$$

where $\mathcal{D}_g^+$ describes observable realizations of the hazard, $\mathcal{D}_g^-$ describes visually similar nonhazardous counterexamples, and the shared bank $\mathcal{D}^0$ describes ordinary activity. Each mechanism contains three hazard and three mechanism-specific counterexample descriptions, while $\mathcal{D}^0$ contains two generic normal descriptions. These banks form a falsifiable contrast between the hazard hypothesis and two complementary alternatives: ordinary activity and a visually confusable, mechanism-specific counterexample; see the supplement.

CEAVAD uses these description banks in two successive inference stages. First, the frozen vision–language encoder embeds every description in $\mathcal{D}_g^+$, $\mathcal{D}_g^-$, and $\mathcal{D}^0$ and aggregates their similarities into the set-level support defined in Sec. 3.2. Using multiple descriptions at this stage covers different visual realizations of the same event mechanism. The MLLM then adjudicates one explicit competition per mechanism in Sec. 3.3: a fixed hazard statement $H_g \in \mathcal{D}_g^+$ against a fixed

mechanism-specific counterexample $N_g \in \mathcal{D}_g^-$, together with the shared normal references and the target-specific margin and activation computed from the complete description banks. The remaining descriptions contribute through these target-specific quantities. This retains their retrieval coverage without presenting paraphrases of the same mechanism as separate event hypotheses to the MLLM.

To make each competition testable over time, the remaining component Φ_g specifies the required visible evidence:

$$\Phi_g = (\phi_g^{\text{state}}, \phi_g^{\text{onset}}, \phi_g^{\text{cont}}, \phi_g^{\text{end}}). \quad (2)$$

Here, ϕ_g^{state} specifies the unsafe relation required in the target; ϕ_g^{onset} , ϕ_g^{cont} , and ϕ_g^{end} describe its onset, continuation, and resolution through termination or benign evidence. For example, a vehicle-hazard template uses impact or loss of control as onset, a dangerous trajectory or wreckage as continuation, and controlled braking or parking as benign resolution. The MLLM checks the target for the unsafe state and uses ordered context to distinguish onset or continuation from resolution. Thus Φ_g makes each contrast testable, supporting the hazard hypothesis or the corresponding benign account according to visible evidence.

3.2 Composite Contrastive Boundary Proposal

CEAVAD next instantiates the fixed contrasts for each target. Let $X_t^0 = \{I_{t,j}\}_{j=1}^{n_t}$ denote the frames sampled from W_t . The frozen vision-language encoder maps each frame to a unit vector $\mathbf{v}_{t,j}$; their mean is normalized once more to obtain the target representation

$$\mathbf{q}_t = \frac{\frac{1}{n_t} \sum_{j=1}^{n_t} \mathbf{v}_{t,j}}{\left\| \frac{1}{n_t} \sum_{j=1}^{n_t} \mathbf{v}_{t,j} \right\|_2}. \quad (3)$$

Only target frames contribute to $\mathbf{q}_t$. In parallel, the frozen text encoder maps each description to a unit vector. We write $\mathcal{P}_g^+$, $\mathcal{P}_g^-$, and $\mathcal{P}^0$ for the resulting embedding sets corresponding to $\mathcal{D}_g^+$, $\mathcal{D}_g^-$, and $\mathcal{D}^0$, respectively.

With the target and description embeddings in place, CEAVAD aggregates the target’s semantic support for any text-embedding set $\mathcal{P}$ over its complete description bank as

$$E(\mathbf{q}_t, \mathcal{P}) = \log \left[\frac{1}{|\mathcal{P}|} \sum_{\mathbf{p} \in \mathcal{P}} \exp(\mathbf{q}_t^\top \mathbf{p}) \right]. \quad (4)$$

The log-mean-exp accumulates support across the bank while keeping a strongly matched description influential. On this basis, CEAVAD measures the signed contrast for mechanism g against the more strongly supported benign account:

$$m_{t,g} = E(\mathbf{q}_t, \mathcal{P}_g^+) - \max\{E(\mathbf{q}_t, \mathcal{P}^0), E(\mathbf{q}_t, \mathcal{P}_g^-)\}. \quad (5)$$

A positive $m_{t,g}$ means that the target semantically supports the hazard bank more than both the generic normal account and its mechanism-specific benign counterpart. Its sign is only a provisional comparison of textual explanations; event occurrence has not yet been established.

These signed margins are raw cosine gaps. Using them for all targets underuses the contrastive precision learned by the

frozen encoder, whereas applying that precision indiscriminately can amplify an isolated positive match even when the complete hazard family is unsupported. CEAVAD therefore conditions the use of the model-native scale on a composite semantic proposal score. Let $\gamma = \exp(\ell_{\text{enc}})$ be the encoder’s frozen logit scale. We compute

$$B_t = \log \left[\frac{1}{G} \sum_{g=1}^G \exp(\gamma m_{t,g}) \right]. \quad (6)$$

B_t is the composite semantic proposal score, summarizing family-level contrastive evidence without selecting a mechanism. Because it is a log-mean-exp, the evidence can be broad or concentrated in one well-supported mechanism; it is not a vote among mechanisms. Zero is the fixed neutral reference inherited from the signed hazard–benign contrasts. The proposal margin is then

$$\tilde{m}_{t,g} = \begin{cases} \gamma m_{t,g}, & B_t > 0 \text{ and } m_{t,g} > 0, \\ m_{t,g}, & \text{otherwise,} \end{cases} \quad (7)$$

We expose this proposal margin together with its bounded activation $a_{t,g} = 1/[1 + \exp(-\tilde{m}_{t,g})]$. When $B_t > 0$, the native scale sharpens only the positively supported mechanisms. Otherwise every mechanism retains its raw contrast, and a nonpositive contrast is never turned positive by the adjustment. The sign test and scale come entirely from the fixed formulation and frozen encoder; they are shared by all target videos.

CEAVAD then assembles these quantities into the complete boundary proposal $\mathcal{R}_t$, which contains the generic normal account. For every mechanism, it also contains H_g , N_g , the state description Φ_g , the proposal margin $\tilde{m}_{t,g}$, and activation $a_{t,g}$. When $B_t > 0$, the proposal retains B_t and the raw margins as well. No mechanism is pruned because of its margin or rank. Thus $\mathcal{R}_t$ expresses which side of each hazard–benign contrast the target currently supports while keeping every explanation available for visual revision. By coupling mechanism-level semantic support with the corresponding event hypotheses and state descriptions, $\mathcal{R}_t$ bridges target-level retrieval and video-grounded adjudication.

3.3 Partitioned Episodic Evidence Adjudication

CEAVAD finally adjudicates $\mathcal{R}_t$ against temporally ordered video evidence. The proposal summarizes the target’s relative semantic support for the competing event explanations, while a target-centered episode reveals how the event unfolds around the target. To this end, CEAVAD organizes the episode into PAST, TARGET, and FUTURE observations.

We divide the video into nonoverlapping two-second intervals, sample one frame per second, and use the immediately adjacent intervals as context for W_t . The final interval is truncated at the video end; sampling is mapped to valid frames and unavailable context is omitted. The ordered groups $\tilde{X}_t^-$, $\tilde{X}_t^0$, and $\tilde{X}_t^+$ contain up to two PAST, TARGET, and FUTURE observations, respectively.

CEAVAD then conditions the MLLM on the resulting episode and proposal for W_t :

$$\mathcal{C}_t = (\tilde{X}_t^-, \tilde{X}_t^0, \tilde{X}_t^+, \mathcal{R}_t). \quad (8)$$

The three image groups are explicitly labeled PAST CONTEXT, TARGET SEGMENT, and FUTURE CONTEXT; the target is marked as the sole interval being scored. The MLLM receives all eight hazard–benign contrasts, their proposal margins and activations, and their event-state descriptions. It compares these candidate explanations with visible people, objects, actions, relations, and consequences in the episode.

Within $\mathcal{C}_t$, the temporal groups assume different inferential roles. The TARGET channel must establish that the concrete event described by some H_g actually occurs in W_t . Once that occurrence is visible, PAST and FUTURE help assess whether it violates local normality or is adequately explained by the generic normal account or N_g . The event-state description Φ_g connects evidence of onset, continuation, and resolution across these groups. The necessary evidential conditions for accepting a hazard hypothesis can be summarized as

$$\begin{aligned} & \text{Accept}_t(H_g) \implies \\ & \text{TargetOccurrence}_t(H_g) \\ & \wedge \text{LocalViolation}_t(H_g) \\ & \wedge \neg \text{AdequateBenign}_t(N_g, \mathcal{D}^0). \end{aligned} \quad (9)$$

Target evidence is required to establish event occurrence. Context cannot substitute for this evidence, but it informs whether the target-visible event violates local normality or is adequately explained by a benign alternative. A hazard confined to an adjacent group is not transferred to W_t . The MLLM may therefore confirm a target-visible hazard, reject it in favor of a benign explanation, or treat insufficient target evidence as normal.

Let $z_{t,a}$ and $z_{t,n}$ be the language-head logits under $\mathcal{C}_t$ for the leading-space, single-token continuations *abnormal* and *normal*. Their normalized two-token posterior is

$$p_t = \frac{\exp(z_{t,a})}{\exp(z_{t,a}) + \exp(z_{t,n})}. \quad (10)$$

This posterior is the interval-level anomaly score, with $\mathcal{R}_t$ influencing it through $\mathcal{C}_t$. Since the target intervals are nonoverlapping, each frame inherits its unique interval’s score:

$$s_f = p_t, \quad I_f \in W_t. \quad (11)$$

Beyond this score, the same condition supports an evidence-grounded explanation. The MLLM reports target-visible evidence, temporal state, and how the episode resolves competing explanations. Shared evidence supports localized detection and explanation.

4 Experiments

4.1 Experimental Setup

Datasets and metrics. We evaluate on three widely used benchmarks with distinct visual domains. UCF-Crime (Sultani, Chen, and Shah 2018) contains long real-world surveillance videos; its test set comprises 290 videos. UBnormal (Acsintoae et al. 2022) contains 211 test videos rendered across multiple virtual scenes, with anomaly types disjoint between training and testing. XD-Violence (Wu et al. 2020) contains diverse real-world and cinematic violence; we evaluate all 800 test videos using the visual stream. Following standard protocols, we report frame-level ROC-AUC for

UCF-Crime, micro frame-level ROC-AUC for UBnormal, and both frame-level ROC-AUC and average precision (AP) for XD-Violence, where AP is the primary metric. All metrics are computed over the complete test sets.

Unified training-free protocol. CEAVAD is training-free: it performs no parameter updates or target-domain fitting, and all pretrained parameters remain frozen. It is zero-shot: no target-domain demonstrations, labels, or retrieved references are provided at inference. All three datasets share the same eight-mechanism public-safety vocabulary, the same model configuration, and the same scoring rule. Videos are divided into nonoverlapping two-second target intervals and sampled at one frame per second; the adjacent intervals provide the PAST and FUTURE observations. The frozen vision–language encoder is OpenCLIP ViT-L/14 with MetaCLIP fullcc weights, and the frozen MLLM is Qwen3-VL-8B. The reported score is the 32-bit floating-point (FP32) two-token posterior over the continuations *abnormal* and *normal*, as defined in Eq. 10. All experiments are executed on a single NVIDIA H20 GPU.

4.2 Main Results

Table 1 compares CEAVAD with training-dependent methods and with methods that perform inference without parameter updates, while distinguishing whether target-domain references are used. CEAVAD achieves 86.15% ROC-AUC on UCF-Crime and 77.55% micro ROC-AUC on UBnormal, improving the previous best zero-shot, training-free results by 1.26 and 1.77 percentage points, respectively. On XD-Violence, it reaches 93.40% ROC-AUC and 79.52% AP, exceeding the strongest prior zero-shot, training-free results by 1.96 and 8.58 points. It also surpasses RTFM across the three primary metrics, although some methods trained with weak labels or anomaly-oriented instructions retain higher UCF-Crime ROC-AUC and XD-Violence AP.

4.3 Ablation Studies

Table 2 compares CEAVAD with Direct Qwen and three targeted variants. Direct Qwen removes the event contrasts and semantic proposal; the variants remove the event-state descriptions Φ_g , retain only the highest-margin mechanism for visual adjudication, or remove the distinct evidential roles of PAST, TARGET, and FUTURE, respectively. Full CEAVAD improves over Direct Qwen by 5.55 and 7.14 ROC-AUC points on UCF-Crime and UBnormal, respectively. Across the two datasets, removing event-state descriptions costs 1.87 and 3.54 points; retaining only the top mechanism costs 2.73 and 6.12 points; and removing the evidence partition costs 1.04 and 1.97 points. These consistent drops support event-state cues, cross-mechanism visual revision, and role-specific temporal evidence as complementary components. Additional variants are reported in the supplementary material.

4.4 Explanatory-Boundary Analysis

Posterior separation. We first examine whether CEAVAD produces a more discriminative organization of anomaly evidence at the dataset level. Figure 3 compares the class-conditional posterior distributions of Direct Qwen and

Method	Zero-shot	Training-free	UCF-Crime	UBnormal	XD-Violence	
			ROC-AUC (%)	ROC-AUC (%)	ROC-AUC (%)	AP (%)
Training-dependent methods						
RTFM (Tian et al. 2021)	No	No	84.30	64.94	–	77.81
UR-DMU (Zhou, Yu, and Yang 2023)	No	No	86.97	59.91	–	81.66
VadCLIP (Wu et al. 2024)	No	No	88.02	–	–	84.51
Holmes-VAU (Zhang et al. 2025)	Yes	No	88.96	56.77	–	87.68
Training-free methods						
AnomalyRuler (Yang et al. 2024)	No	Yes	–	71.90	–	–
LAVAD (Zanella et al. 2024)	Yes	Yes	80.28	64.23	85.36	62.01
EventVAD (Shao et al. 2025)	Yes	Yes	82.03	–	87.51	64.04
SUVAD (Gao, Yang, and Huang 2025)	Yes	Yes	83.90	–	–	70.10
MCANet (Dev, Hazari, and Das 2024)	Yes	Yes	82.47	–	87.43	69.72
VADTree (Li et al. 2025)	Yes	Yes	84.74	–	90.44	67.82
PANDA (Yang, Gao, and Shou 2025)	Yes	Yes	84.89	75.78	–	70.16
IntraTR (adaptive) (Lin et al. 2025)	Yes	Yes	84.08	69.02	91.23	68.03
CoReVAD (Lim and Hur 2026)	Yes	Yes	82.51	–	91.44	70.94
CEAVAD	Yes	Yes	86.15	77.55	93.40	79.52

Table 1: Comparison on three VAD benchmarks. Bold marks the best zero-shot, training-free result.

Method	UCF	UB
	ROC-AUC (%)	ROC-AUC (%)
Direct Qwen	80.60	70.41
w/o event-state	84.28	74.01
Top-1 mechanism	83.42	71.43
w/o evidence partition	85.11	75.58
Full CEAVAD	86.15	77.55

Table 2: Key design ablations on UCF-Crime and UBnormal.

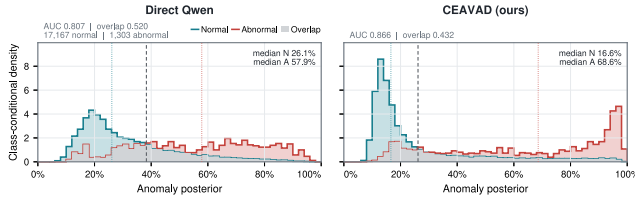


Figure 3: Distributional analysis of CEAVAD’s inference-time explanatory boundary.

CEAVAD on all unambiguous UCF-Crime target intervals: 17,167 normal and 1,303 abnormal intervals. We exclude 198 transition intervals containing both normal and abnormal content, and select no interval according to either method’s posterior. The left and right panels show Direct Qwen and CEAVAD, respectively. Cyan and red curves are class-normalized densities for normal and abnormal intervals, the gray region is their intersection, colored dotted lines mark class medians, and the black dashed line marks only the density crossover rather than a prediction threshold.

Direct Qwen already provides a useful ranking signal, but its normal and abnormal posteriors remain substantially entangled: their medians are 26.1% and 57.9%, giving a separation of 31.8 percentage points and an overlap coefficient of 0.520. CEAVAD moves the medians to 16.6% and 68.6%,

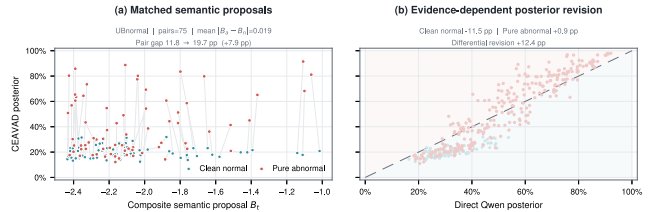


Figure 4: Matched proposals and evidence-dependent posterior revision on UBnormal.

increasing the separation to 52.0 points and reducing the overlap to 0.432. The diagnostic interval-level AUC on this unambiguous subset rises from 0.807 to 0.866; this diagnostic is used only to quantify the plotted distributions and is distinct from the official benchmark metrics in Table 1. The opposing median shifts and smaller intersection show that CEAVAD changes the organization of normal and abnormal evidence in a class-dependent way, rather than applying a shared posterior offset.

Posterior-blind diagnostic. The aggregate distributions can still differ because abnormal intervals may begin with stronger semantic hazard support. To test for evidence-dependent revision after controlling for the top mechanism and B_t , the composite semantic proposal score, we construct a posterior-blind matched-pair diagnostic. A target is labeled *pure abnormal* when at least 95% of its frames are annotated abnormal; it is *clean normal* when neither the target nor its adjacent context overlaps an annotated anomaly. Transition targets are excluded. Within each mechanism, we match a pure-abnormal target to a clean-normal target from a different video without replacement, requiring $|B_a - B_n|$ to be at most 0.1 pooled standard deviations. UCF-Crime and XD-Violence use $B_t > 0$ to form the high-resemblance pool; on UBnormal this rule yields no clean-normal candidate, so we

Dataset	$ \mathcal{P} $	$ \mathcal{H}_0 $	$ \mathcal{H}_1 $	$\hat{G}_{\mathcal{P}}$	$\Delta_{\mathcal{H}}$
UCF-Crime	992	4,337	1,049	2.77 [0.82, 4.86]	5.32 [2.41, 8.13]
UBnormal	75	96	264	7.89 [2.78, 13.32]	12.40 [9.42, 15.60]
XD-Violence	3,599	5,593	8,127	1.17 [-0.12, 2.44]	2.31 [1.19, 3.45]

Table 3: Posterior-blind matched-pair and pool-level diagnostics.

use the upper quartile of the B_t distribution. These selection and matching operations use only labels and B_t ; neither posterior is used for selection or matching. Confidence intervals are obtained from 2,000 video-level clustered bootstrap replicates, keeping temporally adjacent targets from the same video in one resampling cluster.

Let $\mathcal{H}_1$ and $\mathcal{H}_0$ denote the pure-abnormal and clean-normal targets in the pre-matching high-resemblance population, and let $\mathcal{P} \subseteq \mathcal{H}_1 \times \mathcal{H}_0$ denote the matched pairs. For CEAVAD and Direct Qwen posteriors p_t^C and p_t^D , respectively, the mean matched gap gain is

$$\hat{G}_{\mathcal{P}} = \frac{1}{|\mathcal{P}|} \sum_{(a,n) \in \mathcal{P}} [(p_a^C - p_n^C) - (p_a^D - p_n^D)]. \quad (12)$$

For the posterior revision $\delta_t = p_t^C - p_t^D$, we separately use the complete pre-matching population to compute

$$\Delta_{\mathcal{H}} = \frac{1}{|\mathcal{H}_1|} \sum_{a \in \mathcal{H}_1} \delta_a - \frac{1}{|\mathcal{H}_0|} \sum_{n \in \mathcal{H}_0} \delta_n. \quad (13)$$

The first statistic measures additional separation among matched targets; the second retains all eligible targets and removes revision shared by the two classes. Because they use different populations, their estimates need not coincide. Table 3 reports posterior percentage points with 95% CIs from the clustered bootstrap.

The proposal-score matching is tight: mean $|B_a - B_n|$ is 0.0053, 0.0190, and 0.0097 on UCF-Crime, UBnormal, and XD-Violence, respectively. Under this controlled semantic

resemblance, the abnormal–normal pair gap grows by 2.77 points on UCF-Crime and 7.89 points on UBnormal; the XD-Violence estimate is positive, although its interval crosses zero. The pool-level class-differential revision is positive on all three datasets, with each 95% CI excluding zero. Together, the diagnostics provide evidence consistent with a systematic difference in how CEAVAD revises abnormal and normal targets; the matched estimate controls the top mechanism and B_t , while the pool-level estimate does not require every normal score to decrease. UCF-Crime and XD-Violence also contain shared upward shifts.

Evidence-dependent boundary revision. Figure 4 visualizes this revision on UBnormal using the matched pairs defined above. Panel (a) displays all 75 matched pairs; gray segments connect the endpoints, with cyan and red denoting clean-normal and pure-abnormal targets. The mean absolute proposal-score difference is only 0.019, and the standardized difference between the two proposal-score distributions is -0.006 . Direct Qwen produces an 11.8-point mean abnormal–normal gap, whereas CEAVAD produces 19.7 points, a gain of 7.9 points with a 95% CI of [2.8, 13.3]. Pairwise ranking accuracy increases from 65.3% to 80.0%.

Panel (b) explains where this separation comes from. We use the pre-specified high-resemblance subset whose B_t is at or above the dataset-wide upper quartile. The horizontal axis is the Direct Qwen posterior, the vertical axis is the CEAVAD posterior, and the dashed diagonal denotes an unchanged posterior. Among 96 high-resemblance clean-normal intervals, CEAVAD changes the posterior by -11.5 points on average (95% CI $[-13.5, -9.2]$); among 264 pure-abnormal intervals, the mean change is $+0.9$ points. The resulting class-differential revision is $+12.4$ points (95% CI $[9.4, 15.6]$). The matched-pair and revision views therefore provide complementary evidence: the former controls the top mechanism and B_t , whereas the latter measures class-dependent posterior revision over all high-resemblance targets.

End-to-end qualitative analysis. Figure 5 visualizes the end-to-end CEAVAD process across diverse benchmark videos. Each row connects the temporally localized anomaly response with the contrastive proposal, video-evidence adjudication, and evidence-grounded explanation. Together, the examples illustrate how the same adjudication process supports both temporally localized anomaly detection and evidence-grounded anomaly understanding.

5 Conclusion

We introduced CEAVAD, a training-free VAD method that turns pretrained semantics into an inference-time anomaly criterion through contrastive, evidence-grounded event adjudication. CEAVAD constructs falsifiable hazard–benign event contrasts, forms a revisable proposal from target-level semantic support, and adjudicates competing explanations with temporally structured video evidence. The resulting explanatory boundary supports localized anomaly detection and evidence-grounded explanations. The same fixed system sets the training-free state of the art on UCF-Crime, UBnormal, and XD-Violence, with ablations and boundary diagnostics further supporting the design.

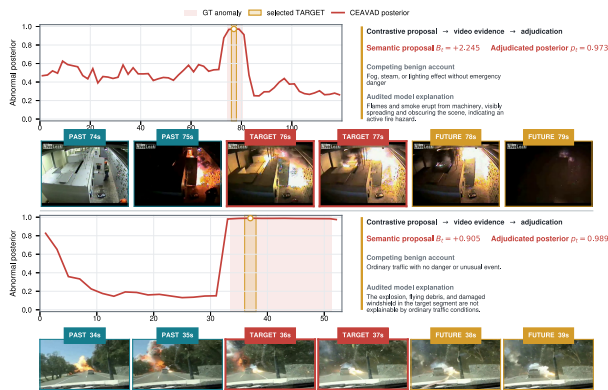


Figure 5: End-to-end visualization of contrastive proposal and evidence-grounded adjudication in CEAVAD.

References

- Acscintoe, A.; Florescu, A.; Georgescu, M.-I.; Mare, T.; Sumedrea, P.; Ionescu, R. T.; Khan, F. S.; and Shah, M. 2022. UBnormal: New Benchmark for Supervised Open-Set Video Anomaly Detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 20111–20121.
- Cai, Z.; Li, F.; Zheng, Z.; Bi, H.; and He, L. 2026. HeadHunt-VAD: Hunting Robust Anomaly-Sensitive Heads in MLLM for Tuning-Free Video Anomaly Detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 19835–19843.
- Cai, Z.; Li, F.; Zheng, Z.; and Qin, Y. 2025. HiProbe-VAD: Video Anomaly Detection via Hidden States Probing in Tuning-Free Multimodal LLMs. In *Proceedings of the 33rd ACM International Conference on Multimedia*, 592–601. ACM.
- Dev, P. P.; Hazari, R.; and Das, P. 2024. MCANet: Multimodal Caption Aware Training-Free Video Anomaly Detection via Large Language Model. In *Pattern Recognition: 27th International Conference, ICPR 2024, Proceedings, Part XXXII*, volume 15332 of *Lecture Notes in Computer Science*, 362–379. Springer.
- Feng, J.-C.; Hong, F.-T.; and Zheng, W.-S. 2021. MIST: Multiple Instance Self-Training Framework for Video Anomaly Detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 14009–14018.
- Gao, S.; Yang, P.; and Huang, L. 2025. SUVAD: Semantic Understanding Based Video Anomaly Detection Using MLLM. In *2025 IEEE International Conference on Acoustics, Speech and Signal Processing*, 1–5. IEEE.
- Hasan, M.; Choi, J.; Neumann, J.; Roy-Chowdhury, A. K.; and Davis, L. S. 2016. Learning Temporal Regularity in Video Sequences. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 733–742.
- Li, W.; Xu, Y.; Rao, Y.; Wang, Z.; and Deng, S. 2025. VADTree: Explainable Training-Free Video Anomaly Detection via Hierarchical Granularity-Aware Tree. In Belgrave, D.; Zhang, C.; Lin, H.; Pascanu, R.; Koniusz, P.; Ghassemi, M.; and Chen, N., eds., *Advances in Neural Information Processing Systems*, volume 38, 148372–148404. Curran Associates, Inc.
- Lim, H.; and Hur, Y. 2026. CoReVAD: A Contextual Reasoning Framework for Training-Free Video Anomaly Detection. Accepted to ICPR 2026, arXiv:2605.23116.
- Lin, D.; Qu, M.; Han, K.; Jiao, J.; Jin, X.; and Wei, Y. 2025. A Unified Reasoning Framework for Holistic Zero-Shot Video Anomaly Analysis. In Belgrave, D.; Zhang, C.; Lin, H.; Pascanu, R.; Koniusz, P.; Ghassemi, M.; and Chen, N., eds., *Advances in Neural Information Processing Systems*, volume 38, 29713–29744. Curran Associates, Inc.
- Liu, W.; Luo, W.; Lian, D.; and Gao, S. 2018. Future Frame Prediction for Anomaly Detection: A New Baseline. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 6536–6545.
- Lv, H.; Yue, Z.; Sun, Q.; Luo, B.; Cui, Z.; and Zhang, H. 2023. Unbiased Multiple Instance Learning for Weakly Supervised Video Anomaly Detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 8022–8031.
- Park, H.; Noh, J.; and Ham, B. 2020. Learning Memory-Guided Normality for Anomaly Detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 14360–14369.
- Pei, Y.; Hao, M.; Huang, Y.; and Zou, Q. 2026. DR-VAD: Definition-Guided Reasoning for Training-Free Video Anomaly Detection. *Neurocomputing*, 674: 132836.
- Radford, A.; Kim, J. W.; Hallacy, C.; Ramesh, A.; Goh, G.; Agarwal, S.; Sastry, G.; Askell, A.; Mishkin, P.; Clark, J.; Krueger, G.; and Sutskever, I. 2021. Learning Transferable Visual Models From Natural Language Supervision. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, 8748–8763. PMLR.
- Shao, Y.; He, H.; Li, S.; Chen, S.; Long, X.; Zeng, F.; Fan, Y.; Zhang, M.; Yan, Z.; Ma, A.; Wang, X.; Tang, H.; Wang, Y.; and Li, S. 2025. EventVAD: Training-Free Event-Aware Video Anomaly Detection. In *Proceedings of the 33rd ACM International Conference on Multimedia*, 2586–2595. ACM.
- Sultani, W.; Chen, C.; and Shah, M. 2018. Real-World Anomaly Detection in Surveillance Videos. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 6479–6488.
- Sun, Q.; Yang, Y.; Liu, Y.; and Wang, H. 2026. RAG4VAD: A Training-Free Retrieval-Augmented Generation Framework for Explainable Video Anomaly Detection. *Information Sciences*, 753: 123589.
- Tian, Y.; Pang, G.; Chen, Y.; Singh, R.; Verjans, J. W.; and Carneiro, G. 2021. Weakly-Supervised Video Anomaly Detection with Robust Temporal Feature Magnitude Learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 4955–4966.
- Wu, P.; Liu, J.; Shi, Y.; Sun, Y.; Shao, F.; Wu, Z.; and Yang, Z. 2020. Not Only Look, But Also Listen: Learning Multimodal Violence Detection under Weak Supervision. In *Computer Vision – ECCV 2020*, volume 12375 of *Lecture Notes in Computer Science*, 322–339. Springer.
- Wu, P.; Zhou, X.; Pang, G.; Zhou, L.; Yan, Q.; Wang, P.; and Zhang, Y. 2024. VadCLIP: Adapting Vision-Language Models for Weakly Supervised Video Anomaly Detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, 6074–6082.
- Yang, Y.; Lee, K.; Dariush, B.; Cao, Y.; and Lo, S.-Y. 2024. Follow the Rules: Reasoning for Video Anomaly Detection with Large Language Models. In *Computer Vision – ECCV 2024*, volume 15139 of *Lecture Notes in Computer Science*, 304–322. Springer.
- Yang, Z.; Gao, C.; and Shou, M. Z. 2025. PANDA: Towards Generalist Video Anomaly Detection via Agentic AI Engineer. In Belgrave, D.; Zhang, C.; Lin, H.; Pascanu, R.; Koniusz, P.; Ghassemi, M.; and Chen, N., eds., *Advances in*

Neural Information Processing Systems, volume 38, 83182–83211. Curran Associates, Inc.

Zanella, L.; Menapace, W.; Mancini, M.; Wang, Y.; and Ricci, E. 2024. Harnessing Large Language Models for Training-Free Video Anomaly Detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 18527–18536.

Zhang, H.; Xu, X.; Wang, X.; Zuo, J.; Huang, X.; Gao, C.; Zhang, S.; Yu, L.; and Sang, N. 2025. Holmes-VAU: Towards Long-Term Video Anomaly Understanding at Any Granularity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13843–13853.

Zhou, H.; Yu, J.; and Yang, W. 2023. Dual Memory Units with Uncertainty Regulation for Weakly Supervised Video Anomaly Detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, 3769–3777.

Supplementary Material

Beyond Hazard Resemblance: Contrastive Event Adjudication for Training-Free Video Anomaly Detection

S1 Supplementary Overview

This supplement provides the complete specification and extended evaluation of CEAVAD. It first expands the method details condensed in the main paper, including the fixed public-safety vocabulary, event-state descriptions, prompt condition, score construction, and evaluation mapping. It then reports extended component ablations, temporal and textual sensitivity analyses, and additional qualitative cases. All benchmark results use the same training-free protocol and the same fixed eight-mechanism hypothesis space described in the main paper.

S2 Complete Method Specification

This section specifies the complete path from an input video to its frame-aligned anomaly posterior. The notation follows Sec. 3 of the main paper. Given $V = \{I_f\}_{f=1}^F$, CEAVAD constructs nonoverlapping target intervals $\{W_t\}_{t=1}^T$, forms one revisable boundary proposal $\mathcal{R}_t$ for each target, and adjudicates that proposal with a target-centered video episode. No target-domain parameter is estimated in this process.

Figure S1 summarizes the complete data flow. The target frames instantiate the fixed event contrasts and form $\mathcal{R}_t$, while the target-centered episode supplies the role-separated evidence used to adjudicate that proposal. Algorithm 1 gives the corresponding per-video procedure.

S2.1 Fixed Event Contrasts

The public-safety hypothesis space is $\mathcal{M} = \{\mathcal{M}_g\}_{g=1}^G$ with $G = 8$ and

$$\mathcal{M}_g = (\mathcal{D}_g^+, \mathcal{D}^0, \mathcal{D}_g^-, \Phi_g). \quad (\text{S1})$$

The hazard bank $\mathcal{D}_g^+$ and mechanism-specific benign bank $\mathcal{D}_g^-$ each contain three observable descriptions. The two-description bank $\mathcal{D}^0$ is shared across mechanisms and represents generic normal activity. Each event-state specification $\Phi_g = (\phi_g^{\text{state}}, \phi_g^{\text{onset}}, \phi_g^{\text{cont}}, \phi_g^{\text{end}})$ states the unsafe relation and the visible evidence for its onset, continuation, and termination or benign resolution. The complete vocabulary is reported in Sec. S3.

The description banks and the explicit MLLM hypotheses use the same event mechanisms at two different resolutions. All descriptions in $\mathcal{D}_g^+$, $\mathcal{D}_g^-$, and $\mathcal{D}^0$ participate in visual-language retrieval. The MLLM receives one fixed canonical hazard statement $H_g \in \mathcal{D}_g^+$ and one canonical mechanism-specific benign statement $N_g \in \mathcal{D}_g^-$ per mechanism. Evidence from the complete banks remains present through the target-specific margin and activation supplied with this canonical competition.

S2.2 Target-Specific Boundary Proposal

For the sampled target frames $X_t^0 = \{I_{t,j}\}_{j=1}^{n_t}$, the frozen vision-language encoder produces unit image embeddings $\mathbf{v}_{t,j}$. Their normalized mean is

$$\bar{\mathbf{v}}_t = n_t^{-1} \sum_{j=1}^{n_t} \mathbf{v}_{t,j}, \quad \mathbf{q}_t = \frac{\bar{\mathbf{v}}_t}{\max(\|\bar{\mathbf{v}}_t\|_2, \varepsilon)}, \quad \varepsilon = 10^{-8}. \quad (\text{S2})$$

Let $\mathcal{P}_g^+$, $\mathcal{P}_g^-$, and $\mathcal{P}^0$ denote the corresponding sets of unit text embeddings. CEAVAD computes the set-level support

$$E(\mathbf{q}_t, \mathcal{P}) = \log \left[\frac{1}{|\mathcal{P}|} \sum_{\mathbf{p} \in \mathcal{P}} \exp(\mathbf{q}_t^\top \mathbf{p}) \right] \quad (\text{S3})$$

and the signed mechanism contrast

$$m_{t,g} = E(\mathbf{q}_t, \mathcal{P}_g^+) - \max\{E(\mathbf{q}_t, \mathcal{P}^0), E(\mathbf{q}_t, \mathcal{P}_g^-)\}. \quad (\text{S4})$$

Thus the hazard bank must exceed both ordinary normality and its visually confusable benign counterpart to obtain a positive raw margin.

Let $\gamma = \exp(\ell_{\text{enc}})$ be the frozen encoder logit scale. The composite proposal

$$B_t = \log \left[\frac{1}{G} \sum_{g=1}^G \exp(\gamma m_{t,g}) \right] \quad (\text{S5})$$

aggregates the eight scaled mechanism margins without pruning the mechanism set. CEAVAD uses the native scale only for positively supported mechanisms when the composite proposal is positive:

$$\tilde{m}_{t,g} = \begin{cases} \gamma m_{t,g}, & B_t > 0 \text{ and } m_{t,g} > 0, \\ m_{t,g}, & \text{otherwise,} \end{cases} \quad (\text{S6})$$

The bounded proposal activation is $a_{t,g} = \sigma(\tilde{m}_{t,g})$. The resulting boundary proposal $\mathcal{R}_t$ contains the shared generic-normal account and, for all eight mechanisms, $(H_g, N_g, \Phi_g, \tilde{m}_{t,g}, a_{t,g})$. It also retains B_t and the raw margins when the composite proposal is positive. All mechanisms remain available to the subsequent visual adjudication regardless of rank.

S2.3 Partitioned Episodic Adjudication

CEAVAD combines the proposal with an ordered episode

$$C_t = (\tilde{X}_t^-, \tilde{X}_t^0, \tilde{X}_t^+, \mathcal{R}_t), \quad (\text{S7})$$

where the three image groups are explicitly identified as PAST CONTEXT, TARGET SEGMENT, and FUTURE CONTEXT. The adjudication instruction marks the target group as the sole

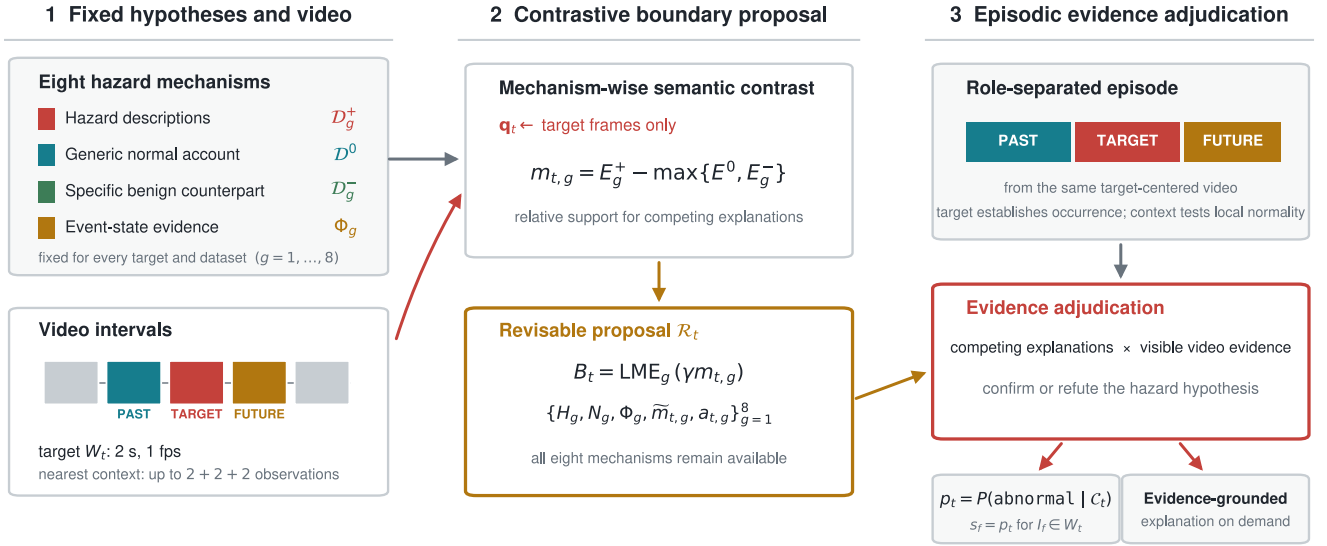


Figure S1: Complete CEAVAD inference data flow.

scored interval and requires target-visible evidence to establish the occurrence of a candidate hazard. The adjacent groups then assess whether that target-visible event violates local normality or is adequately accounted for by N_g or D^0 . Event-state descriptions connect visible onset, continuation, and resolution evidence across these roles, while the instruction treats evidence confined to context as insufficient to establish an anomaly in the target.

For leading-space, single-token continuations *abnormal* and *normal*, let $z_{t,a}$ and $z_{t,n}$ be the candidate language-head logits. The final interval posterior is

$$p_t = \frac{\exp(z_{t,a})}{\exp(z_{t,a}) + \exp(z_{t,n})}. \quad (\text{S8})$$

Each frame receives the score of its unique target interval, $s_f = p_t$ for $I_f \in W_t$. The same condition C_t can be queried on demand for a compact account of the target-visible evidence, temporal state, and resolution of the competing explanations.

S3 Public-Safety Vocabulary and Prompting

The fixed vocabulary is dataset-agnostic and is used unchanged for every target across all benchmarks. This section reports its canonical competing statements, complete retrieval banks, event-state specifications, and the condition presented to the MLLM. The canonical hazard–benign pairs are listed in Table S1; the full retrieval banks are given in Table S2. The two shared generic-normal descriptions are *ordinary calm surveillance scene without danger* and *normal traffic walking standing shopping or routine activity*. The event-state specifications used to interpret ordered evidence appear in Table S3.

Adjudication Condition. For each target, the visual message is ordered and role labeled as

PAST CONTEXT (context only; not the decision target): $\tilde{X}_t^-$
TARGET SEGMENT (the only decision target): $\tilde{X}_t^0$

Algorithm 1 CEAVAD inference for one video.

Require: Video V ; fixed contrasts $\mathcal{M}$; frozen vision–language encoder and MLLM

Ensure: Frame-aligned anomaly posteriors $\mathbf{s}(V)$

- 1: Divide V into target intervals $\{W_t\}_{t=1}^T$ and sample target frames.
- 2: Embed every description bank once; retain the canonical pair and Φ_g for each g .
- 3: **for** $t = 1$ to T **do**
- 4: Compute $\mathbf{q}_t$ using Eq. S2.
- 5: **for** $g = 1$ to G **do**
- 6: Compute full-bank supports and $m_{t,g}$ using Eqs. S3–S4.
- 7: **end for**
- 8: Compute B_t , $\tilde{m}_{t,g}$, and $a_{t,g}$ using Eqs. S5–S6.
- 9: Collect the adjacent PAST/FUTURE observations, assemble $\mathcal{R}_t$ with all mechanisms, and form C_t .
- 10: Evaluate the two continuation logits and obtain p_t from Eq. S8.
- 11: Assign p_t to every frame covered by W_t .
- 12: **end for**
- 13: **return** $\mathbf{s}(V)$

FUTURE CONTEXT (context only; not the decision target): $\tilde{X}_t^+$.

The accompanying semantic condition contains the two generic-normal descriptions and one row for every mechanism g . Each row has the fields

hazard mechanism: g ; hazard hypothesis: H_g ;
benign counterpart: N_g ; event state: Φ_g ;
proposal margin: $\tilde{m}_{t,g}$; activation: $a_{t,g}$.

When $B_t > 0$, the condition additionally exposes B_t and the eight raw margins $\{m_{t,g}\}_{g=1}^G$ so that the MLLM can distinguish the composite proposal from its mechanism-level support. The eight rows are retained in their fixed order; no row is removed according to its activation or rank.

The adjudication instruction assigns occurrence and local-normality evidence to different temporal roles: visible people,

objects, actions, relations, or consequences in the TARGET establish whether an event occurs in the scored interval; the adjacent groups assess whether that target-visible event violates the local episode or remains compatible with an ordinary or mechanism-specific benign account. The hazard explanation is accepted only when a concrete hazard occurs in the target and the available benign account is inadequate. The assistant state is prefixed by

After comparing all competing
semantic-memory explanations and benign
alternatives only against TARGET-visible
evidence, the TARGET segment is

Here, “TARGET-visible evidence” constrains event occurrence: adjacent observations remain available to assess local normality and benign adequacy, but cannot supply an event absent from the target. The continuation is constrained to the leading-space, single-token candidates `abnormal` and `normal`. Their candidate logits define the posterior in Eq. S8.

S4 Implementation and Evaluation Details

For benchmark evaluation, the interval posterior from Eq. S8 is assigned to every video frame covered by its target interval. This produces the frame-aligned sequence used by the benchmark metrics and by the qualitative cases in Fig. S4.

For a video with frame rate r and target interval $[u, v]$, the corresponding frame range is $[ru], [rv]$ after clipping to the valid video extent. The nonoverlapping intervals therefore give each frame one score; the final interval is truncated at the video end. The evaluated records use 30 fps on UCF-Crime and UBnormal and 24 fps on XD-Violence, so the two-second boundaries map to disjoint integer frame ranges.

For UCF-Crime, the official abnormal frame ranges are rasterized into a binary frame sequence and ROC-AUC is computed after concatenating all 290 test videos. UBnormal uses the provided test annotations and reports micro frame-level ROC-AUC over all 211 videos. For XD-Violence, official temporal ranges are rasterized for all 800 test videos; we report concatenated frame-level ROC-AUC and average precision (AP), with AP as the primary metric. The same interval posteriors and frame mapping are used for every method variant.

Beyond the two-token continuation in Eq. S8, which provides the anomaly score, CEAVAD reuses the same role-separated episode and boundary proposal to obtain a structured evidence-grounded account of the target event. The account identifies the target-visible event and evidence, its temporal state, and the benign explanation considered by the adjudication, as illustrated in Fig. S4.

S5 Extended Ablation Studies

We extend the main-paper ablation by separating the scientific roles of event-contrast construction, proposal formation, mechanism retention, and temporally partitioned evidence. The controlled variants and their results are given in Table S4.

Table S4 extends the main-paper component study with controlled proposal-formation and temporal-evidence variants.

All conditions use the same target geometry, frozen models, test sets, and two-token scoring rule; all CEAVAD variants retain the fixed mechanism vocabulary, whereas Direct Qwen omits the event contrasts and semantic proposal. *Direct Qwen* removes the event contrasts and semantic proposal. For proposal formation, *Unscaled margins* supplies the raw $m_{t,g}$ values and their sigmoid activations without native scaling or composite gating, whereas *Unconditional scaling* applies γ to every positive margin without the $B_t > 0$ condition. For temporal evidence, *Target only* uses the complete proposal with target frames alone; *Unpartitioned episode* presents the target and ordered context as one visual sequence; and *w/o evidence partition* labels the three temporal roles but lets evidence from all three contribute without assigning distinct evidential responsibilities. *Top-1 mechanism* retains only the highest raw-margin mechanism, while *w/o event-state* removes Φ_g from the otherwise complete partitioned adjudication.

Condition	UCF-Crime ROC-AUC (%)	UBnormal ROC-AUC (%)
Direct Qwen	80.60	70.41
Unscaled margins	80.88	74.20
Unconditional scaling	81.57	72.94
Target only	84.32	73.82
Unpartitioned episode	83.99	73.65
w/o evidence partition	85.11	75.58
Top-1 mechanism	83.42	71.43
w/o event-state	84.28	74.01
Full CEAVAD	86.15	77.55

Table S4: Key ablations on UCF-Crime and UBnormal.

Full CEAVAD exceeds Direct Qwen by 5.55 ROC-AUC points on UCF-Crime and 7.14 points on UBnormal. The component pattern is consistent but more pronounced on UBnormal: retaining only the top mechanism reduces ROC-AUC by 2.73 points on UCF-Crime and 6.12 points on UBnormal, while removing event-state descriptions costs 1.87 and 3.54 points, respectively. The larger UBnormal drops indicate greater performance dependence on alternative mechanisms for visual revision and event-evolution modeling. The temporal controls isolate a separate effect: target-only, unpartitioned, and non-role-specific episodes lose 1.04–2.16 points on UCF-Crime and 1.97–3.90 points on UBnormal, showing that both surrounding context and its evidential partition contribute. The proposal-formation controls show the same pattern: unscaled margins trail Full CEAVAD by 5.27 and 3.35 points, and unconditional scaling by 4.58 and 4.61 points, on UCF-Crime and UBnormal, respectively. Together, these controls support complementary roles for proposal construction, mechanism retention, event-state evidence, and partitioned context.

S6 Robustness and Sensitivity

This section examines temporal geometry and textual realization. Each controlled study retains the complete CEAVAD adjudication procedure and varies only the stated factor.

S6.1 Temporal Window Robustness

We vary one temporal parameter, the window size, while retaining the fixed event vocabulary, frozen models, and

adjudication rule. Changing the window size changes the nonoverlapping target interval and its stride together. Sampling remains fixed at 1 fps, so the number of observations in the target and context groups changes deterministically with the window size. Table S5 and Figure S2 report the complete-test-set results.

Window size (s)	ROC-AUC (%)
1	85.34
2 (default)	86.15
4	86.61
6	86.64
10	86.74
16	85.94

Table S5: Sensitivity to temporal window size on UCF-Crime.

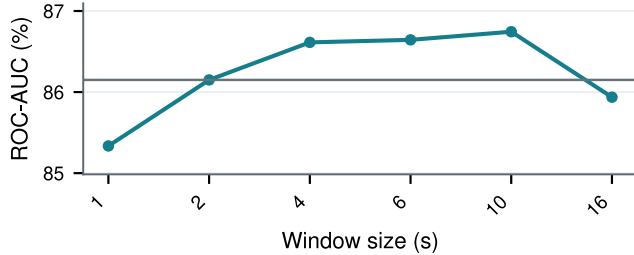


Figure S2: Sensitivity to temporal window size on UCF-Crime.

Across window sizes from one to sixteen seconds, UCF-Crime ROC-AUC remains within 85.34–86.74. The two-second default reaches 86.15, exactly 0.59 points below the displayed maximum of 86.74, and the alternatives show no monotonic dependence on window size.

S6.2 Robustness to Textual Realization

We test whether CEAVAD depends on one exact wording of its fixed event vocabulary. Before evaluation, we froze two dataset-agnostic alternative realizations that retain the same eight mechanisms, hazard–benign polarity, three descriptions per side, two generic-normal descriptions, and unchanged event-state specifications. They change only the wording of the retrieval descriptions and canonical competing statements. Table S6 and Fig. S3 report complete test-set results for all three banks. The two alternative banks were constructed as dataset-agnostic paraphrases before evaluation: each keeps the same eight mechanism identities, three hazard descriptions, three mechanism-specific benign descriptions, and event-state specifications, while its two generic-normal descriptions are frozen with that realization. Once fixed, each bank is used unchanged for every target and benchmark. Their complete contents are reproduced in the unnumbered end tables for Paraphrase A and Paraphrase B.

Text bank	UCF	UB	XD	
	ROC-AUC (%)	ROC-AUC (%)	ROC-AUC (%)	AP (%)
Original	86.15	77.55	93.40	79.52
Paraphrase A	84.73	76.78	93.01	77.86
Paraphrase B	85.15	76.08	92.75	77.93

Table S6: Performance across frozen textual realizations.

Across the original and two paraphrased realizations, the primary-metric ranges are 1.42, 1.47, and 1.66 points on UCF-Crime, UBnormal, and XD-Violence, respectively. The bounded variation across all three benchmarks indicates limited sensitivity to the exact surface wording under these frozen realizations, while mechanism membership, polarity, and event-state semantics remain fixed.

S7 Additional Qualitative Analysis

Target-centered cases cover confirmed hazards, visually confusable benign events, evidence-recovered hazards, and temporal transitions.

Figure S4 pairs one normal and one abnormal target from each benchmark, none of which appears in the main-paper case study. Each row shows the two-frame PAST, TARGET, and FUTURE groups, proposal B_t , posterior p_t , tested competition, and an account generated from the same condition used for scoring; every statement is restricted to evidence visible in the displayed frames.

On UCF-Crime, controlled vehicle motion sustains the benign account, while target-visible impact and an overturning vehicle confirm the competing hazard. On UBnormal, ordinary movement provides no collective-distress evidence, whereas persistent flame and smoke confirm an active fire. On XD-Violence, routine object handling supports the benign account, while an aimed handgun supplies target-visible evidence that the competing benign explanation cannot accommodate.

The XD-Violence benign case has $B_t = 1.273$ but $p_t = 0.396$, whereas the UBnormal fire case has $B_t = -1.107$ and $p_t = 0.915$. These opposite revisions show that video evidence can reject a strong semantic proposal or confirm a hazard with weak initial retrieval support.

S8 Limitations

CEAVAD addresses video anomaly detection and understanding with a fixed eight-mechanism hypothesis space that is used unchanged across all three benchmarks, but no compact vocabulary can exhaust the open set of possible anomalies; specialized environments may require additional hazard–benign contrasts. The current implementation also uses compact, target-centered episodes sampled at one frame per second. This design captures local event evolution, while anomalies defined by very brief evidence, long-range dependencies, or nonvisual signals may benefit from adaptive sampling, longer temporal context, or additional modalities such as audio. Finally, although CEAVAD requires no target-domain training, its interval-wise adjudication leaves room for greater inference efficiency on long videos. Reusing shared evidence across neighboring intervals and improving inference efficiency are promising directions for future work.

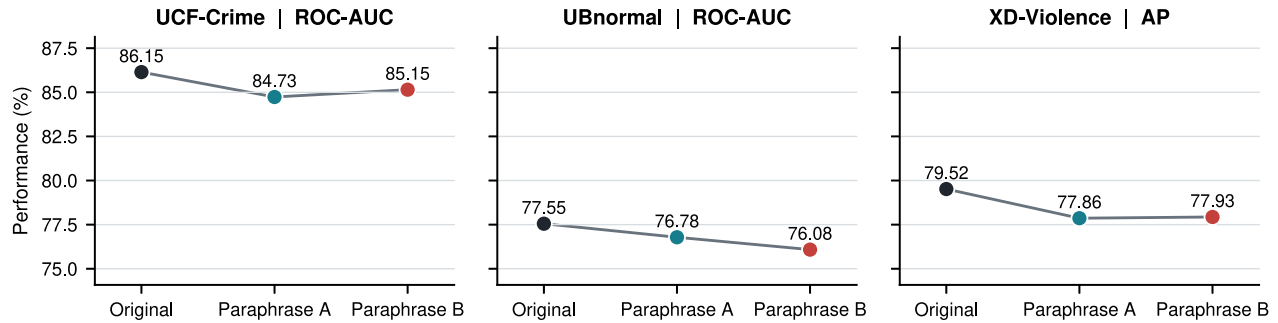


Figure S3: Primary metrics across frozen textual realizations.



Figure S4: Evidence-grounded event adjudication across three VAD benchmarks.

Case reading. The rows pair ordinary and hazardous targets from UCF-Crime, UBnormal, and XD-Violence. The target-centered frames, proposal, posterior, and tested competition are shown together so that the reported decision can be traced to visible evidence. Controlled vehicle motion and routine crowd or object activity support the ordinary cases, whereas target-visible collision, fire, and weapon threat support the corresponding hazardous cases. On UCF-Crime, the ordinary vehicle sequence remains orderly while the paired target contains an overturning vehicle. On UBnormal, the ordinary crowd remains calm while the paired target contains persistent flames and smoke. On XD-Violence, routine object handling contrasts with a target containing an aimed handgun. These examples expose the event evidence and the competing account in the same visual record.

Mechanism	Canonical hazard statement H_g	Canonical benign counterpart N_g
Physical violence and weapon threat	visible physical assault fight brawl beating kicking punching or violent struggle	sports contact martial arts training dancing stage performance without visible real harm
Vehicle and mobility hazards	visible vehicle crash collision rollover person hit by vehicle or dangerous road impact	ordinary traffic congestion braking turning parking waiting at intersection or vehicles moving normally
Fire, explosion, and hazardous release	visible fire flame heavy smoke explosion blast burning object or hazardous smoke plume	fog steam dust stage smoke lighting effect fireworks or visual effects without emergency danger
Intrusion and property violation	visible burglary forced entry theft robbery shoplifting vandalism or property damage	normal shopping delivery carrying bags maintenance cleaning moving boxes or opening doors normally
Crowd panic and collective disorder	visible crowd panic stampede crush risk people fleeing immediate danger or uncontrolled crowd surge	ordinary crowd queue audience celebration cheering gathering or people walking without panic
Human distress and medical emergency	visible person falling collapsing lying injured unconscious having seizure or unable to stand	person sitting resting exercising stretching sleeping in normal context or bending to pick something up
Restricted-area and safety-rule violation	visible trespassing restricted area entry unsafe climbing wrong-way movement or dangerous rule violation	authorized worker guard resident staff maintenance or emergency responder in restricted-looking area
Environmental, structural, and industrial hazards	visible structural collapse falling object electrocution machinery entrapment or industrial safety hazard	normal construction maintenance machinery operation worker activity or equipment movement without danger

Table S1: Canonical hazard–benign event competitions used by the MLLM.

Mechanism	Complete hazard bank $\mathcal{D}_g^+$	Complete mechanism-specific benign bank $\mathcal{D}_g^-$
Physical violence and weapon threat	1. visible physical assault fight brawl beating kicking punching or violent struggle 2. visible weapon threat shooting stabbing armed robbery or person threatening another person 3. visible person injured by deliberate attack or forced violent contact	1. sports contact martial arts training dancing stage performance without visible real harm 2. people arguing gesturing playing acting or rehearsing without physical injury or weapon threat 3. police responders or crowd watching without active assault happening now
Vehicle and mobility hazards	1. visible vehicle crash collision rollover person hit by vehicle or dangerous road impact 2. visible damaged vehicle debris blocked road traffic accident injury fire or smoke after collision 3. visible unsafe mobility event such as illegal turn near collision jaywalking danger or vehicle out of lane	1. ordinary traffic congestion braking turning parking waiting at intersection or vehicles moving normally 2. headlights reflections dust rain shadows road motion or stopped cars without collision or injury 3. pedestrians crossing normally cyclists riding in lane or vehicles maneuvering safely
Fire, explosion, and hazardous release	1. visible fire flame heavy smoke explosion blast burning object or hazardous smoke plume 2. visible dangerous fire explosion aftermath debris emergency damage or active burning hazard 3. visible hazardous material leak chemical smoke gas cloud or unsafe environmental condition	1. fog steam dust stage smoke lighting effect fireworks or visual effects without emergency danger 2. normal cooking smoke exhaust mist haze reflection or weather-related low visibility 3. firefighters responders equipment lights or smoke-like background without visible active hazard
Intrusion and property violation	1. visible burglary forced entry theft robbery shoplifting vandalism or property damage 2. visible person stealing snatching breaking door breaking window damaging property or threatening staff 3. visible unauthorized intrusion into restricted private or closed area with suspicious handling of objects	1. normal shopping delivery carrying bags maintenance cleaning moving boxes or opening doors normally 2. authorized worker staff customer resident entering leaving browsing shelves or handling goods routinely 3. people exchanging objects talking waiting repairing or transporting property without theft or damage
Crowd panic and collective disorder	1. visible crowd panic stampede crush risk people fleeing immediate danger or uncontrolled crowd surge 2. visible riot violent crowd disorder people running in fear pushing falling or being crushed 3. visible emergency crowd evacuation chaos with injured people pressure or blocked escape	1. ordinary crowd queue audience celebration cheering gathering or people walking without panic 2. sports fans dancers performers parade festival or busy street crowd without visible danger 3. people running for exercise commuting hurry or play without fear injury pushing or collapse
Human distress and medical emergency	1. visible person falling collapsing lying injured unconscious having seizure or unable to stand 2. visible medical emergency human distress person trapped struck crushed or needing urgent help 3. visible body on ground after hazard injury impact or abnormal immobility in unsafe context	1. person sitting resting exercising stretching sleeping in normal context or bending to pick something up 2. actor performer athlete dancer or child playing on ground without visible distress or injury 3. people waiting lying on beach bench floor mat or staged scene without emergency signs
Restricted-area and safety-rule violation	1. visible trespassing restricted area entry unsafe climbing wrong-way movement or dangerous rule violation 2. visible person or vehicle in forbidden unsafe zone such as tracks road lane roof construction area or closed property 3. visible suspicious loitering near restricted entrance security boundary or unsafe facility context	1. authorized worker guard resident staff maintenance or emergency responder in restricted-looking area 2. normal pedestrian crossing at crosswalk vehicle turning legally or person waiting in allowed area 3. tourist visitor delivery worker or routine inspection without visible danger or unauthorized behavior
Environmental, structural, and industrial hazards	1. visible structural collapse falling object electrocution machinery entrapment or industrial safety hazard 2. visible severe weather flood debris falling sign broken structure or environmental danger threatening people 3. visible person caught trapped crushed struck by object or endangered by machinery equipment or collapse	1. normal construction maintenance machinery operation worker activity or equipment movement without danger 2. ordinary rain wind shadows moving flags water reflection or background clutter without structural hazard 3. stored materials tools vehicles machines or buildings appearing intact without visible accident

Table S2: Complete description banks used for visual–language retrieval.

Mechanism	Event-state specification Φ_g
Physical violence and weapon threat	Unsafe state: a person remains under active violent force, coercion, or weapon threat Onset: a strike, forced contact, pursuit, restraint, or weapon threat begins Continuation: the attack, struggle, coercion, injury, or weapon control remains visible Termination or benign resolution: contact has ended and visible interaction is sport, performance, assistance, or routine social activity
Vehicle and mobility hazards	Unsafe state: a collision, dangerous vehicle-person relation, or uncontrolled mobility hazard remains active Onset: impact, loss of control, unsafe incursion, or a near-collision relation begins Continuation: impact motion, a person in the vehicle path, wreckage, blockage, or dangerous trajectory remains visible Termination or benign resolution: traffic is controlled and visible motion is ordinary braking, parking, turning, crossing, or lane-following
Fire, explosion, and hazardous release	Unsafe state: active fire, hazardous smoke, explosion damage, or dangerous material release remains present Onset: ignition, blast, rupture, sparking, or hazardous release begins Continuation: flame, dense sourced smoke, spreading plume, debris, damage, or exposure remains visible Termination or benign resolution: the source is absent or resolved and the appearance is fog, steam, dust, exhaust, weather, or a visual effect
Intrusion and property violation	Unsafe state: unauthorized access, dispossession, concealment, forced entry, or property damage remains in progress Onset: forced access, snatching, concealment, removal, breaking, or unauthorized boundary crossing begins Continuation: the taking, intrusion, escape with property, forced access, or damage remains visibly connected Termination or benign resolution: visible activity is authorized shopping, delivery, maintenance, repair, access, or ordinary object handling
Crowd panic and collective disorder	Unsafe state: uncontrolled collective flight, violent disorder, crush pressure, or evacuation danger remains active Onset: fear-driven flight, violent crowd surge, pushing, falling, or emergency evacuation begins Continuation: panic directionality, compression, uncontrolled surge, injury, or blocked escape remains visible Termination or benign resolution: the group is orderly and visible movement is a queue, celebration, performance, commute, or exercise
Human distress and medical emergency	Unsafe state: a person remains fallen, trapped, injured, unresponsive, or in visible medical distress Onset: a fall, collapse, impact, seizure, entrapment, or loss of mobility begins Continuation: abnormal immobility, inability to rise, injury, entrapment, or urgent assistance remains visible Termination or benign resolution: the person visibly recovers or the posture is resting, exercise, play, performance, or another ordinary activity
Restricted-area and safety-rule violation	Unsafe state: unsafe or unauthorized occupation of a hazardous restricted path or area remains active Onset: a person or vehicle enters, climbs into, or moves against a visibly restricted or dangerous path Continuation: continued unsafe occupancy, climbing, wrong-way motion, boundary crossing, or exposure remains visible Termination or benign resolution: the subject is visibly authorized or follows an allowed crossing, work, inspection, delivery, or routine access path
Environmental, structural, and industrial hazards	Unsafe state: structural, mechanical, electrical, falling-object, or severe environmental danger remains active Onset: collapse, entrapment, machinery contact, falling debris, electrocution, flooding, or severe exposure begins Continuation: instability, entrapment, dangerous machinery relation, debris, damage, flooding, or threatened people remains visible Termination or benign resolution: structures and equipment are intact and activity is controlled construction, maintenance, operation, or ordinary weather

Table S3: Complete event-state descriptions used for evidence adjudication.

Mechanism	Paraphrase A hazard bank $\mathcal{D}_{g,A}^+$	Paraphrase A benign bank $\mathcal{D}_{g,A}^-$
Generic-normal descriptions: a calm ordinary scene with no visible public-safety threat; routine walking standing traffic shopping or other normal activity.		
Physical violence and weapon threat	1. a visible physical attack including fighting beating kicking punching or a violent struggle 2. a visible firearm or blade threat shooting stabbing armed robbery or direct threat against a person 3. a visible injury caused by an intentional attack or forceful violent contact	1. visible sports contact martial-arts practice dance or stage action without real harm 2. visible arguing gesturing play acting or rehearsal without injury or weapon threat 3. police emergency personnel or onlookers present while no assault is visibly occurring
Vehicle and mobility hazards	1. a visible road collision rollover pedestrian impact or other dangerous vehicle crash 2. visible crash aftermath with a damaged vehicle debris blocked road injury fire or smoke 3. visible unsafe mobility such as wrong-lane travel dangerous crossing or an imminent collision	1. normal traffic slowing turning parking waiting or moving without a crash 2. headlights rain dust shadows road motion or stopped vehicles with no impact or injury 3. pedestrians cross normally cyclists remain in lane or vehicles maneuver under control
Fire, explosion, and hazardous release	1. visible flames active burning dense smoke an explosion or a hazardous plume 2. visible blast or fire aftermath with debris damage smoke or an active ignition source 3. a visible chemical or gas leak unsafe vapor cloud or other hazardous material release	1. visible fog steam dust stage smoke fireworks lighting or visual effects without danger 2. cooking smoke exhaust mist haze reflections or weather-related low visibility 3. responders equipment warning lights or smoke-like background without an active hazard
Intrusion and property violation	1. visible theft robbery burglary forced entry vandalism or property destruction 2. a person visibly steals snatches breaks access damages property or threatens staff 3. unauthorized entry into private or restricted space with suspicious object handling	1. routine shopping delivery bag carrying cleaning maintenance or normal use of a doorway 2. authorized staff customers residents or workers enter leave browse or handle goods normally 3. people exchange carry repair or transport objects without theft damage or coercion
Crowd panic and collective disorder	1. visible crowd panic stampede crushing pressure or people fleeing an immediate threat 2. visible riot or uncontrolled crowd movement with fear pushing falls or crush danger 3. a visible emergency evacuation with chaos injury crowd pressure or blocked escape	1. an orderly queue audience celebration gathering or walking crowd without panic 2. sports spectators dancers performers parade or festival crowds without visible danger 3. people run for exercise commuting urgency or play without fear pushing injury or collapse
Human distress and medical emergency	1. a visible person falls collapses lies injured becomes unconscious has a seizure or cannot stand 2. a visible medical emergency with a trapped struck crushed or severely distressed person needing help 3. a body remains on the ground after impact injury or another hazard in an unsafe context	1. a person sits rests stretches exercises sleeps normally or bends to retrieve an object 2. an actor athlete dancer performer or child is on the ground without distress or injury 3. people lie or wait normally on a beach bench floor or mat without emergency evidence
Restricted-area and safety-rule violation	1. visible trespass entry into a restricted area unsafe climbing wrong-way travel or dangerous rule breaking 2. a person or vehicle visibly occupies a forbidden hazardous zone such as tracks a road lane roof or closed site 3. visible suspicious lingering or boundary crossing near a restricted entrance or unsafe facility	1. authorized staff guards residents maintenance workers or responders occupy a restricted-looking area 2. pedestrians use a crosswalk vehicles turn legally or people wait in an allowed location 3. visitors delivery workers tourists or inspectors follow an ordinary authorized access path
Environmental, structural, and industrial hazards	1. visible structural failure falling debris electrical danger machinery entrapment or an industrial accident 2. visible flood severe weather broken structure or falling object that threatens people 3. a person is visibly trapped crushed struck or endangered by machinery equipment or collapse	1. controlled construction maintenance machinery use or worker activity without visible danger 2. ordinary rain wind shadows moving flags water reflections or clutter without structural failure 3. stored tools materials vehicles machines or intact buildings with no visible accident

Paraphrase A bank. Complete frozen hazard, mechanism-specific benign, and generic-normal descriptions used in the textual-realization control.

Mechanism	Paraphrase B hazard bank $\mathcal{D}_{g,B}^+$	Paraphrase B benign bank $\mathcal{D}_{g,B}^-$
Generic-normal descriptions: people and vehicles follow ordinary controlled activity without visible danger; routine movement waiting work shopping or social interaction continues normally.		
Physical violence and weapon threat	1. one person visibly strikes kicks punches restrains or violently grapples with another 2. a weapon is visibly used or aimed while a person is shot stabbed robbed or threatened 3. deliberate force visibly injures or overpowers a person	1. participants make controlled contact in sport training dance or a staged performance 2. people argue gesture play or rehearse without injury coercion or a weapon threat 3. responders or bystanders are present but no active attack is visible
Vehicle and mobility hazards	1. a vehicle visibly collides rolls over or strikes a person or object 2. impact leaves visible damage debris blockage injury fire or smoke around a vehicle 3. a vehicle or pedestrian enters an unsafe path with imminent collision risk	1. vehicles brake turn park queue or travel normally without impact 2. light weather dust shadow or camera motion resembles an incident but no collision is visible 3. pedestrians cyclists and vehicles move through their expected paths under control
Fire, explosion, and hazardous release	1. visible flame active burning dense sourced smoke or an explosion is present 2. a blast or fire leaves visible debris damage smoke or continuing combustion 3. gas vapor chemical material or another hazardous substance visibly escapes	1. fog steam dust stage smoke fireworks or lighting creates a harmless smoke-like appearance 2. cooking exhaust mist haze reflection or weather explains the visible plume 3. responders or equipment are visible but no active fire blast or release is present
Intrusion and property violation	1. a person visibly forces entry steals robs vandalizes or damages property 2. a person snatches conceals removes or breaks property without authorization 3. a person crosses a protected boundary and handles objects in an unauthorized manner	1. people shop deliver clean maintain carry goods or use doors routinely 2. authorized staff customers residents or workers handle property normally 3. objects are exchanged repaired moved or transported without forced access or theft
Crowd panic and collective disorder	1. a crowd visibly flees surges or compresses under panic or immediate danger 2. violent disorder causes uncontrolled pushing falling or crush pressure 3. an emergency evacuation visibly produces chaos injury or blocked escape	1. the crowd queues gathers cheers or walks in an orderly way 2. spectators dancers performers or festival participants move without danger 3. people run for travel exercise or play without panic pressure or collapse
Human distress and medical emergency	1. a person visibly falls collapses convulses lies injured or cannot stand 2. a trapped struck crushed or unresponsive person visibly requires urgent help 3. a person remains abnormally motionless on the ground after impact or danger	1. a person sits rests sleeps stretches exercises or bends normally 2. a performer athlete dancer or child lies or plays on the ground without distress 3. a person waits or reclines in an ordinary setting without injury evidence
Restricted-area and safety-rule violation	1. a person or vehicle visibly enters climbs into or moves against a restricted unsafe path 2. a subject remains in a forbidden zone such as tracks traffic lanes roofs or closed property 3. a subject crosses or lingers at a visible safety or security boundary without authorization	1. an authorized worker guard resident or responder occupies the area for a routine purpose 2. a pedestrian or vehicle follows an allowed crossing turn lane or waiting area 3. a visitor courier tourist or inspector follows a visible routine access path
Environmental, structural, and industrial hazards	1. a structure object electrical source or machine visibly fails and threatens a person 2. flood severe weather debris or structural damage creates immediate visible danger 3. machinery equipment collapse or a falling object visibly traps strikes or crushes a person	1. workers operate build repair or maintain equipment under controlled conditions 2. rain wind reflections flags water or clutter moves without failure or danger 3. tools materials machines vehicles and structures remain intact with no visible accident

Paraphrase B bank. Complete frozen hazard, mechanism-specific benign, and generic-normal descriptions used in the textual-realization control.