

Neural Calibration of a Complete Market Model

Andrea Molent*

Michel Vellekoop†

Abstract

We propose a neural calibration method to construct a recombining binomial tree directly from a set of given option prices. Rather than estimating a continuous option pricing function or a local volatility surface as an intermediate object, a neural network is used to deform a benchmark lattice. This leads to a discrete pricing model which is guaranteed to be arbitrage-free, complete, easy to interpret, and can be used directly for pricing and to find replicating trading strategies. Calibration is formulated as a penalized optimization problem that combines a repricing error with an admissibility penalty, and an optional spatial regularization term based on implied local volatilities.

Numerical experiments on synthetic and SPX market data show that the proposed approach yields accurate repricing and is very competitive when compared to recently proposed other neural calibration methods. It preserves the computational advantages of lattice-based valuation and hedging. In particular, the calibrated tree can be reused to price contracts that allow early exercise, and could even be calibrated directly with American option prices.

Keywords: binomial tree, neural networks, option calibration, local volatility, arbitrage-free pricing, complete market

JEL Classification: C45, C63, G13.

1 Introduction

Calibrating an option pricing model to market data remains a central problem in computational finance. A large part of the existing literature focuses on constructing a continuous relationship, such as an implied-volatility surface, a local-volatility surface, or an option-price surface, for different strikes and maturities. Once such a relationship has been estimated, additional numerical procedures are typically required in order to price new contracts. Machine learning methods can help to generate better fits to the data, but generated pricing networks may be difficult to interpret, and replicating strategies or sensitivities such as the "Greeks" may not be directly available, especially when options with the possibility of early exercise need to be priced using models that have been calibrated on options without that possibility.

We therefore choose a different approach. Instead of reconstructing a continuous implied relationship and subsequently using it for valuation, we calibrate a recombining binomial tree directly to observed option prices. The output of the procedure is therefore not merely an interpolated surface, but a discrete market model that is immediately available for pricing and hedging of European and American options.

The construction starts from a base tree; this may be, for example, a Cox–Ross–Rubinstein (CRR) tree [3] or a previously calibrated tree. A neural network then deforms the node values of this benchmark tree in log-space. The transformed tree induces state-dependent risk-neutral transition probabilities, from which option prices are computed and matched to market observations through a differentiable loss function. In addition to the pricing error, this objective function includes a penalty to prevent inadmissible transition probabilities and an optional spatial regularizer that smooths the tree-implied local volatility.

Existing binomial-tree and implied-tree approaches typically construct a lattice through forward methods or through ad hoc calibration rules. Derman and Kani [6] first introduced a seminal forward-induction construction that extracts a smile-consistent binomial tree from European option prices. Closely related in spirit, Rubinstein [18] derived implied recombining binomial trees from observed option prices

*Dipartimento di Scienze Economiche e Statistiche, Università degli Studi di Udine, Udine, Italy, andrea.molent@uniud.it.

†Faculty of Economics and Business, University of Amsterdam, Amsterdam, the Netherlands, m.h.vellekoop@uva.nl.

and shows how such trees can be used to recover a fully specified discrete pricing structure. The no-arbitrage condition is a central issue in such constructions: in particular, Moriggia et al. [16] revisit the Derman–Kani framework and point out that negative probabilities may be generated in option-implied trees. The constant-probability recombining tree proposed by Li [15] offers an alternative to earlier implied-tree algorithms, but the theoretical support for the method is based on local consistency and weak-convergence arguments, rather than on a general pricing-convergence result for implied trees. Our experiments suggest that, while useful as an approximation, it may encounter difficulties in producing prices that converge to the continuous time limit of the local volatility models in discrete time.

A second strand of the literature concerns local-volatility calibration. Based on theoretical results in Dupire [7], these approaches aim to recover a continuous local-volatility surface from option prices, typically through regularization and smoothing [4]. The methods often require numerical solutions for PDE’s to price new payoffs, and calibration may be difficult and time-consuming. More recently, neural-network methods have been proposed for option-price interpolation and local-volatility calibration under no-arbitrage constraints. Chataigner et al. [2] develop a deep-learning framework for interpolating European vanilla option prices while recovering a local-volatility surface. In a related direction, Xian et al. [21] propose generative networks that learn maturity-dependent risk-neutral densities directly from option prices, without specifying a complete dynamic model for the underlying asset. In Wang et al. [20] other coordinates are used: not the densities but a local volatility surface is calibrated, in a procedure in which option prices and local volatilities are learned jointly.

Other related contributions use machine learning or regularization for option calibration and pricing in different ways. Fan and Sirignano [8] parameterize the drift and volatility functions of a stochastic differential equation for stock prices using neural networks and calibrate them to market option prices, using simulation-based methods for European options and PDE-based methods for American options. Jang and Lee [13] propose a generative Bayesian neural-network model for American index options, while Zhang et al. [22] construct implied-volatility surfaces that change over time, using deep neural networks subject to static no-arbitrage constraints. Geng et al. [9] formulate local-volatility calibration as a non-parametric inverse problem using second-order Tikhonov regularization. In most approaches, the dynamics of stock prices are assumed to be Markovian; for machine-learning methods without this assumption, see for example Goudenège et al. [11].

Rather than estimating densities, or continuous surfaces for prices or local volatilities, we calibrate a recombining binomial market model directly from option prices. The paper is therefore closer in spirit to the implied-tree tradition initiated by Derman and Kani, but we replace classical forward-induction procedures by a neural deformation method and an optimization-based regularization strategy. Accordingly, the calibration problem aims to pick the best choice in a set of admissible recombining binomial trees, and its solution yields a discrete, market-consistent, arbitrage-free, and complete pricing model. Since our method to create more regular volatility surfaces does not use the Dupire equation for European options in local volatility models, we can also handle American options which do not satisfy that equation.

We compare the proposed approach to recent neural local-volatility methods and show that it is effective in reproducing market prices while maintaining a plausible local-volatility profile. In particular, we show this for a test of our method on a real dataset of SPX options.

The remainder of the paper is organized as follows. [Section 2](#) introduces the discrete time model for the arbitrage-free and complete binomial market. [Section 3](#) presents the neural parametrization, pricing procedure, and optimization criteria. [Section 4](#) establishes mathematical properties of the class of admissible trees and the penalized calibration problem. [Section 5](#) reports numerical results for several case studies. Finally, [Section 6](#) summarizes the main findings.

2 An Arbitrage-Free and Complete Market Model

Consider a uniform time grid

$$0 = t_0 < t_1 < \dots < t_{N_T} = T_{\max}, \quad \Delta t = t_{n+1} - t_n,$$

with $T_{\max} = \max_{1 \leq i \leq M} T_i$, the maximum over maturity dates T_i in the set of options we want to fit during the calibration. Let $S_{n,j}$ denote the asset price at time t_n under scenario j at that time, with $j = 0, \dots, n$ and $n = 0, \dots, N_T$. We assume a recombining binomial structure, so that from node (n, j) the process can move to either $(n+1, j)$ or $(n+1, j+1)$. Trees are indexed according to the standard convention,

$$S_{n,0} < S_{n,1} < \dots < S_{n,n}, \quad n = 1, \dots, N_T,$$

so if the stock price equals $S_{n,j}$ then $S_{n+1,j}$ is the lower successor and $S_{n+1,j+1}$ the upper successor. Under deterministic but possibly time-varying interest rates r_n and dividend yields q_n over the time interval $[t_n, t_{n+1}]$, the one-step risk-neutral pricing relation for a contingent claim value $V_{n,j}$ is

$$V_{n,j} = e^{-r_n \Delta t} \left[(1 - p_{n,j}) V_{n+1,j} + p_{n,j} V_{n+1,j+1} \right], \quad (2.1)$$

where $p_{n,j}$ denotes the risk-neutral probability that the stock price moves upwards in node (n, j) . Imposing the martingale condition on the discounted asset price yields

$$p_{n,j} = \frac{e^{(r_n - q_n) \Delta t} S_{n,j} - S_{n+1,j}}{S_{n+1,j+1} - S_{n+1,j}}. \quad (2.2)$$

The following proposition summarizes the key admissibility condition; the proof is given in Appendix A.1.

Proposition 2.1. *Assume that for every node (n, j) ,*

$$S_{n+1,j} < e^{(r_n - q_n) \Delta t} S_{n,j} < S_{n+1,j+1}. \quad (2.3)$$

Then the corresponding recombining binomial model is arbitrage-free and the market is dynamically complete.

Our neural calibration does not impose the inequalities in Proposition 2.1 as hard constraints at each optimization step. Rather, the calibration is initialized from an admissible benchmark tree, and the objective contains a term which ensures that violations of the inequalities in Proposition 2.1 are penalized. The calibrated trees generated in our numerical experiments are checked ex post to satisfy (2.3). Hence, it applies for all nodes in all reported calibrated trees.

3 Neural Tree Calibration

3.1 Benchmark tree and neural deformation

Let $S_{n,j}^0$ denote a benchmark recombining tree such as a standard Cox-Ross-Rubinstein lattice [3] or a previously calibrated tree. Rather than learning node values from scratch, we let a neural network produce a deformation of this benchmark tree in log-space. More precisely, for each node (n, j) we define

$$\delta_{n,j} = f_\theta \left(\frac{t_n}{T_{\max}}, \log \frac{S_{n,j}^0}{S_0} \right), \quad (3.1)$$

where f_θ is a feedforward neural network with parameters θ and S_0 is the initial asset price. The calibrated tree is then given by

$$S_{n,j}^{(\theta)} = S_{n,j}^0 \exp(\delta_{n,j}), \quad (3.2)$$

so positivity of node values is guaranteed.

The feedforward neural network f_θ is a parametric map obtained by composing affine transformations and nonlinear activation functions; see, for example, Goodfellow et al. [10, Chapter 6]. For an input $x \in \mathbb{R}^{d_0}$, a network with $L - 1$ hidden layers is defined recursively by

$$h^{(0)} = x, \quad h^{(\ell)} = \phi \left(A^{(\ell)} h^{(\ell-1)} + b^{(\ell)} \right), \quad \ell = 1, \dots, L - 1, \quad f_\theta(x) = A^{(L)} h^{(L-1)} + b^{(L)},$$

where $\theta = \{A^{(\ell)}, b^{(\ell)}\}_{\ell=1}^L$ collects all weight matrices and biases, and ϕ is an activation function, for example the rectified linear unit (ReLU) function $\phi(x) = \max\{x, 0\} =: (x)^+$ on $\mathbb{R}$.

In the present paper, the input dimension is $d_0 = 2$ and the scalar output defines the node-wise log-deformation $\delta_{n,j} = f_\theta(x_{n,j})$ in (3.1). Thus, rather than optimizing all node values independently, we optimize a shared parametric map $f_\theta : \mathbb{R}^2 \rightarrow \mathbb{R}$ over the whole lattice. This map provides a flexible non-linear function class which allows us to avoid a high-dimensional unconstrained search over node values. Multilayer feed-forward networks are known to be rich approximation classes on compact sets; see Hornik et al. [12]. This makes them well suited to capture non-trivial deformations of the benchmark lattice induced by the option data.

3.2 Pricing on the calibrated tree

Given the node values $S_{n,j}^{(\theta)}$, the risk-neutral probabilities $p_{n,j}^{(\theta)}$ are computed through Equation (2.2). European option prices are obtained by propagating Arrow-Debreu state prices across the tree and aggregating the corresponding payoffs at the relevant maturity layer; see Arrow [1], Debreu [5]. American-style claims are priced by backward induction with the early-exercise constraint.

Let $\lambda_{n,j}^{(\theta)}$ denote the Arrow-Debreu state price at node (n, j) . These quantities are propagated recursively according to, for $j = 1, \dots, n$,

$$\lambda_{n+1,j}^{(\theta)} = e^{-r_n \Delta t} (1 - p_{n,j}^{(\theta)}) \lambda_{n,j}^{(\theta)} + e^{-r_n \Delta t} p_{n,j-1}^{(\theta)} \lambda_{n,j-1}^{(\theta)}, \quad \lambda_{0,0}^{(\theta)} = 1,$$

while at the boundaries ($j = 0$ or $j = n + 1$), the recursion reduces to

$$\lambda_{n+1,0}^{(\theta)} = e^{-r_n \Delta t} (1 - p_{n,0}^{(\theta)}) \lambda_{n,0}^{(\theta)}, \quad \lambda_{n+1,n+1}^{(\theta)} = e^{-r_n \Delta t} p_{n,n}^{(\theta)} \lambda_{n,n}^{(\theta)}.$$

For a European call or put with strike K and maturity t_n we thus find the price

$$\Pi^{(\theta)}(K, t_n) = \sum_{j=0}^n \lambda_{n,j}^{(\theta)} g(S_{n,j}^{(\theta)}),$$

with $g(S) = (S - K)^+$ or $g(S) = (K - S)^+$, and if a maturity $T \in (t_n, t_{n+1})$ does not coincide with a grid point, the price can be defined by linear interpolation:

$$\Pi^{(\theta)}(K, T) = (1 - w) \Pi^{(\theta)}(K, t_n) + w \Pi^{(\theta)}(K, t_{n+1}), \quad w = \frac{T - t_n}{t_{n+1} - t_n}.$$

This interpolation is used for matching off-grid quoted maturities; the arbitrage-free and completeness statements refer to the discrete-time market defined on the tree dates¹.

One can price American-style contracts by standard backward induction. If the maturity is t_m and g denotes the payoff function, then $V_{m,j}^{(\theta)} = g(S_{m,j}^{(\theta)})$ for $j = 0, \dots, m$, and, for $n = m - 1, \dots, 0$,

$$V_{n,j}^{(\theta)} = \max \left\{ g(S_{n,j}^{(\theta)}), e^{-r_n \Delta t} \left[(1 - p_{n,j}^{(\theta)}) V_{n+1,j}^{(\theta)} + p_{n,j}^{(\theta)} V_{n+1,j+1}^{(\theta)} \right] \right\}, \quad j = 0, \dots, n,$$

The American option price generated by the model is then $\Pi^{(\theta)}(K, t_m) = V_{0,0}^{(\theta)}$. For maturities falling between two tree dates, the same linear interpolation convention as above is applied to the corresponding tree prices.

Let

$$\{(K_i, T_i, \Pi_i^{\text{mkt}}, g_i, \text{style}_i)\}_{i=1}^{N_O}$$

denote the set of N_O observed option quotes, where K_i is the strike, T_i is the maturity, Π_i^{mkt} is the observed market price, style_i specifies the exercise style (European or American), and g_i is the payoff function, so for standard calls and puts $g_i(S) = (S - K_i)^+$ or $g_i(S) = (K_i - S)^+$, respectively. For

¹The method presented here can easily be extended to grids that are not uniform in time, but to avoid the more cumbersome notation we have not implemented that here.

each quote, $\Pi_i^{(\theta)}$ denotes the corresponding model price computed on the calibrated tree by the pricing procedure described above.

When calibrating, we minimize the mean squared pricing error

$$\text{MSE}(\theta) = \frac{1}{N_O} \sum_{i=1}^{N_O} \left(\Pi_i^{(\theta)} - \Pi_i^{\text{mkt}} \right)^2, \quad (3.3)$$

under the constraint that all risk-neutral probabilities remain admissible. During the optimization, we therefore discourage violations of admissibility by a penalty term:

$$\mathcal{P}_{\text{prob}}(\theta) = \sum_{n,j} \left[\phi(-p_{n,j}^{(\theta)})^2 + \phi(p_{n,j}^{(\theta)} - 1)^2 \right], \quad (3.4)$$

with $\phi(x) = \max\{x, 0\} =: (x)^+$ the ReLU function we defined earlier. In the implementation, $\mathcal{P}_{\text{prob}}(\theta)$ is multiplied by a large constant λ_{prob} , so that inadmissible transition probabilities become prohibitively expensive during optimization.

In the numerical experiments reported in this paper, this penalization mechanism proved to be very effective. In all calibrated trees, we verified ex post both probability admissibility and the one-step node-ordering inequalities at every node. These conditions were always satisfied, so by [Proposition 2.1](#), all generated binomial markets were arbitrage-free and complete.

3.3 Tree-implied local volatility and spatial regularization

Although our method does not calibrate a continuous local-volatility surface directly, each one-step transition of the calibrated tree induces a local conditional variance for the log-return. This quantity is the basis for our spatial regularization term. Let

$$x_{n,j}^{(\theta)} := \log \left(\frac{S_{n,j}^{(\theta)}}{S_0} \right)$$

denote the log-price coordinate of node (n, j) , and let $\hat{p}_{n,j}^{(\theta)}$ be the clipped version of the corresponding local risk-neutral up probability:

$$\hat{p}_{n,j}^{(\theta)} = \min \left\{ 1, \max \left\{ 0, p_{n,j}^{(\theta)} \right\} \right\}.$$

We define the tree-implied local volatility at node (n, j) , denoted by $\sigma_{n,j}^{\text{tree}(\theta)}$, through the one-step log-dispersion of the calibrated tree and use $v_{n,j}^{(\theta)}$ for the corresponding squared local volatility:

$$v_{n,j}^{(\theta)} := \left(\sigma_{n,j}^{\text{tree}(\theta)} \right)^2 = \frac{\hat{p}_{n,j}^{(\theta)} \left(1 - \hat{p}_{n,j}^{(\theta)} \right) \left(x_{n+1,j+1}^{(\theta)} - x_{n+1,j}^{(\theta)} \right)^2}{\Delta t}. \quad (3.5)$$

To discourage spatial oscillations of the tree-implied local-volatility surface, we add a regularization term along the log-price direction. The penalty is applied to $v_{n,j}^{(\theta)}$, that is, to the squared tree-implied local volatility, rather than directly to $\sigma_{n,j}^{\text{tree}(\theta)}$. This choice avoids the repeated evaluation of square roots and their derivatives during training, thereby helping to reduce the computational cost of the regularization term.

For each penalized layer n , define

$$\Delta x_{n,j}^{(\theta)} = x_{n,j+1}^{(\theta)} - x_{n,j}^{(\theta)}, \quad \Delta v_{n,j}^{(\theta)} = v_{n,j+1}^{(\theta)} - v_{n,j}^{(\theta)} \quad j = 0, \dots, n-1.$$

Moreover, let

$$L_n^{(\theta)} = x_{n,n}^{(\theta)} - x_{n,0}^{(\theta)}$$

be the log-price width of layer n . The first two layers are not penalized, so that the spatial penalty

is averaged over the set $\mathcal{N} = \{2, \dots, N_T - 1\}$. Given a small numerical constant $\varepsilon_x > 0$, the spatial regularization penalty is then defined as

$$\mathcal{P}_{\text{space}}(\theta) = \frac{1}{|\mathcal{N}|} \sum_{n \in \mathcal{N}} \mathcal{P}_{\text{space},n}(\theta), \quad \mathcal{P}_{\text{space},n}(\theta) = \frac{1}{L_n^{(\theta)} + \varepsilon_x} \sum_{j=0}^{n-1} \frac{(\Delta v_{n,j}^{(\theta)})^2}{\Delta x_{n,j}^{(\theta)} + \varepsilon_x}. \quad (3.6)$$

This expression may be viewed as a normalized discrete first-order Tikhonov penalty for the squared tree-implied local volatility along the log-price direction. Since it represents the local variance associated with the one-step log-return, we refer to it as a local-volatility or spatial regularization term.

3.4 Calibration objective

Combining the pricing error, the probability-admissibility penalty, and the local-volatility regularization term, the objective function for the calibration is

$$\mathcal{L}(\theta) = \text{MSE}(\theta) + \lambda_{\text{prob}} \mathcal{P}_{\text{prob}}(\theta) + \lambda_{\text{space}} \mathcal{P}_{\text{space}}(\theta), \quad (3.7)$$

where $\lambda_{\text{prob}} \geq 0$ and $\lambda_{\text{space}} \geq 0$ control the strength of the two penalty terms. In the numerical implementation, λ_{prob} is fixed at a large value in order to strongly discourage inadmissible transition probabilities and is not treated as a tuning parameter. The coefficient λ_{space} is optional: the default calibration corresponds to $\lambda_{\text{space}} = 0$, while positive values smoothen the local volatility surface when the option data are less informative. In applications, λ_{space} should be chosen conservatively, in line with the standard validation-based use of regularization parameters in ill-posed inverse problems and smoothing methods [4, 19].

The calibrated parameters are therefore obtained by solving

$$\theta^* \in \arg \min_{\theta} \mathcal{L}(\theta),$$

up to the accuracy reached by the numerical optimizer. The calibrated tree is then defined as $S^{(\theta^*)}$ using (3.1)-(3.2), which generates the corresponding risk-neutral probabilities $p^{(\theta^*)}$ in (2.2).

Although the proposed method calibrates a discrete recombining tree rather than a continuous local-volatility model, reconstructing a continuous local-volatility surface from the calibrated tree remains useful. The discrete dataset used in the reconstruction is

$$\mathcal{D}^{(\theta)} = \left\{ (t_n, S_{n,j}^{(\theta)}, \sigma_{n,j}^{\text{tree}^{(\theta)}}) : 0 \leq j \leq n < N_T \right\},$$

with the $\sigma_{n,j}^{\text{tree}^{(\theta)}}$ as defined in (3.5). Since these quantities are available only at irregularly spaced lattice locations, we reconstruct from them a continuous function in the whole (t, S) -domain. To this end, we fit a Gaussian process regression (GPR) model to the inputs $(t_n, S_{n,j}^{(\theta)})$ and responses $\sigma_{n,j}^{\text{tree}^{(\theta)}}$ collected in $\mathcal{D}^{(\theta)}$, and define the reconstructed surface as the posterior mean, which we denote by

$$\hat{\sigma}^{\text{GPR}^{(\theta)}}(t, S).$$

The regression uses a squared-exponential kernel with automatic relevance determination and a constant basis function, see Rasmussen and Williams [17] for details. The degree of smoothness can be adjusted through the noise level used in the fit: larger values produce a smoother surface, whereas smaller values make the reconstruction track the tree values more closely. This smoothing step does not affect the calibrated tree itself, but it provides an a posteriori estimate of the local volatility structure implied by the calibration.

4 Well-posedness of the Calibration Problem

In this section we formalize the penalized calibration as a finite-dimensional optimization problem over a class of recombining trees with a fixed time grid. A recombining binomial tree with a fixed number of N_T time steps contains $d = (N_T + 1)(N_T + 2)/2$ nodes and can be identified with a vector $(S_{0,0}^{(\theta)}, S_{1,0}^{(\theta)}, S_{1,1}^{(\theta)}, S_{2,0}^{(\theta)}, \dots, S_{N_T, N_T}^{(\theta)})$ in $\mathbb{R}^d$.

For fixed constants $0 < m < M$ and $\eta > 0$, let $\mathcal{A}_\eta(m, M) \subset \mathbb{R}^q$ denote the set of all values θ that lead to recombining trees $\mathbf{S}^{(\theta)} = (S_{0,0}^{(\theta)}, S_{1,0}^{(\theta)}, S_{1,1}^{(\theta)}, S_{2,0}^{(\theta)}, \dots, S_{N_T, N_T}^{(\theta)})$ such² that

$$m \leq S_{n,j}^{(\theta)} \leq M, \quad 0 \leq j \leq n \leq N_T, \quad (4.1)$$

$$S_{n+1,j}^{(\theta)} + \eta \leq e^{(r_n - q_n)\Delta t} S_{n,j}^{(\theta)} \leq S_{n+1,j+1}^{(\theta)} - \eta, \quad 0 \leq j \leq n \leq N_T - 1. \quad (4.2)$$

Thus any $\theta \in \mathcal{A}_\eta(m, M)$ generates a positive recombining tree satisfying the one-step no-arbitrage inequalities with a uniform margin η , and for each option quote i a corresponding price $\Pi_i^{(\theta)}$ as defined in subsection 3.2.

Theorem 4.1. *Fix $N_T \in \mathbb{N}^*$, $\lambda_{\text{prob}} \geq 0$ and $\lambda_{\text{space}} \geq 0$, $0 < m < M$, and $\eta > 0$. Assume that the neural parametrization $(\theta, x, y) \mapsto f_\theta(x, y)$ is continuous and that there exists a $\theta \in \mathbb{R}$ such that for any $(x, y) \in ([0, 1] \times \mathbb{R})$, $f_\theta(x, y) = 0$. Then the penalized objective $\mathcal{L}$ defined in (3.7) admits at least one global minimizer on any non-empty compact subset of $\mathcal{A}_\eta(m, M)$.*

The proof is given in Appendix A.2. It combines the compactness of the admissible class of trees, the stability of strict admissibility under sufficiently small log-deformations, and the continuity of the tree-to-price and tree-to-penalty maps.

Remark 4.2. The theorem guarantees existence of global minimizers for the finite-dimensional penalized problem, but it does not imply convergence of the neural training algorithm to such minimizers. Indeed, optimization is performed in parameter space through the non-linear map $\theta \mapsto \mathbf{S}^{(\theta)}$, and the resulting objective function need not be convex.

Remark 4.3. The previous theorem is concerned with calibration for a given set of option data. If these data are consistent with a certain local volatility model in continuous time, it is natural to ask whether a sequence of calibrated trees based on more and more option data converges, as $N_T \rightarrow \infty$, to this continuous-time local-volatility model if tree design quantities may be allowed to depend on N_T , for instance $m(N_T)$, $M(N_T)$, and $\eta(N_T)$. Such a conclusion would require additional assumptions of the kind commonly used in weak-approximation results. More precisely, if the discrete log-price increments vanish uniformly on compacts, the associated conditional first and second moments converge to limiting coefficients b and a , the corresponding third-moment remainder is negligible, and the induced log-price processes are tight in $D([0, T]; \mathbb{R})$, then the piecewise-constant log-price processes converge weakly to the diffusion

$$dX_t = b(t, X_t) dt + \sqrt{a(t, X_t)} dW_t, \quad X_0 = \log S_0,$$

with

$$b(t, x) = r(t) - q(t) - \frac{1}{2} \sigma_{\text{loc}}^2(t, e^x), \quad a(t, x) = \sigma_{\text{loc}}^2(t, e^x),$$

provided that the martingale problem for the limiting generator is well posed. Under the usual additional uniform-integrability condition, this also yields convergence of discounted expectations for continuous payoffs with polynomial growth, and thus for European options with such payoffs.

In practice, we are interested in the proposed calibration method for a finite number of option data. Our calibration always involves a well-posed optimization problem over a set of strictly admissible recombining trees. The diffusion-limit perspective may provide additional intuition, but it is not needed for the validity or practical usefulness of the option pricing and hedging method.

²We sometimes use the shorthand notation $\{S_{n,j}^{(\theta)}\}_{0 \leq j \leq n \leq N_T}$ here to denote all tree values, but they should be thought of as the indicated vector which is ordered, first in n and then in j .

5 Numerical Experiments

5.1 Experimental design

Our numerical study includes both synthetic and market-based experiments. Market-based data are collected for the SPX index, and in the synthetic setting option prices are generated under a known local-volatility specification, so we can assess both pricing accuracy and the ability of the method to recover a given local-volatility profile.

Calibration is performed through a single continuous training run starting from the initial CRR tree [3] with the constant volatility value that minimizes the RMSE over all option data. The neural network has two hidden and fully connected layers with N_L ReLU units, and is initialized so that the initial deformation is zero. Training is performed with Adam; see, for example, Kingma and Ba [14]. At the beginning of the run, a learning-rate finder is used to select a suitable initial learning-rate scale. The learning rate is then evolved according to a two-regime cyclical cosine schedule. During the initial part of the run, shorter cycles and a larger maximum learning rate are used to encourage exploration. During the refinement part, longer cycles and a smaller maximum learning rate are used, and gradients are clipped component-wise for numerical stability.

Violations of the one-step risk-neutral probability constraints are discouraged through the quadratic probability-admissibility penalty described above, with the fixed scaling coefficient 10^6 . Since training starts from the ordered CRR benchmark with zero initial deformation, the optimization is initialized inside the ordered admissible tree class. Probability admissibility and node ordering are then verified ex post on the calibrated trees.

In the synthetic experiments, the total training horizon is 8000 epochs. During the run, the best learnable parameters encountered so far are stored. At the checkpoint epochs $N_E \in \{1000, 2000, 4000, 8000\}$, the best-so-far calibrated tree is saved without interrupting training. In the SPX experiment, the same continuous training protocol is used, but the training horizon is extended to 16000 epochs, with checkpoints $N_E \in \{2000, 4000, 8000, 16000\}$. In practical applications, the prescribed budget can also be interpreted as an upper bound: the run may be stopped earlier if the monitored pricing errors or validation diagnostics have plateaued.

Unless otherwise stated, option-pricing RMSEs are reported in price units and scaled by a factor 10^2 . Thus, an entry equal to x in a row labelled $(\times 10^{-2})$ corresponds to an unscaled pricing RMSE equal to $x \times 10^{-2}$. Local-volatility errors are relative RMSEs and are reported as a percentage, following the convention used by Wang et al. [20] in their paper³.

5.2 Synthetic-data experiments

We first consider synthetic option markets generated from the local-volatility function used in Wang et al. [20],

$$\sigma_{LV}(t, s) = 0.3 + ye^{-y}, \quad y = (t + 0.1)\sqrt{\frac{s}{S_0} + 0.1}, \quad (5.1)$$

with initial stock price $S_0 = 1000$, risk-free rate $r = 0.04$ and zero dividends, $q = 0$.

The goal is twofold: to evaluate how accurately the calibrated tree reproduces option prices and to verify whether the induced local-volatility structure recovers (5.1). To facilitate comparison with Wang et al. [20], we use the same strikes and maturities. The European call prices are computed by solving the option-pricing PDE under the local-volatility model in (5.1) using 1000 space steps and 500 time steps. The first configuration, denoted by 10×20 , uses a grid of European call prices with $N_T^{\text{opt}} = 10$ maturities uniformly distributed between 0.3 and 1.5 and $N_K^{\text{opt}} = 20$ strikes uniformly distributed between 500 and 3000. The second one, denoted by 3×6 , is defined analogously, with $N_T^{\text{opt}} = 3$ maturities and $N_K^{\text{opt}} = 6$ strikes over the same ranges. For out-of-sample pricing evaluation, we use a dense 256×256 grid with

³All computations reported in this paper were implemented in MATLAB on a CPU for a desktop machine equipped with an Intel Core i7-12700 processor (2.10 GHz), 32 GB of RAM, and Windows 11 Pro. The computational time reported for the method of Wang et al. [20] was estimated using the Python code made available by the authors. This code was also run on a CPU, due to the lack of a GPU suitable for their precise computational settings. The runtime comparisons should therefore be interpreted as indicative rather than a strictly hardware-optimized benchmark.

256 maturities uniformly distributed over $[0.3, 1.5]$ and 256 strikes uniformly distributed over $[500, 3000]$. This evaluation grid is defined over the same domain as the training grids.

5.2.1 Option Pricing

In our numerical experiments, neither Li’s tree [15] nor the binomial tree of Moriggia et al. [16] displayed convergence towards the PDE benchmark. Table 1 shows that, although both constructions remain implementable for finer time discretizations, the resulting European call prices do not systematically approach the benchmark values; in some cases, the pricing errors may even deteriorate at finer discretizations.

This shows a limitation with respect to the specific refinement criterion considered here, but should not obscure the distinct contributions of the two approaches. Li’s construction is mainly motivated by weak-approximation considerations for the tree dynamics under suitable regularity assumptions, while Moriggia et al. focus on admissibility and empirical pricing performance. It shows how delicate the construction of a recombining binomial tree remains even when the local-volatility specification is known, and motivates our search for a different calibration procedure.

We now evaluate the pricing performance of our proposed neural calibration method. Table 2 reports the relative percentage errors with respect to the PDE benchmark for the two training configurations, 10×20 and 3×6 , after a cumulative training budget of $N_E = 8000$ epochs. In this experiment $\lambda_{\text{space}} = 0$, so that the reported results isolate the fitting capability of the procedure, without considering the regularity of calibrated values on the tree.

The results in Table 2 show a clear improvement over the two other approaches discussed above. For both training configurations, the pricing errors remain small across all reported strikes and tree sizes, and no severe deterioration is observed as N_T increases. The denser 10×20 training grid generally provides the most accurate results, especially for the finer trees, where the relative percentage errors are very

$N_T =$	Binomial tree by Li [15] (RPE)				Binomial tree by Moriggia et al. [16] (RPE)				PDE (price)
	45	90	180	360	45	90	180	360	
$K = 500$	527.63 (−2.4%)	526.21 (−2.7%)	524.90 (−2.9%)	524.14 (−3.0%)	528.18 (−2.3%)	530.78 (−1.8%)	528.12 (−2.3%)	519.61 (−3.9%)	540.54
$K = 750$	335.64 (−9.6%)	330.10 (−11.1%)	325.70 (−12.3%)	322.83 (−13.1%)	342.62 (−7.7%)	364.44 (−1.8%)	347.56 (−6.4%)	282.41 (−23.9%)	371.29
$K = 1000$	205.61 (−18.8%)	196.41 (−22.4%)	190.52 (−24.7%)	185.61 (−26.7%)	248.46 (−1.8%)	250.81 (−0.9%)	245.52 (−3.0%)	164.87 (−34.9%)	253.07
$K = 1250$	125.15 (−27.7%)	117.32 (−32.2%)	110.78 (−36.0%)	105.36 (−39.1%)	173.86 (0.4%)	172.76 (−0.2%)	166.73 (−3.7%)	93.72 (−45.9%)	173.12
$K = 1500$	80.32 (−32.7%)	72.64 (−39.2%)	66.24 (−44.5%)	61.15 (−48.8%)	118.94 (−0.4%)	119.26 (−0.1%)	101.01 (−15.4%)	37.92 (−68.2%)	119.39

Table 1: Pricing results for the benchmark binomial trees of Li and of Moriggia et al. for different strikes and tree sizes. The entries report the prices and, in parentheses, the relative percentage errors (RPE) with respect to the PDE benchmark price. In both cases, the tree is constructed from the exact local-volatility function.

$N_T =$	Training grid 10×20 (RPE)				Training grid 3×6 (RPE)				PDE (price)
	45	90	180	360	45	90	180	360	
$K = 500$	541.29 (0.1%)	540.68 (0.0%)	540.58 (0.0%)	540.54 (−0.0%)	539.93 (−0.1%)	540.46 (−0.0%)	540.41 (−0.0%)	540.50 (−0.0%)	540.54
$K = 750$	368.23 (−0.8%)	371.34 (0.0%)	371.17 (−0.0%)	371.36 (0.0%)	374.09 (0.8%)	372.41 (0.3%)	370.18 (−0.3%)	371.15 (−0.0%)	371.29
$K = 1000$	252.67 (−0.2%)	253.65 (0.2%)	253.47 (0.2%)	252.98 (−0.0%)	255.07 (0.8%)	252.28 (−0.3%)	252.08 (−0.4%)	252.52 (−0.2%)	253.07
$K = 1250$	171.38 (−1.0%)	171.92 (−0.7%)	173.44 (0.2%)	173.28 (0.1%)	173.74 (0.4%)	172.42 (−0.4%)	172.20 (−0.5%)	172.62 (−0.3%)	173.12
$K = 1500$	118.28 (−0.9%)	118.02 (−1.1%)	118.61 (−0.7%)	119.86 (0.4%)	120.78 (1.2%)	118.24 (−1.0%)	118.37 (−0.9%)	118.38 (−0.8%)	119.39

Table 2: Pricing results for European call prices produced by the proposed method for different strikes and tree sizes. The entries report the prices and, in parentheses, the relative percentage errors (RPE) with respect to the PDE benchmark price. Results are shown for the two trained models corresponding to the 10×20 and 3×6 training grids. The cumulative number of training epochs is $N_E = 8000$ and the penalization coefficient is $\lambda_{\text{space}} = 0$.

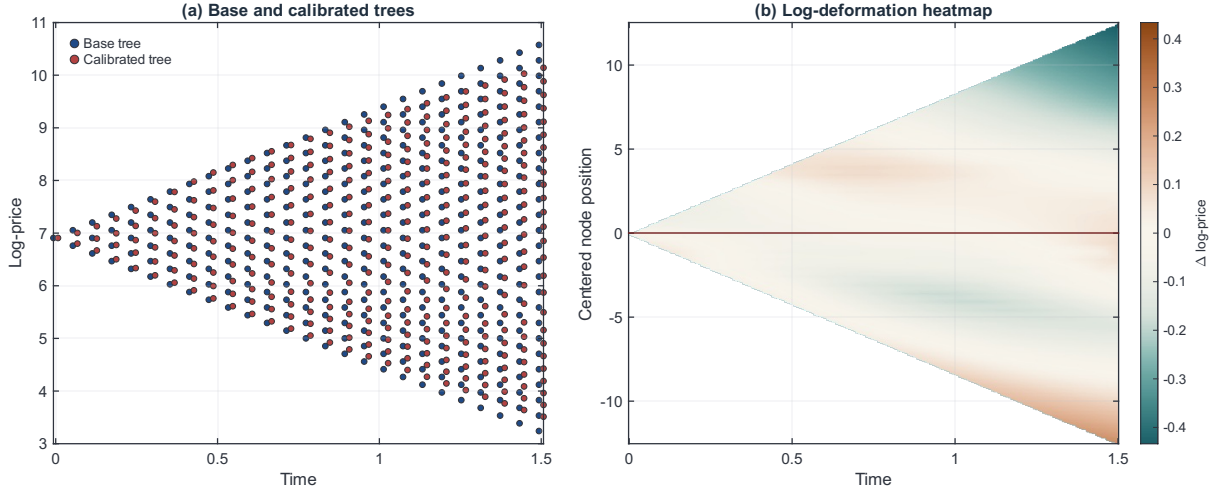


Figure 1: Base and calibrated recombining trees for $N_T = 25$. Left: node locations in log-price coordinates for the benchmark and calibrated trees; a small horizontal offset is introduced for visual clarity. Right: heatmap of the log-deformation $\log S_{n,j}^{(\theta)} - \log S_{n,j}^0$, centered vertically for readability.

close to zero for most strikes. For the coarser 3×6 training grid, the errors are slightly less uniform, with deviations of about 1% in some cases, but the overall behavior remains stable and satisfactory. The relative percentage error tends to become larger in magnitude as the benchmark option price decreases, since the training loss is constructed from absolute pricing discrepancies rather than relative ones. This is ultimately a choice in the calibration objective and could be modified by introducing a relative-error weighting in the loss function.

Figure 1 compares, for the case $N_T = 25$, the initial tree and the final calibrated tree, and also shows the corresponding log-deformation heat map. Panel (a) shows that the calibration produces a structured reshaping of the lattice across both time and state dimensions. Panel (b) confirms that the learned log-deformation remains relatively small around the central region of the tree, while it becomes positive in the upper branch and negative in the lower branch, with increasing magnitude as time progresses.

We next turn to a comparison with the results reported by Wang et al. [20]. The results are summarized in Table 3, where the number of tree time steps is $N_T \in \{180, 360, 720\}$. We report option-pricing RMSEs for our trees both in-sample (OP IS) and out-of-sample (OP OOS), and the total runtime (RT), for increasing cumulative training budgets N_E and for different numbers of tree time steps N_T . As in the previous experiments, the spatial regularization is switched off, that is, $\lambda_{\text{space}} = 0$. The last column (DSCL) shows the values reported in Wang et al. [20].

The in-sample pricing errors generally decrease as the cumulative training budget N_E increases, especially on the dense 10×20 grid. The out-of-sample behavior is more nuanced: it improves clearly in the dense case, whereas on the sparse 3×6 grid it is not monotone in N_E , reflecting the weaker identifiability of the calibration problem under sparse training data. Increasing the number of time steps tends to improve pricing accuracy, especially for the denser 10×20 training grid, where RMSEs for both OP IS and OP OOS decrease substantially as N_T grows. The comparison with the DSCL benchmark is favourable in this experimental setup, especially in out-of-sample pricing errors, although runtime figures should be interpreted as indicative because the implementations and hardware optimizations differ.

Results in the last two rows correspond to training on a very dense set of option prices, so the resulting in-sample errors may be interpreted as an approximate lower bound on the discrepancies attainable by the model, for a fixed value of N_T . It shows that errors should not be attributed solely to the sparsity of the training set, but also to the approximation limits of the tree discretization itself. At the same time, the comparison with the standard 10×20 training grid is encouraging: once the tree is sufficiently refined, a moderately dense set of option quotes already captures most of the information needed to identify an accurate deformation of the base lattice.

$N_T =$ $N_E =$	180				360				720				DSCL
	1000	2000	4000	8000	1000	2000	4000	8000	1000	2000	4000	8000	
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$													
OP IS ($\times 10^{-2}$)	26	19	17	15	18	11	7	6	15	8	6	4	94
OP OOS ($\times 10^{-2}$)	26	23	22	22	17	12	12	12	13	8	7	6	108
RT ($\times 10^3$)	0.1	0.1	0.2	0.3	0.2	0.4	0.6	1.1	0.7	1.1	2.0	3.6	9.5
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$													
OP IS ($\times 10^{-2}$)	9	3	2	1	15	6	2	1	18	7	7	2	162
OP OOS ($\times 10^{-2}$)	187	190	191	195	128	127	133	137	128	127	127	122	181
RT ($\times 10^3$)	0.1	0.1	0.2	0.4	0.2	0.4	0.6	1.1	0.7	1.2	2.0	3.6	9.5
Input grid $N_T^{opt} \times N_K^{opt} = 256 \times 256$													
OP IS ($\times 10^{-2}$)	26	18	17	16	24	14	10	9	26	11	7	5	
RT ($\times 10^3$)	0.5	0.8	1.4	2.4	1.0	1.8	3.3	6.0	1.9	3.7	7.1	13.4	

Table 3: RMSE for option pricing (OP) in-sample (IS) and out-of-sample (OOS), expressed in units of 10^{-2} . The values of N_T are chosen so that the option maturities used in training coincide with tree layers, and no interpolation in time is required. For the 256×256 input grid, only the in-sample error is reported, since the calibration grid coincides with the dense evaluation grid. Runtime (RT) is reported in units of 10^3 seconds. The last column reports the DSCL benchmark from Wang et al. [20]; the corresponding runtime should be interpreted as indicative, since implementations and hardware optimization differ.

5.2.2 Local volatility surfaces

We next turn to the local-volatility structure implied by the calibrated tree. The quantities $\sigma_{n,j}^{\text{tree}(\theta)}$ provide useful information, and in the synthetic setting, where the local volatility $\sigma_{\text{loc}}(t, S)$ is known, they make it possible to assess whether the tree-implied local-volatility profile is consistent with the data-generating model.

Table 4 shows the local-volatility diagnostics for the construction described in Section 3.4. The GPR-based errors (*LV N-GPR* and *LV G-GPR*) are uniformly smaller than the corresponding raw errors (*LV N-Raw*), indicating that the local-volatility values extracted directly from the tree retain some irregularities that are effectively smoothed out by the regression step. The final results are particularly satisfactory in the dense 10×20 setting, where, for sufficiently fine trees, the reconstructed local-volatility errors become comparable with, and in some cases slightly improve upon, the benchmark reported by Wang et al. The 3×6 case remains more demanding, which is consistent with the weaker identifiability of the local-volatility structure.

Figure 3 compares the GPR-reconstructed tree-implied local-volatility surfaces. In the dense 10×20 setting, the reconstructed surface remains close to the analytical benchmark over most of the core region of the $(T, S/S_0)$ domain. In the sparse 3×6 setting, the GPR-based reconstruction is naturally less stable, but it still provides a useful qualitative diagnostic of the deformation induced by calibration. As expected, a richer set of option quotes not only improves repricing accuracy, but also stabilizes the reconstruction of the local-volatility profile.

5.2.3 Impact of spatial regularization

We finally examine the role of the spatial regularization coefficient by fixing the cumulative training budget at the common checkpoint $N_E = 8000$ and taking $\lambda_{\text{space}} \in \{0, 3, 10, 30, 100\}$. The value $N_E = 8000$ is used here to compare different regularization strengths at the same late-stage checkpoint, and should not be interpreted as a necessary training horizon. The purpose of this experiment is to assess whether the penalty term can improve the stability of calibration and the quality of the implied local-volatility diagnostics.

As shown in Table 5, the effect of spatial regularization on pricing accuracy is not monotone. For the dense 10×20 training grid, the gains are modest: regularization improves the out-of-sample RMSE for some tree sizes, but the unregularized calibration is already very competitive, especially for the finest

$N_T =$ $N_E =$	180				360				720				DSCL	
	1000	2000	4000	8000	1000	2000	4000	8000	1000	2000	4000	8000		
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$														
LV N-Raw (%)	1.8	1.5	1.5	1.5	1.8	1.6	1.7	1.7	1.6	1.4	1.4	1.3		
LV N-GPR (%)	0.9	0.8	0.7	0.7	1.1	0.8	0.7	0.6	0.8	0.5	0.4	0.4		
LV G-GPR (%)	1.1	0.8	0.7	0.6	1.2	0.9	0.8	0.7	0.8	0.6	0.5	0.4	1	
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$														
LV N-Raw (%)	5.0	5.2	5.2	5.3	4.1	4.0	4.1	4.3	4.2	4.2	4.2	4.1		
LV N-GPR (%)	4.0	4.1	4.1	4.1	3.2	3.0	3.1	3.1	3.2	3.2	3.2	3.0		
LV G-GPR (%)	4.6	4.7	4.7	4.8	3.7	3.7	3.8	3.8	3.6	3.7	3.7	3.5	2	
Input grid $N_T^{opt} \times N_K^{opt} = 256 \times 256$														
LV N-Raw (%)	2.0	1.7	1.6	1.4	2.2	2.0	1.6	1.3	2.6	1.7	1.4	1.2		
LV N-GPR (%)	1.2	0.8	0.7	0.7	1.6	1.1	0.8	0.6	1.6	0.9	0.7	0.6		
LV G-GPR (%)	1.4	0.9	0.8	0.8	1.8	1.2	0.9	0.7	1.6	0.9	0.7	0.7		

Table 4: Relative RMSEs, expressed in percent, for the local-volatility diagnostics in the synthetic experiments, reported for different tree sizes N_T and cumulative training budgets N_E , and for the two input grids 10×20 and 3×6 . *LV N-Raw* is the relative RMSE computed directly from the tree-implied local volatility, *LV N-GPR* is the relative RMSE after GPR reconstruction, and *LV G-GPR* is the relative RMSE on the dense 256×256 validation grid after GPR reconstruction. The last column reports the DSCL benchmark from Wang et al. [20].

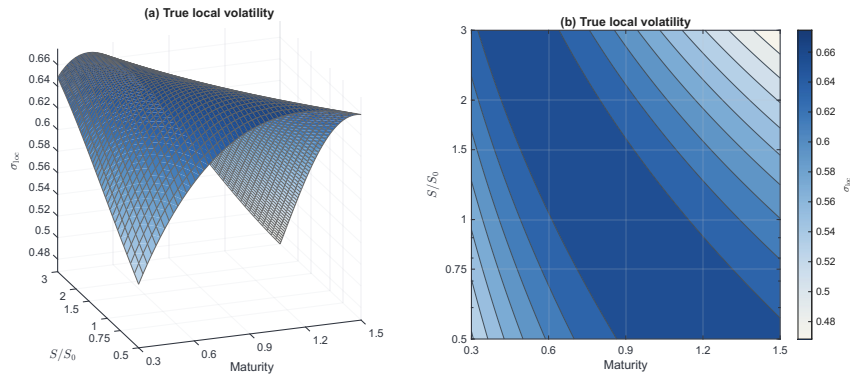


Figure 2: Benchmark local-volatility surface in the synthetic setting, displayed over the common validation domain in maturity and spot ratio S/S_0 .

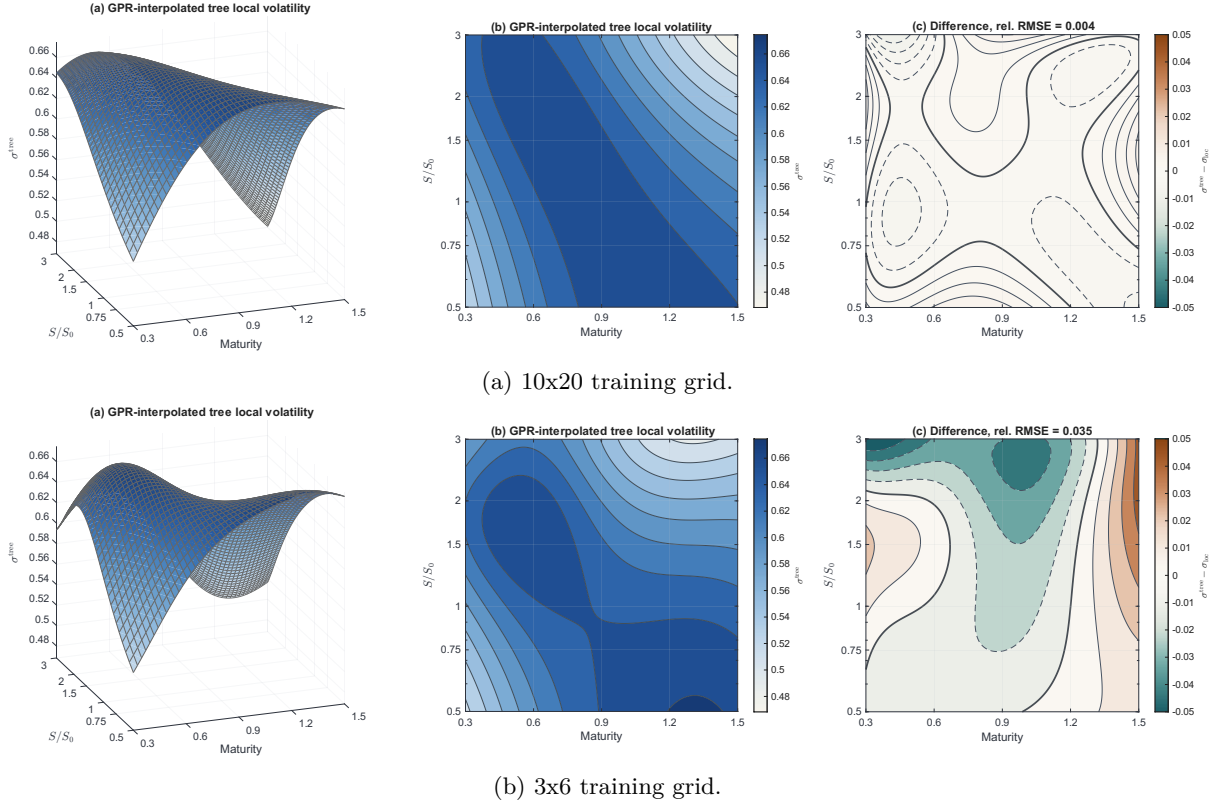


Figure 3: Comparison between the true local volatility surface and the GPR-reconstructed tree-implied local volatility surface. For each grid, panel (a) shows the GPR-reconstructed tree-implied local volatility surface, panel (b) displays the same surface as a contour plot, and panel (c) reports the difference $\sigma^{\text{tree}} - \sigma_{\text{loc}}$. In panel (c), dashed contour lines correspond to negative levels, solid contour lines to positive levels, and the thicker solid contour denotes the zero level. Here $N_T = 720$, $N_E = 8000$, and $\lambda_{\text{space}} = 0$.

$N_T =$ $\lambda_{\text{space}} =$	180					360					720					DSCL
	0	3	10	30	100	0	3	10	30	100	0	3	10	30	100	
Input grid $N_T^{\text{opt}} \times N_K^{\text{opt}} = 10 \times 20$																
OP IS ($\times 10^{-2}$)	15	16	18	19	25	6	8	8	13	17	4	5	7	9	14	94
OP OOS ($\times 10^{-2}$)	22	22	22	21	25	12	11	11	12	16	6	7	7	8	12	108
RT ($\times 10^3$)	0.3	0.4	0.4	0.5	0.5	1.2	1.1	1.2	1.2	1.2	3.6	3.7	3.7	3.8	3.9	9.5
Input grid $N_T^{\text{opt}} \times N_K^{\text{opt}} = 3 \times 6$																
OP IS ($\times 10^{-2}$)	1	2	3	5	10	1	3	4	5	8	2	4	3	5	8	162
OP OOS ($\times 10^{-2}$)	195	117	106	105	101	137	100	87	88	94	122	76	88	81	90	181
RT ($\times 10^3$)	0.3	0.4	0.4	0.4	0.5	1.1	1.0	1.1	1.1	1.2	3.6	3.6	3.7	3.7	3.8	9.5

Table 5: RMSE for option pricing (OP) in-sample (IS) and out-of-sample (OOS), expressed in units of 10^{-2} , together with runtime (RT), for different values of the spatial regularization coefficient λ_{space} , with cumulative training budget fixed at $N_E = 8000$. Runtime is expressed in units of 10^3 seconds. Grey-shaded entries identify, for each input grid and each fixed value of N_T , the value of λ_{space} that minimizes the OP OOS error; the corresponding OP IS and RT values are shaded as well.

$N_T =$ $\lambda_{\text{space}} =$	180					360					720					DSCL
	0	3	10	30	100	0	3	10	30	100	0	3	10	30	100	
Input grid $N_T^{\text{opt}} \times N_K^{\text{opt}} = 10 \times 20$																
LV N-Raw (%)	1.5	1.2	1.2	1.0	1.3	1.7	1.2	1.2	1.1	1.3	1.3	1.2	1.1	1.3	1.4	
LV N-GPR (%)	0.7	0.7	0.8	0.8	1.1	0.6	0.7	0.8	0.9	1.0	0.4	0.7	0.8	1.0	1.2	
LV G-GPR (%)	0.6	0.8	0.9	0.8	1.2	0.7	0.9	1.1	1.1	1.2	0.4	0.9	1.0	1.4	1.5	1
Input grid $N_T^{\text{opt}} \times N_K^{\text{opt}} = 3 \times 6$																
LV N-Raw (%)	5.3	3.5	3.2	3.1	3.0	4.3	3.1	3.0	2.9	3.1	4.1	2.8	3.0	2.9	2.9	
LV N-GPR (%)	4.1	2.9	2.8	2.9	2.9	3.1	2.5	2.5	2.5	2.8	3.0	2.1	2.6	2.5	2.6	
LV G-GPR (%)	4.8	3.3	3.1	3.1	3.1	3.8	3.0	3.0	2.9	3.0	3.5	2.5	3.1	3.0	3.0	2

Table 6: Relative RMSEs, expressed in percent, for the local-volatility diagnostics in the synthetic experiments, for different values of the spatial regularization coefficient λ_{space} , with cumulative training budget fixed at $N_E = 8000$. Grey-shaded entries identify, for each input grid and each fixed value of N_T , the value of λ_{space} that minimizes the LV G-GPR error; the corresponding LV N-Raw and LV N-GPR values are shaded as well.

tree. By contrast, the effect is much more visible for the sparse 3×6 grid. In this case, introducing a positive value of λ_{space} substantially reduces the out-of-sample pricing error for all reported tree sizes.

The non-monotonicity is consistent with the sensitivity analysis in Wang et al. [20]: a regularization weight that is too small may leave the fit essentially unregularized, whereas a weight that is too large may slow optimization and worsen calibration accuracy for a fixed training budget. Table 6 shows a similar pattern for the local-volatility diagnostics: the penalty is most useful when the inverse problem is weakly identified. Hence λ_{space} should not be increased mechanically, but determined after checking results for a small grid of candidate values and choosing the weakest regularization that stabilizes the tree.

This is also confirmed in Figure 5, which shows the GPR-reconstructed tree-implied local-volatility surfaces for the same two representative regularized configurations. Relative to the corresponding unregularized case, there is no improvement in the dense setting but a better result in the sparse one.

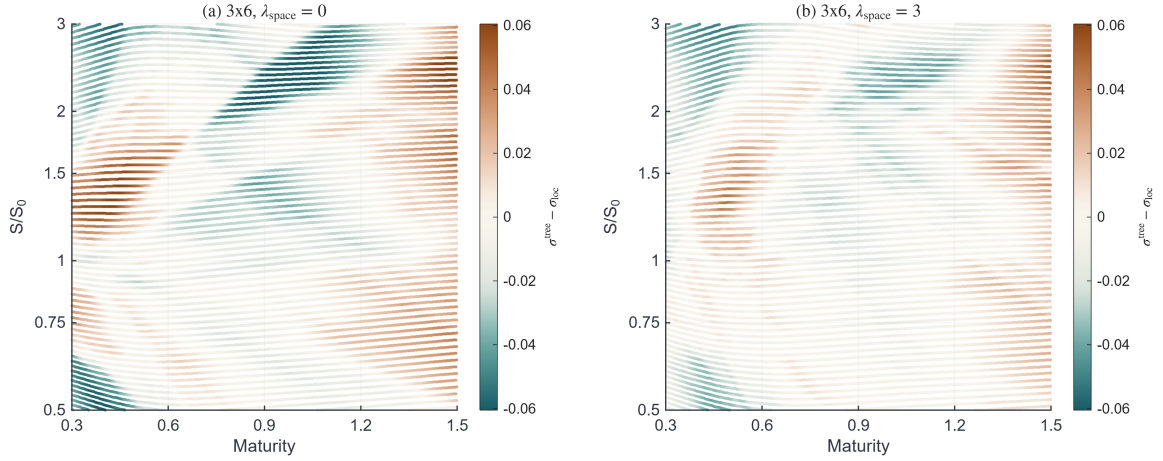


Figure 4: Local-volatility error for the 3×6 training grid with $N_T = 720$, comparing the unregularized case $\lambda_{\text{space}} = 0$ with the regularized case $\lambda_{\text{space}} = 3$. The color scale reports the pointwise error $\hat{\sigma}_{\text{tree}} - \sigma_{\text{loc}}$ at the tree nodes, plotted in the maturity/spot-ratio plane. The same color scale is used in both panels. $N_T = 720$ and $N_E = 8000$.

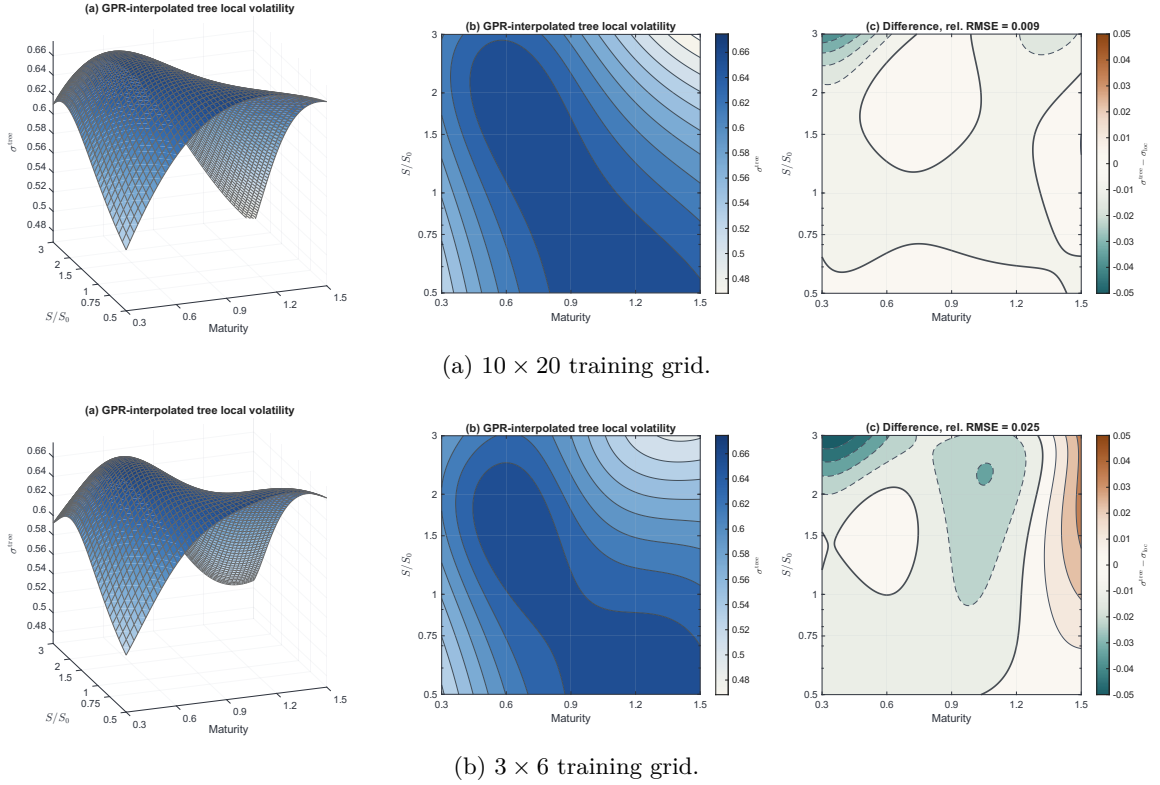


Figure 5: Comparison between the true local-volatility surface and the GPR-reconstructed tree-implied local-volatility surface for representative regularized configurations with $N_T = 720$, $N_E = 8000$, and $\lambda_{\text{space}} = 3$. For each configuration, panel (a) shows the GPR-reconstructed tree-implied local-volatility surface, panel (b) displays the same surface as a contour plot, and panel (c) reports the difference $\sigma^{\text{tree}} - \sigma_{\text{loc}}$ over the common validation domain. In panel (c), dashed contour lines correspond to negative levels, solid contour lines to positive levels, and the thicker solid contour denotes the zero level.

5.3 SPX put options

We next turn to a market-data experiment on SPX European put options. To enable a direct comparison with the DSCL benchmark of Wang et al. [20], we use the same SPX dataset considered there, dated May 18, 2019. As in that paper, dividends have been removed and the dataset is split into training and testing subsets containing 1720 and 1725 option prices, respectively, and we used $N_E = 16\,000$ cumulative training epochs for the calibration. In all cases, we use linear interpolation in maturity whenever the observed maturities do not coincide with tree dates. The main features of this market dataset are summarized in Table 7.

Table 8 reports the SPX pricing errors obtained with the proposed method for cumulative training budgets $N_E \in \{2000, 4000, 8000, 16000\}$ and with spatial regularization switched off. The results show a clear improvement as the number of tree time steps increases: both the in-sample and out-of-sample RMSE decrease substantially when passing from $N_T = 100$ to $N_T = 800$. The comparison with Wang et al. is favorable. In particular, the proposed method yields lower out-of-sample RMSEs than the DSCL benchmark for all reported values of N_T , while the in-sample metric improves markedly as the tree is refined. Increasing N_T produces a substantial reduction in both in-sample and out-of-sample RMSE, while the gains from increasing N_E beyond the first stages are relatively moderate. This shows that tree resolution is more critical than prolonged training once the main deformation of the base tree has already been learned.

To complement the RMSE values reported in Table 8, Figure 6 displays pricing errors and percent errors for the calibrated tree with $N_T = 800$ and $N_E = 16\,000$, separately for in-sample and out-of-sample quotes over the maturity–moneyness plane. The top row reports pricing errors and the bottom row the corresponding relative errors as a percentage. In each row, the left panel refers to in-sample quotes and the right panel to out-of-sample quotes.

The in-sample and out-of-sample pricing-error maps broadly show a similar structure, which suggests that the calibrated tree does not merely overfit the training quotes but captures a stable pricing pattern across the observed SPX surface. The larger pricing errors tend to concentrate in the short-maturity region and in the more extreme moneyness zones.

Figure 7 displays the local-volatility structure implied by the calibrated SPX tree for the representative case $N_T = 800$ and $N_E = 16\,000$. The left panel shows the local-volatility estimates extracted directly from the calibrated tree, the central panel shows the estimated local volatility surface, and the right panel displays the corresponding GPR-reconstructed contour plot. The reconstructed surface is quite regular and its shape is close to the SPX local-volatility surface displayed by Wang et al. [20], so the proposed method produces a market-implied volatility that is broadly consistent with that benchmark.

As a final robustness check, Table 9 reports the SPX pricing errors obtained by varying the spatial regularization coefficient while keeping $N_E = 16\,000$ fixed. The behavior is very regular: both in-sample and out-of-sample RMSE values decrease as the number of time steps increases, and the dependence on λ_{space} is mild. Compared with the unregularized results, spatial regularization produces only marginal changes in pricing accuracy. The best regularized result is very close to the unregularized one, which suggests that, for the large and informative SPX dataset, the calibration is already stable without spatial penalization. In such settings, the natural default is therefore $\lambda_{\text{space}} = 0$, but the results improve or do not deteriorate too much when it is taken differently from zero.

Symbol	Meaning	Value	Symbol	Meaning	Value
S_0	spot price	2859.53	N_{train}	training option prices	1720
r	risk-free rate	0.023	N_{test}	testing option prices	1725
T	maturity range	[0.055, 2.5]	K	strike range	[1150, 4000]

Table 7: Main characteristics of the SPX market dataset used in the empirical comparison with Wang et al. [20].

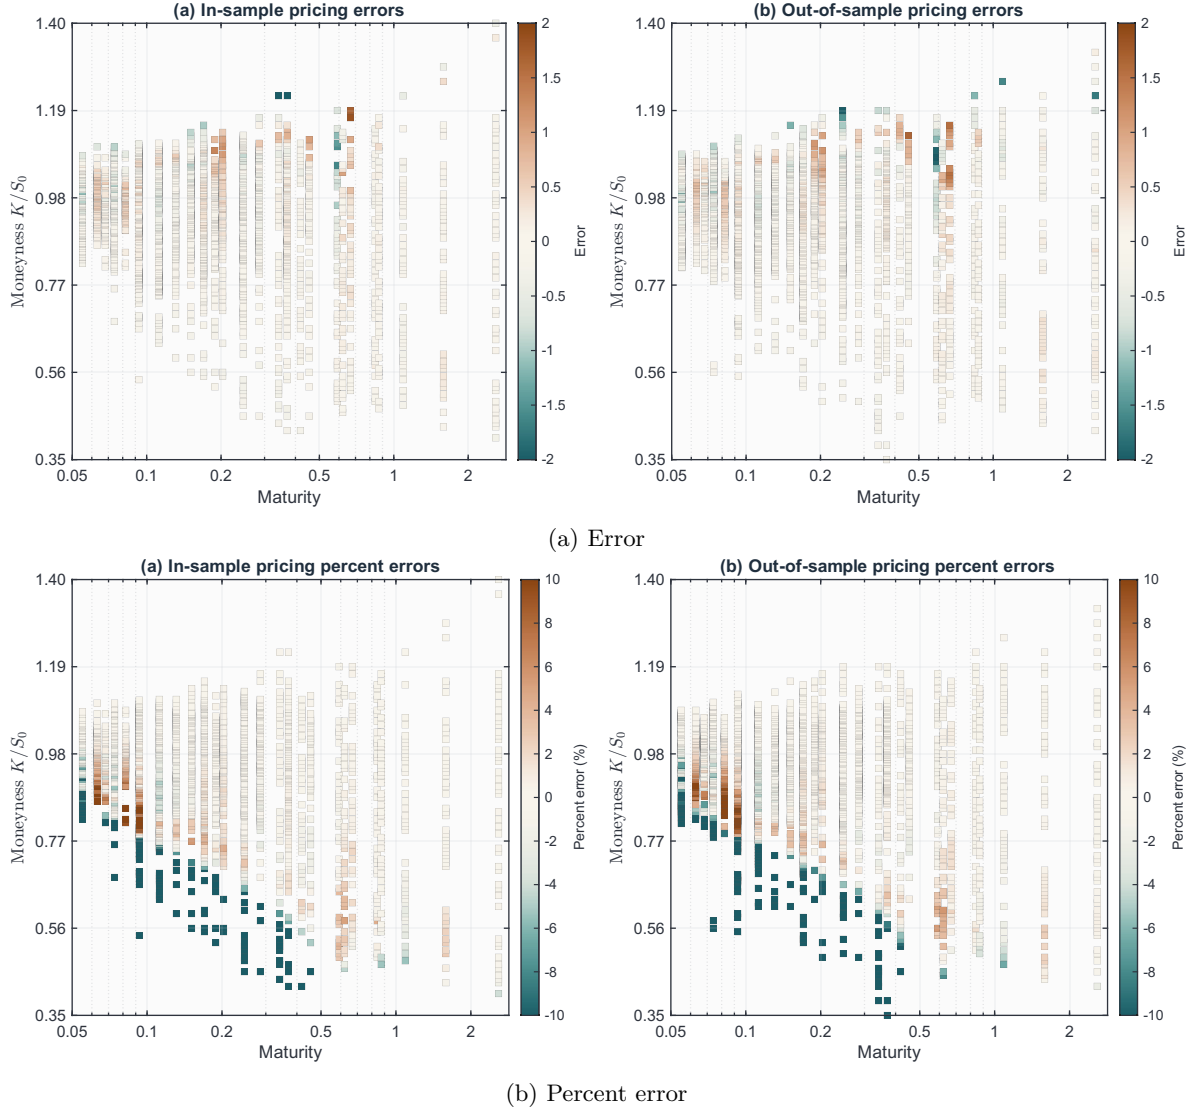


Figure 6: Pricing errors and percent errors for the SPX experiment with $N_T = 800$ and $N_E = 16\,000$. The top row reports pricing errors for in-sample quotes (left) and out-of-sample quotes (right), while the bottom row reports the corresponding percent errors. Each square corresponds to one market option quote, positioned by maturity and moneyiness. The color scales are fixed across the error panels and across the percent-error panels.

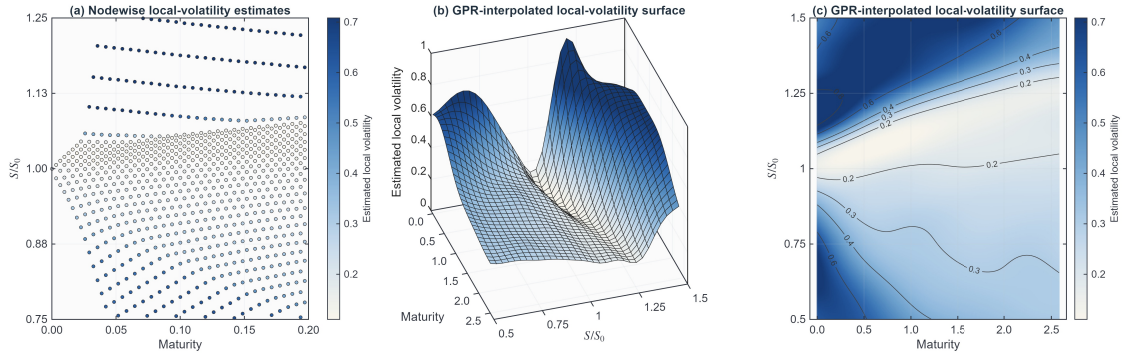


Figure 7: Local-volatility diagnostic for the SPX experiment with $N_T = 800$, $N_E = 16\,000$ and $\lambda_{\text{space}} = 0$. Left: nodes of the calibrated tree, with color indicating the corresponding tree-implied local-volatility estimate at each node. Center and right: 3D and contour representations of the GPR-reconstructed local-volatility surface.

N_T $N_E (\times 10^3)$	100				200				400				800				DSCL
	2	4	8	16	2	4	8	16	2	4	8	16	2	4	8	16	
OP IS ($\times 10^{-2}$)	97	92	88	84	62	55	49	45	53	44	37	32	52	42	34	30	97
OP OOS ($\times 10^{-2}$)	104	98	94	92	70	61	56	52	62	49	41	36	59	46	37	34	326
RT ($\times 10^3$)	0.1	0.1	0.1	0.2	0.2	0.3	0.5	1.0	0.5	0.8	1.5	2.9	1.4	2.5	4.6	8.7	

Table 8: Option-pricing RMSEs, expressed in units of 10^{-2} , for the SPX experiment, reported in-sample (OP IS) and out-of-sample (OP OOS) for the proposed method at different tree sizes N_T and cumulative training epochs N_E , with $\lambda_{\text{space}} = 0$. The last column reports the benchmark values from Wang et al. [20].

$N_T =$ $\lambda_{\text{space}} =$	100				200				400				800				DSCL
	0	0.01	0.03	0.1	0	0.01	0.03	0.1	0	0.01	0.03	0.1	0	0.01	0.03	0.1	
OP IS ($\times 10^{-2}$)	84	85	85	84	45	44	44	45	32	32	33	34	30	30	30	32	97
OP OOS ($\times 10^{-2}$)	92	91	91	93	52	51	50	53	36	36	36	39	34	35	34	36	326
RT ($\times 10^3$)	0.2	0.3	0.4	0.4	1.0	0.8	0.8	0.9	2.9	2.2	2.3	2.4	8.7	7.2	7.4	7.5	

Table 9: Option-pricing RMSEs, expressed in units of 10^{-2} , for the SPX experiment, reported in-sample (OP IS) and out-of-sample (OP OOS) for the proposed method at different tree sizes N_T and for different values of the spatial regularization coefficient λ_{space} , with cumulative training budget fixed at $N_E = 16\,000$. The last column reports the DSCL benchmark from Wang et al. [20]. The corresponding unregularized results are reported in Table 8.

5.4 American put options and early exercise

5.4.1 Post-calibration valuation of American puts

One practical advantage of the proposed methodology is that the resulting recombining tree can be reused to value new contracts by standard backward induction once calibration has been completed, without solving a PDE or training a new neural model. This feature is particularly relevant for derivatives with early-exercise features, such as American options.

To illustrate this point, we consider the trees calibrated in the synthetic-data experiment using European calls, and reuse them to price American put options. We compare the prices to the ones generated by solving a PDE with free boundary. We use a dense out-of-sample grid with 256 maturities and 256 strikes, with maturities uniformly distributed in $[0.3, 1.5]$ and strikes uniformly distributed in $[500, 3000]$.

The RMSE values reported in Table 10 show that the American-put valuation errors are not uniformly distributed over the maturity-moneyness domain, but are concentrated in localized regions, especially

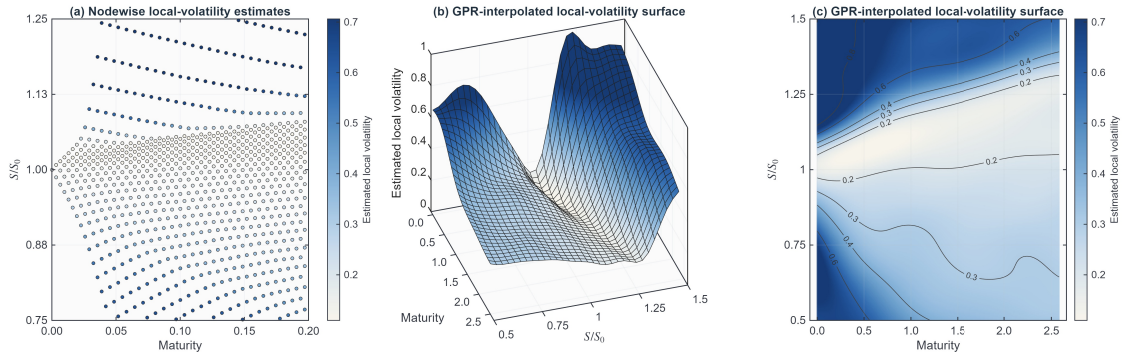


Figure 8: Local-volatility diagnostic for the SPX experiment with $N_T = 800$, $N_E = 16\,000$ and $\lambda_{\text{space}} = 0.03$. Left: nodes of the calibrated tree, with color indicating the corresponding tree-implied local-volatility estimate at each node. Center and right: 3D and contour representations of the GPR-reconstructed local-volatility surface.

$N_T =$	180				360				720			
$N_E =$	1000	2000	4000	8000	1000	2000	4000	8000	1000	2000	4000	8000
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$ European call options												
OP OOS ($\times 10^{-2}$)	24	23	22	22	15	12	12	12	11	10	10	10
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$ European call options												
OP OOS ($\times 10^{-2}$)	162	164	164	168	99	96	100	107	104	101	100	94

Table 10: Out-of-sample option-pricing RMSE, expressed in units of 10^{-2} , for American put options as a function of the number of tree time steps N_T and the cumulative number of training epochs N_E , for the two synthetic training grids made of European call options. $\lambda_{\text{space}} = 0$.

$N_T =$	180					360					720				
$\lambda_{\text{space}} =$	0	3	10	30	100	0	3	10	30	100	0	3	10	30	100
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$ European call options															
OP OOS ($\times 10^{-2}$)	22	23	20	23	32	12	17	21	21	30	10	15	22	26	29
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$ European call options															
OP OOS ($\times 10^{-2}$)	168	98	87	87	82	107	76	63	64	74	94	56	68	63	68

Table 11: Out-of-sample option-pricing RMSE for American put options when the tree is trained on synthetic European call option prices. Results are reported for two training grids, different tree resolutions N_T , and different values of λ_{space} . Entries are expressed in units of 10^{-2} ; highlighted values denote the best result within each N_T block. All calibrations use $N_E = 8000$ training epochs.

for the sparse 3×6 training grid. The dominant source of improvement is the refinement of the tree in time: increasing N_T produces a substantial reduction in out-of-sample pricing RMSE for both training configurations, whereas the gains from increasing N_E become comparatively milder once the main deformation of the benchmark tree has already been learned. In particular, the 10×20 training grid exhibits a marked improvement as N_T increases, while the 3×6 grid remains significantly less accurate.

The effect of spatial regularization on this post-calibration American-put valuation test is reported in Table 11. The dense 10×20 training grid is already sufficiently informative, and the regularization has only a limited effect on the American put out-of-sample errors. In this case, the best values are obtained either without regularization or with a moderate value of λ_{space} , depending on the tree resolution. By contrast, the sparse 3×6 grid benefits substantially from a positive spatial penalty. For all reported values of N_T , suitable positive values of λ_{space} lead to a sizeable reduction in the out-of-sample RMSE. This again confirms that the spatial regularization is useful when the calibration data are too sparse to identify a stable tree deformation.

5.4.2 Direct calibration on American put prices

We now consider a second experiment involving American put options. Differently from Section 5.4.1, where the tree is calibrated on European call prices and subsequently reused to price American puts, now the objective function for calibration is built from American put prices with the same maturities and strikes as in Section 5.2.

The results in Table 12 confirm that the proposed calibration procedure can also be trained directly on American put prices. The qualitative behavior is similar to that observed in the European-call experiments. Increasing the number of tree time steps improves pricing accuracy clearly on the dense grid, while the sparse grid remains more sensitive and less monotone out of sample. Increasing the training budget mainly refines the in-sample fit once the dominant deformation of the base tree has already been learned.

For the dense 10×20 grid, direct calibration on American put prices gives accurate results. The out-of-sample RMSE decreases from 22×10^{-2} for $N_T = 180$ and $N_E = 8000$ to 5×10^{-2} for $N_T = 720$ and $N_E = 8000$. This is substantially better than the American-put valuation test reported in Table 10, where the tree was calibrated on European calls and then reused to price American puts. In that case, the

$N_T =$ $N_E =$	180				360				720			
	1000	2000	4000	8000	1000	2000	4000	8000	1000	2000	4000	8000
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$ American put options												
OP IS ($\times 10^{-2}$)	16	11	9	8	12	7	5	4	12	6	4	3
OP OOS ($\times 10^{-2}$)	24	22	22	22	13	10	10	10	11	6	5	5
RT ($\times 10^3$)	0.3	0.7	1.3	2.5	0.7	1.4	2.8	5.6	1.9	3.9	7.9	16.0
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$ American put options												
OP IS ($\times 10^{-2}$)	6	3	1	0.4	10	3	1	0.2	5	2	2	0.2
OP OOS ($\times 10^{-2}$)	134	134	134	133	110	112	114	114	114	110	110	119
RT ($\times 10^3$)	0.3	0.6	1.2	2.4	0.7	1.3	2.7	5.3	1.7	3.4	6.8	13.5

Table 12: RMSE for American option pricing (OP) in-sample (IS) and out-of-sample (OOS), expressed in units of 10^{-2} . Runtime (RT) is reported in units of 10^3 seconds. Both training and testing are performed on American put options. $\lambda_{\text{space}} = 0$.

$N_T =$ $\lambda_{\text{space}} =$	180					360					720				
	0	3	10	30	100	0	3	10	30	100	0	3	10	30	100
Input grid $N_T^{opt} \times N_K^{opt} = 10 \times 20$ American put options															
OP IS ($\times 10^{-2}$)	8	10	11	14	18	4	5	7	9	13	3	4	6	9	13
OP OOS ($\times 10^{-2}$)	22	20	19	19	20	10	9	9	10	14	5	5	7	8	12
RT ($\times 10^3$)	2.5	3.1	3.1	3.2	3.2	5.6	7.3	7.5	7.5	7.6	16.0	19.5	19.2	19.3	19.3
Input grid $N_T^{opt} \times N_K^{opt} = 3 \times 6$ American put options															
OP IS ($\times 10^{-2}$)	0.4	2	3	5	9	0.2	2	4	5	10	0.2	2	4	7	12
OP OOS ($\times 10^{-2}$)	133	61	51	57	66	114	63	59	55	50	119	60	58	48	55
RT ($\times 10^3$)	2.4	3.0	3.0	3.0	3.0	5.3	6.6	6.8	6.8	6.9	13.5	17.3	17.2	17.3	17.2

Table 13: RMSE for American-put option pricing (OP), reported in-sample (IS) and out-of-sample (OOS), together with runtime (RT), for the method trained directly on synthetic American put option prices. Results are reported for two American-put training grids, different tree resolutions N_T , and different values of the spatial-regularization coefficient λ_{space} , with cumulative training budget fixed at $N_E = 8000$. Pricing errors are expressed in units of 10^{-2} , while runtime is expressed in units of 10^3 seconds. Grey-shaded entries identify, for each input grid and each fixed value of N_T , the value of λ_{space} that minimizes the OP OOS error; the corresponding OP IS and RT values are shaded as well.

corresponding out-of-sample RMSE for the 10×20 grid and $N_T = 720$, $N_E = 8000$ was about 10×10^{-2} . Thus, when the objective is the accurate valuation of American puts, including the early-exercise feature directly in the calibration roughly halves the out-of-sample pricing error in the dense-grid case.

The same comparison is more nuanced for the sparse 3×6 grid. Direct training on American puts produces very small in-sample errors, reaching 0.2×10^{-2} for $N_T = 720$ and $N_E = 8000$, but the out-of-sample RMSE remains much larger, around 119×10^{-2} . This is close to, and slightly worse than, the corresponding value in Table 10, where the tree calibrated on European calls achieved an out-of-sample RMSE of about 94×10^{-2} for the same tree size and training budget. This confirms that, under sparse training information, fitting American prices directly can lead to a very accurate reproduction of the observed quotes without necessarily improving global out-of-sample performance.

The main drawback of direct calibration on American put prices is its higher computational cost. Compared with the European-call calibration in Table 3, runtimes are substantially larger, because each loss evaluation requires a backward induction with the early-exercise obstacle rather than a simple Arrow–Debreu aggregation at maturity. For example, in the dense 10×20 case with $N_T = 720$ and $N_E = 8000$, the runtime increases from about 3.6×10^3 seconds in the European-call experiment to about 16.0×10^3 seconds when training is performed directly on American puts. A similar pattern is observed for the sparse grid, where the runtime rises to about 13.5×10^3 seconds.

Table 13 reports the effect of spatial regularization when the tree is trained directly on American

put option prices, for $N_E = 8000$. The results indicate that the impact of λ_{space} is again modest for the dense 10×20 grid, while it is more pronounced for the sparse 3×6 grid, where positive regularization substantially improves out-of-sample performance.

Overall, these results indicate that direct calibration on American option prices is feasible and can significantly improve pricing accuracy when the training grid is sufficiently informative. At the same time, the experiment also highlights the computational cost of incorporating early exercise instruments.

6 Conclusion

We have proposed a neural calibration framework for constructing a recombining binomial tree directly from option prices. By deforming a benchmark tree, it produces a complete and arbitrage-free model in discrete time that closely matches market prices. That model can then be used for the pricing and hedging of other contingent claims, including options with early exercise features, without referring to the machine learning algorithms that were used to design it. An optional spatial regularizer can be added when the option data are sparse and the inverse problem is weakly identified, and we show that this hardly changes the results for cases where such regularization is not needed. The method does not aim for a calibration of a continuous local-volatility function, and experiments show that when the available option dataset is sparse, the recovery of a regular local-volatility surface remains challenging.

The proposed methodology occupies an intermediate position between classical calibrated lattice models and recent deep-learning approaches to option surfaces. Its main advantage is that it returns a discrete pricing model rather than an intermediate machine learning object, which is attractive when the final objective is fast and reliable valuation of both prices and hedge strategies. Moreover, the method requires only a small number of initial design choices, mainly the tree resolution N_T and the maximum training budget N_E .

Our approach can be interpreted as a design problem for stock price paths under a recombination constraint, and as such it combines the flexibility of neural calibration with the easy interpretability and computational convenience of lattice models for pricing and hedging.

Acknowledgements

The authors report that no generative AI has been used for this paper, apart from suggestions for improvements in language and grammar (ChatGPT 5.6 Sol). The authors take full responsibility for the content of the publication.

Appendix A: Proofs

A.1 Proof of Proposition 2.1

Proof. The assumed inequalities imply that the numerator and denominator in Equation (2.2) are strictly positive and that the numerator is strictly smaller than the denominator, so $p_{n,j} \in (0, 1)$. Local, and thus global, absence of arbitrage follows from the existence of a unique one-step equivalent martingale measure. Completeness follows from the fact that, at each node, there are exactly two successor states and one traded risky asset together with the money-market account, which yields a unique replication strategy. $\square$

A.2 Proof of Theorem 4.1

Proof. Let Θ be a compact subset of $\mathcal{A}_\eta(m, M)$. We prove Theorem 4.1 through three steps which allow application of the Weierstrass Extreme Value Theorem:

1. the set of trees $\mathbf{S}^{(\theta)}$ generated by the admissible class $\theta \in \Theta \subset \mathcal{A}_\eta(m, M)$ is compact,
2. for every strictly admissible base tree $\mathbf{S}^{(\theta_0)}$ with $\theta_0 \in \mathcal{A}_\eta(m, M)$, there exists $\varepsilon_0 > 0$ such that every log-deformation of $\mathbf{S}^{(\theta_0)}$ with sup norm smaller than ε_0 remains strictly admissible, and
3. for any value of $\lambda_{\text{prob}} \geq 0$ and $\lambda_{\text{space}} \geq 0$, the penalized objective function $\theta \mapsto \mathcal{L}(\theta)$ defined in (3.7) is continuous on $\mathcal{A}_\eta(m, M)$.

Step 1: Compactness of trees $\{\mathbf{S}^{(\theta)} : \theta \in \Theta\}$.

The set Θ is compact and $\theta \rightarrow \mathbf{S}^{(\theta)}$ is continuous by the assumption on f_θ . This implies that $\mathbf{S}^{(\theta)}$ is compact as well.

Step 2: Strict admissibility under small log-deformations.

Take any $\theta \in \Theta \subset \mathcal{A}_\eta(m, M)$. For every (n, j) , if we define $g_n = \exp((r_n - q_n)\Delta t)$, we have due to (4.2),

$$S_{n+1,j+1}^{(\theta)} - S_{n+1,j}^{(\theta)} = (S_{n+1,j+1}^{(\theta)} - g_n S_{n,j}^{(\theta)}) + (g_n S_{n,j}^{(\theta)} - S_{n+1,j}^{(\theta)}) \geq 2\eta. \quad (\text{A.1})$$

By definition (2.2), the numerator of $p_{n,j}^{(\theta)}$ is at least η , the denominator minus the numerator is again at least η , and the denominator is at most $M - m$. Therefore

$$p_{n,j}^{(\theta)} \in \left[\frac{\eta}{M - m}, 1 - \frac{\eta}{M - m} \right].$$

Moreover, by (A.1) and since $S_{n,j}^{(\theta)} \leq M$, the corresponding log-prices satisfy, for $n > 1$,

$$\log\left(\frac{S_{n,j+1}^{(\theta)}}{S_{n,j}^{(\theta)}}\right) = \log\left(1 + \frac{S_{n,j+1}^{(\theta)} - S_{n,j}^{(\theta)}}{S_{n,j}^{(\theta)}}\right) \geq \log\left(1 + \frac{2\eta}{M}\right), \quad (\text{A.2})$$

Take $\mathbf{S}^{(\theta_0)}$ with $\theta_0 \in \mathcal{A}_\eta(m, M)$, and define

$$\mathbf{S}_{n,j}^{(\theta)} = \mathbf{S}_{n,j}^{(\theta_0)} e^{\delta_{n,j}}.$$

Note that by (4.2) the g_n are bounded, and set

$$C_M = M(1 + \max_{0 \leq n \leq N_T} g_n), \quad \varepsilon_0 = \log\left(1 + \frac{\eta}{2C_M}\right). \quad (\text{A.3})$$

If $\|\delta\|_\infty := \max_{0 \leq j \leq n \leq N_T} |\delta_{n,j}| \leq \varepsilon_0$ then, by (A.2) and (A.3),

$$me^{-\varepsilon_0} \leq \mathbf{S}_{n,j}^{(\theta)} \leq Me^{\varepsilon_0}, \quad (\text{A.4})$$

for any (n, j) . Using this, and the fact that $\mathbf{S}^{(\theta_0)}$ satisfies (4.1)-(4.2),

$$\begin{aligned} g_n \mathbf{S}_{n,j}^{(\theta)} - \mathbf{S}_{n+1,j}^{(\theta)} &= (g_n \mathbf{S}_{n,j}^{(\theta_0)} - \mathbf{S}_{n+1,j}^{(\theta_0)}) + g_n (\mathbf{S}_{n,j}^{(\theta)} - \mathbf{S}_{n,j}^{(\theta_0)}) - (\mathbf{S}_{n+1,j}^{(\theta)} - \mathbf{S}_{n+1,j}^{(\theta_0)}) \\ &\geq \eta - g_n |\mathbf{S}_{n,j}^{(\theta)} - \mathbf{S}_{n,j}^{(\theta_0)}| - |\mathbf{S}_{n+1,j}^{(\theta)} - \mathbf{S}_{n+1,j}^{(\theta_0)}| \\ &\geq \eta - (1 + \max_{0 \leq j \leq n \leq N_T} g_n) M (e^{\varepsilon_0} - 1) = \eta - C_M (e^{\varepsilon_0} - 1) \geq \frac{\eta}{2}. \end{aligned}$$

A similar argument gives

$$\mathbf{S}_{n+1,j+1}^{(\theta)} - g \mathbf{S}_{n,j}^{(\theta)} \geq \frac{\eta}{2},$$

and this shows that the deformed tree satisfies the admissibility condition (4.2). In particular, the deformed tree remains arbitrage-free and complete by Proposition 2.1.

Step 3: Continuity of the objective function.

For each node (n, j) , the local risk-neutral probability is obtained from the three adjacent node values through the map in (2.2) and the denominator is bounded below by 2η due to (A.1), so the map is Lipschitz in θ on the compact domain Θ . Hence each local probability $p_{n,j}^{(\theta)}$ depends continuously on the tree nodes and hence, by the assumed continuity of $(\theta, x, y) \mapsto f_\theta(x, y)$, it is also continuous in θ .

This property is then inherited by the Arrow-Debreu state prices $\lambda_{n,j}^{(\theta)}$, which are generated recursively through finitely many additions and multiplications involving these probabilities and the discount factor, and for the prices of European calls and puts with maturities that correspond to grid points, since their payoff maps $x \mapsto (x - K)_+$ and $x \mapsto (K - x)_+$ are continuous. For American calls and puts, the backward induction recursion consists of finitely many continuous operations and pointwise maxima of continuous functions, so the same holds. If the maturity for an option lies between two grid dates, the pricing rule uses a convex combination of the two neighbouring grid prices; this also preserves continuity.

We thus conclude that for all options i the map $\theta \mapsto \Pi_i^{(\theta)}$, and therefore the $\theta \mapsto \text{MSE}(\theta)$ function defined in (3.3), is continuous. By (3.7) the proof of Theorem 4.1 is therefore finished if we can prove the same for $\mathcal{P}_{\text{prob}}$ and $\mathcal{P}_{\text{space}}$.

For the probability penalty $\mathcal{P}_{\text{prob}}$ this follows from (3.4) since the ReLU function ϕ is continuous. The spatial penalty $\mathcal{P}_{\text{space}}$ is built from finitely many continuous operations involving node values, clipped risk-neutral probabilities, logarithms, finite differences of the tree-implied local variances, and normalizations, so it is also continuous on $\mathcal{A}_\eta(m, M)$. This concludes the proof. $\square$

Appendix B: Additional local-volatility estimates

For completeness, we report additional comparisons between the true local volatility and the tree-implied local volatility for the two training grids considered in the synthetic-data experiments. These figures complement the surface plots discussed in the main text in Section 5.2. Figure 9 shows results without regularization, and Figure 10 results for $\lambda_{\text{space}} = 3$.

As can be seen from Figure 9, the local volatility extracted node by node from the calibrated tree may display irregularities, in particular when the model is calibrated on a sparse dataset. The GPR reconstruction acts as an effective smoothing step and yields a more regular local-volatility estimate.

A comparison between Figures 9 and 10 further suggests that the introduction of the penalty term for regularization reduces the amplitude of the oscillations. This effect is visible in both training configurations, and especially in the sparse 3×6 case. However, once the GPR smoothing step is applied, the additional improvement remains modest. This indicates that the penalty is more useful as a device for guiding the training of the neural network than as a tool to improve the final reconstructed local-volatility surface.

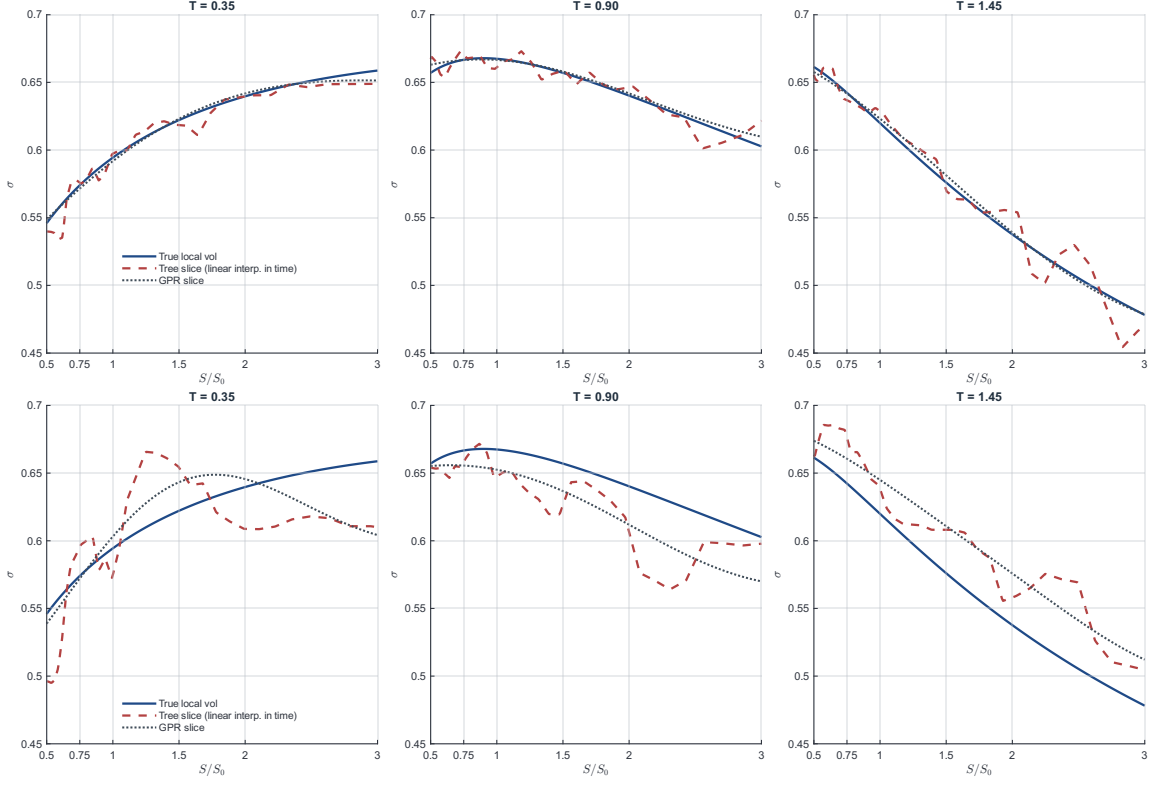


Figure 9: Slice-wise comparison of the true local volatility and the tree-implied local volatility for the 10×20 training grid (above) and for the 3×6 training grid (below), at three representative maturities. Parameters: $N_T = 720$, $N_E = 8000$, $\lambda_{\text{space}} = 0$.

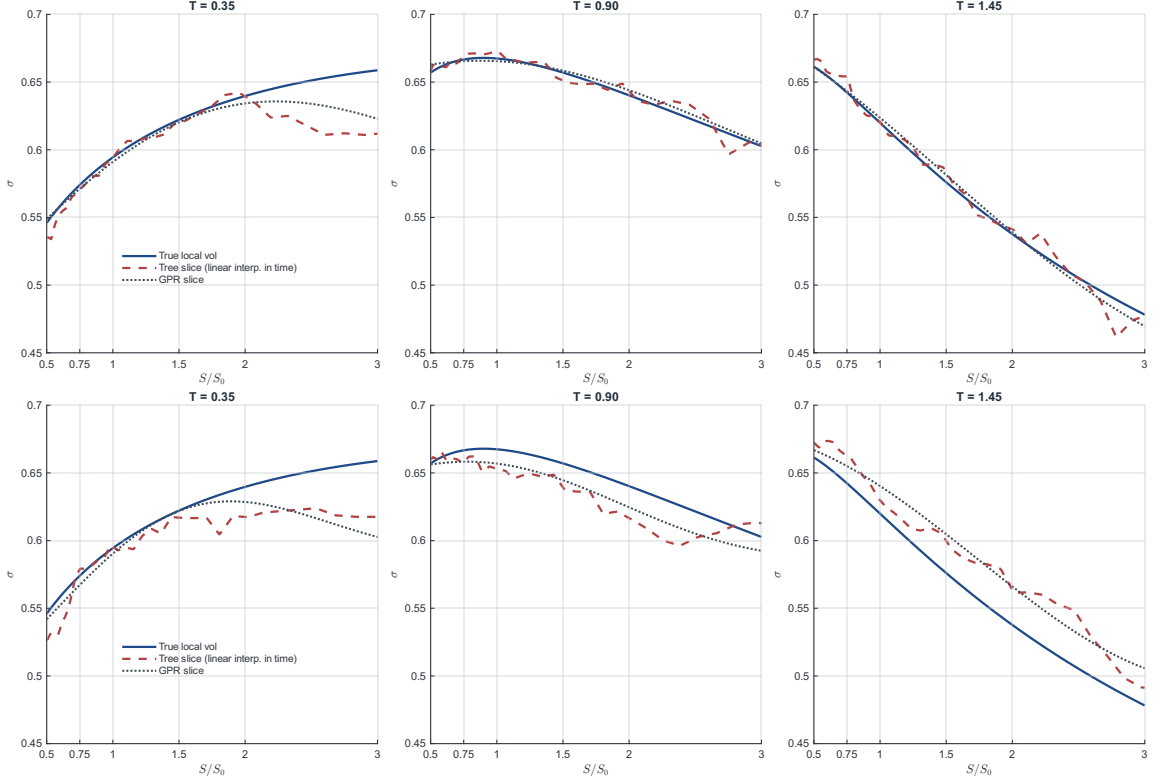


Figure 10: Slice-wise comparison of the true local volatility and the tree-implied local volatility for the 10×20 training grid (above) and for the 3×6 training grid (below), at three representative maturities. Parameters: $N_T = 720$, $N_E = 8000$, $\lambda_{\text{space}} = 3$.

References

- [1] Kenneth J Arrow. Le rôle des valeurs boursières pour la répartition la meilleure des risques, *Econométrie*, 41-47, English translation as the role of securities in the optimal allocation of risk-bearing. *Review of Economic Studies*, 31:91–96, 1964.
- [2] Marc Chataigner, Stéphane Crépey, and Matthew Dixon. Deep local volatility. *Risks*, 8(3):82, 2020. doi: 10.3390/risks8030082.
- [3] John C. Cox, Stephen A. Ross, and Mark Rubinstein. Option pricing: A simplified approach. *Journal of Financial Economics*, 7(3):229–263, 1979. doi: 10.1016/0304-405X(79)90015-1.
- [4] Stéphane Crépey. Calibration of the local volatility in a generalized Black–Scholes model using Tikhonov regularization. *SIAM Journal on Mathematical Analysis*, 34(5):1183–1206, 2003. doi: 10.1137/S0036141001400202.
- [5] Gérard Debreu. *Theory of Value: An Axiomatic Analysis of Economic Equilibrium*. Wiley, New York, 1959.
- [6] Emanuel Derman and Iraj Kani. The volatility smile and its implied tree. Technical report, Goldman Sachs Quantitative Strategies Research Notes, 1994.
- [7] Bruno Dupire. Pricing with a smile. *Risk*, 7(1):18–20, 1994.
- [8] Lei Fan and Justin Sirignano. Machine learning methods for pricing financial derivatives. *Quantitative Finance*, 26(6):931–959, 2026. doi: 10.1080/14697688.2026.2623901.
- [9] Jian Geng, I. Michael Navon, and Xiao Chen. Non-parametric calibration of the local volatility surface for European options using a second-order tikhonov regularization. *Quantitative Finance*, 14(1):73–85, 2014. doi: 10.1080/14697688.2013.819988.
- [10] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016. doi: 10.7551/mitpress/9780262035613.001.0001.
- [11] Ludovic Goudenège, Andrea Molent, and Antonino Zanette. Machine learning for pricing American options in high-dimensional Markovian and non-Markovian models. *Quantitative Finance*, 20(4): 573–591, 2020. doi: 10.1080/14697688.2019.1701698.
- [12] Kurt Hornik, Maxwell B. Stinchcombe, and Halbert White. Multilayer feedforward networks are universal approximators. *Neural Networks*, 2(5):359–366, 1989. doi: 10.1016/0893-6080(89)90020-8.
- [13] Huisu Jang and Jaewook Lee. Generative Bayesian neural network model for risk-neutral pricing of American index options. *Quantitative Finance*, 19(4):587–603, 2019. doi: 10.1080/14697688.2018.1490807.
- [14] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *International Conference on Learning Representations (ICLR)*, 2015.
- [15] Yanmin Li. A new algorithm for constructing implied binomial trees: Does the implied model fit any volatility smile? *Journal of Computational Finance*, 4(2):69–95, 2000. doi: 10.21314/JCF.2001.072.
- [16] Vittorio Moriggia, Silvia Muzzioli, and Costanza Torricelli. On the no-arbitrage condition in option implied trees. *European Journal of Operational Research*, 193(1):212–221, 2009. doi: 10.1016/j.ejor.2007.10.017.
- [17] Carl Edward Rasmussen and Christopher K. I. Williams. *Gaussian Processes for Machine Learning*. MIT Press, Cambridge, MA, 2006. doi: 10.7551/mitpress/3206.001.0001.
- [18] Mark Rubinstein. Implied binomial trees. *The Journal of Finance*, 49(3):771–818, 1994. doi: 10.1111/j.1540-6261.1994.tb00079.x.

- [19] Andrey N. Tikhonov and Vasiliy Y. Arsenin. *Solutions of Ill-Posed Problems*. Winston, Washington, DC, 1977. Distributed by Halsted Press.
- [20] Zhe Wang, Ameir Shaa, Nicolas Privault, and Claude Guet. Deep self-consistent learning of local volatility. *Journal of Computational Finance*, 29(2):1–25, 2025. doi: 10.21314/JCF.2025.007.
- [21] Zhonghao Xian, Xing Yan, Cheuk Hang Leung, and Qi Wu. Risk-neutral generative networks. *Quantitative Finance*, 26(6):961–980, 2026. doi: 10.1080/14697688.2026.2679119.
- [22] Wenyong Zhang, Lingfei Li, and Gongqiu Zhang. A two-step framework for arbitrage-free prediction of the implied volatility surface. *Quantitative Finance*, 23(1):21–34, 2023. doi: 10.1080/14697688.2022.2135454.