

Semantic Head Specialization Guides Hybrid ViT Attention for Multimodal LLMs

Chenhong He^{1,3}, Lei Li^{2,3}, Shicheng Li³, Hanglong Lv^{1,3}

Lingpeng Kong², Qi Liu², Tong Yang^{1,†}, Shuhuai Ren^{3,†}

¹State Key Laboratory of Multimedia Information Processing,
School of Computer Science, Peking University

²Department of Computer Science, The University of Hong Kong

³Xiaomi Corporation, LLM-Core Team

heccc@stu.pku.edu.cn, nlp.lilei@gmail.com

[†]Corresponding authors.

Abstract

Hybrid attention dominates frontier LLMs, yet Vision Transformers (ViTs) in multimodal LLMs lack a satisfactory hybrid design, with no consensus on why certain attention patterns work better. To fill this gap, we study ViT attention heads and find they differentiate into object- and background-specialist roles, a pattern most pronounced under full attention; we call this Semantic Head Specialization (SHS). We propose SHS-Index to quantify this specialization, show that it distinguishes full-attention from chunk-window ViTs, and find that it correlates with downstream benchmark performance within our controlled design space. We then identify three structural factors that shape SHS—window interaction, token serialization, and local softmax allocation—and use them as design principles for hybrid attention. Guided by these factors, we design Ariadne Attention, a hybrid within about 0.5 points of full attention on the 20-image benchmark at $6.5\times$ lower attention FLOPs; its end-to-end ViT time is 13.5% lower at 896². Our findings establish head specialization as a measurable property for diagnosing and designing principled hybrid ViT attention at the multimodal-LLM scale.

1 Introduction

As Vision Transformers (ViTs) (Dosovitskiy et al., 2021) scale to higher resolutions, full self-attention becomes increasingly expensive, making efficient attention a central design problem. Hybrid attention is a natural candidate: frontier LLMs such as GPT-OSS (OpenAI, 2025) and Gemma 3 (Gemma Team, 2025) reduce cost by interleaving local and full-attention layers. In ViTs, however, existing hybrids have not yet matched the quality of full attention. Widely used efficient ViT designs such as Qwen2.5-VL (Bai et al., 2025b) rely on chunk-window locality, where tokens are grouped

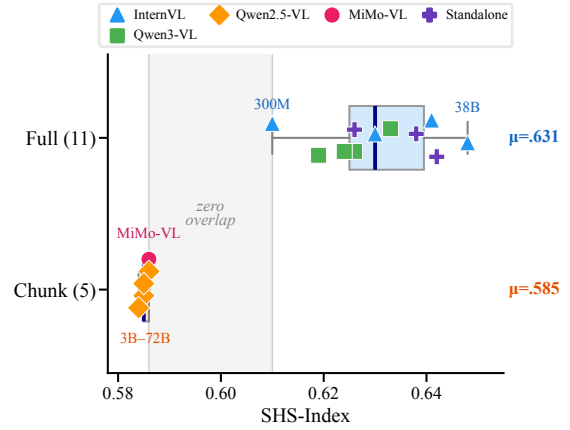


Figure 1: **SHS-Index separates ViT attention designs.** Across 16 open-source visual encoders and VLMs, SHS-Index cleanly separates full-attention and chunk-window ViTs. Within Qwen2.5-VL, changing the LLM size from 3B to 72B leaves SHS-Index nearly unchanged, indicating that the signal comes from the ViT attention design.

into non-overlapping windows, while recent high-quality VLM encoders such as Qwen3-VL (Bai et al., 2025a) return to full attention. This quality gap raises a concrete question: what does full attention preserve that current chunk-window ViT hybrids lose?

We study this question with a controlled full-vs.-chunk comparison, choosing chunk windows because they are the main deployed ViT hybrid baseline in current VLMs. We train two ViTs from scratch under identical conditions, ensuring that the attention operator is the only difference: one model uses full attention, while the other uses Qwen-style chunk windows. We then inspect per-head attention maps to see how the two operators organize visual information internally. The maps reveal a clear qualitative contrast: under full attention, heads differentiate into semantic

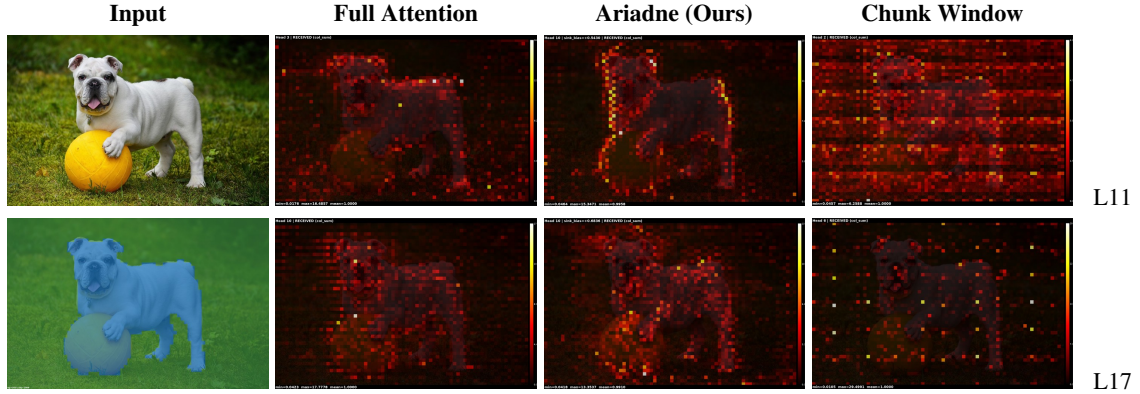


Figure 2: **Semantic Head Specialization (SHS) in ViT attention heads.** *First column:* input image (top) and a foreground (blue) / background (green) segmentation (bottom); each ViT token is labeled foreground or background by the dominant region within its image patch. *Columns 2–4:* received-attention heatmaps for a representative head at two ViT layers (L11, L17) across three attention designs. Under Full Attention, heads specialize: bright regions concentrate on the foreground object, revealing clear object/background differentiation. Our Ariadne attention preserves this specialization. Under Chunk Window attention (Qwen2.5-VL style), heads show grid-like window-boundary artifacts and fail to differentiate foreground from background.

roles, with some focusing on foreground objects and others on the background; under chunk windows, heads instead show more uniform grid-like patterns. We name this phenomenon **Semantic Head Specialization (SHS)**. To make this observation measurable beyond individual heatmaps, we propose **SHS-Index**, an AUROC-based metric of how strongly each head separates foreground from background tokens. Across 16 open-source visual encoders and VLMs, SHS-Index separates full-attention and chunk-window ViTs with no overlap in score ranges, showing that the full-vs.-chunk specialization gap generalizes beyond our controlled training pair. Within Qwen2.5-VL, changing only the LLM backbone size from 3B to 72B changes SHS-Index by less than 0.002, supporting that the signal is tied to ViT attention design rather than LLM scale (Figure 1). These results justify using SHS-Index as a ViT-side diagnostic for attention design.

We next use SHS-Index to diagnose why chunk-window attention weakens specialization and how a better hybrid can recover it. We focus on three structural factors—window interaction, token serialization, and local softmax allocation—and measure how each one changes SHS-Index. After this structural analysis, we evaluate the sufficiently trained diagnostic configurations on 22 downstream benchmarks. At the primary 8k checkpoint, SHS-Index correlates with the corrected 22-task average (Pearson $r=0.858$, $p=0.006$; exact permutation $p=0.008$), with the relationship inter-

preted as cross-architecture evidence rather than a causal or within-run predictor. Guided by the validated factors, we design **Ariadne Attention**¹, an SHS-informed hybrid combining sliding windows, per-head sink bias, and row-column alternating serialization. Ariadne reaches 40.40 versus 40.92 for full attention on the 20-image benchmark, while reducing attention FLOPs by $6.5\times$ and end-to-end ViT time by 13.5% at 896² (Appendix I). These results establish head specialization as a measurable property linking attention design to ViT quality, opening a path toward principled hybrid ViT attention design.

Our contributions are: **(1)** We discover Semantic Head Specialization (SHS), the phenomenon that ViT heads differentiate into object- and background-specialist roles, and propose SHS-Index, a diagnostic metric that separates attention families across 16 open-source visual encoders and VLMs. **(2)** We identify three architectural factors that shape SHS—window interaction, token serialization, and local softmax allocation—through targeted structural comparisons. **(3)** We show that SHS-Index correlates with benchmark performance across controlled architectures at the primary checkpoint, and use it to design Ariadne Attention, which comes within about 0.5 points of full attention on 20 image tasks at $6.5\times$ lower attention FLOPs.

¹Named after Ariadne’s thread in Greek mythology: as the thread guided Theseus through the labyrinth, sliding-window attention traces a continuous path through the token sequence.

2 Semantic Head Specialization in ViT Attention

To compare how full-attention and chunk-window ViTs differ in attention behavior and downstream quality, we first study their per-head attention patterns under a controlled full-vs.-chunk comparison (§2.1). We quantify this phenomenon with **SHS-Index** (§2.2) and analyze whether the specialization gap is an architecture-level property rather than merely a side effect of LLM scale.

2.1 Full-vs.-Chunk Comparison of Attention Patterns

We aim to understand how different ViT attention operators shape per-head attention patterns. Rather than starting from downstream scores, we inspect the attention maps induced by two specific operators: **full attention**, where every token can attend to every other token, and **chunk-window attention**, where non-overlapping chunks restrict each token to attend only within its own chunk. To compare these operators, we start from the attention computation itself. For head h over a sequence of N visual tokens, let $\mathcal{N}(i)$ be the tokens that query i attends to, and define $\mathcal{I}(a, b) = \{a, a + 1, \dots, b\}$ as the set of token indices from a to b . For full attention, $\mathcal{N}(i) = \mathcal{I}(1, N)$. For chunk attention with chunk size C (e.g., $\ll N$), $\mathcal{N}(i) = \mathcal{I}(b_i C + 1, \min(N, (b_i + 1)C))$, where $b_i = \lfloor (i - 1)/C \rfloor$. The head-specific attention weight from query i to key j is:

$$a_{ij}^{(h)} = \frac{\exp(\mathbf{q}_i^\top \mathbf{k}_j / \sqrt{d})}{\sum_{j' \in \mathcal{N}(i)} \exp(\mathbf{q}_i^\top \mathbf{k}_{j'} / \sqrt{d}) + \exp(s_{\text{aux}}^{(h)})} \quad (1)$$

where $\mathbf{q}_i$ and $\mathbf{k}_j$ are the query and key vectors for tokens i and j , d is the per-head dimension, and $s_{\text{aux}}^{(h)}$ is a per-head learnable sink bias (Xiao et al., 2024; Darcet et al., 2024) (set to $-\infty$ when absent). We use *received attention* as each token’s importance measure: the total attention mass that token collects from all queries that can see it. Received attention for token j is:

$$r_h(j) = \sum_{i: j \in \mathcal{N}(i)} a_{ij}^{(h)} \quad (2)$$

Intuitively, $r_h(j)$ is token j ’s head- h importance: total votes from queries that can see it.

A fair comparison must not conflate attention type with layer depth or training conditions. We therefore train a matched pair of 32-layer ViT encoders. One model uses full self-attention in all

layers. The other follows Qwen2.5-VL-style: layers 7, 15, 23, and 31 use full attention, and the remaining 28 layers replace full attention with chunk-window attention (Bai et al., 2025b) (architecture details in Appendix A.1). We then visualize per-head received-attention maps on COCO val2017 images (Lin et al., 2014). The results reveal a striking difference between the two models. Under full attention (Figure 2, column 2), heads do not merely produce different-looking maps; they organize into consistent semantic roles. Some heads assign high received attention to foreground objects, with bright regions aligned with the dog and ball, while others assign high received attention to background regions. We call this phenomenon **Semantic Head Specialization (SHS)**: attention heads specialize by separating semantic regions of the image, here most clearly visible as distinct object- and background-oriented roles.

The chunk-window baseline shows much weaker SHS (Figure 2, column 4). Its heatmaps exhibit grid-like artifacts from window boundaries, and different heads look qualitatively similar rather than forming clear semantic roles. This contrast suggests that the quality gap between full and chunk-window attention is reflected not only in downstream benchmark scores, but also in how attention heads organize internally and assign each token to a foreground- or background-oriented role.

SHS is also not a single-image artifact. The same head maintains a consistent foreground-or-background preference across all analysis images (per-image heatmaps in Appendix D; iteration-aggregated object dominance in Appendix E), indicating that SHS is a stable property of the trained model rather than a stimulus-dependent visualization effect. The pattern further generalizes across diverse visual scenes—including single objects, multiple objects, complex backgrounds, and scenes with overlapping or cluttered foreground entities—and consistently maintains object/background head specialization (Appendix D).

2.2 Quantifying Head Specialization

The heatmaps above suggest that a specialized head should consistently prefer one semantic side of the image: either object tokens or background tokens. We therefore turn SHS into a foreground-background separation problem. For this quantitative analysis, we use COCO segmentation masks to assign each visual token to foreground or background according to the dominant

region in its image patch (details in Appendix C). Given the received-attention score $r_h(j)$ (Eq. 2), a foreground-specialist head should give larger scores to foreground tokens than to background tokens, while a background-specialist head should consistently do the opposite.

For each head h and image, we compute the AUROC of received attention $r_h(j)$ for ranking foreground tokens above background tokens:

$$\text{AUROC}_h = \Pr(r_h(j^+) > r_h(j^-)) + \frac{1}{2} \Pr(r_h(j^+) = r_h(j^-)), \quad (3)$$

where j^+ and j^- denote foreground and background tokens. AUROC values near 1 or 0 indicate foreground- or background-oriented heads, while values near 0.5 indicate no separation. Since either direction (FG/BG) indicates specialization, we define the head-level score as

$$\text{SHS}_h = \max(\text{AUROC}_h, 1 - \text{AUROC}_h). \quad (4)$$

which ranges from 0.5 (no separation) to 1 (strong specialization). The final **SHS-Index** averages this score over images, layers, and heads:

$$\text{SHS-Index} = \mathbb{E}_{\text{img}, \ell, h}[\text{SHS}_h]. \quad (5)$$

On our controlled full-vs.-chunk pair, SHS-Index is .606 for Full Attention and .577 for Chunk Window, quantitatively matching the specialization gap observed in the heatmaps.

SHS-Index separates attention families in open-source models. The controlled pair above shows that SHS-Index captures the specialization gap between full and chunk-window attention under matched training conditions. We next ask whether the same signal appears in existing VLMs rather than only in our controlled models. Across 16 open-source visual encoders and VLMs, SHS-Index cleanly separates the 11 full-attention encoders (mean SHS ≈ 0.631) from the 5 chunk-window ViTs (mean SHS = 0.585), with no observed overlap (Figure 1; full data in Appendix E). Moreover, the identical Qwen2.5-VL ViT changes by only < 0.002 when paired with 3B–72B LLM backbones, showing that SHS-Index is determined by the ViT attention design rather than by the language-model scale. Thus, the open-source analysis supports SHS as an architecture-level diagnostic. We do not use these heterogeneous models for benchmark correlation because their data, training recipes, and language backbones differ.

3 Structural Sources of the SHS Gap

The evidence above points to a clear SHS gap: full attention specializes heads much more strongly than chunk-window attention. We now ask which structural choices create this gap, with the goal of turning them into design principles for a better hybrid attention. We study three factors in turn—window interaction, token serialization, and local softmax allocation—using controlled attention-only comparisons. As in §2.1, all comparisons keep the 32-layer ViT, data, training recipe, and full-attention anchor layers fixed; only the attention structure in the remaining 28 layers changes.

Factor 1: Window isolation restricts spatial scope. Chunk-window attention differs from full attention most directly in spatial reach. In full attention, every token can collect evidence from the whole image. In chunk-window attention, image tokens are partitioned into non-overlapping chunks, so a local layer can only mix information inside each chunk. If SHS requires heads to compare object and background evidence across regions, then the first question is whether relaxing this chunk-level isolation improves SHS. To answer this question, we keep Qwen2.5-VL’s original 2D block layout, where image patches are grouped into local 2×2 blocks and then ordered as chunk windows (Figure 3b), and change only the attention operator from chunk-window attention to sliding-window attention (SWA) (Jiang et al., 2023). Here, SWA denotes a token-wise local attention pattern: with window (l, r) , query i attends to $\mathcal{N}_{\text{SWA}}(i) = \mathcal{I}(\max(1, i-l), \min(N, i+r))$, i.e., a window of preceding and following tokens rather than a fixed chunk. Unlike fixed chunks, this window overlaps across chunk boundaries, so tokens are no longer confined to their original chunk; across layers, information can propagate through successive windows to much farther spatial regions. Under this controlled change, SHS-Index increases from .577 (chunk-2D) to .588 (SWA-2D). Attention distance provides a direct physical check: using the attention distance of Dosovitskiy et al. (2021), $D = \mathbb{E}_{h,i}[\sum_j a_{ij}^{(h)} \|p_i - p_j\|_2]$, where p_i is the 2D image position of token i , the average span rises from $D = 10.69$ to $D = 11.80$. **This identifies window isolation as one source of the SHS gap: chunk windows restrict spatial scope, and a better hybrid ViT should propagate spatial context by allowing token interaction to flow freely**

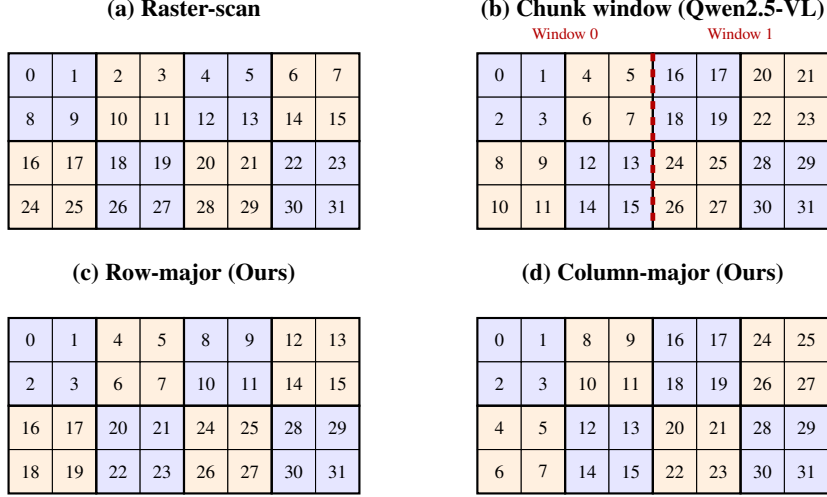


Figure 3: Token arrangements on a 4×8 patch grid (2×4 blocks). Numbers indicate position in the 1D sequence; bold borders delimit 2×2 blocks. (a) Raster-scan. (b) Qwen2.5-VL chunk window: blocks grouped into non-overlapping windows (dashed red line); token 15 and token 16 are spatially adjacent but in separate windows. (c) Row-major: all blocks serialized left-to-right, top-to-bottom for SWA. (d) Column-major: blocks serialized top-to-bottom, left-to-right. Ariadne alternates (c) and (d) across layers (§4.1).

across window boundaries.

Factor 2: Serialization order determines specialization quality. SWA increases cross-window interaction, but it still operates over a 1D token sequence. Therefore, applying SWA to image tokens requires choosing how the 2D patch grid is serialized into that sequence. The SWA-2D variant above keeps Qwen2.5-VL’s chunk-window ordering: it groups nearby patches into local blocks, then places blocks from the same chunk next to one another in the 1D sequence. This ordering is appropriate when attention is computed separately inside each chunk, but it becomes problematic when a sliding window moves along the sequence. As shown in Figure 4a, when SWA slides across a chunk boundary under this 2D layout, neighboring sequence positions can jump to distant image regions, so a single local attention window mixes spatially near and far tokens. We therefore test whether SWA should use a serialization that preserves spatial continuity. To test this, we keep the SWA operator fixed and introduce *SWA-1D*: a row-major 1D serialization that flattens image blocks left-to-right and top-to-bottom, making consecutive sequence positions correspond more closely to neighboring image regions (Figure 3b–c). Under this controlled change, SHS-Index increases from .588 (SWA-2D) to .600 (SWA-1D). **This identifies serialization order as a second source of the SHS gap: for sliding-window attention on the**

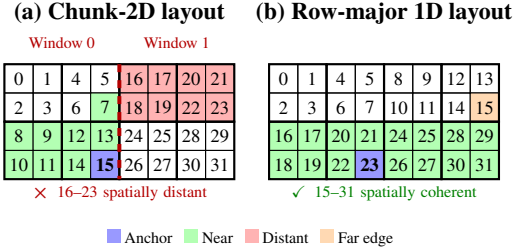


Figure 4: Why the 2D token ordering is incompatible with SWA. Numbers indicate position in the 1D sequence. (a) Chunk-2D: neighbors 16–23 map to the top of Window 1, spatially far from the anchor. (b) Row-major 1D: nearly all neighbors fall into surrounding rows, forming a coherent neighborhood.

original 2D layout, token serialization should preserve spatially coherent neighborhoods.

Factor 3: Softmax distributes attention to background. Even after increasing cross-window interaction and improving serialization, local attention still lets each query attend to only a subset of tokens. Within that subset, standard attention normalizes scores with softmax (Vaswani et al., 2017), forcing the attention weights over available keys to consume the query’s full probability mass. When a local window contains many uninformative background tokens, this constraint may assign nontrivial attention to tokens that the head would otherwise prefer to ignore. We therefore test whether local attention benefits from an explicit absorber for sur-

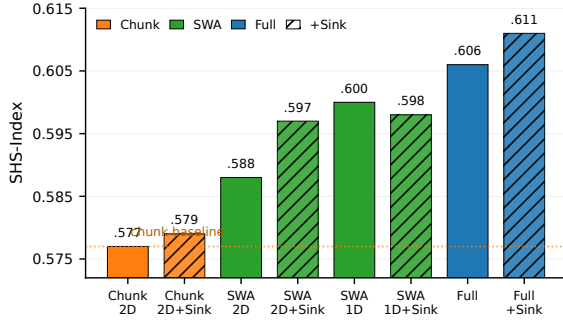


Figure 5: **SHS-Index across structural configurations.** The controlled variants differ only in the local attention structure while sharing the same backbone and training recipe. SHS-Index rises under the structure changes validated above, with Full+Sink shown as the highest-SHS diagnostic point and chunk-2D as the lowest.

plus probability mass. Following recent efficient attention designs such as GPT-OSS (OpenAI, 2025), we add a per-head learnable sink bias $s_{\text{aux}}^{(h)}$: as defined in Eq. 1, it contributes an extra denominator term but has no associated image token, so it acts as a virtual sink that can absorb attention mass instead of forcing that mass onto foreground/background tokens. The SHS evidence is mixed but informative. Adding the sink slightly reduces SHS for SWA-1D (.600 $\rightarrow$.598), which we report explicitly. However, the same intervention increases SHS in the other controlled settings: chunk-2D (.577 $\rightarrow$.579), SWA-2D (.588 $\rightarrow$.597), and full attention (.606 $\rightarrow$.611). Allocation analysis further shows the sink’s intended role: in SWA models, 94–97% of heads redirect more background than foreground attention to the sink (Appendix F). **This identifies local softmax allocation as a third source of the SHS gap: local-attention softmax can waste attention on uninformative tokens, and an explicit sink provides a useful absorber channel, though its SHS effect depends on the surrounding attention structure with SWA-1D as exception.**

Putting the controlled interventions together gives a compact view of how attention structure affects SHS-Index (Figure 5; full configurations in Table 3). Because the variants differ only in attention structure, the spread in SHS-Index directly reflects how these structural choices affect head specialization. This makes SHS-Index a natural bridge from mechanism to design: after showing that attention structure shapes the signal, we test whether the same signal is aligned with downstream quality across the controlled configurations.

SHS-Index correlates with benchmark performance within the controlled design space.

We evaluate the sufficiently trained diagnostic configurations on 22 downstream benchmarks, including 20 image tasks such as AI2D and OCRBench, and 2 video tasks including Video-MME. After correcting a malformed-output issue in MMBench-EN, SHS-Index correlates with the 22-task benchmark average at 8k (Pearson $r=0.858$, $p=0.006$; exact permutation $p=0.008$; Figure 6; full robustness analysis in Appendix G). The bootstrap 95% interval is [0.51, 0.98]. This is a cross-architecture signal at a sufficiently trained checkpoint, not a causal or within-run predictor. It is useful for comparing attention designs in this controlled setting, while task families that depend on exact geometry or counting remain only partially captured. Full SHS-Index trajectories are reported in Appendix E (Table 12), and the complete benchmark trajectories used in the architectural comparisons are reported in Appendix B (Tables 5 and 6 for 20-image-task and 22-task averages, respectively). Collective-head evidence is in Appendix H.

4 SHS-Guided Design of Ariadne Attention

The previous section identifies structural factors that shape SHS and shows that SHS-Index correlates with downstream benchmark performance in the controlled comparison. We now use these findings to design a hybrid attention pattern. Guided by the validated components—sliding-window attention, 1D serialization, and sink bias—we further increase token interaction across image dimensions by alternating row- and column-major serialization. The resulting hybrid, **Ariadne Attention**, is a validation of the SHS framework rather than a claim of a new primitive attention operator.

4.1 Ariadne Attention

We now instantiate the design suggested by the SHS analysis. Ariadne starts from the three components that improved or stabilized SHS in the controlled study: sliding-window attention (SWA) to relax chunk isolation, spatially coherent 1D serialization to make local windows meaningful on images, and a per-head sink bias to absorb surplus softmax mass. SWA replaces non-overlapping chunk windows with overlapping token-wise neighborhoods, so adjacent windows can exchange information without returning to full attention. The

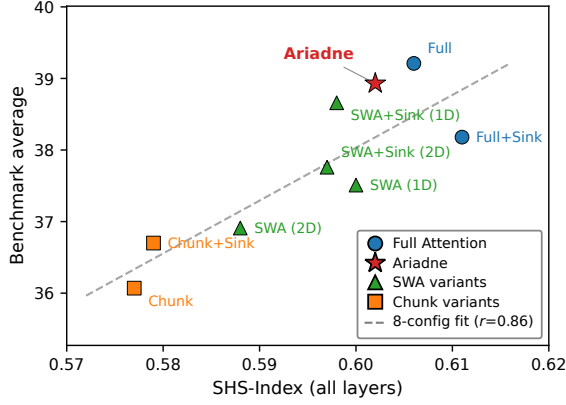


Figure 6: **SHS-Index and benchmark quality.** Across the eight diagnostic configurations, SHS-Index correlates with the corrected 22-task average ($r=0.858$, $p=0.006$; dashed line = 8-config linear fit). Ariadne is shown as a later design point and is not used to define the primary fit.

sink bias uses FlashAttention-3’s native `s_aux` term (Shah et al., 2024) as a zero-token absorber, serving the same role as attention sinks/register tokens (Xiao et al., 2024; Darcet et al., 2024) without adding extra visual tokens.

The remaining design question is how to serialize 2D image tokens for SWA. A single row-major order preserves horizontal continuity but propagates information less directly across columns. Ariadne therefore alternates row-major and column-major serialization across depth, so local windows connect both image dimensions over successive layers. Concretely, each 8-layer block contains 4 row-major SWA + sink layers, 3 column-major SWA + sink layers, and 1 full-attention anchor layer; repeating this block four times forms the 32-layer ViT (Figure 7). The 4:3 ratio is a practical refinement rather than a headline contribution: an 8-layer block already propagates information along both image axes, so nearby ratios should have similar receptive-field coverage. We use block-wise RRRR-CCC ordering because per-layer RCRC alternation would require a memory-bound token re-permutation at every layer, whereas RRRR-CCC re-permutes only at row-column boundaries. We set the SWA window to $w=64$ per side (128 tokens total context), matching GPT-OSS (OpenAI, 2025); an ablation over $w \in \{32, 64, 128\}$ selects the same value as best (SHS=.602, 22-task score =38.93) (Appendix A).

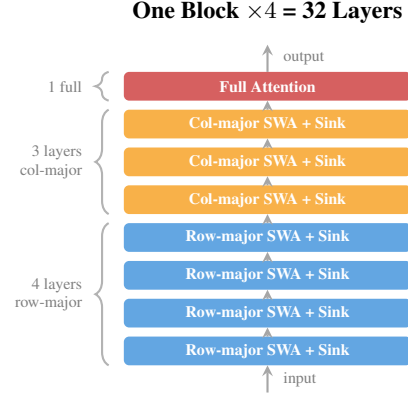


Figure 7: The **4-row-3-col** block architecture of Ariadne Attention. Each block contains 4 row-major SWA + sink layers, 3 column-major SWA + sink layers, and 1 full-attention layer; four repeats form the 32-layer ViT.

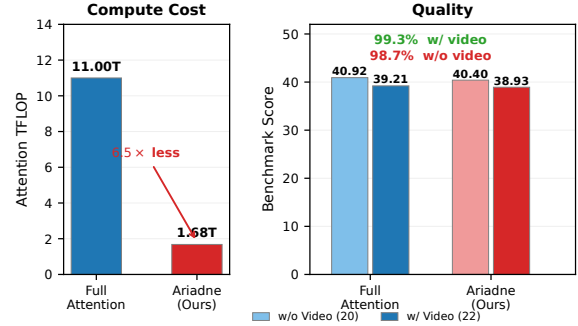


Figure 8: Attention compute vs. image-task quality at 896^2 . Ariadne (★), an SHS-informed hybrid, comes within about 0.5 points of full attention at $6.5\times$ lower attention FLOPs.

4.2 Main Results

We first ask whether the SHS-guided design closes the quality gap to full attention. Ariadne scores 40.40 on the 20-task image benchmark versus 40.92 for full attention, a 0.52-point gap, and reaches 24.3 on the two video tasks (Table 1; Figure 8). Relative to chunk-window attention, Ariadne improves the corrected 20-image average by +3.05, showing that the hybrid recovers most of full attention’s aggregate image quality while improving over the chunk-window baseline.

The largest gains occur on tasks where chunk-window isolation is most limiting: tasks that require finding evidence across distant regions or combining fine local details with broader context. On perception benchmarks, Ariadne improves over chunk-window attention by +6.1 on CV-Bench and +7.2 on VLMs-are-Blind. On high-resolution visual search, V* improves by +11.0, consistent with row/column serialization and sliding windows

	Image tasks (20)	Video tasks (2)
Full Attention	40.92	22.1
Chunk-window Attention	37.35	23.3
Ariadne Attention	40.40	24.3

Table 1: Corrected benchmark averages reported separately for image and video tasks at the 8k primary checkpoint. Ariadne is within 0.52 points of full attention on image tasks; the two video tasks are reported separately rather than folded into the headline claim.

improving evidence propagation across the image. OCR and document-style tasks show the same pattern: DocVQA improves by +9.8, InfoVQA by +7.7, and OCRBench by +8.9, reflecting the need to connect local text evidence with page-level layout context across distant regions.

The remaining task-level differences are also informative. Grounding tasks change little (RefCOCO +0.2, RefCOCO+ ± 0.0 , RefCOCOg +1.1), suggesting that these benchmarks are less sensitive to the cross-region integration targeted by Ariadne and are dominated by local phrase–region matching. Chart and counting tasks regress slightly (ChartXiv-RQ -1.6 , ChartQA -1.2 , PixMo-Count -1.9), indicating that exact geometric reasoning and instance-level counting may require additional structure-preserving mechanisms beyond the current row/column serialization. Overall, Ariadne’s strengths are most pronounced on tasks that require cross-region evidence integration, while highly geometry- or count-sensitive tasks point to a complementary direction for future hybrid designs. Full per-task results across all 22 tasks are reported in Appendix B (Table 7).

4.3 Efficiency

Finally, we test actual kernel timings, not just asymptotic attention complexity. Sink bias adds zero computational overhead: FlashAttention-3 implements `s_aux` as a single scalar addition to the softmax denominator (Shah et al., 2024). At 896^2 , Ariadne’s end-to-end ViT forward time is 106.8 ms vs. 123.5 ms for full attention (-13.5%); at 1792^2 , the saving grows to -39.4% as the quadratic cost becomes dominant. At 896^2 , SWA is also faster than chunk-window attention (6.7 ms vs. 17.5 ms for the attention kernel) because FlashAttention-3’s contiguous SWA kernel is better optimized than the varlen interface (Figure 9). Thus Ariadne improves the measured quality–compute frontier; Appendix I reports timing across seven resolutions and distinguishes attention FLOPs from end-to-end block

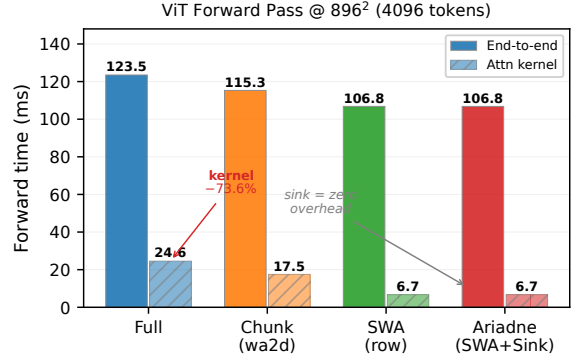


Figure 9: ViT forward-pass time at 896^2 (4,096 tokens). Solid bars: end-to-end block time; hatched bars: attention kernel only. In the updated scaling run, Ariadne is 106.8 ms end-to-end versus 123.5 ms for Full, and its attention kernel is 6.7 ms versus 24.6 ms.

time.

5 Related Work

Attention head behavior. Prior work identifies specialized attention heads for syntactic and positional roles in NLP (Voita et al., 2019; Michel et al., 2019). In vision, self-supervised ViTs develop object-segmenting CLS-attention maps (Caron et al., 2021), while CLIP and generative multimodal transformers show semantically interpretable head roles (Gandelsman et al., 2023; Basile et al., 2025). We extend this line to supervised multimodal ViTs with SHS-Index, a continuous, direction-agnostic foreground/background measure. Our result is a cross-architecture correlation at a fixed, sufficiently trained checkpoint, not a claim that specialization monotonically predicts every task.

Hybrid attention in Vision Transformers. Efficient ViTs span shifted windows (Liu et al., 2021), axial/stripe designs (Ho et al., 2019; Wang et al., 2020; Huang et al., 2019; Dong et al., 2021), and local/hybrid backbones such as Twins, Focal, NAT, and MaxViT (Chu et al., 2021; Yang et al., 2021; Hassani et al., 2022; Tu et al., 2022). Vision state-space models further show that 2D-to-1D scan order matters (Liu et al., 2024b; Zhu et al., 2024). InternVL 2.5 and Qwen3-VL use full attention, whereas Qwen2.5-VL uses chunk windows (Chen et al., 2024; Bai et al., 2025a,b). We study this trade-off inside a controlled multimodal-LLM pipeline. Ariadne is functionally related to axial/stripe attention, but uses overlapping windows and a block-wise row/column schedule for fused-

kernel efficiency; the central contribution is SHS, not a new primitive. Its sink bias also relates to ViT registers and LLM attention sinks (Darcet et al., 2024; Xiao et al., 2024).

6 Conclusion

This paper studies why hybrid ViT attention lags behind full attention in multimodal LLMs. We discover Semantic Head Specialization (SHS): full-attention heads separate into object- and background-specialist roles, while chunk-window heads show weaker separation. SHS-Index quantifies this behavior, separates full and chunk families across 16 open-source visual encoders and VLMs, and exposes three structural factors: window interaction, token serialization, and local softmax allocation. At 8k, it correlates with the corrected 22-task average ($r = .858$), with an intermediate rather than monotonic optimum. Guided by these factors, Ariadne reaches 40.40 versus 40.92 for full attention on 20 image tasks, at $6.5\times$ lower attention FLOPs and 13.5% lower end-to-end ViT time at 896^2 . SHS-Index is therefore a compact diagnostic for comparing and designing hybrid ViT attention within this scope.

Limitations

Scale of the controlled study. All nine architectures share the same training configuration (random-init ViT, Qwen2-0.5B, 10k steps), use one random seed, and are evaluated at a single primary checkpoint. The corrected MMBench-EN evaluation is available for the 8k primary checkpoint; the 10k sensitivity rows retain the original evaluation and are labeled accordingly. The controlled design isolates attention operators, but the quantitative correlation has not been tested with a larger language backbone, multiple seeds, or from-scratch comparisons to every axial/stripe baseline. The open-source analysis now spans roughly five independent full-attention ViT lineages and supports the structural separation at scale, but it does not establish benchmark correlation across those heterogeneous models.

Acknowledgments

This work was supported by the National Key Research and Development Program of China under Grant No. 2024YFB2906603, and in part by the National Natural Science Foundation of China (NSFC) (No. 62372009).

References

- Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianhao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. 2025a. [Qwen3-VL technical report](#). *ArXiv preprint*, abs/2511.21631.
- Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, et al. 2025b. [Qwen2.5-VL technical report](#). *ArXiv preprint*, abs/2502.13923.
- Federico Barbero, Álvaro Arroyo, Xiangming Gu, Christos Perivolaropoulos, Michael Bronstein, Petar Veličković, and Razvan Pascanu. 2025. [Why do LLMs attend to the first token?](#) *ArXiv preprint*, abs/2504.02732.
- Lorenzo Basile, Valentino Maiorca, Diego Doimo, Francesco Locatello, and Alberto Cazzaniga. 2025. [Head pursuit: Probing attention specialization in multimodal transformers](#). *ArXiv preprint*, abs/2510.21518.
- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. 2021. [Emerging properties in self-supervised vision transformers](#). In *2021 IEEE/CVF International Conference on Computer Vision, ICCV 2021, Montreal, QC, Canada, October 10-17, 2021*, pages 9630–9640. IEEE.
- Zhe Chen, Weiyun Wang, Yue Cao, Yangzhou Liu, Zhangwei Gao, Erfei Cui, Jinguo Zhu, Shenglong Ye, Hao Tian, et al. 2024. [Expanding performance boundaries of open-source multimodal models with model, data, and test-time scaling](#). *ArXiv preprint*, abs/2412.05271.
- Xiangxiang Chu, Zhi Tian, Yuqing Wang, Bo Zhang, Haibing Ren, Xiaolin Wei, Huaxia Xia, and Chunhua Shen. 2021. [Twins: Revisiting the design of spatial attention in vision transformers](#). *ArXiv preprint*, abs/2104.13840.
- Tri Dao. 2024. [Flashattention-2: Faster attention with better parallelism and work partitioning](#). In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. 2022. [Flashattention: Fast and memory-efficient exact attention with io-awareness](#). In *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*.
- Timothée Darcet, Maxime Oquab, Julien Mairal, and Piotr Bojanowski. 2024. [Vision transformers need registers](#). In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.

- Matt Deitke, Christopher Clark, Sangho Lee, Rohun Tripathi, Yue Yang, Jae Sung Park, Mohammadreza Salehi, Niklas Muennighoff, Kyle Lo, Luca Soldaini, et al. 2024. [Molmo and PixMo: Open weights and open data for state-of-the-art vision-language models](#). *ArXiv preprint*, abs/2409.17146.
- Xiaoyi Dong, Jianmin Bao, Dongdong Chen, Weiming Zhang, Nenghai Yu, Lu Yuan, Dong Chen, and Baining Guo. 2021. [CSWin transformer: A general vision transformer backbone with cross-shaped windows](#). *ArXiv preprint*, abs/2107.00652.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. 2021. [An image is worth 16x16 words: Transformers for image recognition at scale](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Chaoyou Fu, Yuhang Dai, Yongdong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, Peixian Chen, Yanwei Li, Shaohui Lin, Sirui Zhao, Ke Li, Tong Xu, Xiawu Zheng, Enhong Chen, Caifeng Shan, et al. 2025. [Video-MME: The first-ever comprehensive evaluation benchmark of multi-modal LLMs in video analysis](#). In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 24108–24118.
- Xingyu Fu, Yushi Hu, Bangzheng Li, Yu Feng, Haoyu Wang, Xudong Lin, Dan Roth, Noah A. Smith, Wei-Chiu Ma, and Ranjay Krishna. 2024. [BLINK: Multi-modal large language models can see but not perceive](#). In *Computer Vision – ECCV 2024*, pages 148–166. Springer.
- Yossi Gandelsman, Alexei A. Efros, and Jacob Steinhardt. 2023. [Interpreting CLIP’s image representation via text-based decomposition](#). *ArXiv preprint*, abs/2310.05916.
- Gemma Team. 2025. [Gemma 3 technical report](#). *ArXiv preprint*, abs/2503.19786.
- Xiangming Gu, Tianyu Pang, Chao Du, Qian Liu, Fengzhuo Zhang, Cunxiao Du, Ye Wang, and Min Lin. 2025. [When attention sink emerges in language models: An empirical view](#). In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- Tianyu Guo, Druv Pai, Yu Bai, Jiantao Jiao, Michael I. Jordan, and Song Mei. 2024. [Active-dormant attention heads: Mechanistically demystifying extreme-token phenomena in LLMs](#). *ArXiv preprint*, abs/2410.13835.
- Ali Hassani, Steven Walton, Jiachen Li, Shen Li, and Humphrey Shi. 2022. [Neighborhood attention transformer](#). *ArXiv preprint*, abs/2204.07143.
- Jonathan Ho, Nal Kalchbrenner, Dirk Weissenborn, and Tim Salimans. 2019. [Axial attention in multidimensional transformers](#). *ArXiv preprint*, abs/1912.12180.
- Kairui Hu, Penghao Wu, Fanyi Pu, Wang Xiao, Yuanhan Zhang, Xiang Yue, Bo Li, and Ziwei Liu. 2025. [Video-MMMU: Evaluating knowledge acquisition from multi-discipline professional videos](#). *ArXiv preprint*, abs/2501.13826.
- Zilong Huang, Xinggang Wang, Yunchao Wei, Lichao Huang, Humphrey Shi, Wenyu Liu, and Thomas S. Huang. 2019. [CCNet: Criss-cross attention for semantic segmentation](#). *ArXiv preprint*, abs/1811.11721.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023. [Mistral 7b](#). *ArXiv preprint*, abs/2310.06825.
- Dongfu Jiang, Xuan He, Huaye Zeng, Cong Wei, Max Ku, Qian Liu, and Wenhui Chen. 2024. [MANTIS: Interleaved multi-image instruction tuning](#). *Transactions on Machine Learning Research (TMLR)*.
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. 2016. [A diagram is worth a dozen images](#). In *European Conference on Computer Vision (ECCV)*.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. 2014. [Microsoft COCO: Common objects in context](#). In *European Conference on Computer Vision (ECCV)*, pages 740–755.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. 2024a. [MMBench: Is your multi-modal model an all-around player?](#) In *Computer Vision – ECCV 2024*, pages 216–233. Springer.
- Yue Liu, Yunjie Tian, Yuzhong Zhao, Hongtian Yu, Lingxi Xie, Yaowei Wang, Qixiang Ye, Jianbin Jiao, and Yunfan Liu. 2024b. [VMamba: Visual state space model](#). *ArXiv preprint*, abs/2401.10166.
- Yuliang Liu, Zhang Li, Mingxin Huang, Biao Yang, Wenwen Yu, Chunyuan Li, Xu-Cheng Yin, Cheng-Lin Liu, Lianwen Jin, and Xiang Bai. 2024c. [OCR-Bench: On the hidden mystery of OCR in large multi-modal models](#). *Science China Information Sciences*, 67.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. 2021. [Swin transformer: Hierarchical vision transformer using shifted windows](#). In *2021 IEEE/CVF International Conference on Computer Vision, ICCV 2021, Montreal, QC, Canada, October 10-17, 2021*, pages 9992–10002. IEEE.

- Ahmed Masry, Xuan Long Do, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. 2022. [ChartQA: A benchmark for question answering about charts with visual and logical reasoning](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2263–2279, Dublin, Ireland. Association for Computational Linguistics.
- Minesh Mathew, Viraj Bagal, Rubèn Pérez Tito, Dimosthenis Karatzas, Ernest Valveny, and C. V. Jawahar. 2022. [InfographicVQA](#). In *IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*.
- Minesh Mathew, Dimosthenis Karatzas, and C. V. Jawahar. 2021. [DocVQA: A dataset for VQA on document images](#). In *2021 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 2199–2208.
- Paul Michel, Omer Levy, and Graham Neubig. 2019. [Are sixteen heads really better than one?](#) In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 14014–14024.
- OpenAI. 2025. [gpt-oss-120b & gpt-oss-20b model card](#). *ArXiv preprint*, abs/2508.10925.
- Maxime Oquab, Timothee Darcet, Theo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, Mahmoud Assran, Nicolas Ballas, Wojciech Galuba, Russell Howes, Po-Yao Huang, Shang-Wen Li, Ishan Misra, Michael Rabbat, Vasu Sharma, et al. 2023. [DINOv2: Learning robust visual features without supervision](#). *ArXiv preprint*, abs/2304.07193.
- Pooyan Rahmanzadehgervi, Logan Bolton, Mohammad Reza Taesiri, and Anh Totti Nguyen. 2024. [Vision language models are blind](#). In *Computer Vision – ACCV 2024*, pages 293–309. Springer.
- Jay Shah, Ganesh Bikshandi, Ying Zhang, Vijay Thakkar, Pradeep Ramani, and Tri Dao. 2024. [Flashattention-3: Fast and accurate attention with asynchrony and low-precision](#). In *Advances in Neural Information Processing Systems 38: Annual Conference on Neural Information Processing Systems 2024, NeurIPS 2024, Vancouver, BC, Canada, December 10 - 15, 2024*.
- Oriane Simeoni, Huy V. Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seungeun Yi, Michael Ramamonjisoa, Francisco Massa, Daniel Haziza, Luca Wehrstedt, Jianyuan Wang, Timothee Darcet, Theo Moutakanni, Leonel Sentana, Claire Roberts, Andrea Vedaldi, et al. 2025. [DINOv3](#). *ArXiv preprint*, abs/2508.10104.
- Shengbang Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Manoj Middepogu, Sai Charitha Akula, Jihan Yang, Shusheng Yang, Adithya Iyer, Xichen Pan, Austin Wang, Rob Fergus, Yann LeCun, and Saining Xie. 2024. [Cambrian-1: A fully open, vision-centric exploration of multimodal LLMs](#). In *Advances in Neural Information Processing Systems*, volume 37, pages 87310–87356. Curran Associates, Inc.
- Michael Tschannen, Alexey Gritsenko, Xiao Wang, Muhammad Ferjad Naeem, Ibrahim Alabdulmohsin, Nikhil Parthasarathy, Talfan Evans, Lucas Beyer, Ye Xia, Basil Mustafa, Olivier Henaff, Jeremiah Harmsen, Andreas Steiner, and Xiaohua Zhai. 2025. [SigLIP 2: Multilingual vision-language encoders with improved semantic understanding, localization, and dense features](#). *ArXiv preprint*, abs/2502.14786.
- Zhengzhong Tu, Hossein Talebi, Han Zhang, Feng Yang, Peyman Milanfar, Alan Bovik, and Yinxiao Li. 2022. [MaxViT: Multi-axis vision transformer](#). *ArXiv preprint*, abs/2204.01697.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Elena Voita, David Talbot, Fedor Moiseev, Rico Senrich, and Ivan Titov. 2019. [Analyzing multi-head self-attention: Specialized heads do the heavy lifting, the rest can be pruned](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5797–5808, Florence, Italy. Association for Computational Linguistics.
- Huiyu Wang, Yukun Zhu, Bradley Green, Hartwig Adam, Alan Yuille, and Liang-Chieh Chen. 2020. [Axial-deeplab: Stand-alone axial-attention for panoptic segmentation](#). *ArXiv preprint*, abs/2003.07853.
- Zirui Wang, Mengzhou Xia, Luxi He, Howard Chen, Yitao Liu, Richard Zhu, Kaiqu Liang, Xindi Wu, Haotian Liu, Sathika Malladi, Alexis Chevalier, Sanjeev Arora, and Danqi Chen. 2024. [Charxiv: Charting gaps in realistic chart understanding in multimodal llms](#). In *Advances in Neural Information Processing Systems 38: Annual Conference on Neural Information Processing Systems 2024, NeurIPS 2024, Vancouver, BC, Canada, December 10 - 15, 2024*.
- Penghao Wu and Saining Xie. 2024. [V*: Guided visual search as a core mechanism in multimodal llms](#). In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2024, Seattle, WA, USA, June 16-22, 2024*, pages 13084–13094. IEEE.
- Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. 2024. [Efficient streaming language models with attention sinks](#). In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Xiaomi LLM-Core Team. 2026. [Mimo-v2-flash technical report](#). *ArXiv preprint*, abs/2601.02780.

An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. 2024. [Qwen2 technical report](#). *ArXiv preprint*, abs/2407.10671.

Jianwei Yang, Chunyuan Li, Pengchuan Zhang, Xiyang Dai, Bin Xiao, Lu Yuan, and Jianfeng Gao. 2021. [Focal self-attention for local-global interactions in vision transformers](#). *ArXiv preprint*, abs/2107.00641.

Licheng Yu, Patrick Poirson, Shan Yang, Alexander C. Berg, and Tamara L. Berg. 2016. [Modeling context in referring expressions](#). In *European Conference on Computer Vision (ECCV)*.

Xiang Yue, Yuansheng Ni, Tianyu Zheng, Kai Zhang, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, et al. 2024. [MMMU: A massive multi-discipline multimodal understanding and reasoning benchmark for expert AGI](#). In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2024, Seattle, WA, USA, June 16-22, 2024*, pages 9556–9567. IEEE.

Yi-Fan Zhang, Huanyu Zhang, Haochen Tian, Chaoyou Fu, Shuangqing Zhang, Junfei Wu, Feng Li, Kun Wang, Qingsong Wen, Zhang Zhang, Liang Wang, Rong Jin, and Tieniu Tan. 2025. [MME-RealWorld: Could your multimodal LLM challenge high-resolution real-world scenarios that are difficult for humans?](#) In *The Thirteenth International Conference on Learning Representations (ICLR)*.

Lianghui Zhu, Bencheng Liao, Qian Zhang, Xinlong Wang, Wenyu Liu, and Xinggang Wang. 2024. [Vision mamba: Efficient visual representation learning with bidirectional state space model](#). *ArXiv preprint*, abs/2401.09417.

Orr Zohar, Xiaohan Wang, Yann Dubois, Nikhil Mehta, Tong Xiao, Philippe Hansen-Estruch, Licheng Yu, Xiaofang Wang, Felix Juefei-Xu, Ning Zhang, Serena Yeung-Levy, and Xide Xia. 2024. [Apollo: An exploration of video understanding in large multimodal models](#). *ArXiv preprint*, abs/2412.10360.

A Model Architecture and Configurations

A.1 ViT Architecture

All nine models use a 32-layer ViT encoder following the Qwen2.5-VL (Bai et al., 2025b) design. Of the 32 layers, 4 (at 0-indexed positions 7, 15, 23, 31) use full self-attention; the remaining 28 use the local attention operator under study. The ViT extracts non-overlapping 14×14 patches and groups every 2×2 spatially adjacent patches into an atomic block of 4 sub-tokens, the basic unit of both chunk-window grouping and 1D serialization. Architectural hyperparameters are listed in Table 2.

Parameter	Value
Layers	32
Full-attention layers	positions 7, 15, 23, 31
Local-attention layers	28
Hidden dimension	1,280
MLP dimension	3,456
Attention heads	16
Head dimension	80
Patch size	14×14
Block size	2×2 patches (4 sub-tokens)
Position encoding	2D RoPE
Initialization	Random

Table 2: ViT encoder hyperparameters, shared across all 9 configurations.

A.2 Nine Model Configurations

Table 3 lists all nine attention configurations explored in this work. They span three design axes: token layout (2D vs. 1D), attention type (chunk vs. sliding window vs. full), and sink bias (present or absent).

A.3 Attention Design Space

Chunk window attention. Blocks are grouped into 4×4 -block windows ($W=64$ tokens per window), similar to the shifted-window mechanism of Swin Transformer (Liu et al., 2021). Self-attention is computed independently within each window. Tokens in different windows can only exchange information through the 4 full-attention layers.

Sliding window attention (SWA). Each token attends to a window of (w_L, w_R) tokens to its left and right in the 1D sequence, as popularized by Mistral (Jiang et al., 2023). We use $w_L=w_R=64$ (128 tokens total context). Unlike chunk windows, SWA windows overlap, enabling cross-window information flow. Implemented via FlashAttention-3 (Shah et al., 2024) varlen interface.

Sink bias. A single learnable scalar $s_{\text{aux}}^{(h)}$ per head is added to the softmax denominator, acting as a virtual sink token that absorbs surplus attention mass (Xiao et al., 2024; Darcet et al., 2024). Natively supported by FlashAttention-3’s `s_aux` parameter at zero additional cost.

Token serialization. For 1D-layout models, blocks are serialized into a flat sequence. Row-major: left-to-right, top-to-bottom. Column-major: top-to-bottom, left-to-right. The Ariadne configuration alternates 4 row-major and 3 column-major layers within each block of 7 local layers (4-row-3-col pattern). See Figure 3 for an illustration.

Short Name	Layout	Attention	Sink	Window Size	SHS-Index	Performance (20-image)
wa2d	2D	Chunk	No	64 tok	.577	37.35
wa2d_sink	2D	Chunk	Yes	64 tok	.579	37.94
swa2d	2D	SWA	No	128 tok	.588	38.09
swa2d_sink	2D	SWA	Yes	128 tok	.597	39.13
swa_row	1D row	SWA	No	128 tok	.600	38.80
swa_sink_row	1D row	SWA	Yes	128 tok	.598	40.14
swa_sink_4r3c	1D row+col	SWA	Yes	128 tok	.602	40.40
full	N/A	Full	No	Global	.606	40.92
full_sink	N/A	Full	Yes	Global	.611	39.95

Table 3: Complete model configurations. All models share the same ViT architecture (32 layers, 16 heads, $d_h=80$) and training setup (Table 8); only the local attention operator differs. Bench = macro-average over 20 image tasks.

A.4 Window Size Ablation

Table 4 compares three window sizes on the Ariadne configuration.

Window	Context	SHS	20-image	22-task
$w=32$	64 tok	.597	38.11	36.95
$w=64$	128 tok	.602	40.40	38.93
$w=128$	256 tok	.595	38.65	37.27

Table 4: Window size ablation (Ariadne, swa_sink_4r3c) at the primary checkpoint. $w=64$ is optimal under both 20-image and 22-task averages, matching the window size used by GPT-OSS (OpenAI, 2025) and MiMo-V2-Flash (Xiaomi LLM-Core Team, 2026).

B Complete Benchmark Results

This appendix reports full benchmark numbers across all iterations (Tables 5 and 6, for the 20-image-task and 22-task averages, respectively) and per-task breakdowns for the three key models at the primary checkpoint (Table 7).

B.1 Benchmark Across Iterations

Table 5 reports the macro-average benchmark (20 image tasks, excluding video) at each checkpoint; Table 6 reports the 22-task counterpart used in the SHS-quality correlation (§3). The ranking remains stable across late checkpoints under both metrics, motivating our choice of primary checkpoint; see Figure 10 for a visualization.

B.2 Key Models Per-Task Results

Table 7 breaks down the benchmark into all 22 individual tasks for the three key models (Full, Ariadne, Chunk). Ariadne recovers most of the gap on vision-centric tasks while grounding tasks show near-parity.

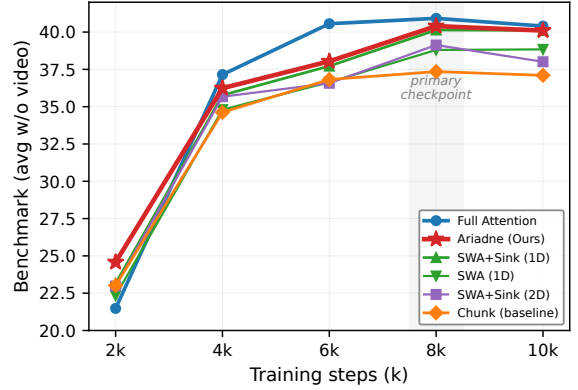


Figure 10: Benchmark trajectory across training for six key models. Architectural rankings are stable across late checkpoints, while SWA+Sink (2D) begins to overfit in the late stage.

C Experimental Setup Details

C.1 Training Configuration

Table 8 summarizes the training setup shared across all nine models; only the attention operator differs.

Training data. We train on **Cambrian-10M** (Tong et al., 2024), a publicly available multimodal instruction-tuning dataset of approximately 10M examples spanning OCR, general vision-language understanding, math, code, science, and multi-turn conversation. We use the released category-balanced mixture without modification.

Design rationale. We deliberately choose a small LLM backend. As noted by Tong et al. (2024), a strong language model can act as a shortcut that compensates for deficiencies in visual representations, masking real differences between vision encoder designs. A weaker LLM forces the ViT to develop genuinely better representations, making architectural differences more visible. This rationale is further supported by the scaling consistency

Iter	full_s [†]	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	22.25	21.48	24.58	23.15	22.34	22.98	22.67	23.22	23.02
4k	34.44	37.15	36.24	35.77	34.80	35.67	33.30	35.48	34.62
6k	37.70	40.56	38.04	37.72	36.64	36.57	37.64	38.19	36.82
8k	39.95	40.92	40.40	40.14	38.80	39.13	38.09	37.94	37.35
10k	39.94	40.40	40.10	40.11	38.84	38.01	35.21	38.27	37.10

Table 5: Benchmark (avg w/o video, 20 tasks) across training iterations. The 8k primary checkpoint uses corrected MMBench-EN scores; the 10k row retains the original evaluation because the re-evaluation was run at 8k only. [†]full_sink 2k–6k based on general tasks only (10 tasks).

Iter	full_s [†]	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	22.25	21.42	24.41	23.04	22.35	22.85	22.58	23.13	22.92
4k	33.25	35.77	35.16	34.67	33.73	34.67	32.41	34.49	33.61
6k	36.26	38.93	36.85	36.53	35.55	35.45	36.54	37.01	35.62
8k	38.18	39.21	38.93	38.66	37.51	37.76	36.91	36.70	36.07
10k	38.20	38.73	38.66	38.63	37.61	36.84	34.27	37.02	35.91

Table 6: Benchmark (avg w/ video, 22 tasks) across training iterations. Includes Video-MME and Video-MMMU. The 8k primary checkpoint uses corrected MMBench-EN scores; the 10k row retains the original evaluation. [†]full_sink 2k–6k based on general tasks only (10 tasks).

findings of Zohar et al. (2024).

C.2 Benchmark Suite

We evaluate on 22 tasks spanning 5 capability dimensions (Table 9). The primary metric is the macro-average over the 20 image tasks (“Avg w/o video”); we additionally report the 22-task average including video (“Avg w/ video”).

C.3 Analysis Data

Per-head attention analysis uses images sampled from COCO val2017, paired with a foreground/background segmentation that distinguishes salient objects from the background. Each ViT token is labeled foreground or background by the dominant region within its image patch; patches crossing the boundary (edge patches) are excluded from analysis.

D Additional Attention Heatmaps

This appendix provides additional received-attention heatmaps beyond the dog image in Figure 2. Figure 11 shows per-head box plots for the dog image, and Figure 12 presents a compact 2×2 grid of four additional images (bird, two_cats, coco_537964, coco_043816), each comparing Full Attention, Ariadne, and Chunk Window at layers L11 and L17.

E SHS Supplementary Data

E.1 SHS-Index on Open-Source Visual Encoders and VLMs

Table 10 reports SHS-Index for 16 open-source visual encoders and VLMs spanning roughly five independent full-attention lineages, three training paradigms, diverse attention designs, and model sizes from 300M standalone ViTs to 72B-parameter VLMs. The additional standalone encoders are SigLIP2, DINOv2, and DINOv3 (Tschanen et al., 2025; Oquab et al., 2023; Simeoni et al., 2025). SHS is computed on the same analysis images and foreground/background masks used for our controlled experiments. The heterogeneous models are used only to test the structural full-vs.-chunk separation, not for the benchmark correlation.

E.2 Cross-domain robustness

To test whether the SHS signal depends on the COCO analysis set, we recompute it on PASCAL VOC, OpenImages, and a chart/document-style image set. For charts, foreground consists of lines, bars, text, and axes identified by a simple grayscale threshold; light regions are treated as background. The full/chunk ordering is preserved in every domain, and the benchmark correlation remains significant. The Pearson values below are computed over all eight diagnostic configurations; representative rows are shown for readability.

Cat.	Task	Full	Chunk	Ariadne	Δ
General	AI2D	37.2	35.3	37.5	+2.3
	BLINK	37.0	39.4	38.3	−1.1
	CV-Bench	47.7	43.4	49.5	+6.1
	MMMU	29.1	28.7	30.2	+1.5
	MMBench-EN	36.34	36.94	38.57	+1.63
	MMBench-CN	30.8	27.2	29.9	+2.7
	Mantis	16.1	15.2	22.1	+6.9
	MME-RW-CN	26.8	27.2	27.5	+0.3
	V*	48.7	28.8	39.8	+11.0
	VLMs-are-Blind	31.5	28.2	35.4	+7.2
OCR	ChartXiv-RQ	19.1	21.0	19.4	−1.6
	ChartXiv-DQ	52.1	50.2	49.7	−0.5
	DocVQA	53.5	39.8	49.5	+9.8
	InfoVQA	32.4	23.6	31.3	+7.7
	ChartQA	19.4	18.8	17.7	−1.2
	OCRBench	68.0	54.7	63.6	+8.9
Ground.	RefCOCO	76.2	75.0	75.2	+0.2
	RefCOCO+	63.4	62.8	62.8	±0.0
	RefCOCog	67.7	68.5	69.5	+1.1
Count	PixMo-Count	25.1	22.3	20.4	−1.9
Video	Video-MME	27.5	30.9	32.3	+1.4
	Video-MMMU	16.7	15.8	16.2	+0.4
Avg		39.21	36.07	38.93	+2.86

Table 7: Per-task benchmark results for the three key models at the 8k primary checkpoint. MMBench-EN was re-evaluated with corrected output parsing. Δ = Ariadne − Chunk. Bold = best between Chunk and Ariadne. Ariadne recovers most of the full-hybrid gap on vision-centric tasks (V* +11.0, DocVQA +9.8, OCRBench +8.9); grounding tasks, which rely on local spatial reasoning within the sliding window, show near-parity.

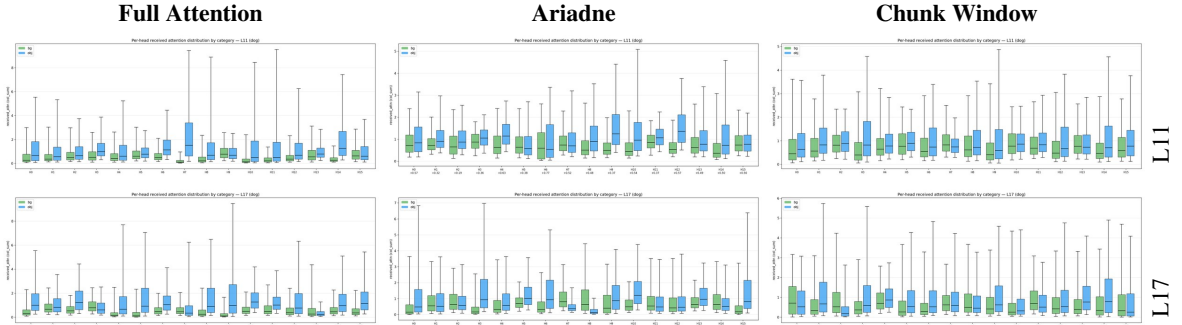


Figure 11: **Per-head received-attention box plots** corresponding to Figure 2. Each subplot shows the distribution for all 16 heads, split by foreground (blue) and background (green). Full Attention and Ariadne show clear obj/bg separation; Chunk Window distributions are uniform, indicating suppressed specialization.

E.3 Iteration-Level SHS Metrics

This subsection provides iteration-level SHS metrics for all nine controlled architectures. Figures 13 and 14 visualize the trends from Tables 12, 13, and 14. The absolute SHS-Index changes modestly over training, while the high/low group separation is already stable by 4k and changes by at most .003 from 8k to 10k for every model. Obj-dominant percentage shows a similar downward trend, reflecting that heads increasingly split between object and background roles.

E.4 SHS-Index Across Iterations (All Layers)

Table 12 reports the all-layer SHS-Index at each checkpoint. The high/low group separation identified in Appendix G.2 is visible from 4k onward; see Figure 13 for a visualization.

E.5 SHS-Index Across Iterations (Core L9–21)

Table 13 restricts the computation to core layers L9–21, where head specialization is strongest. The gap between high and low groups widens compared

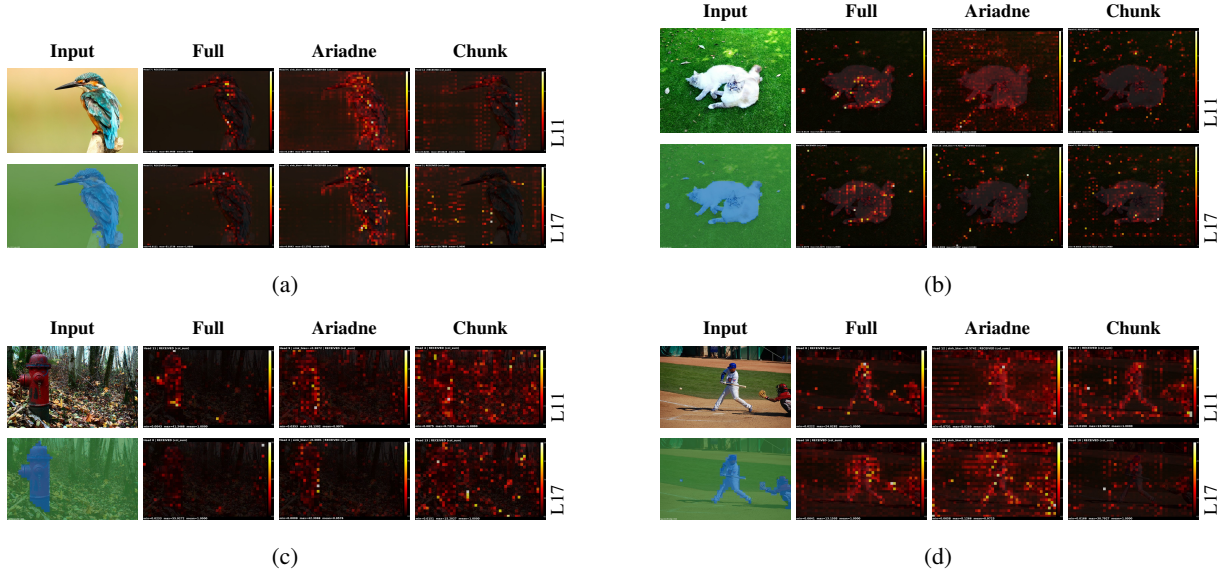


Figure 12: **Additional received-attention heatmaps** across four images, laid out as Figure 2. Each block: first column = input image (top) and foreground mask (bottom); columns 2–4 = representative head heatmaps at L11 and L17 (layer labels on the right). Full Attention and Ariadne consistently show clear object/background differentiation; Chunk Window shows suppressed specialization across all images.

Parameter	Value
ViT encoder	Random-init, 32 layers
LLM backbone	Qwen2-0.5B (Yang et al., 2024)
Projector	Random-init
ViT / LLM lr	$5 \times 10^{-4} / 1 \times 10^{-5}$
LR schedule	Constant w/ 1k warmup
Global batch size	2,048
Max seq length	32,768 tokens
Seq packing	Yes (Chen et al., 2024)
Steps	10,000
Precision	bfloat16
Compute budget	~100k GPU-hours (NVIDIA Hopper)
Framework	Megatron-based (in-house)
Inference	SGLang 0.4 (modified)

Table 8: Training configuration shared across all nine models.

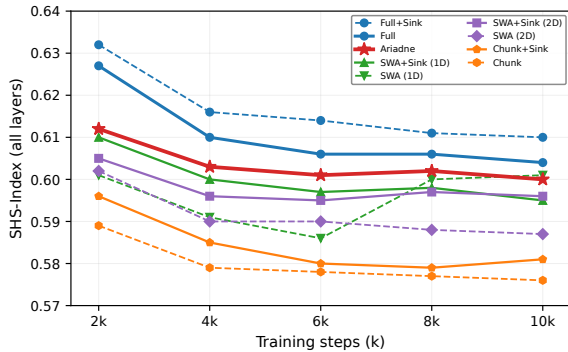


Figure 13: SHS-Index across iterations. High/low separation stabilizes from 4k onward.

Cat.	Tasks	N
General	AI2D, BLINK, CV-Bench, MMMU, MMBench-EN/CN, Mantis, MME-RealWorld-CN, V*, VLMs-are-Blind	10
OCR	ChartXiv-RQ/DQ, DocVQA, InfoVQA, ChartQA, OCRBench	6
Ground.	RefCOCO, RefCOCO+, RefCOCOg	3
Count	PixMo-Count	1
Video	Video-MME, Video-MMMU	2

Table 9: Benchmark suite: 20 image + 2 video tasks. Video tasks excluded from primary “Avg w/o video”; included in “Avg w/ video.” Citations: General (Kem-bhavi et al., 2016; Fu et al., 2024; Tong et al., 2024; Yue et al., 2024; Liu et al., 2024a; Jiang et al., 2024; Zhang et al., 2025; Wu and Xie, 2024; Rahmzadehgervi et al., 2024); OCR (Wang et al., 2024; Mathew et al., 2021, 2022; Masry et al., 2022; Liu et al., 2024c); Grounding (Yu et al., 2016); Count (Deitke et al., 2024); Video (Fu et al., 2025; Hu et al., 2025).

to the all-layer average.

E.6 Obj-Dominant Percentage Across Iterations

Table 14 tracks the fraction of heads classified as object-dominant (majority vote across analysis images, core L9–21). Full attention models maintain the highest obj% throughout; SWA 1D without sink develops the lowest, consistent with the sink-as-background-suppressor analysis in Appendix F.

#	Model	Family	Attention	ViT Spec	SHS-all	SHS-core
1	InternVL3.5-38B	InternVL	Full	6B (45L, 3200d, 25h)	.648	.627
2	InternVL3.5-8B	InternVL	Full	300M (24L, 1024d, 16h)	.641	.651
3	Qwen3-VL-32B	Qwen3-VL	Full	SigLIP2-SO-400M	.633	.644
4	InternVL3-8B	InternVL	Full	300M (24L, 1024d, 16h)	.630	.649
5	Qwen3-VL-8B	Qwen3-VL	Full	SigLIP2-SO-400M	.626	.639
6	Qwen3-VL-4B	Qwen3-VL	Full	SigLIP2-Large (300M)	.624	.639
7	Qwen3-VL-2B	Qwen3-VL	Full	SigLIP2-Large (300M)	.619	.636
8	InternViT-300M	InternVL	Full	300M (24L, 1024d, 16h)	.610	.625
9	SigLIP2-so400m	SigLIP2	Full	400M	.638	.646
10	DINOv2-L	DINOv2	Full	ViT-L	.626	.603
11	DINOv3-L	DINOv3	Full	ViT-L	.642	.627
12	MiMo-VL-7B	MiMo	Chunk+Full	675M (32L, 1280d, 16h)	.586	.587
13	Qwen2.5-VL-3B	Qwen2.5-VL	Chunk+Full	675M (32L, 1280d, 16h)	.586	.586
14	Qwen2.5-VL-7B	Qwen2.5-VL	Chunk+Full	675M (32L, 1280d, 16h)	.585	.584
15	Qwen2.5-VL-72B	Qwen2.5-VL	Chunk+Full	675M (32L, 1280d, 16h)	.585	.585
16	Qwen2.5-VL-32B	Qwen2.5-VL	Chunk+Full	675M (32L, 1280d, 16h)	.584	.584

Table 10: SHS-Index on 16 open-source visual encoders and VLMs. The full-attention group (mean SHS ≈ 0.631) and chunk-window group (mean SHS = 0.585) show zero overlap: the lowest full-attention score is .610, above the highest chunk score .586. Qwen3-VL uses SigLIP2-SO-400M for its 8B/32B variants and SigLIP2-Large (300M) for its 2B/4B variants; Qwen2.5-VL uses an identical ViT across 3B–72B LLM sizes (SHS varies by < 0.002). DINOv2 and DINOv3 were not trained with a language model, providing an additional check that the separation is not specific to VLM training.

Model	COCO	VOC	OpenImages	Chart
Full+Sink	.611	.615	.618	.634
Full	.606	.609	.614	.627
SWA+Sink (1D)	.598	.596	.608	.625
SWA+Sink (2D)	.597	.600	.598	.626
Chunk	.577	.583	.575	.613
Pearson r (vs. 22-task)	.87	.80	.88	.75
p	.005	.016	.004	.031

Table 11: Cross-domain SHS-Index robustness. Correlations use all eight diagnostic configurations at 8k; the five model rows are representative. The model ranking remains highly stable across domains (cross-domain rank Spearman $\rho=0.97$).

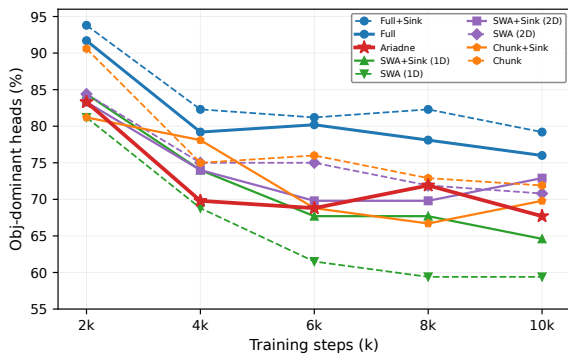


Figure 14: Obj-dominant heads across iterations. SWA-1D without sink has the lowest percentage, while full attention remains highest.

See Figure 14 for a visualization.

E.7 Mean rcv_auroc_obj Across Iterations

Table 15 reports the mean per-head AUROC for the object class (before the direction-agnostic max operation used in SHS-Index). This raw metric confirms that full attention models develop the strongest foreground discrimination, while chunk-window models remain the weakest at every checkpoint.

F Mechanism Analysis Details

F.1 SHS vs. Entropy vs. Distance

Definitions. *Attention entropy*: $H = -\sum_j a_j \log a_j$, measuring how peaked or diffuse a head’s attention distribution is. *Attention distance*: the attention-weighted mean spatial distance between each query and its attended keys, measuring how far each token “looks.” Table 16 reports all three metrics alongside benchmark for

Iter	full_s	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	.632	.627	.612	.610	.601	.605	.602	.596	.589
4k	.616	.610	.603	.600	.591	.596	.590	.585	.579
6k	.614	.606	.601	.597	.586	.595	.590	.580	.578
8k	.611	.606	.602	.598	.600	.597	.588	.579	.577
10k	.610	.604	.600	.595	.601	.596	.587	.581	.576

Table 12: SHS-Index (mean over all 32 layers) across training iterations for all 9 controlled architectures. This is the primary aggregation used throughout the paper (Table 16, Pearson correlation in §3, and Figure 6). Column headers abbreviated: full_s = full_sink, sink_r = swa_sink_row, swa_r = swa_row, s2d_s = swa2d_sink, w_s = wa2d_sink.

Iter	full_s	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	.651	.644	.612	.615	.604	.605	.606	.597	.586
4k	.636	.629	.602	.603	.593	.598	.596	.583	.577
6k	.635	.624	.604	.600	.588	.597	.599	.578	.576
8k	.632	.623	.604	.599	.603	.601	.592	.580	.576
10k	.630	.622	.605	.594	.601	.598	.593	.580	.574

Table 13: SHS-Index (core layers L9–21) across training iterations.

all 9 models at the primary checkpoint.

Cross-model Spearman correlation with benchmark (N=8, excl. full_sink). Table 17 compares the three metrics’ correlation with benchmark performance.

Pairwise deltas. Table 18 isolates each architectural change to show which metrics track benchmark improvements.

F.2 Sink 2×2 Analysis

We analyze how sink bias (related to the attention sink phenomenon (Xiao et al., 2024) and register tokens (Darcet et al., 2024)) differentially absorbs attention from background vs. object tokens across 5 sink-equipped models (Table 19). The sink steal ratio is defined as: $\text{steal}(\text{cat}) = \text{absorbed_sum}(\text{cat}) / (\text{rcv_sum}(\text{cat}) + \text{absorbed_sum}(\text{cat}))$, computed over core layers L9–L21 at the primary checkpoint.

F.3 2D Incompatibility Hypothesis

Under 2D block layout, the sliding window’s left and right neighbors in 1D sequence map to spatially disjoint regions of the image at every window boundary. This forces each head to attend to a mixture of spatially near and spatially distant tokens within the same window, diluting the spatial coherence that enables meaningful object/background discrimination.

Evidence (Table 18): the 2D→1D transition yields the largest single-step benchmark improvement (+1.94 without sink, +1.22 with sink), yet Entropy and Distance are essentially unchanged

($\Delta\text{Entropy} = +0.10$, $\Delta\text{Distance} = -0.09$). Only SHS increases (+0.013), suggesting that the improvement comes from spatial coherence enabling more meaningful head specialization, not from changes in attention sharpness or receptive field size.

G SHS-Benchmark Correlation Details

G.1 Statistical Methods

Our primary analysis is a Pearson correlation between SHS-Index and the 22-task benchmark average across the eight diagnostic configurations (§3). We report the correlation both *before* introducing Ariadne (the eight diagnostic configurations alone) and *after* including it (all nine controlled architectures), at the primary and final checkpoints, and we also report the 20-image-task counterpart for completeness. As a robustness check, we additionally apply K -means clustering ($k=2$) on SHS-Index followed by a Mann-Whitney U test on the resulting groups (§G.2); the two analyses agree on the qualitative conclusion.

G.2 Robustness: K-means Clustering and Mann-Whitney U Test

As a non-parametric robustness check, K -means ($k=2$) on SHS-Index automatically separates the eight diagnostic configurations into a high-SHS group (5 models: full, full_sink, swa_sink_row, swa_row, swa2d_sink; $\text{SHS} \geq 0.597$) and a low-SHS group (3 models: swa2d, wa2d_sink, wa2d; $\text{SHS} \leq 0.588$). Adding Ariadne keeps the low-SHS group unchanged and expands the high-SHS

Iter	full_s	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	93.8	91.7	83.3	84.4	81.2	83.3	84.4	81.2	90.6
4k	82.3	79.2	69.8	74.0	68.8	74.0	75.0	78.1	75.0
6k	81.2	80.2	68.8	67.7	61.5	69.8	75.0	68.8	76.0
8k	82.3	78.1	71.9	67.7	59.4	69.8	71.9	66.7	72.9
10k	79.2	76.0	67.7	64.6	59.4	72.9	70.8	69.8	71.9

Table 14: Percentage of obj-dominant heads (core L9–21, majority vote across analysis images).

Iter	full_s	full	4r3c	sink_r	swa_r	s2d_s	swa2d	w_s	wa2d
2k	.618	.608	.566	.576	.552	.567	.570	.566	.557
4k	.596	.584	.546	.554	.533	.547	.548	.545	.543
6k	.589	.574	.545	.540	.524	.539	.546	.529	.537
8k	.587	.574	.545	.543	.522	.540	.539	.531	.534
10k	.581	.566	.543	.532	.519	.537	.537	.530	.531

Table 15: Mean rcv_auroc_obj (core L9–21) across training iterations.

group to 6 models. In both settings, the groups show *zero benchmark overlap* at the corrected primary checkpoint: the lowest-scoring high-SHS model (38.80) exceeds the highest-scoring low-SHS model (38.09). A Mann-Whitney U test on the 20-image-task average confirms significance (Table 20).

H SHS Collective Property Experiments

H.1 Head Elimination

We test whether individual high-SHS or low-SHS heads are more important by replacing specified heads’ V outputs with their calibration-set mean (mean ablation), following the head importance analysis methodology of Michel et al. (2019). For each model, we select the 8 heads with highest and 8 with lowest core-layer AUROC, eliminate them separately, and compare the benchmark drop.

High vs. low SHS heads and all-16 elimination. Table 21 combines both experiments on the full model. The upper panel shows that eliminating 8 high-SHS heads causes the same benchmark drop as eliminating 8 low-SHS heads (avg $\Delta = -0.18$); individual heads are interchangeable regardless of specialization direction. The lower panel shows that eliminating all 16 core-layer heads simultaneously causes dramatic drops on vision-dependent tasks, confirming that SHS is a collective property.

Cross-model consistency. Table 22 extends the high-vs-low analysis to three architectures.

H.2 QK Weight Norm vs. SHS

We compute the per-head Frobenius norm of Q and K weight matrices and correlate with per-head SHS

(AUROC). Table 23 shows Spearman ρ between QK norm product and per-head AUROC for each model.

H.3 QK Equalization Experiment

We artificially equalize all heads’ QK norms to the per-layer maximum, then recompute SHS. If QK norm causes SHS, equalization should increase SHS. Instead, SHS drops in all 5 models tested (Table 24):

I Efficiency Analysis

Table 25 reports ViT forward pass timing across six representative resolutions. All timings measured on NVIDIA Hopper GPU, FlashAttention-3 (Shah et al., 2024) with s_aux=yes, bfloat16, 4 images batched (varlen contiguous batching), warmup 10, iterations 10. ViT: 32 layers, hidden 1280, 16 heads, head_dim 80, MLP 3456. Full-attention layers at positions [7, 15, 23, 31]. TFLOP counts theoretical attention FLOPs ($QK^\top + \text{softmax} \cdot V$, multiply-add = 2 ops). attn_op is the FlashAttention kernel only (no QKV/proj linear; wa2d includes reorder overhead). e2e is the full transformer block (norm + QKV + RoPE + attn + proj + norm + MLP).

Key conclusions.

- **Sink has zero overhead:** SWA-sink-row and SWA-row produce identical attn_op and e2e timings at every resolution, confirming that FlashAttention-3’s (Shah et al., 2024) native s_aux parameter incurs no additional computation.

Model	Layout	Attn	Sink	SHS	Entropy	Distance	Bench
full	N/A	Full	No	.606	4.584	14.922	40.92
full_sink	N/A	Full	Yes	.611	4.350	14.824	39.95
4r3c	1D rc	SWA	Yes	.602	2.768	13.950	40.40
swa_sink_row	1D r	SWA	Yes	.598	2.969	12.002	40.14
swa_row	1D r	SWA	No	.600	3.010	11.713	38.80
swa2d_sink	2D	SWA	Yes	.597	2.975	12.802	39.13
swa2d	2D	SWA	No	.588	2.914	11.802	38.09
wa2d_sink	2D	Chunk	Yes	.579	2.428	11.146	37.94
wa2d	2D	Chunk	No	.577	2.476	10.690	37.35

Table 16: SHS, Entropy, and Distance for all 9 models at the primary checkpoint. SHS-Index is the all-32-layer mean (matching Table 12; same convention used for the Pearson correlation in §3). Entropy and Distance are computed only over the 28 non-full-attn layers, since the 4 full-attn layers are identical across all 9 architectures and would dominate these distance/entropy averages.

Metric	ρ	p
SHS	+0.857	0.007
Distance	+0.833	0.010
Entropy	+0.524	0.183

Table 17: Cross-model Spearman ρ vs. benchmark (N=8). SHS is the strongest correlate; Entropy is not significant.

Change	Δ SHS	Δ Ent.	Δ Dist.	Δ Bench
+Sink (Chunk 2D)	+0.002	−0.05	+0.46	+0.59
+Sink (SWA 2D)	+0.009	+0.06	+1.00	+1.04
+Sink (SWA 1D)	−.002	−0.04	+0.29	+1.34
+Sink (Full)	+0.005	−0.23	−0.10	−0.97
Chunk→SWA (2D)	+0.011	+0.44	+1.11	+0.74
Chunk→SWA (2D+s)	+0.018	+0.55	+1.66	+1.78
2D→1D (SWA)	+0.012	+0.10	−0.09	+0.71
2D→1D (SWA+s)	+0.001	−0.01	−0.80	+1.01
+RowCol	+0.004	−0.20	+1.95	+0.26

Table 18: Pairwise deltas for each architectural change at the corrected 8k checkpoint. The 2D→1D transition improves the benchmark, but individual local changes do not always move SHS and benchmark in the same direction; the relationship is a global cross-architecture pattern rather than a monotonic rule for every intervention. (Δ SHS uses all-32-layer mean as in Table 16; Δ Entropy/Distance use the non-full-attn layers.)

- **SWA faster than chunk:** Despite a larger effective window (128 vs. 64 tokens), SWA’s kernel time is dramatically lower than wa2d (6.3 ms vs. 17.5 ms at 896²). FlashAttention-3’s contiguous SWA kernel is better optimized than the varlen interface used for chunk windows (Dao et al., 2022; Dao, 2024). The wa2d kernel time also includes the overhead of 2D window reordering.
- **Savings grow with resolution:** In the updated sweep, Ariadne saves 13.5% e2e at 896² and

Model	bg stl.	obj stl.	Δ	bg>obj
full_sink	0.38%	0.23%	+0.14%	97.9%
swa_sink_row	4.61%	2.86%	+1.74%	96.9%
swa_sink_4r3c	3.79%	2.52%	+1.26%	93.8%
swa2d_sink	2.84%	1.68%	+1.16%	96.9%
wa2d_sink	4.32%	3.69%	+0.64%	78.1%

Table 19: Sink steal analysis (all heads, core L9–21 at the primary checkpoint). bg/obj stl. = fraction of received attention redirected to sink. In SWA models, 94–97% of heads steal more from bg than obj, i.e., sink acts as a *background suppressor*. In wa2d_sink, directionality drops to 78%, explaining why chunk+sink fails.

Setting	High	Low	p (U)	d
8 diagnostic @8k	38.80–40.92	37.35–38.09	.018	3.65
9 all @8k	38.80–40.92	37.35–38.09	.012	3.91
9 all @10k	38.01–40.40	35.21–38.27	.024	2.37

Table 20: Robustness check: K -means ($k=2$) on SHS-Index partitions the controlled configurations into high-SHS and low-SHS groups (benchmark ranges shown). Mann-Whitney U test on the 20-image-task average confirms significant separation. Cohen’s d uses unweighted pooled SD. The 9-model grouping remains significant at 10k.

39.4% at 1792². Full attention FLOPs scale quadratically, while the local component of Ariadne scales approximately linearly.

J Why Sink Bias Hurts Full Attention

The Full+Sink model has the highest SHS-Index (0.611) yet ranks below Full on the corrected benchmark (39.95 vs. 40.92), a -0.97 drop. In contrast, sink bias consistently *improves* SWA models (+0.5 to +2.1). Three lines of evidence explain this asymmetry.

Panel A: High-8 vs. Low-8 (avg over 23 tasks)		
Condition	Δ vs. base	
Remove 8 hi-SHS	−1.25	
Remove 8 lo-SHS	−1.07	
hi − lo	−0.18	(14/23 tasks hi<lo)
Panel B: All 16 heads removed		
Task	Base	Δ
V*	48.69	−13.1
OCRBench	68.00	−16.7
DocVQA	53.46	−13.8
MMMU	29.11	+0.1

Table 21: Head elimination on the full model (core layers). **Panel A:** removing 8 high-SHS vs. 8 low-SHS heads yields negligible difference; individual heads are interchangeable. **Panel B:** removing all 16 heads collapses vision-dependent tasks; MMMU (reasoning-heavy) is unaffected. The collective specialization pattern is indispensable. The head-elimination suite (23 tasks) is a superset of the 22-task primary benchmark, with sub-scores (e.g., MME-cognition vs. MME-perception) reported separately for finer-grained per-task analysis.

Model	Tasks	avg (hi − lo)
full	23	−0.18
wa2d	23	+0.20
swa_sink_row	25	−0.27

Table 22: High-low SHS head elimination across models. No model shows a significant difference. Task counts vary slightly (23–25) across models because evaluation suites differ in which sub-scores are reported separately at this checkpoint; the conclusion (no high/low gap) is robust to this choice.

	Q	K	V	O	Q×K
full	+0.09	+0.11	−0.06	+0.05	+0.10
4r3c	+0.15	+0.16	+0.01	+0.05	+0.16
sink_row	+0.00	+0.02	−0.03	+0.13	+0.01
swa_row	+0.14	+0.14	+0.06	+0.16	+0.14
s2d_sink	+0.33	+0.32	+0.05	+0.19	+0.33
swa2d	+0.19	+0.20	+0.01	+0.12	+0.20
w_sink	+0.12	+0.12	−0.10	+0.07	+0.12
wa2d	+0.27	+0.28	−0.01	+0.14	+0.28
Mean	+0.16	+0.17	−0.01	+0.11	+0.17

Table 23: Spearman ρ between per-head weight Frobenius norms and SHS. Q/K show weak positive correlations (8/8 positive); V shows none (mean −0.01).

Full attention already has implicit sinks. Guo et al. (2024) show that full-attention heads naturally develop an *active-dormant* mechanism: for each input, some heads route attention to implicit sink tokens whose value-state norms approach zero, ef-

Model	Base SHS	Eq. SHS	Δ
full	.6237	.6178	−0.0059
4r3c	.6044	.6001	−0.0044
swa_sink_row	.5993	.5958	−0.0035
swa_row	.6036	.5997	−0.0038
wa2d	.5763	.5751	−0.0013

Table 24: QK equalization: SHS drops in all 5 models. The positive QK-SHS correlation is a consequence, not a cause, of head specialization.

fectively implementing a learned, input-dependent no-op. Barbero et al. (2025) further demonstrate that sinks function as anti-over-mixing regulators, and that larger context windows develop stronger implicit sinks. A learnable sink bias $s_{\text{aux}}^{(h)}$ is a fixed, input-independent scalar; it competes with the pre-existing input-dependent mechanism rather than complementing it.

SWA lacks this implicit mechanism. With only 128 tokens per window, SWA models cannot develop effective implicit sinks; the local context is too limited. The softmax constraint forces each query to distribute its full attention budget within the window, wasting mass on uninformative background tokens. Here, an explicit sink bias fills a genuine gap: it provides the no-op channel that the architecture cannot learn on its own.

Over-specialization reduces diversity. Full+Sink’s obj-dominant head fraction is 82.3% (the highest among all 9 models), meaning sink bias pushes too many heads toward foreground. This reduces the collective role diversity that §H identifies as indispensable, explaining why SHS-Index rises (heads are individually more specialized) while benchmark falls (the ensemble loses complementary background expertise).

This analysis is consistent with Gu et al. (2025), who show that attention sinks arise from the softmax normalization constraint and function as key biases rather than informative signals; adding a second explicit bias atop an already-effective implicit one yields diminishing or negative returns.

K Pearson Correlation

Table 27 reports the full Pearson r matrix. The relationship is strong at the corrected primary checkpoint under both task averages (20 image and 22 with video) and under both $N=8$ (eight diagnostic configurations) and $N=9$ (adding Ariadne). At the final checkpoint the correlation weakens; those

Res	Tok	Full			wa2d (Chunk)			SWA-row			SWA-sink-row		
		FLOP	op	e2e	FLOP	op	e2e	FLOP	op	e2e	FLOP	op	e2e
224 ²	256	0.04	1.2	22.1	0.01	2.8	24.4	0.02	1.2	22.1	0.02	1.2	22.3
448 ²	1024	0.69	2.2	32.1	0.12	4.5	32.9	0.16	1.4	31.4	0.16	1.4	31.3
672 ²	2304	3.48	7.6	68.7	0.52	9.7	68.4	0.60	2.9	64.6	0.60	2.9	64.6
896²	4096	11.0	23.9	124.4	1.52	17.5	115.3	1.68	6.2	109.0	1.68	6.3	109.0
1120 ²	6400	26.8	55.2	211.2	3.59	28.8	178.1	3.83	12.1	168.5	3.83	12.0	168.6
1344²	9216	55.7	110.3	330.0	7.30	44.3	255.5	7.64	21.2	242.2	7.64	21.1	242.9

Table 25: Four-operator ViT profiling at representative resolutions. FLOP = attention TFLOP; op = FlashAttention kernel time (ms); e2e = full block time (ms). SWA-sink-row $\equiv$ SWA-row: sink adds *zero* overhead in this run (FA3 native s_aux support). The updated Full–Ariadne scaling sweep is reported in Table 26.

Resolution	Tokens	Full attn.	Ariadne attn.	Full e2e	Ariadne e2e	e2e saving
448 ²	1,024	0.69T	0.16T	31.3	30.6	−2.2%
672 ²	2,304	3.48T	0.60T	66.9	62.8	−6.1%
896 ²	4,096	11.0T	1.68T	123.5	106.8	−13.5%
1120 ²	6,400	26.8T	3.83T	210.1	166.1	−20.9%
1344 ²	9,216	55.7T	7.64T	327.5	240.0	−26.7%
1568 ²	12,544	103.1T	13.8T	500.2	331.0	−33.8%
1792 ²	16,384	175.9T	23.2T	726.2	440.0	−39.4%

Table 26: Updated Full–Ariadne efficiency sweep on NVIDIA Hopper with FlashAttention-3. Attention columns report theoretical attention FLOPs; e2e columns report complete ViT block time in milliseconds. The end-to-end saving grows with resolution, which is the regime targeted by hybrid attention.

10k rows retain the original MMBench-EN evaluation because the re-evaluation was performed at 8k only.

Step	Setting	22-task		20 image-task	
		<i>r</i>	<i>p</i>	<i>r</i>	<i>p</i>
8k	$N=8$ (diagnostic)	.858	.006	.877	.004
8k	$N=9$ (incl. Ariadne)	.853	.003	.875	.002
10k	$N=8$	.66	.077	.67	.067
10k	$N=9$	.67	.048	.69	.041

Table 27: Pearson correlation between SHS-Index and benchmark across controlled architectures. The 8k rows use corrected MMBench-EN scores; bootstrap 95% CI for the primary 22-task setting is $[0.51, 0.98]$, and an exact two-sided permutation test gives $p=0.008$. The 10k rows retain the original evaluation and are included as a sensitivity analysis.

K.1 Bootstrap and exact permutation tests

Because the controlled comparison has a small number of configurations, we complement Pearson’s parametric p -value with bootstrap intervals and exact permutation tests. The primary 22-task correlation has a 95% bootstrap interval whose lower endpoint remains above .50; the exact test enumerates all label permutations and makes no distributional assumption.

Setting	<i>r</i>	Bootstrap 95% CI	Exact <i>p</i>
$N=8$, 22-task	.858	[.51, .98]	.008
$N=8$, 20-image	.877	[.63, .98]	.006
$N=9$, 22-task	.853	[.50, .98]	.004
$N=9$, 20-image	.875	[.63, .98]	.002

Table 28: Bootstrap intervals (10k resamples) and exact two-sided permutation p -values computed from the corrected 8k benchmark scores. The $N=8$ permutation enumerates all 40,320 assignments.