

GraspHOI: Full-Body 3D Human-Object Reconstruction with Finger-Level Grasps from a Single In-the-Wild Image

Semin Kim Haechan Shin Jongyoo Kim
Yonsei University
{hohosemin, haechanshin, jy.kim}@yonsei.ac.kr



Figure 1. **GraspHOI**. Given a monocular RGB image, our method reconstructs human-object interactions with articulated fingers and realistic grasps across diverse in-the-wild images.

Abstract

Existing monocular full-body 3D human-object interaction (HOI) methods do not combine explicit finger-level grasp optimization with category-agnostic object reconstruction. Despite plausible body-object configurations, their fingers may float from or penetrate objects instead of forming a grasp. We present **GraspHOI**, the first framework that reconstructs a full-body 3D HOI from a single image while explicitly optimizing finger articulation against the reconstructed object. **GraspHOI** recovers object geometry directly, without predefined meshes or a fixed category vocabulary. It reconstructs the body, hands, and object separately, aligning them in metric camera space via depth-based registration and image-space alignment. Occlusion-aware palmar correspondences seat the object against the grasping hand, and contact-aware optimization refines arm and finger articulation to form surface contact without excessive penetration. Across four benchmarks and six baselines, **GraspHOI** improves relative human-object placement, hand accuracy, and contact plausibility. Full pipeline code will be released.

1. Introduction

Full-body human-object interaction (HOI) reconstructions can serve as editable assets for animation, game cutscenes, and virtual reality, and as keyframes toward our longer-term goal of hand-accurate HOI video generation. Useful reconstructions must cover in-the-wild objects without category constraints and recover articulated hand contact within the full-body interaction. A plausible body-object configuration alone is insufficient: category-bound geometry limits the interactions represented, while fingers that penetrate an object, float from its surface, or remain generically open break the illusion and yield poor keyframes for downstream grasp motion.

Existing methods do not combine category-agnostic object reconstruction with finger-level grasp optimization. Template-based approaches rely on predefined object meshes [54, 55, 69]. Template-free HDM [56] and InterTrack [58] instead reconstruct human-object point clouds, but their learned priors remain bounded by training categories, and neither explicitly optimizes finger articulation. Retrieval-based methods broaden category coverage but remain database dependent. PICO [7] retrieves object geometry and contact correspondences from PICO-

db, whereas InteractVLM [11] retrieves an Objaverse [9] mesh, predicts contact on it, and fits its pose and scale. Neither directly reconstructs the observed object geometry. CARI4D [59] achieves category-agnostic full-body 4D reconstruction from video, but assumes substantial initial object visibility and represents contact with two hand-joint locations rather than optimized finger articulation. Thus, no prior category-agnostic method reconstructs a full-body HOI from one in-the-wild image while optimizing the fingers against the object surface.

GraspHOI is the **first framework that reconstructs a full-body 3D HOI from a single image while explicitly optimizing finger articulation against the reconstructed object**. Here, category-agnostic denotes one pipeline requiring no predefined object meshes, category-specific HOI models, or contact retrieval. We accept higher runtime than direct regression and use iterative refinement to correct small but visible errors at the hand-object interface. The object, body, and hands are reconstructed independently, keeping object-shape errors out of body and hand initialization. Although the individual meshes may each project plausibly into the image, they can disagree in metric scale and camera-space translation. We therefore place them in a shared metric camera frame and use explicit surface correspondences to refine their relative 3D configuration. Temporal motion and body-object interactions such as sitting or leaning are beyond our present scope.

Concretely, SAM 3D Body [63] reconstructs the body in MHR [14]. We fit its mesh to SMPL-H and insert articulated hands recovered by WiLoR [37]. Amodal conditioning and an image-to-3D prior reconstruct the object (Sec. 3.1). Metric RGB-D registration and image-space alignment recover the object’s camera-space pose and scale (Sec. 3.2). Occlusion-aware palmar correspondences then seat the object against the hand (Sec. 3.3), after which contact-aware optimization refines arm and finger articulation together with a bounded scale about the camera origin that adjusts object size and grasp depth without changing its projection (Sec. 3.4).

We evaluate GraspHOI against six recent baselines, SAM 3D Objects [6], HOI-TG [50], HDM [56], TeHOR [31], EasyHOI [26], and PICO [7], across four benchmarks: ARCTIC [12], ProciGen-GRAB (our ProciGen [57] rendering of GRAB [43] interactions), BEHAVE [1], and PICO-db. The evaluation covers object reconstruction, joint HOI recovery, hand accuracy, and grasp plausibility.

Our key contributions are as follows:

- We introduce the first **single-image framework for full-body 3D HOI reconstruction with explicit finger-level grasp optimization**, operating category agnostically.
- We decouple object, body, and hand reconstruction, then optimize only cross-component scale, placement, and

contact. This avoids retraining the full pipeline when an initializer is replaced.

2. Related Work

Human Body Reconstruction. Representative SMPL-family reconstruction methods include [3, 17–19, 22, 32, 42, 66]. The underlying SMPL model [28] lacks articulated hands, limiting fine-grained interaction modeling. SMPL-H/SMPL-X methods [4, 13, 33, 41, 65, 67] add articulated hands, with SMPL-X also modeling facial expression. SAM 3D Body [63] instead predicts MHR [14]. We use it for full-body initialization and refine hand articulation separately.

3D Object Reconstruction. Single-image object reconstruction has used generated multiview observations with implicit reconstruction [24, 25], SDS optimization [23, 36], and feed-forward models [15, 47, 61]. Other systems use diffusion-guided explicit 3D generation [27, 44]. Large-scale Hunyuan3D models [16, 20, 45, 46, 62] improve fidelity across unseen categories, while TRELIS [52, 53] provides scalable structured latents. SAM 3D Objects [6] reconstructs complete geometry and texture under occlusion while jointly predicting scene layout. We use Hunyuan3D 2.1 to produce textured meshes suitable for surface-based contact refinement.

Human–Object Interaction. Template-based HOI methods [30, 54, 55, 69] require predefined object meshes, limiting generalization beyond known geometries. HOI-TG [50] regresses the interacting body and template object end-to-end with a graph transformer, and ScoreHOI [21] applies score-guided diffusion with contact and penetration guidance, but both remain template-bound. Template-free HDM [56] adapts PC² [29] for single-image human-object point-cloud reconstruction, and InterTrack [58] extends this representation across video with temporal consistency. Both remove instance templates, but their learned priors remain bounded by training categories and neither explicitly optimizes finger articulation. CARI4D [59] is the first category-agnostic full-body 4D HOI method for monocular video. It assumes substantial initial object visibility and refines contact through two hand-joint locations rather than finger articulation. We instead optimize finger-level contact from one image.

Alternative paradigms use vision–language priors for interaction semantics [11, 68, 72]. TeHOR [31] aligns textured human–object reconstructions with textual interaction descriptions, including non-contact cases. Others use human motion or physics for object pose [34, 71], and diffusion priors for globally plausible joint synthesis [35, 40, 70]. Their focus is global interaction semantics or generation rather than refining finger articulation against reconstructed object contact.

Contact predictors [2, 48, 64] provide dense cues over

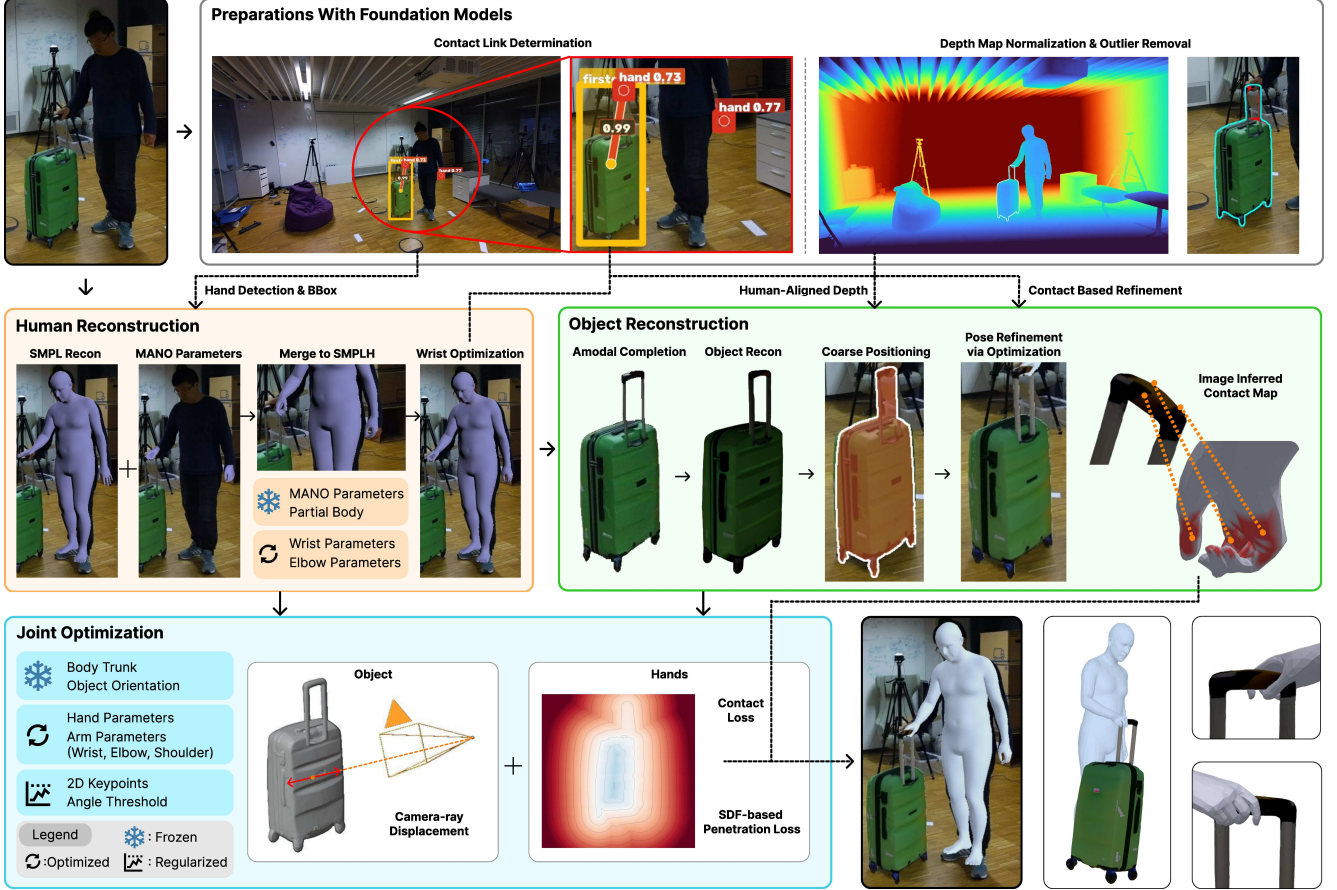


Figure 2. GraspPHOI reconstructs the human, hands, and object separately, places them in a shared metric camera frame, and refines their relative configuration through contact seating and joint optimization.

broader object sets. PICO [7] retrieves an object mesh and the closest contact correspondences from PICO-db before fitting the HOI. This broadens category coverage, but generalization depends on compatible retrievals from finite databases. GraspPHOI instead reconstructs object geometry and establishes contact geometrically, enabling detailed grasp optimization without predefined meshes or retrieved interaction examples.

3. Method

GraspPHOI is a decoupled reconstruction-and-refinement pipeline for grasp-centric human-object interactions from one RGB image. Besides the image I , it takes a visible (modal) object mask S_{vis} . Hand detections and interaction links are inferred from I . Separate estimators recover the human, hands, and object. Each exposes only meshes, cameras, masks, or keypoints, so the optimizer does not depend on model-specific latent features.

The subsequent stages solve cross-component scale, pose, and surface contact in a shared metric camera frame.

The final stage updates only the arms, fingers, and a bounded scaling of the object about the camera origin instead of re-estimating the scene. Because the losses act directly on the reconstructed surfaces, iterative optimization can correct contact and penetration errors after initialization.

3.1. Human and object initialization

Human reconstruction. We estimate camera intrinsics K with HumanFoV, the field-of-view estimator released with CameraHMR [32], and reconstruct the body with SAM 3D Body [63]. We use its body-only, hand-frozen inference setting to predict a camera-space MHR [14] mesh. Following the official MHR-to-SMPL-X converter released by the MHR authors, we adapt its barycentric topology transfer and staged edge-vertex fitting to a neutral SMPL-H target. This recovers SMPL-H global orientation, body pose θ_b , shape β , and translation, while finger pose remains neutral. SAM 3D Body was trained on seven million annotated images spanning rare poses and diverse viewpoints. We use it as the full-body initializer. HOI-DETR [8] then detects

hand boxes and hand-object interaction links. We associate each detected box with the projected left or right SMPL-H hand and apply WiLoR [37] to recover MANO [39] finger pose, hand global orientation, and 2D hand keypoints.

We insert these hand estimates into the fitted SMPL-H body. First, the elbow rotation is optimized so that the projected SMPL wrist agrees with the WiLoR wrist. Let R_g, R_s, R_e be the SMPL-H global, shoulder, and elbow rotations, and let R_h^{MANO} be the global MANO hand orientation. The corresponding local SMPL-H wrist rotation is

$$R_w = (R_g R_s R_e)^\top R_h^{\text{MANO}}. \quad (1)$$

The MANO finger rotations are then inserted directly into the SMPL-H hand-pose parameters. Finally, we refine R_w by matching the projected SMPL-H finger joints to the WiLoR keypoints. Thus, no vertices are copied between MANO and SMPL-H. Only compatible pose parameters are transferred.

Object reconstruction and amodal conditioning. We first estimate dense scene depth with Pixel-Perfect Depth (PPD) [60], using MoGe-2 [49] as its semantic and metric geometry prior. PPD/MoGe-2 and SAM 3D Body estimate metric depth independently, so their absolute scales can differ. We align them once before placement. For each human vertex v whose projected pixel x_v has valid depth, we set $\gamma = \text{median}_v[v_z/D(x_v)]$ and replace $D \leftarrow \gamma D$. This human-aligned depth map is shared by all later placement and contact stages.

The visible object may be heavily occluded by the hand or body. We therefore construct an amodal conditioning image before image-to-3D reconstruction. The depth map identifies pixels lying in front of the visible object within a local object region. Only this inferred occluder is inpainted, while visible object pixels are preserved. We remove the generated background and obtain an amodal cutout I_a and silhouette S_a . Full completion details and examples are provided in the supplementary material. We reconstruct a textured mesh $\mathcal{M}_o^0 = (V_o^0, F_o)$ from I_a with the Hunyuan3D family [45, 46]. Our implementation uses Hunyuan3D 2.1.

3.2. Metric object placement

The generated mesh has neither a reliable metric scale nor a camera-space pose. We back-project valid metric depths inside S_{vis} to a 3D cloud $\mathcal{P}$ and reject depth and spatial outliers. Defining the median-centered radius $r(X) = \max_{x \in X} \|x - \text{median}(X)\|_2$, we initialize metric scale by $s_{\text{sph}} = r(\mathcal{P})/r(V_o^0)$. This 3D statistic avoids dependence on projected bounding-box axes, although visibility and the coordinate-wise median can still bias the estimate. We use the sphere-scaled vertices $\hat{V}_o^0 = s_{\text{sph}} V_o^0$ for pose registration.

To initialize 6-DoF pose, we form an ‘‘as-if-unoccluded’’ RGB-D observation. PPD is applied to I_a , and its rela-

tive depth is aligned to the scene depth over S_{vis} , where both maps observe the same surface. The aligned object depth and amodal RGB values replace the occluder inside S_a . FoundationPose [51] then registers the textured, sphere-scaled mesh to this amodal RGB-D observation, producing (R_0, t_0) from the generated appearance and completed depth.

We initialize q and t from (R_0, t_0) and the residual scale s from a rendered-to-target box correction. We then refine the object through silhouette alignment in a mask-centered crop, with K transformed to the crop coordinates, as $V_o = sR(q)\hat{V}_o^0 + t$, where $q \in \mathbb{R}^3$ is an axis-angle rotation, $t \in \mathbb{R}^3$ is translation, and $s > 0$ is residual scale. We denote the rendered silhouette under intrinsics K by $\hat{S}$. Let $b_c(\cdot)$ and $b_s(\cdot)$ denote the center and size of a 2D bounding box. Scale and position are soft barriers,

$$\begin{aligned} \mathcal{L}_{\text{sc}} &= \left[\|b_s(\hat{S}) - b_s(S_a)\|_2^2 - \epsilon_s^2 \right]_+, \\ \mathcal{L}_{\text{pos}} &= \left[\|b_c(\hat{S}) - b_c(S_a)\|_2^2 - \epsilon_p^2 \right]_+, \end{aligned} \quad (2)$$

where $[x]_+ = \max(x, 0)$, and ϵ_s and ϵ_p are respectively 5% and 3% of the target box diagonal. These terms prevent drift without competing with fine boundary alignment.

The symmetric silhouette discrepancy is (all sums are over crop pixels)

$$\mathcal{L}_{\text{sil}} = \left[100 \left(\frac{\sum S_a(1 - \hat{S})}{\sum S_a} + \frac{\sum \hat{S}(1 - S_a)}{\sum \hat{S}} \right) \right]^2. \quad (3)$$

For thin structures, we additionally use a symmetric contour objective. Let C_a be the target contour-pixel set, $C_m(x)$ the predicted soft-contour intensity, and $D_a(x)$ the pixel distance to C_a . Then

$$\mathcal{L}_{\text{cnt}} = \frac{\langle C_m, D_a^2 \rangle}{\|C_m\|_1} + \frac{\eta}{|C_a|} \sum_{x \in C_a} (1 - \tilde{C}_m(x))^2. \quad (4)$$

Here $\tilde{C}_m = C_m / \max_x C_m(x)$ and $\eta = 400$. The first term pulls predicted boundaries toward the observation, while the reverse coverage term prevents a smaller silhouette from matching only a subset of the target boundary. The object objective is

$$\mathcal{L}_{\text{obj}} = 10(\mathcal{L}_{\text{sc}} + \mathcal{L}_{\text{pos}}) + \mathcal{L}_{\text{sil}} + w_c \mathcal{L}_{\text{cnt}}, \quad (5)$$

with w_c increased linearly from 0.3 to 1. The outlier filters, degenerate-observation fallback, and optimization schedule are detailed in the supplementary material.

3.3. Occlusion-aware contact seating

Object placement aligns the image evidence but does not determine which hand surface touches which side of the object. We treat each HOI-DETR interaction link as a binary

contact indicator for the associated hand. The target object is identified by matching the linked object detection to S_a , and a contact is discarded if the associated hand box has negligible overlap with the amodal object region. This prevents a hand manipulating another nearby object from being attached to the reconstructed mesh.

For each contacting hand g in the set $\mathcal{H}_c$, we cast camera rays through the overlap of its projection and S_a . Intersections with the SMPL-H hand mesh are filtered by the palm normal, removing dorsal candidates and retaining palmar-facing vertices h_i . Each retained vertex is paired with an object vertex o_j on the same image ray. The visible object mask resolves the near-far ambiguity. Contact lies on the rear surface where the object is visible and on the front surface where the hand occludes it. The valid pairs form $\mathcal{C}_g$, and $\mathcal{C} = \bigcup_{g \in \mathcal{H}_c} \mathcal{C}_g$.

The object is then seated by a positive scalar N about the camera origin. Writing Π_K for perspective projection under K , we have $\Pi_K(No) = \Pi_K(o)$, so this operation changes metric size and depth without altering the optimized silhouette. We solve

$$N^* = \arg \min_N \frac{1}{|\mathcal{C}|} \sum_{(i,j) \in \mathcal{C}} (Nz(o_j) - z(h_i))^2 + \lambda_{\text{seat}} \mathcal{L}_{\text{pen}}^{\text{seat}}(N), \quad (6)$$

over a bounded one-dimensional grid, where $z(\cdot)$ extracts camera-space depth. The first pass uses $\lambda_{\text{seat}} = 0$. If maximum penetration exceeds 2 mm, a second pass weights the mean squared hand-in-object depth $\mathcal{L}_{\text{pen}}^{\text{seat}}$ as detailed in the supplement. These fixed one-to-one pairs are passed to joint refinement. A nearest-surface fallback is used only when fewer than three valid pairs are available. We update $V_o \leftarrow N^*V_o$ and define the seated mesh $\mathcal{M}_o = (V_o, F_o)$, so o_j denotes a seated object vertex below.

3.4. Contact-aware joint refinement

The final stage refines the shoulder, elbow, wrist, and MANO finger rotations for contacting hands. The body trunk and object orientation remain fixed. We also optimize a bounded object scalar $s_o \in [0.95, 1.05]$ in camera space, $V_o' = s_o V_o$, which preserves every projected object point while allowing a small coupled correction to metric size and grasp depth.

Image anchoring. Let Θ^0 denote the pre-refinement pose and Θ collect the optimized pose parameters. For $g \in \mathcal{H}_c$, let $J_g(\Theta)$ be its SMPL-H finger joints, $\hat{p}_g$ its WiLoR keypoints, and $J_{\text{arm},g}(\Theta)$ its shoulder-elbow-wrist joints. Define $U_g = \Pi_K(J_g(\Theta))$, $A_g = \Pi_K(J_{\text{arm},g}(\Theta))$, and $A_g^0 = \Pi_K(J_{\text{arm},g}(\Theta^0))$. We anchor the fingers to WiLoR keypoints and preserve the initial projected arm configuration by

$$\mathcal{L}_{\text{kp}} = \sum_{g \in \mathcal{H}_c} [\text{MSE}(U_g, \hat{p}_g) + \text{MSE}(A_g, A_g^0)]. \quad (7)$$

Here MSE is mean squared coordinate error.

Paired contact and penetration. The seated correspondences remain fixed during optimization. We define the per-hand loss ℓ_g and average it across contacting hands:

$$\ell_g = \frac{1}{|\mathcal{C}_g|} \sum_{(i,j) \in \mathcal{C}_g} \|h_i(\Theta) - s_o o_j\|_2^2, \quad (8)$$

$$\mathcal{L}_{\text{cont}} = \frac{1}{|\mathcal{H}_c|} \sum_{g \in \mathcal{H}_c} \ell_g.$$

We use an object SDF that is positive outside and negative inside, and allow a small compliance margin ϵ_{pen} before penalizing penetration:

$$\mathcal{L}_{\text{pen}} = \sum_{v \in V_{\text{hand}}(\Theta)} [-\text{SDF}_{s_o \mathcal{M}_o}(v) - \epsilon_{\text{pen}}]_+^2. \quad (9)$$

Here $V_{\text{hand}}(\Theta)$ contains the vertices of all contacting hands. We set $\epsilon_{\text{pen}} = 2$ mm, permitting 2 mm of surface compliance while penalizing deeper intersection.

Pose regularization. Let $\mathcal{G}$ contain each enabled arm or hand rotation group, with n_r joint rotations R_{rk} and initial rotations R_{rk}^0 . Define $d_{rk} = \arccos(\text{clamp}(\text{tr}((R_{rk}^0)^\top R_{rk}) - 1)/2, -1, 1))$, where clamp restricts its first argument to $[-1, 1]$, and let $B_r(d) = ([d - \tau_r]_+ / \tau_r)^{p_r}$. We use

$$\mathcal{L}_{\text{reg}} = \sum_{r \in \mathcal{G}} \frac{\lambda_r}{n_r} \sum_{k=1}^{n_r} [d_{rk}^2 + \alpha_r B_r(d_{rk})]. \quad (10)$$

Here λ_r weights the group, while α_r , τ_r , and p_r are the angular-barrier scale, threshold, and power. The coefficient α_r is zero for arms by default because their 2D anchors constrain drift. The complete refinement objective is

$$\mathcal{L}_{\text{joint}} = \lambda_{\text{kp}} \mathcal{L}_{\text{kp}} + \lambda_{\text{cont}} \mathcal{L}_{\text{cont}} + \lambda_{\text{pen}} \mathcal{L}_{\text{pen}} + \lambda_{\text{reg}} \mathcal{L}_{\text{reg}}. \quad (11)$$

The four λ coefficients are stage-dependent scalar weights. Their numerical schedules are given in the supplementary material. For two-hand interactions, a coarse stage first optimizes both arm chains with relaxed regularization to resolve front-back arm ambiguity. The standard refinement then jointly updates both arms and finger poses using the same paired contact objective. Optimization schedules, fallback behavior, and all numerical weights are reported in the supplementary material.

4. Experiments

4.1. Evaluation Protocol

Datasets. ARCTIC [12] provides calibrated multi-view RGB with SMPL-X body, hand, and articulated-object

Dataset	Method	Human		Object			H+O	Hands / contact			
		sF-sc@5 cm $\uparrow$	MPJPE $\downarrow$	sCD $\downarrow$	sF-sc _{norm} @0.05D $\uparrow$	sF-sc _{raw} @5 cm $\uparrow$	sF-sc@5 cm $\uparrow$	PA-MPJPE $\downarrow$	IV	PD	CPP (%) $\uparrow$
BEHAVE	HOI-TG	0.884	51.66	0.048	0.691	0.489	0.708	-	32.30	5.91	38.64
	GraspHOI (Ours)*	0.919	44.61	0.059	0.604	0.297	0.648	-	40.61	5.89	50.85
ARCTIC	HDM [†]	0.535	154.25	0.064	0.509	0.208	0.424	10.89	-	-	-
	TeHOR	0.587	130.31	0.107	0.288	0.006	0.370	10.07	0.49	0.04	1.35
	GraspHOI (Ours)	0.865	57.96	0.063	0.558	0.618	0.784	7.69	28.73	4.62	72.83
PGG	HDM [†]	0.851	61.90	0.098	0.324	0.259	0.608	11.78	-	-	-
	TeHOR	0.707	84.97	0.128	0.223	<0.001	0.395	10.01	0.36	0.03	1.31
	GraspHOI (Ours)	0.859	60.04	0.102	0.329	0.405	0.690	7.74	7.97	2.88	78.15

Table 1. HOI baseline comparison under the protocol of Sec. 4.1. * denotes GraspHOI evaluated with the same ground-truth BEHAVE object meshes used by HOI-TG. [†] denotes shared human-scale alignment for up-to-scale HDM. TeHOR values average its finite predictions. Physical metrics use annotated contacting hands. Body MPJPE, hand PA-MPJPE, and PD are in mm, and IV is in cm³. “-” denotes an unsupported metric, and BEHAVE lacks articulated-hand ground truth.

meshes. We subsample its interaction sequences at 0.5 fps, yielding approximately 5K monocular frame-views.

GRAB [43] provides metric SMPL-X bodies, articulated hands, object meshes, and contact, but no captured RGB. We therefore construct **ProciGen-GRAB (PGG)** by feeding GRAB interactions through the ProciGen [57] rendering pipeline in place of its original BEHAVE [1] sequences. GRAB supplies the posed body and hands together with the object trajectory, preserving their relative 3D configuration, while ProciGen supplies clothed appearance and calibrated monocular rendering. Subsampling at 0.5 fps gives approximately 4K PGG frame-views. BEHAVE is used only for the HOI-TG comparison, and PICO-db only for PICO.

Metrics. We sample 10K surface points and report shape Chamfer distance (sCD) and **shape F-score (sF-sc)**. For the standalone object comparison in Table 2, we align only the centroids, retaining the predicted rotation and scale. No rotational or similarity Procrustes alignment is applied to these surface metrics. HOI predictions and ground truth are centered at their respective pelvises using one translation shared by the human and object, preserving their relative placement. Since HDM predicts unordered point clouds, we fit SMPL-H to its human points via InterTrack’s correspondence autoencoder [58] and evaluate its human metrics on this fit. Because HDM is up-to-scale, we match its SMPL body-bone length to ground truth with one scalar applied to the complete predicted scene. All other methods retain their native scale. In Table 1, object sF-sc_{norm} and sCD center and normalize each object to unit diameter, whereas sF-sc_{raw} uses only the shared scene alignment. The normalized score isolates shape, while the raw score preserves the object’s position relative to the pelvis-aligned human and thus evaluates its actual 3D placement. Human, raw-object, and H+O sF-sc use a 5 cm threshold. sF-sc_{norm} uses 0.05 of the normalized object diameter. We further report root-relative body MPJPE, per-hand PA-MPJPE after similarity alignment, visible-object 2D-IoU, projected-hand coverage, intersection volume (IV), mean penetra-

Method	sF-sc@2 cm $\uparrow$	sCD (cm) $\downarrow$	2D-IoU (mean/med.) $\uparrow$
GraspHOI (Ours)	0.624	2.12	0.636 / 0.679
SAM 3D Objects	0.550	1.94	0.621 / 0.669

Table 2. Pooled category-agnostic object reconstruction over ARCTIC and PGG. sF-sc and sCD use centroid alignment, while 2D-IoU is measured from the raw visible-object projection. sF-sc@2 cm is computed on the frames both methods reconstruct.

tion depth (PD), and CPP over annotated contacting hands. CPP denotes *Contact-Penetration Plausibility*. With signed distance d positive outside the object, it is the percentage $100|\{v : -2 \leq d(v) \leq 10\}|/|\{v : d(v) \leq 10\}|$, with d in mm, and is zero when the denominator is empty. It complements IV and PD, which cannot distinguish a low-penetration grasp from absent contact. Neither IV nor PD is therefore assigned a ranking direction. Further details are in the supplement.

4.2. Object Shape and Image Alignment

We compare GraspHOI with SAM 3D Objects [6], a recent category-agnostic object reconstruction and layout model. Its occlusion-aware reconstruction reasons about hidden object geometry directly, removing the need for a separate amodal-completion stage. Both methods are evaluated on pooled ARCTIC and PGG samples. We compare reconstructed shape and image-space alignment using the metrics summarized in Table 2.

As shown in Table 2, GraspHOI achieves higher sF-sc at the 2 cm threshold and higher 2D-IoU, while SAM 3D Objects obtains lower mean sCD. This discrepancy reflects the metrics’ different sensitivities. Occasional Hunyuan3D outputs collapse into flattened shapes or elongated rods, whose large pointwise errors disproportionately increase mean sCD. The bounded 2 cm sF-sc instead measures how much of the reconstructed surface agrees with the reference within a fixed tolerance. On non-degenerate outputs, Hunyuan3D more faithfully recovers fine instance shape. Gras-

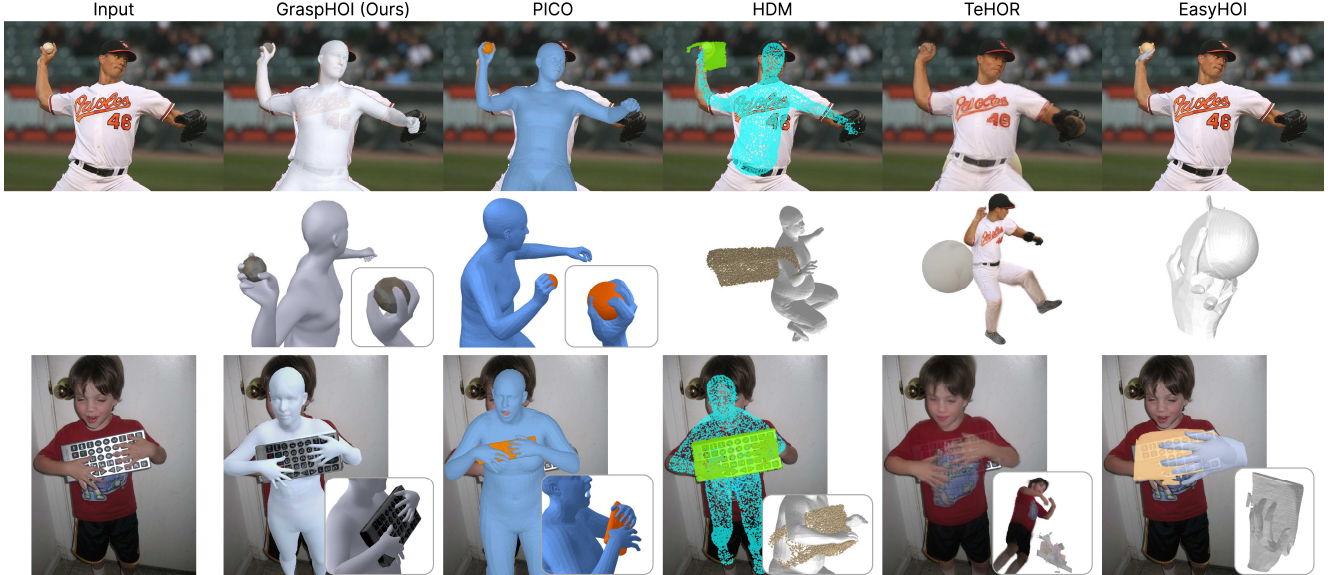


Figure 3. Qualitative comparison with PICO, HDM, TeHOR, and EasyHOI on challenging in-the-wild interactions. Method columns overlay the recovered human and object on the input, while insets expose their 3D arrangement and hand-object contact from alternate views. In these examples, GraspHOI better preserves the observed body pose, object geometry, scale, placement, and articulated grasp. The baselines show pose errors, deformed or mis-scaled objects, or missing contact.

pHOI’s higher raw 2D-IoU shows that its silhouette and depth-guided placement objectives align the visible projection more reliably than the learned SAM 3D Objects layout token on this benchmark. Supporting failure-mode analysis is provided in the supplementary material.

4.3. HOI Baseline Comparison

We compare with HOI-TG [50], HDM [56], and TeHOR [31]. We exclude CARI4D [59] because its video protocol exploits temporal evidence and assumes a sufficiently large rigid object visible in the initial frame, conditions incompatible with our single-image ARCTIC and PGG evaluation. HOI-TG and GraspHOI are evaluated on BEHAVE, following HOI-TG’s established setting. To match its template-based protocol, we provide GraspHOI with the same ground-truth BEHAVE object template used by HOI-TG. This controlled comparison isolates interaction reconstruction and alignment rather than object generation. Because BEHAVE does not provide articulated-hand ground truth, hand MPJPE is not reported for this comparison. HDM, TeHOR, and GraspHOI are evaluated on matched ARCTIC and PGG subsets, with metrics restricted to those supported by each native representation. TeHOR returns finite predictions for 85.5% of inputs. We average them and leave failures missing. HDM’s point-based object output does not support watertight IV, PD, or CPP. For TeHOR, we compute these metrics from its native TRELIS mesh. Table 1 summarizes this dataset-specific coverage. After resolving HDM’s global scale ambiguity, HDM

Dataset	Method	PA-MPJPE ↓	IV	PD	CPP (%) ↑	Cover. (%) ↑
PICO-db	PICO	-	41.52	4.61	67.59	37.63
	GraspHOI (Ours)	-	17.02	2.91	71.83	66.48
ARCTIC	EasyHOI	11.02	16.29	3.51	60.34	49.18
	GraspHOI (Ours)	7.69	28.73	4.62	72.83	73.63
PGG	EasyHOI	14.51	23.28	3.25	48.23	1.13
	GraspHOI (Ours)	7.74	7.97	2.88	78.15	74.42

Table 3. Optimization-based comparison. PA-MPJPE and PD are in mm and IV in cm^3 . Cover. denotes projected-hand coverage. PICO-db lacks posed 3D hand-joint ground truth.

and GraspHOI have similar PGG human MPJPE. GraspHOI has lower error on ARCTIC and higher raw-object and H+O F-score on both datasets. It also has the lowest hand PA-MPJPE on ARCTIC and PGG. The larger gain in raw than normalized object F-score suggests that the main gain is in relative scale and placement rather than object shape alone. TeHOR’s low IV and PD coincide with near-zero CPP: its predicted hands usually remain separated from the object rather than forming a low-penetration grasp. IV and PD must therefore be interpreted together with contact.

HOI-TG’s stronger BEHAVE object placement is expected because its fixed 20-object training distribution provides object-specific pose and placement priors, whereas GraspHOI is category agnostic. However, HOI-TG does not model grasp-specific hand articulation. IV, average PD, and CPP therefore assess hand-object geometry without joint annotations. Lower IV or PD need not indicate a better grasp because both reward no-contact predictions: HOI-TG

has zero IV in 49.4% of frames, versus 28.5% for GraspHOI. At similar average PD, GraspHOI obtains higher CPP, indicating more frequent near-surface contact without excessive penetration.

4.4. Optimization-Based Methods

We compare with two optimization-based methods at complementary interaction scales. PICO [7] and GraspHOI are evaluated on PICO-db using IV, PD, CPP, and projected-hand coverage. Hand MPJPE is omitted because PICO-db does not provide posed 3D hand joints. We additionally evaluate EasyHOI [26], an optimization-based hand-object reconstruction method, on ARCTIC and PGG. In these full-body images, EasyHOI struggles with low-resolution evidence, particularly on PGG, where hands and objects occupy very few pixels. Its per-image camera estimate degenerates on PGG to a median 150° field of view, coinciding with low projected-hand coverage. Because EasyHOI reconstructs one hand with its own camera, PA-MPJPE is computed on the same successfully reconstructed hand instances and similarity-aligned per hand. Table 3 summarizes the comparison.

4.5. Qualitative Results

Figure 3 compares representative reconstructions. In the shown examples, GraspHOI more closely matches the observed body pose, object geometry and scale, and articulated grasp. PICO [7] shows large body-pose and object-scale errors. Its retrieved contact does not optimize finger articulation against the reconstructed surface. Although HDM [56] uses a joint diffusion prior, it struggles with body pose and object geometry, failing to recover even the indistribution ball and box shapes. Its input formulation also requires full-body visibility. TeHOR [31] recovers reasonable body poses but produces large object-scale and placement errors. For the occluded examples, its TRELLIS stage reconstructs strongly deformed geometry. EasyHOI [26] begins from plausible hand and object estimates, yet its optimization becomes unstable when both occupy too few pixels to provide reliable refinement cues. Figure 1 further shows GraspHOI on diverse Internet images.

4.6. Ablation Study

Native versus transplanted hands. SAM 3D Body [63] predicts articulated hands natively, whereas GraspHOI replaces their articulation with hand-focused WiLoR [37] estimates. We compare the two choices on the same 3,591 matched ARCTIC frames in Table 4. The WiLoR transplant improves both wrist-relative accuracy and the Procrustes-aligned articulation diagnostic. In this setting, the hand-focused WiLoR estimate is a more accurate initialization than SAM 3D Body’s native hand decoder, supporting the transplant before grasp refinement.

Hand prediction	MPJPE (L/R) ↓	PA-MPJPE (L/R) ↓
SAM 3D native decoder	27.30 / 27.91	9.89 / 9.50
WiLoR transplant	23.46 / 25.25	7.39 / 7.10

Table 4. Hand-estimator ablation on ARCTIC frames before contact refinement. Values are in mm. L/R denotes left/right, and MPJPE is wrist relative.

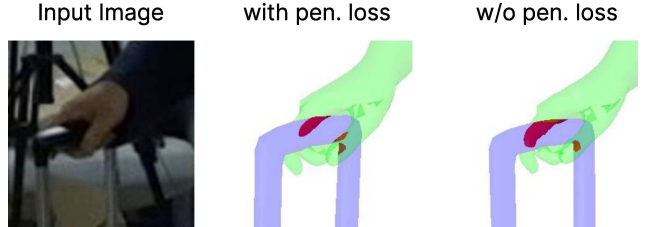


Figure 4. Effect of penetration loss during joint refinement. Red regions indicate hand-object intersection. The intersection volume decreases from 5.84 cm^3 without the penetration loss to 0.93 cm^3 with it.

Penetration loss. Reconstructed objects may be globally oversized or locally too thick near the fingers, causing penetration even after coarse placement. Unsigned contact attraction neither distinguishes interior from exterior pairs nor explicitly pushes fingers outward, making such configurations local minima. Our signed penetration loss reduces these intersections (Fig. 4), though occasionally at the cost of agreement with the input finger pose.

5. Conclusion

We introduced GraspHOI, a monocular framework that reconstructs a full-body 3D HOI and explicitly optimizes finger articulation against the object while operating category agnostically. It targets a failure especially visible in animation, game cutscenes, and virtual reality: globally plausible interactions whose fingers float, penetrate the object, or remain in a generic pose rather than forming a grasp.

GraspHOI reconstructs the object, body, and hands separately and aligns their scale and placement in a shared metric frame. The final optimization can then focus on arm and finger articulation, surface contact, and physical plausibility instead of re-estimating the entire scene.

Across object, joint-HOI, and grasp evaluations, GraspHOI improves relative placement, hand pose, and contact plausibility while preserving image alignment. Upstream errors can still propagate through refinement, manually weighted energies may require recalibration under domain shift, and the method reconstructs static interactions rather than motion. Detailed failure cases and limitations are provided in the supplementary material. Its hand-accurate, category-agnostic outputs can serve as assets or keyframes toward HOI video generation.

References

- [1] Bharat Lal Bhatnagar, Xianghui Xie, Ilya A. Petrov, Cristian Sminchisescu, Christian Theobalt, and Gerard Pons-Moll. Behave: Dataset and method for tracking human–object interactions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15935–15946, 2022.
- [2] Lukas Bierling, Davide Pasero, Fleur Dolmans, Helia Ghasemi, and Angelo Broere. DecoDINO: 3D human-scene contact prediction with semantic classification. *arXiv preprint arXiv:2510.23203*, 2025.
- [3] Federica Bogo, Angjoo Kanazawa, Christoph Lassner, Peter V. Gehler, Javier Romero, and Michael J. Black. Keep it smpl: Automatic estimation of 3d human pose and shape from a single image. In *Computer Vision – ECCV 2016*, pages 561–578. Springer, 2016.
- [4] Zhongang Cai, Wanqi Yin, Ailing Zeng, Chen Wei, Qingping Sun, Yanjun Wang, Hui En Pang, Haiyi Mei, Mingyuan Zhang, Lei Zhang, Chen Change Loy, Lei Yang, and Ziwei Liu. SMPLer-X: Scaling up expressive human pose and shape estimation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [5] Nicolas Carion, Laura Gustafson, Yuan-Ting Hu, Shoubhik Debnath, Ronghang Hu, Didac Suris, Chaitanya Ryali, Kalyan Vasudev Alwala, Haitham Khedr, Andrew Huang, et al. Sam 3: Segment anything with concepts. *arXiv preprint arXiv:2511.16719*, 2025.
- [6] Xingyu Chen, Fu-Jen Chu, Pierre Gleize, Kevin J. Liang, Alexander Sax, Hao Tang, Weiyao Wang, Michelle Guo, Thibaut Hardin, Xiang Li, Aohan Lin, Jia-Wei Liu, Ziqi Ma, Anushka Sagar, Bowen Song, Xiaodong Wang, Jianing Yang, Bowen Zhang, Piotr Dollár, Georgia Gkioxari, Matt Feiszli, and Jitendra Malik. SAM 3D: 3Dfy anything in images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7220–7232, 2026.
- [7] Alpár Cseke, Shashank Tripathi, Sai Kumar Dwivedi, Arjun S. Lakshmipathy, Agniv Chatterjee, Michael J. Black, and Dimitrios Tzionas. PICO: Reconstructing 3D people in contact with objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1783–1794, 2025.
- [8] Ahmad Darkhalil, Dima Damen, and David Fouhey. Improving and evaluating hand-object interaction detection. *arXiv preprint arXiv:2606.17384*, 2026.
- [9] Matt Deitke, Dustin Schwenk, Jordi Salvador, Luca Weihs, Oscar Michel, Eli VanderBilt, Ludwig Schmidt, Kiana Ehsani, Aniruddha Kembhavi, and Ali Farhadi. Objaverse: A universe of annotated 3D objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 13142–13153, 2023.
- [10] Laura Downs, Anthony Francis, Nate Koenig, Brandon Kinman, Ryan Hickman, Krista Reymann, Thomas B. McHugh, and Vincent Vanhoucke. Google scanned objects: A high-quality dataset of 3D scanned household items. In *2022 IEEE International Conference on Robotics and Automation (ICRA)*, pages 2553–2560, 2022.
- [11] Sai Kumar Dwivedi, Dimitrije Antić, Shashank Tripathi, Omid Taheri, Cordelia Schmid, Michael J Black, and Dimitrios Tzionas. InteractVLM: 3D interaction reasoning from 2D foundational models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 22605–22615, 2025.
- [12] Zicong Fan, Omid Taheri, Dimitrios Tzionas, Muhammed Kocabas, Manuel Kaufmann, Michael J. Black, and Otmar Hilliges. ARCTIC: A dataset for dexterous bimanual hand-object manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 12943–12954, 2023.
- [13] Yao Feng, Vasileios Choutas, Timo Bolkart, Dimitrios Tzionas, and Michael J. Black. Pixie: Collaborative regression of expressive bodies using moderation. In *Proceedings of the IEEE/CVF International Conference on 3D Vision (3DV)*, pages 792–804, 2021.
- [14] Aaron Ferguson, Ahmed A. A. Osman, Berta Bescos, Carsten Stoll, Chris Twigg, Christoph Lassner, David Otte, Eric Vignola, Fabian Prada, Federica Bogo, Igor Santesteban, Javier Romero, Jenna Zarate, Jeongseok Lee, Jinhyung Park, Jinlong Yang, John Doublestein, Kishore Venkateshan, Kris Kitani, Ladislav Kavan, Marco Dal Farra, Matthew Hu, Matthew Cioffi, Michael Fabris, Michael Ranieri, Mohammad Modarres, Petr Kadlec, Rawal Khiradkar, Rinat Abdrashitov, Romain Prévost, Roman Rajbhandari, Ronald Mallet, Russell Pearsall, Sandy Kao, Sanjeev Kumar, Scott Parrish, Shou-I Yu, Shunsuke Saito, Takaaki Shiratori, Te-Li Wang, Tony Tung, Yichen Xu, Yuan Dong, Yuhua Chen, Yuanlu Xu, Yuting Ye, and Zhongshi Jiang. MHR: Momentum human rig, 2025.
- [15] Yicong Hong, Kai Zhang, Jiuxiang Gu, Sai Bi, Yang Zhou, Difan Liu, Feng Liu, Kalyan Sunkavalli, Trung Bui, and Hao Tan. LRM: Large reconstruction model for single image to 3D. *arXiv preprint arXiv:2311.04400*, 2023.
- [16] Team Hunyuan3D, Bowen Zhang, Chunchao Guo, Haolin Liu, Hongyu Yan, Huiwen Shi, Jingwei Huang, Junlin Yu, Kunhong Li, Penghao Wang, et al. Hunyuan3d-omni: A unified framework for controllable generation of 3d assets. *arXiv preprint arXiv:2509.21245*, 2025.
- [17] Angjoo Kanazawa, Michael J. Black, David W. Jacobs, and Jitendra Malik. End-to-end recovery of human shape and pose. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7122–7131, 2018.
- [18] Muhammed Kocabas, Chun-Hao P. Huang, Otmar Hilliges, and Michael J. Black. Pare: Part attention regressor for 3d human body estimation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11127–11137, 2021.
- [19] Nikos Kolotouros, Georgios Pavlakos, Michael J. Black, and Kostas Daniilidis. Learning to reconstruct 3d human pose and shape via model-fitting in the loop. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 2252–2261, 2019.
- [20] Zeqiang Lai, Yunfei Zhao, Haolin Liu, Zibo Zhao, Qingxiang Lin, Huiwen Shi, Xianghui Yang, Mingxin Yang, Shuhui

- Yang, Yifei Feng, et al. Hunyuan3d 2.5: Towards high-fidelity 3d assets generation with ultimate details. *arXiv preprint arXiv:2506.16504*, 2025.
- [21] Ao Li, Jinpeng Liu, Yixuan Zhu, and Yansong Tang. Score-hoi: Physically plausible reconstruction of human-object interaction via score-guided diffusion. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2025.
- [22] Zhihao Li, Jianzhuang Liu, Zhensong Zhang, Songcen Xu, and Youliang Yan. Cliff: Carrying location information in full frames into human pose and shape estimation. In *Computer Vision – ECCV 2022*. Springer, 2022.
- [23] Chen-Hsuan Lin, Jun Gao, Luming Tang, Towaki Takikawa, Xiao-hui Zeng, Xun Huang, Karsten Kreis, Sanja Fidler, Ming-Yu Liu, and Tsung-Yi Lin. Magic3d: High-resolution text-to-3d content creation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 300–309, 2023.
- [24] Minghua Liu, Ruoxi Shi, Linghao Chen, Zhuoyang Zhang, Chao Xu, Xinyue Wei, Hansheng Chen, Chong Zeng, Jiayuan Gu, and Hao Su. One-2-3-45++: Fast single image to 3d objects with consistent multi-view generation and 3d diffusion. *arXiv preprint arXiv:2311.07885*, 2023.
- [25] Minghua Liu, Chao Xu, Haian Jin, Linghao Chen, Mukund Varma T., Zexiang Xu, and Hao Su. One-2-3-45: Any single image to 3d mesh in 45 seconds without per-shape optimization. *Advances in Neural Information Processing Systems (NeurIPS 2023)*, 36, 2024.
- [26] Yumeng Liu, Xiaoxiao Long, Zemin Yang, Yuan Liu, Marc Habermann, Christian Theobalt, Yuexin Ma, and Wenping Wang. EasyHOI: Unleashing the power of large models for reconstructing hand-object interactions in the wild. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7037–7047, 2025.
- [27] Xiaoxiao Long, Yuan-Chen Guo, Cheng Lin, Wenping Wang, and Christian Theobalt. Wonder3d: Single image to 3d using cross-domain diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9970–9980, 2024.
- [28] Matthew Loper et al. SMPL: A skinned multi-person linear model. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 34(6):248:1–248:16, 2015.
- [29] Luke Melas-Kyriazi, Christian Rupprecht, and Andrea Vedaldi. Pc²: Projection-conditioned point cloud diffusion for single-image 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023.
- [30] Hyeonjin Nam, Daniel Sungho Jung, Gyeongsik Moon, and Kyoung Mu Lee. Joint reconstruction of 3d human and object via contact-based refinement transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- [31] Hyeonjin Nam, Daniel Sungho Jung, and Kyoung Mu Lee. TeHOR: Text-guided 3d human and object reconstruction with textures. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7100–7110, 2026.
- [32] Priyanka Patel and Michael J. Black. Camerahr: Aligning people with perspective, 2024. *arXiv preprint*. Accepted to 3DV 2025.
- [33] Georgios Pavlakos, Vasileios Choutas, Nima Ghorbani, Timo Bolkart, Ahmed A.A. Osman, Dimitrios Tzionas, and Michael J. Black. Expressive body capture: 3d hands, face, and body from a single image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [34] Ilya A Petrov, Riccardo Marin, Julian Chibane, and Gerard Pons-Moll. Object pop-up: Can we infer 3d objects and their poses from human interactions alone? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4726–4736, 2023.
- [35] Ilya A Petrov, Riccardo Marin, Julian Chibane, and Gerard Pons-Moll. TriDi: Trilateral diffusion of 3D humans, objects, and interactions. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 5523–5535, 2025.
- [36] Ben Poole, Ajay Jain, Jonathan T. Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022.
- [37] Rolandos Alexandros Potamias, Jinglei Zhang, Jiankang Deng, and Stefanos Zafeiriou. Wilor: End-to-end 3d hand localization and reconstruction in-the-wild, 2024.
- [38] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models, 2021.
- [39] Javier Romero, Dimitrios Tzionas, and Michael J. Black. Embodied hands: Modeling and capturing hands and bodies together. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 36(6):245:1–245:17, 2017.
- [40] Roey Ron, Guy Tevet, Haim Sawdayee, and Amit H Bermano. Hoidini: Human-object interaction through diffusion noise optimization. *arXiv preprint arXiv:2506.15625*, 2025.
- [41] Yu Rong, Takaaki Shiratori, and Hanbyul Joo. Frankmocap: A monocular 3d whole-body pose estimation system via regression and integration. In *Proceedings - 2021 IEEE/CVF International Conference on Computer Vision Workshops (ICCVW)*, pages 1749–1759, 2021.
- [42] István Sárádi and Gerard Pons-Moll. Neural localizer fields for continuous 3d human pose and shape estimation. In *Advances in Neural Information Processing Systems*, pages 140032–140065. Curran Associates, Inc., 2024.
- [43] Omid Taheri, Nima Ghorbani, Michael J. Black, and Dimitrios Tzionas. GRAB: A dataset of whole-body human grasping of objects. In *European Conference on Computer Vision (ECCV)*, pages 581–600, 2020.
- [44] Jiaxiang Tang, Jiawei Ren, Hang Zhou, Ziwei Liu, and Gang Zeng. Dreamgaussian: Generative gaussian splatting for efficient 3d content creation. *arXiv preprint arXiv:2309.16653*, 2023.
- [45] Tencent Hunyuan3D Team. Hunyuan3d 2.1: From images to high-fidelity 3d assets with production-ready pbr material, 2025.

- [46] Tencent Hunyuan3D Team. Hunyuan3d 2.0: Scaling diffusion models for high resolution textured 3d assets generation, 2025.
- [47] Dmitry Tochilkin, David Pankratz, Zexiang Liu, Zixuan Huang, Adam Letts, Yangguang Li, Ding Liang, Christian Laforte, Varun Jampani, and Yan-Pei Cao. TripoSR: Fast 3D object reconstruction from a single image. *arXiv preprint arXiv:2403.02151*, 2024.
- [48] Shashank Tripathi, Agniv Chatterjee, Jean-Claude Passy, Hongwei Yi, Dimitrios Tzionas, and Michael J Black. DECO: Dense estimation of 3D human-scene contact in the wild. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 8001–8013, 2023.
- [49] Ruicheng Wang, Sicheng Xu, Yue Dong, Yu Deng, Jianfeng Xiang, Zelong Lv, Guangzhong Sun, Xin Tong, and Jiaolong Yang. Moge-2: Accurate monocular geometry with metric scale and sharp details, 2025.
- [50] Zhenrong Wang, Qi Zheng, Sihan Ma, Maosheng Ye, Yibing Zhan, and Dongjiang Li. End-to-end hoi reconstruction transformer with graph-based encoding (hoi-tg). In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) 2025*, 2025. *arXiv preprint arXiv:2503.06012*.
- [51] Bowen Wen, Wei Yang, Jan Kautz, and Stan Birchfield. Foundationpose: Unified 6d pose estimation and tracking of novel objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17868–17879, 2024.
- [52] Jianfeng Xiang, Xiaoxue Chen, Sicheng Xu, Ruicheng Wang, Zelong Lv, Yu Deng, Hongyuan Zhu, Yue Dong, Hao Zhao, Nicholas Jing Yuan, and Jiaolong Yang. Native and compact structured latents for 3D generation. *arXiv preprint arXiv:2512.14692*, 2025.
- [53] Jianfeng Xiang, Zelong Lv, Sicheng Xu, Yu Deng, Ruicheng Wang, Bowen Zhang, Dong Chen, Xin Tong, and Jiaolong Yang. Structured 3D latents for scalable and versatile 3D generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 21469–21480, 2025.
- [54] Xianghui Xie, Bharat Lal Bhatnagar, and Gerard Pons-Moll. Chore: Contact, human and object reconstruction from a single rgb image. In *European Conference on Computer Vision (ECCV)*. Springer, 2022.
- [55] Xianghui Xie, Bharat Lal Bhatnagar, and Gerard Pons-Moll. Visibility aware human-object interaction tracking from single rgb camera. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, Vancouver, Canada, 2023.
- [56] Xianghui Xie, Bharat Lal Bhatnagar, Jan Eric Lenssen, and Gerard Pons-Moll. Template free reconstruction of human-object interaction with procedural interaction generation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, Seattle, WA, USA, 2024.
- [57] Xianghui Xie, Bharat Lal Bhatnagar, and Gerard Pons-Moll. ProciGen: A large-scale synthetic dataset of human-object interactions. Dataset, MPI-INF / Project Page, 2024. 1 M+ images with 21k+ objects; described in “Template Free Reconstruction of Human-object Interaction with Procedural Interaction Generation”.
- [58] Xianghui Xie, Jan Eric Lenssen, and Gerard Pons-Moll. Intertrack: Tracking human object interaction without object templates. In *International Conference on 3D Vision (3DV)*, 2025.
- [59] Xianghui Xie, Bowen Wen, Yan Chang, Hesam Rabeti, Jiefeng Li, Ye Yuan, Gerard Pons-Moll, and Stan Birchfield. CARI4D: Category agnostic 4D reconstruction of human-object interaction. *arXiv preprint arXiv:2512.11988*, 2025.
- [60] Gangwei Xu, Haotong Lin, Hongcheng Luo, Xianqi Wang, Jingfeng Yao, Lianghui Zhu, Yuechuan Pu, Cheng Chi, Haiyang Sun, Bing Wang, Guang Chen, Hangjun Ye, Sida Peng, and Xin Yang. Pixel-perfect depth with semantics-prompted diffusion transformers. *arXiv preprint arXiv:2510.07316*, 2025.
- [61] Jiale Xu, Weihao Cheng, Yiming Gao, Xintao Wang, Shenghua Gao, and Ying Shan. Instantmesh: Efficient 3d mesh generation from a single image with sparse-view large reconstruction models. *arXiv preprint arXiv:2404.07191*, 2024.
- [62] Xianghui Yang, Huiwen Shi, Bowen Zhang, Fan Yang, Jiacheng Wang, Hongxu Zhao, Xinhai Liu, Xinzhou Wang, Qingxiang Lin, Jiaao Yu, et al. Hunyuan3d 1.0: A unified framework for text-to-3d and image-to-3d generation. *arXiv preprint arXiv:2411.02293*, 2024.
- [63] Xitong Yang, Devansh Kukreja, Don Pinkus, Taosha Fan, Jinhung Park, Soyong Shin, Jinkun Cao, Jia-Wei Liu, Nicolás Ugrinov, Anushka Sagar, Jitendra Malik, Matt Feiszli, Piotr Dollár, and Kris Kitani. SAM 3D Body: Robust full-body human mesh recovery. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7209–7219, 2026.
- [64] Yuhang Yang, Wei Zhai, Hongchen Luo, Yang Cao, and Zheng-Jun Zha. Lemon: Learning 3d human-object interaction relation from 2d images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16284–16295, 2024.
- [65] Wanqi Yin, Zhongang Cai, Ruizi Wang, Ailing Zeng, Chen Wei, Qingping Sun, Haiyi Mei, Yanjun Wang, Hui En Pang, Mingyuan Zhang, Lei Zhang, Chen Change Loy, Atsushi Yamashita, Lei Yang, and Ziwei Liu. SMPLest-X: Ultimate scaling for expressive human pose and shape estimation, 2025.
- [66] Hongwen Zhang, Yating Tian, Xinchu Zhou, Wanli Ouyang, Yebin Liu, Limin Wang, and Zhenan Sun. Pymaf: 3d human pose and shape regression with pyramidal mesh alignment feedback loop. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11446–11456, 2021.
- [67] Hongwen Zhang, Yating Tian, Yuxiang Zhang, Mengcheng Li, Liang An, Zhenan Sun, and Yebin Liu. PyMAF-X: Towards well-aligned full-body model regression from monocular images. *IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI)*, 2023.
- [68] Jinlu Zhang, Yixin Chen, Zan Wang, Jie Yang, Yizhou Wang, and Siyuan Huang. Interactanything: Zero-shot human ob-

- ject interaction synthesis via llm feedback and object affordance parsing. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 7015–7025, 2025.
- [69] Jason Y. Zhang, Sam Pepose, Hanbyul Joo, Deva Ramanan, Jitendra Malik, and Angjoo Kanazawa. Perceiving 3d human-object spatial arrangements from a single image in the wild. In *European Conference on Computer Vision (ECCV)*, 2020.
- [70] Mengqi Zhang, Yang Fu, Zheng Ding, Sifei Liu, Zhuowen Tu, and Xiaolong Wang. Hoidiffusion: Generating realistic 3d hand-object interaction data. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8521–8531, 2024.
- [71] Xiaohan Zhang, Bharat Lal Bhatnagar, Sebastian Starke, Ilya Petrov, Vladimir Guzov, Helisa Dhamo, Eduardo Pérez-Pellitero, and Gerard Pons-Moll. Force: Physics-aware human-object interaction. In *2025 International Conference on 3D Vision (3DV)*, pages 1473–1486. IEEE, 2025.
- [72] Zhenhao Zhang, Ye Shi, Lingxiao Yang, Suting Ni, Qi Ye, and Jingya Wang. Openhoi: Open-world hand-object interaction synthesis with multimodal large language model. *arXiv preprint arXiv:2505.18947*, 2025.

GraspHOI: Full-Body 3D Human-Object Reconstruction with Finger-Level Grasps from a Single In-the-Wild Image

Supplementary Material

Semin Kim Haechan Shin Jongyoo Kim
Yonsei University
{hohosemin, haechanshin, jy.kim}@yonsei.ac.kr

This supplementary material documents implementation and evaluation details omitted from the main paper for space. We specify the model conversions, amodal conditioning, metric placement, contact construction, optimization schedules, dataset preparation, baseline preprocessing, and evaluation metrics. We also present representative failures of the current pipeline.

S1. Additional Design Details

S1.1. Contact modeling

Our method assumes that the target interaction contains at least one grasping hand, but it does not force every detected hand to contact the object. HOI-DETR [8] predicts hand-object links, which we associate with left and right SMPL-H [39] hands and with the target object mask. Amodal overlap then rejects geometrically inconsistent links. For retained contacts, palmar ray intersections and the visible-object occlusion order determine fixed one-to-one hand-object pairs. This separates semantic contact detection from geometric contact localization.

S1.2. Input and hyperparameters

Our method requires a visible object mask and an object-name prompt in addition to the RGB image. The prompt is used only by the open-vocabulary inpainting stage and never selects object geometry or contact. Human boxes, hand boxes, and contact decisions are inferred automatically. No human mask or contact map is supplied.

The same hyperparameters are used across all datasets. Section S2 reports the optimization schedules and fallback behavior used in our experiments.

S1.3. MHR to SMPL-H conversion

SAM 3D Body [63] is run with frozen weights in its body-only inference setting. It returns a camera-space MHR [14] mesh. We follow the official MHR-to-SMPL-X conversion procedure, retaining its surface mapping and staged fitting but replacing the destination with a neutral SMPL-H model. This substitution is possible because SMPL and SMPL-H share the 6,890-vertex body topology [28], while SMPL-H

exposes the body-and-hand pose interface expected by the fitter. The resulting parameters provide global orientation, the 21-joint body pose, shape, and translation. We discard the fitted finger articulation and insert neutral hand poses before the independent WiLoR initialization described below. Thus, SAM 3D Body supplies the full-body and camera-space initialization, while finger pose comes from the hand-focused estimator.

S1.4. MANO to SMPL-H pose transfer

WiLoR [37] predicts MANO [39] global orientation and 15 articulated finger rotations. We convert the global hand orientation to the local SMPL-H wrist frame using the estimated global, shoulder, and elbow rotations, as defined in Eq. (1) of the main paper. The compatible MANO finger rotations are then inserted into the corresponding SMPL-H hand-pose parameters while body shape remains fixed. No MANO vertices are copied or fitted to the SMPL-H surface. The final mesh is generated by the standard SMPL-H forward pass.

S2. Details on Our Pipeline

This section specifies the input assumptions, initialization procedures, fallbacks, and optimization schedules abbreviated in the main paper.

S2.1. Inputs and shared metric depth

The pipeline receives an RGB image I , a binary mask S_{vis} of the visible object, and an open-vocabulary object name used only to prompt amodal inpainting. The object name never selects a mesh, category model, or pose template. HOI-DETR [8] is applied to I to obtain hand boxes, first-object boxes, and hand-object interaction links.

We run the MoGe-2-conditioned version of Pixel-Perfect Depth [49, 60]. PPD produces a sharp relative depth map, while MoGe-2 supplies metric depth and camera-aware semantic features. Following the released PPD point-cloud procedure, the relative prediction is aligned to the MoGe-2 metric depth with RANSAC. We then align this map to the reconstructed human’s global gauge. For every valid fitted

SMPL-H vertex v projecting to pixel x_v , we compute $\gamma = \text{median}_v[v_z/D(x_v)]$ and apply $D \leftarrow \gamma D$ once. We use the resulting human-aligned map for amodal masking, object scaling, FoundationPose registration, and contact-depth alignment. Camera intrinsics are estimated with Human-FoV, released with CameraHMR [32], and shared across all renderers.

S2.2. Occlusion-localized amodal conditioning

Single-view completion is necessarily generative: it predicts a plausible continuation rather than recovering unobserved ground truth. Our goal is therefore to preserve the observed object interior and restrict generation to a small region that can genuinely contain an occluder.

Let $B_\delta(S_{\text{vis}})$ be the visible-object bounding box expanded by δ , where δ is 25% of the box diagonal and is clamped to $[8, 60]$ pixels. We estimate the far visible-object depth by

$$z_{\text{far}} = P_{90}\{D(x) : x \in S_{\text{vis}}\}. \quad (\text{S1})$$

Here P_{90} denotes the 90th percentile of the valid depths in the set. Pixels deeper than z_{far} are observed background and must not be inpainted. The initial occluder region is therefore

$$S_{\text{occ}} = (B_\delta(S_{\text{vis}}) \setminus S_{\text{vis}}) \cap \{x : 0 < D(x) \leq z_{\text{far}}\}. \quad (\text{S2})$$

We dilate this mask only in a narrow band adjacent to the object and include a two-pixel object-side rim at the object-occluder boundary. Stable Diffusion may repaint this narrow rim to suppress color leakage from the occluder. Visible pixels away from the rim remain fixed. This supplies enough support for the generated continuation without allowing the object to grow into distant background or invalid-depth regions.

We crop a square around $S_{\text{vis}} \cup S_{\text{occ}}$ and replace all non-object pixels by a fixed gray texture. Stable Diffusion inpainting [38] receives this image, S_{occ} , and the prompt a [object name]. We use the public Stable-Diffusion-1.5 inpainting checkpoint. A foreground remover extracts the generated object from the gray field, and its alpha is unioned with S_{vis} so that visible object support cannot be discarded. This yields the amodal cutout I_a and silhouette S_a shown in Fig. S8.

S2.3. Human-hand assembly

HOI-DETR hand boxes are assigned to left and right by overlap with projected fitted SMPL-H hand boxes. WiLoR is then run on each associated crop. The two-stage alignment uses Adam for 60 iterations at learning rate 10^{-2} to rotate the SMPL elbow until the projected wrist matches the WiLoR wrist. After converting the MANO global orientation into the local wrist frame and transferring MANO finger rotations to SMPL-H, we optimize only the wrist rotation for 100 iterations at learning rate 3×10^{-2} . The latter

loss is the squared reprojection error of the 15 SMPL-H finger joints against WiLoR 2D keypoints. The SMPL shape coefficients are fixed throughout.

S2.4. Metric object reconstruction

We normally use Hunyuan3D 2.1 [45] to generate shape and texture from I_a . Because single-image generation can occasionally collapse an object into a thin slab, we retry evidently degenerate outputs using a small set of deterministic matte and seed variations and retain the least-collapsed mesh. For approximately round image evidence that remains degenerate, Hunyuan3D 2.0 [46] serves as a final reconstruction fallback. The selected texture is consumed by FoundationPose rather than being used only for visualization.

For metric scale, we back-project every valid depth pixel $x = (u, v)$ inside S_{vis} using the camera intrinsics:

$$\mathcal{P} = \{D(x)K^{-1}[u, v, 1]^\top : x \in S_{\text{vis}}\}. \quad (\text{S3})$$

Mask-boundary errors can create distant points, so we apply robust depth filtering followed by statistical spatial outlier removal before estimating scale.

Let $c_{\mathcal{P}}$ and c_m be the coordinate-wise medians of the filtered cloud and generated mesh vertices, respectively. Their enclosing radii and the initial scale are

$$\begin{aligned} r_{\mathcal{P}} &= \max_{p \in \mathcal{P}} \|p - c_{\mathcal{P}}\|_2, & r_m &= \max_{v \in V_o^0} \|v - c_m\|_2, \\ s_{\text{sph}} &= r_{\mathcal{P}}/r_m, & \tilde{V}_o^0 &= s_{\text{sph}} V_o^0. \end{aligned} \quad (\text{S4})$$

Unlike a projected bounding-box ratio, this statistic has no preferred image axis, although incomplete visible geometry can still bias it. If too few valid points remain, we instead match the amodal-mask extent at its median metric depth to the generated mesh extent.

Pose initialization. FoundationPose [51] requires RGB-D observations. We run PPD on the completed object and robustly align this relative depth to the scene depth over S_{vis} . The aligned object depth is pasted inside S_a , and the completed RGB is pasted into the corresponding image region. FoundationPose registers the textured generated mesh to this as-if-unoccluded RGB-D observation and initializes rotation and translation. Thus, FoundationPose receives the sphere-scaled mesh rather than estimating its metric scale.

If FoundationPose fails or returns an implausible depth or scale, we use a mask-centered initialization at the interacting-hand depth and match its projected scale to the object mask. For stable boundary gradients on small objects, the subsequent silhouette optimization uses a mask-centered square crop resized to 384^2 pixels, with focal length and principal point transformed to the crop camera.

We then optimize the object transform for 300 Adam iterations at learning rate 3×10^{-3} . The contour coefficient

increases linearly from 0.3 to 1.0. The remaining weights are exactly those in the object objective in the main paper. At the FoundationPose pose, a geometric-mean correction of the rendered-to-observed box width and height initializes the differentiable scale. The translation is adjusted to preserve the mesh center. We restore the iterate with the lowest sum of silhouette and contour losses. Final IoU below 0.7 flags unreliable placement but does not trigger a scale sweep, because projected silhouette cannot resolve the metric scale-depth ambiguity.

S2.5. Contact association

HOI-DETR predicts whether each detected hand is linked to a first object. We match that object box to S_a so that a hand manipulating a different object does not become a false contact. Each HOI-DETR hand is associated with the projected fitted SMPL-H left or right hand. As a geometric backstop, we demote a predicted contact when its hand box overlaps fewer than 25 pixels of S_a .

For a retained contact, we use the full SMPL-H hand region rather than a small set of fingertip or palm landmarks. Rays are cast through the intersection of the hand bounding region and S_a . Every ray-triangle intersection is snapped to its nearest hand vertex, after which the vertex normal is compared with the mean palm normal. Candidates on the dorsal side are removed. For each remaining palmar hand vertex, object vertices projecting to the same local ray are collected within a 6-pixel radius. The visible mask determines the relevant surface. A visible object pixel selects the far object surface, which faces a hand behind the object. An occluded object pixel selects the near surface, which faces a hand in front.

Occlusion-aware seating. The seated object is NV_o , where N is searched on a one-dimensional grid. The first pass minimizes the mean squared paired depth residual. If the seated mesh still penetrates the hand by more than 2 mm, a second pass adds an SDF penetration penalty with weight 20. This penalty is the mean squared depth of hand vertices inside the object. Both passes use four-level coarse-to-fine grid search. The first spans $[0.2c, 5c]$ around the median hand/object depth ratio c , and the penetration-aware pass spans $[0.5N_1, 1.6N_1]$ around the first-pass solution N_1 . The final hand and object indices form fixed one-to-one correspondences. When fewer than three reliable ray pairs are available, seating uses representative palm vertices and nearest-surface distance instead. Joint refinement likewise uses nearest-surface contact for any hand without enough fixed pairs, ensuring that sparse ray intersections do not remove its contact objective entirely.

S2.6. View-preserving joint refinement

The object orientation is frozen after object placement. A learnable scalar $s_o \in [0.95, 1.05]$ multiplies its camera-space vertices,

$$p_j^{(s_o)} = s_o p_j. \quad (S5)$$

Here p_j is camera-space object vertex j . Because perspective projection is homogeneous, this changes object depth and metric size while leaving the silhouette fixed. We define an SDF S_0 , positive outside and negative inside, once for the unscaled object. For any camera-space point p , the scaled SDF is evaluated without rebuilding the grid:

$$S_{s_o}(p) = s_o S_0\left(\frac{p}{s_o}\right). \quad (S6)$$

The fine joint stage optimizes shoulder, elbow, wrist, and MANO finger rotations, together with s_o , for 500 Adam iterations at learning rate 3×10^{-3} . Using the loss definitions in the main paper, its default objective is

$$\mathcal{L} = 0.01\mathcal{L}_{\text{kp}} + w_{\text{pen}}\mathcal{L}_{\text{pen}} + 100\mathcal{L}_{\text{reg}} + 3 \times 10^4\mathcal{L}_{\text{cont}}, \quad (S7)$$

where $w_{\text{pen}} = 3 \times 10^3$ for iterations 1-200 and 1.5×10^4 thereafter. Contact is enforced without a margin, while the penetration compliance margin is 2 mm. Geodesic regularization weights are 0.5 for arms and 0.3 for fingers. The finger angular barrier begins at 3° , uses power four, and has scale 20. The arm barrier is disabled by default because its 2D joint anchors already constrain image consistency.

When both hands contact the object, a coarse two-arm stage precedes the fine stage. It optimizes both shoulder-elbow-wrist chains for 500 iterations at learning rate 10^{-2} , with keypoint, penetration, contact, and regularization weights $(1, 10^4, 10^4, 100)$ for the first 200 iterations and penetration weight 5×10^4 thereafter. The coarse stage averages pair distances, whereas the fine stage uses the squared pair distances defined in the main paper. Finger rotations remain fixed during the coarse stage. The standard fine stage then updates both arms, both MANO hand poses, and the bounded object-depth scalar using the same fixed contact pairs.

S3. Dataset and Baseline Selection

S3.1. ProciGen-GRAB.

GRAB [43] provides metric SMPL-X [33] bodies, articulated hands, object trajectories, and contact annotations, but not captured RGB. We construct ProciGen-GRAB (PGG) by replacing the original BEHAVE [1] sequences in the ProciGen [57] renderer with GRAB interactions while retaining the ProciGen rendering configuration. GRAB supplies the posed body and hands together with the object trajectory, so their relative 3D configuration is preserved,

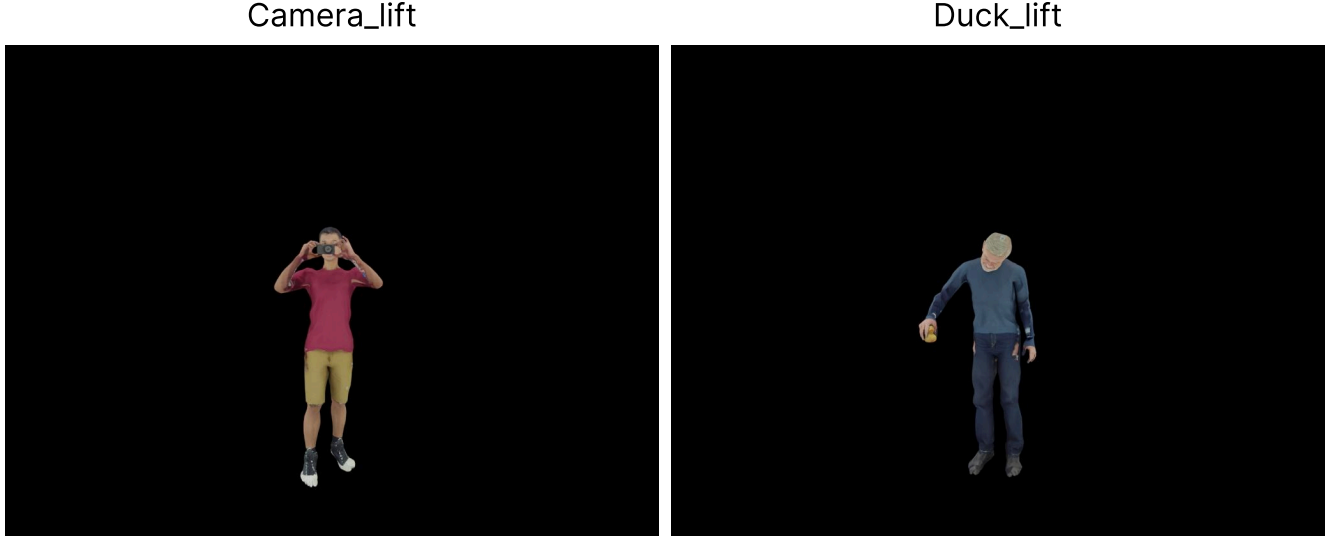


Figure S1. ProciGen-GRAB examples. The small people, hands, and objects in the frame are an intentional part of the dataset design.

while ProciGen supplies clothed human appearance and calibrated monocular views. This gives rendered images with direct 2D-3D correspondence and articulated-hand ground truth. We subsample PGG at 0.5 fps to approximately 4K frame-views. ARCTIC [12] is independently subsampled at the same rate to approximately 5K frame-views. As illustrated in Fig. S1, the small image footprint of the people, hands, and objects in PGG is intentional. PGG was designed to evaluate small hands and objects, complementing ARCTIC, whose objects are relatively large and whose hands are generally clearly visible.

S3.2. Dataset-specific comparisons.

Each baseline is evaluated where its representation and established protocol support a meaningful comparison. SAM 3D Objects [6] and GraspHOI are compared on ARCTIC and PGG for object shape and image alignment. For joint HOI reconstruction, HOI-TG [50] is evaluated with GraspHOI on BEHAVE, whereas HDM [56] and TeHOR [31] are evaluated with GraspHOI on ARCTIC and PGG. BEHAVE does not provide articulated-hand ground truth, so hand MPJPE is omitted from the HOI-TG comparison. To isolate interaction reconstruction and placement under HOI-TG’s template-based protocol, GraspHOI receives the same ground-truth BEHAVE object mesh as HOI-TG rather than reconstructing a new object instance.

TeHOR produces finite outputs for 85.5% of the evaluation inputs. Most failed cases occur when its detector finds no unique person or when a very small object crop cannot be voxelized by TRELLIS [53]. A small remainder comes from missing inputs or resource errors. We average the finite outputs and leave failed frames missing.

Video-based HOI methods generally assume temporal

consistency and use multi-frame evidence unavailable to single-shot methods. Supplying full clips would therefore give them additional input, while restricting them to one frame would depart from their intended protocol. Neither yields a controlled comparison. CARI4D [59] presents further incompatibilities. It assumes that the object is fully visible in the first frame, from which Hunyuan3D reconstructs its reference geometry, whereas objects in our in-the-wild images are predominantly occluded. ARCTIC is also unsuitable because its objects are articulated while CARI4D assumes rigid objects, and PGG/GRAB objects frequently fall below CARI4D’s object-size threshold, which is designed for larger objects. We therefore exclude video-based methods from the quantitative comparison.

For optimization-based reconstruction, PICO [7] and GraspHOI are evaluated on PICO-db using IV, PD, CPP, and projected-hand coverage. PICO requires contact maps, which PICO-db provides. PICO-db does not provide posed 3D hand joints, so we do not report hand MPJPE for this comparison. EasyHOI [26] and GraspHOI are evaluated on ARCTIC and PGG using hand MPJPE, IV, PD, CPP, and projected-hand coverage.

S3.3. Optimization-baseline protocols.

EasyHOI reconstructs a single hand per image. Its rows and the corresponding GraspHOI rows are therefore evaluated on the same recovered frames and contacting hands: 3,701 on ARCTIC and 2,254 on PGG. These are subsets of the 5,000 ARCTIC and 4,000 PGG samples, retaining only frames in which both methods recover the annotated contacting hand. IV is summed over the contacting hands within each sample, preserving a like-for-like comparison. We report Procrustes-aligned hand MPJPE for these rows

Method	Time per sample
GraspHOI (Ours)	124 s
EasyHOI	118 s
TeHOR	170 s
PICO	300-500 s
HDM	120 s
HOI-TG	0.2 s

Table S1. Per-sample runtime on a dedicated RTX 4090. All single values are means. PICO is reported as a range.

because EasyHOI estimates an independent camera for each image rather than using the dataset extrinsics. Its predicted hand may therefore differ from the dataset frame by an arbitrary rotation and scale even after wrist translation is removed. Per-hand similarity alignment isolates articulated pose from this coordinate-system ambiguity. On PICO-db, all metrics are paired over the 1,477 images reconstructed successfully by both methods. MPJPE is omitted because the dataset provides no posed 3D hand joints.

EasyHOI’s hand and object initialization can remain plausible on full-body images, but their small image regions provide weak evidence for its subsequent camera and object optimization. This is most pronounced on PGG, where the estimated field of view reaches a median of 150° , consistent with its low projected-hand coverage.

S3.4. Implementation and fairness.

We use released checkpoints and official inference settings without test-set fine-tuning. Methods requiring a visible-object mask receive the same mask, and methods requiring an object name receive the same dataset label. Any method-specific retrieval, generation, or test-time optimization remains part of that method’s official pipeline. All outputs are scored using our common implementation rather than values copied from the original papers.

S3.5. Runtime.

We measure per-image runtime with each method occupying a dedicated NVIDIA RTX 4090. GraspHOI typically requires 120-150 s. Two-hand cases take longer because they require an additional hand-optimization step. PICO varies substantially with object and mesh complexity, so we report its observed range rather than a potentially misleading mean.

S3.6. Surface and alignment metrics.

We uniformly sample 10K points from each available mesh surface. A predicted point cloud, such as HDM’s object, is sampled directly. Shape Chamfer distance (sCD) is the average of the two directed nearest-neighbor distances, and shape F-score (sF-sc) is the harmonic mean of thresholded

precision and recall. For the human, raw object, and combined H+O scores, we center each prediction and ground-truth scene at its own pelvis. The same translation is applied to both parts, so relative human-object placement remains in the metric. We use a 5 cm F-score threshold.

For object-only shape evaluation, each object is independently centered and scaled by its enclosing-sphere diameter. We compute both sCD and sF-sc_{norm} in this normalized space, using a threshold of 0.05 of the object diameter. The standalone SAM 3D Objects comparison instead removes only object-centroid translation and retains predicted rotation and scale. Unlike Procrustes alignment, it fits neither quantity. This standalone comparison uses a 2 cm sF-sc threshold on frames reconstructed by both methods. Visible-object 2D-IoU is always measured from the unaligned projection. Body MPJPE is pelvis-relative. The HOI and optimization-baseline tables report per-hand PA-MPJPE after similarity alignment over the wrist and 15 articulated finger joints of each annotated contacting hand. The hand-estimator ablation separately reports both wrist-relative MPJPE and PA-MPJPE before contact refinement.

S3.7. HDM fitting and scale alignment.

HDM reconstructs an up-to-scale human-object point cloud. For human mesh and joint metrics, we fit SMPL-H to its human points using the correspondence autoencoder and fitting procedure released with InterTrack [58]. We then resolve the one global gauge per frame from the common 22-joint SMPL body skeleton:

$$s_i = \frac{\sum_{(j,k) \in \mathcal{B}} \|J_{i,j}^{\text{GT}} - J_{i,k}^{\text{GT}}\|_2}{\sum_{(j,k) \in \mathcal{B}} \|J_{i,j}^{\text{HDM}} - J_{i,k}^{\text{HDM}}\|_2}, \quad (\text{S8})$$

where $\mathcal{B}$ contains the 21 SMPL body bones. Summed bone length is pose-invariant, unlike a posed bounding-box height. We center the HDM scene at its predicted pelvis and multiply both the human and object by the same s_i . The ground-truth scene is centered at its own pelvis. We apply no rotation, ICP, or object-specific scale/translation alignment. Thus, HDM retains its predicted relative human-object scale and placement.

S4. Hand and Contact Metrics

We provide additional details for the hand-object metrics used in our experiments.

Intersection Volume and Penetration Depth. We evaluate only the hand or hands marked as contacting in the dataset annotation. Intersection volume (IV) is the common occupied volume of the object and wrist-capped hand meshes on a deterministic 5 mm voxel grid, reported in cm^3 . Penetration depth (PD) is the per-frame mean depth of all penetrating vertices in the 778-vertex hand region, computed from winding-number signed distance and reported



Figure S2. Object-reconstruction comparison on complex GSO objects. Hunyuan3D 2.1 remains faithful to the input geometry and attempts to reproduce its texture, whereas SAM 3D Objects is less faithful to the input and often produces broken textures.

in mm. Frames without penetration contribute zero. Boundary loops in the object and wrist are capped only for inside-outside and volume queries. The original hand vertices are retained for PD and CPP.

Projected-hand coverage. For a projected contacting-hand region P_h and reference image region S_h , coverage is $|P_h \cap S_h|/|S_h|$. Thus, it measures how much of the observed hand is explained by the projected mesh. As a recall-like measure, it is interpreted together with the physical grasp metrics. On ARCTIC and PGG, S_h is the full ground-truth SMPL-X hand silhouette rendered with the dataset camera. Object occlusion is not subtracted. EasyHOI is projected with its own estimated camera, while GraspHOI uses its reconstructed camera. On PICO-db, which provides neither posed hand joints nor hand masks, we obtain independent visible-hand segmentations using SAM3 [5], prompted with “left hand” and “right hand.” Samples with a missing side-specific mask, an empty mask, or unresolved duplicate left/right predictions in a two-hand interaction are excluded. The retained PICO-db set contains 1,477 paired outputs with contact annotations, valid geometry, and valid hand masks.

For both SMPL-H and SMPL-X, we select hand vertices using the same semantic rule: cumulative skinning weight greater than 0.5 for the wrist and 15 articulated hand joints. This produces a 778-vertex region per side. Each method is evaluated in its native topology. No SMPL-H-to-SMPL-X surface conversion is applied during scoring.

Contact-Penetration Plausibility (CPP). CPP complements IV and PD by distinguishing low penetration caused by plausible near-surface contact from low penetration caused by a detached hand. Let $d(v)$ be the signed distance from a hand vertex to the object, positive outside. We define

$$\text{CPP} = 100 \frac{|\{v : -2 \leq d(v) \leq 10\}|}{|\{v : d(v) \leq 10\}|}, \quad (\text{S9})$$

with distances in mm and CPP set to zero when the denominator is empty. The -2 mm tolerance permits slight apparent compression at contact, while the 10 mm outer band requires the hand to remain close to the object. CPP uses the same 778-vertex hand region as PD.



Figure S3. Hunyuan3D 2.1 reconstruction failures. Generated objects may become elongated rods, flattened, or otherwise distorted. The model can also hallucinate a floor and merge it with the object geometry.



Figure S4. Object-pose initialization failure. FoundationPose can return an incorrect pose when the generated mesh differs from the image evidence or its initial metric scale is inaccurate.

S5. Extended Qualitative Results

Figures S6 and S7 extend the qualitative evaluation to additional interactions. The first comparison includes TeHOR. The second omits TeHOR because it did not return valid reconstructions for those samples when the person was not reliably detected or was heavily occluded.

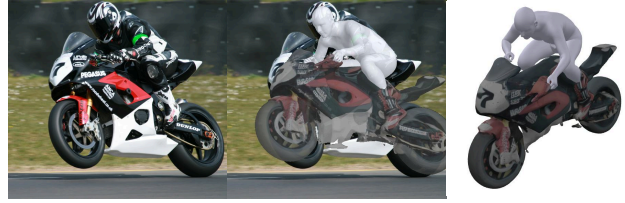


Figure S5. Joint-optimization failure. Because refinement freezes the body outside the optimized arm-hand chains, a large body-contacting object can penetrate the body.

S6. Additional Object Recon Comparison

Figure S2 extends the quantitative object-reconstruction comparison in the main paper. The inputs are rendered views of two complex Google Scanned Objects (GSO) [10], selected because their complex geometry and fine texture make instance fidelity readily visible. Hunyuan3D 2.1 remains more faithful to these details and attempts to reproduce the input texture, whereas SAM 3D Objects departs from the observed structure and produces fragmented textures. Its outputs are also sometimes non-watertight. This is critical for GraspHOI because the penetration objective queries an object signed distance field, whose inside/outside sign is unreliable for an open surface.

S7. Failure Cases and Limitations

We present representative failures caused by upstream initialization and by the subsequent optimization stages. Because the pipeline is decoupled, an error in one reconstructed component can remain geometrically plausible in the image while becoming incompatible with contact in 3D.

S7.1. Object Reconstruction Failures

Hunyuan3D 2.1 [45] does not always preserve plausible object geometry. As shown in Fig. S3, its outputs may be elongated, flattened, or strongly distorted, and may include an artificial floor. These errors directly affect the object surface used by the subsequent placement and contact stages and account for most full-pipeline reconstruction failures. For dataset construction, we therefore recommend supervising the generated meshes: users can inspect failed reconstructions and retry them with different seeds, or use a vision-language model to screen candidates and trigger regeneration.

S7.2. Object Pose Initialization Failures

The observed FoundationPose [51] failures primarily arise from two sources. First, the generated mesh may not match the object in the input closely enough for reliable registration. Second, FoundationPose is sensitive to object-scale initialization, while our monocular scale estimate does not

always recover the correct metric size. Either mismatch can lead to an incorrect object pose, as shown in Fig. S4.

S7.3. Joint Optimization Failures

Joint refinement freezes the body outside the optimized arm-hand chains while placing greater emphasis on hand alignment. This is effective for grasp-centric interactions but cannot correct the body around a large body-contacting object. Such objects may therefore penetrate the fixed body even when the hands are plausibly aligned, as shown in Fig. S5.

S7.4. Current scope

GraspHOI targets static, grasp-centric interactions with at least one contacting hand. It does not model temporal motion, deformable-object physics, or large-scale body-object support such as sitting and leaning. It also requires a visible-object mask and a noun prompt for amodal inpainting. Errors in SAM 3D Body [63], WiLoR [37], depth estimation, amodal conditioning, object reconstruction, or contact detection can propagate into the final scene. In particular, monocular symmetry and scale-depth ambiguity may survive image-space alignment, while an incorrect generated thickness can make the image evidence incompatible with a collision-free grasp. Finally, the manually weighted refinement objectives may require recalibration under a substantial domain shift.

S8. Licensing Details

- “*Basketball portrait #2*” by rady one is licensed under CC BY 2.0.
- “*Mariachi singer, Chicago, Illinois, USA - 20060814*” by Codo is licensed under CC BY-SA 2.0.
- “*pink guns*” by Lori Elizabeth is licensed under CC BY-NC-SA 2.0.
- “*the pineapple*” by sunshinecity is licensed under CC BY 2.0.
- “*Tim Beavers lead guitar & vocalist for PBR (People’s Blues of Richmond) #rva*” by Sky Noir is licensed under CC BY-NC 2.0.
- “*Technic Toys Gun Master Series QSZ92 Pistol*” by ed-wicks_toybox is licensed under CC BY-NC 2.0.


Dataset examples are drawn from ProciGen-GRAB [43, 57], PICO-db [7], and GSO [10]. The GSO assets used in Fig. S2 are released under CC BY 4.0. Internet images used in the retained figures are listed above.



Figure S6. Extended qualitative comparison with HDM, PICO, TeHOR, and EasyHOI.





Figure S7. Additional qualitative comparison with HDM, PICO, and EasyHOI. TeHOR is omitted because it did not return valid reconstructions for these samples.

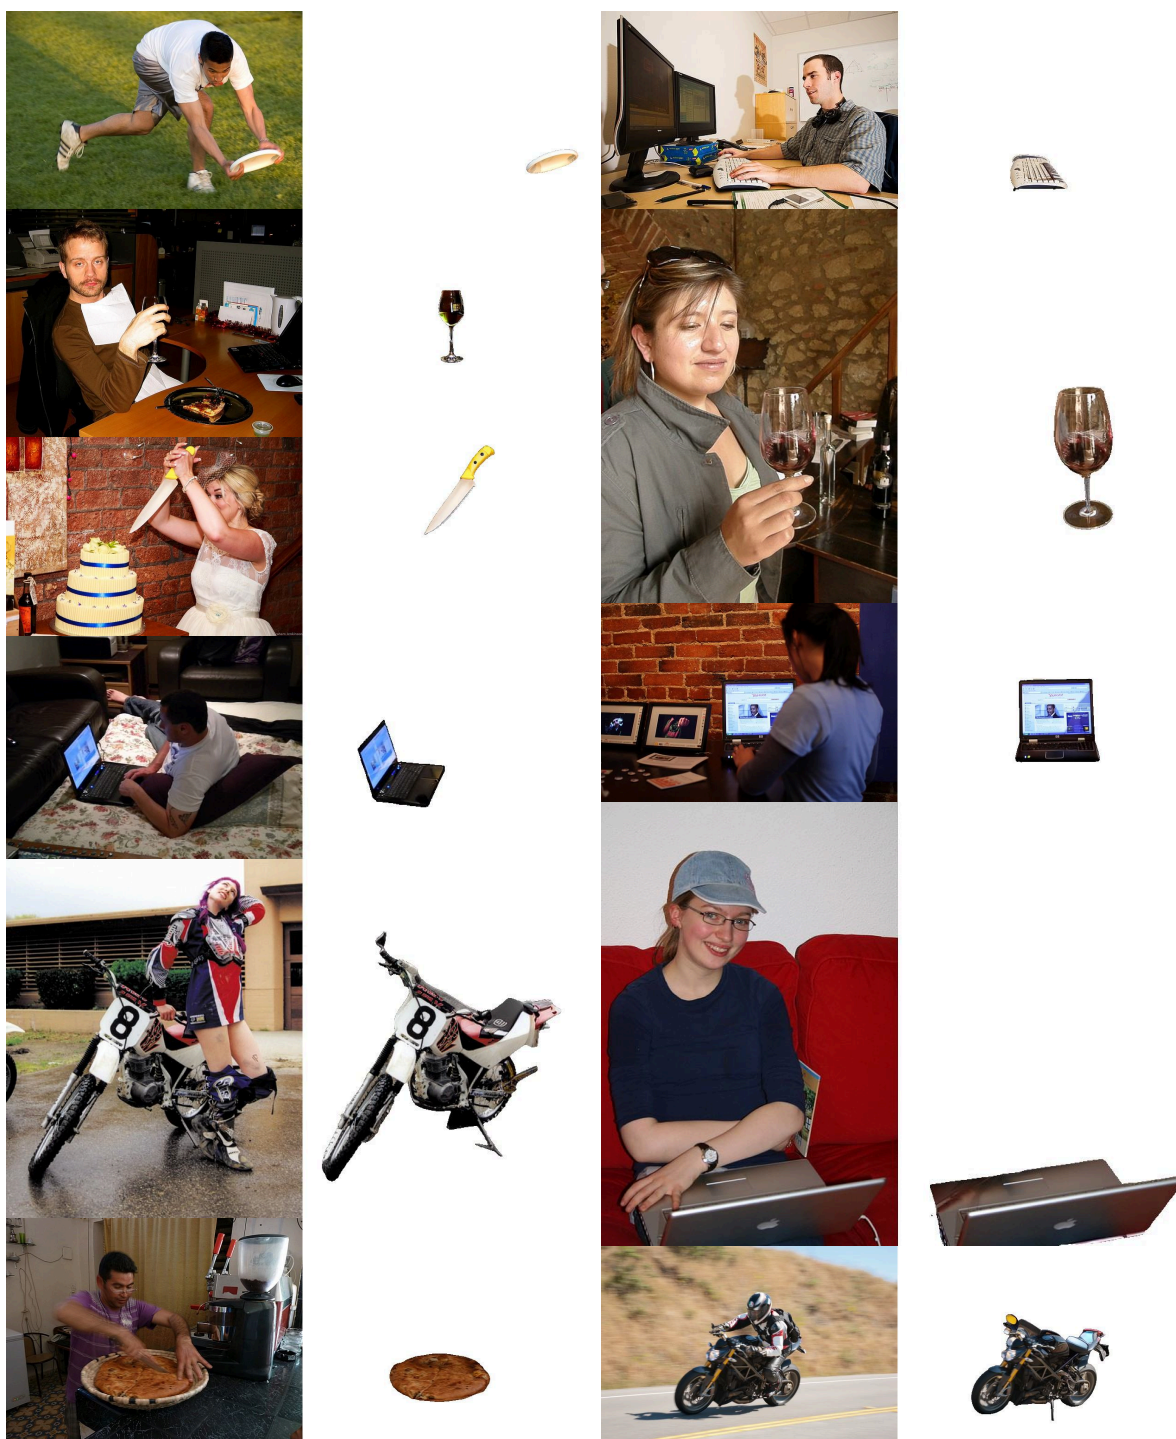

(a)

Figure S8. Examples of amodal conditioning on PICO-db. Across panels (a)-(c), each pair shows the input image and the extracted object cutout after occlusion-localized inpainting. Visible object support is retained while plausible geometry is generated only in the inferred occluder region.

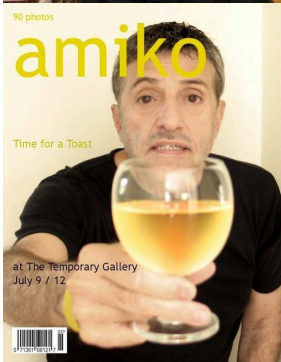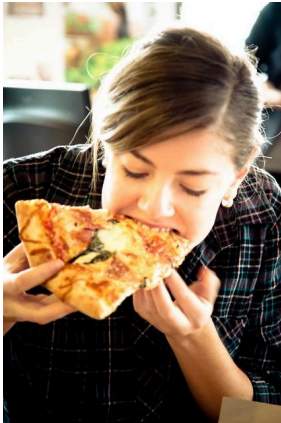

(b)



(c)