

Retrieve and Refine: Dictionary-Based Sign Language Production via Residual-VQ

Fidel Omar Tito Cruz¹

fi513841@ucf.edu

Angie Sanchez Marquina²

angie.sanchez4@unmsm.edu.pe

Summy Farfan³

summy.farfan@ucsp.edu.pe

Gissella Bejarano⁴

gissella.bejarano@marist.edu

¹ University of Central Florida
Florida, USA

² Universidad Nacional Mayor de San
Marcos
Lima, Peru

³ Universidad Catolica San Pablo
Arequipa, Peru

⁴ Marist University
New York, USA

Abstract

Sign language production (SLP) aims to generate continuous signing motion from spoken language, often through gloss-to-pose generation. Prior work mainly follows two paradigms. Generative models synthesize motion from a learned prior or from noise, without reference to an observed signing instance, making rare hand configurations and signer-specific articulation difficult to preserve. Retrieval-based methods reuse real, well-articulated motion segments, but concatenating segments from different signers and co-articulation contexts can introduce rhythm and style inconsistencies across the full sequence, not only at segment boundaries. These limitations suggest a complementary solution: use retrieval to provide realistic articulation, and use learned refinement to impose the global coherence that retrieval alone lacks. We therefore propose retrieve-and-refine, a paradigm that starts from real retrieved motion and refines it into a globally coherent signing sequence rather than generating motion from scratch. Our framework, SignRR, initializes motion from a dictionary of real sign segments and refines the full sequence with a part-aware Residual VQ-VAE, where residual quantization preserves fine hand articulation and temporal length differences are handled in the latent space. Experiments on PHOENIX14T and CSL-Daily show that SignRR achieves state-of-the-art back-translation performance while maintaining competitive pose quality.

Introduction

Sign language is a crucial means of communication for Deaf communities [1]. Accordingly, extensive prior work has focused on sign language recognition (SLR) [2, 3, 4], sign language translation (SLT) [5, 6], and sign language production (SLP) [7, 8]. The latter aims to generate continuous signing motion from spoken language and is commonly formulated as either a text-to-pose (T2P) task, which maps text directly to a pose sequence, or gloss-to-pose task (G2P), which generates pose sequences from intermediate glosses [9].

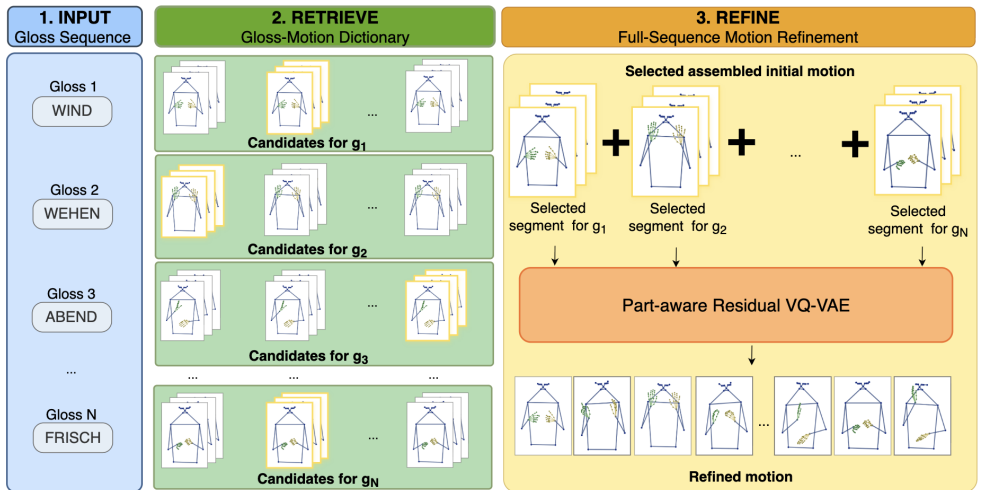


Figure 1: Overview of SignRR. Given an input gloss sequence, SignRR retrieves candidate real motion segments from a dictionary, assembles a coherent initial motion, and refines it with a part-aware Residual VQ-VAE into the final signing sequence.

Because constituent order in signed languages can differ from spoken languages [16], directly mapping words to signs is challenging. Glosses, written labels that preserve the sequential structure of signing, reduce this cross-lingual alignment problem to a more tractable pose generation task. Gloss-to-pose has therefore become a widely adopted formulation for SLP and is the setting of this work.

Sign production from a gloss sequence has been approached in two main paradigms. First, generative methods learn to synthesize the motion directly from the input. Early work regresses pose sequences from glosses [17, 18], but reconstruction losses drive outputs toward temporally averaged, under-articulated motion, especially in the hands, which are among the most informative cues in sign language [16]. Discretizing motion into codebook tokens and treating generation as sequence prediction reduces this averaging effect [12, 31, 52, 39], and diffusion-based methods [25, 26] further improve quality. However, this motion is produced from a learned prior or from noise, with no reference to any observed signing instance, so rare hand configurations and signer-specific articulation are compressed into the dominant distribution. Second, retrieval-based methods reuse real sign segments obtained from a dictionary built from training data. Such segments are anatomically plausible, retain signer-specific articulation, and remain semantically faithful. As a result, retrieval-based assembly has been shown to outperform generative methods [20, 29]; the winning submission of the SLRTP 2025 challenge [30] likewise surpassed all generative competitors on back-translation metrics. However, retrieval alone is not enough. Simply concatenating segments from different co-articulation contexts does not guarantee coherent signing and can lead to over-articulated motion. These two paradigms have complementary strengths (Table 1): the real motion that generation struggles to produce is precisely what retrieval supplies, while the coherent assembly that retrieval cannot guarantee is what a learned model can provide. We build on this complementarity and propose a retrieve-and-refine paradigm,

in which the model is asked not to generate signing motion from scratch, but to refine motion that is already real. Retrieved segments provide well-articulated, anatomically valid motion as a starting point, and the learned model is responsible only for resolving the incoherence introduced during assembly, so it never has to synthesize articulation from a prior.

Turning this idea into an effective method raises three requirements. The first concerns the scope at which refinement must act. Prior work on assembling motion handles boundaries locally, by masking and reconstructing the frames between adjacent segments [6, 24]. However, when segments come from different signers or are produced at different speeds, the resulting inconsistencies are not confined to the junctions but appear as rhythm mismatches across the full sequence. Refinement must therefore reason over the complete assembled sequence at once, treating the retrieved motion as a structured initialization to be made coherent rather than a set of transitions to be patched. The second requirement concerns the representation in which this refinement is carried out. Signs combine body parts with markedly different kinematics: arm movements unfold over broad temporal windows, whereas finger articulations are rapid and carry lexical distinctions [16]. Encoding all parts into a shared codebook [52] forces hand and body features to compete for capacity, often suppressing the hand details. Even methods that separate body parts [12, 51, 49] rely on single-layer quantization, whose reconstruction error is harmful for the hands, where small displacements can change handshape identity. To refine the motion effectively, the representation must be part-aware and precise to preserve fine-grained hand detail. Residual vector quantization provides this precision by encoding the remaining approximation error at each layer [54]. The third requirement is temporal: retrieved segments retain the durations of their source instances, so their concatenation may not match the target sequence length. Refinement must therefore reconcile this duration mismatch as part of making the assembled motion coherent. We design SignRR to meet these requirements. It initializes candidate motion from a constructed gloss-motion dictionary, selects an initial assembly with a lightweight dynamic-programming step, and refines the full sequence with a part-aware Residual VQ-VAE that operates in its quantized latent space, thereby realizing retrieve-and-refine for sign language production (Fig. 1). Our contributions are as follows:

- We introduce retrieve-and-refine, a paradigm for sign language production that refines real retrieved motion into coherent signing rather than generating motion from a learned prior, combining the natural articulation of retrieval with the coherence of generation.
- We propose SignRR, a framework that implements this paradigm by initializing motion from a gloss-motion dictionary and refining the full assembled sequence with a part-aware Residual VQ-VAE.
- We present state-of-the-art results on PHOENIX14T and CSL-Daily datasets across standard SLP metrics, with ablation studies validating each component.

2 Related Work

Sign Language Production. Early SLP systems relied on avatar-based animation requiring manually specified sign lexicons [9, 14], before data-driven approaches framed gloss-to-pose generation as sequence regression. Saunders et al. [17] proposed Progressive Trans-

	Method	Real art.	Signer dyn.	Boundary smooth.	Global coh.	Approach	Coherence handling
Generative	Progressive Transf. [10]	✗	✗	✓	✓	Autoregressive regression	Generated jointly
	G2P-DDM [31]	✗	✗	✓	✓	VQ + discrete diffusion	Generated jointly
	SOKE [39]	✗	✗	✓	✓	Body/hand VQ and AR gen.	Generated jointly
	Sign-IDD [25]	✗	✗	✓	✓	Diffusion from noise	Generated jointly
Retrieval	Saunders [20]	✓	✓	✗	✗	Neural frame selection	Interpolation
	Sign Stitching [4]	✓	✓	✗	✗	Signal-processing stitching	Local smoothing
	SLRTP'25 winner [60]	✓	✓	✗	✗	CTC-dictionary and stitching	Local stitching
	Gloss-driven [26]	✓	✓	✓	✗	Retrieval + boundary diffusion	Per-junction refinement
Ours	SignRR	✓	✓	✓	✓	DP assembly and RVQ-VAE	Full-sequence refinement

Table 1: Comparison of sign language production paradigms. Real art. denotes preservation of real signing articulation; signer dyn. denotes preservation of signer-specific dynamics; boundary smooth. denotes explicit boundary smoothness between motion units; and global coh. denotes sequence-level coherence beyond local transitions.

formers with autoregressive decoding, later extended with a Mixture of Motion Primitives [10] and mixture density networks [18], yet L2 regression losses consistently drive outputs toward temporally averaged poses, producing under-articulated hands that are the main articulators of lexical meaning in signed languages [16]. To overcome this, subsequent works discretize motion via vector quantization. G2P-DDM [31], trains single-layer VQ-VAEs per body part and generates token sequences with discrete diffusion, T2S-GPT [32] employs a dynamic-length unified codebook with an autoregressive GPT, SOKE [39] tokenizes body and hands separately for multilingual generation, drawing on a sign dictionary only as auxiliary conditioning for its autoregressive generator, and GLOS [12] extends this to four-part streams with temporal-alignment conditioning. Diffusion-based methods [25, 26] synthesize motion from noise under semantic guidance, improving quality in continuous space but requiring many denoising steps and producing output without reference to any signing instance. Across all generative paradigms, infrequent hand configurations and signer-specific motion patterns remain difficult to recover from a learned prior alone.

Retrieval-based Sign Production. An alternative to generating motion from a learned prior is to assemble signing motion from real segments stored in a gloss-motion dictionary. Stoll et al. [23] introduced a motion-graph formulation in which dynamic programming selects an optimal sequence of sign segments. Saunders et al. [20] scaled this idea with a frame selection network supervised by DTW alignment over an interpolated dictionary of signs, while Walsh et al. [24] replaced neural selection with a signal-processing pipeline based on canonical normalization, velocity-bounded interpolation, and frequency-domain filtering. Dictionaries can also be built from continuous signing: Walsh et al. [28] learn a discrete motion vocabulary with NSVQ, and Zuo et al. [38] derive pseudo-temporal boundaries from a CTC recognition model, a strategy later adopted by the SLRTP 2025 challenge winner [60]. However, existing retrieval-based methods mainly focus on selecting segments and stitching them with local or hand-crafted transitions, such as linear interpolation, spline fitting, or frequency-domain smoothing. This preserves real articulation, but does not ensure coherence across the complete sequence, especially when segments come from different signers, speeds, or co-articulation contexts. Tang et al. [22] learn boundary transitions with conditional diffusion, but still operate only on individual junctions rather than on the

assembled sequence as a whole. SignRR addresses this limitation by treating retrieval as an initialization and refining the complete assembled motion with a learned model, targeting sequence-level rhythm and articulation inconsistencies that local stitching cannot resolve.

Motion Representations for SLP. The general motion generation literature offers architectural precedents for discrete motion modelling. Van den Oord et al. [27] established vector quantization with straight-through gradient estimation, and Zeghidour et al. [64] extended this with residual vector quantization, where cascaded codebooks encode successive residuals for progressive fidelity without codebook explosion. Guo et al. [8] show that six-layer residual VQ substantially outperforms single-layer VQ for motion reconstruction, Lu et al. [13] demonstrate that separating body and hand codebooks improves whole-body generation, and Zou et al. [67] show that coordinating separate body-part codebooks improves overall limb coherence. These models, however, assume generation from a clean learned prior, an assumption that does not hold when the input is a retrieved sequence assembled from segments of different signers and co-articulation contexts. In SLP, G2P-DDM [61], SOKE [69], and GLOS [10] use single-layer per-part quantization, while residual quantization has appeared in sign only for pose interpolation [8], a different task from gloss-to-pose production. SignRR instead uses part-aware residual quantization to refine real assembled motion, treating retrieval as a structured initialization rather than noise to be denoised.

Pose-Conditioned Human Generation. Generated pose can also be used as a conditioning signal for human appearance generation. In sign language, Stoll et al. [23] render signer videos from poses with a conditional GAN. In addition, IMAGPose [41] conditions person image generation on target poses, while IMAGDressing-v1 [42] supports pose as one of several controls for editable human synthesis. SignRR focuses on generating the pose sequence itself, which can serve as a structured motion representation for such downstream applications.

3 Method

Given an input gloss sequence $G = (g_1, \dots, g_N)$, our goal is to produce a pose sequence $\hat{\mathbf{x}} = (\hat{x}_1, \dots, \hat{x}_{\hat{T}})$, where $\hat{x}_t \in \mathbb{R}^{K \times 3}$ and $K=61$. SignRR follows a retrieve-and-refine pipeline (Fig. 1), where real sign segments are first retrieved from a gloss-motion dictionary and assembled into an initial motion sequence, which a learned refinement model then processes as a whole to resolve boundary discontinuities, rhythm mismatches, and inconsistencies across body parts. The method has three steps: an offline gloss-motion dictionary $\mathcal{D}$ built from continuous training data (Sec. 3.1); a part-aware Residual VQ-VAE trained to refine assembled motion into target motion (Sec. 3.2); and an inference procedure that selects a coherent assembly by dynamic programming before refinement (Sec. 3.3). We write $\mathbf{x}_a$ and $\mathbf{x}_b$ for the assembled and target motion sequences, of length T_a and T_b , and let $D=K \times 3=183$ be the flattened pose dimension.

3.1 Gloss-Motion Dictionary

We construct $\mathcal{D}$ automatically from the continuous signing sequences in the training set, so that the extracted segments retain co-articulated motion rather than isolated sign realizations, where each sign is produced on its own and lacks the natural transitions of continuous

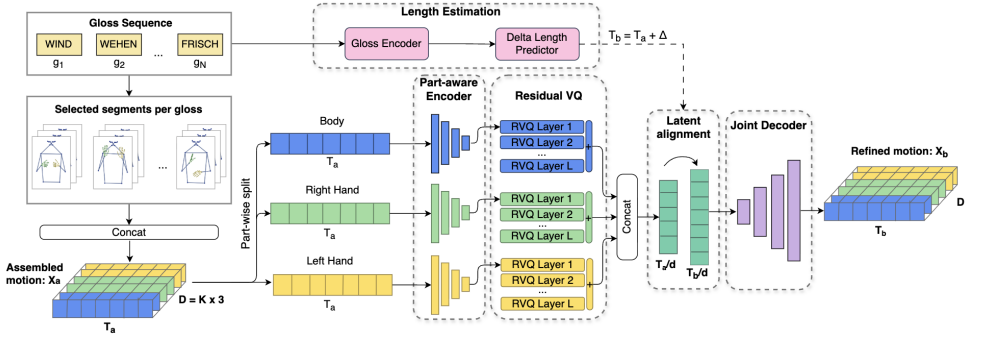


Figure 2: Architecture of SignRR’s refinement model, a part-aware Residual VQ-VAE. The assembled motion is split into body, right-hand, and left-hand streams each encoded and discretized by its own residual VQ. In parallel, a gloss encoder estimates the target length; the per-part latents are aligned to this length and decoded by a single joint decoder into the refined signing sequence.

signing. Segment boundaries come from a pretrained CorrNet+ [9] CSLR recognizer: given the ground-truth gloss sequence, we mark the start of each gloss at the first frame where the recognizer’s logit for that gloss exceeds the logit of the previous one. Because this is a ground-truth-constrained alignment rather than CTC decoding, it recovers segment timing from the recognizer’s logits alone and needs only the sentence-level gloss sequences already provided by the dataset, not frame-level boundary annotations. For each gloss, we then score its candidate segments by motion smoothness and duration regularity, discard outliers, and retain S diverse, high-quality representatives ($|\mathcal{D}(g)|=S$), caching a short boundary descriptor of each for the inference-time selector. The segmentation rule, quality score, and curation procedure are detailed in the supplementary.

3.2 Part-aware Residual VQ-VAE

Part-aware hierarchical encoder. We encode the assembled motion with separate streams for the body and hands (Fig. 2). This design reflects the different roles of these parts in signing: body and arm motion provide the main pose trajectory, while fine-grained changes in handshape, location, and movement can yield lexical contrasts in sign language [16]. Encoding the whole pose with a single codebook can make these fine hand patterns harder to preserve, since they are modeled together with larger body movements. We therefore split the input $\mathbf{x} \in \mathbb{R}^{T \times D}$ along the feature axis into body ($D_{\text{body}}=57$), right hand ($D_{\text{rh}}=63$), and left hand ($D_{\text{lh}}=63$), and pass each part through a dedicated encoder Enc^p :

$$\mathbf{z}^p = Enc^p(\mathbf{x}^p) \in \mathbb{R}^{\frac{T}{d} \times d_p}, \quad p \in \{\text{body, rh, lh}\}, \quad (1)$$

where d_p is the latent dimension of part p and $d=4$ is the temporal downsampling factor. Each encoder applies an initial 1D convolution, two stride-2 downsampling stages with dilated ResNet-1D blocks, and a projection to d_p . The body encoder uses wider dilation rates to cover longer-range arm and torso motion, while the hand encoders use narrower dilation

rates for faster hand motion. The hand streams are also assigned larger latent dimensions and codebooks.

Residual vector quantization. For each part latent $\mathbf{z}^p$, we use residual vector quantization with L cascaded codebooks $C_l^p \subset \mathbb{R}^{d_p}$. Instead of representing the latent with a single codebook, successive layers encode the remaining residual, which helps preserve fine pose details [8, 34]:

$$\hat{\mathbf{z}}_l^p = \text{VQ}(r_{l-1}^p; C_l^p), \quad r_l^p = r_{l-1}^p - \text{sg}[\hat{\mathbf{z}}_l^p], \quad l = 1, \dots, L, \quad (2)$$

with $r_0^p = \mathbf{z}^p$ denoting the initial residual. The operator $\text{VQ}(\cdot; C)$ maps its input to the nearest entry in C under ℓ_2 distance and is trained with the straight-through estimator, while $\text{sg}[\cdot]$ denotes stop-gradient. The full latent is obtained by summing the quantized outputs across layers for each part and concatenating the resulting part-wise latents:

$$\hat{\mathbf{z}}^p = \sum_{l=1}^L \hat{\mathbf{z}}_l^p, \quad \hat{\mathbf{z}} = [\hat{\mathbf{z}}^{\text{body}}; \hat{\mathbf{z}}^{\text{rh}}; \hat{\mathbf{z}}^{\text{lh}}] \in \mathbb{R}^{C \times T_a/d}, \quad C = \sum_p d_p. \quad (3)$$

Latent alignment. The assembled input and the target generally differ in length: $\mathbf{x}_a$ is concatenated from segments retrieved independently per gloss, each contributed at its own duration, so its total length need not match that of $\mathbf{x}_b$. We reconcile the two in the latent space in two steps. First, a lightweight Transformer gloss encoder maps G to contextual features whose mean over the sequence, $\bar{\mathbf{h}}$, feeds an MLP that predicts the length difference Δ (the Length Estimation block in Fig. 2):

$$\Delta = \text{MLP}([\bar{\mathbf{h}}; T_a/T_{\max}]) \cdot \delta_{\text{scale}}, \quad (4)$$

where $T_{\max}$ is a fixed length normalizer and δ_{scale} bounds the range. Second, the quantized latent is resampled to the target temporal resolution by linear interpolation with aligned endpoints (the Latent alignment block in Fig. 2):

$$\tilde{\mathbf{z}} = \text{Interpolate}(\hat{\mathbf{z}}, T_b/d) \in \mathbb{R}^{C \times T_b/d}. \quad (5)$$

During training the target length T_b is known and used directly; at inference it is unknown and replaced by the predicted length $\hat{T}_b = T_a + \Delta$. Applying the adjustment to the quantized latent rather than to raw joint coordinates lets it operate on compact motion codes, while the RVQ bottleneck regularizes the representation before resampling. Gloss information is therefore used only to predict the length adjustment, while the decoder operates solely on the aligned motion latent.

Joint decoder. A single decoder maps the aligned latent back to motion, so that coordination across parts is recovered jointly rather than per stream:

$$\hat{\mathbf{x}} = \text{Dec}(\tilde{\mathbf{z}}) \in \mathbb{R}^{T_{\text{out}} \times D}, \quad (6)$$

where $T_{\text{out}} = T_b$ during training and $T_{\text{out}} = \hat{T}_b$ at inference. The decoder applies an initial projection, two upsampling stages with dilated ResNet-1D blocks that mirror the encoder, and a final projection to the $D=183$ pose dimensions.

Training objective. For each training sample, we draw one segment per gloss from $\mathcal{D}$ and concatenate them to form the assembled input $\mathbf{x}_a$, using the corresponding real continuous sequence $\mathbf{x}_b$ as supervision. This trains the model to map different retrieved assemblies to

coherent target motion while retaining retrieval as the articulated starting point. Resampling across epochs exposes the model to various combinations of segments and assembly patterns. We minimize

$$\mathcal{L} = \mathcal{L}_{\text{rec}} + \lambda_v \mathcal{L}_{\text{vel}} + \lambda_c \mathcal{L}_{\text{commit}} + \lambda_\ell \mathcal{L}_{\text{length}}, \quad (7)$$

where $\mathcal{L}_{\text{rec}}$ is a part-weighted smooth- ℓ_1 reconstruction loss that weights the hands above the body, $\mathcal{L}_{\text{vel}}$ penalizes frame-to-frame velocity error, and $\mathcal{L}_{\text{commit}}$ is the RVQ commitment term summed over all codebooks. The final term, $\mathcal{L}_{\text{length}} = \|\Delta - (T_b - T_a)\|_1$, supervises the length predictor; since training interpolates to the ground-truth length, it updates only the gloss-encoder and predictor branch and does not perturb the reconstruction path. Architecture sizes, codebook configuration, and loss weights are given in the supplementary.

3.3 Inference: Assembly and Refinement

At inference, SignRR first selects a set of dictionary segments by dynamic programming and then refines the assembled sequence with the trained model.

Segment selection. For a gloss sequence G , we cast assembly as a shortest-path problem over a trellis whose nodes at position i are the candidate segments $\mathcal{D}(g_i)$. The selected path $\pi^* = (\pi_1^*, \dots, \pi_N^*)$, $\pi_i \in \mathcal{D}(g_i)$, minimizes a combined boundary-smoothness and quality cost:

$$\pi^* = \arg \min_{\pi} \sum_{i=2}^N \left[\alpha \cdot \frac{d_{\text{bnd}}(\pi_{i-1}, \pi_i)}{\tilde{d}} + \beta \cdot (1 - q(\pi_i)) \right] + \beta \cdot (1 - q(\pi_1)), \quad (8)$$

where d_{bnd} is the mean ℓ_2 distance between the boundary descriptors of adjacent segments, $q(\cdot)$ the cached quality score, and $\tilde{d}$ a normalizer estimated from $\mathcal{D}$. The path is found by standard dynamic programming in $O(NS^2)$; out-of-dictionary glosses are handled as described in the supplementary.

Refinement. The selected segments are concatenated into $\mathbf{x}_a$ and passed through the trained model. The model encodes the sequence with the part-specific encoders, applies residual vector quantization, aligns the latent sequence to the predicted length, and decodes it into the final pose sequence $\hat{\mathbf{x}} \in \mathbb{R}^{\hat{T}_b \times D}$. Refining the full assembled sequence in the quantized latent space, rather than patching individual junctions, is what reduces the rhythm and articulation inconsistencies introduced during assembly.

4 Experiments and Results

4.1 Experimental Setup

Datasets. We evaluate SignRR on two standard SLP benchmarks: PHOENIX14T [10] and CSL-Daily [56]. PHOENIX14T contains 7,096 training, 519 validation, and 642 test sequences over 1,085 glosses, while CSL-Daily contains 18,401, 1,077, and 1,176 sequences, respectively, over 2,000 glosses. Both datasets provide sentence-level gloss annotations. Following prior SLP work, 2D keypoints are extracted with OpenPose [9] and lifted to 3D using the pose-lifting procedure of Ivashechkin et al. [14]. Each frame is represented as a $K=61$ -keypoint 3D pose, consisting of 19 body joints and 21 joints for each hand, giving $D=183$ pose values. The gloss-motion dictionary $\mathcal{D}$ is built once per dataset from the training split.

Evaluation metrics. Following the back-translation protocol used in prior SLP work [9, 25], we train a Sign Language Transformer on real poses and evaluate it on the generated

Table 2: Comparison with state-of-the-art SLP methods on PHOENIX14T. $\uparrow$ and $\downarrow$ indicate higher and lower is better, respectively. **Bold** and underlined values denote the best and second-best results among non-GT methods with reported values. Methods marked with $\dagger$ are reproduced under our evaluation setting; the remaining baseline results are taken from [49].

Method	DEV					TEST				
	WER $\downarrow$	BLEU-1 $\uparrow$	BLEU-4 $\uparrow$	ROUGE $\uparrow$	MPJPE $\downarrow$	WER $\downarrow$	BLEU-1 $\uparrow$	BLEU-4 $\uparrow$	ROUGE $\uparrow$	MPJPE $\downarrow$
GT	64.67	30.88	13.38	31.11	0.00	63.61	31.30	13.43	31.03	0.00
Sign-IDD $\dagger$ [49]	86.34	26.49	10.79	27.34	40.74	85.98	25.34	9.81	24.91	50.19
G2P-DDM $\dagger$ [49]	<u>85.43</u>	<u>26.97</u>	<u>11.05</u>	<u>28.13</u>	44.41	<u>83.92</u>	<u>27.04</u>	<u>10.78</u>	<u>27.56</u>	54.28
Miao et al. $\dagger$ [49]	95.62	15.97	4.60	16.94	45.57	95.66	14.16	3.29	14.61	56.17
Sign Stitching [49]	—	—	—	—	—	—	25.14	6.67	26.49	—
PT base [49]	—	—	—	—	—	—	6.27	1.59	9.50	—
PT + GN [49]	—	—	—	—	—	—	11.45	4.04	14.52	—
Ours	82.07	28.16	11.72	28.88	<u>43.83</u>	80.98	28.78	10.96	28.15	<u>53.70</u>

Table 3: Comparison with state-of-the-art SLP methods on CSL-Daily. $\uparrow$ and $\downarrow$ indicate higher and lower is better, respectively. **Bold** and underlined values denote the best and second-best results among non-GT methods. Methods marked with $\dagger$ are reproduced under our evaluation setting.

Method	DEV				TEST			
	BLEU-1 $\uparrow$	BLEU-4 $\uparrow$	ROUGE $\uparrow$	MPJPE $\downarrow$	BLEU-1 $\uparrow$	BLEU-4 $\uparrow$	ROUGE $\uparrow$	MPJPE $\downarrow$
GT	23.59	5.87	23.51	0.00	23.12	5.06	23.06	0.00
Sign-IDD $\dagger$ [49]	<u>11.66</u>	0.00	<u>11.83</u>	135.71	<u>11.98</u>	0.00	<u>11.98</u>	147.51
Miao et al. $\dagger$ [49]	11.43	<u>0.23</u>	11.30	91.29	11.53	<u>0.20</u>	11.46	99.70
Ours	15.23	1.34	15.01	<u>106.21</u>	15.45	1.57	15.46	<u>115.40</u>

poses, comparing the recovered text with the reference. We report WER, BLEU-1, BLEU-4, ROUGE-L, and MPJPE.

Implementation details. For dictionary construction, we use the publicly released CorrNet+ [4] checkpoints without further fine-tuning. For our refinement model, we use three part-specific encoder streams for the body, right hand, and left hand, with latent widths $d_{\text{body}}=192$ and $d_{\text{rh}}=d_{\text{lh}}=256$. The body stream uses dilation rates $[1, 3, 9]$ to capture long-range arm and torso motion, while the hand streams use $[1, 3, 5]$ for faster finger articulation. Each part is quantized with $L=3$ residual codebooks. We train with AdamW and batch size 256. We trained for 800 epochs on PHOENIX14T and 400 epochs on CSL-Daily on a single NVIDIA A100 GPU. Additional architecture and optimization details are provided in the supplementary.

4.2 Comparison with State-of-the-Arts

Quantitative Results. Table 2 compares SignRR with prior SLP methods on PHOENIX14T. All methods are evaluated with the same $K=61$ -keypoint pose representation, the same 2D-to-3D lifting pipeline, and a shared back-translation model. Methods marked with $\dagger$ are reproduced from released code under this setting, while Sign Stitching and the PT baselines are reported from [49], which follows the same pose and back-translation protocol. The GT row is included as a reference ceiling for the back-translation protocol.

SignRR achieves the best back-translation performance among all non-GT methods on both splits. On the test set, it reaches WER 80.98, BLEU-1 28.78, BLEU-4 10.96, and

04October_2010_Monday_tagesschau-4723

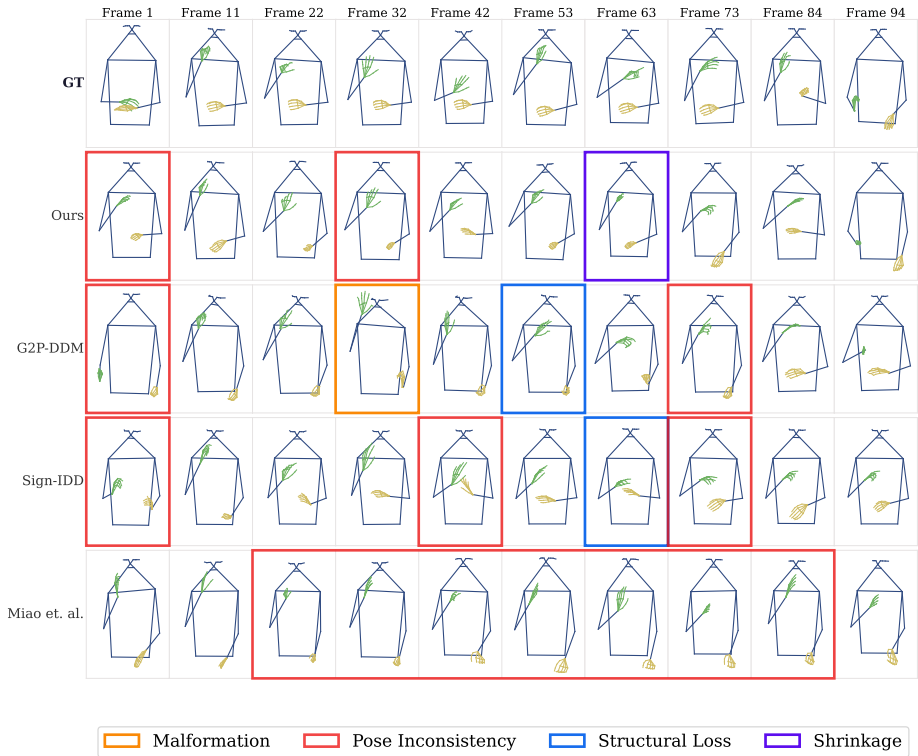


Figure 3: Qualitative comparison of sign language production models on PHOENIX-14T.

ROUGE 28.15, improving over G2P-DDM across all four metrics. The gain is especially clear over the regression-based PT baselines, whose low BLEU and ROUGE scores suggest that pose smoothness alone does not preserve sign content. Compared with the retrieval-based Sign Stitching baseline, SignRR improves test BLEU-4 from 6.67 to 10.96, suggesting that full-sequence refinement is more effective than local stitching alone. Sign-IDD obtains the lowest MPJPE among non-GT methods, but SignRR outperforms it on all back-translation metrics. Overall, SignRR ranks second on MPJPE while achieving the strongest back-translation scores, showing a better balance between pose accuracy and intelligibility.

On CSL-Daily (Table 3), we report the same metrics, except WER. SignRR again achieves the best back-translation performance among all non-GT methods on both splits. On the test set, it reaches BLEU-1 15.45, BLEU-4 1.57, and ROUGE 15.46, improving over both Sign-IDD and Miao et al. on every back-translation metric. BLEU-4 values are low because the back-translation ceiling on CSL-Daily is also low, with GT reaching only 5.06 on the test set. Even under this limited ceiling, SignRR obtains the highest BLEU-4 among non-GT methods and also leads on BLEU-1 and ROUGE. As on PHOENIX14T, the lowest MPJPE does not lead to the best back-translation performance: Miao et al. obtains the lowest MPJPE among non-GT methods, while SignRR ranks second and achieves the strongest back-translation scores. This shows the same overall trend on the larger and more lexically

diverse CSL-Daily dataset.

Qualitative Results. Figure 3 shows that SignRR preserves hand and upper-body structure more reliably than the compared methods across the sampled frames. The colored annotations mark four common error types, including malformation, pose inconsistency, structural loss, and shrinkage. SignRR exhibits fewer of these errors, with mostly mild local issues and no clear malformation or structural loss. By contrast, G2P-DDM shows the widest range of failures, including malformed hands, structural loss, and pose inconsistencies. Sign-IDD and Miao et al. avoid clear malformation in this example, but still show repeated pose inconsistencies. In Miao et al., these inconsistencies persist across a longer part of the sequence, with hand poses that change little over time.

In addition to the failures highlighted above, the videos show a small temporal offset from the ground truth across the compared methods. The generated signs often appear a few frames behind the reference, suggesting that temporal alignment remains a shared challenge for current models. Overall, SignRR does not exactly match the ground truth, but it avoids many hand and pose failures observed in the baselines.

4.3 Ablation Studies

Table 4 studies the refinement model on PHOENIX14T by varying four components: the multi-part encoder (MP), the number of residual codebooks N_q , the encoder dilation setting, and the inference-time length source. All variants use the same gloss-motion dictionary and dynamic-programming assembly.

Multi-part encoder. Replacing the separate body, right-hand, and left-hand streams with a single encoder over the full pose reduces BLEU-1 from 28.78 to 27.89 and ROUGE from 28.15 to 26.94, while MPJPE remains nearly unchanged (53.70 and 53.52). This suggests that a shared encoder can still recover the average pose geometry, but is less effective at preserving the hand details that are important for lexical recognition. The part-aware design therefore improves back-translation without relying on lower joint error alone.

Number of residual codebooks. Using a single codebook ($N_q=1$) gives the weakest back-translation results, with BLEU-1 26.82 and ROUGE 26.58. Increasing the number of codebooks improves the representation: $N_q=2$ already approaches the proposed setting and obtains the best BLEU-4 (11.23), while $N_q=3$ gives the strongest BLEU-1 (28.78), CHRF (32.90), and ROUGE (28.15). Increasing to $N_q=4$ slightly improves WER, but lowers BLEU-1, BLEU-4, CHRF, and ROUGE. We therefore use $N_q=3$, which provides the best overall trade-off across back-translation metrics.

Encoder dilation. The proposed model uses a mixed dilation setting, with $[1, 3, 9]$ for the body stream and $[1, 3, 5]$ for the hand streams. Using $[1, 3, 9]$ for all streams lowers BLEU-1 to 27.63 and ROUGE to 27.13, while using $[1, 3, 5]$ for all streams gives BLEU-1 27.90 and ROUGE 27.85. The mixed setting performs best on BLEU-1, CHRF, and ROUGE, supporting the use of different temporal receptive fields for body and hand motion.

Length prediction. Replacing the predicted length with the ground-truth length improves pose-quality metrics, reducing MPJPE from 53.70 to 47.61 and FID from 1.21 to 1.16. However, it lowers back-translation performance, with BLEU-1 decreasing from 28.78 to 27.07, BLEU-4 from 10.96 to 10.28, and ROUGE from 28.15 to 26.68. This shows that better frame-level alignment to the reference does not necessarily improve sign intelligibility under the back-translation protocol. A likely explanation is that the predicted length yields

Table 4: Ablation study of SignRR on PHOENIX14T (TEST). MP denotes the multi-part encoder, N_q the number of RVQ codebooks, Dilation the encoder dilation setting, and Length the inference-time length source.

Variant	Configuration				Back-translation					Pose quality		
	MP	N_q	Dilation	Length	WER↓	BLEU-1↑	BLEU-4↑	CHRF↑	ROUGE↑	FID↓	MPJPE↓	MPJAE↓
SignRR (proposed)	✓	3	mixed	Pred.	80.98	28.78	10.96	32.90	28.15	1.21	53.70	18.31
w/o MP	✗	3	mixed	Pred.	82.25	27.89	10.70	32.32	26.94	1.25	53.52	18.36
$N_q = 1$	✓	1	mixed	Pred.	81.52	26.82	10.57	31.82	26.58	1.24	53.75	18.16
$N_q = 2$	✓	2	mixed	Pred.	80.86	28.01	11.23	32.81	28.08	1.23	53.48	18.29
$N_q = 4$	✓	4	mixed	Pred.	80.32	27.43	10.61	32.12	27.46	1.22	53.61	18.22
uniform dilation	✓	3	[1, 3, 9]	Pred.	80.70	27.63	10.83	32.10	27.13	1.21	53.26	18.29
uniform dilation	✓	3	[1, 3, 5]	Pred.	81.10	27.90	10.99	32.87	27.85	1.21	53.26	18.29
w/o length prediction	✓	3	mixed	GT	81.31	27.07	10.28	31.77	26.68	1.16	47.61	17.81

Table 5: Selection and refinement analysis of SignRR on PHOENIX14T (TEST). Selection denotes the segment retrieval policy used during evaluation, and Ref. indicates whether the part-aware Residual VQ-VAE is applied. Rows with random selection are averaged over three seeds and reported as mean±std.

Variant	Configuration		Back-translation					Pose quality		
	Selection	Refine.	WER↓	BLEU-1↑	BLEU-4↑	CHRF↑	ROUGE↑	FID↓	MPJPE↓	MPJAE↓
Retrieve only	DP	✗	83.78	22.06	8.31	27.86	21.47	1.44	68.25	19.06
Retrieve only	Random	✗	81.50±0.65	23.94±0.74	9.13±0.40	29.36±0.22	23.27±0.73	1.38±0.01	69.99±0.43	19.61±0.06
SignRR (Random sel.)	Random	✓	81.11±0.21	28.23±0.06	10.76±0.17	32.61±0.14	27.64±0.25	1.21±0.01	53.74±0.03	18.32±0.01
SignRR (Proposed)	DP	✓	80.98	28.78	10.96	32.90	28.15	1.21	53.70	18.31

temporal dynamics that better support recognition, even when it increases frame-level pose error.

4.4 Analysis

Disentangling Selection and Refinement. SignRR combines a segment selector with a learned refinement model. To isolate their roles, we vary both parts on PHOENIX14T (Table 5). For selection, we compare dynamic programming (DP) with random sampling during evaluation; training is unchanged and always uses randomly sampled segments. For refinement, we either apply the learned refiner or remove it, in which case the selected segments are directly concatenated and evaluated.

Refinement provides the main gain in both selection settings. With DP selection, it raises BLEU-1 from 22.06 to 28.78 and reduces MPJPE from 68.25 to 53.70. With random selection, it also raises BLEU-1 from 23.94 to 28.23. By contrast, DP selection alone does not improve over random selection in this setting, giving lower BLEU-1 without refinement (22.06 and 23.94). Thus, the selector is not the main source of the improvement; its benefit appears only when the selected sequence is further refined.

With refinement enabled, DP selection gives a smaller but consistent gain over random selection, improving BLEU-1 by +0.55, BLEU-4 by +0.20, and ROUGE by +0.51. Refinement also makes the result less sensitive to the retrieved assembly: across three random-selection seeds, the standard deviation drops from 0.74 to 0.06 for BLEU-1, from 0.73 to 0.25 for ROUGE, and from 0.43 to 0.03 for MPJPE. These results show that refinement drives most of the improvement, while DP selection adds a small but stable gain when combined with the refiner.

Refinement without Retrieval. The previous analysis shows that refinement is an important part of the retrieve-and-refine pipeline, but it still uses real retrieved segments as input. This

Table 6: Refinement without retrieval on PHOENIX14T (TEST). *Training* denotes whether the refiner is trained on real dictionary segments or synthetic periodic motion. *Cross-attn* indicates whether the decoder attends to gloss features during refinement. **Bold** marks the best value in each column.

Variant	Configuration		Back-translation					Pose quality		
	Training	Cross-attn	WER↓	BLEU-1↑	BLEU-4↑	CHRF↑	ROUGE↑	FID↓	MPJPE↓	MPJAE↓
Synthetic input	Synthetic	✗	99.04	10.39	1.01	19.70	8.11	1.87	56.19	19.77
Synthetic input	Synthetic	✓	90.02	25.06	8.72	30.13	23.99	1.36	49.96	18.60
SignRR (Proposed)	Dictionary	✗	80.98	28.78	10.96	32.90	28.15	1.21	53.70	18.31
SignRR + gloss	Dictionary	✓	83.47	27.03	10.24	31.84	27.17	1.24	53.64	18.08

raises a key question: can refinement work equally well without real retrieved motion? We address this by comparing refiners trained on either real dictionary segments or synthetic periodic motion (Table 6). The synthetic motion is generated from periodic trajectories, so it provides smooth pose variation but no real sign articulation. We also add an optional decoder cross-attention layer, where the decoder attends to gloss features during refinement, to test whether explicit gloss conditioning can compensate for the missing retrieved motion.

Synthetic periodic motion performs poorly without decoder cross-attention, reaching WER 99.04 and BLEU-1 10.39. Adding cross-attention substantially improves this setting, increasing BLEU-1 to 25.06 and ROUGE to 23.99. However, it still remains below SignRR trained on real dictionary segments, which reaches BLEU-1 28.78, BLEU-4 10.96, and ROUGE 28.15. Adding cross-attention to real retrieved motion also brings no consistent benefit, lowering test BLEU-1 from 28.78 to 27.03 and increasing WER from 80.98 to 83.47. These results indicate that gloss conditioning alone cannot replace real retrieved motion; the dictionary segments provide sign-specific articulation and dynamics that synthetic motion does not capture.

Overall, these two analyses support our retrieve-and-refine design. The first shows that refinement improves and stabilizes retrieved assemblies, while the second shows that refinement on real retrieved segments outperforms refinement on synthetic motion, even with explicit gloss cross-attention. Retrieval provides sign-specific motion cues that the synthetic input cannot fully provide, and refinement converts them into a more coherent signing sequence.

Robustness to Segmentation Error. Since the dictionary is built from CorrNet+ boundaries, we analyze how segmentation error affects production quality by perturbing gloss boundaries by ± 4 , ± 8 , and ± 16 frames, and by replacing the recognizer with uniform segmentation, rebuilding the dictionary and retraining the model in each case. BLEU-4 decreases by at most 0.42 at ± 16 frames, while the uniform-segmentation setting still reaches BLEU-4 10.58 on the test set. The full experiment and results are provided in the supplementary material.

Inference Efficiency. SignRR requires 87.8 ms per sequence on the PHOENIX14T test set with batch size 1 on a single A100 GPU. This is about $25\times$ faster than G2P-DDM with 100 diffusion steps and has similar latency to Sign-IDD with 10 DDIM steps. The full experiment and protocol information are provided in the supplementary material.

5 Limitations

Currently, SignRR focuses on body and hand articulation. The 61-keypoint representation includes a set of facial landmarks, but it does not capture fine-grained non-manual cues such

as mouthings or eye movements, which can carry grammatical and lexical information in signed languages [16]. Therefore, adding a dedicated facial stream to the part-aware representation is an important direction for future work. Also, the retrieval stage depends on the sign inventory available in the gloss-motion dictionary. When a gloss is not present, our current implementation maps it to the closest dictionary entry using edit distance. A more general open-vocabulary setting could instead use external lexical resources or a generative fallback for unseen signs. Finally, our evaluation follows the standard back-translation protocol, which assesses production quality indirectly through recognition performance. Future work could complement these metrics with evaluations by fluent signers to provide a more direct assessment of perceptual naturalness, articulation quality, and linguistic intelligibility.

6 Conclusion

We presented SignRR, a retrieve-and-refine framework for sign language production. Rather than generating signing motion from scratch, SignRR retrieves real sign segments from a gloss-motion dictionary, assembles them into an initial sequence, and refines the full motion with a part-aware Residual VQ-VAE. This design uses retrieval to preserve realistic articulation and learned refinement to improve coherence. Experiments on PHOENIX14T and CSL-Daily show that SignRR achieves state-of-the-art back-translation performance among non-GT methods while maintaining competitive pose quality. Ablation studies further show that full-sequence refinement is important to the method and improves the quality of the retrieved assemblies. Future work will connect the refined pose sequences with photorealistic avatars for end-to-end sign video synthesis.

References

- [1] Danielle Bragg, Oscar Koller, Mary Bellard, Larwan Berke, Patrick Boudreault, Annelies Braffort, Naomi Caselli, Matt Huenerfauth, Hernisa Kacorri, Tessa Verhoef, et al. Sign language recognition, generation, and translation: An interdisciplinary perspective. In *Proceedings of the 21st international ACM SIGACCESS conference on computers and accessibility*, pages 16–31, 2019.
- [2] Necati Cihan Camgoz, Simon Hadfield, Oscar Koller, Hermann Ney, and Richard Bowden. Neural sign language translation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7784–7793, 2018.
- [3] Necati Cihan Camgoz, Oscar Koller, Simon Hadfield, and Richard Bowden. Sign language transformers: Joint end-to-end sign language recognition and translation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10023–10033, 2020.
- [4] Zhe Cao, Tomas Simon, Shih-En Wei, and Yaser Sheikh. Realtime multi-person 2d pose estimation using part affinity fields. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7291–7299, 2017.
- [5] Necati Cihan Camgoz, Simon Hadfield, Oscar Koller, and Richard Bowden. Subunets: End-to-end hand shape and continuous sign language recognition. In *Proceedings of the IEEE international conference on computer vision*, pages 3056–3065, 2017.

- [6] Fidel Omar Tito Cruz and Gissella Bejarano. Generative interpolation of sign language poses using rvq-vae. In *Latinx in AI@ NeurIPS 2024*.
- [7] Ralph Elliott, John RW Glauert, JR Kennaway, Ian Marshall, and Eva Safar. Linguistic modelling and language-processing technologies for avatar-based sign language presentation. *Universal access in the information society*, 6(4):375–391, 2008.
- [8] Chuan Guo, Yuxuan Mu, Muhammad Gohar Javed, Sen Wang, and Li Cheng. Momask: Generative masked modeling of 3d human motions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1900–1910, 2024.
- [9] Lianyu Hu, Wei Feng, Liqing Gao, Zekang Liu, and Liang Wan. Cornet+: Sign language recognition and translation via spatial-temporal correlation. *arXiv preprint arXiv:2404.11111*, 2024.
- [10] Maksym Ivashechkin, Oscar Mendez, and Richard Bowden. Improving 3d pose estimation for sign language. In *2023 IEEE International Conference on Acoustics, Speech, and Signal Processing Workshops (ICASSPW)*, pages 1–5. IEEE, 2023.
- [11] Oscar Koller, Jens Forster, and Hermann Ney. Continuous sign language recognition: Towards large vocabulary statistical recognition systems handling multiple signers. *Computer vision and image understanding*, 141:108–125, 2015.
- [12] Taeryung Lee, Hyeongjin Nam, Gyeongsik Moon, and Kyoung Mu Lee. Glos: Sign language generation with temporally aligned gloss-level conditioning. *arXiv preprint arXiv:2506.07460*, 2025.
- [13] Shunlin Lu, Ling-Hao Chen, Ailing Zeng, Jing Lin, Ruimao Zhang, Lei Zhang, and Heung-Yeung Shum. Humantomato: Text-aligned whole-body motion generation. *arXiv preprint arXiv:2310.12978*, 2023.
- [14] John McDonald, Rosalee Wolfe, Jerry Schnepp, Julie Hochgesang, Diana Gorman Jamrozik, Marie Stumbo, Larwan Berke, Melissa Bialek, and Farah Thomas. An automated technique for real-time production of lifelike animations of american sign language. *Universal Access in the Information Society*, 15(4):551–566, 2016.
- [15] Qiguang Miao, Guanwen Feng, Junwei Jing, Yilin Zhang, An Liu, Yunan Li, and Chi-Man Pun. A two-stage sign language generation framework with self-supervised latent representation learning. *Knowledge-Based Systems*, 333:114979, 2026. ISSN 0950-7051. doi: 10.1016/j.knosys.2025.114979. URL <https://www.sciencedirect.com/science/article/pii/S0950705125020179>.
- [16] Wendy Sandler and Diane Carolyn Lillo-Martin. *Sign language and linguistic universals*. Cambridge University Press, 2006.
- [17] Ben Saunders, Necati Cihan Camgoz, and Richard Bowden. Progressive transformers for end-to-end sign language production. In *European Conference on Computer Vision*, pages 687–705. Springer, 2020.
- [18] Ben Saunders, Necati Cihan Camgoz, and Richard Bowden. Continuous 3d multi-channel sign language production via progressive transformers and mixture density networks. *International journal of computer vision*, 129(7):2113–2135, 2021.

- [19] Ben Saunders, Necati Cihan Camgoz, and Richard Bowden. Mixed signals: Sign language production via a mixture of motion primitives. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1919–1929, 2021.
- [20] Ben Saunders, Necati Cihan Camgoz, and Richard Bowden. Signing at scale: Learning to co-articulate signs for large-scale photo-realistic sign language production. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5141–5151, 2022.
- [21] Fei Shen and Jinhui Tang. Imagpose: A unified conditional framework for pose-guided person generation. *Advances in neural information processing systems*, 37:6246–6266, 2024.
- [22] Fei Shen, Xin Jiang, Xin He, Hu Ye, Cong Wang, Xiaoyu Du, Zechao Li, and Jinhui Tang. Imagdressing-v1: Customizable virtual dressing. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 6795–6804, 2025.
- [23] Stephanie Stoll, Necati Cihan Camgoz, Simon Hadfield, and Richard Bowden. Text2sign: towards sign language production using neural machine translation and generative adversarial networks. *International Journal of Computer Vision*, 128(4): 891–908, 2020.
- [24] Shengeng Tang, Jiayi He, Lechao Cheng, Jingjing Wu, Dan Guo, and Richang Hong. Discrete to continuous: Generating smooth transition poses from sign language observations. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 3481–3491, 2025.
- [25] Shengeng Tang, Jiayi He, Dan Guo, Yanyan Wei, Feng Li, and Richang Hong. Sign-idd: Iconicity disentangled diffusion for sign language production. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 7266–7274, 2025.
- [26] Shengeng Tang, Feng Xue, Jingjing Wu, Shuo Wang, and Richang Hong. Gloss-driven conditional diffusion models for sign language production. *ACM Transactions on Multimedia Computing, Communications and Applications*, 21(4):1–17, 2025.
- [27] Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017.
- [28] Harry Walsh, Abolfazl Ravanshad, Mariam Rahmani, and Richard Bowden. A data-driven representation for sign language production. In *2024 IEEE 18th International Conference on Automatic Face and Gesture Recognition (FG)*, pages 1–10. IEEE, 2024.
- [29] Harry Walsh, Ben Saunders, and Richard Bowden. Sign stitching: A novel approach to sign language production. In *35th British Machine Vision Conference 2024, BMVC 2024, Glasgow, UK, November 25-28, 2024*. BMVA, 2024. URL <https://papers.bmvc2024.org/0721.pdf>.
- [30] Harry Walsh, Ed Fish, Ozge Mercanoglu Sincan, Mohamed Ilyes Lakhall, Richard Bowden, Neil Fox, Bencie Woll, Kepeng Wu, Zecheng Li, Weichao Zhao, et al. Slrtp2025 sign language production challenge: Methodology, results and future work. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4148–4158, 2025.

- [31] Pan Xie, Qipeng Zhang, Peng Taiying, Hao Tang, Yao Du, and Zexian Li. G2p-ddm: Generating sign pose sequence from gloss sequence with discrete diffusion model. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 6234–6242, 2024.
- [32] Aoxiong Yin, Haoyuan Li, Kai Shen, Siliang Tang, and Yueting Zhuang. T2s-gpt: Dynamic vector quantization for autoregressive sign language production from text. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3345–3356, 2024.
- [33] Kayo Yin, Amit Moryossef, Julie Hochgesang, Yoav Goldberg, and Malihe Alikhani. Including signed languages in natural language processing. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 7347–7360, 2021.
- [34] Neil Zeghidour, Alejandro Luebs, Ahmed Omran, Jan Skoglund, and Marco Tagliasacchi. Soundstream: An end-to-end neural audio codec. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 30:495–507, 2021.
- [35] Hao Zhou, Wengang Zhou, Yun Zhou, and Houqiang Li. Spatial-temporal multi-cue network for continuous sign language recognition. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 13009–13016, 2020.
- [36] Hao Zhou, Wengang Zhou, Weizhen Qi, Junfu Pu, and Houqiang Li. Improving sign language translation with monolingual data by sign back-translation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1316–1325, 2021.
- [37] Qiran Zou, Shangyuan Yuan, Shian Du, Yu Wang, Chang Liu, Yi Xu, Jie Chen, and Xiangyang Ji. Parco: Part-coordinating text-to-motion synthesis. In *European Conference on Computer Vision*, pages 126–143. Springer, 2024.
- [38] Ronglai Zuo, Fangyun Wei, and Brian Mak. Towards online continuous sign language recognition and translation. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 11050–11067, 2024.
- [39] Ronglai Zuo, Rolandos Alexandros Potamias, Evangelos Ververas, Jiankang Deng, and Stefanos Zafeiriou. Signs as tokens: A retrieval-enhanced multilingual sign language generator. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 23806–23816, 2025.

Supplementary Material

A Keypoint Representation

We use a 61-keypoint 3D pose representation for each frame. Each keypoint contains (x, y, z) coordinates, giving $D = 61 \times 3 = 183$ pose values per frame. The layout is shown in Fig. A1.

- **Body keypoints (0–18):** upper torso, arms, hips, and facial landmarks. This includes shoulders, elbows, wrists, hips, the neck/head base, and facial points around the eyes, ears, and mouth.
- **Right-hand keypoints (19–39):** one wrist keypoint and five four-joint finger chains.
- **Left-hand keypoints (40–60):** one wrist keypoint and five four-joint finger chains, following the same layout as the right hand.

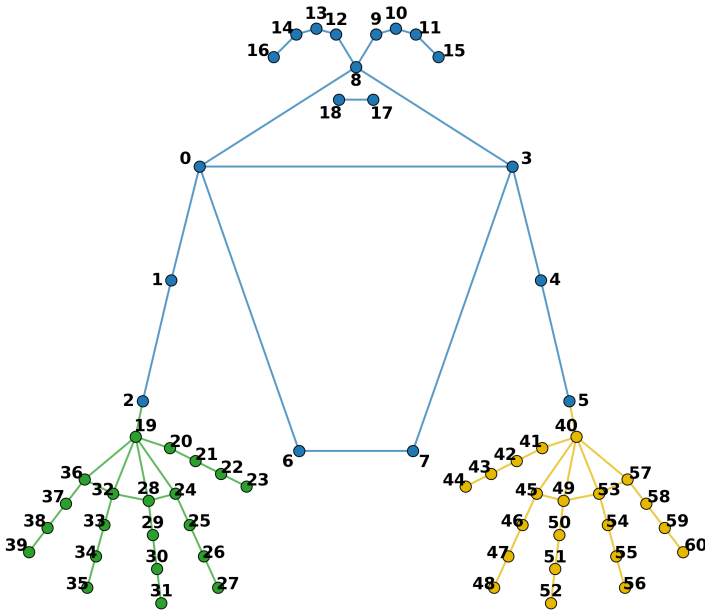


Figure A1: Keypoint layout. Blue nodes denote body keypoints, green nodes denote right-hand keypoints, and yellow nodes denote left-hand keypoints.

B Gloss-Motion Dictionary Construction

We construct the gloss-motion dictionary from the training split. The dictionary stores multiple real motion segments for each gloss, which are later used to initialize the retrieved

sequence in SignRR. Since the datasets provide sentence-level gloss annotations but not frame-level gloss boundaries, we estimate segment boundaries using CorrNet+ [9] and the known gloss order.

Boundary estimation. Given a training sequence with glosses $G = (g_1, \dots, g_N)$, we run the pretrained CorrNet+ recognizer to obtain a frame-level score $r_t(g)$ for each gloss g at frame t . We then use the ground-truth gloss order to estimate the start of each gloss. For gloss g_i , the start frame is selected as the first frame after the previous boundary where the CorrNet+ score of g_i becomes larger than the score of the previous gloss:

$$b_i = \min\{t > b_{i-1} \mid r_t(g_i) > r_t(g_{i-1})\}. \quad (\text{A1})$$

This gives a weak temporal alignment without requiring frame-level boundary annotations. The segment for g_i is extracted from the interval between consecutive boundaries.

Candidate filtering. The raw aligned segments can contain noisy boundaries or abnormal durations. We therefore filter candidates independently for each gloss. Let $\ell(s)$ denote the duration of segment s , and let μ_g and σ_g be the mean and standard deviation of the segment durations for gloss g . A segment is discarded if its duration is too far from the typical duration of that gloss:

$$|\ell(s) - \mu_g| > \tau_\ell \sigma_g. \quad (\text{A2})$$

This removes very short or very long segments that are likely to come from poor alignment.

Candidate scoring. After filtering, each remaining segment is scored using motion smoothness and duration regularity. The smoothness term favors segments with stable temporal motion. For a segment $s = (\mathbf{x}_1, \dots, \mathbf{x}_\ell)$, we measure smoothness using the average frame-to-frame acceleration:

$$e_{\text{sm}}(s) = \frac{1}{\ell - 2} \sum_{t=2}^{\ell-1} \|\mathbf{x}_{t+1} - 2\mathbf{x}_t + \mathbf{x}_{t-1}\|_2. \quad (\text{A3})$$

Lower values indicate smoother motion. We convert this error into a normalized score:

$$q_{\text{sm}}(s) = \exp(-e_{\text{sm}}(s)). \quad (\text{A4})$$

The duration term favors segments whose length is close to the typical duration of the same gloss:

$$q_{\text{dur}}(s) = \exp\left(-\frac{|\ell(s) - \mu_g|}{\sigma_g + \varepsilon}\right). \quad (\text{A5})$$

The final candidate score combines both terms:

$$q(s) = \lambda_{\text{sm}} q_{\text{sm}}(s) + \lambda_{\text{dur}} q_{\text{dur}}(s), \quad (\text{A6})$$

where λ_{sm} and λ_{dur} control the relative weights of motion smoothness and duration regularity. For each gloss, we keep the top S candidates according to $q(s)$.

Algorithm 1 Gloss-motion dictionary construction

Require: Training sequences with sentence-level gloss annotations; pretrained CorrNet+ recognizer

Ensure: Gloss-motion dictionary $\mathcal{D}$

- 1: Initialize an empty candidate set for each gloss
- 2: **for** each training sequence **do**
- 3: Run CorrNet+ to obtain frame-level gloss scores
- 4: Estimate gloss boundaries using Eq. A1
- 5: **for** each aligned gloss occurrence **do**
- 6: Extract the corresponding motion segment
- 7: Add the segment to the candidate set of that gloss
- 8: **end for**
- 9: **end for**
- 10: **for** each gloss g **do**
- 11: Compute duration statistics μ_g and σ_g
- 12: Remove abnormal-duration segments using Eq. A2
- 13: Score each remaining segment using Eq. A6
- 14: Keep the top S candidates
- 15: Store each retained segment and its boundary descriptor in $\mathcal{D}(g)$
- 16: **end for**
- 17: **return** $\mathcal{D}$

Boundary descriptors. For each retained segment, we also store a boundary descriptor used by the dynamic-programming selector during inference. The descriptor contains the first and last poses of the segment, together with their local velocities:

$$\phi(s) = [\mathbf{x}_1, \mathbf{x}_\ell, \mathbf{x}_2 - \mathbf{x}_1, \mathbf{x}_\ell - \mathbf{x}_{\ell-1}]. \quad (\text{A7})$$

This descriptor allows the selector to compare the compatibility of adjacent retrieved segments without using the full segment sequence.

The resulting dictionary provides real motion candidates for each gloss. The filtering step reduces noisy alignments, while the scoring step favors segments that are both temporally smooth and close to the typical duration of the corresponding gloss.

C Dynamic Programming Segment Selection

At inference time, SignRR receives a gloss sequence and selects one motion segment per gloss from the dictionary $\mathcal{D}$. Selecting segments only by their individual quality can produce visible jumps at segment boundaries, while selecting only by boundary smoothness can ignore the quality of the retrieved signs. We therefore optimize both terms jointly using dynamic programming over the candidate trellis defined by $\mathcal{D}$.

Out-of-dictionary glosses. A gloss in the test input may be absent from $\mathcal{D}$ because it was filtered out during dictionary construction (Sec. B) or because of minor spelling variants. We replace each such gloss with the closest dictionary entry g^* under Levenshtein edit distance:

$$g^* = \arg \min_{g' \in \mathcal{V}_{\mathcal{D}}} \text{Lev}(g, g'), \quad (\text{A8})$$

where $\mathcal{V}_{\mathcal{D}}$ is the set of glosses present in the dictionary. This ensures that each gloss position has at least one candidate segment. In the two evaluated datasets, unseen gloss types do not often occur. PHOENIX14T contains 19 in the development split and 22 in the test split, while CSL-Daily contains none.

Boundary cost. The boundary cost measures the discontinuity between two consecutive segments. Given a previous segment s' and a current segment s , we compare the end descriptor of s' with the start descriptor of s :

$$d_{\text{bnd}}(s', s) = \|\phi_{\text{end}}(s') - \phi_{\text{start}}(s)\|_2. \quad (\text{A9})$$

The descriptors include both pose and local velocity, so this cost penalizes spatial jumps and abrupt motion changes at the seam. Since d_{bnd} and the segment quality score $q(s) \in [0, 1]$ have different scales, we normalize the boundary cost by a dataset-level constant $\tilde{d}$. We compute $\tilde{d}$ once as the median boundary cost over randomly sampled pairs of dictionary segments, making the normalization robust to outliers.

Dynamic-programming recurrence. Let $\mathcal{S}_i = \mathcal{D}(g_i)$ be the candidate set for gloss g_i , and let $s_{i,j} \in \mathcal{S}_i$ denote its j -th candidate. We define $C_i(j)$ as the minimum cumulative cost of any path ending at $s_{i,j}$. The first position is initialized using only the segment quality cost:

$$C_1(j) = \beta(1 - q(s_{1,j})). \quad (\text{A10})$$

For $i = 2, \dots, N$, the recurrence is

$$C_i(j) = \min_k \left[C_{i-1}(k) + \alpha \frac{d_{\text{bnd}}(s_{i-1,k}, s_{i,j})}{\tilde{d}} \right] + \beta(1 - q(s_{i,j})), \quad (\text{A11})$$

where α and β control the trade-off between transition smoothness and segment quality. We store the minimizing predecessor in a back-pointer table $B_i(j)$ and use $\alpha = 1.0$ and $\beta = 0.5$ in all experiments.

Backtracking. After the forward pass, we start from the lowest-cost candidate at the final gloss:

$$j_N^* = \arg \min_j C_N(j). \quad (\text{A12})$$

We then recover the full path by following the back-pointers:

$$j_i^* = B_{i+1}(j_{i+1}^*), \quad i = N-1, \dots, 1. \quad (\text{A13})$$

The selected path is $\pi^* = (\pi_1^*, \dots, \pi_N^*)$, where $\pi_i^* = s_{i,j_i^*}$. These segments are concatenated in order and passed to the RVQ-VAE refinement model as the initial motion.

With at most S candidates per gloss and a gloss sequence of length N , the algorithm runs in $O(NS^2)$ time. The selected path balances segment quality and boundary continuity, giving the refinement model a smoother retrieved initialization.

D Implementation Details

This section summarizes the implementation details used in our experiments.

Algorithm 2 Dynamic programming segment selection**Require:** Gloss sequence $G = (g_1, \dots, g_N)$; dictionary $\mathcal{D}$; weights α, β ; normalizer $\tilde{d}$ **Ensure:** Selected path $\pi^* = (\pi_1^*, \dots, \pi_N^*)$

```

1: Resolve out-of-dictionary glosses in  $G$  using Eq. A8
2: Let  $\mathcal{S}_i = \mathcal{D}(g_i)$  for  $i = 1, \dots, N$ 
3: for  $j = 1, \dots, |\mathcal{S}_1|$  do
4:    $C_1(j) \leftarrow \beta(1 - q(s_{1,j}))$ 
5: end for
6: for  $i = 2, \dots, N$  do
7:   for  $j = 1, \dots, |\mathcal{S}_i|$  do
8:     Compute  $C_i(j)$  using Eq. A11
9:     Store the minimizing predecessor in  $B_i(j)$ 
10:   end for
11: end for
12:  $j_N^* \leftarrow \arg \min_j C_N(j)$ 
13: for  $i = N - 1, \dots, 1$  do
14:    $j_i^* \leftarrow B_{i+1}(j_{i+1}^*)$ 
15: end for
16:  $\pi_i^* \leftarrow s_{i,j_i^*}$  for  $i = 1, \dots, N$ 
17: return  $\pi^*$ 

```

Refinement model. The refinement model uses part-specific encoders for the body, right hand, and left hand. Each encoder has two stride-2 downsampling stages with dilated ResNet-1D blocks and hidden width 512. Each part uses $L = 3$ residual codebooks. The body stream uses codebooks with 256 entries, while each hand stream uses codebooks with 384 entries. The shared decoder mirrors the encoder structure and outputs the $D = 183$ pose dimensions.

Gloss encoder and length prediction. The gloss encoder is a 2-layer Transformer with 4 attention heads, model dimension 128, and dropout 0.1. Its mean-pooled output is projected to 512 dimensions and passed to a 2-layer ReLU MLP with hidden width 256 to predict the length offset Δ . We use $T_{\max} = 300$ for PHOENIX14T, $T_{\max} = 352$ for CSL-Daily, and $\delta_{\text{scale}} = 100$. At inference, the predicted target length is clamped to $[16, T_{\max}]$.

Training objective. For the training objective in the main paper, we use $\lambda_v = 0.1$, $\lambda_c = 0.02$, and $\lambda_\ell = 0.01$. In the part-weighted smooth- ℓ_1 reconstruction loss, the body weight is 1.0, and each hand weight is 2.0.

Dictionary configuration. For each gloss, we keep at most $S = 25$ representative segments. Candidates are selected using the quality score described in Sec. B, with diversity-based subsampling when more than S candidates are available. The dynamic-programming normalizer $\tilde{d}$ is estimated once per dataset from randomly sampled inter-gloss segment pairs. After filtering, the dictionaries contain 9,311 segments for PHOENIX14T and 32,500 segments for CSL-Daily, with an average of 8.61 and 16.26 candidates per gloss, respectively.

E Synthetic Motion Generation

For our refinement-without-retrieval analysis, we use a synthetic motion to evaluate whether the refinement model can operate without real retrieved sign segments. We synthesized continuous hand displacement trajectories by adding mathematically defined motion curves to a randomly selected reference frame. We used three trajectory types to approximate simple hand motion patterns: linear (Eq. A14), sinusoidal (Eq. A16), and quadratic (Eq. A15). Each trajectory used a fixed amplitude chosen empirically, while the orientation and frequency were randomized to increase variation across samples.

Let n denote the number of frames in the synthetic sequence, and let $s \sim \mathcal{U}(0.005, 0.02)$ be the step size sampled uniformly at random. The displacement domain is defined as an evenly spaced sequence of n points. Each trajectory returns a sequence of 2D displacement vectors $\{(x_i, y_i)\}_{i=0}^{n-1}$, where $x_i = i \cdot s$ and $i = 0, 1, \dots, n-1$. The three trajectories are defined as follows:

$$(x_i, y_i) = \begin{cases} (0, i \cdot s) & \text{if vertical,} \\ (i \cdot s, 0) & \text{if horizontal.} \end{cases} \quad (\text{A14})$$

$$x_i = i \cdot s, \quad y_i = 12x_i^2 \quad (\text{A15})$$

$$x_i = i \cdot s, \quad y_i = 0.1 \sin(25x_i) \quad (\text{A16})$$

The resulting displacement vectors are added to the X and Y components of the keypoints from the randomly selected reference frame $\mathbf{p}^{(\text{ref})}$, producing the displaced keypoint positions $\mathbf{p}_i$:

$$\mathbf{p}_i = \mathbf{p}^{(\text{ref})} + \mathbf{d}_i, \quad \mathbf{d}_i = (x_i, y_i) \in \mathbb{R}^2. \quad (\text{A17})$$

The trajectories were applied to 46 selected keypoints per frame, since these keypoints carry most of the movement during signing. The selected keypoints cover the wrists, palms, and finger joints of both hands. Specifically, the right hand includes keypoints 1–2 and 19–39, while the left hand includes keypoints 4–5 and 40–60.

To produce temporally smooth sequences, adjacent segments were joined using linear boundary interpolation (Eq. A18). Given two consecutive segments $S^{(k)}$ and $S^{(k+1)}$, let $\mathbf{p}_{\text{last}}^{(k)}$ and $\mathbf{p}_{\text{first}}^{(k+1)}$ denote their boundary frames. A fixed number of $T = 10$ interpolated frames is inserted between them:

$$\mathbf{p}_t = (1 - \alpha_t) \mathbf{p}_{\text{last}}^{(k)} + \alpha_t \mathbf{p}_{\text{first}}^{(k+1)}, \quad t = 1, \dots, T, \quad \alpha_t = \frac{t}{T+1}. \quad (\text{A18})$$

Since $\alpha_t \in (0, 1)$, the boundary frames are not duplicated, and the transitions remain smooth. All segments are then concatenated to produce synthetic sequences with lengths comparable to the original sequences, allowing a variation of ± 20 frames per video.

We then applied a filtering step to remove physically implausible frames based on two anatomical constraints. A frame is marked as invalid if either of the following rules is violated:

- **Hand height:** no keypoint belonging to either hand may exceed a vertical ceiling defined by keypoint 9 plus an offset of 0.6 units. This prevents the hands from being placed far above the head.

Table A1: Robustness to dictionary segmentation on PHOENIX14T (TEST). Each setting rebuilds the dictionary and retrains SignRR using the corresponding boundaries.

Dictionary	WER↓	BLEU-1↑	BLEU-4↑	ROUGE↑	MPJPE↓
SignRR (proposed)	80.98	28.78	10.96	28.15	53.70
Jitter ± 4	81.43	28.28	11.28	27.90	53.47
Jitter ± 8	82.08	27.57	10.65	27.21	54.05
Jitter ± 16	82.88	27.00	10.54	26.53	54.41
Uniform (no recognizer)	81.40	27.26	10.58	27.12	53.55

Table A2: Per-sequence inference time on PHOENIX14T (TEST) with batch size 1 on a single NVIDIA A100 GPU.

Method	ms/seq.	Params (M)
SignRR: DP selection	54.6	–
SignRR: assembly	0.1	–
SignRR: refinement	33.1	38.5
SignRR: total	87.8	38.5
Sign-IDD [14]	85.0	16.8
G2P-DDM [15]	2237	106.3

- **Arm length:** the elbow keypoints, keypoints 1 and 5, must remain within 20% of the vertical distance between keypoints 0 and 6, which corresponds to the torso length. This prevents physically implausible arm extensions.

After filtering, the remaining valid frames are resampled back to the original sequence length using linear interpolation, following the same procedure as Eq. A18.

The resulting synthetic sequences approximate simple continuous hand motion patterns while remaining semantically neutral; that is, they do not correspond to any actual sign or meaningful gesture. This provides smooth motion inputs that lack sign-specific articulation, allowing us to test whether real retrieved motion is necessary for effective refinement.

F Robustness to Dictionary Segmentation

We evaluate the robustness of SignRR to variations in the gloss boundaries used to construct the dictionary. For each interior boundary, we independently sample an offset from the discrete uniform distribution over $\{-k, \dots, k\}$ frames, with $k \in \{4, 8, 16\}$, and shift the boundary by that offset. We constrain the perturbed boundaries to preserve gloss order and a minimum segment length of three frames, while keeping the first and last sequence boundaries fixed. For each setting, we rebuild the dictionary from the perturbed segments and retrain SignRR using the same configuration as in the main experiments.

We also consider a recognizer-free baseline in which a sequence of length L containing N glosses is uniformly divided into N segments without using CorrNet+ predictions. The same dictionary construction and training procedure is then applied. Table A1 shows that performance remains stable under perturbations and decreases gradually as the boundary variation increases. At ± 16 frames, BLEU-4 decreases by only 0.42. Uniform segmentation still obtains BLEU-4 10.58, showing that CorrNet+-based boundaries are helpful, while SignRR remains effective with a much coarser segmentation.

G Inference Time

We evaluate inference time on the PHOENIX14T test set with batch size 1 on a single NVIDIA A100 GPU. Dynamic-programming selection runs on the CPU, while refinement is measured as one forward pass of the full model.

Table A2 reports the inference time for each component and the parameter counts. Sign-IDD and G2P-DDM are measured using their released implementations on the same GPU with 10 DDIM and 100 diffusion steps, respectively. SignRR requires 87.8 ms per sequence, with 54.6 ms for segment selection and 33.1 ms for refinement. Its total inference time is comparable to Sign-IDD and about $25\times$ faster than G2P-DDM.