

MemCompiler: Compile, Don't Inject — State-Conditioned Memory for Embodied Agents

Xin Ding¹ * Xinrui Wang² * Yifan Yang³ Hao Wu⁴ Shiqi Jiang³ Qianxi Zhang³

Liang Mi⁴ Hanxin Zhu¹ Kun Li⁵ Yunxin Liu⁵ Zhibo Chen¹ † Ting Cao⁵ †

¹University of Science and Technology of China ²Huazhong University of Science and Technology

³Microsoft Research ⁴Nanjing University

⁵Institute for AI Industry Research (AIR), Tsinghua University

Existing memory systems for embodied agents typically inject retrieved memory as static context at episode start, a paradigm we term *Ahead-of-time Monolithic Memory Injection (AMMI)*. However, this static design quickly becomes misaligned with the agent's evolving state and may degrade lightweight executors below the no-memory baseline. To address this, we propose MemCompiler, which reframes memory utilization as *State-Conditioned Memory Compilation*. A learned Memory Compiler reads a structured *Brief State* capturing the agent's current execution state and dynamically selects and compiles only relevant memory into executable guidance. This guidance is delivered through a text channel and a latent *Soft-Mem* channel that preserves perceptual information not expressible in text. Across AlfWorld, EmbodiedBench, and ScienceWorld, MemCompiler consistently improves over no-memory across open-source backbones (up to +129%), matches or approaches frontier closed-source systems, and reduces per-step latency by 60%, demonstrating that state-aware memory compilation improves both effectiveness and efficiency.

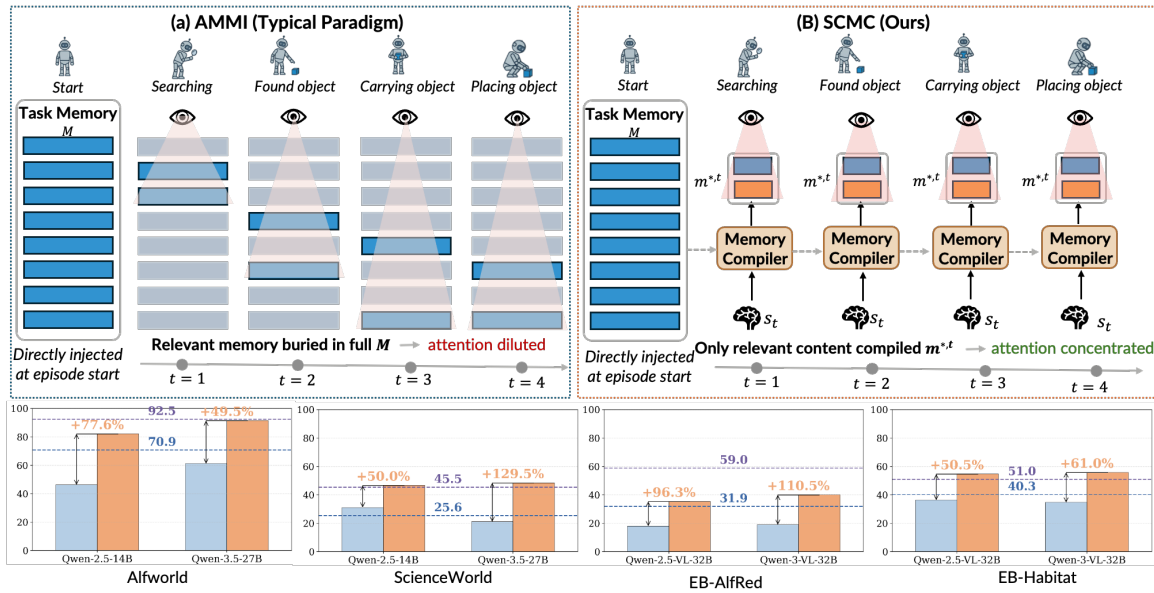


Figure 1 | Two paradigms for memory utilization in embodied agents. (a) AMMI injects the full task memory M at episode start directly, the Executor must attend over all of M , burying valuable experience under irrelevant entries. (b) SCMC (Ours) retains M as a source library and compiles only state-relevant content $m^{*,t}$ at each step, ensuring the Executor receives precisely what it needs. —, —, —, — denote Qwen, GPT-5.2, Gemini-3-Flash, and our method, respectively, with performance measured across benchmarks.

1. Introduction

For embodied agents deployed in persistent real-world environments such as homes and warehouses [1, 2, 3, 4], memory is indispensable. It enables agents to overcome partial observability, accumulate cross-episode skill transfer, and avoid the long tail of rare failures that only accumulated experience can prevent [5, 6, 7].

However, current memory systems for embodiment have focused overwhelmingly on *what* and *how* to remember [8, 9, 10, 11], and left largely unsolved the question of *when* and *how* to deliver memory during execution. All existing embodiment memory systems share a common delivery paradigm we term Ahead-of-time Monolithic Memory Injection (AMMI) [12, 13, 14, 15, 16]: retrieved entries are assembled into a static context at episode start and held fixed throughout execution. The static injection grows increasingly misaligned with current needs, burying valuable experience under irrelevant or even counterproductive entries, a failure mode we term *attention dilution*. In our measurement, executor’s attention over AMMI-injected memory tokens largely drops with episode steps (Figure 3). It may even lead to *worse results* than no memory.

This attention dilution arises from structural properties specific to embodiment that are absent in language agents. In language agents, memory usage can often rely on the executor’s strong ability to retrieve relevant information from a static text context. In contrast, embodied agents must infer memory relevance online from a continuously evolving multimodal execution state, a challenge further amplified by the fact that embodied policy models are typically lightweight compared to language agents [17, 18]. Specifically, (i) memory relevance is **state-dependent** [19, 20, 21], meaning its usefulness depends on inferred subgoal progress and environmental beliefs derived from a continuous visual-action stream rather than an explicit query, making static memory injection unable to adapt to state shifts and thereby degrading performance; and (ii) embodied experience is inherently **multimodal** [3, 22, 23], where spatial and affordance information is difficult to encode in text while task-relevant signals are sparse in visual inputs, causing text-only memory to lose critical cues and naive visual images injection to further amplify attention dilution.

To address both challenges, we propose **MemCompiler**, a new paradigm called **State-Conditioned Memory Compilation (SCMC)**. This method replaces AMMI’s monolithic pre-injection mechanism with a state-aware, multimodal-sensitive memory compilation process, ensuring that the guidance delivered to the Executor is always aligned with current execution needs. In classical compilation, a compiler transforms source code into target instructions conditioned on the runtime environment; the same source code yields different executables for different targets. We draw an analogy: task memory is source code, the agent’s current execution state is runtime context, and a learned Memory Compiler dynamically translates relevant memory entries into actionable guidance at each decision step.

To realize MemCompiler, we introduce the Memory Compiler and Soft-Mem as two complementary components. The Memory Compiler, a lightweight model, consults the agent’s current Brief State at each step to identify which entries in task memory are currently applicable and compile them into targeted text guidance. Leveraging the same internal representations, Soft-Mem further projects latent soft tokens directly into the Executor’s embedding space, transmitting perceptual and spatial knowledge that the text channel cannot encode; an orthogonality constraint prevents the latent channel from collapsing into a copy of the text output. Both components are trained end-to-end via supervised fine-tuning, followed by GRPO-based [24] reinforcement learning that sharpens the Memory Compiler’s compilation decisions using binary task-success rewards.

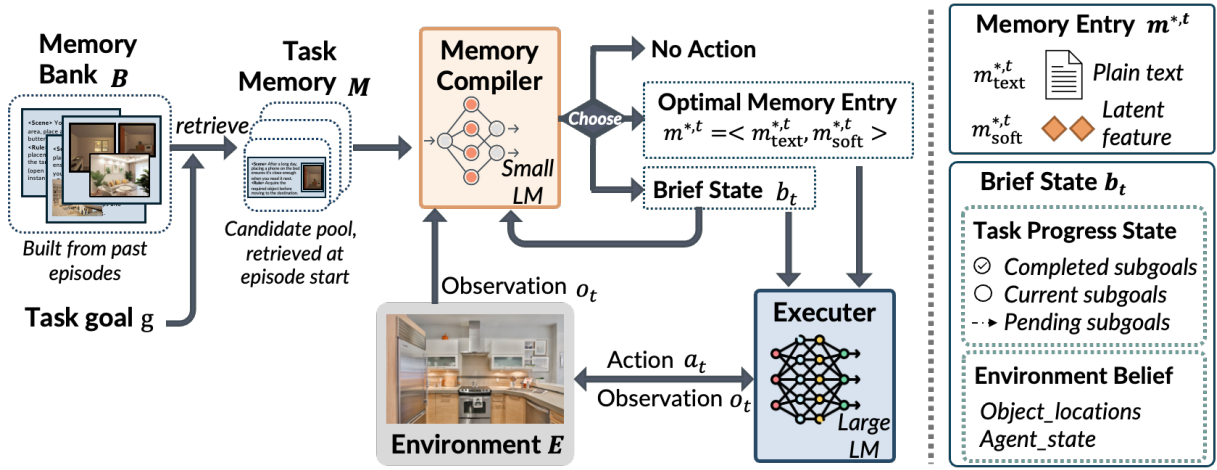


Figure 2 | Overview of MemCompiler at step t . The Memory Compiler reads runtime state $s_t = (o_t, b_t)$ and task memory M (retrieved once at episode start), then delivers the compiled result $m^{*,t}$ to the Executor through two parallel channels: a text channel ($m_{text}^{*,t}$) and a latent soft channel ($m_{soft}^{*,t}$), which are fused at the Executor’s embedding level. Brief State b_t is dynamically maintained via structured operations and fed back as part of the next step’s state. Note, at each step the Memory Compiler decides among four output types (Section 3.2): EXPERIENCE ($m^{*,t}$ only), BRIEF (Δb_t only), HYBRID (both jointly), or NOACTION (neither, when no entry in M is currently applicable).

We evaluate MemCompiler on AlfWorld, EmbodiedBench (EB-ALFRED, EB-Habitat), and ScienceWorld across four open-source and two closed-source backbones. MemCompiler consistently improves over the no-memory baseline across all open-source executors and benchmarks, with gains reaching +110% on EB-ALFRED and +129% on ScienceWorld, while AMMI baselines often degrade smaller executors. Notably, MemCompiler enables mid-size open-source models to approach or match frontier closed-source systems, with Qwen-3.5-27B + MemCompiler matching Gemini-3-flash on AlfWorld and surpassing GPT-5.2 and Gemini-3-flash (no memory) on EB-Habitat. Beyond accuracy, MemCompiler is also more efficient: compared to AMMI on the same backbone, it reduces executor input tokens by 60% and cuts per-step latency from 0.30s to 0.12s, as the executor only processes compact, state-relevant compiled memory.

2. Related Work

General Agent Memory Systems. Most general-purpose agent memory systems assume a *static, up-front memory injection* paradigm, where retrieved or summarized content is provided once and remains unchanged throughout execution. Foundational systems such as Generative Agents [25, 26, 3], Reflexion [27], MemGPT [28], and ExpeL [29] store and retrieve experience in natural language, injecting it into the input context during execution.

Subsequent work explores more structured memory organization, including knowledge graph indexing as in HippoRAG [30], LLM-driven memory management as exemplified by Mem0 [13], Zettelkasten-style [31, 32] linking proposed in A-Mem [33], and agent-controlled hot-path updates introduced in LangMem. Code agents such as Claude Code [18] and OpenClaw [17] introduce rule-based progressive disclosure, incrementally injecting references during execution. However, these systems are primarily

developed for language- or code-centric agents built on powerful LLM backbones [34, 35, 36], and thus assume text-based interaction and high-capacity reasoning, making them less suitable for embodied agents operating over visual-action streams under lightweight policy constraints.

Memory for Embodied Agents. In embodied settings, prior work largely follows an *Ahead-of-time Monolithic Memory Injection (AMMI)* paradigm, where memory is retrieved at task initialization and remains fixed thereafter. Representative systems include Voyager [37], JARVIS-1 [38], G-Memory [39], and Evo-Memory [40], which differ in memory structure but share this static injection scheme. While effective in providing task-level context, such approaches cannot adapt memory usage to the agent’s evolving execution state or shifting informational needs over time.

A smaller line of work moves toward *query-time or step-level memory construction*. GAM [41] defers context construction to query time, and RoboMemory [42] updates spatial and episodic memory at each step in real-world robotic settings. However, these approaches primarily focus on improving retrieval and organization, rather than explicitly modeling fine-grained state-dependent usefulness of memories during execution. In contrast, our Memory Compiler maintains a structured Brief State that enables explicit, state-conditioned compilation at each step.

Beyond Text: Latent Memory Representations. Existing approaches explore latent memory along different directions, yet fall short of the requirements of embodied execution. NextMem [43] derives latent representations by compressing textual memory, inheriting the information bottleneck of text as the primary source. MemGen [44] generates latent tokens from the current reasoning state, but does not explicitly leverage cross-episode experience. VisMem [45] introduces perceptual latent tokens for visual reasoning, yet treats them largely as standalone augmentations, without conditioning on a structured execution state or integrating them with accumulated experience. As a result, latent memory remains decoupled from both the agent’s evolving task state and its accumulated experience.

In contrast, within our state-conditioned compilation framework, Soft-Mem selectively compiles latent representations from cross-episode memory and explicitly constrains them to complement, rather than duplicate, the textual channel.

3. Method

3.1. Problem Formulation of MemCompiler

The problem investigated in this work is how to enable an embodied agent to autonomously decide *when* and *how* to utilize cross-episode experiential memory. The agent operates in environment $\mathcal{E}$ with state space $\mathcal{S}$ and action space $\mathcal{A}$, receiving visual observation $o_t \in \mathbb{R}^{H \times W \times C}$ and executing action $a_t \in \mathcal{A}$ at each timestep t to pursue task goal g , where $s_t \in \mathcal{S}$ denotes the agent’s full episode state. The agent has access to a memory bank $\mathcal{B}$ accumulated across prior episodes, storing strategies, failure reflections, and procedural guidelines. At the start of each episode, relevant experience entries are retrieved from $\mathcal{B}$ to form a fixed task memory candidate pool:

$$\mathcal{M} = \text{Retrieve}(\mathcal{B}, g) \tag{1}$$

Ahead-of-Time Memory Injection. We consider a standard memory utilization setting: Ahead-of-time Monolithic Memory Injection (AMMI), where $\mathcal{M}$ is directly injected into the agent’s context at episode start, yielding a sequence of actions $a_{0:T}$ under policy $\pi(a_t \mid o_t, \mathcal{M})$ throughout execution.

However, the optimal memory entry $m^{*,t}$ is state-dependent:

$$m^{*,t} = \arg \max_{m \in \mathcal{M}} \mathbb{E}_{\tau \sim \pi(\cdot \mid s_t, m)} [\mathbf{1}(\text{success}(\tau))] \quad (2)$$

As execution proceeds, subgoals are progressively completed and environmental observations accumulate, causing the agent’s state to continuously evolve. Yet AMMI injects the full $\mathcal{M}$ at episode start without subsequent selection. As the applicability of each entry in $\mathcal{M}$ shifts with the evolving state, the Executor is forced to attend over the entire static injection, with valuable experience increasingly buried under irrelevant or even counterproductive entries.

State-Conditioned Memory Compilation. To address this dilution, we propose State-Conditioned Memory Compilation (SCMC). We define **Brief State** $b_t = \phi(g, a_{0:t-1}, o_{0:t-1})$ as a runtime context, where ϕ denotes a structured, task-relevant compression of the task goal g , action history $a_{0:t}$, and prior observations $o_{0:t-1}$, maintained and updated by the **Memory Compiler** throughout the episode. Defining the full *runtime state* as $s_t = (o_t, b_t)$, the Memory Compiler takes the current s_t and candidate pool $\mathcal{M}$ as input at each timestep t , and dynamically **compiles** state-appropriate memory:

$$m^{*,t} = \pi_C(s_t, \mathcal{M}) \quad (3)$$

Under this formulation, $\mathcal{M}$ serves as *source code*, and the Memory Compiler compiles $m^{*,t}$ conditioned on the current state s_t at each step. The complete design of MemCompiler is detailed in Section 3.2.

3.2. Methodology of MemCompiler

3.2.1. Overview and Motivation

MemCompiler addresses state-conditioned memory utilization for embodied agents. As established in Section 3.1, AMMI injects the full $\mathcal{M}$ at episode start without subsequent selection, burying valuable experience under irrelevant or counterproductive entries as s_t evolves.

Resolving this requires answers to two questions. **When to compile:** memory compilation should be conditioned on the agent’s current runtime state, requiring a compilation policy that decides at each step whether to compile, and a structured runtime context that captures task progress and environmental knowledge to support such decisions precise. **How to compile:** even given correct timing, compiled memory must be delivered while preserving information critical for decision-making, yet experiential memory $\mathcal{M}$ contains visual and spatial knowledge from prior episodes that text output alone cannot fully convey. These two questions motivate the design of MemCompiler, illustrated in Figure 2.

3.2.2. When to Compile

Limitation of Static Injection. The fundamental limitation of AMMI lies in its inability to adapt memory usage over time. Injecting the full memory set $\mathcal{M}$ at episode start, before any task progress or environmental observations are available, results in a persistent mismatch between injected content and the agent’s evolving state. As execution proceeds, relevant entries become increasingly obscured by irrelevant ones, leading to cumulative attention dilution.

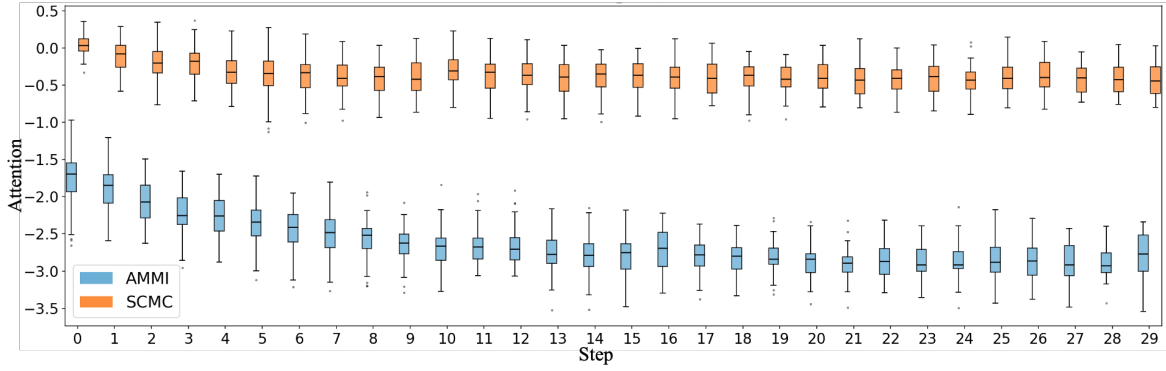


Figure 3 | Mean pre-softmax attention logit (higher values mean more attention weight) of the Executor over memory tokens across AlfWorld episodes (steps 0–29). AMMI (blue) exhibits monotonic decay, reflecting increasing misalignment between static memory and the agent’s evolving state. In contrast, SCMC (orange) maintains stable high attention throughout, indicating consistent alignment between memory and the Executor’s current needs.

Empirical Evidence. We validate this on AlfWorld by visualizing the Executor’s attention over memory tokens at each step (Figure 3). Under AMMI, attention declines monotonically throughout the episode, dropping by 86.7% by step 29, as static injection becomes increasingly misaligned with the agent’s evolving state. In contrast, under SCMC, attention remains stable across all steps, indicating that compiled memory stays consistently aligned with the Executor’s current needs. This gap widens over time, confirming that attention dilution is an accumulating cost of static injection.

Why Rule-based Disclosure Is Insufficient. A natural alternative is rule-based progressive disclosure, as used in code agents [17, 18], where memory is injected according to predefined trigger rules. This approach assumes that the applicability of a memory entry can be approximated by simple, observable conditions.

However, in embodied settings, applicability depends on the joint state of task progress and environment belief, both of which evolve continuously and are not directly observable from the raw action-observation stream. As a result, rule-based reference are inherently misaligned with true utility. Moreover, unlike frontier language models, the lightweight policy executor lacks the capacity to filter large injected contexts, making incorrect injections costly in terms of attention.

Brief State. At any timestep t , assessing whether a memory entry m is applicable requires answering two questions: (1) does m ’s guidance target the agent’s *current subgoal*? (2) do m ’s assumed conditions hold in the *current environment*?

However, raw observation history cannot answer these questions directly: it is long, redundant, and lacks explicit task progress indices or organized environmental facts. We formalize the runtime state as $s_t = (o_t, b_t)$, where *Brief State* $b_t = \phi(g, a_{0:t-1}, o_{0:t-1})$ provides exactly these two signals through a two-dimensional structure:

- **Task Progress State:** goal g , completed subgoals, current subgoal, and pending subgoals — answering *whether m ’s guidance is relevant to the current subgoal*.

-
- **Environment Belief:** known object locations, agent status, and task-relevant environmental facts — answering *whether m 's assumed conditions currently hold*.

Together, these two dimensions provide the structured context necessary for step-level utility assessment.

Memory Compiler. Given the structured runtime state $s_t = (o_t, b_t)$, the Memory Compiler faces two orthogonal decisions at each step: (1) should it provide memory guidance to the Executor? (2) should it update the Brief State for use in subsequent steps?

While Equation 3 captures the core case where π_C directly outputs $m^{*,t}$, the full output space of π_C accounts for both decisions, yielding four output types:

- **EXPERIENCE:** the compiled memory $m^{*,t}$ delivered as strategic guidance to the Executor, without updating Brief State.
- **BRIEF:** Brief State update Δb_t only, refining the runtime context without guiding the Executor.
- **HYBRID:** both $m^{*,t}$ and Δb_t simultaneously.
- **NOACTION:** $\emptyset$; no entry in $\mathcal{M}$ reaches sufficient utility given the current s_t , and the Executor then acts without memory guidance.

These four cases define the complete output space of π_C :

$$\pi_C(s_t, \mathcal{M}) \in \{m^{*,t}, \Delta b_t, (m^{*,t}, \Delta b_t), \emptyset\} \quad (4)$$

When the output includes Δb_t , Brief State updates follow $b_{t+1} = \text{Apply}(\Delta b_t, b_t)$, where Δb_t specifies one of four operations: **CREATE** (new belief entry), **UPDATE** (revised belief), **DELETE** (invalidated belief), or **FOLD** (belief state transition on subgoal completion).

3.2.3. How to Compile

Overview In embodied tasks, experiential memory accumulated across episodes inherently contains perceptual information such as visual layouts and spatial configurations. These signals are critical for the agent's decisions yet resist faithful expression in natural language. We therefore introduce *Soft-Mem*, a dual-channel compilation mechanism that delivers the compiled result $m^{*,t}$ to the Executor in both textual $m_{\text{text}}^{*,t}$ and latent $m_{\text{soft}}^{*,t}$ form.

However, training the latent channel solely through end-to-end action prediction loss leaves the relationship between the two channels unconstrained: since $m_{\text{soft}}^{*,t}$ has no ground-truth supervision during SFT, there is no guarantee it encodes information distinct from the text channel, leaving the RL stage with a poorly initialized latent channel. We therefore introduce $\mathcal{L}_{\text{soft}}$ to explicitly shape the latent channel before RL training begins.

Dual-Channel Output. After autoregressively generating $m_{\text{text}}^{*,t}$ in text form, the Memory Compiler continues to process N appended special [UNK] tokens. The final-layer hidden states at these positions, $\mathbf{h} \in \mathbb{R}^{N \times d_{\text{MC}}}$, have attended over the full content of $\mathcal{M}$ including its visual and spatial information. A trainable projection f_ϕ maps $\mathbf{h}$ to the parameters of a Gaussian distribution in the Executor's embedding space:

$$(\boldsymbol{\mu}, \log \boldsymbol{\sigma}) = f_\phi(\mathbf{h}), \quad m_{\text{soft}}^{*,t} = \boldsymbol{\mu} + \boldsymbol{\sigma} \odot \boldsymbol{\epsilon}, \quad \boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}) \quad (5)$$

where $m_{\text{soft}}^{*,t} \in \mathbb{R}^{N \times d_{\text{base}}}$ then replaces the designated placeholder positions in the Executor’s input embeddings, delivering latent perceptual semantics that bypass the text bottleneck. The compiled result received by the Executor thus consists of two parts: the textual $m_{\text{text}}^{*,t}$ carrying interpretable strategic guidance, and $m_{\text{soft}}^{*,t}$ carrying what text cannot say.

Training. We train MemCompiler in two stages. The **SFT stage** jointly optimizes three objectives: the text loss $\mathcal{L}_{\text{text}}$ supervises the Memory Compiler’s plaintext output via next-token prediction; the action loss $\mathcal{L}_{\text{action}}$ supervises the Executor’s action prediction with $m_{\text{soft}}^{*,t}$ injected, with gradients flowing back through $m_{\text{soft}}^{*,t}$ to train $\mathbf{W}_p$; and the soft-token loss $\mathcal{L}_{\text{soft}}$ jointly constrains the information quality of $m_{\text{soft}}^{*,t}$:

$$\mathcal{L}_{\text{soft}} = \underbrace{-\frac{1}{N} \sum_{i=1}^N \log p_{\theta}(\tilde{e}_i)}_{\text{semantic alignment}} + \lambda \underbrace{|\cos(\bar{h}_{\text{soft}}, \text{sg}[\bar{h}_{\text{text}}])|}_{\text{complementarity constraint}} \quad (6)$$

where the semantic alignment term grounds the latent channel in perceptual content from $\mathcal{M}$ that text cannot express, while the complementarity constraint penalizes the cosine similarity between $\bar{h}_{\text{soft}}$ and the stop-gradient $\bar{h}_{\text{text}}$, preventing $m_{\text{soft}}^{*,t}$ from collapsing into a redundant copy of the text signal. Together, they act as an *initialization prior* that simultaneously aligns the latent channel with perceptual content and pushes it away from the text representation before RL begins. The two terms are balanced by λ . The complete SFT objective is:

$$\mathcal{L}_{\text{SFT}} = \mathcal{L}_{\text{text}} + \mathcal{L}_{\text{action}} + \lambda_{\text{soft}} \mathcal{L}_{\text{soft}} \quad (7)$$

The **RL stage** applies GRPO [24] to further refine the Memory Compiler’s compilation policy, keeping the Executor fixed. For each episode, GRPO samples G compilation trajectories from the current policy and assigns a binary reward $r_i \in \{0, 1\}$ based on task success:

$$\mathcal{L}_{\text{GRPO}} = -\frac{1}{G} \sum_{i=1}^G \min \left(\frac{\pi_{\theta}(o_i|s)}{\pi_{\theta_{\text{old}}}(o_i|s)} A_i, \text{clip} \left(\frac{\pi_{\theta}(o_i|s)}{\pi_{\theta_{\text{old}}}(o_i|s)}, 1-\epsilon, 1+\epsilon \right) A_i \right) \quad (8)$$

where $A_i = \frac{r_i - \text{mean}(r_{1:G})}{\text{std}(r_{1:G})}$ is the group-normalized advantage. This stage enables the Memory Compiler to explore compilation strategies beyond the SFT distribution and exploit those that maximize task success.

4. Experiment

4.1. Experimental Setup

Benchmarks. We evaluate on three benchmarks spanning household manipulation, multimodal embodied planning, and scientific reasoning. AlfWorld [46] provides 134 unseen household tasks across six categories (pick-and-place, examine-in-light, clean, heat, cool, pick-two-and-place) in 120 rooms, evaluated by task success rate. EmbodiedBench [47] provides 1,128 tasks across two environments (EB-ALFRED, EB-Habitat), reporting success rate along six fine-grained capability dimensions: base ability (Base), commonsense reasoning (Com.), complex instruction following (Comp.), visual recognition (Vis.), spatial reasoning (Spat.), and long-horizon planning (Long). ScienceWorld [48] contains 30 interactive science experiments across 10 topics, spanning 7,200 parametric variations.

Baselines. We compare against five memory augmentation baselines spanning graph-structured, retrieval-based, and latent-token approaches: **G-Mem** [39] and **A-Mem** [33] organize memory as structured graphs with hierarchical or linked-note representations; **Mem0** [13] and **LangMem** [49] maintain flat memory stores with LLM-driven extraction and vector retrieval; **MemGen** [44] generates latent memory tokens from the executor’s current reasoning state. The first four share the AMMI injection paradigm: retrieved content is injected as static upfront context without step-wise adaptation. We additionally report **No Mem** as the base agent without memory augmentation. We evaluate across two closed-source backbones (GPT-5.2, Gemini-3-flash) and four open-source backbones: Qwen-2.5-14B, Qwen3.5-27B, Qwen-2.5-VL-32B and Qwen-3-VL-32B [50, 51].

To isolate the effect of memory delivery from memory curation, we keep the memory bank $\mathcal{M}$ deliberately minimal: each entry consists of a raw successful trajectory paired with rationale explaining why it succeeded, without further distillation, scoring, or hierarchical reorganization.

4.2. Main Results

Tables 1 and 2 report task performance across EmbodiedBench, AlfWorld, and ScienceWorld. Two patterns emerge.

Table 1 | Success Rate (%) on EmbodiedBench (EB-ALFRED and EB-Habitat) (%). Capability dimensions: Base (base ability), Com. (commonsense reasoning), Comp. (complex instruction following), Vis. (visual recognition), Spat. (spatial reasoning), Long (long-horizon planning).

Executor	Method	EB-ALFRED							EB-Habitat						
		Avg.	Base	Com.	Comp.	Vis.	Spat.	Long	Avg.	Base	Com.	Comp.	Vis.	Spat.	Long
Close-Source MLLMs															
GPT-5	No Mem	32 ($\pm 0\%$)	60	40	28	36	28	0	40.33 ($\pm 0\%$)	80	38	36	40	32	16
	Mem0	43.15 (+35.3%)	48	58	60	47	36	10	37.67 (-6.6%)	76	36	30	44	30	10
	G-Mem	45.33 (+42.1%)	46	58	60	42	42	24	40.33 ($\pm 0\%$)	82	36	20	56	30	18
	A-Mem	46.33 (+45.2%)	52	54	48	34	42	48	32.33 (-19.8%)	64	30	18	48	28	6
	LangMem	46.67 (+46.3%)	74	56	62	46	38	4	43.33 (+7.4%)	84	40	40	56	34	6
Gemini	No Mem	59.00 ($\pm 0\%$)	70	56	60	68	56	44	51 ($\pm 0\%$)	86	52	46	62	30	30
	Mem0	77.67(+31.7%)	82	80	82	80	74	68	57 (+11.8%)	86	64	48	70	30	44
	G-Mem	79.27 (+34.4%)	82	82	80	78	76	78	68 (+33.3%)	92	68	50	74	78	46
	A-Mem	82.00 (+39.0%)	90	78	84	86	82	72	67.33 (+32.0%)	98	72	52	78	80	24
	LangMem	78.00 (+32.2%)	82	76	78	84	76	72	62.67 (+22.9%)	86	68	56	78	74	14
Open-Source MLLMs															
Qwen-2.5 -VL-32B	No Mem	18 ($\pm 0\%$)	22	26	24	12	22	2	36.33 ($\pm 0\%$)	78	22	52	26	30	10
	G-Mem	7.67 (-57.4%)	4	14	6	16	6	0	14.67 (-59.6%)	38	12	8	8	20	2
	Mem0	14.66 (-18.6%)	20	18	26	12	10	2	38.33 (+5.5%)	68	34	44	38	30	16
	A-Mem	3 (-83.3%)	2	4	4	6	2	0	8.33 (-77.1%)	24	8	6	8	4	0
	Langmem	14.33 (-20.4%)	22	20	26	6	12	0	38.67 (+6.9%)	76	28	44	40	28	16
	MemGen	14.33 (-20.4%)	14	10	16	6	8	0	21 (-42.2%)	54	8	18	18	24	4
	Ours	35.33 (+96.2%)	42	50	44	38	34	4	54.67 (+50.5%)	84	54	56	60	36	38
Qwen-3 -VL-32B	No Mem	19 ($\pm 0\%$)	24	24	28	24	14	0	34.67 ($\pm 0\%$)	78	26	28	34	28	14
	G-Mem	25.33 (+33.3%)	34	36	38	24	14	6	44 (+26.9%)	88	24	36	50	32	34
	Mem0	30.33 (+59.6%)	40	42	40	26	26	8	38.33 (+10.6%)	84	24	26	42	34	20
	A-Mem	32.33 (+70.2%)	46	50	34	30	30	4	36.67 (+5.8%)	86	12	38	24	36	24
	Langmem	31.33 (+64.9%)	38	44	44	28	26	8	38.33 (+10.6%)	86	26	28	40	32	18
	MemGen	14.22 (-25.2%)	22	18	16	6	20	4	25.67 (-25.9%)	50	14	22	36	22	10
	Ours	40 (+110%)	52	54	48	38	38	10	55.67 (+61.0%)	90	58	44	64	40	38

AMMI baselines often hurt small executors; MemCompiler consistently helps. On open-source backbones, AMMI-style baselines frequently *degrade* performance rather than improve it: across the four Qwen executors and four benchmarks, AMMI baselines yield negative gains in over half of all (executor, dataset) pairs, with extreme drops such as A-Mem at -83.3% on Qwen-2.5-VL-32B / EB-ALFRED. The latent-token baseline MemGen exhibits similar degradation, indicating that latent representations alone, without state-conditioned compilation, do not suffice. In contrast, MemCompiler is the only method that improves over No Mem on every open-source backbone and benchmark, with relative gains reaching +110% on EB-ALFRED and +129% on ScienceWorld.

MemCompiler narrows the open-to-closed-source gap. With MemCompiler, mid-size open-source backbones close most of the gap to frontier closed-source executors. For example, Qwen-3.5-27B + Ours reaches 91.45% on Alf World, essentially matching Gemini-3-flash No Mem (92.54%); on EB-Habitat, Qwen-3-VL-32B + Ours (55.83%) exceeds both GPT-5 and Gemini-3 No Mem. This indicates that the bottleneck for small open-source executors lies less in raw capacity than in how memory is delivered.

5. Ablation

Table 3 | Component ablation. Alf World: success rate (%). ScienceWorld: completion/partial score.

Variant	Alf World	ScienceWorld
MemCompiler (Full)	82.16	46.67/69.33
w/o Soft-Mem (text only)	78.93	42.22/65.15
w/o Brief State (raw obs as state)	73.94	38.50/60.67
AMMI (static injection, same memory)	35.03	27.93/52.68
No Memory	46.27	31.11/45.26

$\mathcal{M}$ as static upfront context, isolating the contribution of dynamic compilation.

Results show that removing either SCMC (via AMMI) or Brief State leads to the largest performance degradation, confirming that state-conditioned compilation is the core contributor. Soft-Mem provides additional gains particularly on ScienceWorld, where procedural perceptual knowledge benefits the latent channel.

Soft-Mem Design. We examine three design choices of Soft-Mem on EmbodiedBench EB-Habitat, focusing on Spat. and Vis. dimensions where latent perceptual information matters most (Table 4): (i) the

Table 2 | Success Rate on AlfWorld and ScienceWorld (%).

Executor / Method		Alf World	ScienceWorld
<i>Closed-Source MLLMs</i>			
GPT-5.2	No Mem	70.89 ($\pm 0\%$)	25.55 ($\pm 0\%$)
	G-Mem	86.56 (+22.1%)	51.51 (+101.6%)
	Mem-0	76.12 (+7.4%)	22.22 (-13.0%)
	LangMem	88.72 (+25.2%)	46.67 (+82.7%)
	A-Mem	92.54 (+30.5%)	50.00 (+95.7%)
Gemini-3 -flash	No Mem	92.54 ($\pm 0\%$)	45.55 ($\pm 0\%$)
	G-Mem	90.30 (-2.4%)	44.44 (-2.4%)
	Mem-0	91.04 (-1.6%)	42.86 (-5.9%)
	LangMem	92.54 (+0.0%)	50.82 (+%)
	A-Mem	97.01 (+4.8%)	47.78 (+4.9%)
<i>Open-Source MLLMs</i>			
Qwen-2.5 -14B	No Mem	46.27 ($\pm 0\%$)	31.11 ($\pm 0\%$)
	G-Mem	67.16 (+45.1%)	32.22 (+3.6%)
	Mem-0	12.69 (-72.6%)	27.78 (-10.7%)
	LangMem	36.57 (-21.0%)	15.56 (-50.0%)
	A-Mem	11.19 (-75.8%)	34.44 (+10.7%)
	MemGen	42.54 (-8.1%)	24.65 (-26.2%)
Qwen-3.5 -27B	Ours	82.16 (+77.6%)	46.67 (+50.0%)
	No Mem	61.19 ($\pm 0\%$)	21.11 ($\pm 0\%$)
	G-Mem	74.62 (+22.0%)	32.22 (+52.6%)
	Mem-0	62.69 (+2.5%)	26.67 (+26.3%)
	LangMem	62.69 (+2.5%)	26.67 (+26.3%)
	A-Mem	88.81 (+45.1%)	32.22 (+52.6%)
	MemGen	41.04 (-32.9%)	14.32 (-32.2%)
	Ours	91.45 (+49.5%)	48.44 (+129%)

Component Ablation. We ablate MemCompiler on AlfWorld and ScienceWorld with Qwen-2.5-14B, removing or replacing major components to isolate their contributions (Table 3): (i) *w/o Soft-Mem* removes the latent channel, passing only text guidance to the Executor; (ii) *w/o Brief State* replaces the structured two-dimensional belief state with the raw concatenation of goal and action history; (iii) *AMMI* injects the same retrieved

number of soft tokens N ; (ii) the orthogonality constraint; (iii) the projection type (Gaussian vs. linear).

Table 4 | Soft-Mem ablation on EB-Habitat.

Variant	Avg.	Spat.	Vis.
$N = 0$ (text only)	47.11	32	42
$N = 4$	51.09	28	50
$N = 8$	52.83	34	56
$N = 16$ (default)	54.67	36	60
$N = 32$	53.17	36	50
$N = 16$, w/o orth. constraint	50.33	32	52
$N = 16$, linear proj. (no Gaussian)	46.23	30	48

To further verify that the latent channel encodes information genuinely distinct from the text channel, we apply t-SNE to visualize the hidden representations of soft and text memory tokens across episodes (Figure 4). The two token types occupy completely non-overlapping regions, confirming that the orthogonality constraint effectively prevents the latent channel from collapsing into a copy of the text representation.

Efficiency Analysis. As shown in Table 5, We evaluate AMMI and SCMC on the AlfWorld benchmark, with all experiments conducted on an A100 GPU using vLLM for efficient inference. The results show that SCMC significantly outperforms AMMI, improving the success rate from 35.03% to 82.16% while reducing the executor’s computational burden. In particular, SCMC reduces executor input tokens by over 50% (2481.1 $\rightarrow$ 1003.2) and lowers executor latency from 0.30s to 0.12s, indicating more efficient and focused reasoning. Although SCMC introduces a lightweight memory compilation step, this overhead is offset by the reduced execution cost, resulting in lower overall latency.

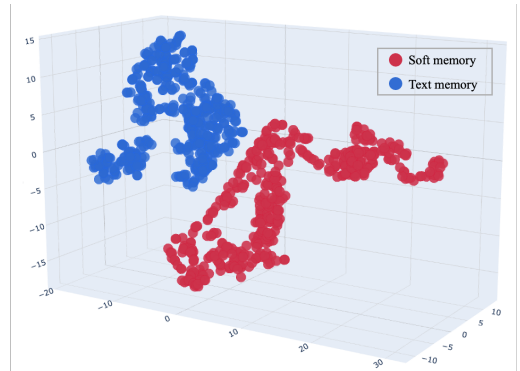


Figure 4 | Visualization of soft memory tokens (red) and text memory tokens (blue). The two types occupy non-overlapping regions, confirming that the orthogonality constraint keeps the two channels distinct.

Table 5 | Efficiency comparison on Alf World.

Method	Latency (s)		Tokens			Success $\uparrow$ Rate (%)
	Compiler	Executor	Exec In	Exec Out	Compiler Total	
AMMI	-	0.30	2481.1	18.2	-	35.03
SCMC	0.093	0.12	1003.2	8.2	2081.4	82.16

6. Conclusion

We present **MemCompiler**, a state-conditioned memory paradigm that replaces the prevailing Ahead-of-time Monolithic Memory Injection with step-wise compilation. A learned Memory Compiler grounds

compilation in a structured Brief State, while Soft-Mem delivers perceptual content beyond text. Across a wide range of embodied benchmarks, MemCompiler consistently improves every open-source executor, narrows the gap to frontier closed-source models, and reduces executor cost. These results suggest that progress in memory for embodied agents will increasingly depend on *when* and *how* memory is delivered, not solely on *what* is stored.

References

- [1] Ayush Agrawal, Raghav Prabhakar, Anirudh Goyal, and Dianbo Liu. Physical reasoning and object planning for household embodied agents. *arXiv preprint arXiv:2311.13577*, 2023.
- [2] Zhaohan Feng, Ruiqi Xue, Lei Yuan, Yang Yu, Ning Ding, Meiqin Liu, Bingzhao Gao, Jian Sun, Xinhua Zheng, and Gang Wang. Multi-agent embodied ai: Advances and future directions. *Science China Information Sciences*, 69(5):151202, 2026.
- [3] Gemini Robotics Team, Abbas Abdolmaleki, Saminda Abeyruwan, Joshua Ainslie, Jean-Baptiste Alayrac, Montserrat Gonzalez Arenas, Ashwin Balakrishna, Nathan Batchelor, Alex Bewley, Jeff Bingham, et al. Gemini robotics 1.5: Pushing the frontier of generalist robots with advanced embodied reasoning, thinking, and motion transfer. *arXiv preprint arXiv:2510.03342*, 2025.
- [4] Marc Glocker, Peter Hönig, Matthias Hirschmanner, and Markus Vincze. Llm-empowered embodied agent for memory-augmented task planning in household robotics. *arXiv preprint arXiv:2504.21716*, 2025.
- [5] Andrew Szot, Alexander Clegg, Eric Undersander, Erik Wijmans, Yili Zhao, John Turner, Noah Maestre, Mustafa Mukadam, Devendra Singh Chaplot, Oleksandr Maksymets, et al. Habitat 2.0: Training home assistants to rearrange their habitat. *Advances in neural information processing systems*, 34:251–266, 2021.
- [6] Andrew Szot, Max Schwarzer, Harsh Agrawal, Bogdan Mazouze, Rin Metcalf, Walter Talbott, Natalie Mackraz, R Devon Hjelm, and Alexander T Toshev. Large language models as generalizable policies for embodied tasks. In *The Twelfth International Conference on Learning Representations*, 2023.
- [7] Kaizhi Zheng, Xiaotong Chen, Odest Chadwicke Jenkins, and Xin Wang. Vlmbench: A compositional benchmark for vision-and-language manipulation. *Advances in Neural Information Processing Systems*, 35:665–678, 2022.
- [8] Zouying Cao, Jiayi Deng, Li Yu, Weikang Zhou, Zhaoyang Liu, Bolin Ding, and Hai Zhao. Remember me, refine me: A dynamic procedural memory framework for experience-driven agent evolution. *arXiv preprint arXiv:2512.10696*, 2025.
- [9] Sikuan Yan, Xiufeng Yang, Zuchao Huang, Ercong Nie, Zifeng Ding, Zonggen Li, Xiaowen Ma, Jinhe Bi, Kristian Kersting, Jeff Z Pan, et al. Memory-r1: Enhancing large language model agents to manage and utilize memories via reinforcement learning. *arXiv preprint arXiv:2508.19828*, 2025.
- [10] Siru Ouyang, Jun Yan, I Hsu, Yanfei Chen, Ke Jiang, Zifeng Wang, Rujun Han, Long T Le, Samira Daruki, Xiangru Tang, et al. Reasoningbank: Scaling agent self-evolving with reasoning memory. *arXiv preprint arXiv:2509.25140*, 2025.
- [11] Alireza Rezazadeh, Zichao Li, Wei Wei, and Yujia Bao. From isolated conversations to hierarchical schemas: Dynamic tree memory representation for llms. *arXiv preprint arXiv:2410.14052*, 2024.
- [12] Thomas Limbacher and Robert Legenstein. H-mem: Harnessing synaptic plasticity with hebbian memory networks. *Advances in Neural Information Processing Systems*, 33:21627–21637, 2020.
- [13] Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready ai agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025.
- [14] Yaxiong Wu, Yongyue Zhang, Sheng Liang, and Yong Liu. Sgmemo: Sentence graph memory for long-term conversational agents. *arXiv preprint arXiv:2509.21212*, 2025.

-
- [15] Mengkang Hu, Tianxing Chen, Qiguang Chen, Yao Mu, Wenqi Shao, and Ping Luo. Hiagent: Hierarchical working memory management for solving long-horizon agent tasks with large language model. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 32779–32798, 2025.
- [16] Lin Long, Yichen He, Wentao Ye, Yiyuan Pan, Yuan Lin, Hang Li, Junbo Zhao, and Wei Li. Seeing, listening, remembering, and reasoning: A multimodal agent with long-term memory. *arXiv preprint arXiv:2508.09736*, 2025.
- [17] OpenClaw. Openclaw: The ai that actually does things. <https://openclaw.ai/>, 2026. Accessed: 2026-05-04.
- [18] Anthropic. Claude code: Ai-powered coding assistant for developers. <https://claude.com/product/claude-code>, 2026. Accessed: 2026-05-04.
- [19] Mohit Shridhar, Jesse Thomason, Daniel Gordon, Yonatan Bisk, Winson Han, Roozbeh Mottaghi, Luke Zettlemoyer, and Dieter Fox. Alfred: A benchmark for interpreting grounded instructions for everyday tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10740–10749, 2020.
- [20] Chengshu Li, Ruohan Zhang, Josiah Wong, Cem Gokmen, Sanjana Srivastava, Roberto Martín-Martín, Chen Wang, Gabriel Levine, Michael Lingelbach, Jiankai Sun, et al. Behavior-1k: A benchmark for embodied ai with 1,000 everyday activities and realistic simulation. In *Conference on Robot Learning*, pages 80–93. PMLR, 2023.
- [21] Dongyoung Kim, Sumin Park, Huiwon Jang, Jinwoo Shin, Jaehyung Kim, and Younggyo Seo. Robot-r1: Reinforcement learning for enhanced embodied reasoning in robotics. *arXiv preprint arXiv:2506.00070*, 2025.
- [22] Soroush Nasiriany, Sepehr Nasiriany, Abhiram Maddukuri, and Yuke Zhu. Robocasa365: A large-scale simulation framework for training and benchmarking generalist robots. *arXiv preprint arXiv:2603.04356*, 2026.
- [23] Sanjana Srivastava, Chengshu Li, Michael Lingelbach, Roberto Martín-Martín, Fei Xia, Kent Elliott Vainio, Zheng Lian, Cem Gokmen, Shyamal Buch, Karen Liu, et al. Behavior: Benchmark for everyday household activities in virtual, interactive, and ecological environments. In *Conference on robot learning*, pages 477–490. PMLR, 2022.
- [24] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- [25] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th annual acm symposium on user interface software and technology*, pages 1–22, 2023.
- [26] Junyang Wang, Haiyang Xu, Haitao Jia, Xi Zhang, Ming Yan, Weizhou Shen, Ji Zhang, Fei Huang, and Jitao Sang. Mobile-agent-v2: Mobile device operation assistant with effective navigation via multi-agent collaboration. *Advances in Neural Information Processing Systems*, 37:2686–2710, 2024.
- [27] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [28] Charles Packer, Vivian Fang, Shishir_G Patil, Kevin Lin, Sarah Wooders, and Joseph_E Gonzalez. Memgpt: towards llms as operating systems. 2023.
- [29] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. Expel: Llm agents are experiential learners. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19632–19642, 2024.
-

-
- [30] Bernal J Gutiérrez, Yiheng Shu, Yu Gu, Michihiro Yasunaga, and Yu Su. Hipporag: Neurobiologically inspired long-term memory for large language models. *Advances in neural information processing systems*, 37:59532–59569, 2024.
 - [31] David Kadavy. *Digital Zettelkasten: Principles, Methods, & Examples*. Kadavy, Inc., 2021.
 - [32] Sönke Ahrens. *How to take smart notes: One simple technique to boost writing, learning and thinking*. Sönke Ahrens, 2022.
 - [33] Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-mem: Agentic memory for llm agents. *arXiv preprint arXiv:2502.12110*, 2025.
 - [34] Anthropic. Introducing claude opus 4.6. <https://www.anthropic.com/news/claude-opus-4-6>, 2026. Online; accessed 2026-05-05.
 - [35] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
 - [36] Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
 - [37] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
 - [38] Zihao Wang, Shaofei Cai, Anji Liu, Yonggang Jin, Jinbing Hou, Bowei Zhang, Haowei Lin, Zhaofeng He, Zilong Zheng, Yaodong Yang, et al. Jarvis-1: Open-world multi-task agents with memory-augmented multimodal language models. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(3):1894–1907, 2024.
 - [39] Guibin Zhang, Muxin Fu, Guancheng Wan, Miao Yu, Kun Wang, and Shuicheng Yan. G-memory: Tracing hierarchical memory for multi-agent systems. *arXiv preprint arXiv:2506.07398*, 2025.
 - [40] Tianxin Wei, Noveen Sachdeva, Benjamin Coleman, Zhankui He, Yuanchen Bei, Xuying Ning, Mengting Ai, Yunzhe Li, Jingrui He, Ed H Chi, et al. Evo-memory: Benchmarking llm agent test-time learning with self-evolving memory. *arXiv preprint arXiv:2511.20857*, 2025.
 - [41] BY Yan, Chaofan Li, Hongjin Qian, Shuqi Lu, and Zheng Liu. General agentic memory via deep research. *arXiv preprint arXiv:2511.18423*, 2025.
 - [42] Mingcong Lei, Honghao Cai, Zezhou Cui, Liangchen Tan, Junkun Hong, Gehan Hu, Shuangyu Zhu, Yimou Wu, Shaohan Jiang, Ge Wang, et al. Robomemory: A brain-inspired multi-memory agentic framework for lifelong learning in physical embodied systems. In *NeurIPS 2025 Workshop on Space in Vision, Language, and Embodied AI*, 2025.
 - [43] Zeyu Zhang, Rui Li, Xiaoyan Zhao, Yang Zhang, Wenjie Wang, Xu Chen, and Tat-Seng Chua. Nextmem: Towards latent factual memory for llm-based agents. *arXiv preprint arXiv:2603.15634*, 2026.
 - [44] Guibin Zhang, Muxin Fu, and Shuicheng Yan. Memgen: Weaving generative latent memory for self-evolving agents. *arXiv preprint arXiv:2509.24704*, 2025.
 - [45] Xinlei Yu, Chengming Xu, Guibin Zhang, Zhangquan Chen, Yudong Zhang, Yongbo He, Peng-Tao Jiang, Jiangning Zhang, Xiaobin Hu, and Shuicheng Yan. Vismem: Latent vision memory unlocks potential of vision-language models. *arXiv preprint arXiv:2511.11007*, 2025.
 - [46] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Côté, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. Alfworld: Aligning text and embodied environments for interactive learning. *arXiv preprint arXiv:2010.03768*, 2020.
-

-
- [47] Rui Yang, Hanyang Chen, Junyu Zhang, Mark Zhao, Cheng Qian, Kangrui Wang, Qineng Wang, Teja Venkat Koripella, Marziyeh Movahedi, Manling Li, et al. Embodiedbench: Comprehensive benchmarking multi-modal large language models for vision-driven embodied agents. *arXiv preprint arXiv:2502.09560*, 2025.
 - [48] Ruoyao Wang, Peter Jansen, Marc-Alexandre Côté, and Prithviraj Ammanabrolu. Scienceworld: Is your agent smarter than a 5th grader? In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11279–11298, 2022.
 - [49] LangChain AI. Langmem: A framework for long-term memory in llm agents. <https://github.com/langchain-ai/langmem>, 2026. Accessed: 2026-05-04.
 - [50] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report, 2025.
 - [51] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
 - [52] Marc-Alexandre Côté, Akos Kádár, Xingdi Yuan, Ben Kybartas, Tavian Barnes, Emery Fine, James Moore, Matthew Hausknecht, Layla El Asri, Mahmoud Adada, et al. Textworld: A learning environment for text-based games. In *Workshop on Computer Games*, pages 41–75. Springer, 2018.
 - [53] Eric Kolve, Roozbeh Mottaghi, Winson Han, Eli VanderBilt, Luca Weihs, Alvaro Herrasti, Matt Deitke, Kiana Ehsani, Daniel Gordon, Yuke Zhu, et al. Ai2-thor: An interactive 3d environment for visual ai. *arXiv preprint arXiv:1712.05474*, 2017.
 - [54] Berk Calli, Arjun Singh, Aaron Walsman, Siddhartha Srinivasa, Pieter Abbeel, and Aaron M Dollar. The ycb object and model set: Towards common benchmarks for manipulation research. In *2015 international conference on advanced robotics (ICAR)*, pages 510–517. IEEE, 2015.
 - [55] Yu Shang, Yu Li, Keyu Zhao, Likai Ma, Jiahe Liu, Fengli Xu, and Yong Li. Agentsquare: Automatic llm agent search in modular design space. In *The Thirteenth International Conference on Learning Representations*, 2024.
 - [56] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Liang Wang, Weizhu Chen, et al. Lora: Low-rank adaptation of large language models. *Iclr*, 1(2):3, 2022.

A. Progress Rate on EmbodiedBench

Table 6 reports *Progress Rate*, which credits partial subgoal completion, as a complement to the strict Success Rate in Table 1. The Progress view confirms the trends observed on Success Rate while making the gap between methods more visible. On open-source backbones, MemCompiler is again the only method that improves over No Mem on every (executor, dataset) cell, with relative gains of +54.3% on Qwen-2.5-VL-32B / EB-ALFRED and +63.8% on Qwen-3-VL-32B / EB-ALFRED. The AMMI-style baselines that collapse on Success Rate also collapse here (e.g., G-Mem −53.1%, A-Mem −61.8% on Qwen-2.5-VL-32B / EB-ALFRED), and MemGen continues to underperform across both Qwen-VL backbones, reinforcing that latent representations alone, without state-conditioned compilation, do not transfer to embodied execution. On closed-source backbones, AMMI baselines yield smaller relative gains under Progress Rate than under Success Rate (e.g., G-Mem on GPT-5 / EB-ALFRED rises by +37.5% rather than +42.1%), consistent with Progress already crediting the partial completions that No Mem can sometimes reach. Overall, Progress Rate offers a finer-grained but qualitatively identical picture: state-conditioned compilation helps every executor, while static injection helps only when the executor is large enough to filter it.

Table 6 | Progress Rate (%) on EmbodiedBench (EB-ALFRED and EB-Habitat) (%). Capability dimensions: Base (base ability), Com. (commonsense reasoning), Comp. (complex instruction following), Vis. (visual recognition), Spat. (spatial reasoning), Long (long-horizon planning).

Model	Method	EB-ALFRED							EB-Habitat						
		Avg.	Base	Com.	Comp.	Vis.	Spat.	Long	Avg.	Base	Com.	Comp.	Vis.	Spat.	Long
Close-Source MLLMs															
GPT-5.2	No Mem	41.29 ($\pm 0\%$)	66.99	48.33	42.33	43.92	36.67	9.5	52.85 ($\pm 0\%$)	81.75	44.5	52	46.83	59.83	32.20
	Mem0	53.24 (+28.9%)	57.67	65.33	67.33	56.12	47.99	25	53.53 (+1.3%)	81	45	48	58	62.25	26.95
	G-Mem	56.78 (+37.5%)	57.17	63.67	65.33	55.5	52	47	55.2 (+4.4%)	84.5	46	43	63.67	59.08	34.95
	A-Mem	57.8 (+40.0%)	58.33	58.83	59.33	48.83	57	64.5	44.77 (-15.3%)	70	33	35	56.67	55.83	18.12
	LangMem	57.94 (+40.3%)	79.83	63	66.33	55.17	51.33	32	55.06 (+4.2%)	86	49	48.51	63.17	61.67	22.03
Gemini-3 -flash	No Mem	68.47 ($\pm 0\%$)	76.67	65.33	67.33	72.5	67	62	64.2 ($\pm 0\%$)	88.5	61	61	69.92	59.92	44.86
	Mem0	83.33 (+21.7%)	85	84.66	86.33	84.83	80.67	78.5	70.22 (+9.4%)	89.25	75	61	79.08	61.58	55.42
	G-Mem	84.23 (+23.0%)	85.71	85.33	83.67	84.5	82.67	83.5	73.04 (+13.8%)	93.75	73	62.36	80.65	80.19	48.32
	A-Mem	86.69 (+26.6%)	92	82.83	89	88.17	86.67	81.5	75.5 (+17.6%)	98.5	75.5	73.17	83.17	82.11	40.6
	LangMem	83.01 (+21.2%)	85.67	79.22	80.56	86.14	85.5	81	71.49 (+11.4%)	89	74	66	84.23	83	32.53
Open-Source MLLMs															
Qwen-2.5 -VL-32B	No Mem	28.86 ($\pm 0\%$)	33.67	32.33	36.67	25.83	31.67	13	48.22 ($\pm 0\%$)	80.75	33	60	34.58	56.83	24.19
	G-Mem	13.53 (-53.1%)	10	20.67	14.67	21.67	11.67	2.5	25.31 (-47.5%)	50.33	19	21.5	16.17	40.17	4.67
	Mem0	23.44 (-18.8%)	28	25.83	37.33	25	17	7.5	51.97 (+7.8%)	74.33	42.5	58.86	45.25	57.5	33.36
	A-Mem	11.02 (-61.8%)	12.33	15.67	15.33	15.99	6.3	0.5	17.56 (-63.6%)	37.25	15.5	10	15.5	21.75	5.33
	Langmem	22.69 (-21.4%)	29.17	27.33	35.49	20	19.67	4.5	51.31 (+6.4%)	83.25	39	52	46	55.5	32.14
	MemGen	15.4 (-46.6%)	19.64	17.31	24.22	12.67	15.33	3.2	31.43 (-34.8%)	57.91	15	25	24.33	56.17	10.17
	Ours	44.53 (+54.3%)	44.67	61.52	62.33	45.89	42.45	10.37	63.69 (+32.1%)	86.75	62.5	59	65.41	61.57	46.93
Qwen-3 -VL-32B	No Mem	29.69 ($\pm 0\%$)	36	31.83	38.17	35.5	26.17	10.5	45.89 ($\pm 0\%$)	82.67	35.5	42	40.42	47.83	26.97
	G-Mem	39.08 (+31.6%)	46	44.5	46.5	38	30	29.5	56.27 (+22.6%)	91.33	35.5	47.5	57.92	57.5	47.85
	Mem0	41.08 (+38.4%)	49.17	50.83	52.33	38.33	36.33	19.5	50.03 (+9.0%)	91.17	31.5	34.5	48.08	56.67	38.28
	A-Mem	42.45 (+43.0%)	55.17	53.83	45.33	41.67	42.67	16	48.59 (+5.9%)	89.83	20.5	52.5	29.67	57.33	41.69
	Langmem	41.72 (+40.5%)	47.83	52.83	54	39.67	37	19	50.56 (+10.2%)	90.85	34.5	36.5	47.41	55.17	38.95
	MemGen	21.62 (-27.2%)	33.64	29.31	20.11	12.67	25.47	8.5	32.1 (-30.0%)	60.23	19.67	30.33	40.47	26.21	15.7
	Ours	48.64 (+63.8%)	56.22	60.9	56.32	47.67	48	22.75	65.7 (+43.2%)	93.25	60.5	55.5	66.33	65.31	54.33

B. Qualitative Case Studies

To make MemCompiler’s behavior concrete, we visualize three EmbodiedBench episodes (Figures 5–7). Each figure shows the executor’s first-person observations across timesteps (top), together with the Brief State and the text portion of the compiled memory entry emitted by the Memory Compiler; soft tokens (`<soft_token>`) are rendered as placeholders for the co-emitted latent channel.

Across the three episodes, the same compilation pattern emerges. The Brief State is not a static summary but a runtime context that the Memory Compiler actively maintains: it records the currently visible scene, folds completed subgoals into accumulated environment beliefs, and registers diagnostic conditions such as *stuck-in-loop* failure modes when the executor’s behavior departs from progress. Conditioned on this evolving Brief State, the compiled text entry shifts step-by-step, advancing routine plans (*find a Lettuce* $\rightarrow$ *turn off the Faucet* $\rightarrow$ *find a CounterTop*), issuing corrective directives when the executor is stuck (*Do not pick up the banana again. Navigate to another location...*), and selectively withholding output when no entry in $\mathcal{M}$ is currently applicable. Each compiled entry includes an explicit reason that grounds the action in the Brief State, and is paired with latent soft tokens that carry perceptual context the text channel cannot express. These visualizations confirm the central design intent of MemCompiler: rather than injecting memory once and hoping for relevance, the Memory Compiler delivers state-aligned guidance whose content, timing, and modality follow the agent’s evolving execution state.

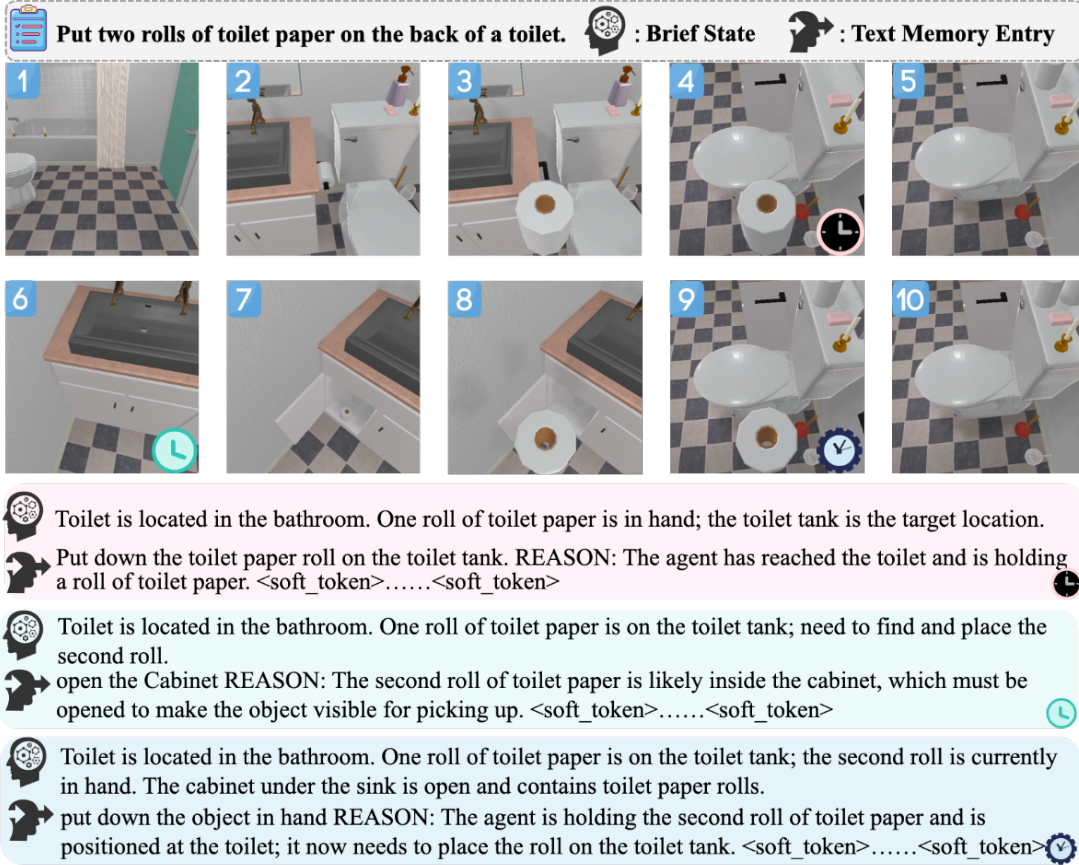


Figure 5 | Case study on EB-ALFRED. The Memory Compiler advances Brief State and compiled guidance step-by-step as the agent locates, rinses, and places the lettuce.

C. Experimental Details

C.1. Benchmarks and Datasets Details

We evaluate our approach across four embodied planning and reasoning benchmarks. To rigorously assess the generalization capabilities of the models, we enforced strict “zero-leakage” mechanisms across all benchmarks, ensuring a complete separation between the training and evaluation sets in terms of environment instances, scene layouts, or task instructions.

ALFWorld ALFWorld is a text-based interactive environment built upon TextWorld[52] and ALFRED. The agent is required to complete six types of household tasks (e.g., pick and place, examine in light, heat and place) using text commands (e.g., go to countertop 1).

- **Training Set:** Derived from the train split of ALFRED json_2.1.1, comprising 3,553 task instances across 108 distinct indoor scenes.
- **Evaluation Set:** Utilizes the valid_unseen split (an out-of-distribution evaluation set), consisting of 134 task instances.
- **Isolation Mechanism:** The evaluation set exclusively evaluates agents in four scenes (FloorPlan

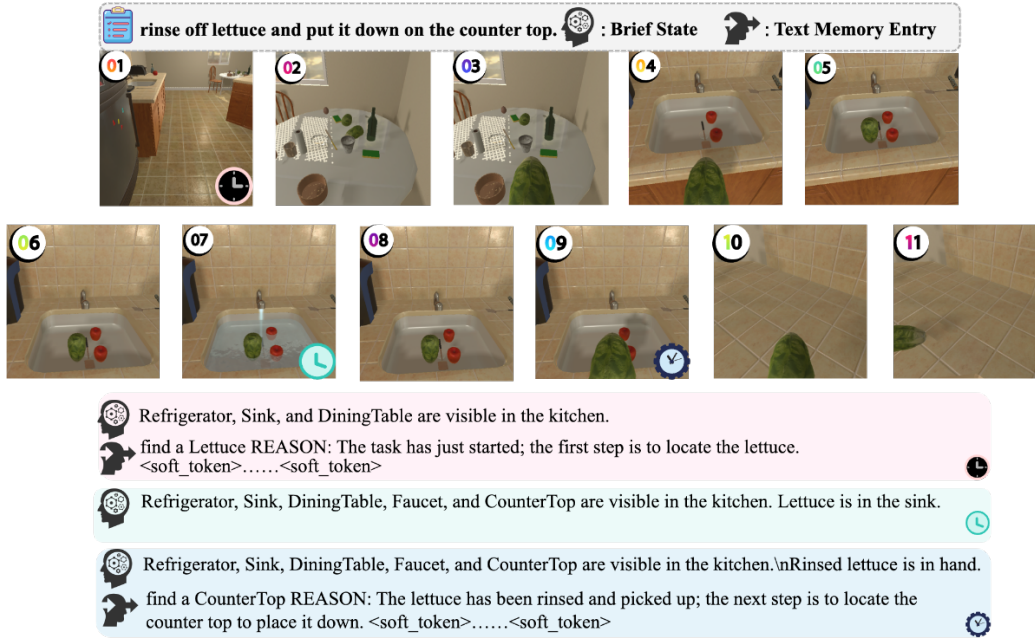


Figure 6 | Case study on EB-ALFRED. The Memory Compiler detects a stuck-in-loop failure mode in the Brief State and issues a corrective directive that breaks the loop.

10, 219, 308, 424) that are completely unseen during training. There is strict zero overlap between the training and test sets at both the gamefile and scene levels, rigorously evaluating the model’s spatial and interactive generalization in novel environments.

EmbodiedBench (EB-ALFRED) EB-ALFRED is built upon the AI2-THOR[53] simulator (v2.1.0) and encompasses seven types of visual household tasks from ALFRED.

- **Evaluation Set:** Employs episodes uniformly distributed across six fine-grained evaluation subsets provided by EmbodiedBench (Base, Common Sense, Complex Instruction, Spatial, Visual Appearance, and Long Horizon). To specifically evaluate diverse capabilities, the instructions in the test set were manually rewritten from the original ALFRED annotations (e.g., substituting specific object names with functional descriptions for the “Common Sense” subset, and introducing conditional statements and distractors for “Complex Instruction”).
- **Training Set:** We used an automated script to scan all available tasks in ALFRED json_2.1.0, strictly excluding the 213 (task, repeat_idx) pairs utilized in the test set. The resulting training set consists of 1,054 episodes using the unmodified, original human-annotated instructions.
- **Isolation Mechanism:** Absolute zero overlap between the training and test sets is guaranteed at the (task, repeat_idx) instance level.

EmbodiedBench (EB-Habitat) EB-Habitat generates physical manipulation tasks (executed by a Fetch robot) via the Habitat-Sim engine, utilizing Meta AI’s ReplicaCAD indoor scenes and the YCB object dataset[54].

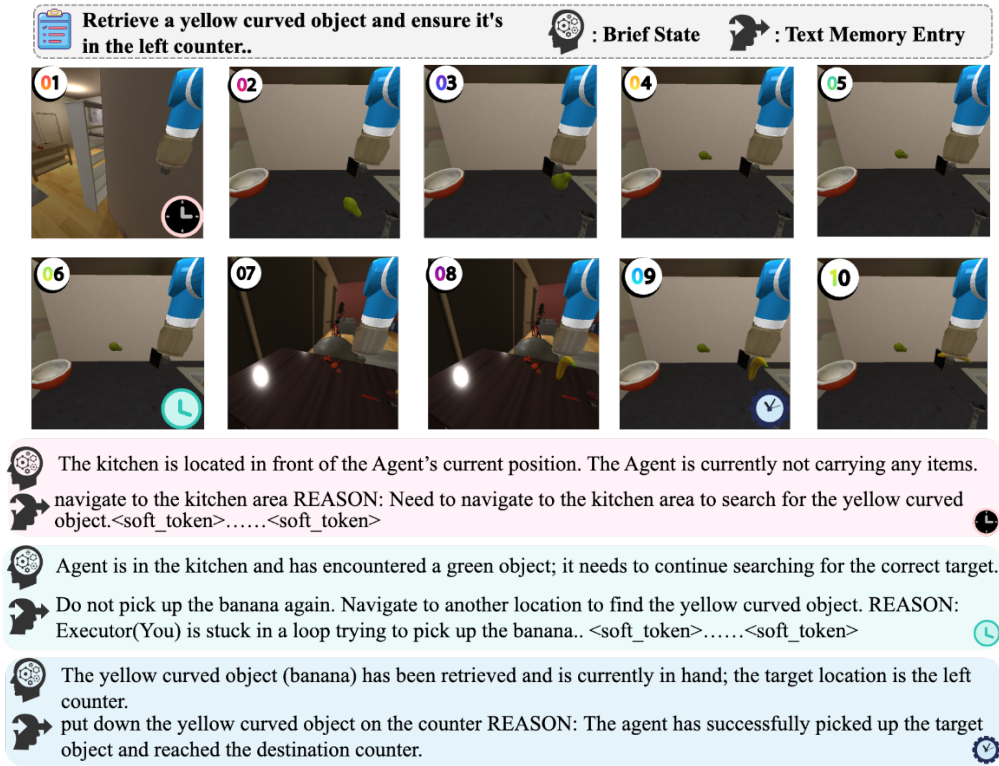


Figure 7 | Case study on EB-Habitat. The Memory Compiler maintains continuity across multiple subgoals by folding completed steps into the Brief State and selectively withholding memory entries when none is currently applicable.

- **Training Set:** Comprises 1,000 episodes covering basic tasks such as navigation and object transportation. The training environment is constrained to three specific scenes (v3_sc0 to v3_sc2) and 28 common object categories. The task instructions are generated using straightforward command-style templates.
- **Evaluation Set:** Similar to EB-ALFRED, it comprises episodes across six evaluation subsets designed to assess capabilities such as common sense reasoning and visual appearance recognition.
- **Isolation Mechanism:** Strict isolation is enforced across three dimensions to prevent data leakage: (1) *Object Categories*: The test set introduces 5 novel object categories with zero overlap with the 28 training categories; (2) *Language Templates*: The training set uses direct commands, whereas the test set employs indirect, natural-style complex descriptions; (3) *Scenes*: The test set evaluates agents in completely unseen validation and test layouts (v3_sc3, v3_sc4).

ScienceWorld ScienceWorld is a text-based interactive simulator featuring 30 types of science experiment tasks (e.g., state changes, chemical reactions).

- **Evaluation Set:** We adopted the evaluation benchmark provided by AgentSquare [55], containing 90 manually curated and augmented task instances that cover 16 task types. The original descriptions were rewritten into more challenging modified_goals, accompanied by regular expression subgoals for fine-grained progress tracking.

-
- **Training Set:** We loaded variations for all 30 task types from the simulator’s built-in `train` split (originally 3,592 variations). We carefully filtered out 88 (`task_name`, `variation_idx`) pairs that overlapped with the evaluation set, resulting in 3,504 retained training variations.
 - **Isolation Mechanism:** The training set uses the simulator’s original task descriptions, while the evaluation set uses enhanced goal descriptions, ensuring zero intersection in both task instance identifiers and description styles.

C.2. Dataset Construction and Annotation

We employ a high-performance large language model (e.g., GPT-5.2/Gemini-3-flash-preview) as the teacher model to traverse all training tasks and simulate the decision-making process of MemCompiler, thereby generating the high-quality trajectory data required for supervised fine-tuning (SFT). The specific data generation pipeline proceeds as follows:

1. **Environment Initialization and Task Loading:** Initialize the target environment and load the task goal. Concurrently, maintain a dynamically updated task memory ($\mathcal{M}$) to store successful and failed trajectories accumulated from historical interactions.
2. **State-Conditioned Memory Compilation:** At each timestep t during task execution, the following procedures are performed:
 - **Memory Selection:** Using the current *task goal* as the query, retrieve relevant historical trajectory segments from $\mathcal{M}$.
 - **Brief State Construction:** Encode the current environment observation, historical action sequence, and the task goal into a structured brief state (s_{brief}).
 - **Memory Compilation:** The teacher model, acting as the Memory Compiler, takes s_{brief} and the retrieved memory content as inputs to generate structured guidance (g). This guidance contains strategic operational advice and specific update instructions (CREATE, UPDATE, DELETE, or FOLD) for the brief state.
3. **Action Execution and Feedback:** The Executor utilizes the guidance g alongside the current environment observation to output a specific action. The execution results and environment feedback are recorded and subsequently used to update the task memory at the end of the episode.
4. **SFT Sample Extraction and Encapsulation:** After traversing the training set, successful trajectories are filtered and encapsulated into two types of supervision signals:
 - **Compiler Data:** Takes s_{brief} and the retrieved memory as inputs, with the teacher-generated guidance g as the target output. This data is used to train the Memory Compiler.
 - **Executor Data:** Takes the guidance g and the environment observation as inputs, with the executed action as the target output. This data is used to train the Executor.

C.3. Training Details and Hyperparameters

All training procedures, encompassing both Supervised Fine-Tuning (SFT) and Reinforcement Learning (RL), were conducted on a compute node equipped with $8 \times$ NVIDIA H20 (96GB) GPUs. We utilized HuggingFace Transformers integrated with a custom manual Distributed Data Parallel (DDP) trainer for SFT, and Fully Sharded Data Parallel (FSDP) for the RL stage. Throughout all training phases, the Executor backbone (e.g., Qwen2.5-VL) was strictly frozen to preserve its generalized reasoning and

execution capabilities. Mixed precision training in `bf16` (BF16) was employed to optimize memory consumption and training speed.

C.3.1. Supervised Fine-Tuning (SFT) Stage

During the SFT stage, we fine-tuned the Memory Compiler (initialized with Qwen2.5-VL-7B-Instruct) using Low-Rank Adaptation (LoRA) [56]. Specifically, LoRA adapters were applied to the query and value projection layers (`q_proj`, `v_proj`) with a rank $r = 16$, an alpha parameter $\alpha = 32$, and a dropout rate of 0.1.

For the Soft-Mem component, we utilized a Gaussian reparameterization projection with an initialized embedding standard deviation of 0.0261. The number of soft prompt tokens was set to $N = 16$. The overall loss function optimized during this stage is a weighted sum of action prediction loss, text generation loss, and auxiliary latent losses:

$$\mathcal{L}_{SFT} = \mathcal{L}_{action} + \mathcal{L}_{text} + 0.1 \cdot \mathcal{L}_{entropy} + 1.0 \cdot \mathcal{L}_{latent} + 0.1 \cdot \mathcal{L}_{orth} \quad (9)$$

where $\mathcal{L}_{orth}$ imposes the orthogonality constraint to separate latent semantics from the text representations, and label smoothing of 0.1 was applied to mitigate overconfidence. The model was trained for 5 epochs using the AdamW optimizer with a learning rate of 1×10^{-5} and a cosine annealing schedule following a 5% linear warmup.

C.3.2. Reinforcement Learning (GRPO) Stage

In the RL stage, we exclusively updated the Memory Compiler and the Soft-Mem projection via Group Relative Policy Optimization (GRPO), keeping the Executor entirely frozen. To ensure efficient distributed execution, the hardware resources were partitioned: 4 GPUs for Actor training via FSDP, 3 GPUs for policy rollout, and 1 GPU dedicated to agent-environment interaction.

Reward Design. We utilized a sparse, environment-driven binary reward at the episode level. A reward of 1.0 was assigned exclusively upon task success at the end of the episode, and 0 otherwise. No step-level shaping rewards were incorporated, forcing the Compiler to implicitly learn long-horizon memory utilization strategies.

Optimization and Rollout. For each update iteration, we sampled $N = 4$ distinct tasks, generating a group of $K = 4$ trajectories for each task, resulting in a batch of 16 episodes per update. To encourage exploration during rollout, the generation temperature for both the assistant and latent channels was set to 1.2, with $Top-k = 50$ and $Top-p = 1.0$. We utilized asymmetric clipping for the policy objective ($\epsilon_{low} = 0.2$, $\epsilon_{high} = 0.28$) without additional KL penalty ($\beta = 0$). The model was optimized over 500 total steps with a learning rate of 1×10^{-6} , bounded by a minimum of 1×10^{-7} through cosine decay.

A comprehensive summary of all pertinent hyperparameters for both training stages is provided in Table 7.

D. Prompt Templates

For reproducibility, we provide the system prompts used by the Memory Compiler and the Executor across all four benchmarks. The Memory Compiler prompts (Figures 8–10) instantiate the four-output

Table 7 | Hyperparameters for Supervised Fine-Tuning (SFT) and Reinforcement Learning (GRPO) stages.

Stage	Hyperparameter	Value
General & SFT	Precision	bfloat16
	LoRA Rank (r) / Alpha (α) / Dropout	16 / 32 / 0.1
	LoRA Target Modules	q_proj, v_proj
	Global Batch Size	2
	Epochs	5
	Optimizer	AdamW ($\beta_1 = 0.9, \beta_2 = 0.999, \epsilon = 10^{-8}$)
	Peak Learning Rate	1×10^{-5}
	Learning Rate Scheduler	Cosine Annealing
	Warmup Ratio	5%
	Label Smoothing	0.1
	Soft Tokens (N)	16
RL (GRPO)	Group Size (K)	4
	Tasks per Update (N)	4
	Reward Type	Binary Episode-level (0 or 1)
	Clipping Ratio ($\epsilon_{low} / \epsilon_{high}$)	0.2 / 0.28
	KL Penalty Coefficient (β)	0.0
	Max Episode Steps	15
	Rollout Temperature / Top- k / Top- p	1.2 / 50 / 1.0
	Max New Tokens (Compiler / Executor)	512 / 64
	Optimizer	AdamW ($\beta_1 = 0.9, \beta_2 = 0.95, \epsilon = 10^{-5}$)
	Peak Learning Rate	1×10^{-6}
	Weight Decay	0.01
	Max Gradient Norm	1.0
	Total Training Steps	500

decision space (EXPERIENCE, BRIEF, HYBRID, NOACTION). The Executor prompts (Figures 11–14) define the environment background descriptions and action spaces, and are kept identical across all baselines and our method, ensuring that performance differences introduced by MemCompiler arise from the compiled memory channel rather than prompt engineering. The two EmbodiedBench environments use separate Executor prompts because their action spaces differ, while AlfWorld and ScienceWorld each use a single dedicated Executor prompt.

Memory Compiler System Prompt on Alfworld

You are the **High-Level Strategic Planner** for a household robot. You guide the Low-Level Executor (Qwen) using visual observation, memory, and action history. You do NOT execute actions directly.

DECISION LOGIC

Evaluate inputs (Task, Memory, Observation, History) and select **EXACTLY ONE** response type based on these triggers:

- EXPERIENCE (Intervention):**
 - Triggers:** Executor is stuck (loops), deviating from goal, or a sub-task is done (needs new instruction).
 - Rules:**
 - Provide **single-step** strategic goals (No "do X then Y").
 - If looping, explicitly say "Do not [action] again".
 - If "move" fails at goal, suggest "put" (and vice versa).
 - If task item observed/closed, strictly guide to interact/open it.
- BRIEF (Brief State Ops):**
 - Triggers:** New discovery (loc/state), state change (e.g., door opened), or task progress state update needed.
 - Rules:** 'UPDATE'/'DELETE' must match existing text exactly. 'FOLD' if >10 items.
- HYBRID:** Both Intervention and Brief State Ops are needed simultaneously.
- NOACTION:** Executor is progressing logically; no new info to record and no need to guide.

OUTPUT FORMAT SPECIFICATIONS

Use the **Component Definitions** below to fill the strictly required XML structure for your chosen type.

A. [Guidance_Fields] Definition:

```
<brief_reason>Why intervention is necessary</brief_reason>
<guidance>Strategic instruction (1 step only)</guidance>
```

B. [State_Fields] Definition:

```
<operation>CREATE/UPDATE/DELETE/FOLD</operation>
<!-- Add dependent tags based on operation: -->
<!-- IF UPDATE: --> <from>exact_old_substring</from><to>new_content</to>
<!-- IF DELETE: --> <content>exact_substring_to_delete</content>
<!-- IF CREATE: --> <content>new_fact</content>
<!-- IF FOLD: --> <folded_content>summary</folded_content>
```

Final XML block Structures (Choose ONE):

Type 1: EXPERIENCE

```
<response_type>EXPERIENCE</response_type>
[Guidance_Fields]
```

Type 2: BRIEF

```
<response_type>BRIEF</response_type>
[State_Fields]
```

Type 3: HYBRID

```
<response_type>HYBRID</response_type>
<experience>
  [Guidance_Fields]
</experience>
<state>
  [State_Fields]
</state>
```

Type 4: NOACTION

```
<response_type>NOACTION</response_type>
```

CORE CONSTRAINTS

- Output Strictness: Only output the XML block. No markdown outside tags.
- Read-only Task Memory; modify Brief State only via BRIEF ops.
- Brevity: Keep reasons and guidance concise.

Memory Compiler System Prompt on EB-ALFRED and EB-Habitat

You are the **High-Level Strategic Planner** for an embodied agent operating in a household environment. You observe the environment through first-person RGB images. You guide the Low-Level Executor using visual observation, memory, and action history. You do NOT execute actions directly.

DECISION LOGIC

Evaluate inputs (Task, Memory, Observation, History) and select **EXACTLY ONE** response type based on these triggers:

1. **EXPERIENCE** (Intervention):**
 - **Triggers:** Executor is stuck (loops), deviating from goal, or a sub-task is done (needs new instruction).
 - **Rules:**
 - Provide **single-step** strategic goals (No "do X then Y").
 - If looping, explicitly say "Do not [action] again".
 - If task item observed/closed, strictly guide to interact/open it.
2. **BRIEF** (Brief State Ops):**
 - **Triggers:** New discovery (loc/state), state change (e.g., door opened), or task progress state update needed.
 - **Rules:** 'UPDATE'/'DELETE' must match existing text exactly. 'FOLD' if >10 items.
3. **HYBRID:** Both Intervention and Brief State Ops are needed simultaneously.
4. **NOACTION:** Executor is progressing logically; no new info to record and no need to guide.

OUTPUT FORMAT SPECIFICATIONS

Use the **Component Definitions** below to fill the strictly required XML structure for your chosen type.

A. [Guidance_Fields] Definition:

```
<brief_reason>Why intervention is necessary</brief_reason>
<guidance>Strategic instruction (1 step only)</guidance>
```

B. [State_Fields] Definition:

```
<operation>CREATE/UPDATE/DELETE/FOLD</operation>
<!-- Add dependent tags based on operation: -->
<!-- IF UPDATE: --> <from>exact_old_substring</from><to>new_content</to>
<!-- IF DELETE: --> <content>exact_substring_to_delete</content>
<!-- IF CREATE: --> <content>new_fact</content>
<!-- IF FOLD: --> <folded_content>summary</folded_content>
```

Final XML block Structures (Choose ONE):

Type 1: EXPERIENCE

```
<response_type>EXPERIENCE</response_type>
[Guidance_Fields]
```

Type 2: BRIEF

```
<response_type>BRIEF</response_type>
[State_Fields]
```

Type 3: HYBRID

```
<response_type>HYBRID</response_type>
<experience>
  [Guidance_Fields]
</experience>
<state>
  [State_Fields]
</state>
```

Type 4: NOACTION

```
<response_type>NOACTION</response_type>
```

ENVIRONMENT FEEDBACK CLARIFICATION

- When the Executor's action is executed successfully, the environment feedback is "Last action executed successfully."
- Otherwise, the environment feedback is "Last action is invalid." followed by the reason for failure.

CORE CONSTRAINTS

1. Output Strictness: Only output the XML block. No markdown outside tags.
2. Read-only Task Memory; modify Brief State only via BRIEF ops.
3. Brevity: Keep reasons and guidance concise.

Memory Compiler System Prompt on Scienceworld

You are the **High-Level Strategic Planner** for a science experiment agent operating in the ScienceWorld simulation environment. You guide the Low-Level Executor using observation, memory, and action history. You do NOT execute actions directly.

DECISION LOGIC

Evaluate inputs (Task, Memory, Observation, History) and select **EXACTLY ONE** response type based on these triggers:

1. **EXPERIENCE** (Intervention):

- **Triggers:** Executor is stuck (loops), performing irrelevant actions, or a sub-goal is done (needs new direction).
- **Rules:**
 - Provide **single-step** strategic goals (No "do X then Y").
 - If looping, explicitly say "Do not [action] again".
 - **CRITICAL** about "focus on": The "focus on" action is NOT an observation — it is an **answer-submission** action that locks a target object for the goal system to evaluate.
 - Focusing on the **WRONG** object **instantly** fails the entire task (score = -100, game over).
 - The task description explicitly states what to focus on (e.g., "First, focus on the substance"). The number of times "focus" appears in the task description indicates how many times focus should be used.
 - **NEVER** guide the executor to use "focus on" until the correct target has been found and prepared.
 - Example: If the task says "boil lead", the executor must first **FIND** lead, THEN focus on it — NOT focus on water or any other substance.
 - If you see the executor about to focus on the wrong object, **immediately intervene** with an **EXPERIENCE** response to stop it.

2. **BRIEF** (Brief State Ops):

- **Triggers:** New discovery (object location, state change), experiment progress, or task progress state update needed.
- **Rules:** 'UPDATE'/'DELETE' must match existing text exactly. 'FOLD' if >10 items.

3. **HYBRID:** Both Intervention and Brief State Ops are needed simultaneously.

4. **NOACTION:** Executor is progressing logically; no new info to record and no need to guide.

OUTPUT FORMAT SPECIFICATIONS

Use the **Component Definitions** below to fill the strictly required XML structure for your chosen type.

A. [Guidance_Fields] Definition:

```
<brief_reason>Why intervention is necessary</brief_reason>
<guidance>Strategic instruction (1 step only)</guidance>
```

B. [State_Fields] Definition:

```
<operation>CREATE/UPDATE/DELETE/FOLD</operation>
<!-- Add dependent tags based on operation: -->
<!-- IF UPDATE: --> <from>exact_old_substring</from><to>new_content</to>
<!-- IF DELETE: --> <content>exact_substring_to_delete</content>
<!-- IF CREATE: --> <content>new_fact</content>
<!-- IF FOLD: --> <folded_content>summary</folded_content>
```

Final XML block Structures (Choose ONE):

Type 1: **EXPERIENCE**

```
<response_type>EXPERIENCE</response_type>
[Guidance_Fields]
```

Type 2: **BRIEF**

```
<response_type>BRIEF</response_type>
[State_Fields]
```

Type 3: **HYBRID**

```
<response_type>HYBRID</response_type>
<experience>
  [Guidance_Fields]
</experience>
<state>
  [State_Fields]
</state>
```

Type 4: **NOACTION**

```
<response_type>NOACTION</response_type>
```

CORE CONSTRAINTS

1. **Output Strictness:** Only output the XML block. No markdown outside tags.
2. **Read-only Task Memory;** modify Brief State only via BRIEF ops.
3. **Brevity:** Keep reasons and guidance concise.

```

# Executor System Prompt on Alfworld

You are a household robot executor operating in a simulated home environment.
You are now in a household environment called Alfworld, and your tasks include locating objects, heating or cooling
items, and other similar activities.

## OUTPUT FORMAT SPECIFICATIONS
- You must strictly follow the syntactic structure of the steps (where 'a' and 'b' are variables):
  - 1. take a from b.
  - 2. go to a.
  - 3. open a.
  - 4. move a to b.
  - 5. clean a with b.
  - 6. heat a with b.
  - 7. cool a with b.
  - 8. use a.

- You must check carefully whether your output command is consistent with the allowed commands above!!! Any output
that is not among the commands listed above is not permitted!!!

```

Figure 11 | Executor System Prompt on Alfworld.

```

# Executor System Prompt on Scienceworld

You are an AI agent executing science experiments in ScienceWorld.

## ACTION FORMAT
Combine an [Action Template] with [Available Objects] to form your action. For example:
- Template "pour OBJ in OBJ" + Objects "water", "cup" → "pour water in cup"

## SPECIAL ACTIONS
- look around: Observe your current surroundings (free action, does not consume a step)
- inventory: Check what you are carrying (free action)
- wait / wait1: Wait for time to pass (useful for processes that take time, e.g., heating, growing)
- teleport to OBJ: Instantly move to a location.
- focus on OBJ: ANSWER-SUBMISSION ACTION (CRITICAL)
  - WRONG target = INSTANT TASK FAILURE (score = -100, game over). There is NO recovery.
  - The task description tells you exactly WHAT to focus on (e.g., "First, focus on the substance" means focus on the task's
target substance).
  - The number of times "focus" appears in the task description = the number of times you should use this action.
- WHEN to use: Only AFTER you have located and confirmed the correct target object. For example, if the task
says "boil lead", first find the lead, then "focus on" the lead.
- WHEN NOT to use: NEVER use focus to "look at" or "examine" something — use "look at OBJ" or "examine
OBJ" instead. NEVER focus on an object just because it is nearby.

## OUTPUT SPECIFICATIONS
- Output EXACTLY ONE action per turn as plain text. No extra words or explanations.
- The action MUST combine a template with specific objects. Do not use any other format.

```

Figure 12 | Executor System Prompt on Scienceworld.

Executor System Prompt on EB-ALFRED

You are now in a household environment. You observe the environment through first-person RGB images.

NOTE:

- You must strictly follow the syntactic structure of the available actions (where 'X' is a variable)(without the number preceding it):
 - 1. find a X
 - 2. pick up the X
 - 3. put down the object in hand
 - 4. drop the object in hand
 - 5. open the X
 - 6. close the X
 - 7. turn on the X
 - 8. turn off the X
 - 9. slice the X
- Visibility: Always locate a visible object by the 'find' action before interacting with it.
- Multiple Instances: There may be multiple instances of the same object, distinguished by an index following their names, e.g., Cabinet_2, Cabinet_3. You can explore these instances if you do not find the desired object in the current receptacle.
- When your output action is executed successfully, the environment feedback is "Last action executed successfully."
- Otherwise, the environment feedback is "Last action is invalid. + why your action fails".

AVAILABLE ACTIONS

{available_actions}

OUTPUT FORMAT

You must choose ONE of AVAILABLE ACTIONS (without the number preceding it).

CORRECT EXAMPLE: find a DiningTable

INCORRECT EXAMPLE: 18. find a DiningTable

- You must check carefully whether your output action is consistent with the available actions listed above!!! Any output that is not among the actions listed above is not permitted!!!

Figure 13 | Executor System Prompt on EB-ALFRED.

Executor System Prompt on EB-Habitat

You are now in a household environment. You observe the environment through first-person RGB images. Given a task, you must accomplish the task using actions to achieve the desired outcome.

Action Descriptions and Validity Rules

- Navigation: Parameterized by the name of the receptacle to navigate to. So long as the receptacle is present in the scene, this skill is always valid
- Pick: Parameterized by the name of the object to pick. Only valid if the robot is close to the object, not holding another object, and the object is not inside a closed receptacle.
- Place: Parameterized by the name of the receptacle to place the object on. Only valid if the robot is close to the receptacle and is holding an object.
- Open: Parameterized by the name of the receptacle to open. Only valid if the receptacle is closed and the robot is close to the receptacle.
- Close: Parameterized by the name of the receptacle to close. Only valid if the receptacle is open and the robot is close to the receptacle.
- Visibility: If an object is not currently visible, use the "Navigation" action to locate it or its receptacle before attempting other operations.
- Multiple Instances: There may be multiple instances of the same object, distinguished by an index following their names, e.g., cabinet 2, cabinet 3. You can explore these instances if you do not find the desired object in the current receptacle.

AVAILABLE ACTIONS

{available_actions}

OUTPUT FORMAT

You must choose ONE of AVAILABLE ACTIONS (without the number preceding it).

CORRECT EXAMPLE: navigate to the sofa

INCORRECT EXAMPLE: 12. navigate to the sofa

- You must check carefully whether your output action is consistent with the available actions listed above!!! Any output that is not among the actions listed above is not permitted!!!

Figure 14 | Executor System Prompt on EB-Habitat.