

Overcoming Statistical Bias in Action-Controllable World Models

Yuhong Shi¹, Zhenhao Chu¹, Jie Wei², Jun Hao², Jianyi Liu^{1*}, Jingwen Fu^{3*}

¹ Institute of Artificial Intelligence and Robotics, Xi'an Jiaotong University, Xi'an, China

² China Mobile (Shanghai) Information and Communication Technology Co., Ltd., Shanghai, China

³ Zhongguancun Academy, Beijing, China

Abstract

Action-conditioned world models aim to predict how visual environments evolve under an agent’s actions. Yet future frames are often highly predictable from visual inertia and recurring motion patterns alone. This creates a shortcut: models can fit the data by exploiting statistical biases without making their visible dynamics meaningfully depend on the action. As a result, different actions may produce similar futures, while motion may persist even under zero action. The key question is how to reduce reliance on statistical shortcuts from dominating action-conditioned prediction. We argue that action control requires more than injecting action features; it requires enforcing consistency under counterfactual changes to actions and observations. Based on this insight, we introduce **CoCo**, a Counterfactual Consistency framework to enhance action controllability through two complementary constraints. Multi-step counterfactual consistency constrains reference, inverse-action, and zero-action rollouts, while action-spatial counterfactual consistency enforces consistent predictions under mirrored scenes and transformed actions. Together, they reduce reliance on statistical shortcuts from substituting for action-dependent dynamics. We further introduce Action Response Consistency (ARC) and Drift Energy (DE) to assess action controllability, together with Mini-SSMB for same-state, multi-action counterfactual evaluation. On Mini-SSMB, our full model achieved ARC_{inv} of 0.412 and ARC_{ref} of 0.483, while reducing DE by 17.07% relative to the baseline. On VP² visual planning, it achieves the highest average success rate among SOTA models, at 73.1%. Experiments on BAIR and RoboNet further show that these gains preserve video prediction quality and transfer across model settings.

Introduction

Recent advances in autoregressive token models (Wu et al. 2025), diffusion models (Zhang et al. 2025b), and large-scale interactive simulators (Bi et al. 2026; Wu et al. 2025) have substantially improved the fidelity and scale of visual world modeling. At their core, world models are learned predictive simulators that enable agents to simulate future frames and evaluate candidate actions before interacting with the environment (Zhou et al. 2025). However, future frames are often highly predictable from visual inertia and recurring motion patterns alone, stemming from the statistical bias prevalent in data-driven learning, as shown in Fig. 1. When optimized to minimize empirical prediction error, a model naturally exploits the most frequent and easiest-to-predict correlations

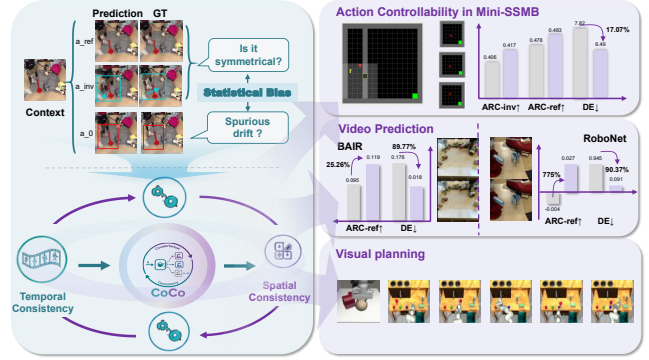


Figure 1: **Motivation and overview of CoCo.** Existing models are affected by statistical biases, resulting in asymmetric responses between reference and inverse actions, as well as spurious drift in zero actions. CoCo mitigates these statistical shortcuts by simultaneously enforcing counterfactual consistency in both temporal and spatial dimensions.

in the training data, rather than the mechanisms that actually determine future outcomes. This issue is particularly consequential for world models, since a planner relies on them to compare the consequences of alternative actions (Vafa et al. 2025). If distinct actions are mapped to nearly identical high-probability futures, the model may generate realistic videos while failing to function as an interactive simulator for decision-making (Li et al. 2025b).

Most existing work attempts to address this problem by strengthening how actions are represented and injected into world models (Wang et al. 2024). Actions are incorporated through concatenated tokens (Wu et al. 2024), latent controls (Maes et al. 2026), cross-attention (Ma et al. 2024), feature modulation (Wu et al. 2024), or motion prompts (Wang et al. 2025), while complementary approaches improve representations and objectives through disentanglement and causal modeling (Lin et al. 2024), task-aware reconstruction (Hutson, Kauvar, and Haber 2024), and robustness regularization (Ramasubramanian et al. 2025). Although these methods can increase apparent action responsiveness and improve prediction accuracy on observed trajectories, they cannot remove statistical bias at its source (Pan and Bareinboim 2024). The reason is that their supervision remains observational. For

each visual context, the training data contain only the future produced by the executed action, but not the futures that would have resulted from alternative or zero actions. Consequently, a model can satisfy the training objective by encoding the action while still predicting mainly from visual inertia, recurring motion, and dataset-level correlations (Gu et al. 2024). Standard factual losses cannot distinguish such shortcut predictions from genuinely action-driven transitions because both can match the future equally well (Liu et al. 2025). The limitation of prior work is therefore not insufficient action capacity, but the absence of supervision that identifies the causal effect of changing the action (Lancaster et al. 2024; Yamada et al. 2024). Without explicit counterfactual constraints, stronger action injection may reduce the symptoms of statistical bias, but cannot prevent the model from relying on it.

To address this issue, we propose **CoCo**, a Counterfactual Consistency framework. CoCo is built on the principle that an action-driven world model should produce a correspondingly transformed future whenever an intervention changes the action, the scene, or both. Therefore, temporal and spatial constraints are two complementary instances of the same structural requirement. In the temporal domain, an action sequence followed by its inverse should form a cycle that approximately recovers the initial state, whereas a zero action should act as an identity intervention that preserves the state. **Multi-Step Counterfactual Consistency (MSC2)** encodes these relations across rollouts, preserving the directional effect of actions. In the spatial domain, the joint transformation of the agent’s current space and actions defines the equivariance relation of the world model, that is, the prediction of the mirror input should be equal to the predicted mirror. **Action-Spatial Counterfactual Consistency (ASC2)** explicitly enforces this spatial equivariance. Together, these constraints enable CoCo to improve its measurement of the controllability of actions under the proposed counterfactual assessment, thereby enhancing its performance on downstream tasks. Our contributions are summarized as:

- We characterize how statistical shortcuts undermine action controllability in world models, showing that a model can achieve accurate factual prediction by exploiting visual regularities while failing to encode the observable effect of an action.
- We introduce counterfactual consistency as a structural principle for addressing statistical bias in action-conditioned world models. Under this principle, we propose MSC2 and ASC2, which jointly impose counterfactual constraints through temporal intervention relations and spatial transformation relations.
- We introduce Action Response Consistency (ARC) and Drift Energy (DE) to directly evaluate action-induced motion and zero-action stability, and construct Mini-SSMB for same-state, multi-action counterfactual evaluation. Extensive experiments validate the proposed framework on video prediction, visual planning, and model-based reinforcement learning.

Related Work

Statistical Bias in World Models

Recent studies show that predictive accuracy alone does not guarantee that a world model captures decision-relevant dynamics. Policy-shaped Prediction demonstrates that reconstruction-based models can allocate capacity to predictable yet policy-irrelevant visual distractions, thereby neglecting task-critical dynamics (Li et al. 2025a). In MBRL (Hu, Mirchandani, and Sadigh 2024), BECAUSE attributes the mismatch between accurate model prediction and policy performance to confounders in observational data, and mitigates it through causal state-action representations (Lin et al. 2024). Related work further addresses model bias and distribution shift during policy optimization (Feng et al. 2023; Cheng et al. 2025), as well as robustness to optimization-induced model errors (Ramasubramanian et al. 2025). More fundamentally, inductive-bias probes show that models can perform well on sequence prediction while relying on task-specific heuristics rather than learning the underlying dynamics (Vafa et al. 2025). These works reveal that world models can exploit statistical regularities instead of causal structure (Richens and Everitt 2024; Gkountouras et al. 2025; Zhang et al. 2025a). Consequently, they leave an overlooked failure mode in which a world model can be accurate and robust yet remain action-insensitive at the pixel level, because it is never required to distinguish counterfactual futures induced by alternative actions from the same visual state.

Counterfactual Consistency

Counterfactual consistency asks whether a learned dynamics model predicts the appropriate change in future states after an intervention (Hao et al. 2025; Bar et al. 2025; De Sousa Ribeiro et al. 2023). Adversarial counterfactual environment model learning identifies behavior-policy selection bias as a source of unreliable counterfactual prediction (Haugh and Singal 2023), and uses adversarially weighted model learning to improve off-policy dynamics prediction and decision making (Chen et al. 2023; Richens and Everitt 2024). DALI (Röder et al. 2025) learns latent environmental contexts from interactions and shows that intervening on context factors, such as gravity, induces physically plausible imagined rollouts. In visual modeling, CWM (Bear et al. 2023) uses counterfactual input perturbations to expose structured physical factors, while CWMDT (Shen et al. 2025) enables scene-level hypothetical interventions through digital-twin representations. Related controllable world models improve fine-grained motion prediction or long-horizon rollout quality through richer control signals and architectures (Jiang et al. 2025; Hassan et al. 2025).

Method

Problem Definition

Given an observed video sequence $S_{1:T} = \{s_1, \dots, s_T\}$ and its corresponding action sequence $A_{1:T-1} = \{a_1, \dots, a_{T-1}\}$, the objective of an action-conditioned world model is to learn a conditional generative mapping f_θ that autoregressively predicts the next H frames from the historical

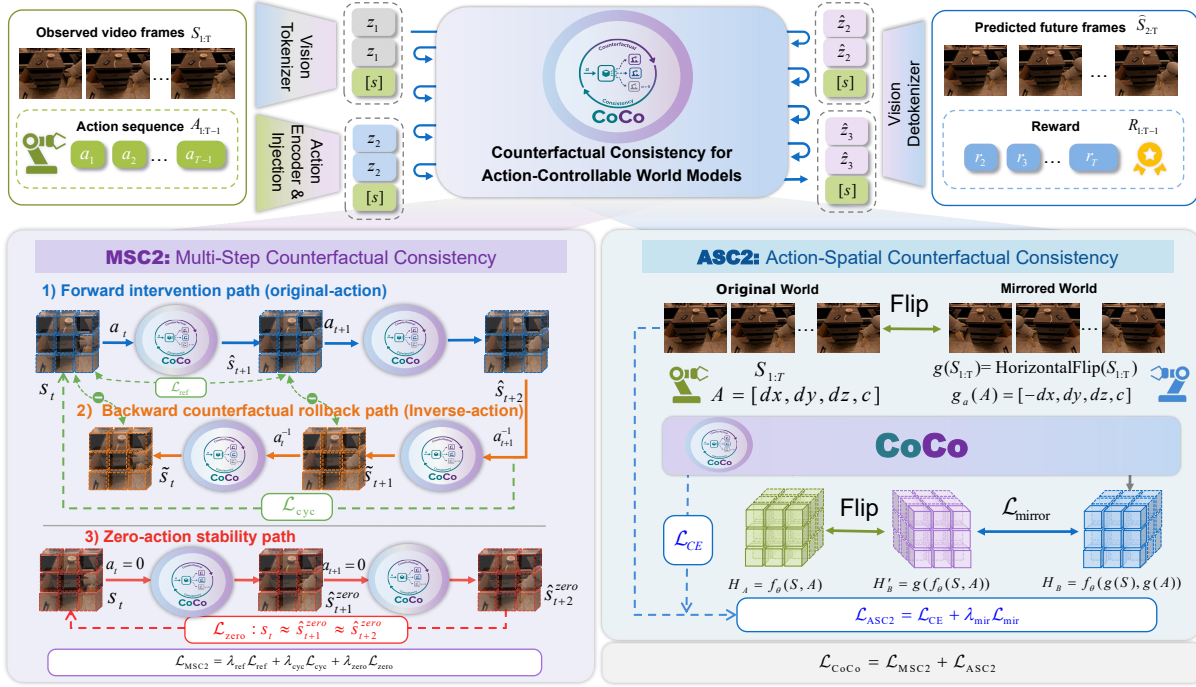


Figure 2: **Overview of the CoCo framework.** Given observed frames and future actions, a shared action-conditioned Transformer predicts future video tokens, frames, and rewards. MSC2 improves temporal controllability by combining original-action forward prediction, inverse-action rollback, and zero-action stability constraints. ASC2 further enforces spatial action semantics by aligning predictions between the original and horizontally mirrored worlds with correspondingly transformed actions.

context $S_{\leq t}$ as

$$\hat{S}_{t+1:t+H} = f_{\theta}(S_{\leq t}, A_{t:t+H-1}). \quad (1)$$

For models operating on discrete video tokens, the input frames are first encoded into a sequence of discrete latent variables by a tokenizer $Z_{1:T} = \mathcal{E}(S_{1:T})$. An autoregressive Transformer (Vaswani et al. 2017) then models the conditional distribution $p_{\theta}(Z_{t+1:t+H} | Z_{\leq t}, A_{t:t+H-1})$, and the predicted tokens are mapped back to pixel space through a detokenizer $\hat{S}_{t+1:t+H} = \mathcal{D}(\hat{Z}_{t+1:t+H})$. Existing world models are typically trained using maximum likelihood estimation or a token-level reconstruction objective.

However, this objective primarily encourages the model to generate plausible future frames under the observational data distribution. It does not ensure that the generated outcomes are genuinely controlled by the specified actions. In other words, the model generally learns the observational distribution $p_{\theta}(Z_{t+1:t+H} | Z_{\leq t}, A_{t:t+H-1})$, rather than the interventional distribution of primary interest for robotic world modeling $p_{\theta}(Z_{t+1:t+H} | Z_{\leq t}, \text{do}(A_{t:t+H-1}))$. The difference lies in that the former allows the model to use historical visual inertia, background relevance, or statistical bias to predict the future, while the latter requires action to be the causal variable driving the change. Therefore, the focus of this paper is not merely on improving the quality of video reconstruction, but on overcoming this statistical bias and improving the controllability of action on the generated results.

Multi-Step Counterfactual Consistency

To address the aforementioned issues, we design a supervisory signal using counterfactual consistency in the world model prediction process, proposing the MSC2 module as shown in Fig. 2. It aims to constrain the model to learn the causal relationship between actions and state changes by utilizing the multi-step consistency of the action world model and counterfactual action branches (i.e., the inverse action branch, and the zero action branch). In principle, the original actions should drive consistent state transitions, the inverse actions should produce opposite changes, and the zero actions should suppress unrelated drift.

Specifically, given the current state S_t and an action sequence $A_{t:t+K-1} = \{a_t, \dots, a_{t+K-1}\}$, MSC2 evaluates the model under counterfactual rollouts. The original-action branch predicts the future $\hat{S}_{t+1:t+K}^{\text{ref}} = f_{\theta}(S_t, A_{t:t+K-1})$, where H denotes the global video prediction horizon and satisfies $K \leq H$. MSC2 is constrained to follow the real action-induced dynamics by a multi-step prediction loss $\mathcal{L}_{\text{ref}} = \sum_{k=1}^K d(\hat{S}_{t+k}^{\text{ref}}, S_{t+k})$.

To test whether the learned transition is action-reversible, we further construct an inverse-action sequence $\mathcal{I}(A_{t:t+K-1})$, where each action is replaced by its inverse counterpart. Starting from the predicted endpoint $\hat{S}_{t+K}^{\text{ref}}$, the model performs a backward counterfactual rollout

$$\tilde{S}_t = f_{\theta}(\hat{S}_{t+K}^{\text{ref}}, \mathcal{I}(A_{t:t+K-1})). \quad (2)$$

If the model has learned action-consistent dynamics, the in-

verse rollout should recover the initial state, yielding the multi-step cycle constraint $\mathcal{L}_{\text{cyc}} = d(\tilde{S}_t, S_t)$. The forward reference rollout is greedily generated with stop-gradient. Its predicted endpoint is re-tokenized as the inverse-branch context, and the inverse rollout is optimized with teacher forcing. In addition, MSC2 introduces a zero-action branch

$$\hat{S}_{t+1:t+K}^{\text{zero}} = f_{\theta}(S_t, \mathbf{0}_{1:K}), \quad (3)$$

which penalizes state drift when zero action is applied $\mathcal{L}_{\text{zero}} = \sum_{k=1}^K d(\hat{S}_{t+k}^{\text{zero}}, S_t)$, where $d(\cdot, \cdot)$ denotes the frame-wise mean absolute error.

Together, the three branches impose complementary constraints. The original-action branch aligns predicted motion with real dynamics, the inverse-action branch enforces reversibility under counterfactual inverse controls, and the zero-action branch suppresses action-independent drift. The resulting objective can be written as

$$\mathcal{L}_{\text{MSC2}} = \lambda_{\text{ref}} \mathcal{L}_{\text{ref}} + \lambda_{\text{cyc}} \mathcal{L}_{\text{cyc}} + \lambda_{\text{zero}} \mathcal{L}_{\text{zero}}, \quad (4)$$

where the non-negative coefficients λ_{ref} , λ_{cyc} , and λ_{zero} balance the three objectives.

By applying these constraints to K -step counterfactual rollouts, MSC2 regularizes the consistency of generated trajectories beyond the standard one-step prediction objective. It jointly enforces forward consistency, backward recovery, and zero-action stability, thereby encouraging the model to learn the direction and magnitude of future frame changes with action.

Action-Spatial Counterfactual Consistency

Multi-step counterfactual consistency constrains action-conditioned dynamics over time but does not capture the spatial meaning of actions. We therefore introduce ASC2, requiring the model’s predictions to transform consistently when the visual scene and corresponding actions undergo the same spatial transformation.

Let the action-conditional world model be (1), when a reflection-compatible action coordinate is available, for spatial transformation g , there exists a corresponding action-space transformation g_a such that

$$g(f_{\theta}(S_{\leq t}, A_{t:t+K-1})) \approx f_{\theta}(g(S_{\leq t}), g_a(A_{t:t+K-1})). \quad (5)$$

This equation expresses the spatial equivariance of action-conditioned dynamics: applying a spatial transformation to an action-conditioned future prediction should be equivalent to predicting the future from the correspondingly transformed observation and action. For ASC2, g is horizontal image mirroring. In MiniGrid, g_a swaps left and right while preserving forward and zero. We use this as a dataset-dependent approximate regularizer, rather than assuming an exact physical symmetry.

Specifically, we construct two parallel branches with shared parameters. The original branch takes $(S_{\leq t}, A_{t:t+K-1})$ as input, while the mirrored branch takes $(g(S_{\leq t}), g_a(A_{t:t+K-1}))$. The CoCo produces continuous hidden representations at the future token positions

$$\begin{aligned} H^{\text{fut}} &= f_{\theta}(S_{\leq t}, A_{t:t+K-1}), \\ \tilde{H}^{\text{fut}} &= f_{\theta}(g(S_{\leq t}), g_a(A_{t:t+K-1})), \end{aligned} \quad (6)$$

where H^{fut} and $\tilde{H}^{\text{fut}}$ denote the continuous hidden representations for the original and mirrored branches, respectively. Since the discrete codebook indices produced by the video tokenizer do not have inherent geometric meanings, we do not directly impose the mirroring constraint on token IDs. Instead, we align the continuous hidden representations. After reshaping the hidden states of future dynamic tokens into spatial grids, we apply a flipping operator F_w along the width dimension of the original branch and define the mirror-equivariance loss as $\mathcal{L}_{\text{mir}} = \ell(F_w(H^{\text{fut}}), \tilde{H}^{\text{fut}})$, where we use the SmoothL1 loss for ℓ . The final objective of ASC2 is

$$\mathcal{L}_{\text{ASC2}} = \mathcal{L}_{\text{CE}} + \lambda_{\text{mir}} \mathcal{L}_{\text{mir}}, \quad (7)$$

where $\mathcal{L}_{\text{CE}}$ maintains the autoregressive prediction quality in the original visual space, $\mathcal{L}_{\text{mir}}$ encourages the model to learn action-spatial counterfactual consistency, and λ_{mir} is a non-negative balanced coefficient.

Experiment

We conduct experiments to answer four questions. **Q1**: whether conventional reconstruction metrics adequately reflect action controllability; **Q2**: whether the proposed counterfactual constraints improve action response and suppress action-independent drift; **Q3**: whether these gains hold across discrete and continuous control settings without sacrificing visual quality; and **Q4**: whether improved controllability benefits downstream decision-making.

Action Controllability Metrics

Conventional world-model metrics, including FVD (Ge et al. 2024), LPIPS (Zhang et al. 2018), PSNR (Keleş et al. 2021), and SSIM (Wang et al. 2004), primarily assess visual quality and cannot determine whether generated videos are controlled by the input actions. To answer **Q1**, we introduce two counterfactual metrics, ARC and DE. They capture complementary aspects of action controllability. ARC measures whether generated motion follows the action, whereas DE measures whether the model remains stable in the zero action. By comparing predictions under reference, inverse, and zero actions, these metrics more directly assess action-driven dynamics than conventional visual-quality metrics. Detailed definitions are provided in the Appendix A.

Action Controllability in Mini-SSMB

Setup 1) *Dataset construction*: To systematically evaluate CoCo’s ability to controllably generate discrete actions (**Q2**), we constructed a dataset based on MiniGrid with the same state and multiple branches (Mini-SSMB). Unlike single-trajectory datasets, Mini-SSMB applies multiple actions to the same state s_t and records their corresponding next states s_{t+1}^a . As in Fig. 3, we use MiniGrid (Chevalier-Boisvert et al. 2023) with 64×64 RGB observations and three navigation actions: left, right, and forward. Detailed information about the Mini-SSMB is provided in Appendix B.

2) *Training and evaluation*. We train our model on Mini-SSMB to evaluate action-state consistency. All models are initialized from the pretrained checkpoint and trained with

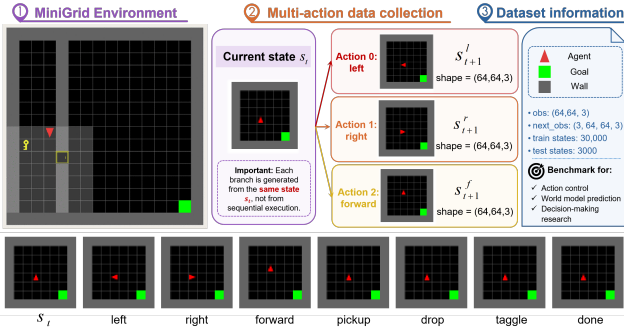


Figure 3: **The overview of the Mini-SSMB Dataset.** Mini-SSMB contains 30,000 training and 3,000 test states, each paired with next-frame observations for left, right, and forward. Left and right rotate the agent, while forward moves it ahead unless blocked by a wall.

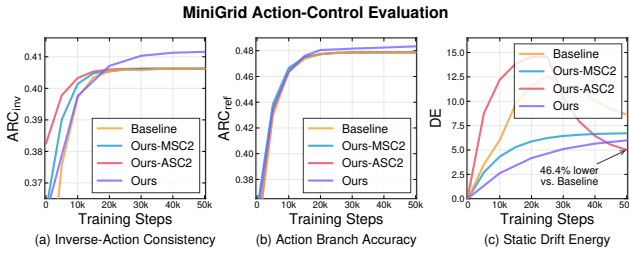


Figure 4: **Training dynamics of action-control metrics on Mini-SSMB.** Ours-MSC2 and Ours-ASC2 each contain one module, and Ours serves as the full model. The baseline model is presented by iVideoGPT.

two-frame clips. We compare the baseline with Ours-MSC2, Ours-ASC2, and the full Ours model, using 50K optimization steps, batch size 16, learning rate (1×10^{-5}), cosine scheduling, and (64×64) resolution. All experiments are conducted on a server equipped with eight NVIDIA A800 GPUs.

Results Analysis Fig. 4 shows a comparison of the action controllability of our model and the baseline. All models achieve ARC scores above the random baseline of $1/3$, indicating that they successfully learn the basic action-state correspondence. However, the base model still exhibits substantial drift under zero actions (see Fig. 4 (c)). Ours-MSC2 model reduces DE from 7.82 to 6.75 (13.7%), while Ours-ASC2 further lowers it to 4.19 (46.4%), without sacrificing reference- or inverse-action accuracy. The higher motion ARC (0.624) than rotation ARC (0.406) also shows that forward displacement is easier to capture than fine-grained in-place rotations. Overall, CoCo achieves better control over predicted following actions and effectively suppresses action-independent variations, resulting in better dynamic control than baseline methods.

Video Prediction

Setup To answer Q3 and evaluate the action-conditional video prediction performance of CoCo, we conducted experiments on the BAIR (Ebert et al. 2017) and RoboNet (Dasari et al. 2020). BAIR contains 64×64 RGB videos of robotic

pushing interactions with 4-D continuous actions, providing a controlled setting for evaluating whether the model can capture fine-grained action-induced object motion. RoboNet is a larger and more diverse multi-robot manipulation dataset; we use its preprocessed 64×64 videos with 5-D continuous control signals to evaluate generalization under more heterogeneous robots, scenes, and object interactions.

Results Analysis The baselines for this experiment can be divided into two categories. The first includes action-enhanced methods, such as CA (Perez et al. 2018) and MR (Zhang, Rao, and Agrawala 2023), which inject action information through conditional modulation or motion residuals but do not explicitly enforce counterfactual controllability. The second includes video prediction or action-conditioned baselines, such as FitVid (Babaeizadeh et al. 2021), MaskViT (Gupta et al. 2023), iVideoGPT (Wu et al. 2024), and SAMPO (Wang et al. 2025), which mainly optimize visual prediction quality. As shown in Table 1, on action controllability, CoCo consistently achieves the best results. On BAIR, the full Ours obtains the highest ARC_{inv} and ARC_{ref} scores, 0.100 and 0.119, outperforming iVideoGPT by 35.1% and 25.3%, respectively. It also reduces DE from 0.176 to 0.018, showing a substantial reduction in static drift. Ours-MSC2 already lowers DE to 0.023, confirming that counterfactual consistency directly improves zero-action stability, while Ours-ASC2 improves ARC_{inv} to 0.086, indicating better directional action response. The improvement is more pronounced on RoboNet, where existing baselines suffer from severe drift. iVideoGPT and FitVid obtain DE values of 0.945 and 0.921, respectively, while our model reduces DE to 0.091. Meanwhile, Ours achieves the best ARC_{inv} and ARC_{ref} scores among action-conditioned models, indicating that the generated transitions are better aligned with the conditioned action branch rather than visual inertia or spurious dynamics.

Visualization of video predictions is shown in Fig. 5. For visual prediction quality, Ours remains competitive and often improves over the action-conditioned backbone. On BAIR, Ours reduces FVD from 73.46 to 71.27, LPIPS from 5.88 to 4.84, and improves PSNR from 23.33 to 28.35 compared with iVideoGPT. On RoboNet, Ours achieves the best FVD of 43.81 and the best LPIPS of 1.32 among the compared models. Although SAMPO achieves higher PSNR (29.30) and SSIM (94.10), likely due to its scale-wise autoregressive design prioritizing pixel-level fidelity, CoCo demonstrates stronger action controllability by explicitly enforcing counterfactual consistency. Overall, these results indicate that CoCo effectively mitigates statistical bias while maintaining competitive video generation quality. Sensitivity analysis of hyperparameters are in Appendix C.

Visual Planning

Setup To answer Q4 and evaluate object-conditional visual planning, we conduct experiments on the VP² benchmark (Tian, Finn, and Wu 2023) using both RoboDesk and robosuite. The planner receives RGB observations resized to 64×64 , conditions the video model on two context frames, and predicts future observations under can-

Model	ARC _{inv} ↑	ARC _{ref} ↑	DE ↓
<i>Action-conditioned at 64×64 resolution on BAIR</i>			
CA	0.022	-0.022	0.239
MR	0.034	-0.034	0.272
FitVid	-0.062	-0.302	0.050
iVideoGPT	0.074	0.095	0.176
Ours-MSC2	0.083	0.105	0.023
Ours-ASC2	0.086	0.102	0.071
Ours	0.100	0.119	0.018
<i>Action-conditioned at 64×64 resolution on RoboNet</i>			
CA	0.002	-0.002	0.253
MR	0.008	-0.007	0.218
FitVid	-0.045	-0.158	0.921
iVideoGPT	0.013	-0.004	0.945
Ours-MSC2	0.049	0.036	0.095
Ours-ASC2	0.042	0.027	0.104
Ours	0.055	0.064	0.091

Model	FVD ↓	LPIPS ↓	PSNR ↑	SSIM ↑
<i>Action-conditioned at 64×64 resolution on BAIR</i>				
CA	382.48	12.74	18.29	77.88
MR	375.63	12.75	18.29	77.88
iVideoGPT	73.46	5.88	23.33	88.17
SAMPO	55.50	5.00	26.70	94.70
Ours-MSC2	73.12	4.92	26.38	88.27
Ours-ASC2	74.15	4.87	27.36	88.18
Ours	71.27	4.84	28.35	88.10
<i>Action-conditioned at 64×64 resolution on RoboNet</i>				
FitVid	62.50	2.40	28.20	89.30
MaskViT	133.50	4.20	23.20	80.50
iVideoGPT	94.07	2.01	19.35	65.87
SAMPO	57.10	3.30	29.30	94.10
Ours-MSC2	67.01	1.57	26.15	82.78
Ours-ASC2	59.77	1.36	27.27	85.60
Ours	43.81	1.32	27.33	85.75

Table 1: **Video prediction and action controllability performance on the BAIR and RoboNet datasets.** We evaluate action-conditioned world models on BAIR and RoboNet using both controllability metrics and standard visual quality metrics. Each reported metric is calculated as the mean and standard deviation over three runs. LPIPS and SSIM scores are scaled by 100 for convenient display.

Method / Task	robosuite Push	Flat Block	Open Drawer	Open Slide	Blue Button	Green Button	Red Button	Upright Block	Avg. Success↑
Simulator	93.5 $\pm$ 1.2	13.3 $\pm$ 0.0	76.7 $\pm$ 0.0	71.7 $\pm$ 1.4	100.0 $\pm$ 0.0	96.7 $\pm$ 0.0	90.0 $\pm$ 0.0	90.0 $\pm$ 0.0	100.0
FitVid	67.7 $\pm$ 6.4	9.2 $\pm$ 2.8	25.3 $\pm$ 8.2	35.3 $\pm$ 5.5	94.0 $\pm$ 4.2	84.0 $\pm$ 5.5	58.7 $\pm$ 5.5	51.3 $\pm$ 2.9	65.6
MCVD	77.3 $\pm$ 2.1	4.0 $\pm$ 1.4	11.7 $\pm$ 1.4	18.3 $\pm$ 1.4	95.0 $\pm$ 4.1	83.3 $\pm$ 0.0	73.3 $\pm$ 2.7	56.7 $\pm$ 2.7	64.3
MaskViT	82.6 $\pm$ 2.5	4.0 $\pm$ 4.1	4.0 $\pm$ 4.1	8.7 $\pm$ 5.5	94.7 $\pm$ 1.4	64.0 $\pm$ 4.1	24.0 $\pm$ 8.2	62.2 $\pm$ 9.5	52.1
iVideoGPT	78.3 $\pm$ 0.8	3.3 $\pm$ 0.7	37.5 $\pm$ 1.7	16.1 $\pm$ 2.7	95.6 $\pm$ 2.1	82.5 $\pm$ 3.4	92.2 $\pm$ 1.4	44.7 $\pm$ 1.7	70.1
SAMPO	80.7 $\pm$ 1.4	5.5 $\pm$ 1.2	40.3 $\pm$ 2.3	18.3 $\pm$ 3.3	97.3 $\pm$ 1.7	85.3 $\pm$ 3.3	94.7 $\pm$ 2.1	46.1 $\pm$ 2.7	72.2
Ours	83.8 $\pm$ 1.9	4.1 $\pm$ 2.4	32.5 $\pm$ 7.9	21.5 $\pm$ 4.3	98.3 $\pm$ 1.7	88.3 $\pm$ 3.7	89.8 $\pm$ 2.8	54.2 $\pm$ 4.3	73.1

Table 2: **Visual planning performance in VP².** We report the success rates across 7 tasks in RoboDesk and 1 task in robosuite, and the average success rate is calculated by normalizing against the Simulator’s success rate and excluding FlatBlock. In addition, we provide the mean and standard deviation of the success rates (in %) on average across 4 random seeds.

didate action sequences. We evaluate RoboDesk tasks including object pushing, drawer/slide opening, and block-off-table manipulation, and robosuite manipulation tasks with the `agentview_shift_2` camera. RoboDesk uses a 5-D continuous action space, while robosuite uses a 4-D action space. At each step, we use CEM to optimize candidate action sequences over a horizon of 10 by minimizing the RGB mean-squared error between predicted frames and the goal image.

Results Analysis Table 2 compares three classes of methods: generic video prediction baselines (FitVid, MCVD, MaskViT, and iVideoGPT), an action-conditioned planning baseline (SAMPO), and our model. Our method achieves the best average success rate 73.1, outperforming iVideoGPT by 3.0 points and SAMPO by 0.9 points. This improvement is especially clear on tasks that require stable directional execution and long-horizon control, such as robosuite Push, Open Slide, Blue Button, Green Button, and Upright Block, where our model consistently matches or exceeds the strongest baselines. These gains are consistent with our design. The cycle

constraint reduces rollout drift and enforces action reversibility, while the equivariance constraint aligns action direction with spatial action. As a result, the model converts action information into more reliable planning behavior rather than merely producing visually plausible rollouts.

Model-based Reinforcement Learning

Setup To answer Q4, we conducted experiments on six metaworld operation tasks to verify the performance of reinforcement learning based on the visual model. The agent receives RGB observations from the corner camera with a frame stack of 3, and acts in the continuous 4-D MetaWorld action space. Each episode lasts up to 100 environment steps. We compare the model-free baseline DrQ-v2 (Yarats et al. 2022) with the model-based agent in MBPO (Wu et al. 2024), which is augmented by a pre-trained world model. We compare the performance of the CoCo model with the iVideoGPT model in MBPO.

Results Analysis Fig. 6 shows that CoCo improves the aggregate success rate of MBPO over both the iVideoGPT-

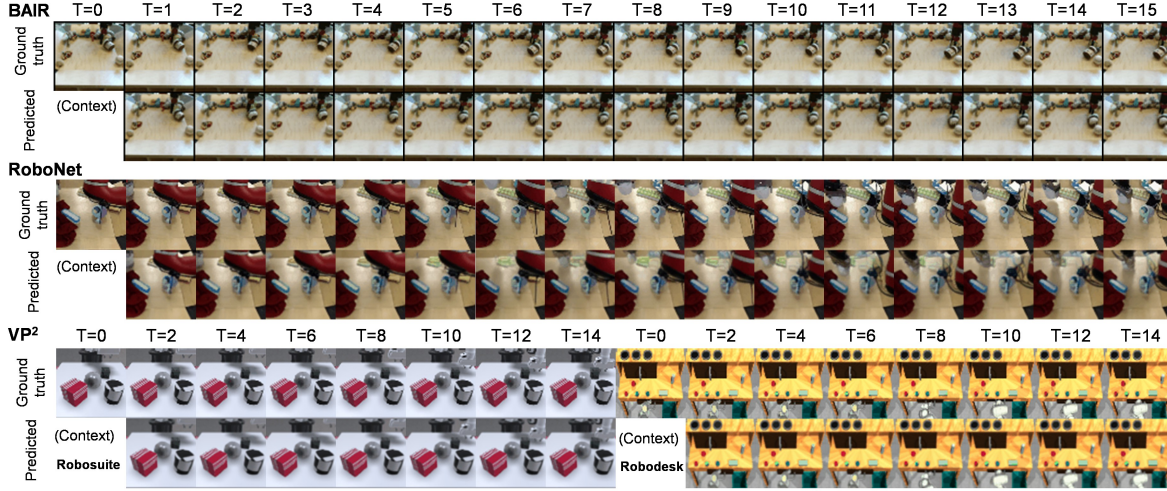


Figure 5: **Visualization of video prediction results across datasets.** We visualize ground-truth and predicted rollouts on BAIR, RoboNet datasets, and VP² tasks including robosuite and RoboDesk.

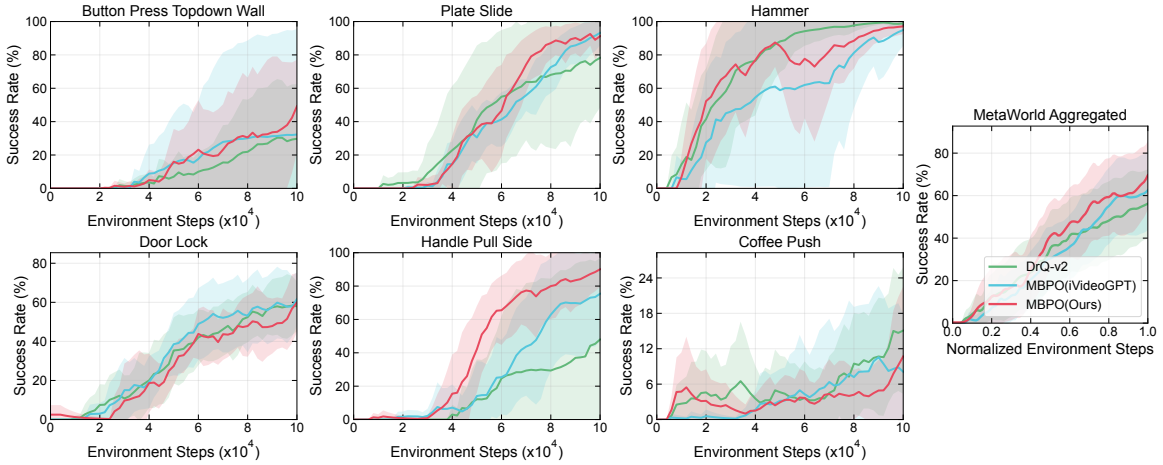


Figure 6: **Model-based reinforcement learning on MetaWorld.** Success rate learning curves on six manipulation tasks and their normalized aggregate. Curves show the mean over five random seeds, and shaded regions denote 95% confidence intervals.

based world model and the model-free DrQ-v2 baseline. The gain is most pronounced on Button Press Topdown Wall and Handle Pull Side, where MBPO(Ours) achieves faster learning and a substantially higher final success rate. On Plate Slide, CoCo reaches a similar final performance to MBPO(iVideoGPT) while improving learning progress in the later stage. It remains competitive on Hammer and Door Lock, indicating that the counterfactual constraints do not compromise performance on tasks where the baseline world model is already effective. Yet Coffee Push remains challenging for all methods, and CoCo does not provide a clear advantage on this task. Overall, these results suggest that the proposed counterfactual constraints can benefit model-based policy learning, particularly for tasks requiring reliable action-conditioned state transitions. The overlapping confidence intervals on several tasks indicate task-dependent gains and motivate broader evaluation in future work.

Conclusion

This paper explores how to reduce the impact of statistical bias on the controllability of actions in world models through counterfactual consistency. We introduce CoCo, a counterfactual consistency framework that enforces multi-step intervention consistency and spatial equivariance through MSC2 and ASC2, respectively. Together with the ARC and DE metrics and the Mini-SSMB dataset, CoCo makes action-controllable world models trainable and measurable. Experiments on video prediction and downstream decision-making tasks show that CoCo improves action controllability while maintaining competitive video prediction quality.

However, constructing multiple counterfactual branches and spatially transformed inputs introduces additional computation. Moreover, predefined inverse actions and spatial transformations may be ill-defined for irreversible contacts or complex semantic actions. In the future, we will investigate learning valid transformations directly from data and improving the efficiency of counterfactual training.

References

- Babaeizadeh, M.; Saffar, M. T.; Nair, S.; Levine, S.; Finn, C.; and Erhan, D. 2021. FitVid: Overfitting in Pixel-Level Video Prediction. *arXiv:2106.13195*.
- Bar, A.; Zhou, G.; Tran, D.; Darrell, T.; and LeCun, Y. 2025. Navigation World Models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 15791–15801. Nashville, TN: IEEE.
- Bear, D. M.; Feigelis, K.; Chen, H.; Lee, W.; Venkatesh, R.; Kotar, K.; Durango, A.; and Yamins, D. L. K. 2023. Unifying (Machine) Vision via Counterfactual World Modeling. *arXiv:2306.01828*.
- Bi, H.; Tan, H.; Xie, S.; Wang, Z.; Huang, S.; Liu, H.; Zhao, R.; Feng, Y.; Xiang, C.; Rong, Y.; Zhao, H.; Liu, H.; Su, Z.; Ma, L.; Su, H.; and Zhu, J. 2026. Motus: A Unified Latent Action World Model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 35101–35113. Denver, CO: IEEE.
- Chen, X.-H.; Yu, Y.; Zhu, Z.; Yu, Z.; Chen, Z.; Wang, C.; Wu, Y.; Qin, R.-J.; Wu, H.; Ding, R.; and Huang, F. 2023. Adversarial Counterfactual Environment Model Learning. In *Advances in Neural Information Processing Systems*, 70654–70706. New Orleans, LA: NeurIPS.
- Cheng, J.; Qiao, R.; Ma, Y.; Li, B.; Xiong, G.; Miao, Q.; Li, Y.; and Lv, Y. 2025. Scaling Offline Model-Based RL via Jointly-Optimized World-Action Model Pretraining. In *International Conference on Learning Representations*. Singapore: ICLR.
- Chevalier-Boisvert, M.; Dai, B.; Towers, M.; Perez-Vicente, R.; Willems, L.; Lahlou, S.; Pal, S.; Castro, P. S.; and Terry, J. K. 2023. Minigrid & Miniworld: Modular & Customizable Reinforcement Learning Environments for Goal-Oriented Tasks. In *Advances in Neural Information Processing Systems*, volume 36. New Orleans, LA: NeurIPS.
- Dasari, S.; Ebert, F.; Tian, S.; Nair, S.; Bucher, B.; Schmeckpeper, K.; Singh, S.; Levine, S.; and Finn, C. 2020. RoboNet: Large-Scale Multi-Robot Learning. In *Proceedings of the Conference on Robot Learning*, volume 100, 885–897. PMLR.
- De Sousa Ribeiro, F.; Xia, T.; Monteiro, M.; Pawlowski, N.; and Glocker, B. 2023. High Fidelity Image Counterfactuals with Probabilistic Causal Models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, 7390–7425. PMLR.
- Ebert, F.; Finn, C.; Lee, A. X.; and Levine, S. 2017. Self-Supervised Visual Planning with Temporal Skip Connections. In *Proceedings of the 1st Annual Conference on Robot Learning*, volume 78, 344–356. PMLR.
- Feng, Y.; Hansen, N.; Xiong, Z.; Rajagopalan, C.; and Wang, X. 2023. Finetuning Offline World Models in the Real World. In Tan, J.; Toussaint, M.; and Darvish, K., eds., *Proceedings of The 7th Conference on Robot Learning*, volume 229, 425–445. PMLR.
- Ge, S.; Mahapatra, A.; Parmar, G.; Zhu, J.-Y.; and Huang, J.-B. 2024. On the Content Bias in Fréchet Video Distance. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 7277–7288. Seattle, WA: IEEE.
- Gkountouras, J.; Lindemann, M.; Lippe, P.; Gavves, E.; and Titov, I. 2025. Language Agents Meet Causality – Bridging LLMs and Causal World Models. In *International Conference on Learning Representations*. Singapore: ICLR.
- Gu, X.; Wang, Y.-J.; Zhu, X.; Shi, C.; Guo, Y.; Liu, Y.; and Chen, J. 2024. Advancing Humanoid Locomotion: Mastering Challenging Terrains with Denoising World Model Learning. In *Proceedings of Robotics: Science and Systems*. Delft, Netherlands: RSS.
- Gupta, A.; Tian, S.; Zhang, Y.; Wu, J.; Martín-Martín, R.; and Fei-Fei, L. 2023. MaskViT: Masked Visual Pre-Training for Video Prediction. In *The Eleventh International Conference on Learning Representations*. ICLR.
- Hao, C.; Lu, W.; Xu, Y.; and Chen, Y. 2025. Neural Motion Simulator Pushing the Limit of World Models in Reinforcement Learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 27608–27617. Nashville, TN: IEEE.
- Hassan, M.; Stapf, S.; Rahimi, A.; Rezende, P. M. B.; Haghighi, Y.; Brüggemann, D.; Katircioglu, I.; Zhang, L.; Chen, X.; Saha, S.; Cannici, M.; Aljalbout, E.; Ye, B.; Wang, X.; Davtyan, A.; Salzmann, M.; Scaramuzza, D.; Pollefeys, M.; Favaro, P.; and Alahi, A. 2025. GEM: A Generalizable Ego-Vision Multimodal World Model for Fine-Grained Ego-Motion, Object Dynamics, and Scene Composition Control. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 22404–22415. Nashville, TN: IEEE.
- Haugh, M. B.; and Singal, R. 2023. Counterfactual Analysis in Dynamic Latent State Models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, 12647–12677. PMLR.
- Hu, H.; Mirchandani, S.; and Sadigh, D. 2024. Imitation Bootstrapped Reinforcement Learning. In *Proceedings of Robotics: Science and Systems*. Delft, Netherlands: RSS.
- Hutson, M.; Kauvar, I.; and Haber, N. 2024. Policy-shaped Prediction: Avoiding Distractions in Model-based Reinforcement Learning. In *Advances in Neural Information Processing Systems*, volume 37. Vancouver, Canada: NeurIPS.
- Jiang, H.; Huang, B.; Wu, R.; Li, Z.; Garg, S.; Nayyeri, H.; Wang, S.; and Li, Y. 2025. RoboEXP: Action-Conditioned Scene Graph via Interactive Exploration for Robotic Manipulation. In Agrawal, P.; Kroemer, O.; and Burgard, W., eds., *Proceedings of The 8th Conference on Robot Learning*, volume 270, 3027–3052. PMLR.
- Keleş, O.; Yılmaz, M. A.; Tekalp, A. M.; Korkmaz, C.; and Doğan, Z. 2021. On the Computation of PSNR for a Set of Images or Video. In *2021 Picture Coding Symposium*, 1–5. IEEE.
- Lancaster, P.; Hansen, N.; Rajeswaran, A.; and Kumar, V. 2024. MoDem-V2: Visuo-Motor World Models for Real-World Robot Manipulation. In *2024 IEEE International Conference on Robotics and Automation*, 7530–7537. IEEE.
- Li, J.; Wang, Q.; Wang, Y.; Jin, X.; Li, Y.; Zeng, W.; and Yang, X. 2025a. Open-World Reinforcement Learning over

- Long Short-Term Imagination. In *International Conference on Learning Representations*. Singapore: ICLR.
- Li, W.; Zhao, H.; Yu, Z.; Du, Y.; Zou, Q.; Hu, R.; and Xu, K. 2025b. PIN-WM: Learning Physics-INformed World Models for Non-Prehensile Manipulation. In *Proceedings of Robotics: Science and Systems*. Los Angeles, CA: RSS.
- Lin, H.; Ding, W.; Chen, J.; Shi, L.; Zhu, J.; Li, B.; and Zhao, D. 2024. BECAUSE: Bilinear Causal Representation for Generalizable Offline Model-based Reinforcement Learning. In *Advances in Neural Information Processing Systems*, volume 37. Vancouver, Canada: NeurIPS.
- Liu, H.; Zhang, Y.; Betala, V.; Zhang, E.; Liu, J.; Ding, C.; and Zhu, Y. 2025. Multi-Task Interactive Robot Fleet Learning with Visual World Models. In Agrawal, P.; Kroemer, O.; and Burgard, W., eds., *Proceedings of The 8th Conference on Robot Learning*, volume 270, 4286–4313. PMLR.
- Ma, M.; Ni, T.; Gehring, C.; D’Oro, P.; and Bacon, P.-L. 2024. Do Transformer World Models Give Better Policy Gradients? In *Proceedings of the 41st International Conference on Machine Learning*, volume 235, 33855–33879. PMLR.
- Maes, L.; Le Lidec, Q.; Scieur, D.; LeCun, Y.; and Balestriero, R. 2026. LeWorldModel: Stable End-to-End Joint-Embedding Predictive Architecture from Pixels. arXiv:2603.19312.
- Pan, Y.; and Bareinboim, E. 2024. Counterfactual Image Editing. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235, 39087–39101. PMLR.
- Perez, E.; Strub, F.; de Vries, H.; Dumoulin, V.; and Courville, A. 2018. FiLM: Visual Reasoning with a General Conditioning Layer. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32. AAAI.
- Ramasubramanian, S.; Freed, B.; Capone, A.; and Schneider, J. G. 2025. Improving Model-Based Reinforcement Learning by Converging to Flatter Minima. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.
- Richens, J.; and Everitt, T. 2024. Robust Agents Learn Causal World Models. In *International Conference on Learning Representations*. ICLR.
- Röder, F.; Benad, J.; Eppe, M.; and Banerjee, P. 2025. Dynamics-Aligned Latent Imagination in Contextual World Models for Zero-Shot Generalization. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.
- Shen, Y.; Maksutova, A.; Li, C.; and Unberath, M. 2025. Counterfactual World Models via Digital Twin-conditioned Video Diffusion. arXiv:2511.17481.
- Tian, S.; Finn, C.; and Wu, J. 2023. A Control-Centric Benchmark for Video Prediction. In *International Conference on Learning Representations*. ICLR.
- Vafa, K.; Chang, P. G.; Rambachan, A.; and Mullainathan, S. 2025. What Has a Foundation Model Found? Using Inductive Bias to Probe for World Models. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267, 60727–60747. PMLR.
- Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention Is All You Need. In *Advances in Neural Information Processing Systems*, volume 30. NeurIPS.
- Wang, S.; Tian, J.; Wang, L.; Liao, Z.; Li, J.; Dong, H.; Xia, K.; Zhou, S.; Tang, W.; and Gang, H. 2025. SAMPO: Scale-Wise Autoregression with Motion Prompt for Generative World Models. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.
- Wang, Z.; Bovik, A. C.; Sheikh, H. R.; and Simoncelli, E. P. 2004. Image Quality Assessment: From Error Visibility to Structural Similarity. *IEEE Transactions on Image Processing*, 13(4): 600–612.
- Wang, Z.; Zhang, L.; Wu, W.; Zhu, Y.; Zhao, D.; and Chen, C. 2024. Meta-DT: Offline Meta-RL as Conditional Sequence Modeling with World Model Disentanglement. In *Advances in Neural Information Processing Systems*, volume 37. NeurIPS.
- Wu, J.; Yin, S.; Feng, N.; He, X.; Li, D.; Hao, J.; and Long, M. 2024. iVideoGPT: Interactive VideoGPTs are Scalable World Models. In *Advances in Neural Information Processing Systems*, volume 37, 68082–68119. NeurIPS.
- Wu, J.; Yin, S.; Feng, N.; and Long, M. 2025. RLVR-World: Training World Models with Reinforcement Learning. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.
- Yamada, J.; Rigter, M.; Collins, J.; and Posner, I. 2024. TWIST: Teacher-Student World Model Distillation for Efficient Sim-to-Real Transfer. In *2024 IEEE International Conference on Robotics and Automation*, 9190–9196. IEEE.
- Yarats, D.; Fergus, R.; Lazaric, A.; and Pinto, L. 2022. Mastering Visual Continuous Control: Improved Data-Augmented Reinforcement Learning. In *International Conference on Learning Representations*. ICLR.
- Zhang, A.; Sikchi, H.; Biswas, J.; and Zhang, A. 2025a. CREStE: Scalable Mapless Navigation with Internet Scale Priors and Counterfactual Guidance. In *Proceedings of Robotics: Science and Systems*. Los Angeles, CA: RSS.
- Zhang, L.; Rao, A.; and Agrawala, M. 2023. Adding Conditional Control to Text-to-Image Diffusion Models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 3836–3847. IEEE.
- Zhang, R.; Isola, P.; Efros, A. A.; Shechtman, E.; and Wang, O. 2018. The Unreasonable Effectiveness of Deep Features as a Perceptual Metric. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 586–595. IEEE.
- Zhang, Y.; Li, X.; Ye, J.; Qiu, S.; Qu, D.; Li, X.; Zhang, C.; and Bai, C. 2025b. Revisiting Multi-Agent World Modeling from a Diffusion-Inspired Perspective. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.
- Zhou, S.; Du, Y.; Yang, Y.; Han, L.; Chen, P.; Yeung, D.-Y.; and Gan, C. 2025. Learning 3D Persistent Embodied World Models. In *Advances in Neural Information Processing Systems*, volume 38. NeurIPS.