

τ : Learning Touch-Augmented Vision-Language-Action Models from Future Visual Supervision

Ning Cheng¹, Jinan Xu¹, Wanlin Li², Yangzhi Chen¹, Jing Gao¹, Yiqun Wang¹, Kelan Peng¹, Wenjuan Han^{1*}

¹Beijing Jiaotong University

²Beijing Institute for General Artificial Intelligence

Abstract

Learning the informative tactile representation while effectively adapting it to pretrained Vision-Language-Action (VLA) models remains challenging at both the data and modeling levels. At the data level, limited task-specific demonstrations constrain representation quality, whereas large-scale pretraining incurs substantial costs. At the modeling level, existing methods either focus on instantaneous contact states or model temporal interaction dynamics using 6D wrench sequences, leaving high-dimensional tactile signals underexplored. To address these challenges, we present τ , a touch-augmented VLA framework that learns an action-conditioned spatiotemporal tactile representation from future visual supervision inspired by the Joint-Embedding Predictive Architecture (JEPA), and fuses it with vision-language features for action generation under limited data. This supervision operates in latent space and is used only during training, adding no deployment overhead. We also introduce TacAura, a dataset of synchronized vision, proprioception, and vision-based tactile signals across four representative contact-rich manipulation tasks. Experiments show that τ outperforms existing models and generalizes to unseen objects and scenes, delivering improved manipulation performance and robustness.

Introduction

Recent advances (Zitkovich et al. 2023; Kim et al. 2025; Black et al. 2024, 2025) in Vision-Language-Action (VLA) models have established a new paradigm for general-purpose robot manipulation by leveraging large-scale multimodal pretraining across diverse tasks and embodiments. Nevertheless, their reliance on vision as the primary modality limits their capability in contact-rich manipulation, where successful execution depends on capturing physical interaction dynamics. Tactile sensing naturally provides this information, such as contact states, force distribution, and deformation patterns, which are difficult to infer from visual observations alone.

Despite the promise of tactile sensing, it remains non-trivial to model the physical interaction dynamics captured by tactile signals and effectively integrate the resulting tactile representations with the vision-language features of pretrained VLA models for action generation. Existing methods primarily incorporate touch through specialized fusion architectures (Yu et al. 2025; Huang et al. 2025; Bi et al.

2026), synchronous alignment with visual semantics (Cheng et al. 2026) or force measurements (Huang et al. 2026), external tactile modules for action refinement (Zhang et al. 2026c; Liu et al. 2026), or large-scale tactile training (Yuan et al. 2026a; Niu et al. 2026). Despite this progress, these methods mainly focus on instantaneous contact states. Even when temporal tactile information is considered, it is typically modeled as 6D wrench sequences that capture global force-torque dynamics but lack dynamics-aware representation for high-dimensional vision-based tactile signals with fine-grained spatial contact patterns by whether modeling their own temporal evolution or cross-modal predictive supervision (Zhang et al. 2026b; Niu et al. 2026). Therefore, how to model the temporal interaction dynamics for such high-dimensional signals under limited data remains an open problem.

To address the problem, we introduce τ , a tactile-augmented VLA framework learns action-conditioned dynamics-aware tactile representations while preserving the capabilities of the pretrained VLA. Specifically, building upon the VLA backbone, τ introduces a tactile encoding and adaptation module that maps vision-based tactile signals into representations compatible with the semantic space of VLA. To encourage these representations to capture temporal interaction dynamics, we further introduce an auxiliary predictive branch for cross-modal self-supervision, inspired by Joint-Embedding Predictive Architecture (JEPA) (LeCun et al. 2022). Conditioned on the current tactile representation and the subsequent actions, a predictor forecasts the resulting change in future visual features. The target feature change is derived from the current and future observations encoded by the VLA vision encoder. A semantic similarity objective aligns the predicted feature change with this detached target, encouraging the tactile module to learn dynamics-aware representations that are predictive of future visual evolution under subsequent actions. Additionally, the predictive branch is used only during training, thereby improving representation quality without increasing inference complexity.

We evaluate τ with state-of-the-art visual-only VLA baselines and multimodal policies with tactile perception on multiple representative manipulation tasks requiring fine-grained physical interaction, including plug insertion, USB insertion, stamp press, and whiteboard erasing. The results show that τ consistently outperforms both vision-only VLA baselines

*Corresponding author. Email address: wjhan@bjtu.edu.cn.

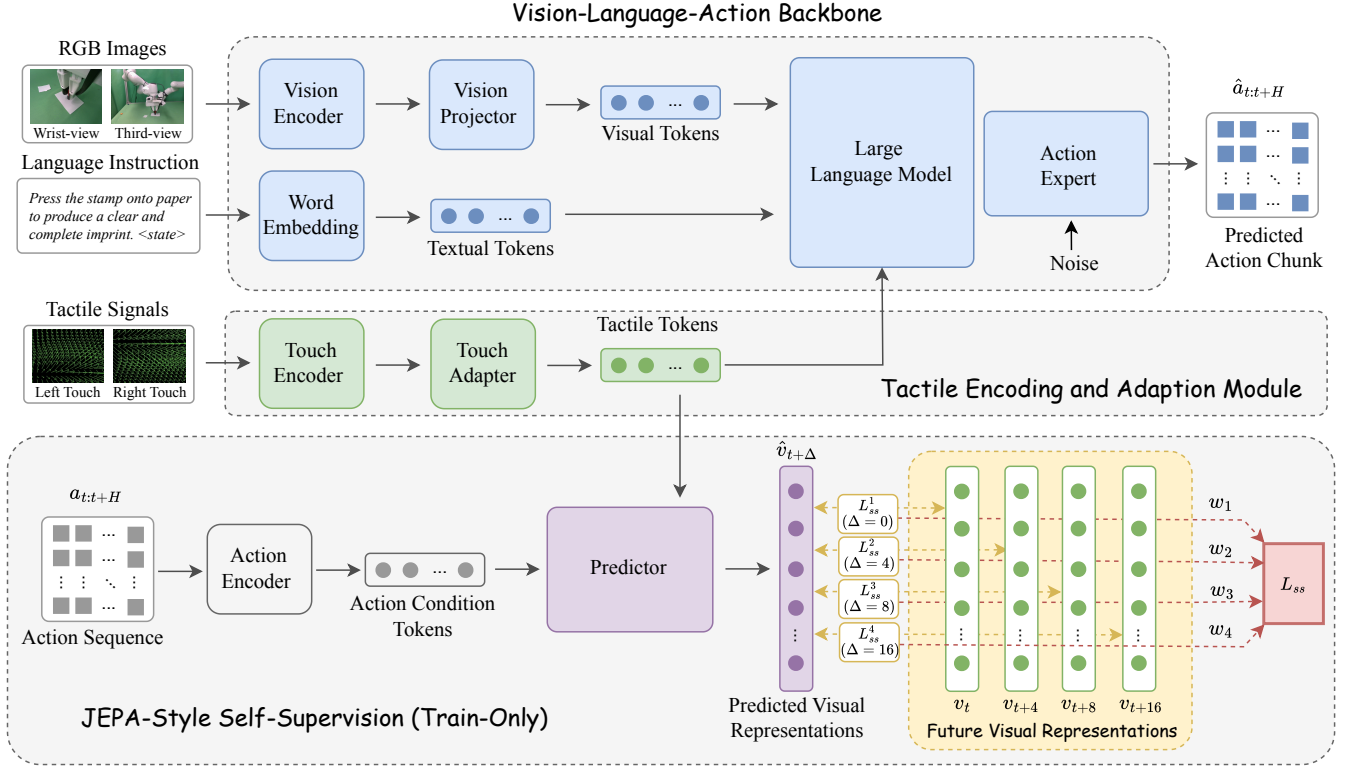


Figure 1: τ **Framework.** Multi-view visual observations, tactile signals, and language instruction are encoded into modality-specific tokens and fused by the large language model in the vision-language-action model for action chunk prediction. During training, an auxiliary JEPA-style self-supervised objective predicts future visual representations from action-conditioned latent features, enabling predictive multimodal representation learning without pixel-level reconstruction. Notably, the JEPA-style self-supervised learning is applied only during training and is removed during inference.

and existing tactile-aware multimodal policies. Evaluations on unseen objects and scene configurations further demonstrate the model’s generalizability. In summary, our main contributions are as follows:

- We propose an action-conditioned cross-modal predictive objective that learns dynamics-aware tactile representations by predicting future visual feature changes from current tactile observations and subsequent actions, without introducing additional inference overhead.
- We introduce τ , a **tactile-augmented** VLA framework that integrates the learned tactile representations into the semantic space of the pretrained VLA model for action generation while preserving its original capabilities.
- We conduct extensive real-robot experiments on four contact-rich tasks. The results show that τ surpasses VLA and VTLA baselines and generalizes to unseen objects and scene variations.

Related Work

Tactile-Aware Robotic Manipulation

Tactile-aware robotic manipulation aims to leverage tactile information for safe and reliable task execution. Some studies (Xue et al. 2025; Zhu, Huang, and Li 2026; Xu et al. 2026) build on lightweight policy models such as ACT (Zhao et al.

2023) and Diffusion Policy (Chi et al. 2023), which are efficient to train and deploy but prone to overfitting task-specific datasets. Others (Zhang et al. 2026a) employ VLMs for tactile semantic understanding, cross-modal alignment, and robot action prediction. Still others (Ye et al. 2025; Yuan et al. 2026b; Lou et al. 2026) adopt world models to predict future interaction dynamics, but incur substantial computational overhead. Additionally, several approaches advance tactile-aware VLA modeling by either integrating tactile sensing into pretrained VLA backbones—including π_0 (Black et al. 2024), $\pi_{0.5}$ (Black et al. 2025), and OpenVLA (Kim et al. 2025)—with manipulation priors learned from large-scale robotic data (Yu et al. 2025; Bi et al. 2026; Huang et al. 2025; Cheng et al. 2026; Zhang et al. 2026c; Liu et al. 2026), or developing VLA-style tactile foundation policies through large-scale multisensory pretraining (Liu et al. 2025; Yuan et al. 2026a; Niu et al. 2026). In this work, we investigate touch-augmented policy learning within the VLA paradigm under limited data and compute budgets by learning the tactile representation that capture instantaneous contact states and temporal interaction dynamics, and fusing it with visual-language features to better ground action generation.

Cross-Modal Self-Supervision

Cross-modal self-supervision leverages the natural correspondences among different sensory modalities to learn ef-

fective representations without manual annotations. Early work (Socher et al. 2013; Owens et al. 2016; Lu et al. 2019) mainly focuses on bimodal or trimodal representation learning across vision, language, and audio. Building on these efforts, subsequent studies extend this approach to visual-tactile learning by leveraging the synchronization and temporal correlations between visual and tactile signals. Zambelli *et al.* (Zambelli et al. 2021) explore several cross-modal self-supervised objectives for visual-tactile learning, showing that visual signals can provide effective supervision for tactile representations. Yang *et al.* (Yang et al. 2022) learn tactile representations for the Gelsight sensor with visuo-tactile contrastive multiview coding (Tian, Krishnan, and Isola 2020). Kerr *et al.* (Kerr et al. 2022), Yang *et al.* (Yang et al. 2024), Cheng *et al.* (Cheng et al. 2025) propose various contrastive pretraining methods. Cao *et al.* (Cao et al. 2023) apply masked autoencoders to learn tactile representations directly from tactile inputs. Feng *et al.* (Feng et al. 2025, 2026) exploit masked autoencoders and contrastive learning. Unlike these methods, we introduce JEPA-style self-supervision into touch-augmented VLA policy learning, leveraging correspondences between conditioned actions and future visual changes to learn interaction-aware tactile representations, thereby enabling the policy to more effectively integrate tactile cues with vision-language features and generate contact-aware actions.

The τ Model

In this section, we detail the τ 's model architecture, training strategy, and training dataset.

Model Architecture

As illustrated in Figure 1, τ consists of three key components: (1) a foundational Vision-Language-Action (VLA) backbone for multimodal perception and action generation, (2) a tactile encoding and adaptation module that bridges tactile signals with the latent space of the pretrained VLA model, and (3) an auxiliary JEPA-style predictive self-supervised branch that facilitates tactile representation learning through future visual latent prediction.

Foundational Vision-Language-Action Backbone. τ is built upon a pretrained VLA model $\pi_{0.5}$, which serves as the foundation for multimodal policy learning. At each time step t , the VLA model receives an observation $o_t = \{\mathcal{I}_t, \tilde{\ell}_t\}$, where $\mathcal{I}_t = \{\mathcal{I}_t^1, \dots, \mathcal{I}_t^N\}$ denotes the set of N RGB images, and $\tilde{\ell}_t = [\ell_t; q_t]$ represents the language instruction formed by concatenating the task description ℓ_t with the robot's proprioceptive state q_t . The RGB images $\mathcal{I}_t$ are encoded by a vision encoder and projected into the language embedding space as visual tokens, while $\tilde{\ell}_t$ is tokenized through a word embedding layer. These multimodal tokens are fused by the large language model, and an action expert predicts a future action chunk $\hat{a}_{t:t+H} = [\hat{a}_t, \hat{a}_{t+1}, \dots, \hat{a}_{t+H-1}]$ from noise via conditional flow matching.

Tactile Encoding and Adaptation Module. To endow τ with tactile perception capability, we introduce a tactile encoding and adaptation module, which transforms raw tactile

signals into latent representations compatible with the multimodal embedding space of the VLA model. Specifically, the observation at time step t is extended from $o_t = \{\mathcal{I}_t, \tilde{\ell}_t\}$ to $\tilde{o}_t = \{\mathcal{I}_t, \tilde{\ell}_t, \mathcal{T}_t\}$, where $\mathcal{T}_t = \{\mathcal{T}_t^L, \mathcal{T}_t^R\}$ denotes the tactile signals acquired from the left and right tactile sensors mounted on the robot gripper. Similar to the vision encoder that transforms RGB images into visual tokens, the tactile signals $\mathcal{T}_t$ are first processed by a touch encoder E_{tou} to extract tactile features:

$$z_t^{\text{touch}} = E_{\text{tou}}(\mathcal{T}_t), \quad (1)$$

where z_t^{touch} encodes normal and shear deformations.

Since the pretrained VLA backbone operates in the multimodal embedding space learned from visual and textual data, the extracted tactile features cannot be directly integrated with the existing token representations. Therefore, we introduce a learnable touch adapter A_{tou} to project the tactile representations into the same latent space as the pretrained VLA model:

$$\mathcal{Z}_t^{\text{touch}} = A_{\text{tou}}(z_t^{\text{touch}}), \quad (2)$$

where $\mathcal{Z}_t^{\text{touch}}$ is the LLM-aligned tactile token sequence.

Subsequently, the adapted tactile tokens are concatenated with the visual tokens and textual tokens form a unified token-level semantic representation $\mathcal{Z}_t = [\mathcal{Z}_t^{\text{vision}}; \mathcal{Z}_t^{\text{language}}; \mathcal{Z}_t^{\text{touch}}]$, where $\mathcal{Z}_t^{\text{vision}}$, $\mathcal{Z}_t^{\text{language}}$, and $\mathcal{Z}_t^{\text{touch}}$ denote the visual, textual, and tactile token sequences, respectively. The unified representation is processed by the large language model and then is seen by the action expert to help predict the future action chunk $\hat{a}_{t:t+H}$. In parallel, the adapted tactile tokens are fed into the auxiliary JEPA-style predictive branch for self-supervised tactile representation learning.

JEPA-style Predictive Self-Supervised Branch. Besides policy learning, we present an auxiliary JEPA-style predictive self-supervised branch to encourage tactile representations to encode how the visually observed interaction state evolves under subsequent actions. Specifically, the adapted tactile tokens $\mathcal{Z}_t^{\text{touch}}$ from the tactile encoding and adaptation module, together with the corresponding action tokens $\mathcal{Z}_{t:t+H}^{\text{action}}$ are concatenated and fed into a predictor network $P(\cdot)$ to predict the future visual latent representations:

$$\{\hat{z}_{t+\Delta_k}^{\text{vision}}\}_{k=1}^K = P(\mathcal{Z}_t^{\text{touch}}, \mathcal{Z}_{t:t+H}^{\text{action}}), \quad (3)$$

where Δ_k denotes a set of predefined temporal offsets relative to the current time step t . The predictor $P(\cdot)$ adopts a lightweight multilayer perceptron (MLP) architecture with three fully connected layers and GELU activations. The action tokens $\mathcal{Z}_{t:t+H}^{\text{action}}$ are obtained by first vectorizing the action sequence $a_{t:t+H}$ and encoding it with an action encoder E_{act} , implemented as a MLP with two linear layers:

$$\mathcal{Z}_{t:t+H}^{\text{action}} = E_{\text{act}}(\text{vec}(a_{t:t+H})), \quad (4)$$

The prediction target is the latent representation of the future visual observation, which is extracted by the vision encoder E_{vis} of the pretrained VLA backbone:

$$\{\hat{z}_{t+\Delta_k}^{\text{vision}}\}_{k=1}^K = E_{\text{vis}}(\{\mathcal{I}_{t+\Delta_k}\}_{k=1}^K), \quad (5)$$

where $\mathcal{I}_{t+\Delta_k}$ denotes a set of the future RGB images at the temporal offset Δ_k .

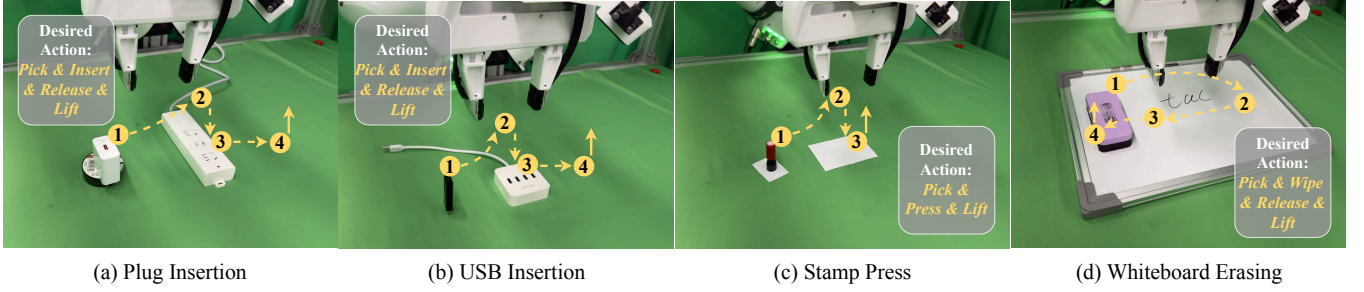


Figure 2: Contact-rich task suite of TacAura.

Training Strategy

The proposed τ is trained end-to-end by jointly optimizing a supervised imitation learning objective and a predictive self-supervised objective. The former enables the pretrained VLA policy to incorporate tactile information for action generation, while the latter provides complementary supervision for learning more informative tactile representations.

Action Policy Adaptation for VTLa. To enable the pretrained VLA policy to leverage tactile information for action generation, we adapt it through supervised imitation learning on expert demonstrations. From each demonstration trajectory consisting of vision-language-touch observations and expert actions $\{(\tilde{o}_t, a_t)\}_{t=1}^T$, we construct each training sample by pairing the observation at time step t with the subsequent expert action sequences $a_{t:t+H} = [a_t, a_{t+1}, \dots, a_{t+H-1}]$ as the supervision target. Following the conditional flow-matching formulation for action modeling (Black et al. 2024, 2025), a random Gaussian noise $\epsilon \sim \mathcal{N}(0, I)$ is sampled and the noisy actions are constructed as $a_{t:t+H}^s = s \cdot a_{t:t+H} + (1-s) \cdot \epsilon$, where $s \in [0, 1]$ represents the continuous timestep along the flow trajectory. The denoising directions along the flow trajectory are obtained as the derivative of the noisy actions $a_{t:t+H}^s$ with respect to the flow timestep s :

$$u(a_{t:t+H}^s | a_{t:t+H}) = \frac{\partial a_{t:t+H}^s}{\partial s} = a_{t:t+H} - \epsilon. \quad (6)$$

The action expert learns a denoising vector field $v_\theta(a_{t:t+H}^s, \tilde{o}_t)$ to match this target direction $u(a_{t:t+H}^s | a_{t:t+H})$, resulting in the following policy objective:

$$\mathcal{L}_{\text{IL}} = \mathbb{E} \left[\|v_\theta(a_{t:t+H}^s, \tilde{o}_t) - u(a_{t:t+H}^s | a_{t:t+H})\|_2^2 \right]. \quad (7)$$

where the expectation is taken over the expert action distribution $p(a_{t:t+H} | \tilde{o}_t)$ and the conditional flow path $q(a_{t:t+H}^s | a_{t:t+H})$.

Joint Fine-tuning with Predictive Self-Supervision. To encourage tactile representations to capture future interaction dynamics rather than static information, instead of directly predicting absolute visual features, the auxiliary objective predicts future visual feature changes relative to the current observation. The predicted and target feature variations are defined as:

$$\Delta \hat{z}_{t+\Delta_k}^{\text{vision}} = \hat{z}_{t+\Delta_k}^{\text{vision}} - z_t^{\text{vision}}, \Delta z_{t+\Delta_k}^{\text{vision}} = z_{t+\Delta_k}^{\text{vision}} - z_t^{\text{vision}}. \quad (8)$$

To emphasize future task processes with significant contact transitions, each future prediction is weighted according to the tactile variation magnitude:

$$w_{t+\Delta_k} = \text{clip} \left(\left\| z_{t+\Delta_k}^{(\text{touch})} - z_t^{(\text{touch})} \right\|_2, w_{\min}, w_{\max} \right). \quad (9)$$

where $w_{\min}$ and $w_{\max}$ are the lower and upper clipping bounds, respectively, used to prevent the predictive objective from being dominated by either negligible or abnormal tactile variations. Based on the tactile-derived weights $\{w_{t+\Delta_k}\}_{k=1}^K$, the predictive self-supervised objective is formulated as a weighted cosine alignment loss:

$$\mathcal{L}_{\text{SSL}} = \frac{\sum_{k=1}^K w_{t+\Delta_k} (1 - \cos(\Delta \hat{z}_{t+\Delta_k}^{\text{vision}}, \Delta z_{t+\Delta_k}^{\text{vision}}))}{\sum_{k=1}^K w_{t+\Delta_k} + \delta}. \quad (10)$$

Here, δ is a small positive constant for numerical stability. The final training objective jointly optimizes the imitation learning objective and the predictive self-supervised objective:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{IL}} + \lambda \mathcal{L}_{\text{SSL}}. \quad (11)$$

where λ balances the contribution of tactile representation learning.

TacAura Dataset

A central obstacle to VTLa learning lies not only in the model but also in the data infrastructure. Existing VLA data pipelines are organized around the vision-language-action triplet and offer no principled way to acquire and synchronize an additional tactile modality. Instead of building a collection system from scratch, we develop a lightweight data infrastructure that retrofits a standard VLA data stack into a VTLa one. Our guiding principle is minimal intrusion: touch is introduced as a temporally aligned modality that slots into the trajectory format already expected by pretrained VLA backbones, so that touch-augmented policies can be trained without re-engineering the data pipeline. The infrastructure comprises three components: teleoperation tools, multi-stream synchronization and conversion utilities, and the resulting TacAura dataset, all of which will be open-sourced.

Hardware and Teleoperation. The data collection is performed using a Franka Research 3 arm equipped with a Franka Hand end-effector, where the gripper fingers are replaced by DM-Tac WS, a vision-based tactile sensing system that provides high-resolution tactile feedback (320x240, ~ 40

FPS). The sensors are mounted onto the hand using a custom 3D-printed adapter. Visual observations are captured from three RGB-D cameras: two static third-person views (RealSense D435i at 640x480, 15 FPS) and one wrist-mounted camera (RealSense D405 at 640x480, 15 FPS) providing ego-centric perspectives. Human demonstrations are collected via human teleoperation using an exoskeleton arm kinematically isomorphic to the Franka Research 3 arm, mapping to robot joint position control.

Lightweight Tactile Integration and Alignment. The core of the infrastructure is a lightweight synchronization-and-conversion layer that turns heterogeneous, asynchronous device streams into VLA-compatible VTLA trajectories. All streams, including multi-view RGB-D, dual-finger tactile maps, robot proprioception, and actions, are recorded concurrently, but because devices differ in startup latency and sampling rate, the raw recordings cannot be consumed directly for policy learning. We therefore (i) timestamp every stream at its source, (ii) temporally align all modalities to a common clock by nearest-timestamp association, and (iii) resample each aligned trajectory to a uniform 10 Hz control frequency. We annotate each trajectory with the corresponding task description, as detailed in the appendix. The aligned tactile stream is then packed into the same episodic trajectory schema (xxx) used by the pretrained VLA backbone as an additional per-step field. As a result, touch becomes a drop-in modality. The same converted trajectories can feed either a vision-only VLA or our VTLA policy, which both enables strictly controlled baseline comparisons and lets the community reuse the pipeline for other tactile sensors.

Task Suite and Dataset. Using this infrastructure, we curate TacAura, a synchronized, instruction-annotated VTLA dataset for contact-rich manipulation. TacAura spans four tasks: plug insertion, USB insertion, stamp pressing and whiteboard erasing. Every trajectory is annotated with a natural-language task instruction. In total, we collect 100 high-quality demonstrations with randomized object poses for each of the four tasks (400 trajectories in total), yielding a synchronized VTLA corpus that supports both touch-augmented policy learning and future research on tactile representation learning.

Experiments

We train our touch-augmented VLA models, τ , on TacAura dataset, and evaluate it in the real world across four tasks from TacAura: plug insertion, USB insertion, stamp press, and whiteboard erasing.

Experimental Setups

Implementation Details. We train τ with 100 expert demonstrations per task using a batch size of 32, an action horizon of 32, and a cosine learning-rate schedule with 10,000 warmup steps and a peak learning rate of $5e-5$. The model is trained for 30,000 steps on two NVIDIA A800 80GB GPUs, with checkpoints saved every 2,000 steps.

Comparative Models We compare τ against recent representative open-source approaches, including the general-purpose VLA models π_0 (Black et al. 2024) and $\pi_{0.5}$ (Black et al. 2025), as well as methods designed for contact-rich manipulation: ForceVLA[†] (Yu et al. 2025), ForceFlow[†] (Zhang et al. 2026b), and T-Rex[†] (Niu et al. 2026). ForceVLA and ForceFlow use force-represented tactile signals. To prevent their performance from being affected by the fact that DM-Tac WS provides visuo-tactile signals, we use the tactile encoder in our τ to extract tactile features, thereby obtaining tactile feature inputs equivalent to those expected by the original ForceVLA and ForceFlow. It is worth noting that, since our goal is to efficiently fine-tune under limited resources, we do not consider world models that incorporate tactile information here.

Evaluation and Metrics Real-world evaluation is conducted on four tasks: plug insertion, USB insertion, stamp press, and whiteboard erasing. All tests are performed on a workstation equipped with a single NVIDIA RTX 4090 GPU. Each model is evaluated over 20 trials under moderate randomization. The evaluation metric is the success rate at each task stage. For plug insertion and USB insertion, each task is divided into three stages: grasping (Grasp), aligning with the port and initiating insertion (Align), and fully inserting the object (Insertion). For stamp press and whiteboard erasing, each task is also divided into three stages: picking up the object (Pick), establishing effective contact (Contact), and producing a complete stamp mark (Stamp) / cleanly erasing the target area (Wipe).

Main Results

Table 1 compares the success rates of different models across four contact-rich manipulation tasks. Among the baselines, ForceVLA[†] achieves the highest average full-task success rate of 30.00%, followed by $\pi_{0.5}$ (28.75%), ForceFlow[†] (23.75%), and π_0 (20.00%). In comparison, all three variants of the τ framework achieve substantially higher average success rates. Specifically, τ -Wrist^{Sup} obtains the best overall performance with an average success rate of 71.25%, outperforming the strongest baseline by 41.25 percentage points. τ -Front^{Sup} achieves a comparable average of 68.75%, whereas τ -DualView^{Sup} reaches 57.50%. The relatively small 2.50-point difference between the wrist-view and front-view variants suggests that their overall performance is broadly comparable, although their advantages differ across tasks.

A stage-wise examination shows that the primary limitation of the baseline models lies in final task completion rather than initial object acquisition or contact establishment. Most methods achieve high grasping, picking, or contact success rates, but the baselines often exhibit substantial degradation at the final execution stage. For example, ForceVLA[†] achieves an 85% alignment success rate on Plug Insertion but fails to complete any insertion, while ForceFlow[†] reaches a 95% contact success rate on Whiteboard Erasing but completes the wiping operation in only 50% of the trials. In contrast, the τ variants retain substantially higher success rates from the intermediate stage to final completion. The best τ

Model / Task	Plug Insertion	USB Insertion	Stamp Press	Whiteboard Erasing	Avg.
	Grasp / Align / Insertion	Grasp / Align / Insertion	Pick / Contact / Stamp	Pick / Contact / Wipe	
π_0 (Black et al. 2024)	100 / 25 / 0	100 / 25 / 15	100 / 65 / 30	100 / 100 / 35	20.00
$\pi_{0.5}$ (Black et al. 2025)	100 / 50 / 20	100 / 35 / 20	100 / 70 / 35	100 / 100 / 40	28.75
ForceVLA [†] (Yu et al. 2025)	100 / 85 / 0	100 / 45 / 5	100 / 100 / 70	100 / 100 / 45	30.00
ForceFlow [†] (Zhang et al. 2026b)	90 / 40 / 0	85 / 30 / 0	90 / 60 / 45	95 / 95 / 50	23.75
τ -Wrist ^{Sup.}	100 / 75 / <u>60</u>	100 / 50 / <u>40</u>	100 / 100 / 90	100 / 100 / 95	71.25
τ -Front ^{Sup.}	100 / 80 / 65	100 / 70 / 50	100 / 100 / <u>75</u>	100 / 100 / 85	<u>68.75</u>
τ -DualView ^{Sup.}	100 / 70 / 55	100 / 50 / 35	100 / 100 / 65	100 / 100 / 75	57.50

Table 1: Success rates (%) of different models on four contact-rich tasks. The best results are in **bold**, and the suboptimal ones are underlined. **Avg.** denotes the average of the full success rates across all four tasks. [†] marks models adapted for our tactile sensing setup while preserving the original framework. τ -Wrist^{Sup.}, τ -Front^{Sup.}, and τ -DualView^{Sup.} are three variants of the τ framework that use wrist-view, front-view, and dual-view representations, respectively, as supervisory signals for SSL.

variant achieves full-task success rates of 65%, 50%, 90%, and 95% on Plug Insertion, USB Insertion, Stamp Press, and Whiteboard Erasing, respectively. These results exceed the strongest baseline on the corresponding tasks by 45, 30, 20, and 45 percentage points, indicating that the proposed self-supervised representations are particularly effective in improving fine-grained contact reasoning and execution.

The comparison among the three τ variants reveals a clear task-dependent effect of the supervisory view. τ -Front^{Sup.} performs best on the two insertion tasks, achieving 65% and 50% full-task success on Plug and USB Insertion, respectively. Its higher alignment success rates on these tasks suggest that front-view representations may provide more informative spatial cues for target-hole localization. By contrast, τ -Wrist^{Sup.} performs best on Stamp Press and Whiteboard Erasing, reaching full-task success rates of 90% and 95%, respectively. This trend is consistent with wrist-view representations providing more useful local information for tasks that impose fewer geometric constraints and exhibit minimal target occlusion. Although τ -DualView^{Sup.} still considerably outperforms the baselines in terms of average success, it consistently underperforms the best single-view variant and even falls slightly below ForceVLA[†] on Stamp Press. This result indicates that combining multiple views does not necessarily produce complementary supervisory signals and may require a more effective view-fusion mechanism.

Overall, the results demonstrate that the τ framework provides more robust performance than the baseline models, particularly during the final contact-rich execution stage. They further show that the optimal supervisory representation depends on the task: front-view supervision is more effective for alignment and insertion, whereas wrist-view supervision is better suited to tasks with clear local contact. Meanwhile, the lower performance of the dual-view variant suggests that additional views are beneficial only when their information can be effectively integrated. Furthermore, we visualize the qualitative results of policy execution, as shown in Figure 3.

Generalization Analysis

To evaluate the zero-shot generalization capability of τ , we train the models using the seen USB drive and whiteboard eraser and evaluate them on two unseen object instances and two unseen distractor sets, as shown in Figure 4. The unseen

objects differ from the training objects in visual appearance and surface texture, while the distractor sets introduce additional objects and visual clutter into the workspace. These settings assess object-level and scene-level generalization, respectively.

Object Generalization. As shown in Figure 5, the success rate of USB insertion decreases from 40% on the seen object to 25% and 35% on the two unseen USB drives, yielding an average object-generalization success rate of 30%. The different performance across the two unseen instances suggests that USB insertion remains sensitive to variations in object geometry and contact configuration. Nevertheless, the model retains meaningful zero-shot insertion capability despite being trained on a different USB instance. Whiteboard Erasing exhibits substantially stronger object generalization: the success rate decreases only slightly from 95% on the seen eraser to 90% on both unseen erasers. This limited performance gap indicates that the learned representation transfers effectively across erasers with different appearances and textures.

Scene Generalization. The results reveal a clear task-dependent difference in scene generalization. For USB Insertion, the success rate decreases from 40% in the in-distribution setting to 20% and 25% under the two unseen distractor configurations, respectively. This corresponds to an average success rate of 22.5%, representing a 17.5-percentage-point drop from the in-distribution result. The degradation is also larger than that observed under unseen-object variations, indicating that visual clutter poses a substantial challenge to target localization and precise alignment in USB insertion. In contrast, Whiteboard Erasing maintains a 95% success rate under both distractor configurations, showing no degradation relative to the in-distribution setting. These results suggest that scene generalization is strongly task dependent: the model remains robust to distractors in whiteboard erasing, whereas precision insertion is more vulnerable to changes in scene composition.

Cross-Task Discussion. The generalization behavior differs considerably between the two tasks. USB Insertion requires accurate target localization, precise geometric alignment, and fine-grained contact adjustment. Consequently, variations in USB geometry and contact configuration, as

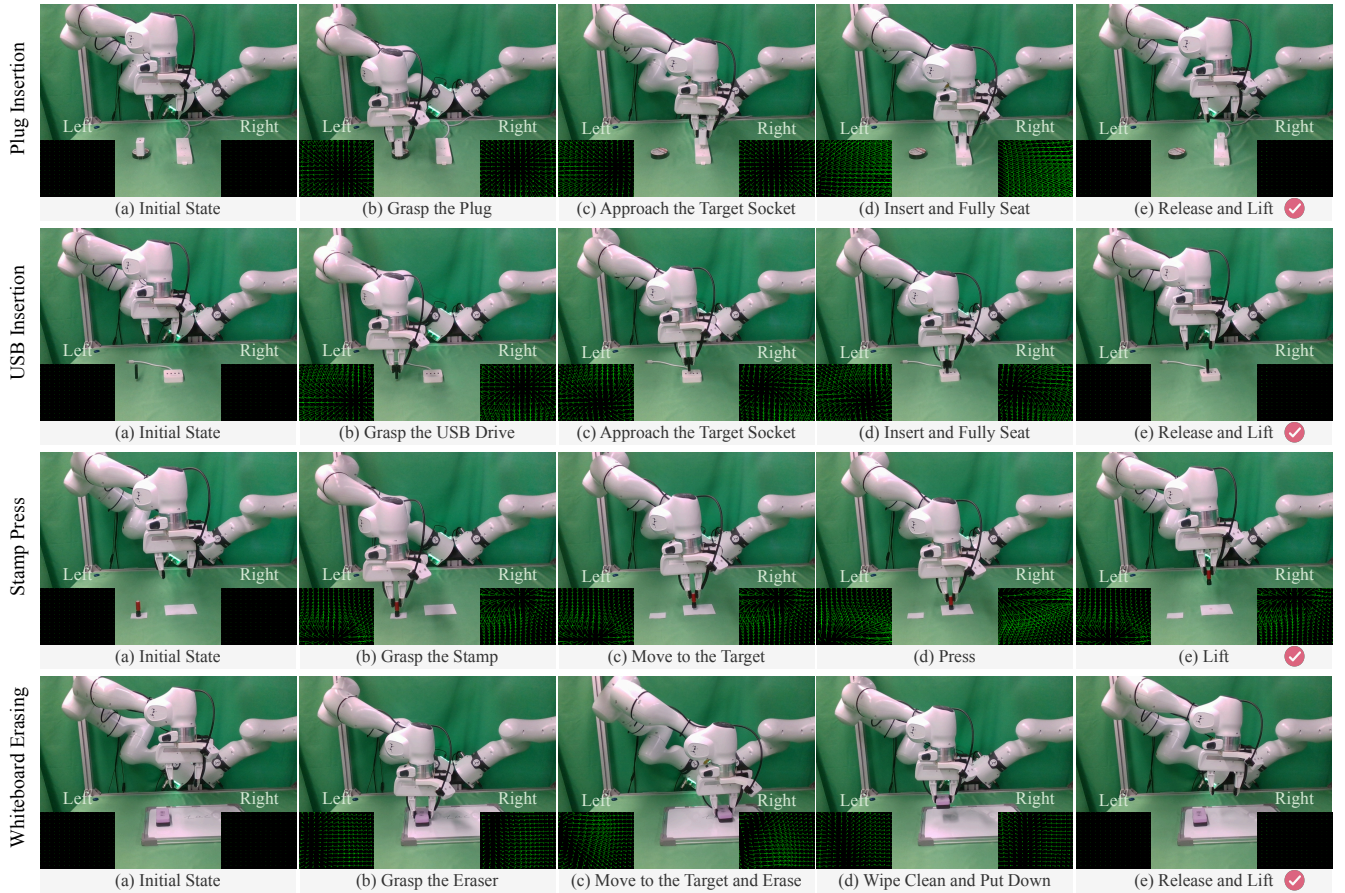


Figure 3: Qualitative results of policy execution.

Model / Task	Plug Insertion	USB Insertion	Stamp Press	Whiteboard Erasing	Avg.
	Grasp / Align / Insertion	Grasp / Align / Insertion	Pick / Contact / Wipe	Pick / Contact / Wipe	
τ (Ours)	100 / 75 / 60	100 / 50 / 40	100 / 100 / 90	100 / 100 / 95	71.25
w/o Action Seq.	100 / 75 / 55	100 / 45 / 30	100 / 100 / 75	100 / 100 / 75	58.75
w/o SSL	100 / 75 / 50	100 / 50 / 25	100 / 100 / 70	100 / 100 / 60	51.25
w/o Tactile Module	100 / 50 / 20	100 / 35 / 20	100 / 70 / 35	100 / 100 / 40	28.75

Table 2: Ablation study on all four tasks.

well as visual interference from scene distractors, can substantially affect task execution. By contrast, Whiteboard Erasing involves a larger contact region and provides continuous tactile feedback throughout the wiping process, making it less sensitive to changes in object appearance and scene composition. Overall, τ exhibits strong object- and scene-level generalization on Whiteboard Erasing but more limited transfer on USB Insertion, particularly in cluttered environments. This contrast suggests that improving distractor-robust visual grounding and adapting to variations in object geometry and contact properties are important directions for enhancing generalization in precision-intensive manipulation tasks.

Ablation Study

To investigate the impact of key components in τ , we conduct ablation studies by removing the action sequence conditioning, predictive self-supervised learning, and tactile encoding and adaptation module, respectively. The results are shown in Table 2.

Impact of Action Sequence Conditioning. Removing action sequence conditioning reduces the average full-task success rate from 71.25% to 58.75%, corresponding to a decrease of 12.50 percentage points. Specifically, the full-task success rates on Plug Insertion, USB Insertion, Stamp Press, and Whiteboard Erasing decrease by 5, 10, 15, and 20 percentage points, respectively. In contrast, the success rates at the initial grasping, picking, and contact stages remain largely

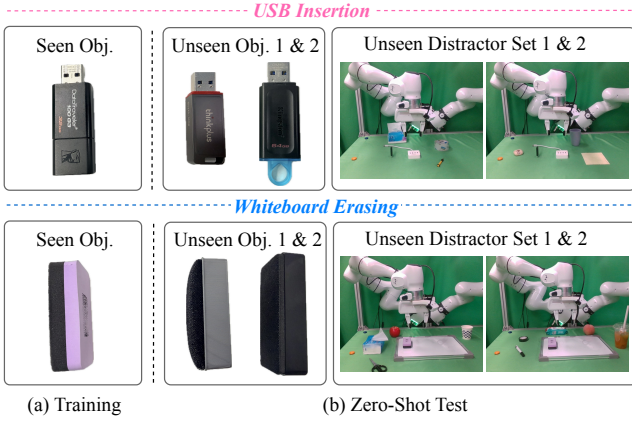


Figure 4: **Training and zero-shot testing settings for USB insertion and whiteboard erasing tasks.** The models are trained on seen objects and tested on unseen objects and distractor sets to assess their generalization to novel objects and complex scenes.

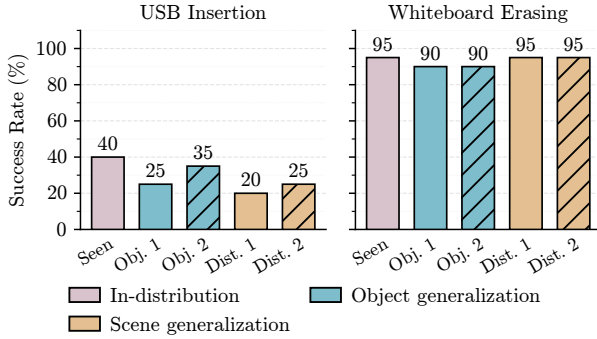


Figure 5: Success rates for USB insertion and whiteboard erasing under in-distribution, object-generalization, and scene-generalization settings.

unchanged. This result indicates that action sequence conditioning primarily contributes to final task execution by capturing temporal dependencies among consecutive actions. Its larger impact on Stamp Press and Whiteboard Erasing further suggests that coherent action context is particularly important for tasks that rely more heavily on precise force control.

Impact of Predictive Self-Supervised Learning. Removing predictive self-supervised learning decreases the average full-task success rate from 71.25% to 51.25%, resulting in a 20.00-point performance drop. The full-task success rates decrease by 10, 15, 20, and 35 percentage points on Plug Insertion, USB Insertion, Stamp Press, and Whiteboard Erasing, respectively, while the intermediate alignment and contact success rates remain unchanged. The particularly large degradation on Whiteboard Erasing suggests that the predictive objective helps the model capture the temporal evolution of tactile observations during sustained contact. Over-

all, these results demonstrate that predictive self-supervised learning improves the quality of the learned representations and enables more reliable contact-aware execution.

Impact of Tactile Encoding and Adaptation Module. Removing the tactile encoding and adaptation module leads to the largest performance degradation, reducing the average full-task success rate from 71.25% to 28.75%, a decrease of 42.50 percentage points. The full-task success rates on the four tasks drop by 40, 20, 55, and 55 percentage points, respectively. Unlike the other two ablations, removing this module also substantially reduces intermediate-stage performance, including alignment on the insertion tasks and contact establishment on Stamp Press. Meanwhile, the initial grasping and picking success rates remain at 100%, indicating that coarse object interaction can still be achieved without tactile adaptation, whereas precise contact reasoning and execution cannot. These results identify the tactile encoding and adaptation module as the most critical component of the framework, followed by predictive self-supervised learning and action sequence conditioning. Nevertheless, these performance drops reflect the relative importance of each component and should not be interpreted as additive, since the three components may interact with one another.

Conclusion

In this paper, we presented τ , a tactile-augmented vision-language-action framework that extends pretrained VLA models with tactile perception for contact-rich robotic manipulation. By introducing a tactile encoding and adaptation module, τ effectively aligns tactile representations with the latent embedding space of the pretrained VLA backbone, enabling efficient multimodal fusion while preserving the visual-language reasoning capability learned from large-scale pretraining. Furthermore, we proposed an auxiliary JEPA-style predictive self-supervised branch that learns temporally consistent multimodal representations through latent future prediction. The predictive objective serves as an effective regularizer during training and is removed during inference, resulting in improved representation quality without additional deployment cost. Extensive experiments demonstrate that the proposed framework consistently improves manipulation performance, robustness, and generalization across representative contact-rich tasks. In future work, we plan to investigate more scalable multimodal pre-training strategies using large-scale vision-tactile datasets, explore more effective cross-modal fusion mechanisms for heterogeneous sensory inputs, and extend τ to long-horizon and multi-stage manipulation tasks in more complex real-world environments.

References

- Bi, J.; Ma, K. Y.; Hao, C.; Zheng, M. S.; and Soh, H. 2026. VLA-Touch: Enhancing Vision-Language-Action Model with Dual-Level Tactile Feedback. *IEEE Robotics and Automation Letters*.
- Black, K.; Brown, N.; Darpinian, J.; Dhabalia, K.; Driess, D.; Esmail, A.; Equi, M. R.; Finn, C.; Fusai, N.; Galliker, M. Y.; et al. 2025. $\pi_{0.5}$: a Vision-Language-Action Model with Open-World Generalization. In *9th Annual Conference on Robot Learning*.
- Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; et al. 2024. π_0 : A Vision-Language-Action Flow Model for General Robot Control. *arXiv preprint arXiv:2410.24164*.
- Cao, G.; Jiang, J.; Bollegala, D.; and Luo, S. 2023. Learn from incomplete tactile data: Tactile representation learning with masked autoencoders. In *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 10800–10805. IEEE.
- Cheng, N.; Xu, J.; Guan, C.; Gao, J.; Wang, W.; Li, Y.; Meng, F.; Zhou, J.; Fang, B.; and Han, W. 2025. Touch100k: A large-scale touch-language-vision dataset for touch-centric multimodal representation. *Information Fusion*, 124: 103305.
- Cheng, Z.; Zhang, Y.; Tang, A.; Wang, K.; Zhang, W.; Li, H.; Zhang, H.; and Song, L. 2026. OmniVTLA: Vision-Tactile-Language-Action Models With Semantic-Aligned Tactile Sensing. *IEEE Robotics and Automation Letters*.
- Chi, C.; Feng, S.; Du, Y.; Xu, Z.; Cousineau, E.; Burchfiel, B.; and Song, S. 2023. Diffusion Policy: Visuomotor Policy Learning via Action Diffusion. *Robotics: Science and Systems XIX*.
- Feng, R.; Hu, J.; Xia, W.; Shen, A.; Sun, Y.; Fang, B.; Hu, D.; et al. 2025. AnyTouch: Learning Unified Static-Dynamic Representation across Multiple Visuo-tactile Sensors. In *The Thirteenth International Conference on Learning Representations*.
- Feng, R.; Zhou, Y.; Mei, S.; Zhou, D.; Wang, P.; Cui, S.; Fang, B.; Yao, G.; and Hu, D. 2026. AnyTouch 2: General Optical Tactile Representation Learning For Dynamic Tactile Perception. In *The Fourteenth International Conference on Learning Representations*.
- Huang, J.; Wang, S.; Lin, F.; Hu, Y.; Wen, C.; and Gao, Y. 2025. Tactile-VLA: unlocking vision-language-action model’s physical knowledge for tactile generalization. *arXiv preprint arXiv:2507.09160*.
- Huang, Y.; Lin, P.; Li, W.; Li, D.; Li, J.; Jiang, J.; Xiao, C.; and Jiao, Z. 2026. Tactile-Force Alignment in Vision-Language-Action Models for Force-aware Manipulation. *arXiv preprint arXiv:2601.20321*.
- Kerr, J.; Huang, H.; Wilcox, A.; Hoque, R.; Ichnowski, J.; Calandra, R.; and Goldberg, K. 2022. Self-supervised visuo-tactile pretraining to locate and follow garment features. *arXiv preprint arXiv:2209.13042*.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E. P.; Sanketi, P. R.; Vuong, Q.; et al. 2025. OpenVLA: An Open-Source Vision-Language-Action Model. In *Conference on Robot Learning*, 2679–2713. PMLR.
- LeCun, Y.; et al. 2022. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review*, 62(1): 1–62.
- Liu, S.; Jia, Y.; Yan, Y.; Liu, J.; Zhang, X.; Feng, Q.; Guo, Y.; Zhou, S.; Shi, B.; and Zhang, S. 2026. TACO: TACTile World Model as a Self-Corrector for Scalable VLA Post-Training. *arXiv preprint arXiv:2607.02840*.
- Liu, Z.; Liu, J.; Xu, J.; Han, N.; Gu, C.; Chen, H.; Zhou, K.; Zhang, R.; Hsieh, K. C.; Wu, K.; et al. 2025. Mla: A multisensory language-action model for multimodal understanding and forecasting in robotic manipulation. *arXiv preprint arXiv:2509.26642*.
- Lou, Y.; Ye, Y.; Fu, Y.; Cen, J.; Chi, X.; Lyu, Y.; Jia, P.; Han, S.; Lu, Z.; and Zhang, S. 2026. Dream-Tac: A Unified Tactile World Action Model for Contact-Rich Robot Manipulation. *arXiv preprint arXiv:2606.08737*.
- Lu, J.; Batra, D.; Parikh, D.; and Lee, S. 2019. Vilbert: Pretraining task-agnostic visiolinguistic representations for vision-and-language tasks. *Advances in neural information processing systems*, 32.
- Niu, D.; Liu, Z.; Wang, Z.; Shao, B.; Yin, Z.-H.; Pai, A.; Sharma, Y.; Saravalle, S.; Zheng, R.; Wang, J.; et al. 2026. T-rer: Tactile-reactive dexterous manipulation. *arXiv preprint arXiv:2606.17055*.
- Owens, A.; Wu, J.; McDermott, J. H.; Freeman, W. T.; and Torralba, A. 2016. Ambient sound provides supervision for visual learning. In *European conference on computer vision*, 801–816. Springer.
- Socher, R.; Ganjoo, M.; Manning, C. D.; and Ng, A. 2013. Zero-shot learning through cross-modal transfer. *Advances in neural information processing systems*, 26.
- Tian, Y.; Krishnan, D.; and Isola, P. 2020. Contrastive multiview coding. In *European conference on computer vision*, 776–794. Springer.
- Xu, S.; Zhong, G.; Liu, Y.; Wang, F.; Luo, H.; Zhou, H.; Zhang, W.; Ye, Z.; Wu, Z.; and Jiang, Y. 2026. Seeing Touch from Motion: A Unified Modality-Aware Visuo-Tactile Policy with Tactile Motion Correlation. In *Proceedings of the European Conference on Computer Vision (ECCV)*.
- Xue, H.; Ren, J.; Chen, W.; Zhang, G.; Yuan, F.; Gu, G.; Xu, H.; and Lu, C. 2025. Reactive Diffusion Policy: Slow-Fast Visual-Tactile Policy Learning for Contact-Rich Manipulation. In *ICRA 2025 Workshop: Beyond Pick and Place*.
- Yang, F.; Feng, C.; Chen, Z.; Park, H.; Wang, D.; Dou, Y.; Zeng, Z.; Chen, X.; Gangopadhyay, R.; Owens, A.; et al. 2024. Binding touch to everything: Learning unified multimodal tactile representations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 26340–26353.
- Yang, F.; Ma, C.; Zhang, J.; Zhu, J.; Yuan, W.; and Owens, A. 2022. Touch and go: Learning from human-collected vision and touch. *arXiv preprint arXiv:2211.12498*.

Ye, G.; Zhang, Z.; Zhao, X.; Wu, S.; Lu, H.; Lu, S.; and Liu, H. 2025. Learning to Feel the Future: Dream-TacVLA for Contact-Rich Manipulation. *arXiv preprint arXiv:2512.23864*.

Yu, J.; Liu, H.; Yu, Q.; Ren, J.; Hao, C.; Ding, H.; Huang, G.; Huang, G.; Song, Y.; Cai, P.; et al. 2025. ForceVLA: Enhancing VLA Models with a Force-aware MoE for Contact-rich Manipulation. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*.

Yuan, C.; Zhang, Z.; Zhou, M.; Chen, W.; Wang, Y.; Liu, Z.; Niu, D.; Wang, S.; Zhang, H.; Zhang, W.; et al. 2026a. Ftp-1: A generalist foundation tactile policy across tactile sensors for contact-rich manipulation. *arXiv preprint arXiv:2606.13102*.

Yuan, H.; Yi, W.; Zhang, Z.; Chen, W.; Mo, Y.; Yin, J.; Li, X.; Zeng, X.; Wen, C.; Lu, C.; et al. 2026b. Vtam: Video-tactile-action models for complex physical interaction beyond vlas. *arXiv preprint arXiv:2603.23481*.

Zambelli, M.; Aytar, Y.; Visin, F.; Zhou, Y.; and Hadsell, R. 2021. Learning rich touch representations through cross-modal self-supervision. In *Conference on Robot Learning*, 1415–1425. PMLR.

Zhang, C.; Hao, P.; Cao, X.; Hao, X.; Cui, S.; and Wang, S. 2026a. Vtla: Vision-tactile-language-action model with preference learning for insertion manipulation. *Biomimetic Intelligence and Robotics*, 100333.

Zhang, S.; Yuan, Y.; Tang, H.; Zheng, Y.; Yu, Q.; Li, P.; Huang, G.; Huang, H.; Quan, X.; and Hao, J. 2026b. Force-Flow: Learning to Feel and Act via Contact-Driven Flow Matching. *arXiv preprint arXiv:2605.11048*.

Zhang, Z.; Ma, J.; Yang, X.; Wen, X.; Zhang, Y.; Li, B.; Qin, Y.; Liu, J.; Zhao, C.; Kang, L.; et al. 2026c. TouchGuide: Inference-Time Steering of Visuomotor Policies via Touch Guidance. *arXiv preprint arXiv:2601.20239*.

Zhao, T.; Kumar, V.; Levine, S.; and Finn, C. 2023. Learning Fine-Grained Bimanual Manipulation with Low-Cost Hardware. *Robotics: Science and Systems XIX*.

Zhu, X.; Huang, B.; and Li, Y. 2026. Touch in the wild: Learning fine-grained manipulation with a portable visuo-tactile gripper. *Advances in Neural Information Processing Systems*, 38: 153783–153812.

Zitkovich, B.; Yu, T.; Xu, S.; Xu, P.; Xiao, T.; Xia, F.; Wu, J.; Wohlhart, P.; Welker, S.; Wahid, A.; et al. 2023. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, 2165–2183. PMLR.