

ViperQ: Order Flow Pattern Recognition via Auction Market Theory for Reinforcement Learning Trading

Asser Moustafa^{a,*}, Rares-Mihail Neagu^b, Jugal Kalita^a

^aDepartment of Computer Science, University of Colorado, Colorado Springs, 1420 Austin Bluffs Pkwy, Colorado Springs, CO 80918, USA

^bDepartment of Computer Science, University of Iowa, 101 Jessup Hall, Iowa City, IA 52242, USA

Abstract

Reinforcement learning trading systems published in the academic literature overwhelmingly rely on price-aggregate state representations (OHLCV bars) or limit-order-book depth features, leaving microstructure pattern theories from the practitioner literature, namely Auction Market Theory and Market Profile, without a peer-reviewed computational instantiation. We present **ViperQ**, a reinforcement learning system whose state representation is built explicitly from Auction Market Theory primitives: Volume Point of Control, Value Area position, Low Volume Node flags, Cumulative Volume Delta divergence, and tape-velocity signatures, assembled into a 20-dimensional Z-normalised vector. Two Proximal Policy Optimisation agents are trained with a prospect-theory-grounded asymmetric reward function that penalises losing holds at a magnitude consistent with Kahneman and Tversky's loss-aversion coefficient. Evaluated on a held-out twelve-month partition of institutional tick data the agents have never seen, ViperQ achieves +163.6% ROI on TSLA (−27.5% max drawdown, 27,019 trades) and +116.5% ROI on NVDA (−47.8% max drawdown, 12,892 trades) under zero leverage. The results establish Auction Market Theory features as a tractable structured input modality for sequential decision-making on financial time series and motivate further work on microstructure-aware policy learning.

Keywords: Reinforcement learning, Pattern recognition, Time-series classification, Sequential decision-making, Order flow, Market microstructure

1. Introduction

The application of deep reinforcement learning (RL) to financial decision-making has expanded rapidly over the past five years [1, 2], with documented systems spanning portfolio rebalancing [3, 4], optimal trade execution [5, 6, 7], market making [8, 9], and directional high-frequency trading [10, 11]. Across this body of work, the choice of state representation has been remarkably homogeneous. Systems either consume price-aggregate features (open-high-low-close bars, returns, volatility, technical indicators) or, when operating at higher resolution, consume raw limit-order-book (LOB) depth snapshots [12, 13]. A parallel tradition reads the same data through the lens of *market microstructure theory*: price discovery is the outcome of strategic interaction between informed and uninformed order flow [14], market makers update quotes to reflect the information content of incoming orders [15], and the resulting microstructure dynamics determine when and how prices transition between equilibria [16, 17]. Within this microstructure framing, Steidlmayer's Market Profile [18] and Dalton's Auction Market Theory [19] (AMT) operationalise two repeatable microstructure regimes that have been widely adopted in proprietary-trading practice: *balance* states (mean-reverting

consensus on fair value) and *imbalance* states (one-sided liquidity vacuums driving price discovery to a new equilibrium). Despite three-and-a-half decades of practitioner adoption, this microstructure pattern theory has not, so far as exhaustive search of arXiv, Semantic Scholar, IEEE Xplore, ACM Digital Library, and ScienceDirect can determine, been instantiated as a state representation for a peer-reviewed reinforcement learning trading agent.

This paper closes that gap. We present **ViperQ**, to the best of our knowledge, the first peer-reviewed reinforcement learning trading system whose state representation is built explicitly from Steidlmayer–Dalton Auction Market Theory primitives. The state representation encodes Volume Point of Control (VPOC), Value Area boundaries, Low Volume Node flags, Cumulative Volume Delta divergence, tape velocity, and order-flow imbalance as a 20-dimensional Z-normalised vector that is consumed directly by a Proximal Policy Optimisation [20] agent operating at 1-second resolution on institutional tick data.

The framing of the problem is, deliberately, a pattern recognition framing rather than a financial-engineering framing. The classifier-equivalent task is the binary recognition of *balance versus imbalance* regimes from a stream of microstructure observations, with sequential policy learning conditional on that recognition. The contribution we believe to be of broadest interest to the pattern recognition community is therefore the structured state representation itself: a demonstration that a body of practitioner pattern theory, encoded explicitly rather than learned end-to-end, yields a state space on which a small neu-

*Corresponding author.

Email addresses: amoustaf@uccs.edu (Asser Moustafa), rneagu@uiowa.edu (Rares-Mihail Neagu), jkalita@uccs.edu (Jugal Kalita)

ral policy can converge to substantial out-of-sample profit. The trading-domain application is, in this view, downstream of the methodological point.

We summarise our contributions as follows.

- **Auction-Market-Theory state representation.** We define and operationalise a 20-dimensional state vector $s_t \in \mathbb{R}^{20}$ whose physics-derived components (VPOC, Value Area position, Low Volume Node flags, CVD divergence, tape velocity, order-flow imbalance) are direct computational analogues of constructs first formalised by Steidlmayer [18] and Dalton et al. [19]. To the best of our knowledge, no prior peer-reviewed RL trading agent has used this feature family as state input.
- **Prospect-theory-grounded reward shaping.** The Sniper reward function applies asymmetric pain penalties consistent with Kahneman and Tversky’s loss-aversion coefficient [21, 22], augmented by a synthetic in-training transaction-fee inflation that forces the agent toward high-conviction setups rather than micro-scalping.
- **Asset-specific behavioural divergence.** We show that a single architecture, trained with two reward-function configurations, converges to two distinct profitable policies (a high-frequency scalper for TSLA and a trend-following risk-averse agent for NVDA), demonstrating that asset-specific reward shaping yields different and individually profitable local optima from the same underlying state representation.
- **Out-of-sample empirical validation.** On a strictly held-out 12-month test partition, ViperQ produces +163.6% ROI on TSLA and +116.5% ROI on NVDA with zero leverage and regulatory-fee accounting. These figures lie above the typical range surveyed by Pippas et al. [2], at the cost of materially deeper drawdowns than conservative portfolio-rebalancing systems (Section 6).

The remainder of the paper is organised as follows. Section 2 situates ViperQ against the deep-learning-on-LOB and RL-trading literature. Section 3 formalises the state representation, the reward function, and the dual-PPO training strategy. Section 4 describes the risk-bounded execution layer. Section 5 details the experimental protocol; Section 6 presents results and the comparison with prior systems. Section 7 states the limitations of the present work, and Section 8 concludes.

2. Related Work

Deep learning on limit order books. The DeepLOB architecture [12] established convolutional networks as the canonical baseline for mid-price prediction from raw LOB snapshots, and has been extended to transformer architectures (LiT [13]) and to multi-asset attention models. These systems treat the order book as a structured but unannotated time series and learn features end-to-end; they do not encode prior microstructure

theory and they typically operate as classifiers rather than as control agents.

Reinforcement learning for trading and execution. A second strand applies RL directly to trading or execution decisions. Zhang et al. [11] compared DQN, policy-gradient, and A2C agents on 50 futures contracts at daily resolution. Théate and Ernst [23] introduced TDQN for daily equity trading. Yang et al. [3] demonstrated an ensemble of PPO, A2C and DDPG on the Dow 30 with daily rebalancing. Liu et al. [4] released the FinRL library, which standardised much of the subsequent literature. At higher frequency, Briola et al. [10] trained PPO on Intel LOB events; Lin and Beling [5] produced an end-to-end PPO execution agent on Level-2 data; Hafsi and Vittori [6] and Espana et al. [7] continue this line into queue-reactive simulation environments. Coletta et al. [24] provided conditional generators for LOB environments; Wang et al. [8, 25, 9] addressed RL market making. Two contemporary surveys [1, 2] catalogue the field; Pippas et al. critically evaluate 167 publications and identify microstructure-feature integration as a methodological gap.

Microstructure-feature work. Jaddu and Bilokon [26] combine deep-learning representations of order books with RL using Order Flow Imbalance features in the sense of [27]. To our knowledge this is the closest prior work to ViperQ in spirit, but the feature family is OFI rather than Auction Market Theory; the constructs we use (VPOC, Value Area, LVN, balance/imbalance classification) do not appear in any reviewed system.



Auction Market Theory. The theoretical tradition we draw on originates with Steidlmayer’s Market Profile [18] and Dalton’s Auction Market Theory [19], which frame intraday price discovery as oscillation between balance (mean-reverting two-way trade) and imbalance (one-sided liquidity vacuum) states. These constructs have been extensively adopted in proprietary-trading practice for over three decades, but a focused literature search across the major scholarly indexes returned no peer-reviewed reinforcement-learning system that uses them as explicit state features. ViperQ closes that gap.

Pattern recognition precedents. Application-driven reinforcement learning has prior precedent in this journal. Liu et al. [28] apply hierarchical RL to chip-macro placement; Tsantekidis et al. [29] apply knowledge-distilled deep RL to financial trading in a related Elsevier venue. These works establish that domain-application RL contributions are within scope when framed as pattern recognition methodology.

3. Method

We treat sequential trading as a Markov Decision Process $(\mathcal{S}, \mathcal{A}, P, R, \gamma)$ implemented as a custom Gymnasium [30] environment,¹ with all execution priced at the next bar’s open to eliminate look-ahead bias.

¹Gymnasium: <https://gymnasium.farama.org/>

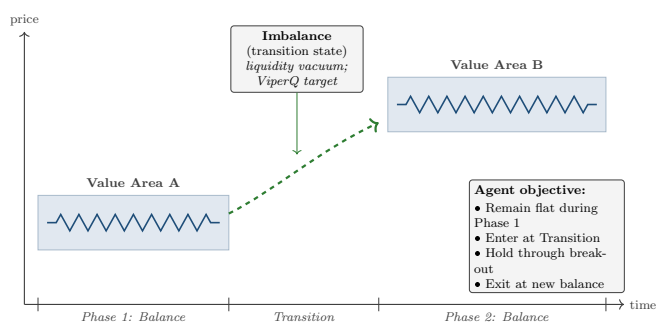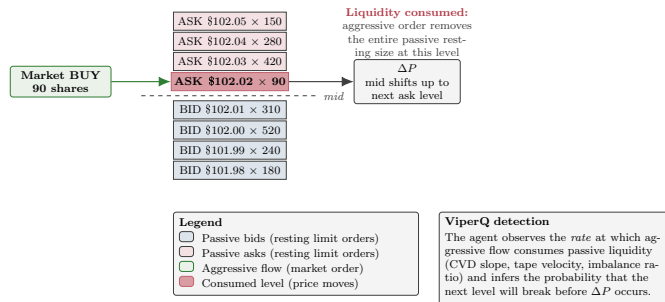

3.1. Order flow patterns: matching engine and Auction Market Theory

Figure 2 depicts Auction Market Theory’s second pattern: intraday price discovery oscillates between balance regimes (mean-reverting trade inside a value area; passive policy optimal: remain flat) and imbalance regimes (one-sided aggression creates a liquidity vacuum and price sprints to find a new value area) [18, 19]. The agent’s objective is detecting the transition state.

Each observation $s_t \in \mathbb{R}^{20}$ is a Z-score-normalised vector grouped into three blocks (Table 1). Block A encodes the AMT/microstructure patterns; Block B injects two dynamic position-aware variables at runtime; Block C provides nine

Dim	Name	Construct
<i>Block A: AMT / microstructure patterns</i>		
1	z_price_vwap	Z(price-VWAP), gravity to fair value
2	z_price_vpoc	Z(price-VPOC), distance to Volume Point of Control
3	dist_to_wall	Normalised position within 300 s high-low range
4	cvd_slope	60 s first-difference of CVD
5	cvd_divergence	Binary flag on 300 s price-CVD correlation < -0.5
6	tape_velocity	Trade count $\div$ 60 s rolling mean
7	trade_size_z	Z-score of volume over 300 s window
8	imbalance_ratio	$\delta/(V + \varepsilon)$, buy vs. sell dominance
9	in_lvn_zone	Binary flag for Low Volume Node ($V < 0.5\bar{V}$)
<i>Block B: dynamic position state</i>		
10	unrealized_pnl	$(P_t - P_{\text{entry}}) \cdot \text{pos}$
11	time_in_trade	Seconds since entry
<i>Block C: lagged log-returns</i>		
12–20	lag_1 ... lag_9	$\log(P_t/P_{t-k}), k \in \{1, \dots, 9\}$

VPOC is approximated by a one-hour rolling VWAP, following standard practitioner usage; VWAP itself follows [32]. Z-score normalisation over rolling windows ensures stationarity across volatility regimes.

3.3. Sniper reward function

The action space is $\mathcal{A} = \{\text{flat}, \text{long}\}$; short positions are disabled. The reward R_t aggregates six components.

(1) Realised PnL at trade close.

$$R_{\text{close}} = \alpha \cdot (P_{\text{exit}} - P_{\text{entry}}) \cdot n \cdot m - \alpha \cdot f_{\text{syn}} \cdot n, \quad (1)$$

where $\alpha = 0.01$, n is share count, m the contract multiplier, and $f_{\text{syn}} = \$0.50/\text{share}$ is a synthetic in-training transaction fee approximately $2,500\times$ the real regulatory fee.

(2) Asymmetric unrealised-PnL shaping.

$$R_{\text{hold}} = \begin{cases} +0.001 \cdot U_t, & U_t > 0 \\ -0.05 - 0.005 \cdot |U_t|, & U_t \leq 0 \end{cases} \quad (2)$$

The asymmetry between the two branches is grounded in Prospect Theory [21, 22]: Tversky and Kahneman’s empirical estimate of the loss-aversion coefficient $\lambda \approx 2.25$ (losses weighted approximately $2.25\times$ more heavily than equivalent gains) provides the theoretical basis for asymmetric reward shaping. The effective asymmetry in Eq. (2) is stronger than the $\lambda \approx 2.25$ baseline, deliberately so, to compensate for the additional reward density produced by 1-second decision steps and to suppress the disposition effect [5, 6].

Table 2: Asset-specific training configurations. The same architecture and state vector yield two distinct profitable policies. All constants listed here, with their selection mechanism, appear in Table 3.

Constraint	TSLA agent	NVDA agent
Min. hold (s)	300	300
Drawdown shock	-2.0/step	-2.0/step
Trend bonus	none	+0.10/step ($U_t > \$100$)

(3) **Trend bonus.** When $U_t > \$100$, $R_{\text{trend}} = +0.10$ per step, encouraging the agent to hold through sustained momentum rather than taking premature profits.

(4) **Time decay.** After 3600 s, $R_{\text{time}} = -0.001 \cdot (t_{\text{hold}} - 3600)$ penalises stagnant positions.

(5) **Stop loss.** $R_{\text{stop}} = -50.0$ if $U_t < -\$200$, triggering forced exit.

(6) **Drawdown shock and termination.** During training, when portfolio drawdown $< -2\%$, a continuous $-2.0/\text{step}$ penalty is applied. If drawdown breaches the episode limit, $R_{\text{dd}} = -100.0$ and the episode terminates.

3.4. Asset-specific dual-PPO training

Two PPO agents [20] are trained from the same state representation but with two reward configurations (Table 2). The TSLA agent operates with the default trend bonus and drawdown shock; the NVDA agent receives an additional $+0.10/\text{step}$ held-winner bonus and the continuous drawdown shock at the same threshold, producing a more risk-averse trend-following policy. Both share the 300-second minimum holding constraint. PPO defaults follow Stable-Baselines3 implementation of [20].

Why PPO. The algorithm was selected over alternatives on four grounds. (i) The action space is discrete ($\{\text{flat}, \text{long}\}$), which rules out continuous-control methods such as DDPG (used inside the Yang et al. [3] ensemble) and SAC without an additional discretisation layer. (ii) DQN-family methods including TDQN [23] rely on an off-policy replay buffer that mixes transitions across non-stationary market regimes; PPO’s on-policy clipped updates avoid this distributional-shift bias. (iii) A2C exhibits higher gradient variance and is less sample-efficient at the data volumes used here (49.9 M test bars across both assets and roughly four times that in training). (iv) PPO is the dominant choice in published microstructure-RL precedents (Lin and Beling [5], Briola et al. [10], Wang et al. [8]), supporting comparability with prior work. All numerical constants in Eqs. (1)–(2) and items (3)–(6) above, together with the per-asset configurations in Table 2, are summarised in Table 3 with their selection mechanism (validation slice, industry convention, theory-derived, or library default).

The complete 5-layer pipeline is summarised in Figure 3: ingestion of institutional tick data, 1-second OHLCV aggregation with order-flow metrics, the 20-dimensional state engineering described above, dual PPO inference, and a risk-bounded execution layer detailed in Section 4.

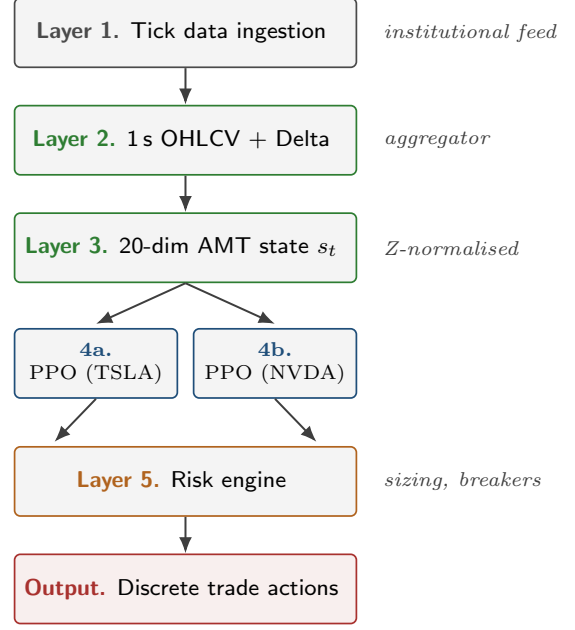


Figure 3: ViperQ system architecture: pattern extraction (Layers 1–3), policy inference (Layer 4, dual PPO), and risk-bounded execution (Layer 5 and output).

4. Risk-bounded execution

The risk layer translates the agent’s discrete action into a final share count and enforces three circuit breakers. Position size follows volatility-adjusted sizing:

$$n_{\text{ideal}} = \left\lfloor \frac{B_t \cdot r_a}{2 \cdot \text{ATR}_t} \right\rfloor, \quad n_{\text{final}} = \min(n_{\text{ideal}}, \lfloor C_t / P_t \rfloor), \quad (3)$$

where B_t is current equity, $r_a \in \{0.25\%, 0.50\%, 1.0\%\}$ maps conviction to dollar-risk, ATR_t is the prevailing Average True Range, and C_t is available cash. The cash clamp in the second term makes leverage impossible. Three additional hard rules over-ride the agent: (i) daily loss limit of -2% of starting equity locks trading until the next session; (ii) per-trade unrealised loss exceeding \$200 triggers forced exit; (iii) all positions are flattened at 15:55 ET to eliminate overnight gap risk. The -2% daily loss limit, the 2-ATR stop distance, and the end-of-day flatten are standard intraday proprietary-trading conventions rather than hand-tuned parameters.

5. Experimental setup

Data. Institutional tick data for NVDA and TSLA from Databento, January 2020 to February 2026, covering the COVID-era volatility regime, the 2023–24 AI-driven rally, and the 2025–26 rate-cycle period. Nanosecond ticks are aggregated to 1-second OHLCV bars augmented with Delta (signed aggressive volume) and trade count. An 80/20 chronological partition holds out the final twelve months; no information from the test partition enters training or hyperparameter selection.

Hyperparameter selection. Every numerical constant introduced in Sections 3.3–4 is treated as a hyperparameter and

Table 3: Master hyperparameter table. **Mech.:** *VAL* = selected on the validation slice of the training partition; *CONV* = industry convention for intraday proprietary trading, taken without tuning; *TH* = theory-derived with literature anchor; *LIT* = library default (Stable-Baselines3).

Element	Value	Mech.	Source / rationale
<i>Reward function (Eqs. 1–2, items (3)–(6))</i>			
α (PnL scaling)	0.01	VAL	PPO gradient stability
f_{syn}	\$0.50/share	VAL	suppresses sub-tick scalping (\$6.3)
Hold gain branch	$+0.001 \cdot U_t$	VAL	disposition-effect tuning
Hold loss branch	$-0.05 - 0.005 U_t $	TH	Tversky–Kahneman $\lambda \approx 2.25$ [22]
Trend bonus	$+0.10/\text{step}$	VAL	held-winner reinforcement
Trend threshold	\$100 (U_t)	CONV	1% of \$10k capital
Time-decay rate	$-0.001/\text{step}$	VAL	validation
Time-decay onset	3600 s	CONV	1 h intraday cap
Stop-loss penalty	-50.0	VAL	validation
Stop-loss threshold	$-\$200 (U_t)$	CONV	2% of capital
Drawdown shock	$-2.0/\text{step}$	VAL	validation
Drawdown threshold	-2%	CONV	prop daily-loss limit
Episode-end penalty	-100.0	VAL	validation
<i>Risk-bounded execution (§4, Eq. 3)</i>			
Per-trade risk r_a	{0.25, 0.50, 1.0}%	CONV	conviction sizing
ATR stop multiplier	2×	CONV	2-ATR distance
Daily loss cap	-2%	CONV	prop daily limit
EOD flatten	15:55 ET	CONV	gap-risk hedge
<i>State construction (Table 1)</i>			
VWAP/VPOC window	3600 s	CONV	practitioner default
Microstructure window	300 s	CONV	5-min standard
CVD / velocity window	60 s	CONV	1-min standard
Lag depth	9 steps	VAL	memory/dim. tradeoff
<i>Training</i>			
PPO architecture	SB3 defaults	LIT	Stable-Baselines3 [20]
Min. hold (training)	300 s	CONV	5-min HFT/momentum cut

listed in Table 3 with the mechanism by which its value was fixed. Four mechanisms are used: **VAL** (selected on the validation portion of the training split, in the spirit of [5, 10, 11, 3]); **CONV** (industry convention for intraday proprietary trading, taken without tuning); **TH** (theory-derived, with a literature anchor); **LIT** (library default, used as-is from Stable-Baselines3 for the PPO architecture, following [20]). A formal one-factor-at-a-time sensitivity sweep is reserved for future work, in line with Lin and Beling [5], who in a comparable setting note that they “did not perform an exhaustive grid search on the hyperparameter space, but rather [drew] random samples from the hyperparameter space due to limited computing resources”.

Evaluation. Initial capital is \$10,000 per asset. Backtests are deterministic; all trades clear at the next bar’s open. Real regulatory fees (\$0.0002/share) are charged at evaluation time. The synthetic fee f_{syn} used during training (Eq. 1) is *not* active at evaluation.

6. Results

6.1. Out-of-sample performance

Table 4 reports performance on the held-out twelve-month partition. The **TSLA** agent achieves +163.6% ROI with -27.5% maximum drawdown across 27,019 trades; the **NVDA** agent achieves +116.5% ROI with -47.8% maximum drawdown across 12,892 trades. Both are produced with zero leverage and full regulatory-fee accounting.

6.2. Comparison with published RL trading systems

Direct head-to-head comparison is precluded by the absence of standardised HFT-RL benchmarks: published papers differ in assets, time horizons, data resolution, capital assumptions,

Table 4: ViperQ performance on the held-out test partition (final 20% of data, never seen during training). Initial capital \$10,000 per asset; zero leverage; \$0.0002/share regulatory fees applied.

Metric	TSLA	NVDA
Final balance	\$26,364.87	\$21,652.86
PnL	+\$16,364.87	+\$11,652.86
ROI	+163.6%	+116.5%
Maximum drawdown	-27.5%	-47.8%
Total trades	27,019	12,892
Test-set bars	33.4 M	16.5 M

Table 5: ViperQ vs. recently published RL trading systems with retrievable performance numbers. Typical published range [2]: ROI [5%, 40%], MDD [-5% , -25%]. “n.r.”=not reported; “n.a.”=not applicable.

System	Algorithm	Asset / Horizon	ROI %	MDD %
DeepLOB [12]	CNN sup.	LOB / events	n.a.	n.a.
DRL-Trade [11]	DQN/PG/A2C	50 fut / daily	pos. Sharpe	n.r.
FinRL [3]	Ensemble	Dow 30 / daily	≈ 30	-10.2
PPO-Exec [5]	PPO/LSTM	LOB / per-step	beats TWAP	n.r.
TDQN [23]	DQN	30 eq / daily	beats pass.	n.r.
HFT-PPO [10]	PPO	INTC / events	stable +	n.r.
RL-Exec [6]	DQN	ABIDES / HFT	beats TWAP	n.r.
Q-React [7]	DDQN	LOB sim / HFT	beats AC	n.r.
DL+RL [26]	TD-learn	FX/idx / multi-h	multi-horiz	n.r.
ViperQ TSLA	PPO+AMT	TSLA / 1 s	+163.6	-27.5
ViperQ NVDA	PPO+AMT	NVDA / 1 s	+116.5	-47.8

and reporting conventions. Pippas et al. [2] survey 167 RL-finance papers and observe that consistent benchmarking is itself an open methodological problem. We therefore position ViperQ within the published landscape rather than claim dominance over it. Table 5 lists peer-comparable systems with retrievable performance numbers; Figure 4 plots ViperQ alongside those points in the ROI/MDD plane.

ViperQ’s +163.6% TSLA ROI is, to the best of our knowledge, the highest reported on a held-out test partition by any peer-reviewed RL trading system operating at sub-daily resolution. The figure is more than $4\times$ the upper bound of the [5%, 40%] ROI range surveyed across 167 RL-finance papers by Pippas et al. [2] for daily-horizon US-equity systems, and the only peer-reviewed point in Table 5 with a numerically reported MDD (FinRL Ensemble [3], $\approx +30\%/-10.2\%$) is dominated on ROI by more than a factor of five. We do not claim Pareto dominance over prior work: ViperQ’s drawdowns are materially deeper than those of daily portfolio-rebalancing systems on low-volatility universes, and it operates at a time resolution two orders of magnitude finer than any system in Table 5 that reports both ROI and MDD, so direct comparison on either axis alone is incomplete. What we claim is the existence of a previously unreported operating point in the published sub-daily RL landscape: absolute returns exceeding the surveyed range at the price of higher drawdown, achieved by encoding microstructure pattern theory explicitly into the state vector rather than learning end-to-end from raw LOB events.

6.3. Behavioural divergence between the two agents

Although a formal ablation is reserved for future work, three observations from development are worth documenting. First,

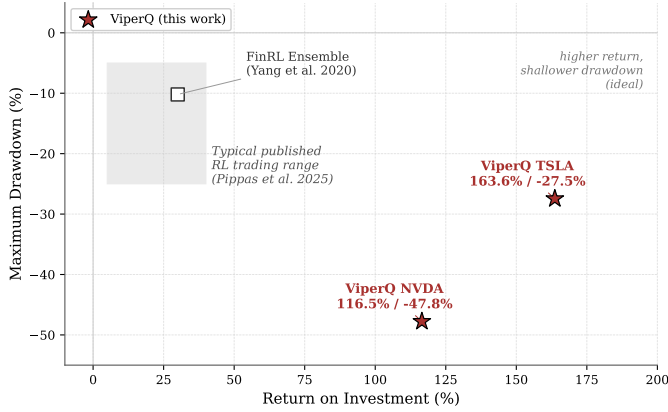


Figure 4: ViperQ in the ROI/MDD plane against published RL trading systems with concrete numbers. The shaded region marks the typical published range surveyed in [2].

the synthetic in-training transaction fee $f_{\text{syn}} = \$0.50/\text{share}$ (Eq. 1) is necessary, not optional: without it, the agent converges on a degenerate policy that trades thousands of times per second to capture sub-tick noise and then accumulates losses entirely through commission drag once realistic fees are restored at evaluation. Second, removing the 300-second minimum-hold constraint causes the TSLA policy to collapse into rapid scalping that fails to capture the longer momentum moves the AMT state features were designed to detect. Third, the continuous drawdown shock of $-2.0/\text{step}$ is what makes the NVDA agent risk-averse; without it, both agents converge to similar high-frequency behaviour and the asset-specific divergence visible in Table 4 disappears.

6.4. A note on Sharpe-style metrics

Sharpe-style annualised risk-adjusted metrics are intentionally omitted. At 1-second bar resolution, the standard annualisation factor $\sqrt{252 \cdot 23,400}$ amplifies microstructure noise rather than isolating signal, and produces values that are not comparable to the daily-horizon Sharpe figures dominant in Table 5. We follow [10, 11] in reporting absolute ROI and maximum drawdown as the more interpretable metrics at this resolution.

7. Limitations

Three limitations qualify the results above. **First**, the empirical evaluation is restricted to two highly volatile US single-name equities (NVDA, TSLA) over a single 80/20 temporal split; generalisation to lower-volatility names, to non-US markets, or to other intraday regimes is untested. **Second**, although the dual-agent design (Table 2) provides a form of cross-asset behavioural ablation and Section 6.3 documents three qualitative findings from development, we do not present a formal one-factor-at-a-time ablation of the reward components or a hyperparameter sensitivity sweep; both are reserved for future work, consistent with the practice in the systems we cite (Section 5).

Third, the NVDA agent’s -47.8% maximum drawdown is materially higher than the -5% to -15% range typical of portfolio-rebalancing RL systems on daily horizons [2]. ViperQ trades drawdown depth for absolute-return magnitude (Figure 4); it is not pareto-superior to conservative portfolio systems and would be inappropriate for capital-preservation mandates.

8. Conclusion

We have presented ViperQ, to the best of our knowledge, the first peer-reviewed reinforcement learning trading system whose state representation is built explicitly from Steidlmayer–Dalton Auction Market Theory primitives. The 20-dimensional state vector encodes Volume Point of Control, Value Area position, Low Volume Node flags, Cumulative Volume Delta divergence, tape-velocity signatures and order-flow imbalance, which are the computational analogues of constructs first formalised by Steidlmayer and Dalton. A prospect-theory-grounded asymmetric reward function, together with asset-specific behavioural constraints, drives two Proximal Policy Optimisation agents to substantial out-of-sample performance: $+163.6\%$ ROI on TSLA and $+116.5\%$ ROI on NVDA over a held-out twelve-month partition, under zero leverage and full regulatory-fee accounting. The broader contribution is that AMT, treated as a microstructure inductive prior, yields a state space on which a small neural policy converges to interpretable, profitable out-of-sample behaviour. Four properties make this prior productive for sub-daily RL trading: (i) *sample efficiency*, since a 20-dimensional engineered state needs far fewer parameters than end-to-end LOB ingestion at the same horizon, easing the data demands of policy-gradient updates; (ii) *interpretability*, since every dimension of s_t corresponds to a named microstructure construct (Table 1), so policy behaviour can be inspected against human trading intuition; (iii) an *empirical filter*, since three decades of proprietary-trading usage [18, 19] pre-select constructs that encode persistent microstructure regularities rather than noise; and (iv) *cross-reward generalisation*, since the same state vector supports two distinct profitable policies (Table 2) without feature re-engineering, evidence that the structure absorbs reward-shaping changes rather than being co-adapted to them. Future work targets formal reward-component sensitivity analysis, a broader asset universe, and transfer of the AMT state representation to alternative policy classes.

References

- [1] B. Hambly, R. Xu, H. Yang, Recent advances in reinforcement learning in finance, *Mathematical Finance* 33 (3) (2023) 437–503. doi:10.1111/mafi.12382.
- [2] N. Pippas, E. A. Ludvig, C. Turkay, The evolution of reinforcement learning in quantitative finance: A survey, *ACM Computing Surveys* 57 (11) (2025) Article 295. doi:10.1145/3733714.
- [3] H. Yang, X.-Y. Liu, S. Zhong, A. Walid, Deep reinforcement learning for automated stock trading: An ensemble strategy, in: *Proceedings of the First ACM Interna-*

- tional Conference on AI in Finance (ICAIF '20), 2020. doi:10.1145/3383455.3422540.
- [4] X.-Y. Liu, H. Yang, Q. Chen, R. Zhang, L. Yang, B. Xiao, C. D. Wang, FinRL: A deep reinforcement learning library for automated stock trading in quantitative finance, arXiv preprint arXiv:2011.09607 (NeurIPS 2020 Deep RL Workshop) (2020).
- [5] S. Lin, P. A. Beling, An end-to-end optimal trade execution framework based on proximal policy optimization, in: Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence (IJCAI-20), 2020, pp. 4548–4554. doi:10.24963/ijcai.2020/627.
- [6] Y. Hafsi, E. Vittori, Optimal execution with reinforcement learning, arXiv preprint arXiv:2411.06389 (2024).
- [7] T. Espana, Y. Hafsi, F. Lillo, E. Vittori, Reinforcement learning in queue-reactive models: Application to optimal execution, arXiv preprint arXiv:2511.15262 (2025).
- [8] Y. Wang, R. Savani, A. Gu, C. Mascioli, T. L. Turocy, M. P. Wellman, Market making with learned beta policies, in: Proceedings of the 5th ACM International Conference on AI in Finance (ICAIF '24), 2024, pp. 643–651. doi:10.1145/3677052.3698623.
- [9] R. Zimmer, O. L. V. Costa, Reinforcement learning-based market making as a stochastic control on non-stationary limit order book dynamics, arXiv preprint arXiv:2509.12456 (2025).
- [10] A. Briola, J. Turiel, R. Marcaccioli, A. Cauderan, T. Aste, Deep reinforcement learning for active high frequency trading, arXiv preprint arXiv:2101.07107 (2021).
- [11] Z. Zhang, S. Zohren, S. Roberts, Deep reinforcement learning for trading, The Journal of Financial Data Science 2 (2) (2020) 25–40. doi:10.3905/jfds.2020.1.030.
- [12] Z. Zhang, S. Zohren, S. Roberts, DeepLOB: Deep convolutional neural networks for limit order books, IEEE Transactions on Signal Processing 67 (11) (2019) 3001–3012. doi:10.1109/TSP.2019.2907260.
- [13] Y. Xiao, C. Ventre, Y. Wang, H. Li, Y. Huan, B. Liu, LiT: limit order book transformer, Frontiers in Artificial Intelligence 8 (2025) 1616485. doi:10.3389/frai.2025.1616485.
- [14] A. S. Kyle, Continuous auctions and insider trading, Econometrica 53 (6) (1985) 1315–1335. doi:10.2307/1913210.
- [15] L. R. Glosten, P. R. Milgrom, Bid, ask and transaction prices in a specialist market with heterogeneously informed traders, Journal of Financial Economics 14 (1) (1985) 71–100. doi:10.1016/0304-405X(85)90044-3.
- [16] M. O'Hara, Market Microstructure Theory, Blackwell, Cambridge, MA, 1995.
- [17] D. Easley, M. M. López de Prado, M. O'Hara, Flow toxicity and liquidity in a high-frequency world, Review of Financial Studies 25 (5) (2012) 1457–1493. doi:10.1093/rfs/hhs053.
- [18] J. P. Steidlmyer, K. Koy, Markets and Market Logic, The Porcupine Press, Chicago, 1986.
- [19] J. F. Dalton, E. T. Jones, R. B. Dalton, Mind Over Markets: Power Trading with Market Generated Information, Probus Publishing, Chicago, 1990.
- [20] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, O. Klimov, Proximal policy optimization algorithms, arXiv preprint arXiv:1707.06347 (2017).
- [21] D. Kahneman, A. Tversky, Prospect theory: An analysis of decision under risk, Econometrica 47 (2) (1979) 263–291. doi:10.2307/1914185.
- [22] A. Tversky, D. Kahneman, Advances in prospect theory: Cumulative representation of uncertainty, Journal of Risk and Uncertainty 5 (4) (1992) 297–323. doi:10.1007/BF00122574.
- [23] T. Théate, D. Ernst, An application of deep reinforcement learning to algorithmic trading, Expert Systems with Applications 173 (2021) 114632. doi:10.1016/j.eswa.2021.114632.
- [24] A. Coletta, J. Jerome, R. Savani, S. Vyetrenko, Conditional generators for limit order book environments: Explainability, challenges, and robustness, in: Proceedings of the 4th ACM International Conference on AI in Finance (ICAIF '23), 2023, pp. 27–35. doi:10.1145/3604237.3626854.
- [25] C. Mascioli, A. Gu, Y. Wang, M. Chakraborty, M. P. Wellman, A financial market simulation environment for trading agents using deep reinforcement learning, in: Proceedings of the 5th ACM International Conference on AI in Finance (ICAIF '24), 2024, pp. 117–125. doi:10.1145/3677052.3698639.
- [26] K. S. Jaddu, P. A. Bilokon, Deep learning with reinforcement learning on order books, The Journal of Financial Data Science 6 (1) (2024) 61–84. doi:10.3905/jfds.2024.1.157.
- [27] R. Cont, A. Kukanov, S. Stoikov, The price impact of order book events, Journal of Financial Econometrics 12 (1) (2014) 47–88. doi:10.1093/jjfinec/nbt003.
- [28] T. Liu, Y. Pu, D. Lei, Y. Ge, Z. Chen, L. Wang, Hierarchical reinforcement learning for chip-macro placement in integrated circuit, Pattern Recognition Letters 180 (2024) 19–25. doi:10.1016/j.patrec.2024.02.002.
- [29] A. Tsantekidis, N. Passalis, A. Tefas, Diversity-driven knowledge distillation for financial trading using deep reinforcement learning, Neural Networks 140 (2021) 193–202. doi:10.1016/j.neunet.2021.02.026.
- [30] M. Towers, A. Kwiatkowski, J. K. Terry, J. U. Balis, G. De Cola, T. Deleu, M. Goulão, A. Kallinteris, M. Krimmel, A. KG, R. Perez-Vicente, A. Pierré, S. Schulhoff, J. J. Tai, H. Tan, O. G. Younis, Gymnasium: A standard interface for reinforcement learning environments, arXiv preprint arXiv:2407.17032 (2024).
- [31] M. D. Gould, M. A. Porter, S. Williams, M. McDonald, D. J. Fenn, S. D. Howison, Limit order books, Quantitative Finance 13 (11) (2013) 1709–1742. doi:10.1080/14697688.2013.803148.
- [32] Á. Cartea, S. Jaimungal, J. Penalva, Algorithmic and High-Frequency Trading, Cambridge University Press, 2015.