

Resolution Is Not Settlement, Part I: Oracle Adjudication and Semantic Governance on Polymarket

Maksym Nechepurenko

Research Department of Devnull FZCO, Dubai, UAE
maksym@devnull.ae ORCID 0000-0002-9515-8841

August 2026 | Version r0.6.3

Abstract

Prediction-market resolution is often reduced to a terminal outcome and one timestamp. That representation is inadequate for leveraged event claims because rule versioning, technical request creation, proposal, dispute, reset, Oracle finality, and adapter terminality are distinct states with different observation precision and balance-sheet consequences. We reconstruct those states for Polymarket using Oracle request generations, rather than economic questions alone, as the unit of adjudication.

The population is frozen at Polygon block 79,721,080 and contains 185,550 initialized adapter-question instances and 350,703 decoded adapter logs. Exact requester-filtered extraction yields 504,332 decoded Oracle lifecycle events comprising 184,148 request creations, 159,447 proposals, 1,604 disputes, and 159,133 settlements. The request-generation accounting closes as 182,671 questions with at least one request plus 1,477 successor generations. Immutable chain identity and deployed request semantics provide exact linkage; no nearest-time, pooled-question, or question-ID-only fallback is used. Unfinished histories remain right-censored.

Request age is not semantic resolution age. Median request-to-first-proposal time is 182 seconds on the legacy route but 176,388–744,151 seconds on modern routes, while post-reset successor proposals arrive within 300–2,909 seconds at the median. The contrast is descriptive of different mechanism start points and is not, by itself, evidence of causal efficiency. Exact stable-ID metadata linkage recovers 104,032 of 185,550 questions (56.07%), leaves 81,518 unmatched, and produces no ambiguous exact match. The versioned rule layer contains 1,570 updates; exact chain identity timestamps 1,561 of them, including all 1,549 creator-authoritative clarifications. Among 1,711 exact clarification-generation relations, 1,426 occur after request creation but before first proposal. External-source publication and contractual-decidability clocks remain unmeasured population-wide and are not replaced by mechanism timestamps.

The results establish an event-sourced account of Oracle adjudication, semantic governance, and adapter terminality. A separately frozen companion Part II reconstructs Conditional Tokens payout recording and observed redemption, preserving rather than collapsing the boundary between adjudication, protocol settlement, and holder realization.

Keywords: prediction markets; event-linked perpetual futures; finality; Polymarket.

JEL: G13, G14, G18.

1 Introduction

An event can be economically over while its market remains institutionally unfinished. A match may have ended, an official result may be available, and the eventual payout may appear obvious to almost every trader. Yet the corresponding claim can remain inside a mechanism that still has to identify the governing rule version, accept a proposal, permit a challenge, process a reset or later adjudication path, make the successful oracle value consumable, and record a terminal adapter transition. Compressing those steps into one field such as `resolved_at` is

relatively harmless when the only object of interest is the final answer. It is not harmless when capital is margined, funding accrues, a liquidation trigger can transfer value, or governance concentration and rule changes are themselves objects of study.

The distinction in the title is literal. In this study, *resolution* is the adjudication process that selects a contractually accepted outcome. *Settlement* is a downstream protocol action that makes a payout enforceable against locked collateral. *Redemption* is a holder-level action that realizes collateral. These layers may share a transaction or a block timestamp, but they are different economic states. Part I reconstructs the Oracle and adapter layers. The companion Part II follows the same research programme into the Conditional Tokens Framework (CTF), payout recording, redeemability, and observed holder realization under a separately frozen downstream dataset.

The product boundary matters. Polymarket documents prediction markets and a separate perpetual-futures product surface. The latter tracks continuous external underlyings and does not resolve to a binary event payoff (Polymarket, 2026b,c). It is therefore not a deployed test of an event-probability perpetual. This paper studies the existing event-resolution stack that any future event-linked leveraged instrument would inherit.

1.1 Why one resolution timestamp is not enough

A question can be initialized long before it is contractually decidable. A proposal can carry an ignore or too-early value rather than a terminal answer. A first dispute can reset the question and create a successor request. A later dispute can enter a different adjudication branch. A creator-authoritative clarification can arrive after technical request creation but before the first proposal. Oracle settlement can occur before or inside the transaction in which the adapter reaches its terminal state. These are not cosmetic distinctions: they alter the available next transitions, the time spent in costly states, the identity of actors who can transfer value, and the evidence that a risk engine could observe in real time.

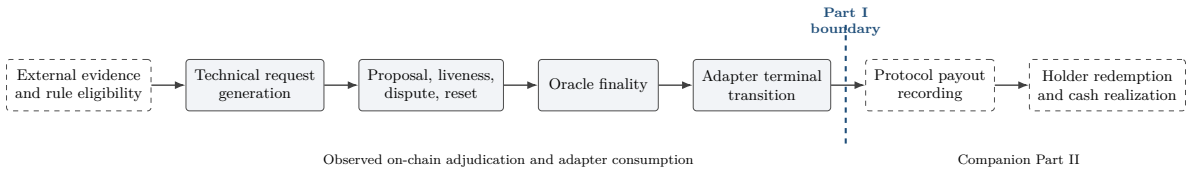


Figure 1: Finality layers and the analytical scope boundary between the two companion papers. Part I reconstructs request-generation adjudication through adapter consumption. External evidence and contractual decidability are separate semantic clocks; protocol payout recording and holder cash realization are downstream layers studied in Part II.

The boundary in Figure 1 is analytical rather than an assertion that every downstream event occurs in a later block. Part I uses the adapter-question and exact Oracle request generation as its primary units. Part II uses the condition, payout vector, and redemption event. The two analyses use distinct denominators and do not pool them. A transaction-atomic implementation can produce zero observed wall-clock duration between two logical layers without making them the same state.

1.2 Position in the research programme

The revised first four papers establish the surrounding problem. Paper 1 proves that ordinary cryptocurrency-perpetual mechanics are not portable to a financed binary claim held through an adverse terminal outcome under its stated balance-sheet assumptions. Paper 2 shows that risk depends on underlying geometry, temporal structure, settlement structure, and venue composition. Paper 3 separates market-price, outcome, and resolution manipulation from

informed trading. Paper 4 documents extreme fill-side concentration while proving that public fills do not identify the address-level quote lifecycle (Nechepurenko, 2026a,b,c,d). The present paper moves below those overlay designs and reconstructs the adjudication states they would inherit.

Two later papers use this reconstruction rather than duplicating it. Paper 6 studies state-triggered collateral, funding, closing auctions, and conversion into funded outcome claims. Paper 9 studies multi-leg instruments when two event legs reach finality at different times. The present paper supplies their state variables and empirical clocks, not their mechanism designs.

1.3 Research questions

The paper asks six questions.

1. What is the complete frozen population of initialized adapter questions, and how many exact oracle request generations are associated with it?
2. Which proposal, dispute, reset, successor-request, settlement, and adapter-terminal paths are observed, and which questions or generations remain right-censored?
3. Which mechanism intervals are observed exactly, which are interval-observed, and which semantic clocks remain unavailable?
4. How concentrated are proposal and dispute execution addresses, subject to the boundary that an address is not a beneficial owner?
5. How are rules and creator-authoritative clarifications versioned, and where do those updates fall relative to request, proposal, dispute, reset, and settlement?
6. Which claims about leveraged controls follow from the observed state surface, and which remain questions for Papers 6 and 9?

1.4 Main empirical findings

Empirical Finding 1 (A question is not a request generation). The cutoff population contains 185,550 initialized adapter-questions and 184,148 exact oracle request generations. Reset paths create successor generations without changing the economic question. Question-level state alone is therefore insufficient for path reconstruction.

Empirical Finding 2 (Technical request age is not semantic resolution age). Modern request-to-first-proposal medians range from 176,388 to 744,151 seconds, whereas reset-to-successor-proposal medians range from 300 to 2,909 seconds. The first interval can begin before evidence and contractual decidability; the second begins inside an already active contested path. They do not share one economic interpretation.

Empirical Finding 3 (Rule state can change after the request already exists). The versioned rule ledger contains 1,570 observed updates. Exact chain identity timestamps 1,561 updates, including 1,549 creator-authoritative clarifications. Among 1,711 exact clarification-generation relations, 83.34% occur after request creation but before the first proposal.

Empirical Finding 4 (Exact metadata linkage is substantial but selective). Frozen nested Gamma records produce exact stable-ID matches for 104,032 of 185,550 adapter-questions (56.07%). A further 81,518 remain unmatched and none are ambiguous under the exact-ID rule. Metadata-conditioned estimates therefore apply to the matched cohort and retain route-specific attrition.

Empirical Finding 5 (The public mechanism reveals some clocks and not others). The data measure request, proposal, dispute, reset, settlement, adapter, and clarification clocks. They do not measure population-wide external-source publication or contractual decidability. Request-to-proposal duration is therefore a mechanism interval, not a truth-to-resolution interval.

1.5 Contributions

The paper makes seven contributions.

First, it establishes a manifest-bound adapter denominator and exact request-generation linkage without temporal or pooled-question fallback. Second, it reconstructs a two-level multistate lifecycle with right censoring, transient resets, and route-specific competing paths. Third, it distinguishes exact, block-bounded, interval-observed, and unavailable clocks rather than forcing every duration into a point estimate. Fourth, it recovers an exact stable-ID metadata relation with explicit route-dependent attrition and no ambiguous match. Fifth, it restores a versioned rule and clarification layer, showing that technical request creation can precede the on-chain rule update that shapes later adjudication. Sixth, it documents proposal/dispute execution concentration while preserving the distinction between addresses, access configuration, and beneficial ownership. Seventh, it translates the state reconstruction into constraints for later leveraged designs while keeping protocol payout and redemption estimands in the separately identified companion Part II.

1.6 Evidence discipline

The paper separates documentary description, source-code capability, deployed configuration, and observed historical use. A function in source does not prove invocation. A current whitelist does not prove historical access. A current metadata page is not projected backward. An execution address is not treated as a beneficial owner. A request timestamp is not substituted for source publication or contractual decidability.

All percentages state their denominator. Questions unresolved at the cutoff are right-censored rather than classified as permanent failures. Later-dispute paths are reported with interval or upper-bound language when exact Data Verification Mechanism (DVM) result time is unavailable. The phrase “version-locked” is used for hypotheses and estimators frozen before the corresponding accepted analysis was executed; the paper does not claim an external preregistration where none occurred.

1.7 Roadmap

Section 2 positions the contribution. Section 3 reconstructs the native architecture. Section 4 defines the entity hierarchy, clocks, state process, and identification results. Section 5 describes the frozen data layers and validity gates. Section 6 fixes the empirical design. Sections 7 to 9 report the adapter, oracle, and semantic-governance results. Section 10 states consequences for leveraged design without duplicating Paper 6. Integrated appendices contain the operational dictionary, estimand and gate registry, source audit, proofs, hypothesis disposition, and reproducibility and evidence-lineage material. A concise data-and-code availability statement appears after the conclusion.

2 Related Work

The paper connects five literatures: prediction-market rules, oracle-mediated adjudication, layered financial finality, multistate duration analysis, and event-linked leverage.

2.1 Prediction markets and resolution rules

The prediction-market literature has primarily studied information aggregation, calibration, and the interpretation of market prices (Manski, 2006; Wolfers and Zitzewitz, 2004). Combinatorial market design expands the state space of claims (Hanson, 2003), but empirical work normally reduces settlement to the realized payoff. For the present paper, the payoff is not a sufficient statistic. Two markets with the same terminal payout can differ in source-publication delay,

proposal latency, dispute/reset path, clarification history, protocol-settlement time, and holder-redemption behavior.

Polymarket’s CTF-based markets make several intermediate states observable. The adapter stores ancillary data, prepares a condition, requests a YES/NO oracle value, and later maps a valid value into a payout vector. Ordinary terminal values include YES, NO, and UNKNOWN/50–50; an ignore or too-early sentinel causes continuation/reset rather than terminal payout (Polymarket, 2026h; UMA, 2026e). This contract structure motivates a process representation rather than a single resolution label.

The resolution rules themselves also have a temporal dimension. A title is not the governing rule; named sources, end dates, edge cases, and later clarifications determine when and how a terminal answer is available (Polymarket, 2026d). The empirical contribution of Paper 5 is to treat those rule states as versioned inputs rather than as static metadata attached after the fact.

2.2 The oracle problem, access, and dispute latency

Blockchains cannot observe off-chain facts without an oracle layer. The oracle literature emphasizes that data-source selection, feeder access, aggregation, dispute, and final on-chain consumption are separate design modules with distinct trust assumptions and latency costs (Eskandari et al., 2021). Binary event outcomes add semantic heterogeneity: the problem is not only whether a feed is numerically accurate, but whether the question, source, and edge-case rule identify the same proposition at each stage.

UMA’s Optimistic Oracle accepts a bonded claim if it survives liveness and uses the Data Verification Mechanism (DVM) as a disputed-data backstop (UMA, 2026a). ManagedOptimisticOracleV2 adds permissioned requesters and request-level control over who may propose (UMA, 2026b,d). The current documentation explains the mechanism and present default-whitelist behavior. It does not by itself establish historical enforcement for each request. Paper 5 therefore treats documentation, source-code capability, deployed configuration, and historical use as four distinct evidence layers.

Alternative oracle architectures clarify what Paper 5 does not attempt to replace. Voting-based systems such as Astraea analyze incentive-compatible decentralized truth determination, while foundational oracle-pattern taxonomies distinguish push/pull and inbound/outbound data flows (Adler et al., 2018; Mühlberger et al., 2020). A newer prediction-market literature evaluates automated and hybrid AI–human resolution, including confidence-based escalation for difficult questions (Kota, 2026). These designs are relevant comparison points, but the present paper measures the deployed Polymarket–UMA–CTF process rather than proposing a substitute oracle.

We use *oracle finality* operationally. A request is oracle-final when its successful outcome can no longer be changed through the ordinary challenge route and can be consumed by the requester. This is not a claim about metaphysical truth, legal finality, or blockchain-consensus finality. It is a measurable mechanism state that can precede adapter consumption and holder redemption.

2.3 Settlement finality and stage separation

Traditional financial-market infrastructure separates execution, clearing, settlement, and final transfer. The Principles for Financial Market Infrastructures define final settlement around an irrevocable and unconditional transfer or discharge of an obligation and emphasize that rules should identify the point at which settlement becomes final (Committee on Payment and Settlement Systems and Technical Committee of IOSCO, 2012). Paper 5 does not assert that Polymarket or CTF is legally equivalent to a regulated financial market infrastructure. It

adopts the analytical discipline of separating agreement about an obligation from the point at which the obligation is irreversibly discharged.

The event-market analog has at least three post-decision layers: oracle finality, protocol settlement through payout reporting, and holder redemption. It also has two pre-finality clocks: public evidence sufficiency and contractual decidability. Mixing all five into a scalar `resolved_at` field can misattribute source delay to the oracle, holder inattention to the protocol, or request reset time to the economic question itself.

The distinction also separates two kinds of post-protocol delay. *Protocol delay* is the time until the claim becomes redeemable. *Holder delay* is the time until a particular holder chooses to redeem. The latter can reflect batching, inattention, custody, gas, or portfolio management; it is not automatically an oracle-performance measure.

2.4 Multistate models, competing risks, and interval-censored clocks

The resolution path contains both transient and absorbing states. A first-dispute reset is not a terminal competing event; it is a transition into a new request. The natural statistical object is therefore a multistate process, with Aalen–Johansen transition-probability estimates and cause-specific or subdistribution models used only for genuinely absorbing destinations (Aalen and Johansen, 1978; Andersen et al., 1993; Fine and Gray, 1999). Kaplan–Meier summaries remain useful for simple marginal durations but cannot represent the full request chain (Kaplan and Meier, 1958).

Off-chain source and eligibility times introduce a second statistical issue. A source may be known only to the minute, within a publication interval, or through an archived page with uncertain update time. Treating such clocks as exact creates artificial precision. Turnbull’s nonparametric framework for interval-censored data supplies the appropriate marginal-duration estimator when exact times are unavailable (Turnbull, 1976). Paper 5 therefore separates an exact on-chain state backbone from source-conditioned duration analyses and reports endpoint sensitivity where regression software requires point times.

Transition-anchored price and liquidity responses draw on event-study methods (MacKinlay, 1997). The application requires three adaptations. First, proposal timing is endogenous to information arrival, so proposal effects are descriptive unless stronger identification is available. Second, protocol finality stops trading; finality studies use one-sided convergence and cessation measures rather than a symmetric post-event trading window. Third, technical state transitions such as question initialization provide negative controls because they should not systematically reveal terminal information when they occur long before the event.

2.5 Leveraged event-linked markets

Paper 1 establishes the non-portability of continuous-underlying margin and funding assumptions to binary event underlyings and documents the two design tensions most relevant here: terminal-jump bad debt is not solved by a halt, and dynamic margin can pre-empt more recoveries than it prevents (Nechepurenko, 2026d). Paper 2 shows that multi-leg variants add asynchronous finality and oracle-composition risk (Nechepurenko, 2026a). Paper 3 shows that leverage magnifies both market-price and outcome-manipulation incentives (Nechepurenko, 2026c). Paper 4 establishes which address-level and book-level supply-side measurements are feasible on Polymarket’s hybrid central limit order book (CLOB) (Nechepurenko, 2026b).

The present paper adds the missing state variable. Earlier programme work conditions risk on price, time to scheduled resolution, volatility, liquidity, and participant behavior. Paper 5 conditions risk on the realized adjudication state, the occupation time in that state, and the remaining path from evidence to protocol-final collateral. It also shows why an actor-controlled proposal or dispute cannot be used mechanically as a margin or conversion trigger without an explicit manipulation-cost test.

The oracle literature often compares value secured with the resources available to challenge or corrupt a mechanism, but a derivative overlay adds a distinct accounting issue: aggregate payoff can be zero across counterparties while particular participants acquire large state-contingent gains. Paper 5 therefore separates native collateral and gross exposure from the maximum private terminal-state range. This connects oracle-security analysis to Paper 3’s leverage-amplification argument without treating open interest, net system value, face bond, or private manipulation gain as interchangeable quantities (Eskandari et al., 2021; Nechepurenko, 2026c).

3 Institutional Architecture of Polymarket Adjudication

This section reconstructs the mechanism from frozen documentation, bytecode-matched source, the deployment registry, and observed historical use. A current description, a source-code capability, a deployed configuration, and an observed invocation are different evidence classes.

3.1 Evidence layers

Four evidence layers must remain separate throughout the paper.

1. **Current documentary description.** What Polymarket or UMA currently says the mechanism does.
2. **Source-code capability.** What a particular source revision permits, including branches that may never have been invoked.
3. **Deployed configuration.** Which bytecode, dependencies, access controls, bonds, liveness values, and whitelist settings applied to a particular address or request.
4. **Observed historical use.** Which events and calls actually occurred on-chain.

No claim is promoted from one layer to another without evidence. For example, a manual-resolution function establishes capability, not use; a current default whitelist establishes present membership, not historical membership; and a user-facing statement that anyone may propose does not establish that every historical ManagedOptimisticOracleV2 request had enforcement disabled.

3.2 Product boundary: prediction markets and Perps

Polymarket currently documents two economically distinct products. Prediction markets trade outcome tokens that become redeemable according to a discrete event resolution. Polymarket Perps are non-expiring contracts on external continuous-price underlyings; funding anchors the mark to an index, and there is no event resolution or 0/1 settlement (Polymarket, 2026b). The currently documented instruments span indices, commodities, crypto assets, and an equity-linked underlying rather than event probabilities (Polymarket, 2026c).

The distinction determines the paper’s empirical scope. We do not reverse-engineer a deployed event-probability perpetual because the public product does not contain one. We measure the existing event-resolution stack and use the current Perps architecture only as a continuous-reference comparison.

3.3 Question initialization and request creation

At adapter initialization, the question parameters and ancillary data are stored, a two-outcome condition is prepared on CTF, and a price request is sent to the configured Optimistic Oracle (Polymarket, 2026f,h). The request is marked event-based. This yields an important distinction:

$$t_{\text{request}} \not\equiv t_{\text{eligible}}. \tag{1}$$

The request is a technical object created by the adapter. Contractual decidability is a semantic property of the market rules and named source. A request may exist long before a terminal answer is permissible. Any attempt to infer decidability from request creation alone will misclassify early proposals and ignore/too-early responses.

3.4 Rules, ancillary data, and terminal values

Polymarket’s current resolution documentation states that each market has a named source, end date, and edge-case rules, and that the rules rather than the title govern resolution (Polymarket, 2026d). At the oracle layer, the YES/NO query convention supports three terminal payout values—YES, NO, and UNKNOWN/50–50—plus an ignore or too-early sentinel that is not terminal (UMA, 2026e).

The terminal support is therefore

$$Y \in \{0, \frac{1}{2}, 1\},$$

while the ignore value belongs to the transition system rather than the payout support. Treating ignore as a fourth payoff would overstate terminal ambiguity; treating unknown/50–50 as a failed resolution would understate the actual payout state space.

The proposed value must be retained in the event table. The first proposal of any value, the first terminal-valued proposal, and the proposal on the successful request can be three different observations. A proposal that eventually points in the correct direction but was submitted before contractual decidability remains a premature proposal for quality classification.

3.5 Proposal, liveness, dispute, and request reset

The public flow is a bonded proposal followed by a challenge period. An undisputed proposal can be accepted after liveness; a challenged proposal begins a further path that can reach the DVM (Polymarket, 2026d; UMA, 2026a). The adapter implementation adds a specific request-chain structure. The first dispute callback resets the question and creates a new oracle request with a new request timestamp; a subsequent dispute can engage the DVM backstop (Polymarket, 2026f,h).

A single economic question can therefore generate a sequence

$$\mathcal{R}_q = (r_{q1}, r_{q2}, \dots, r_{qK}),$$

where each request has its own creation, proposal, liveness, dispute, and settlement records. The reset is a transient transition, not a terminal outcome. The empirical database must retain predecessor/successor links and cannot select only the latest request.

The source-level description that a dispute “triggers a new proposal round” and the adapter-level implementation that creates a new request are compatible descriptions at different abstraction levels. Paper 5 stores both: question-level round and request-level identity.

3.6 Managed proposal access

ManagedOptimisticOracleV2 permits a request to carry a proposer whitelist and an enforcement flag. If enforcement is false, any address may propose; if true, only allowed addresses may propose. New requests can inherit a default whitelist unless the request manager overrides the configuration (UMA, 2026b,d). Current UMA documentation also describes eligibility criteria for the managed default list (UMA, 2026c).

Polymarket’s current user-facing page describes both proposal and dispute as open to anyone (Polymarket, 2026d). We do not resolve the difference by choosing one description. The contract freeze records the surface, while the historical analysis reconstructs request-level enforcement where the evidence permits. The data model retains:

- oracle family and deployed address;
- proposal whitelist address and enforcement status at the relevant request;
- request-specific versus inherited default configuration;
- allowed-proposer set when historically recoverable;
- dispute-access restrictions, if any, as a separate field rather than an assumption;
- secured market value and proposal/dispute concentration by access regime.

On-chain proposer and disputer addresses identify execution entities, not necessarily beneficial owners. Concentration measures are therefore address-level mechanism measures unless additional entity-link evidence exists.

3.7 Clarifications as versioned governance events

Polymarket documentation states that additional context can be published on-chain and should not change the question’s fundamental intent (Polymarket, 2026d). The adapter’s bulletin-board mixin permits any address to post an update, while its source comment instructs users to consider updates from the question creator (Polymarket, 2026a). The relevant empirical object is therefore not simply “a clarification exists.” It is a versioned sequence containing author, timestamp, content hash, and creator-authoritative status.

For each proposal and dispute, the analysis reconstructs the rule corpus as it existed immediately before the transaction. A clarification published after a proposal cannot be used as if the proposer had observed it; a current UI rendering cannot replace a historical rule state.

3.8 Oracle availability, adapter consumption, and the Part II boundary

When a valid oracle value is available, a caller can invoke the adapter’s resolution path. The standard source retrieves or settles the successful request, constructs the payout vector, calls CTF, and emits the adapter terminal event in the same transaction (Polymarket, 2026h). The logical layers remain distinct:

$t_{\text{oracle-final}}$: the successful request value is irreversible and consumable,
 t_{consume} : the adapter consumes that value,
 $t_{\text{protocol-final}}$: CTF records the payout and makes the condition redeemable.

Part I estimates Oracle adjudication and the terminal adapter transition. The companion Part II reconstructs the CTF and redemption layers from a separately frozen fixed-snapshot dataset. If adapter consumption and payout recording share one transaction, the wall-clock gap can be zero while the exact log order still identifies distinct state transitions. Oracle availability itself can remain interval-observed when no dedicated event marks the first consumable instant.

3.9 Pause, flag, reset, and manual resolution

The adapter source exposes administrative functions to pause and unpause, flag and unflag, reset, and manually resolve after a safety period under specified conditions (Polymarket, 2026g,h). The admin set is mutable in source. These facts establish a deployed governance surface, not historical frequency or motive.

The access-control audit reconstructs current or historical admin state where events permit, while the event ledger measures actual branch use. Ordinary optimistic-oracle finality, administrative intervention, and manual payout are reported as separate routes.

3.10 Documented adapter versions and the need for a freeze

A user-facing adapter list is not a complete production registry. At the frozen source boundary used in this study, Polymarket’s official operational resolution subgraph enumerates six initialization-emitting adapter data sources: the legacy adapter, standard V2, standard V3.1, standard V4, a NegRisk adapter, and a NegRisk V4 adapter (Polymarket, 2026e). The operational source also binds each data source to an application binary interface (ABI), start block, and handlers for initialization, reset, and resolution.

This creates a registry-closure requirement prior to any transport claim. A chain scan can be complete for the addresses supplied to it and still be incomplete for the venue if the address set omitted an active route. Paper 5 therefore distinguishes:

address-scope completeness from venue-registry completeness.

The production registry is the reconciled union of user-facing documentation, official operational indexer configuration, deployment/source artifacts, and on-chain code/dependency state. Documentary labels remain evidence about naming; operational data sources are evidence about expected historical coverage; bytecode and logs determine deployed use. G-REGISTRY-CLOSURE must pass before initialized-question-weighted mapping coverage or path frequencies are reported.

3.11 Architecture summary

The deployed system is best represented as two linked processes:

1. a *question process* carrying rules, clarifications, administrative state, terminal payout, and CTF condition; and
2. a *request process* carrying oracle creation, proposal value, liveness, dispute, reset, and settlement.

The question process can outlive an individual request, and request resets can occur without changing the economic question. This two-level architecture is the formal object of Section 4 and the database design of Section 5.

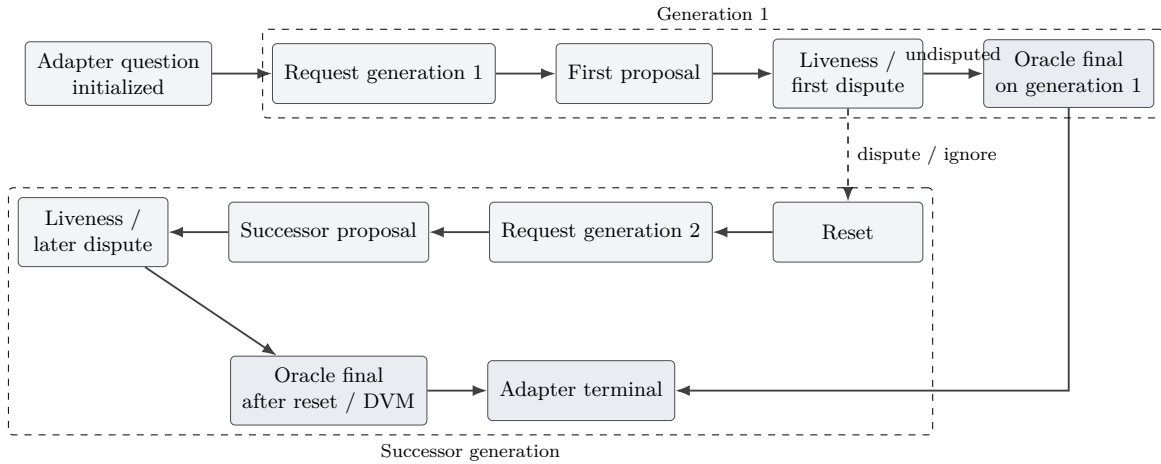


Figure 2: Two-level request-generation state machine. A dispute or ignore/too-early branch can create a successor request without changing the economic question. Therefore question-level state alone is insufficient for path reconstruction; request generation is a load-bearing state variable.

4 Formal Framework: Questions, Requests, Rules, and Clocks

4.1 Economic questions, rule versions, and request chains

Let $q \in \mathcal{Q}$ denote an adapter-level economic question and let $\rho_q(t)$ denote the rule state visible at time t , including creator-authoritative clarifications already recorded by that time. Let

$$\mathcal{R}_q = (r_{q1}, \dots, r_{qK_q}) \quad (2)$$

be the ordered chain of oracle request generations associated with q . A reset can increase K_q without changing the economic question.

The terminal YES payout is

$$Y_q \in \left\{0, \frac{1}{2}, 1\right\}. \quad (3)$$

The value $1/2$ is a terminal split/unknown payout. Ignore and too-early values belong to the transition system rather than the terminal support.

For request r_{qk} , let v_{qk} denote the proposed value. Define

$$t_{\text{proposal,any}}(q) = \min_k t_{\text{proposal}}^{(k)}, \quad (4)$$

$$t_{\text{proposal,terminal}}(q) = \min_{k: v_{qk} \in \{0, 1/2, 1\}} t_{\text{proposal}}^{(k)}, \quad (5)$$

when the relevant set is non-empty. The first proposal of any value, the first terminal-valued proposal, and the proposal on the successful request can therefore be three different events.

4.2 Clock observation as points, ordered events, or intervals

The mechanism contains exact chain events, block-bounded technical clocks, and potentially interval-observed semantic clocks:

- t_{event} : rule-relevant real-world occurrence or completion,
- t_{source} : earliest reproducible publication of sufficient evidence,
- t_{eligible} : earliest time the contemporaneous rule permits a terminal answer,
- t_{request} : technical request creation,
- t_{proposal} : proposal submission,
- t_{dispute} : dispute submission,
- t_{reset} : reset and successor-request creation,
- $t_{\text{oracle-final}}$: irreversible consumable oracle outcome,
- $t_{\text{adapter-terminal}}$: terminal adapter transition,
- $t_{\text{clarification}}$: creator-authoritative on-chain clarification.

When a semantic clock is not exact, it is represented by a closed interval:

$$\mathcal{I}_q^S = [t_q^S, \bar{t}_q^S], \quad (6)$$

$$\mathcal{I}_q^E = [t_q^E, \bar{t}_q^E]. \quad (7)$$

The decision-ready interval is

$$\mathcal{I}_q^\dagger = [\max\{t_q^S, t_q^E\}, \max\{\bar{t}_q^S, \bar{t}_q^E\}]. \quad (8)$$

A proposal before the lower endpoint is unambiguously early; a proposal inside the interval is timing-ambiguous; and a proposal after the upper endpoint is unambiguously post-readiness. Midpoint substitution is not a primary estimator.

Transactions in one block are ordered by transaction and log index even when their wall-clock timestamp is equal. Part I records that exact secondary order. Missing semantic clocks are not reconstructed from request, proposal, settlement, adapter, metadata-retrieval, or clarification timestamps.

Definition 1 (Technical request context). A technical request context begins at creation of request generation r_{qk} . It establishes that a request exists; it does not by itself establish evidence sufficiency, contractual decidability, or active adjudication.

Definition 2 (Active adjudication generation). An active adjudication generation is a request generation with a proposal or post-dispute successor path for which liveness, challenge, reset, later adjudication, or settlement transitions are being evaluated under the contemporaneous rule state.

Definition 3 (Oracle finality). Oracle finality occurs when the successful request outcome can no longer be changed through the ordinary challenge path and is consumable by the requester under the deployed mechanism.

Definition 4 (Adapter terminal transition). The adapter terminal transition is the first verified terminal transition emitted by the requesting adapter for question q . It is the terminal boundary of Part I, not a synonym for protocol payout recording or holder redemption.

4.3 Routes, payout subtype, and non-exclusive path flags

A single route label cannot encode every relevant path feature. We use:

1. G_q , the terminal route;
2. Y_q , the terminal payout subtype; and
3. $\mathbf{Z}_q$, non-exclusive flags for dispute, reset, clarification, pause/flag, access restriction, order indeterminacy, and non-standard behavior.

The route set is

$$G_q \in \{G_1, G_2, G_D, G_M, G_C\}, \quad (9)$$

where G_1 is first-generation oracle finality, G_2 is successor-generation finality, G_D is later-adjudication/DVM finality, G_M is administrative/manual finality, and G_C is right-censored or unresolved non-standard status. This representation prevents a reset from being treated as an absorbing outcome and prevents a split payout from being conflated with failure.

4.4 Two-level state process

Let $A_q(t)$ denote the question-level state and $R_{qk}(t)$ the state of request generation k . A request generation can follow:

$$\text{Requested} \rightarrow \text{Proposed} \rightarrow \begin{cases} \text{OracleFinal}, \\ \text{Disputed} \rightarrow \text{Reset/NewRequest}, \\ \text{Disputed} \rightarrow \text{LaterAdjudication} \rightarrow \text{OracleFinal}, \\ \text{Ignore/TooEarly} \rightarrow \text{Reset/NewRequest}. \end{cases} \quad (10)$$

The question-level process additionally carries rule-version marks, clarifications, administrative states, and adapter terminality.

The process can be described by transition intensities

$$\lambda_{ij}(t \mid X_q, \rho_q(t)) = \lim_{\Delta t \downarrow 0} \frac{\mathbb{P}\{S_q(t + \Delta t) = j \mid S_q(t) = i, X_q, \rho_q(t)\}}{\Delta t}. \quad (11)$$

This notation does not assert a structural homogeneous Markov model; it states that duration and destination must be modeled jointly.

Proposition 1 (Request history is required for a Markov state). *Suppose a dispute on the first request can create a successor request while a dispute on the successor can expose a different later-adjudication branch. A coarse state representation that retains only the current question state but omits active request generation and equivalent reset history is not Markov: two admissible histories can have the same coarse state and different feasible next transitions.*

For transient state j , define occupation over $[a, b]$:

$$\Omega_{qj}(a, b) = \int_a^b \mathbf{1}[S_q(t) = j] dt. \quad (12)$$

Occupation time can affect funding, collateral, liquidity exposure, and operational cost even when two paths share the same terminal payout and terminal adapter timestamp.

The following result extends the path-projection logic of Paper 1. That paper shows that terminal account risk cannot be inferred from a continuous-underlying margin proxy; the mechanism-specific result below shows that a terminal payout and timestamp cannot recover adjudication-state occupation.

Proposition 2 (A scalar terminal timestamp is insufficient). *Let two admissible paths have the same terminal payout and the same adapter terminal timestamp but different state-occupation vectors. For any path-dependent functional*

$$Z_q(P) = z_0(Y_q, t_{\text{adapter-terminal}}) + \sum_{j \in \mathcal{J}} h_j \Omega_{qj}(P), \quad (13)$$

if the occupation-vector difference is not orthogonal to $\mathbf{h} = (h_j)_{j \in \mathcal{J}}$, no function of the scalar pair $(Y_q, t_{\text{adapter-terminal}})$ can recover $Z_q(P)$ for both paths.

4.5 Latency and occupation estimands

For exact technical clocks, relevant mechanism intervals include:

$$L_{qk}^{RP} = t_{qk}^{\text{proposal}} - t_{qk}^{\text{request}}, \quad (14)$$

$$L_{qk}^{PD} = t_{qk}^{\text{dispute}} - t_{qk}^{\text{proposal}}, \quad (15)$$

$$L_{qk}^{PS} = t_{qk}^{\text{settle}} - t_{qk}^{\text{proposal}}, \quad (16)$$

$$L_q^{OA,Q} = t_{\text{adapter-terminal}} - t_{\text{oracle-final}}. \quad (17)$$

Reset-to-successor-proposal is measured on the successor generation rather than merged into the original request age.

When source and eligibility are observed, semantic durations are interval-censored relative to $\mathcal{I}_q^\dagger$. When they are unavailable, the technical intervals remain valid mechanism measurements but do not become truth-to-resolution latency.

The on-chain adjudication duration decomposes through state occupation:

$$t_{\text{adapter-terminal}} - t_{\text{request-created}} = \sum_{j \in \mathcal{J}_{\text{onchain}}} \Omega_{qj}(t_{\text{request-created}}, t_{\text{adapter-terminal}}). \quad (18)$$

4.6 Proposal quality and convergence

Proposal quality is coded at request level:

$$Q_{qk} \in \{\text{premature, terminal correct, terminal incorrect, unknown, censored}\}. \quad (19)$$

A proposal is premature when contemporaneous rules require ignore or continuation, even if its direction later equals the terminal payout. A disputed proposal is not automatically incorrect, and ex-post directional agreement does not establish timeliness.

Let $p_{q,t} \in [0, 1]$ be an observed YES-token price and Y_q the terminal payout. The terminal convergence error is

$$e_{q,t} = |p_{q,t} - Y_q|. \quad (20)$$

This is a hindsight-aligned descriptive quantity. It can reflect rule ambiguity, disagreement, capital lock-up, fees, inventory constraints, stale quotes, and finality delay; it is not interpreted as a pure oracle premium without a stronger identification design.

4.7 Observation grades

Every clock or transition receives one coordinate-specific grade:

E — Exact Exact event or primary-source time with deterministic identity and, where relevant, exact chain order.

I — Interval The target coordinate is bounded by exact lower and upper observations but is not point-identified.

S — Snapshot

A current or terminal representation is observed without the historical transition time.

Prx — Proxy

A documented substitute is available but is not functionally identical to the target coordinate.

U — Unmeasured

Available evidence supports neither a point nor an interval.

X — Conflicting

Load-bearing sources disagree; the coordinate is quarantined from primary estimation.

Grades are clock-specific rather than question-wide.

5 Data, Population Construction, and Identification

5.1 Relational unit of observation

The database does not use “market” as a universal key. It distinguishes the economic event, venue listing, adapter question, CTF condition, oracle request generation, and each proposal/dispute/settlement event. The frozen denominator is an adapter-question population, not automatically a unique economic-market population across migration, wrapping, or duplicate listing surfaces.

5.2 Event sourcing and bitemporal provenance

The analysis is event-sourced. Current state is derived from an append-only sequence rather than treated as the only historical record. Every accepted transition retains

$$(\text{chain ID}, \text{block hash}, \text{transaction hash}, \text{log index}) \quad (21)$$

together with source contract, decoded payload, ABI/source hash, and processing lineage. Valid time and retrieval/processing time remain separate. A clarification, metadata object, or configuration observed later is not projected backward without historical evidence.

5.3 Frozen adapter population

The preserved adapter archive contains 351,734 raw logs. After the cutoff at block 79,721,080, 350,703 logs remain. Canonical identity, duplicate/conflict checks, ABI decoding, and a network-disabled rebuild establish the accepted adapter layer.

The denominator contains 185,550 initialized adapter questions. Questions without an observed terminal adapter event at the boundary are right-censored.

5.4 Registry closure and version-aware linkage

Transport completeness is conditional on the registry supplied to the scanner. The registry is closed before population inference through deployment/source artifacts, bytecode/proxy relationships, official operational indexer configuration, ABI/event topics, and observed adapter-address/topic pairs.

Adapter-to-oracle linkage is version-aware. Each request generation is identified through exact requester, identifier, timestamp, ancillary-data, and family-specific fields. No nearest-time, pooled-question, or question-ID-only fallback is used.

5.5 Oracle transport and exact lifecycle reconstruction

Oracle events are acquired through exact filters:

$$\text{oracle address} + \text{event topic0} + \text{indexed requester adapter.} \quad (22)$$

Ranges are recursively split until every accepted terminal response is below the provider cap. The accepted lifecycle layer covers 38 streams and 808 terminal ranges. Thirty-five exact archive-provider comparisons reproduce selected identities and payloads.

The lifecycle table contains `RequestPrice`, `ProposePrice`, `DisputePrice`, and `Settle`. It preserves exact ABI integers and immutable event identity. Sixteen order-indeterminate generations remain in the canonical data but are excluded from estimands requiring a unique generation order.

5.6 Rules, clarifications, and metadata

Every cutoff question has an initial on-chain rule record. Updates are stored as versioned marks with author, timestamp, content hash, and creator-authoritative status. Proposal and dispute records join to the latest valid rule state strictly before their exact chain order.

Metadata is joined only by exact stable identifier. Re-parsing nested Gamma event pages raises exact coverage to 104,032 of 185,550 adapter-questions (56.07%); 81,518 remain unmatched and none are ambiguous under the exact-ID rule. Unmatched questions remain unmatched rather than being title-, slug-, date-, or time-matched. Because coverage is strongly route-dependent, metadata-conditioned results report route composition and do not treat the matched cohort as missing at random.

5.7 Source and evidence hierarchy

Evidence is ordered as historical on-chain state; bytecode-matched pinned source; signed deployment/governance record; frozen official documentation; mutable current documentation; and secondary reporting. Mechanism statements are tagged as documented, capable, configured, observed, or inferred.

5.8 Validity gates

G-REGISTRY

Adapter, oracle, dependency, ABI, and start-block registry closes.

G-ADAPTER

Adapter payload integrity, cutoff coverage, decoding, and denominator pass.

G-ORACLE

Request-generation linkage, lifecycle coverage, and canonical identity pass.

G-RULE Contemporaneous rule versions and authoritative updates are recoverable for the stated cohort.

G-METADATA

Exact stable-ID metadata coverage is reported with route-dependent missingness.

G-CLOCK

Every clock used in a duration claim is exact, block-bounded, interval-observed, or explicitly unmeasured.

G-ACCESS

Historical access comparisons are limited to requests with observed configuration.

G-REBUILD

Reported analytical artifacts reproduce under a network-disabled rebuild.

A failed gate narrows the claim; it does not authorize a substitute observable chosen after results are known. The final network-disabled rebuild compares 45 reported analytical artifacts and reports zero failures.

5.9 Missingness and censoring

No terminal event by the cutoff is right censoring, not permanent non-resolution. Legacy questions for which the modern request event is not applicable are `NOT_APPLICABLE_NO_REQUEST`. Missing oracle evidence is not an undisputed path. Unknown/split payout is a terminal subtype, not a data failure. Reset is transient.

5.10 Boundary to the downstream protocol dataset

Part I's accepted population and estimands stop at the adapter terminal transition. The companion Part II uses a separately frozen Conditional Tokens event population to study payout recording and redemption. Completion of that downstream acquisition does not alter Part I's question, request-generation, rule, or clarification denominators, and no downstream aggregate is inserted here as a substitute for an Oracle-layer result.

5.11 Cost and storage discipline

The historical extraction exposed a methodological failure: sparse address-only queries against a time-partitioned public warehouse can scan tens of terabytes while returning a small research table. The accepted dataset retains the resulting evidence and audit record, but the acquisition lesson is general. Registry closure, ABI-derived event selection, dry-run byte limits, and claim-targeted extraction precede expensive transport.

The reproducibility companion records query coordinates, provider, range ledger, input/output bytes, row counts, schemas, hashes, and manual interventions. Acquisition history belongs in the reproducibility record rather than the main empirical narrative.

5.12 Ethics and disclosure

The analysis uses public on-chain identifiers but does not attempt off-chain deanonymization. Address concentration is reported as execution-address concentration. Aggregate reporting avoids ranked address lists where aggregation is sufficient. The author discloses that the analysis forms part of a broader event-linked leverage research programme; this paper does not claim production safety for an associated design.

6 Estimands and Empirical Design

6.1 Nested observation universes

The paper uses the full frozen adapter-question population, the subset with exact oracle request-generation linkage, and estimand-specific subsets satisfying the required rule, clock, access, or metadata gate. Every result reports its denominator and attrition.

6.2 Population and path census

Experiment E1 constructs adapter-family counts, initialized-question denominator, terminal and right-censored adapter states, exact request-generation multiplicity, proposal/dispute/reset paths, terminal payout subtype, and non-exclusive path flags. These are population facts.

6.3 On-chain multistate estimands

The exact backbone supplies request-to-first-proposal, proposal-to-first-dispute, proposal-to-ordinary threshold, reset-to-successor proposal, proposal/dispute-to-settlement, and oracle-to-adapter intervals where identifiable. Right-censored generations remain in the risk set.

6.4 Semantic-clock estimands

When source and eligibility intervals are observed, proposal and finality are measured relative to $\mathcal{I}_q^\dagger$. In the accepted population-wide layer, those semantic clocks remain unmeasured. The corresponding result is negative identification: technical mechanism clocks cannot substitute for missing external clocks.

6.5 Rule and clarification estimands

The semantic layer measures initial rule coverage, update authorship and timing, clarification order relative to request/proposal/dispute/reset/settlement, and exact metadata attrition. Clarification timing establishes order, not causal or retroactive effect.

6.6 Access, concentration, and proposal quality

Proposal and dispute addresses are measured separately. Concentration statistics include top shares and Herfindahl–Hirschman index. Historical access comparisons are limited to requests with observed configuration. Proposal quality distinguishes premature/ignore, terminal correct, terminal incorrect, split/unknown, and censored categories.

6.7 Transition-anchored microstructure boundary

The integrated master specified price, spread, depth, staleness, and convergence studies around proposal and finality transitions. Part I retains the estimand definitions and negative controls but does not promote unexecuted market-window analyses into results. A nonexistent post-terminal order book is not coded as zero spread or depth.

6.8 Version-locked hypotheses

The original integrated paper fixed directional hypotheses before the final analysis layers. After the split, their disposition is explicit in Section F. Hypotheses requiring external clocks, price windows, value denominators, or mechanism replay are marked unmeasured, transferred, or pending rather than rewritten after inspection.

6.9 Uncertainty and multiplicity

Population counts are exact. Duration distributions use medians, quantiles, restricted means, or interval-aware estimators as appropriate. Secondary associations cluster by economic event where multiple questions share one real-world event. Multiple-testing adjustment applies to families of secondary transition outcomes, not to primary population facts.

7 Empirical Results I: Adapter Population and State Paths

This section reports the adapter population and adapter-emitted state paths through the frozen historical cutoff. Proposal, dispute, later-adjudication, access-control, and oracle-settlement events are joined in Section 8. The unit is an adapter-address/question-ID pair. It is not automatically a unique economic market across adapter migration or wrapping.

7.1 Source preservation, canonical identity, and cutoff

The frozen source archive contains 80 Parquet exports with 351,734 raw adapter logs. Every payload passed size, checksum, schema, and row-count checks. One file retains a cloud-generation provenance warning despite payload equivalence; the local SHA-256 manifest is therefore the post-cloud identity root. An independent content-addressed copy-and-reopen audit reproduced all 80 files and all 351,734 rows.

Canonicalization uses (chain id, block hash, transaction hash, log index). The canonicalization audit found 351,734 active unique chain logs, no removed rows, no duplicate collapse, and no conflicting canonical identity. The cutoff analysis includes 350,703 logs at or below Polygon block 79,721,080. The maximum observed cutoff log is block 79,721,066 at 2025-11-30 23:59:30 UTC. NegRisk V4 is excluded because its operational activation is later than the cutoff. The other five adapter families have completed monthly transport evidence through the boundary.

The decoder observed 32 adapter-address/topic pairs. All 350,703 cutoff events decoded successfully under the frozen ABI registry; there were no unknown pairs and no decode failures. A clean network-disabled rebuild compared 34 outputs and found no byte-hash mismatch. These results establish the adapter-log population backbone but do not establish oracle-event completeness.

7.2 Initialized adapter-question denominator

The cutoff denominator contains 185,550 initialized adapter questions. Table 1 reports the population by adapter family. Terminal-observed and unresolved columns are states at the cutoff. They do not measure ultimate resolution success or failure because questions initialized near the boundary have less time to reach a terminal adapter event.

Table 1: Initialized adapter-question population through Polygon block 79,721,080. “Terminal” is an adapter-log terminal event by the cutoff; “right-censored” is not an ultimate failure classification. Counts reproduce the manifest-locked adapter population output.

Adapter	Route	Initialized	Resets	Terminal	Right-censored
NegRiskUmaCtfAdapter	NegRisk	76,271	606	59,234	17,037
UmaCtfAdapterOld	Standard	5,829	73	2,941	2,888
UmaCtfAdapterV2	Standard	28,600	590	26,900	1,700
UmaCtfAdapterV31	Standard	13,379	85	12,667	712
UmaCtfAdapterV4	Standard	61,471	124	54,378	7,093

The terminal-state attrition table contains 156,116 `QuestionResolved` paths, four `QuestionSettled` paths without a later adapter terminal event in the cutoff ledger, and 29,430 questions unresolved at the cutoff. The last category is treated as right-censored in the

exact request-generation analysis. In particular, it must not be divided by the denominator and described as a “non-resolution rate” without an age-at-cutoff risk set.

7.3 Observed event families and adapter paths

Table 2 reports the decoded event-family counts. The population contains 1,478 reset events and 1,570 ancillary-data-update events, alongside 17 pause-or-flag events and ten administrative events. These are observed invocations, unlike source-code capabilities that may never have been exercised.

Table 2: Decoded adapter-event inventory at the historical cutoff. All 32 observed adapter-address/topic pairs decoded under frozen ABIs; no unknown topic or decode failure remained.

Event classification	Event count
Initialization	185,550
Resolution or settlement	159,048
Dependency or non-state	3,030
Ancillary-data update	1,570
Reset	1,478
Pause or flag	17
Administrative	10

The adapter-level state surface is dominated by a direct initialization-to-resolution path in both standard and NegRisk routes, but the ledger also retains request-forwarding, reset, ancillary-update, pause/flag, and unresolved paths. Table 3 reports the most frequent exact sequences. A reset is a transient event, not an absorbing outcome; the same question key can therefore have a longer successor-request path once oracle events are joined.

Table 3: Most frequent adapter-state paths through the cutoff. The table reports exact path counts from the manifest-locked adapter output; oracle events are reported separately and are not included in these adapter-only path counts.

Route	Adapter-event sequence	Questions
Standard	Initialized → Resolved	92,964
NegRisk	Initialized → Resolved	57,919
NegRisk	Initialized; no later adapter event by cutoff	16,856
Standard	Initialized; no later adapter event by cutoff	12,263
Standard	Initialized → ResolutionDataRequested → Settled → Resolved	2,853
Standard	Initialized → Reset → Resolved	626
NegRisk	Initialized → AncillaryDataUpdated → Resolved	615
NegRisk	Initialized → Reset → Resolved	513

The adapter-only sequence cannot tell whether a reset followed an incorrect proposal, a too-early value, an administrative intervention, or another oracle branch. Nor does it reveal who proposed or disputed, when the ordinary liveness threshold became irreversible, or when a DVM result became available. Those quantities require the oracle lifecycle rather than inference from adapter order alone.

7.4 Censoring and transition to the Oracle layer

The historical cutoff is a research boundary, not the end of every question’s economic life. The 29,430 questions without an observed terminal adapter event therefore enter the Oracle analysis as right-censored question-level paths rather than as ultimate failures. The adapter layer fixes

the denominator and exact reset/terminal evidence; Section 8 then joins raw `RequestPrice`, `ProposePrice`, `DisputePrice`, and `Settle` events to request generations.

This separation is substantive. The adapter population provides complete question-level coverage through a declared boundary, while the Oracle layer supplies request-generation multiplicity, first-proposal timing, dispute/reset branches, ordinary liveness thresholds, DVM-inclusive intervals, and address-level governance. Neither layer is allowed to impute the clocks or states that belong to the other.

8 Empirical Results II: Oracle Requests, Disputes, and Finality Paths

This section reports the second manifest-locked empirical layer. It joins the complete adapter-question population of Section 7 to raw events emitted by the legacy Optimistic Oracle, OptimisticOracleV2, and ManagedOptimisticOracleV2. The cutoff is independently re-derived as Polygon block 79,721,080. The unit below is either an adapter question or an exact Oracle request generation, depending on the estimand. No nearest-time, pooled-question, or question-ID-only fallback is used.

The accepted Oracle analysis is qualified in two ways. First, branches that pass through a second dispute are *DVM interval-only*: the data observe the second dispute and subsequent Oracle `Settle`, but not an exact DVM result time or value. Second, Managed Optimistic Oracle (Managed OO) access history is *partial observed-only*: two whitelist-update events are retained, but no access state is projected backward to requests for which the historical configuration is not observed. These qualifications bound the claims; they do not invalidate the raw lifecycle census.

8.1 Transport, decoding, and exact request linkage

The acquisition uses exact filters of the form Oracle address plus lifecycle-event topic plus indexed requester adapter. Etherscan range leaves are recursively split until every terminal range is below the response cap. The resulting zero-gap ledger covers 38 streams and 808 terminal ranges. A bounded archive remote procedure call (RPC) validation compares 35 exact ranges—thirty positive and five terminal-zero—and finds no identity or payload discrepancy.

The 504,334 canonical raw rows contain 504,332 lifecycle events and two Managed OO access/configuration events. Canonical identity is

(chain id, block hash, transaction hash, log index).

No canonical identity conflict and no removed duplicate is observed. Exact decoding yields 184,148 request generations, 159,447 proposal events, 1,604 dispute events, and 159,133 Oracle settlement events.

The exact linkage layer relates 184,148 request generations to the frozen 185,550 adapter-question population. The accounting identity closes exactly: 182,671 questions have at least one Oracle request and 1,477 successor generations produce the remaining request rows. It preserves 2,879 legacy questions as `NOT_APPLICABLE_NO_REQUEST`; they are structural zero-request observations in the frozen state layer, neither failed joins nor Oracle-risk-set censoring. Sixteen order-indeterminate generations are retained in the canonical data but excluded from generation-order estimands. The historical legacy Finder mapping remains unresolved and is never replaced with current-state inference.

8.2 Technical request creation is not resolution commencement

A central empirical result is that the technical request timestamp is not a general measure of when a market became economically or contractually resolvable. Modern adapters create or

Table 4: Oracle lifecycle acquisition and decoding through the verified cutoff.

Layer / event	Count	Interpretation
Canonical raw Oracle rows	504,334	Unique canonical identities; no identity conflict or removed duplicate.
Decoded lifecycle events	504,332	Full ABI decode for the four request-lifecycle event families.
RequestPrice	184,148	Exact request generations linked to adapter questions.
ProposePrice	159,447	All observed proposal events; generation-order analyses exclude sixteen order-indeterminate cases.
DisputePrice	1,604	Observed dispute events across the legacy Optimistic Oracle, Optimistic Oracle V2, and Managed Optimistic Oracle routes.
Settle	159,133	Oracle settlement/consumption events; not automatically adapter or Conditional Tokens protocol finality.
Managed Optimistic Oracle access/configuration events	2	Two observed default-proposer-whitelist updates; historical access state is not back-projected.
Exact Etherscan streams	38	Oracle address + event topic + requester topic for lifecycle streams, plus access/configuration streams.
Terminal range leaves	808	Zero-gap recursive block-range ledger.
Independent archive-provider overlap ranges	35	Thirty positive and five terminal-zero exact comparisons, all matching.

forward an event-based request at initialization. The first proposal can arrive much later, after evidence and rule conditions develop. By contrast, after a first-dispute reset, the successor request already belongs to an active adjudication path and is typically followed by a new proposal much more quickly.

Table 5: Kaplan–Meier median durations in seconds. The legacy initialization-to-adapter-terminal median is computed on all 5,829 initialized legacy questions, with 2,941 terminal events and 2,888 right-censored observations. The request clock is technical request creation, not source publication or contractual decidability. Decentralized-verification-mechanism values are settlement upper bounds rather than exact result times.

Adapter family	Request to first proposal	Ordinary threshold to Oracle settle	Initialization to adapter terminal	Reset to successor first proposal	Second dispute to settle upper bound
Legacy adapter	182	196	80,033,650	–	–
Standard V2	264,165	147	282,655	2,713	258,868
Standard V3.1	206,927	84	213,193	934	322,682
Standard V4	176,388	598	180,836	300	261,266
NegRisk adapter	744,151	246	790,510	2,909	242,262

The median request-to-first-proposal duration is 182 seconds in the legacy route, but 176,388 seconds for Standard V4, 206,927 seconds for Standard V3.1, 264,165 seconds for Standard V2, and 744,151 seconds for the original NegRisk adapter. Those durations mix technical request age with unobserved evidence and contractual-decidability time; they must not be called “resolution delay.” The corresponding reset-to-successor-proposal medians are 300, 934, 2,713, and 2,909 seconds on the modern reset-capable routes. The contrast is consistent with the two-level state representation, but it is not a causal test of that architecture: the initial request can be created long before an event becomes answerable, whereas reset occurs inside an already active adjudication path. The existence of exact successor generations and reset-linked request identities, rather than the magnitude contrast alone, is the direct empirical support for the two-level representation.

The semantic layer therefore measures source, rule, and clarification clocks rather than using request age as a semantic proxy. Until those clocks pass the registered rule and source gates, request-to-proposal duration is reported as a mechanism interval only.

8.3 First proposal, dispute, reset, and ordinary settlement

First-proposal paths are modeled with competing risks. A proposal can receive a first dispute, reach its ordinary expiration threshold, or remain right-censored at the cutoff. Missing transitions are never folded into the ordinary branch.

Table 6: First-proposal competing paths by adapter family. “No first dispute by threshold” denotes that the proposal liveness threshold elapsed without an observed first dispute. It is not a terminal-state classification and does not identify a separate ignore/too-early mechanism. Legacy uses the original Optimistic Oracle; V2, V3.1, and NegRisk use Optimistic Oracle V2; V4 uses Managed Optimistic Oracle V2.

Adapter family	Risk set	First dispute	No first dispute by threshold	Right-censored
Legacy adapter	3,006	22	2,984	0
Standard V2	27,831	711	27,120	0
Standard V3.1	12,916	102	12,810	4
Standard V4	55,132	144	54,781	207
NegRisk adapter	60,546	625	59,900	21

The observed first-proposal risk sets contain 1,604 first disputes. The mechanism after a first dispute differs by adapter generation. Modern V2, V3.1, V4, and NegRisk paths usually

produce an exact reset linked to a successor request; the legacy route instead proceeds through its own settlement semantics.

Table 7: Observed path after the first dispute. `SETTLE_UPPER_BOUND` is an observed Oracle `Settle` endpoint when no exact decentralized-verification-mechanism result timestamp is available. The reset/successor column is conditional on an observed first dispute. It does not claim that all adapter reset events are dispute-driven; legacy and other non-dispute reset causes remain separate accounting objects. Modern dispute-triggered reset links are exact, while further escalation remains interval-qualified.

Adapter family	First disputes	Reset / successor request	<code>SETTLE_UPPER_BOUND</code>	Right-censored
Legacy adapter	22	0	22	0
Standard V2	711	588	123	0
Standard V3.1	102	85	17	0
Standard V4	144	124	18	2
NegRisk adapter	625	606	18	1

Among modern reset-capable paths, the reset is transient rather than terminal. The successor request is separately identified, and its proposal clock begins at the reset/request generation rather than at the original question initialization. A later dispute can enter a DVM-inclusive branch. For those branches the observed endpoint is the subsequent Oracle `Settle`, coded as an upper bound on the unavailable exact DVM result time.

The ordinary undisputed branch exhibits a different scale. Conditional on first-proposal expiration without dispute, median time from the ordinary finality threshold to observed Oracle `Settle` ranges from 84 seconds on Standard V3.1 to 598 seconds on Standard V4. That short interval is an Oracle-consumption delay, not the full event-to-cash delay. It begins only after the proposal’s liveness has elapsed and ends before holder redemption.

For second-dispute branches, median time from second dispute to Oracle `Settle` upper bound ranges from 242,262 to 322,682 seconds across the observed modern routes. The term “second dispute is request-generation specific: it denotes a first dispute observed on a successor generation (generation number at least one), not a second dispute inside one Oracle request. The frozen successor-generation risk set contains 253 such disputed generations. The result supports a materially longer disputed path, but the exact DVM voting/result clock remains unidentified and is not midpoint-imputed.

8.4 Oracle settlement and adapter consumption

Oracle `Settle` is not automatically protocol settlement finality. A local transaction-adjacency audit finds 75,284 Oracle settle rows with a strictly later adapter terminal log in the same transaction. This establishes an atomic consumption path for that observed subset. Non-adjacent settles are not treated as missing or failed: some adapter paths consume an already-settled request in a later transaction, and the current Oracle-only layer does not identify a request-specific ordinary-finality-threshold-to-adapter-consumption endpoint for every generation.

Accordingly, Paper 5 reports three distinct objects:

1. the ordinary proposal threshold becoming irreversible under the observed request path;
2. the Oracle `Settle` event;
3. the adapter/CTF terminal transition, where observed.

The companion protocol-finality study links these states to Conditional Tokens payout reporting and observed redemption using a separately frozen dataset. It does not fill a missing cross-domain duration with same-block, nearest-time, or transaction-level guesses.

8.5 Address-level governance, proposal quality, and access limits

Proposal and dispute actors are observed as execution addresses. The data do not identify beneficial owners or establish that two addresses belong to distinct economic entities. Concentration measures are therefore address-level execution concentration.

Table 8: Observed Managed Optimistic Oracle proposer concentration and settled-only first-proposal agreement for Standard V4. Concentration is address-level, not beneficial-owner concentration. Agreement is exact ABI-decoded integer equality on the eligible settled subset.

Month	Proposals	Unique proposers	Top-1 share	Top-5 share	HHI	Eligible settled	Exact agreement
2025-08	11	6	0.272727	0.909091	0.190083	11	0.909091
2025-09	13,707	87	0.664770	0.854673	0.454111	13,707	0.997592
2025-10	14,036	67	0.373112	0.693859	0.172417	14,036	0.998290
2025-11	27,378	89	0.453138	0.707320	0.228846	27,102	0.998967

The Standard V4 Managed OO cohort illustrates a governance asymmetry. In September 2025 the largest observed proposer address accounts for 0.664770 of proposal events and the top five for 0.854673; in November the corresponding shares are 0.453138 and 0.707320. Exact first-proposal agreement with the eventual settled price is 0.997592, 0.998290, and 0.998967 in the September–November settled-only cohorts. These are not unconditional accuracy estimates: disputed, unsettled, order-indeterminate, and missing-price cases follow the recorded exclusions.

Observed disputers are more diffuse in the high-volume Managed OO cohort. In November 2025, 64 dispute events are distributed across 39 addresses, with top-one share 0.125000, top-five share 0.312500, and HHI 0.040527. The comparison is descriptive and period-specific; it does not establish an access-policy causal effect.

Historical access configuration remains the binding governance limitation. The separate access/configuration scan observes two `DefaultProposerWhitelistUpdated` events and no requester-access, `RoleGranted`, or `RoleRevoked` event in the scanned event surface. The 61,595 Managed OO request rows are therefore classified as requester/proposer access unresolved rather than retrospectively allowed or denied. No current whitelist or role getter is projected backward.

8.6 Rebuild and claim boundary

A controlled materialization and a clean network-disabled rebuild compare three population files, six analysis files, and seven governance files. All reported analytical files match by SHA-256; Parquet schemas and row counts also match. A content-addressed backup and extraction audit independently verifies the frozen Oracle source archive.

The exact 75-question multi-reset cohort is retained as a diagnostic accounting object rather than assigned a mechanism by coincidence. Seventy-two of the 75 questions have observed dispute evidence in at least one request generation; three have reset evidence without an observed dispute. No literal `Ignore/TooEarly` sentinel is present in the frozen event inventory, so that mechanism is not inferred. The same discipline applies to rule end dates: a `resolutionTime` parameter is not relabelled as contractual decidability.

The empirical claim boundary is now precise. Paper 5 can report exact request generations, observed proposal/dispute/settle paths, right-censoring-aware mechanism durations, address-level concentration, settled-only proposal agreement, and the observed Managed OO configuration timeline. It cannot report an exact DVM result time or value, historical access state before observed updates, beneficial-owner concentration, a resolved historical legacy Finder timeline, or a request-specific ordinary-finality-to-adaptor-consumption duration where the endpoint is not identified.

These results establish the Oracle-finality layer of the paper. Rules and external-source clocks remain separately graded in Part I; Conditional Tokens protocol finality and holder redemption

Table 9: Post-review reconciliation of load-bearing Part I counts. The final column states the strongest claim supported by the frozen evidence.

Object	Count / estimate	Disposition
Initialized adapter-question instances	185,550	Frozen population denominator.
Questions with at least one Oracle request	182,671	Exact question-level count.
Request generations	184,148	Equals 182,671 first generations plus 1,477 successor generations.
Legacy initialization-to-adapter-terminal KM	80,033,650 s	Median reached on 5,829 initialized legacy questions; 2,941 events and 2,888 censored.
Questions with two or more resets	75	Exact cohort: 71 have two resets, three have three, and one has four. The common causal explanation of all historical residual-75 identities is not established.
Residual-75 paths with observed dispute evidence	72	At least one observed dispute appears in the retained request-generation history; three residual-cohort questions have reset evidence without an observed dispute.
Rule-declared end-date proxy	NOT EVALUATED	The frozen corpus contains no separately labelled rule-end-date field that can be promoted to contractual decidability.
Adapter-Oracle relation	Identity join	Exact question/request linkage is established; causal event-to-event ordering is not inferred from the key join alone.

are reported in Part II rather than inferred from the Oracle data. Transition-anchored market microstructure remains a separate empirical design.

9 Rules, Metadata, and the On-Chain Clarification Clock

The adapter and Oracle layers identify how a question moves through the mechanism. They do not, by themselves, identify which rule text traders faced, whether a venue record can be joined to a human-readable market, or when an authoritative clarification entered the on-chain record. The accepted semantic-layer extraction adds those relations while preserving the distinction between a measured mechanism clock and an unmeasured external-evidence clock.

9.1 Population-complete initial rules and observed updates

Every one of the 185,550 cutoff adapter questions has an initial ancillary-data rule record. The versioned corpus contains 185,550 initial versions and 1,570 observed on-chain update versions, for 187,120 rule versions in total. Exact UTF-8 decoding succeeds for 187,119 versions; one decode error remains in the raw corpus. Of the update records, 1,549 are creator-authoritative under the frozen identity rule, 12 are exact but non-authoritative, and nine remain unclassifiable because the frozen identity is missing or non-exact. The creator-authoritative records affect 1,350 distinct adapter questions.

The source parser retains 194,124 literal URL mentions over 818 domains. These counts are not a complete named-source taxonomy: one rule version can contain multiple URLs, many rules name sources in prose rather than by URL, and the historical webpage state behind a URL is generally not frozen. The on-chain corpus is therefore population-complete as a record of initial ancillary data and observed updates, but only partially informative about historical off-chain source content.

Table 10: Rule, metadata, and clock coverage through the verified cutoff. Rates use the denominator stated in the final column; update records are event counts, not unique questions.

Layer	Count	Rate	Denominator / qualification
Initialized adapter questions	185,550	100.00%	cutoff population
Gamma exact stable-identifier match, baseline	654	0.35%	cutoff population
Gamma exact stable-identifier match, nested union	104,032	56.07%	cutoff population
Gamma exact-identifier unmatched	81,518	43.93%	cutoff population
Gamma exact-identifier ambiguous	0	0.00%	cutoff population
Initial on-chain rule versions	185,550	100.00%	cutoff population
Observed on-chain update versions	1,570	—	update records
Exact update timestamps	1,561	99.43%	update records
Creator-authoritative exact updates	1,549	98.66%	update records
Non-authoritative exact updates	12	0.76%	update records
Unclassifiable update identities	9	0.57%	update records
External-source clock: U_UNMEASURED	185,550	100.00%	cutoff population
Contractual-decidability clock: U_UNMEASURED	185,550	100.00%	cutoff population

9.2 Nested Gamma records materially improve exact metadata coverage

The first Gamma pass used the standalone markets transport and produced only 654 exact stable-ID matches. Re-parsing the already frozen event pages reveals 1,815,777 nested market records. Their append-only union with 59,173 standalone market rows contains 1,874,950 transport rows and raises the exact question match to 104,032 of 185,550 questions (56.07%), with 81,518 unmatched and no ambiguous exact matches. The gain is entirely from frozen data; no fuzzy title, slug, date, or nearest-time rule is introduced.

Coverage is strongly route-dependent. Exact-match rates are 98.94% for Standard V4, 97.78% for V3.1, 95.54% for V2, and 48.12% for the legacy adapter, while the original NegRisk adapter has no exact stable-ID Gamma match under the frozen identifier surface. The unmatched residual is therefore not plausibly missing at random. Metadata-conditioned analyses must report adapter composition and cannot silently generalize the 56% exact cohort to the full population.

The metadata gate remains partial despite the large gain. Terminal cursors and exact-ID accounting pass, but repeat-boundary response pages were not frozen. The result is a closed exact relation to the available frozen transports, not proof that Gamma exposed every historical market record at every retrieval boundary.

9.3 The clarification clock is measured on-chain

Exact chain identity—chain, adapter address, block number, transaction hash, and log index—recovers canonical timestamps for 1,561 of the 1,570 accepted update records. This includes all 1,549 creator-authoritative records and 12 non-authoritative records; the nine unclassifiable identities remain explicit, and no conflicting identity is observed. The timestamp is an on-chain clarification/update clock. It is not relabelled as external publication time or as the instant at which the contract became decidable.

Joining creator-authoritative updates to the exact request-generation paths produces 1,711 clarification-request-generation rows. The multiplicity is expected: one question can have more than one request generation after a reset. Table 11 shows that 1,426 rows (83.34%) fall after the technical request but before the first proposal. A further 99 rows occur after an exact reset and before the successor proposal. These observations provide direct population-level

evidence that the rule-governance surface can change while a request already exists and that request creation is not a sufficient semantic start time for adjudication.

Table 11: Position of creator-authoritative on-chain clarifications relative to exact request-generation paths. The unit is a clarification-request-generation relation; one clarification can map to more than one generation.

Ordering class	Rows	Share
Before first request	58	3.39%
Request to first proposal	1,426	83.34%
After first proposal, before first dispute/threshold	17	0.99%
After reset, before successor proposal	99	5.79%
After successor proposal	60	3.51%
After Oracle Settle	51	2.98%
Total exact request-generation rows	1,711	100.00%

The remaining ordering classes require care. Sixty rows place a clarification after a successor proposal and 51 after an Oracle **Settle** for the linked request generation. These rows establish order, not legal or economic effect: the data do not show that an already settled request was retroactively changed, and multiple generations can coexist within one question history. They are retained as governance-path observations rather than folded into a single “pre-resolution clarification” category.

Signed duration tables are available only where both named endpoints are exact. Initialization-to-clarification duration remains unavailable because no exact initialization endpoint is available; request time is not substituted for it. Negative signed values are retained where the declared endpoint order makes them meaningful; no midpoint imputation is used.

9.4 A population-level negative result for external clocks

The frozen evidence does not identify defensible population-level publication times for named external sources. All 185,550 external-source clocks and all 185,550 contractual-decidability clocks remain `U_UNMEASURED`. Current Gamma retrieval fields, technical request creation, proposal, dispute, Oracle settlement, adapter terminal, and clarification block time are not used as proxies.

This negative result changes the interpretation of the Oracle timing results. Request-to-proposal duration is an interval between two mechanism events; it is not “evidence delay” or “resolution delay.” Proposal timing relative to external publication, and whether a proposal was early or late under contemporaneous facts, remain unidentifiable at population scale. The paper can measure rule versions and on-chain clarifications exactly while still being unable to observe the first moment at which the external world supplied a terminal answer.

9.5 Implications for a leveraged overlay

The semantic layer reinforces the state-contingent design argument in three ways. First, the technical-request state is too coarse for margin or funding triggers: most measured clarifications occur after request creation but before proposal. Second, a creator-authoritative clarification is a distinct, verifiable governance transition that can change the interpretation risk of an open position even when no price or Oracle event occurs at the same moment. Third, the absence of a population-wide external clock prevents a venue from calibrating leverage compression to a researcher’s reconstructed “truth time”; any live design must use observable protocol states, explicitly sourced venue attestations, or conservative policy windows rather than a hidden semantic timestamp.

These results do not show that clarifications cause disputes, price moves, or delay. Clarified questions are selected, and the present analysis does not join market-microstructure windows. The causal and price-discovery questions therefore remain outside this paper; the present contribution is a measured rule-governance clock and an explicit boundary on what it is not.

10 Discussion and Implications for Leveraged Design

10.1 The empirical object is a state surface, not a countdown

The results do not show that every event market needs more margin whenever a request is old. They show that request age combines several economically different situations. A question can be technically requested but not yet semantically decidable; it can have a live undisputed proposal; it can be inside a first-dispute reset; or it can be awaiting later adjudication. A single countdown from initialization cannot distinguish those states.

A later risk engine needs at least the adapter-question identity, active request generation, proposal value and liveness state, dispute/reset history, contemporaneous rule version, observation grade, oracle settlement, adapter terminality, and the downstream Part II state.

Design Principle 1 (State variables must follow the mechanism). A risk control should not use one scalar “resolution time” when feasible next actions and remaining exposure depend on request generation, dispute history, rule state, and finality layer.

10.2 State-triggered collateral and leverage

The reconstruction supports an architecture in which collateral and leverage change at verified state transitions rather than only through realized volatility or scheduled time. Candidate triggers include first terminal-valued proposal, first dispute, reset, successor proposal, ordinary liveness expiry, oracle finality, and adapter terminality.

Part I does not select the optimal trigger. Paper 6 tests whether state-triggered controls can reduce the pre-emption trade-off identified in Paper 1 without worsening bad debt.

10.3 Actor control and trigger manipulability

A transition is not safe as a risk trigger merely because it is observable on-chain. If an actor with a large event-linked position can cause or accelerate a proposal, dispute, or reset, the control can transfer value. A trigger must therefore be evaluated against actor access, external state-contingent exposure, bond/fee/penalty, and value transferred through margin, liquidation, auction, or conversion.

Paper 3 supplies the manipulation taxonomy and Paper 6 formalizes the accounting test. Part I establishes the historical actor/access surface but does not infer intent or beneficial ownership.

10.4 Funding during long-lived request contexts

Modern request-to-proposal medians are measured in days, but the request clock can start before semantic readiness. Funding that scales mechanically with request age can therefore transfer value before the event is contractually decidable.

A defensible design distinguishes basis funding supported by an executable convergence loop, finality carry for capital locked in a verified post-result state, custody/service charges, and policy transfers unrelated to basis convergence. Hidden research-only clocks are unsuitable live inputs.

10.5 Rule updates and governance

A technical request can predate a creator-authoritative rule update that later shapes adjudication. A system that freezes rule state at initialization would misrepresent the observed governance surface. A system that uses the latest text without versioning would back-project later clarifications into earlier proposals.

The minimum auditable design stores the initial rule, each authoritative update, exact ordering relative to proposals/disputes, source/content hash, and an explicit policy for prospective or interpretive effect. The empirical ordering alone does not decide retroactivity.

10.6 Oracle finality is not protocol or cash finality

Part I stops at the adapter boundary. A successful oracle value can be irreversible yet not have been consumed; an adapter can be terminal while payout recording or holder redemption remains a separate observation. Part II reports those downstream states from its separately frozen protocol dataset.

This boundary matters for margin release, conversion, and cash-equivalent valuation. A design cannot release all collateral merely because an oracle request is settled if delivery, protocol payout, or custody remains unresolved. Holder inaction after redeemability should not be mislabeled as oracle delay.

10.7 Implications for Papers 6 and 9

Paper 6 receives state/trigger definitions, exact request paths, durations, actor-control variables, rule-version marks, and finality endpoints. Paper 9 receives the same objects at leg level and studies asynchronous finality. Detailed conversion accounting, auctions, collateral envelopes, and shared-capacity constraints are intentionally not duplicated here.

11 Limitations

Population unit. The population is complete for the frozen adapter-address/question-ID scope, not necessarily for unique economic markets across migrations, wrappers, or duplicated listings.

Cutoff censoring. Questions and generations without a terminal event at the cutoff are right-censored. They do not establish permanent non-resolution.

External semantic clocks. External-source publication and contractual decidability remain unmeasured population-wide. The paper cannot estimate truth-to-proposal or truth-to-finality latency for the full cohort.

Later-dispute timing. Exact DVM result time and value are not observed. Dispute-to-later settlement is an inclusive interval or upper bound, not a point estimate of voting duration.

Access and identity. Historical Managed Optimistic Oracle access state is partial observed-only. Proposal/dispute concentration is address-level; beneficial ownership, relayers, and common control are not identified.

Clarification interpretation. Clarification timing establishes order and authorship, not causal, legal, or retroactive effect. The on-chain rule corpus does not reconstruct every historical webpage or named-source update.

Metadata selection. Exact Gamma coverage is incomplete and route-dependent. Metadata-conditioned results apply to the exact matched cohort.

Proposal quality. Exact final-value agreement is not an unconditional accuracy score and does not establish timeliness under contemporaneous rules.

Administrative rationale. On-chain evidence can show pause, flag, reset, manual handling, proposal, dispute, and settlement. It does not reveal motive or private communication.

Price and liquidity transitions. Part I does not promote unexecuted price/book analyses as results. Public fills do not recover the address-level quote lifecycle established as unavailable in Paper 4.

Downstream finality. Part I stops at adapter terminality by design. CTF payout recording and observed redemption are estimated in the companion Part II and are not pooled into Part I. Neither analysis claims total entitlement redeemed, unredeemed value, or complete holder cash realization without the corresponding entitlement denominator.

Venue scope. Results are Polymarket-specific. Kalshi comparison requires native state reconstruction and aligned endpoints rather than label matching.

Design scope. State-triggered margin, provisional settlement, auction, and claim conversion are mechanism families evaluated in Paper 6, not deployable specifications proved here.

Data disclosure boundary. The article reports aggregate event, timing, and governance results; raw address-level and restricted reconstruction materials are not distributed.

Reset-cause identification. The frozen state and event layers identify an exact cohort of 75 questions with two or more resets, but they do not establish one common causal mechanism for every arithmetic residual of the same cardinality. In particular, no distinct `Ignore/TooEarly` event literal is observed, so the paper does not attribute the cohort to that branch.

Rule-declared end dates. A bounded audit found no separately labelled rule-end-date field that can be interpreted as contractual decidability across the frozen population. The observed `resolutionTime` parameter is not promoted to that semantic clock. The end-date proxy analysis is therefore reported as not evaluated rather than filled by a technical timestamp.

12 Conclusion

Polymarket adjudication is a versioned, multistate process rather than a scalar timestamp. Through Polygon block 79,721,080, the accepted adapter layer contains 350,703 decoded cutoff logs and 185,550 initialized adapter questions. Exact Oracle extraction adds 504,332 lifecycle events comprising 184,148 requests, 159,447 proposals, 1,604 disputes, and 159,133 settlements. Request generations are linked without nearest-time or question-ID-only fallback.

The central timing result separates technical context from active adjudication. Modern request-to-first-proposal medians are measured in days, while reset-to-successor-proposal medians are measured in minutes or tens of minutes. The first interval can begin before sufficient evidence, contractual decidability, or even a creator-authoritative clarification. The second begins after a contested proposal inside an active path.

The rule layer reaches the same conclusion from a different direction. Every cutoff question has an initial on-chain rule version, the versioned ledger contains 1,570 updates, and 1,549 creator-authoritative updates receive exact timestamps. Among 1,711 exact clarification-generation relations, 1,426 occur after request creation but before first proposal.

At the same time, external-source publication and contractual-decidability time remain unmeasured population-wide. Current metadata, proposal time, oracle settlement, adapter terminality, and clarification block time are not substitutes. The paper reconstructs governance while refusing to fabricate a truth-to-resolution clock.

For leveraged design, request generation, dispute path, rule version, state occupation, actor access, and observation grade are balance-sheet inputs. A control that sees only scheduled resolution time or current volatility misses whether a question is merely requested, clarified, proposed, disputed, reset, oracle-final, or adapter-terminal. Paper 6 evaluates the resulting mechanism choices; Paper 9 extends them to asynchronous multi-leg finality.

Post-review reconciliation strengthens the accounting boundary. The legacy initialization-to-adapter-terminal Kaplan–Meier median is 80,033,650 seconds on the full 5,829-question legacy cohort. The request-generation identity closes exactly at 182,671 request-bearing questions plus 1,477 successor generations. An exact 75-question multi-reset cohort is retained, but the frozen event inventory does not justify assigning one common **Ignore/TooEarly** cause; the paper reports that non-identification rather than converting a cardinality match into a causal claim.

The companion Part II follows the downstream protocol path through Conditional Tokens payout recording and observed redemption using a separately frozen fixed-snapshot dataset. The split preserves the central result: adjudication, protocol settlement, and holder realization are different states, and each is measurable only to the extent that its own evidence and denominator support it.

A Operational Entity, State, and Clock Dictionary

The data model separates economic questions, oracle request generations, protocol conditions, and holder redemptions. The distinction prevents a venue-facing “market” identifier or a final timestamp from silently replacing technically different objects.

A.1 Entity hierarchy

Table 12: Canonical entity hierarchy used across Parts I and II.

Entity	Canonical key	Analytical role
Economic question	Adapter address plus question identifier	Rule versions, clarifications, request chain, terminal adapter path
Oracle request generation	Request-family-specific tuple plus deterministic hash	Proposal, liveness, dispute, reset, later adjudication, oracle settlement
Proposal or dispute	Transaction hash plus log index	Actor, value, bond, timing, and challenge path
Adapter terminal event	Adapter address, question ID, transaction hash, log index	Part I endpoint and bridge to downstream protocol state
Conditional Tokens condition	Condition identifier derived from oracle, question ID, and slot count	Payout numerators, denominator, and protocol redeemability in the companion Part II
Holder redemption	Condition, redeemer, transaction hash, log index	Observed collateral realization in the companion Part II

The successful request is not assumed to be the latest request by timestamp. It is the request whose value is actually consumed by the adapter or whose verified exceptional branch produces the terminal adapter outcome.

A.2 Question-level states

Table 13: Question-level states and attached clocks.

State or clock	Observation type	Operational definition
Initialized	Exact on-chain	Adapter initialization for an exact adapter-question key
Evidence sufficient	Point, interval, or unmeasured	Named source contains sufficient rule-relevant evidence
Contractually decidable	Point, interval, or unmeasured	Contemporaneous rule permits a terminal answer
Clarification mark	Exact on-chain	Creator-authoritative or other versioned rule update; not terminal
Paused or flagged	Exact on-chain where observed	Administrative safety state; dormant source-code capability is not coded as observed
Oracle final	Exact or interval-qualified	Successful request is irreversible under the ordinary challenge path and consumable
Adapter terminal	Exact on-chain	Terminal transition emitted by the requesting adapter
Protocol final	Exact on-chain, the companion Part II	Conditional Tokens payout vector recorded
Holder redeemed	Exact on-chain per holder, the companion Part II	Successful redemption linked to condition and redeemer

A.3 Request-generation states

A.4 Ordering and rule versions

On-chain records are canonically ordered by block number and log index, with transaction hash as a stable tie-break and transaction index retained as auxiliary metadata where available. Events in one block can be ordered but do not have separately observed wall-clock duration. A reverted transaction produces no state transition.

For question q , the contemporaneous rule process is a right-continuous marked sequence

$$\rho_q(t) = \rho_{q0} + \sum_{j=1}^{J_q} \Delta \rho_{qj} \mathbf{1} \left[t \geq t_{qj}^{\text{clarify}} \right]. \quad (23)$$

Each mark stores exact author classification, chain identity, raw content or content hash, and observation status. A proposal is paired with the last verified rule version preceding the proposal in canonical chain order. Later text is never backfilled.

A.5 Observation grades

- E — Exact** Exact on-chain event, exact primary-source timestamp, or deterministic state transition.
- I — Interval** A bounded interval from exact primary evidence.

Table 14: Request-generation states.

State	Observation type	Operational definition
Request created	Exact on-chain	Requester, identifier, request fields, ancillary data, and linked adapter question
Awaiting proposal	Derived exact interval	Request creation until proposal, reset, non-standard termination, or censoring
Proposed-any	Exact on-chain	Any proposed value, including ignore or too-early
Proposed-terminal	Exact on-chain	Proposed value belongs to the supported terminal payout set
Liveness	Derived interval	Proposal until dispute, ordinary expiry, replacement, or censoring
Disputed	Exact on-chain	Verified dispute event and actor
Reset	Exact on-chain	Adapter reset and successor-request relation; transient, not absorbing
Later adjudication	Exact/interval	Later-dispute branch whose result time may be interval-observed
Oracle settled	Exact/interval	Request value set or first verifiably consumable
Superseded	Derived	Request no longer governs after exact successor creation
Right-censored	Cutoff exact	No observed next state by the locked boundary

S — Snapshot

Current or terminal state observed without transition history.

Prx — Proxy Documented but functionally imperfect substitute.

U — Unmeasured

Unsupported clock; excluded from primary latency estimation.

X — Conflicting

Load-bearing evidence disagrees.

Grades are clock-specific rather than question-wide. A question can have an E adapter-terminal time and an U external-source time.

B Estimands, Denominators, and Gate Consequences**B.1 Population and path estimands**

Primary population estimands include:

- adapter questions by route and cutoff state;
- request generations per adapter question;
- exact proposal, dispute, reset, settlement, and adapter-terminal path counts;
- right-censoring counts and risk-set age;
- rule versions and clarification events;
- exact metadata match and attrition counts.

Every percentage names its denominator. Event counts are not silently converted into unique-question counts.

B.2 Duration estimands

Mechanism intervals include:

$$\begin{aligned}
D_{qk}^{RP} &= t_{\text{proposal}}^{(k)} - t_{\text{request}}^{(k)}, \\
D_{qk}^{RS} &= t_{\text{proposal}}^{(k+1)} - t_{\text{reset}}^{(k)}, \\
D_{qk}^{OS} &= t_{\text{settle}}^{(k)} - t_{\text{ordinary threshold}}^{(k)}, \\
D_q^{AT} &= t_{\text{adapter-terminal}} - t_q^{\text{init}}.
\end{aligned}$$

Kaplan–Meier and competing-risk summaries follow the standard distinction between right censoring and alternative destinations (Aalen and Johansen, 1978; Kaplan and Meier, 1958). The first quantity is not evidence delay unless source and decidability clocks are independently observed. Later-dispute durations are represented by exact intervals or upper bounds when the data-verification-mechanism result timestamp is absent.

B.3 Governance estimands

Proposal and dispute concentration is computed over execution addresses, using top shares and the Herfindahl–Hirschman index. Results are not described as beneficial-owner concentration. Proposal agreement is measured only on the exact eligible settled subset and reports its denominator and attrition.

Clarification ordering uses the relation between one creator-authoritative update and one exact request generation. One update can therefore contribute several rows when the question has several generations.

B.4 Gate consequence matrix

Table 15: Mandatory claim consequence of a failed gate.

Gate	Failure	Consequence
Population	Adapter denominator not closed	Stop population rates; report registry and unresolved scope only
Decode	ABI/topic coverage incomplete	Exclude affected event family; retain raw envelope and anomaly
Linkage	Request cannot be exactly linked	Stop generation-path inference for affected rows; no temporal fallback
Clock	Required clock ungraded or unjustifiably point-valued	Use interval language or remove duration claim
Rule	Contemporaneous rule state unavailable	Remove rule-timing or early/late interpretation
Source	Evidence publication unavailable	Retain mechanism intervals; remove truth/source latency claim
Access	Historical access state unavailable	Report address concentration without access-regime comparison
Downstream finality	Protocol payout/redemption is outside the Part I estimand set	Report the claim in the companion Part II; do not infer it from Part I
Rebuild	Reported analytical outputs do not reproduce	No result based on those outputs is reported

B.5 Claim-strength labels

Every result is one of:

Population fact

Deterministic count or distribution on the frozen population.

Descriptive association

Estimated relationship without causal interpretation.

Interval observation

Event order or duration bounded but not point-observed.

Formal implication

Algebraic or state-representation result under explicit assumptions.

Design implication

Constraint on a later mechanism, not a production-safety claim.

C Source, Contract, and Claim Audit Protocol

Mechanism documentation, deployed addresses, verified source, dependency configuration, and historical invocation can change independently. Claims therefore follow an explicit source hierarchy.

C.1 Source hierarchy

For historical mechanism claims, evidence is ranked as follows:

1. on-chain bytecode, logs, storage, traces, and verified state at the relevant block;
2. verified source matched to deployed bytecode and pinned to an immutable hash;
3. signed governance proposal, deployment record, or official versioned specification;
4. frozen official documentation with retrieval time and content hash;
5. mutable current documentation;
6. secondary discussion or reporting.

Lower-ranked evidence can motivate a search but cannot override higher-ranked historical evidence. Conflicts are reported rather than resolved rhetorically.

C.2 Claim predicates

Every mechanism statement receives one predicate:

DOCUMENTED

Official documentation currently states the behavior.

CAPABLE Bytecode-matched source permits the behavior.

CONFIGURED

Historical state shows the relevant parameter or access control.

OBSERVED

A transaction, event, trace, or state transition shows that the behavior occurred.

INFERRED

A transparent inference from established facts; assumptions are stated.

“The adapter can manually resolve” is CAPABLE. “Question q was manually resolved” requires OBSERVED evidence. Current access configuration is never projected backward without historical state.

C.3 Evidence freeze

A reproducibility-grade evidence freeze includes:

- deployed-address and proxy/implementation registry;
- runtime bytecode and source hashes;

- adapter dependency map;
- ABI/event-topic registry;
- source-claim matrix;
- initialized-question-weighted coverage audit;
- unresolved-items register with claim consequences;
- commands, software environment and revision, input/output hashes, row counts, and documented interventions.

A repository’s current default branch is not presumed to represent an older deployed adapter.

C.4 Historical-state discipline

The following are not back-projected from current values:

- proposer whitelist membership and enforcement;
- administrative roles;
- bond and liveness parameters;
- adapter-to-oracle dependencies;
- rule and clarification state;
- collateral and redemption routes.

When exact historical state is unavailable, the record remains interval-observed or unresolved and the corresponding claim is narrowed.

D Proofs and Formal Audit

Proof of Proposition 1. Let history H_0 end with a proposal on the first active request and let H_1 end with a proposal on a successor request created after the question’s first dispute and reset. A coarse representation omitting request generation gives the same current value:

$$\tilde{S}_q(t; H_0) = \tilde{S}_q(t; H_1) = \text{Proposed}.$$

Apply an otherwise identical valid dispute to the active request in each history. Under the branch assumed in the proposition, the dispute following H_0 permits a successor-request transition, whereas the dispute following H_1 exposes the later-adjudication branch. The feasible next-state set differs despite the same coarse state. Hence the transition law depends on omitted history, and active request generation or an equivalent sufficient variable is required. $\square$

Proof of Proposition 2. Let paths P and P' share $(Y_q, t_{\text{adapter-terminal}})$. Any function of that scalar pair assigns them the same value. From (13),

$$Z_q(P) - Z_q(P') = \sum_{j \in \mathcal{J}} h_j [\Omega_{qj}(P) - \Omega_{qj}(P')].$$

By assumption, the occupation-vector difference is not orthogonal to $\mathbf{h}$, so the right-hand side is non-zero. Therefore the path-dependent functional cannot be recovered from the common scalar terminal pair. $\square$

Lemma 3 (Transport invariance of derived state). *Fix a contract/topic registry, inclusive block interval, canonical event identity, decoder, and deterministic state builder. If two providers return the same canonical event identities and semantic payloads over the interval, the derived state tables are identical up to non-semantic file metadata.*

Proof. The state builder consumes the canonically ordered event set and fixed registries. Equal identities and semantic payloads imply equal ordered inputs. Every state transition and derived relation agrees by induction over that order. Provider page boundaries, JSON formatting, retrieval time, and file metadata do not enter the state function. $\square$

D.1 Formal-claim boundary

The propositions are representation and identification results. They do not prove that a particular risk engine is optimal, that all historical questions used every source-code branch, or that the missing external clocks can be recovered from on-chain timing. Numerical examples and figures are explanatory rather than proof substitutes.

E Reproducibility and Evidence Lineage

The companion materials are evidence-graded and versioned. Transport is treated as a means of reconstructing immutable event relations rather than as the relations themselves. Population, transport, analysis, and disclosure roles remain distinct.

E.1 Analytical table families

The reported evidence includes adapter questions and events, Oracle request generations and lifecycle events, question–request relations and path summaries, versioned rules and clarifications, exact metadata matches and attrition, and the Part I estimand and gate tables. Protocol payout and redemption relations use the separately frozen downstream dataset considered in Part II.

E.2 Identity and temporal fields

Chain-event identity retains chain, contract, transaction hash, and log index. Repeated source observations do not create additional canonical events; they remain provenance edges. Conflicting payloads under one canonical identity are retained as conflicts. Question and request identifiers remain separate because a reset can create a successor request generation without creating a new economic question.

Each timestamp records its clock type, point or interval representation, observation grade, source identity, and block/transaction/log order where applicable. Unmeasured external clocks remain explicit unavailable coordinates rather than being filled with request or settlement time.

E.3 Coverage and provenance

Every target-event range records chain ID, contract, topic, inclusive block range, split lineage, provider, response status, row count, and canonical-event digests. A range is terminal only when its response is successful and below the applicable cap, or when exact single-block pagination is complete. A broad first-page response does not prove coverage.

The durable event layer preserves complete topics and data, exact identity, decoder revision, semantic hashes, range provenance, and deterministic audit samples. Missing or malformed load-bearing identity prevents use of the affected event in the corresponding claim. Auxiliary metadata remains explicitly missing when unavailable, and semantic conflicts are not resolved by latest-file or latest-provider heuristics.

E.4 Public reproducibility boundary

The public companion supplies aggregate and privacy-reviewed material needed to assess the reported claims. It does not provide ranked pseudonymous addresses when aggregates suffice. The accompanying documentation describes the relevant schema, methodology, limitations, processing lineage, descriptive statistics, and citation metadata. Later observation windows are treated as new versions rather than silent extensions of the fixed snapshot.

F Version-Locked Hypotheses and Disposition

The integrated analysis fixed nine directional hypotheses before the final accepted result layers were inspected. The split into Parts I–II and Papers 6 and 9 does not permit those hypotheses to be rewritten after inspection. Table 16 records their status.

Table 16: Disposition of the version-locked hypotheses after the paper split.

Hypothesis family	Status in Part I	Consequence
Upper-tail finality duration	Partially measured; original decision-ready endpoint unavailable	Technical request/reset/settlement intervals are reported; the source-conditioned hypothesis is not evaluated as stated.
Partial convergence at first terminal proposal	Price and liquidity layer not evaluated in Part I	No convergence effect is promoted in Part I.
Liquidity during the post-evidence finality gap	Unmeasured external clock and price/liquidity layer	Outside the Part I analytical scope; no substitute clock is used.
Clarification-path association	Timing component measured; path-association claim pending	Exact clarification ordering is reported without causal or incidence language beyond the accepted tables.
Request-level proposal-access trade-off	Access history partial observed-only	Address concentration is reported; access-regime effects remain unestimated.
Finality wedge and duration	Price and liquidity layer not evaluated in Part I	Formal estimand retained; no numerical claim.
Bond-scaling mismatch	Outside the Part I analytical scope	Not a Part I result.
State-triggered margin and conversion	Outside the Part I analytical scope	Not a Part I result.
Administrative-route rarity and materiality	Rarity observed; value materiality blocked	Observed administrative counts are reported; economic materiality is not claimed.

The technical-initialization placebo remains a validity control rather than a substantive tenth hypothesis. A convergence response around initialization comparable to proposal/finality transitions would require an identifier and leakage audit before supporting proposal-effect language.

Data and Code Availability

The article reports aggregate event, timing, and governance results; raw address-level and restricted reconstruction materials are not distributed.

Generative AI Disclosure

OpenAI ChatGPT and Codex were used for editorial and technical assistance during manuscript preparation. The author made all substantive research decisions, reviewed the final manuscript, and assumes full responsibility for its contents.

Funding

This research received no external funding.

Competing Interests

The author is affiliated with the Research Department of Devnull FZCO and leads the ForesightFlow research programme. No external sponsor influenced the research design, analysis, interpretation, or decision to publish. The article does not evaluate a commercial product or make investment recommendations.

Acknowledgments

This work was completed within the ForesightFlow research programme. All remaining errors are the author’s responsibility.

References

- Aalen, Odd O. and Soren Johansen (1978). “An Empirical Transition Matrix for Non-Homogeneous Markov Chains Based on Censored Observations”. In: *Scandinavian Journal of Statistics* 5.3, pp. 141–150.
- Adler, John, Ryan Berryhill, Andreas Veneris, Zissis Poulos, Neil Veira, and Anastasia Kastania (2018). “Astraea: A Decentralized Blockchain Oracle”. DOI: 10.48550/arXiv.1808.00528. arXiv: 1808.00528.
- Andersen, Per Kragh, Ornulf Borgan, Richard D. Gill, and Niels Keiding (1993). *Statistical Models Based on Counting Processes*. New York: Springer.
- Committee on Payment and Settlement Systems and Technical Committee of IOSCO (2012). *Principles for Financial Market Infrastructures*. International standard. Bank for International Settlements and International Organization of Securities Commissions. URL: <https://www.bis.org/cpmi/publ/d101a.pdf> (visited on 08/13/2026).
- Eskandari, Shayan, Mehdi Salehi, Wanyun Catherine Gu, and Jeremy Clark (2021). “SoK: Oracles from the Ground Truth to Market Manipulation”. In: *Proceedings of the 3rd ACM Conference on Advances in Financial Technologies*. DOI: 10.1145/3479722.3480994. arXiv: 2106.00667.
- Fine, Jason P. and Robert J. Gray (1999). “A Proportional Hazards Model for the Subdistribution of a Competing Risk”. In: *Journal of the American Statistical Association* 94.446, pp. 496–509. DOI: 10.1080/01621459.1999.10474144.
- Hanson, Robin (2003). “Combinatorial Information Market Design”. In: *Information Systems Frontiers* 5.1, pp. 107–119. DOI: 10.1023/A:1022058209073.
- Kaplan, Edward L. and Paul Meier (1958). “Nonparametric Estimation from Incomplete Observations”. In: *Journal of the American Statistical Association* 53.282, pp. 457–481. DOI: 10.1080/01621459.1958.10501452.
- Kota, Tarun (2026). “Design and Evaluation of Multi-Agent AI Oracle Systems for Prediction Market Resolution”. DOI: 10.48550/arXiv.2605.30802. arXiv: 2605.30802.
- MacKinlay, A. Craig (1997). “Event Studies in Economics and Finance”. In: *Journal of Economic Literature* 35.1, pp. 13–39.
- Manski, Charles F. (2006). “Interpreting the Predictions of Prediction Markets”. In: *Economics Letters* 91.3, pp. 425–429. DOI: 10.1016/j.econlet.2005.12.004.

- Mühlberger, Roman, Stefan Bachhofner, Eduardo Castelló Ferrer, Claudio Di Ciccio, Ingo Weber, Maximilian Wöhrer, and Uwe Zdun (2020). “Foundational Oracle Patterns: Connecting Blockchain to the Off-Chain World”. In: *Business Process Management: Blockchain and Robotic Process Automation Forum*. Springer, pp. 35–51. DOI: 10.1007/978-3-030-58779-6_3. arXiv: 2007.14946.
- Nechepurenko, Maksym (2026a). *A Taxonomy of Event-Linked Perpetual Futures: Design Axes, Failure Modes, and Empirical Evaluability*. SSRN abstract 6748298; arXiv:2605.10428. DOI: 10.2139/ssrn.6748298. arXiv: 2605.10428 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748298>.
- (2026b). *Fill-Side Non-Retail Trading on Polymarket: Identification Limits, Behavioral Tiers, and Microstructure Signatures*. SSRN abstract 6751284; arXiv title differs: Fill-Side Behavioral Concentration on Polymarket: Identification Limits under Record-Level Attribution. DOI: 10.2139/ssrn.6751284. arXiv: 2605.11640 [q-fin.TR]. URL: <https://ssrn.com/abstract=6751284>.
- (2026c). *Manipulation, Informed Trading, and Regulation in Leveraged Event-Linked Markets*. SSRN abstract 6748318; arXiv:2605.10486. DOI: 10.2139/ssrn.6748318. arXiv: 2605.10486 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748318>.
- (2026d). *Resolution-Aware Perpetual Futures on Binary Prediction Markets: Failure Modes and Mechanical Stress Tests Using Polymarket Data*. SSRN abstract 6748278; arXiv:2605.10400. DOI: 10.2139/ssrn.6748278. arXiv: 2605.10400 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748278>.
- Polymarket (2026a). *BulletinBoard Solidity Source*. URL: <https://github.com/Polymarket/uma-ctf-adapter/blob/8b76cc9e0d46c6f7450a0adb0ddc0f5b0568c9cc/src/mixins/BulletinBoard.sol> (visited on 07/12/2026).
- (2026b). *Polymarket Perps FAQ*. URL: <https://docs.polymarket.com/perps/faq> (visited on 07/12/2026).
- (2026c). *Polymarket Perps: Markets*. URL: <https://docs.polymarket.com/perps/learn-about-trading/markets> (visited on 07/12/2026).
- (2026d). *Resolution*. URL: <https://docs.polymarket.com/concepts/resolution> (visited on 07/12/2026).
- (2026e). *Resolution Subgraph: Polygon Adapter Data Sources and Resolution Mappings*. Operational source freeze; adapter registry and event-handler configuration pinned at commit 75d1818547862a5bd3477ed2e6b16f693d42dab6. URL: <https://github.com/Polymarket/resolution-subgraph> (visited on 07/13/2026).
- (2026f). *UMA CTF Adapter*. URL: <https://github.com/Polymarket/uma-ctf-adapter> (visited on 07/12/2026).
- (2026g). *UmaCtfAdapter Auth Solidity Source*. URL: <https://github.com/Polymarket/uma-ctf-adapter/blob/8b76cc9e0d46c6f7450a0adb0ddc0f5b0568c9cc/src/mixins/Auth.sol> (visited on 07/12/2026).
- (2026h). *UmaCtfAdapter Solidity Source*. URL: <https://github.com/Polymarket/uma-ctf-adapter/blob/8b76cc9e0d46c6f7450a0adb0ddc0f5b0568c9cc/src/UmaCtfAdapter.sol> (visited on 07/12/2026).
- Turnbull, Bruce W. (1976). “The Empirical Distribution Function with Arbitrarily Grouped, Censored and Truncated Data”. In: *Journal of the Royal Statistical Society: Series B* 38.3, pp. 290–295. DOI: 10.1111/j.2517-6161.1976.tb01597.x.
- UMA (2026a). *How Does UMA’s Oracle Work?* URL: <https://docs.uma.xyz/protocol-overview/how-does-umas-oracle-work> (visited on 07/12/2026).
- (2026b). *ManagedOptimisticOracleV2*. URL: <https://docs.uma.xyz/developers/managedoptimisticoraclev2> (visited on 07/12/2026).

- UMA (2026c). *ManagedOptimisticOracleV2: Default Proposer Whitelist*. URL: <https://docs.uma.xyz/developers/managedoptimisticoraclev2/default-proposer-whitelist> (visited on 07/12/2026).
- (2026d). *ManagedOptimisticOracleV2: Proposing Programmatically*. URL: <https://docs.uma.xyz/developers/managedoptimisticoraclev2/proposing-programmatically> (visited on 07/12/2026).
- (2026e). *Verification Guide: Polymarket and YES_OR_NO_QUERY*. URL: https://docs.uma.xyz/verification-guide/yes_or_no (visited on 07/12/2026).
- Wolfers, Justin and Eric Zitzewitz (2004). “Prediction Markets”. In: *Journal of Economic Perspectives* 18.2, pp. 107–126. DOI: 10.1257/0895330041371321.