

Resolution Is Not Settlement, Part II: Protocol Finality and Observed Redemption on Polymarket

Maksym Nechepurenko

Research Department of Devnull FZCO, Dubai, UAE
maksym@devnull.ae ORCID 0000-0002-9515-8841

August 2026 | Version r0.6.1

Abstract

An Oracle result is not yet a protocol payout, a redeemable position is not yet collateral in a holder's account, and a redemption event is not a complete measure of economic entitlement. This companion paper develops an event-sourced framework for Polymarket conditions from preparation through protocol finality and observed holder realization.

The empirical design uses three Conditional Tokens Framework event families derived from a pinned contract application binary interface (ABI): `ConditionPreparation`, `ConditionResolution`, and `PayoutRedemption`. It separates the contract-wide acquisition universe from the frozen Polymarket adapter-question cohort. The exact bridge contains 108,638 linked conditions. Of these, 99,283 have an observed protocol-resolution event by the fixed snapshot at Polygon block 90,114,204 (2026-07-12T17:11:41Z).

Among resolved exact-linked conditions, 92,158 have an observed redemption of any amount and 91,817 have an observed positive-payout redemption; condition-specific Kaplan–Meier medians from first protocol resolution are 182 and 200 seconds respectively. The exact-linked payout taxonomy contains 53,847 canonical (0,1) vectors, 45,024 canonical (1,0) vectors, 410 fifty-fifty vectors, two other valid vectors, and 9,355 conditions with no observed resolution. Cross-contract Oracle–adapter–protocol ordering is reported conservatively: 823 conditions have an interval-qualified terminal generation, 48 have multiple candidate generations, 91,638 have no compatible terminal generation in the frozen evidence, and 16,129 are right-censored or otherwise unevaluable.

The formal results show that Oracle finality does not identify protocol finality, protocol finality does not identify holder realization, and redemption events alone do not identify the fraction of entitlement redeemed without an independent balance-consistent entitlement denominator. The paper therefore reports observed event timing and payout realization without claiming G-VALUE, outstanding winning-token supply, or unredeemed collateral value.

Keywords: prediction markets; event-linked perpetual futures; finality; Polymarket.

JEL: G13, G14, G18.

1 Introduction

A prediction market can have a final oracle result while its protocol payout vector remains unrecorded. A payout vector can be recorded while no holder has redeemed. A holder can be technically able to redeem and nevertheless defer or never exercise that action. Treating these states as one timestamp conflates adjudication, protocol accounting, asset availability, and holder behavior.

The distinction is economically material whenever an event claim is financed, margined, converted, or used as collateral. A lender cannot regard an oracle result as cash if the adapter has not consumed it, the Conditional Tokens Framework (CTF) has not recorded payouts, or the relevant claim has not been converted into collateral under an enforceable rule. Conversely,

delayed holder action after protocol finality need not indicate a protocol defect. It can reflect transaction costs, batching, custody operations, gas conditions, zero-payout cleanup, portfolio policy, or simple inattention. The same observed delay can therefore belong to different balance sheets and different actors.

Part I reconstructs Polymarket’s semantic and oracle layer through the adapter-terminal transition (Nechepurenko, 2026d). It shows that technical request creation, proposal, dispute, reset, oracle settlement, and adapter consumption are distinct states. Part II begins at the protocol layer. It asks when a condition is registered, when its ordered payout vector becomes the contract’s redemption rule, when the first holder action appears, and which value claims remain unidentified without a complete entitlement denominator.

The downstream acquisition layer spans the pinned Conditional Tokens contract over a fixed block interval, while the scientific population remains the frozen adapter-question cohort inherited from Part I. This distinction is load-bearing: a contract-wide event total is a coverage and transport result, not the denominator for a Polymarket cohort rate. Every population estimate in Part II therefore enters only after exact protocol identity has linked an event back to the frozen cohort.

1.1 Why protocol finality deserves a separate paper

A single phrase such as “the market resolved” can refer to at least four different events:

1. the oracle answer is no longer contestable through the ordinary path;
2. the adapter has consumed that answer and reached a terminal state;
3. the conditional-token contract has recorded payout numerators;
4. a holder has redeemed a position into collateral.

These events can share one block timestamp, occur in different transactions, or be separated by a long interval. Their ordering also depends on the emitted logs. In a standard downstream call, the adapter can invoke the protocol payout function before emitting its own terminal event. It is therefore incorrect to force the companion papers into a rigid timestamp sequence in which “adapter finality” always precedes “protocol finality.” The correct object is an exact event graph with block, transaction, and log-order keys.

The protocol layer creates a further identification problem that does not arise at the oracle layer. Redemption logs reveal actions that occurred. They do not directly reveal the total quantity of winning positions that could have been redeemed. Without a balance-consistent entitlement denominator, the event ledger supports an observed payout curve but not the fraction of all entitlement completed. This distinction is especially important when a leveraged design attempts to use delayed redemption as a measure of protocol risk or capital lock-up.

1.2 Companion-paper boundary

The two parts use one frozen adapter-question cohort but different primary units. Part I uses the adapter-question and oracle request generation. Part II uses the condition, condition-resolution event, and redemption event. The boundary is analytical rather than an assertion that the adapter-terminal log must precede the protocol-resolution log. Both can arise within one downstream call, and their observed order is determined by canonical log indices. Figure 1 fixes this division of responsibility.

Condition preparation belongs to the protocol architecture but is not a finality event. It can occur before the external event, before an oracle request becomes answerable, and before any terminal information exists. Protocol finality begins when the payout rule is recorded. Redeemability follows from that rule and the deployed contract state. Redemption is later still: it is an observed holder action.

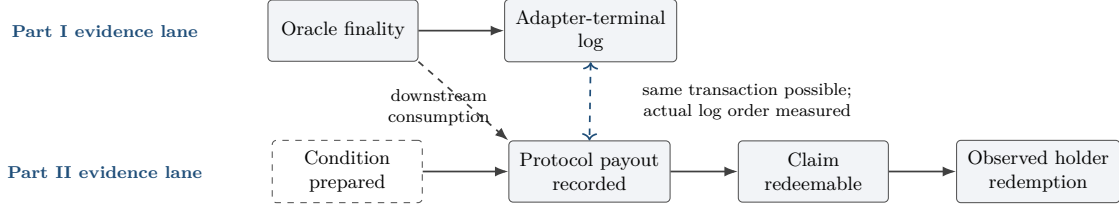


Figure 1: Companion-paper boundary. Part I terminates at the observed adapter-terminal state; Part II studies protocol payout recording and holder action. The division is analytical rather than a universal temporal ordering: protocol-resolution and adapter-terminal logs can occur in one downstream transaction, and canonical log indices determine their observed order.

1.3 Research questions

The paper asks seven questions.

1. How are frozen adapter-questions mapped exactly to CTF conditions, and where does attrition arise?
2. Which event and contract identities establish preparation, protocol finality, and redemption without relying on historical stream labels or mutable application-programming-interface snapshots?
3. How do oracle finality, adapter terminality, and **ConditionResolution** relate: in the same transaction, in which log order, in the same block, or later?
4. Which payout vectors are recorded, including canonical YES/NO outcomes, neutral outcomes, and other valid or malformed vectors?
5. How long after protocol finality does the first observed redemption occur, and how much right censoring remains at the fixed follow-up snapshot?
6. How does first positive-payout redemption differ from any redemption, including zero-payout cleanup before a later positive event?
7. Which quantities are identified by protocol events and which require a separate balance, supply, or entitlement reconstruction?

1.4 Contributions

The paper makes seven contributions.

First, it provides an exact event-sourced representation of protocol finality that is separate from oracle adjudication. Event families are selected from application-binary-interface (ABI)-derived topic hashes and canonical chain identities rather than mutable stream labels or terminal market snapshots.

Second, it defines an exact mapping and attrition design from adapter-question to condition, condition resolution, and redemption. Title similarity, fuzzy text matching, and nearest-time fallback are excluded from canonical relations.

Third, it develops a payout-vector taxonomy that preserves ordered integer numerators and separates raw protocol representation from normalized economic payout class.

Fourth, it decomposes downstream timing into oracle-to-protocol, oracle-to-adapter, signed adapter-protocol emission order, protocol-to-first-redemption, and protocol-to-first-positive-redemption intervals. A zero wall-clock gap within one transaction does not erase the exact state order.

Fifth, it specifies right-censored and multistate holder-action outcomes. A zero-payout redemption ends the “any redemption” endpoint but does not preclude a later positive-payout redemption by the same or another holder.

Sixth, it restores the economics of the finality gap without equating all observed discounts or delays with oracle risk. The paper distinguishes protocol inability, operational delay, holder optionality, and a missing value denominator.

Seventh, it establishes a strict observation-versus-entitlement boundary. Observed redemption events identify realized actions and paid collateral, but not the fraction of all redeemable entitlement completed unless an independent entitlement denominator is reconstructed.

1.5 Evidence discipline

The paper distinguishes five evidence layers:

1. exact contract events and canonical chain identities;
2. deterministic linkage and event-sourced reconstruction;
3. protocol state and ordered payout rules;
4. right-censored holder-action outcomes;
5. unmeasured value denominators and off-chain economic identities.

A large event count does not upgrade incomplete range coverage. A protocol-resolution event does not prove holder cash realization. A redemption address is not a beneficial owner. An observed cumulative payout amount is not divided by an unobserved entitlement denominator. Every rate, hazard, and duration reports its applicable population or risk set.

1.6 Position in the wider programme

Part II supplies the downstream state variables required by three subsequent papers. Paper 6 uses condition identity, protocol finality, and delivery feasibility to analyze state-triggered margin and perpetual-to-conditional-token conversion. Paper 8 uses the distinction between mechanism finality, venue/protocol finality, and cash realization in its functional comparison with Kalshi. Paper 9 uses leg-specific protocol-finality and redemption clocks to model asynchronous event spreads. This paper does not duplicate their mechanism-design or cross-venue analyses; it supplies the empirical protocol layer on which they depend.

1.7 Roadmap

Section 2 positions the paper. Section 3 reconstructs the downstream architecture. Section 4 develops the condition, payout, and redemption model. Section 5 fixes the population, target-event registry, exact linkage, and validity gates. Section 6 defines protocol-finality, payout, survival, and observed-realization estimands. Section 7 restores the economics of the protocol-to-cash gap. Section 8 gives the registered empirical design and analysis order, and Section 9 presents the resulting numerical evidence. The remaining sections state leveraged-design implications, reproducibility, limitations, and conclusions. The appendices contain the operational dictionary, mapping schema, gate matrix, survival protocol, proofs, and reproducibility and evidence-lineage material.

2 Related Work

The paper lies at the intersection of prediction-market design, oracle-mediated adjudication, conditional-token accounting, financial-market-infrastructure finality, and event-history analysis.

2.1 Prediction markets and event claims

Prediction-market research has traditionally focused on price interpretation, calibration, and information aggregation (Hanson, 2003; Manski, 2006; Wolfers and Zitzewitz, 2004). Those questions concern what prices mean before an event is resolved. The present paper concerns what the protocol does after an upstream outcome has been adjudicated. The distinction matters because a correct forecast price, a final oracle result, a recorded payout rule, and cash in a holder account are not the same object.

The companion programme develops the broader instrument context. Paper 1 establishes why ordinary crypto-perpetual mechanics do not transfer cleanly to bounded event claims; Paper 2 provides the variant taxonomy; Paper 3 separates price, outcome, resolution, and informed-trading risks; Paper 4 states the observability limits of public fill-side data; and Part I of the present study reconstructs Polymarket’s semantic and oracle layer (Nechepurenko, 2026a,b,c,d,e). Part II takes the finality vocabulary downstream to protocol accounting and holder action.

2.2 Oracles and stage separation

Oracle research studies how off-chain facts enter on-chain systems, how proposals and disputes are organized, and how governance affects the integrity and latency of adjudication (Adler et al., 2018; Eskandari et al., 2021; Kota, 2026; Mühlberger et al., 2020). These works motivate the separation between evidence, proposal, challenge, and final answer. They do not by themselves identify when a downstream token contract records a payout vector or when a holder realizes collateral.

Part I shows empirically that technical request creation, first proposal, dispute, reset, oracle settlement, and adapter consumption are distinct clocks. Part II preserves that separation and adds protocol payout recording, redeemability, and observed redemption. The object is therefore not a single “resolution timestamp” but a path through multiple institutional and contract layers.

2.3 Conditional tokens and protocol accounting

Conditional tokens provide a composable mechanism for preparing conditions, constructing outcome positions, recording payout numerators, and redeeming positions against collateral (Gnosis, 2020; Polymarket, 2026a,b). The complete-set construction implies a conservation structure: complementary positions are minted against collateral, can be merged before finality, and are redeemed according to the recorded payout vector afterward. The exact outstanding entitlement, however, depends on the full position and collateral history, not merely on lifetime trade notional or the count of redemption events.

This paper uses the contract event ledger to identify protocol states and observed holder actions. It deliberately does not assume that the event ledger alone reconstructs all outstanding balances. The value-denominator problem is treated as a separate gate rather than hidden inside a normalization.

2.4 Financial-market-infrastructure finality

The distinction between trade agreement, settlement finality, asset availability, and end-user use resembles the discipline applied in conventional financial-market infrastructures (Committee on Payment and Settlement Systems and Technical Committee of IOSCO, 2012). The analogy is limited: CTF conditions are smart-contract objects rather than conventional securities-settlement instructions. Nevertheless, the core accounting principle transfers. An upstream decision is not cash, and a technically available asset is not necessarily realized value for every participant.

The literature on market and funding liquidity also motivates the economics of delayed realization (Brunnermeier and Pedersen, 2009; Duffie et al., 2005). A redeemable claim can trade or be valued below its eventual payout because of capital lock-up, execution cost, uncertainty, or segmentation. This paper does not impose one equilibrium model of that wedge. It identifies the states and durations required for such models to be tested.

2.5 Event history, censoring, and multistate analysis

First redemption is a time-to-event outcome observed only after protocol finality. Conditions without a qualifying redemption by the frozen snapshot are right-censored rather than assigned an infinite delay. Kaplan–Meier, interval-censoring, and multistate methods provide the relevant statistical language (Aalen and Johansen, 1978; Andersen et al., 1993; Fine and Gray, 1999; Kaplan and Meier, 1958; Turnbull, 1976). The application here requires two additional precautions. First, a zero-payout redemption and a positive-payout redemption are ordered outcomes rather than mutually exclusive terminal causes. Second, same-transaction events can have zero wall-clock separation while retaining exact log-order differences.

2.6 Boundary with Papers 6, 8, and 9

Paper 6 asks how an event-linked derivative should react to finality states and whether a synthetic position can be converted into funded conditional-token exposure. Paper 8 compares the functional finality architecture of Polymarket and Kalshi. Paper 9 studies asynchronous finality in multi-leg event spreads. The present paper does not solve those design problems. It defines and measures the downstream protocol states they require.

3 Protocol Architecture: Conditions, Payouts, and Redemption

This section reconstructs the downstream mechanism from the pinned Conditional Tokens source, adapter source, and current public documentation. It separates documentary description, source-code capability, deployed configuration, and observed historical use. No claim is promoted from one layer to another without evidence.

3.1 Evidence layers

The protocol analysis uses four evidence layers.

1. **Documentary description:** what the venue and protocol documentation state about preparation, resolution, position tokens, and redemption.
2. **Source-code capability:** what the pinned contract and adapter revisions permit, including branches that may never have been exercised.
3. **Deployed configuration:** the contract addresses, bytecode, dependencies, and ABI that applied to the frozen historical interval.
4. **Observed use:** the actual events, calls, and canonical chain identities in the fixed snapshot.

A current interface state is not projected backward into history. A source branch establishes capability but not use. A stream label does not override the actual event topic. These distinctions became especially important during the construction of the protocol dataset, because historical transport labels and final materialized tables did not always preserve the complete semantic envelope. The publication layer therefore derives event identity from the pinned ABI and full topics/data rather than trusting legacy names.

3.2 Condition preparation

A CTF condition is associated with an oracle, a question identifier, and an outcome-slot count. Preparation registers the relation from these inputs to the condition identifier. It is a protocol registry event, not a statement that the external event has occurred, that the rule is decidable, or that a payout is known.

For the frozen adapter cohort, preparation is useful for three reasons. It supplies the exact question-to-condition relation; it fixes the outcome-slot structure; and it provides a

Table 1: Evidence layers used in the protocol-finality analysis. A stronger claim requires evidence from the corresponding layer rather than an inference from a weaker layer.

Layer	Primary object	Claim boundary
Documentary	current public documentation	mechanism description, not historical use
Source capability	pinned contract and adapter source	permitted transition, not exercised transition
Deployed configuration	address, bytecode, ABI, dependency graph	historically applicable contract surface
Observed protocol	canonical chain events and full log envelopes	event occurrence, order, and decoded fields
Holder realization	canonical redemption events and balances where available	observed action; not beneficial ownership or complete entitlement

protocol-side clock that can be compared with initialization and later finality. Preparation can precede the first oracle request by a long interval and therefore does not enter the redemption risk set.

3.3 Oracle availability, adapter consumption, and payout recording

When a valid oracle value is available, a caller can invoke the adapter’s downstream resolution path. In the standard source path, the adapter obtains or settles the oracle value, constructs payout numerators, calls the CTF payout-reporting function, and emits its own terminal event (Polymarket, 2026d,e). The logical layers remain distinct even when the events share one transaction:

$t_{\text{oracle-final}}$: the successful oracle value is irreversible and consumable,
 $t_{\text{adapter-consume}}$: the adapter consumes the value,
 $t_{\text{protocol-final}}$: the protocol records payout numerators,
 $t_{\text{adapter-terminal}}$: the adapter emits its observed terminal event.

No universal timestamp ordering is imposed between $t_{\text{protocol-final}}$ and $t_{\text{adapter-terminal}}$. If both are emitted in one transaction, canonical log indices determine the observed order. If they occur in different transactions or branches, block and transaction identity determine the order. The relevant empirical object is the exact downstream path, not an assumed sequence copied from a schematic diagram.

3.4 Core protocol events

The publication dataset is built from event families derived from the pinned ABI rather than from mutable labels. The three target event families and their analytical roles are summarized in Table 2.

Preparation creates the registry relation. Condition resolution records the ordered payout numerators. Payout redemption records one observed holder action. Source observations from providers remain provenance records; repeated source observations do not create additional chain events.

3.5 Payout vectors and protocol finality

Let K_c be the number of outcome slots for condition c , and let

$$\mathbf{Y}_c = (Y_{c1}, \dots, Y_{cK_c})$$

Table 2: Core protocol event families and their analytical role. Exact field names and indexed layout are frozen from the pinned ABI in the release registry.

Event	Load-bearing fields	Analytical role
Condition preparation <code>ConditionPreparation</code>	oracle, question identifier, outcome-slot count, condition identifier relation	Exact registry and question-to-condition mapping
Condition resolution <code>ConditionResolution</code>	oracle, question identifier, condition identifier, outcome-slot count, ordered payout numerators	Protocol-finality time and payout-vector taxonomy
Payout redemption <code>PayoutRedemption</code>	redeemer, collateral token, parent collection, condition identifier, index sets, payout	Holder-action timing and observed collateral realization

be the ordered payout numerators. The sum

$$D_c = \sum_{k=1}^{K_c} Y_{ck}$$

forms the payout denominator when $D_c > 0$. The normalized payout vector is

$$\pi_c = \mathbf{Y}_c / D_c.$$

Protocol finality is defined by the first valid event that makes this ordered rule effective for redemption. Raw integer numerators remain in the canonical data because scale, ordering, and malformed representations are protocol facts. Economic taxonomy is applied only after lossless decoding and validity checks.

For a binary condition, canonical classes include YES, NO, and a neutral 50/50 outcome. Other positive numerator patterns can be valid under a broader slot structure or non-standard route. A zero denominator, inconsistent slot count, malformed array, or conflicting resolution is not silently normalized into a familiar class.

3.6 Collateral conservation and the value denominator

Outcome positions are created against collateral through complete-set splitting, can be merged before finality, and are redeemed against the recorded payout rule afterward (Polymarket, 2026a,b). This supplies a conservation structure but not an automatic value denominator for the empirical paper.

The amount economically outstanding at protocol finality is not lifetime trading volume, token market capitalization, or the sum of all transfer events. It depends on net splits, merges, wrapper transformations, collateral routes, fees, burns, and balances. A complete entitlement reconstruction must therefore follow balance-consistent position and collateral flows. Until that reconstruction passes its own gate, the paper reports absolute observed payout amounts and event-based timing, not a fraction of all entitlement redeemed.

3.7 Redeemability and observed cash realization

After payout reporting, holders can redeem positions for collateral through the applicable CTF and collateral path (Polymarket, 2026a,b,c). Protocol redeemability and observed redemption are different outcomes:

$$t_{\text{first-redeem}}(c) \geq t_{\text{protocol-final}}(c)$$

for every accepted redemption event under the observed transition rules.

A long observed gap can reflect user inattention, batching, transaction cost, custody operations, account abstraction, gas sponsorship, or a technical constraint. The paper therefore reports both protocol finality and holder-action timing. It does not label the entire holder delay as an oracle or protocol delay.

The first observed redemption is a condition-level population statistic, not a universal transition for every holder. Holder-specific cash realization is an address/position outcome when the necessary balances and redemption logs are available. Absence of a redemption event does not mean protocol finality failed.

3.8 Protocol state representation

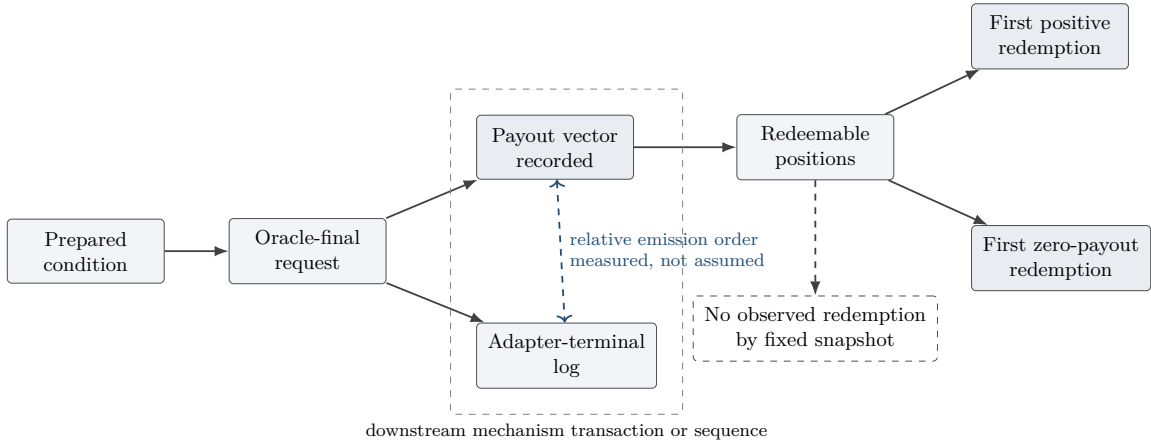


Figure 2: Protocol and redemption state representation. Oracle finality is followed by downstream mechanism actions that can emit both the protocol-resolution and adapter-terminal logs; no universal order between those emitted logs is imposed. The payout vector creates redeemability. Positive and zero-payout redemption are distinct observed outcomes, while absence of an event at the snapshot is right censoring rather than a terminal failure state.

The state representation distinguishes mechanism-controlled and holder-controlled transitions. Oracle finality and payout recording are mechanism states. Redemption is an action under an already recorded rule. A condition can therefore be protocol-final and right-censored for observed redemption without contradiction.

3.9 Architecture summary

The downstream stack contains at least five distinct economic layers:

1. a prepared condition and outcome-slot structure;
2. an irreversible oracle result;
3. adapter consumption and adapter-terminal emission;
4. a recorded protocol payout rule and technical redeemability;
5. observed holder conversion of positions into collateral.

The rest of the paper formalizes these layers, reconstructs them from exact events, and defines which claims each layer can support.

4 Formal Framework: Conditions, Payouts, and Holder Action

Let $q \in \mathcal{Q}^*$ index a frozen adapter-question, r an exact oracle request generation, $c \in \mathcal{C}$ a CTF condition, and $j \in \mathcal{R}_c$ a redemption event linked to condition c . Let $\phi(q) = c$ denote the exact question-to-condition mapping when identified. The mapping remains partial until the linkage gate passes.

For condition c , let $K_c \geq 2$ be the outcome-slot count and let

$$\mathbf{Y}_c = (Y_{c1}, \dots, Y_{cK_c}), \quad D_c = \sum_{k=1}^{K_c} Y_{ck}.$$

When $D_c > 0$, the normalized payout vector is

$$\pi_c = \frac{\mathbf{Y}_c}{D_c}.$$

All numerators remain exact integers in the canonical data. Floating-point conversion is not used for identity, classification, or accounting.

Assumption 1 (Pinned transition semantics). The accepted contract and adapter artifacts correctly represent the transition preconditions used in the empirical interval. In particular, an accepted redemption requires a previously recorded payout rule for the same condition.

Assumption 2 (Exact load-bearing event identity). Analytical events have a valid chain identifier, contract address, transaction hash, exact log index, complete ordered topics, and complete data. A nullable transaction index is auxiliary and does not replace or weaken the exact log index.

Assumption 3 (Fixed administrative censoring). The follow-up boundary T^* is fixed before holder-event analysis. Events after the boundary are unobserved for this release and are not interpreted as absent forever.

4.1 Protocol and holder clocks

Definition 1 (Preparation time). $t_{\text{prepare}}(c)$ is the timestamp of the canonical condition-preparation event linked to c . It is a registry time and need not be close to event occurrence, oracle request, or finality.

Definition 2 (Protocol-finality time). $t_{\text{protocol-final}}(c)$ is the timestamp of the first valid condition-resolution event whose ordered payout numerators become the protocol's recorded redemption rule for c .

Definition 3 (Adapter-terminal emission time). $t_{\text{adapter-terminal}}(c)$ is the timestamp of the canonical terminal event emitted by the requesting adapter and linked to c through the exact Part I relation. It is an observed log time, not a proxy for the internal beginning of the call.

Definition 4 (First observed redemption). $t_{\text{first-redeem}}(c)$ is the earliest timestamp among canonical redemption events linked to c . If no qualifying event is observed by the fixed follow-up boundary T^* , the endpoint is right-censored.

Definition 5 (First observed positive-payout redemption). $t_{\text{first-positive-redeem}}(c)$ is the earliest canonical redemption event for c whose paid collateral is strictly positive. A zero-payout redemption can therefore precede $t_{\text{first-positive-redeem}}(c)$.

The ordinary load-bearing partial order is

$$t_{\text{oracle-final}}(c) \leq t_{\text{protocol-final}}(c) \leq t_{cj} \quad (1)$$

for each accepted redemption event j , and

$$t_{\text{oracle-final}}(c) \leq t_{\text{adapter-terminal}}(c)$$

when the exact upstream endpoint is observed. No universal ordering is imposed between $t_{\text{protocol-final}}(c)$ and $t_{\text{adapter-terminal}}(c)$.

4.2 Exact ordering beyond wall-clock time

Each canonical event has an order key

$$\kappa(e) = (b_e, i_e^{\text{tx}}, i_e^{\text{log}}),$$

where b_e is block number, i_e^{tx} is nullable transaction index, and i_e^{log} is exact log index. The canonical event order uses

$$(b_e, i_e^{\text{log}}, h_e, a_e),$$

with transaction hash h_e and contract address a_e as deterministic tie-break fields. A missing transaction index is retained as null and does not block the event. A missing log index is load-bearing and must be recovered exactly or excluded from canonical ordering.

Proposition 1 (Same-transaction zero duration does not erase state order). *Suppose adapter terminal transition and condition resolution occur in one transaction. Their wall-clock duration is zero at block-timestamp precision, but their state order remains identified when their canonical log indices differ.*

Proof. Both events inherit the same block timestamp and transaction hash. Canonical log identity includes the exact log index, which induces a strict order within the transaction. Thus the duration measured in seconds is zero while the transition order is non-degenerate. $\square$

4.3 Condition-level state

Define the condition-level state vector

$$X_c(t) = (P_c(t), R_c(t), H_c(t)),$$

where $P_c(t)$ records whether the condition is prepared, $R_c(t)$ records whether a valid payout vector has been recorded, and $H_c(t)$ is the history of observed redemption events through t . The state is event-sourced: it is reconstructed from the ordered canonical history rather than read from a mutable terminal snapshot.

A minimal state path is

$$\text{Unprepared} \rightarrow \text{Prepared} \rightarrow \text{ProtocolFinal} \rightarrow \text{Redeemable},$$

with holder-action branches

$$\text{NoRedemption} \rightarrow \text{ZeroOnlyObserved} \rightarrow \text{PositiveObserved},$$

and a possible direct transition from NoRedemption to PositiveObserved. Administrative censoring at T^* is an observation boundary, not an absorbing protocol state.

4.4 Separation of finality layers

Proposition 2 (Oracle finality does not identify protocol finality). *There exist two histories with the same oracle-final timestamp and terminal oracle value but different protocol-finality times.*

Proof. In both histories the same oracle request settles at $t_{\text{oracle-final}}$ with the same value. In the first history the adapter consumes the result and records the payout vector in the same transaction. In the second, protocol consumption occurs in a later transaction. The upstream oracle observation is identical, while $t_{\text{protocol-final}}$ differs. Hence oracle finality does not identify protocol finality. $\square$

Proposition 3 (Protocol finality does not identify holder realization). *There exist two histories with the same condition, payout vector, and protocol-finality time but different redemption histories.*

Proof. Fix one valid condition-resolution event. In the first history a holder redeems immediately after protocol finality. In the second, no holder redeems by T^* . The protocol state and payout vector are identical, while $H_c(t)$ and $t_{\text{first-redeem}}(c)$ differ. Therefore protocol finality does not identify holder realization. $\square$

Corollary 4 (A scalar resolution timestamp is insufficient). *Any scalar timestamp that identifies only oracle finality, adapter terminality, or protocol finality fails to identify the full holder-action path whenever redemption timing enters the economic outcome.*

Proof. A scalar endpoint fixes at most one finality coordinate. By Propositions 2 and 3, histories can agree on that scalar coordinate while differing in downstream protocol or holder-action state. Hence the scalar timestamp cannot identify the full path whenever redemption timing matters. $\square$

4.5 Payout representation

Proposition 5 (Payout-vector scale invariance). *Assume $D_c > 0$. For any scalar $a > 0$, payout numerators $\mathbf{Y}_c$ and $a\mathbf{Y}_c$ define the same normalized payout vector whenever both are valid protocol representations.*

Proof. The normalized vector under the scaled representation is

$$\frac{a\mathbf{Y}_c}{\sum_k aY_{ck}} = \frac{a\mathbf{Y}_c}{aD_c} = \frac{\mathbf{Y}_c}{D_c} = \boldsymbol{\pi}_c.$$

The raw numerator representation remains relevant for protocol validation, but the economic per-unit payout class is unchanged. $\square$

For binary conditions the normalized classes include

$$(1, 0), \quad (0, 1), \quad \left(\frac{1}{2}, \frac{1}{2}\right),$$

plus any other valid normalized pattern admitted by the frozen slot and route structure. Classification occurs only after verifying slot count, positive denominator, ordered numerators, and exact event identity.

4.6 Redemption and entitlement

Let $a_{cj} \geq 0$ be the collateral paid in redemption event j , and define observed cumulative payout after protocol finality by

$$A_c(u) = \sum_{j \in \mathcal{R}_c} a_{cj} \mathbf{1}[0 \leq t_{cj} - t_{\text{protocol-final}}(c) \leq u]. \quad (2)$$

This is an identified event-ledger quantity when event coverage and decoding pass.

Let W_c denote total winning-position entitlement at protocol finality, measured in the same collateral unit. The entitlement-completion ratio would be

$$\Gamma_c(u) = \frac{A_c(u)}{W_c}. \quad (3)$$

Theorem 6 (Redemption-event insufficiency for entitlement completion). *A complete canonical ledger of redemption events alone does not identify $\Gamma_c(u)$ unless W_c is independently identified. This does not rule out identification from a broader balance-complete reconstruction of splits, merges, transfers, wrappers, and outstanding ERC-1155 positions.*

Proof. Fix an observed redemption history and hence $A_c(u)$. Two admissible balance histories can generate the same redemption events but different outstanding winning-position entitlement at protocol finality, for example because unredeemed winning positions differ. Then the numerator is identical while W_c and therefore $\Gamma_c(u)$ differ. The event ledger alone cannot select between the histories. $\square$

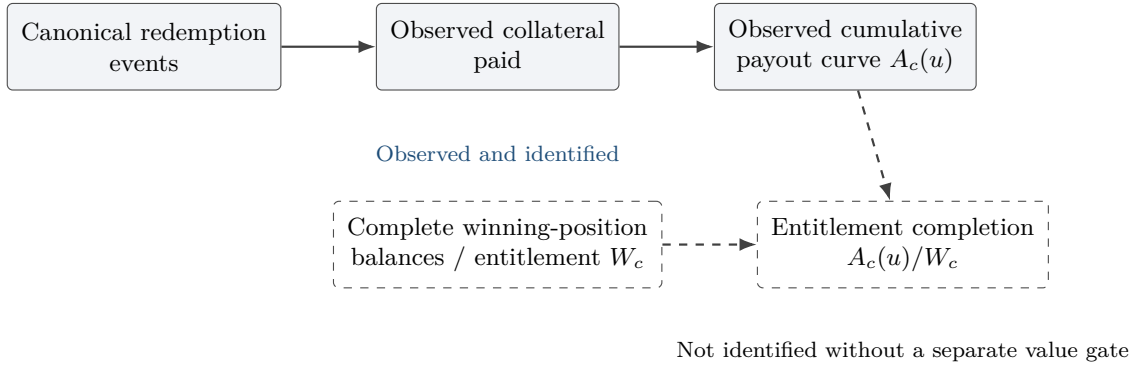


Figure 3: Observation-versus-entitlement boundary. Redemption events identify realized collateral and its timing. The fraction of all entitlement redeemed additionally requires complete winning-position balances, which are not implied by the event ledger.

4.7 Source observations and canonical events

Let $o \in \mathcal{O}$ denote a provider source observation and $e \in \mathcal{E}$ a canonical on-chain event. Several source observations can refer to the same event because of overlapping ranges, repeated provider delivery, recovery, or transport duplication.

Proposition 7 (Source duplication does not increase event multiplicity). *Suppose several source observations share one exact canonical identity and one semantic payload, and receipt or chain evidence contains one corresponding log. Then the correct representation is one canonical event with several provenance relations.*

Proof. The chain identity and semantic payload establish one on-chain event. Repeated source delivery changes transport multiplicity but not the chain history. One event plus all provenance relations therefore preserves both facts without inflating event counts. $\square$

4.8 Clock decomposition

For exactly linked conditions define

$$L_c^{OP} = t_{\text{protocol-final}}(c) - t_{\text{oracle-final}}(c), \quad (4)$$

$$L_c^{OA,C} = t_{\text{adapter-terminal}}(c) - t_{\text{oracle-final}}(c), \quad (5)$$

$$D_c^{PA} = t_{\text{adapter-terminal}}(c) - t_{\text{protocol-final}}(c), \quad (6)$$

$$L_c^{PR} = t_{\text{first-redeem}}(c) - t_{\text{protocol-final}}(c), \quad (7)$$

$$L_c^{PR+} = t_{\text{first-positive-redeem}}(c) - t_{\text{protocol-final}}(c). \quad (8)$$

The signed adapter–protocol gap D_c^{PA} is accompanied by a categorical order class when endpoints share a timestamp. The redemption intervals are censored when the endpoint is not observed by T^* .

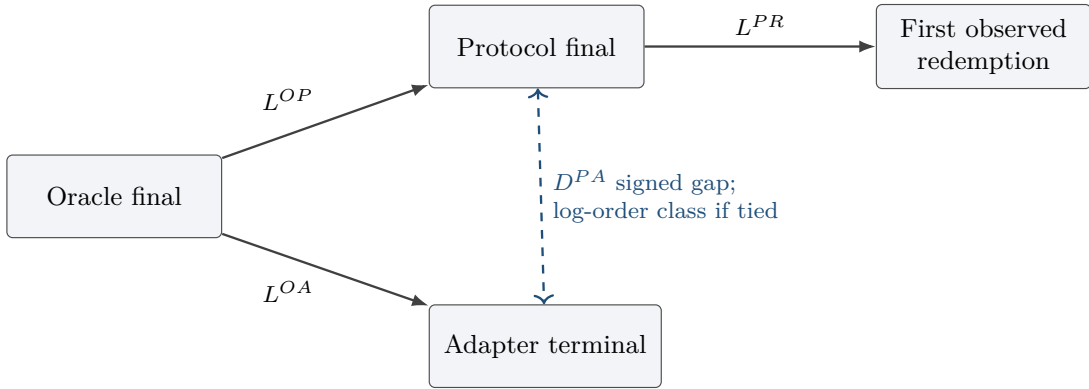


Figure 4: Measurement graph for downstream finality clocks. Oracle-to-protocol and oracle-to-adapter intervals are estimated separately. The adapter–protocol comparison is signed and accompanied by a transaction/log-order class; no universal direction is assumed. Protocol-to-redemption is an observed holder-action interval and requires right-censoring methods.

4.9 State occupation and capital time

For a protocol or holder state s , define occupation over $[a, b]$ by

$$\Omega_{cs}(a, b) = \int_a^b \mathbf{1}[X_c(t) = s] dt. \quad (9)$$

Two conditions can share the same first and last timestamps while spending different time in zero-only, positive-observed, or unresolved holder states. Occupation time is therefore a separate input to capital-lock and service-cost analysis.

4.10 Observation grades

Each clock receives one coordinate-specific grade:

E — Exact Exact canonical event time and deterministic order.

I — Interval Endpoint bounded by exact observations but not point-identified.

S — Snapshot

Current or terminal representation observed without transition history.

Prx — Proxy

Documented substitute with an explicit relationship to the target coordinate.

U — Unmeasured

Evidence does not identify the coordinate.

X — Conflicting

Load-bearing evidence disagrees.

A convenient upstream or downstream timestamp is not substituted for a missing coordinate. Duration tables include only compatible grades or report interval bounds explicitly.

5 Data, Population Construction, and Identification

The empirical design inherits the frozen adapter-question cohort from Part I and adds a fixed downstream follow-up boundary. It does not redefine the population from a mutable application-programming-interface count or from the number of protocol events returned by one provider.

5.1 Frozen population and follow-up

Let

$$\mathcal{Q}^* = \{q : \text{adapter-question initialized by block } 79,721,080\}$$

be the frozen question cohort. The accepted Part I denominator contains 185,550 adapter-questions. Downstream protocol and redemption events are followed through Polygon block 90,114,204. Events after the snapshot do not enter the analysis, and questions initialized after the cutoff do not enter the cohort even if their protocol events occur before the follow-up boundary.

This asymmetric design separates cohort formation from follow-up. It permits late protocol finality and redemption for already frozen questions without allowing the denominator to expand during analysis.

5.2 Contract-wide acquisition universe and cohort restriction

The exact target-event scan covers the pinned Conditional Tokens contract over the registered deployment-to-snapshot interval. That contract-wide event universe serves three purposes: it proves event-family coverage, preserves canonical event identity, and supplies the pool from which exact cohort links are drawn. It is not itself the study population.

Cohort-specific claims require an exact bridge

$$\begin{aligned} \text{adapter-question} &\longrightarrow \text{question identifier} \longrightarrow \text{condition identifier} \\ &\longrightarrow \text{protocol and redemption events.} \end{aligned}$$

An event that cannot be linked through this bridge can remain valid protocol evidence while remaining outside the Polymarket cohort analysis. Conversely, a cohort question with no identified downstream condition remains in the attrition denominator rather than disappearing from the study. This separation prevents full-contract counts from being misreported as question-level coverage or redemption rates.

5.3 Nested observation universes

The paper uses nested universes rather than one denominator for every result.

A lower-stage count is never divided by a higher-stage denominator without displaying the attrition path. For example, first-redemption survival uses protocol-final conditions with valid follow-up, not all initialized adapter-questions.

Table 3: Separation of the contract-wide acquisition universe from the frozen Polymarket study cohort.

Layer	Unit and authority	Permitted use
Contract-wide target-event universe	Canonical CTF events selected by ABI-derived topic and exact chain identity over the fixed block interval	Coverage, transport integrity, event semantics, and candidate protocol relations
Frozen adapter-question cohort	Adapter-questions initialized by the Part I cutoff	Scientific denominator for Polymarket mapping and downstream attrition
Exact cohort-linked condition set	Conditions linked through protocol identifiers and accepted lineage	Cohort-level protocol-finality, payout, and redemption estimands
Reconstruction-only remainder	Valid protocol events not accepted into the frozen cohort relation	Protocol-universe diagnostics; never substituted for cohort rates

Table 4: Nested observation universes. Counts and exclusions are reported separately at every transition; no lower-stage numerator is silently divided by a higher-stage denominator.

Universe	Unit	Claims supported
Frozen question cohort	adapter-question	cohort composition and mapping attrition
Exact prepared conditions	condition	registry coverage and condition multiplicity
Protocol-final conditions	valid condition-resolution event	payout taxonomy and protocol-finality timing
Upstream-linked protocol-final conditions	condition with exact/graded Oracle and adapter links	finality-path decomposition
Redemption risk set	protocol-final condition with follow-up	first-redemption and censoring estimands
Positive-redemption risk set	protocol-final condition with ordered redemption history	first-positive and zero-to-positive transitions
Value-qualified conditions	condition with exact entitlement denominator	entitlement-completion claims only

5.4 Authoritative target-event registry

The target event registry is derived from the pinned ABI and source, not copied from a historical stream label. For each event it records:

- canonical Solidity event signature;
- ABI-derived topic hash;
- indexed and non-indexed field layout;
- contract address and deployment boundary;
- ABI and source hashes;
- decoder revision.

The target streams are condition preparation, condition resolution, and payout redemption. Any other Conditional Tokens event remains useful protocol evidence but does not enter a target-event count under an incorrect label.

5.5 Exact coverage and range lineage

Population-wide event claims require an exact zero-gap range ledger for each target event through the fixed snapshot. A successful terminal range must record the exact query coordinates, provider, response status, count, parent/child split lineage, page semantics, response hash, and output artifact. A broad query that returns the provider cap is non-terminal and cannot prove coverage.

The scan uses recursive block splitting for capped responses. Zero-event ranges remain evidence only when the provider successfully returned a terminal response. Gaps, overlaps, pending branches, provider changes, and single-block pagination are explicit tables rather than implicit assumptions.

A provider response is transport evidence, not the research event itself. The analytical layer retains complete log envelopes and canonical identities in compact columnar form. Ordinary temporary responses can be discarded after verified commit, while a deterministic audit sample and all anomalies remain retained.

5.6 Diagnostic supersession and evidentiary revision

Historical diagnostics are not erased when later evidence resolves them. The evidence record retains the original diagnostic, its cause, the corrective or interpretive disposition, and the later artifact supporting the revision. A historical failure can therefore remain visible without governing a conclusion once its predicate has been re-evaluated under an explicit normalized schema or stronger evidence record. This rule prevents both silent deletion of adverse evidence and accidental use of an obsolete diagnostic.

5.7 Source observations and canonical events

One source observation is one provider/page occurrence of a log. One canonical event is one exact on-chain identity:

(chain, contract, transaction hash, log index).

The full envelope includes block number and hash, block timestamp, nullable transaction index with a raw-status field, exact log index, exact **removed** value, complete ordered topics, complete data, event class, lossless decoded fields, and provenance. Repeated source observations map many-to-one to canonical events where semantic payloads agree.

A missing transaction index is non-load-bearing and remains null. A missing log index blocks the affected event until exact receipt or block evidence recovers it. No event is ordered from provider page position or source row order.

5.8 Exact question-to-condition mapping

The canonical mapping relation uses protocol identities only. For each adapter-question it attempts to identify:

- exact question identifier;
- condition identifier;
- oracle address;
- outcome-slot count;
- canonical condition-preparation event;
- adapter and request lineage;
- mapping method and evidence hashes.

Title, slug, text similarity, and nearest-time matching are excluded from the canonical relation. Unmatched and ambiguous questions remain explicit. A question can have one condition, several historically distinct condition objects, or no identified condition under the frozen evidence; these are different attrition states.

5.9 Protocol-finality linkage

For conditions with a valid resolution event, the protocol relation stores ordered payout numerators, normalized class, canonical finality identity, and exact links to upstream oracle and adapter states where available. Same-transaction paths preserve log order. Same-block but different-transaction paths preserve transaction identities. Later-block paths retain the full interval.

The upstream oracle time can be exact, interval-observed, or unavailable depending on the route. An unavailable oracle endpoint does not prevent measurement of protocol-to-redemption time, but it prevents oracle-to-protocol claims for that condition.

5.10 Redemption linkage

Each canonical redemption event is linked to condition identifier, redeemer, collateral token, parent collection, index sets, payout, and protocol-finality state. The paper distinguishes:

- any redemption event;
- strictly positive-payout redemption;
- zero-payout redemption;
- multiple redemption events for one condition;
- ordered zero-to-positive histories;
- right-censored conditions with no observed redemption by the snapshot.

Addresses are pseudonymous execution identifiers, not beneficial owners. Address-level analyses are therefore stated as address behavior unless an independent identity source exists.

5.11 Lifecycle cross-classification

Every condition in the contract-wide analytical table is assigned to one cell of the complete prepared/resolved/redeemed cross-classification. The resulting eight-cell table is reported separately for the full protocol universe and the frozen cohort. Each non-canonical path receives an explicit disposition, such as left truncation, pre-deployment state, repeated event, unresolved linkage, quarantine, snapshot censoring, or genuine alternative lifecycle. Marginal totals alone are insufficient because they can hide resolved-without-observed-preparation or redeemed-without-observed-resolution states whose interpretation depends on the fixed observation boundary and exact event history.

5.12 Bitemporal provenance

Each source record stores valid-time fields from the chain and retrieval-time fields from the acquisition process. Provider response time is never substituted for block time. Historical stream labels and current user-interface metadata remain provenance attributes rather than event truth.

The data lineage preserves:

1. immutable source observation;
2. canonical event identity;
3. ABI-derived event class;
4. exact linkage relation;
5. analytical table row;
6. reported table or figure source hash.

5.13 Validity gates

Table 5: Cumulative validity gates for Part II.

Gate	Requirement	Claims unlocked
G-ABI	Topic hashes and decoders derived from the pinned ABI	Correct event-family classification
G-COVERAGE	Zero-gap/no-unexplained-overlap range ledger through the snapshot	Population-wide event counts for the target stream
G-IDENTITY	Exact transaction hash and log index; complete envelope and provenance	Canonical event multiplicity and ordering
G-DECODE	Lossless typed ABI decode with raw topics/data retained	Payout-vector and event-field analysis
G-LINK	Exact question-to-condition and upstream-state linkage	Question-level finality paths and durations
G-TIMING	Valid state order and fixed administrative censoring boundary	Duration, survival, and competing-risk estimates
G-VALUE	Exact outstanding entitlement or balance denominator	Value-weighted entitlement-completion claims

The gates are cumulative. A downstream result cannot repair an upstream failure. For example, a plausible survival curve cannot establish that the event stream had zero-gap coverage; a complete event stream cannot establish entitlement completion without a value denominator.

5.14 Missingness and censoring

Missingness is classified by mechanism rather than represented by one null code. Categories include:

- not applicable because the upstream state never occurred;
- right-censored at the fixed snapshot;
- exact target event unavailable because coverage failed;
- linkage unresolved despite valid events;
- interval-observed endpoint;

- value denominator unavailable;
- conflicting semantic or identity evidence.

Administrative censoring is deterministic given the snapshot. It does not imply that a later redemption never occurs.

5.15 Value-denominator gate

The event ledger identifies paid collateral in observed redemption actions. A value-weighted completion claim additionally requires an exact condition-level entitlement denominator. Candidate reconstructions must account for splits, merges, burns, wrappers, negative-risk routes, collateral tokens, and historical balances. Until that relation passes G-VALUE, the paper reports absolute observed payouts and explicitly labelled normalizations only.

5.16 Ethics and disclosure

The protocol data are public chain records, but the analysis follows minimum-necessary disclosure. Ranked redemption-address lists are not reported by default. Raw addresses can remain in reconstruction-only or controlled research layers while reported tables aggregate by condition, route, payout class, or timing stratum. No beneficial ownership, intent, or legal status is inferred from an address alone.

6 Estimands, Censoring, and Empirical Design

The empirical objects are specified before numerical insertion. Each estimand has a fixed unit, denominator or risk set, endpoint definition, observation grade, and gate consequence.

6.1 Population and attrition

The population flow begins with the frozen question cohort and proceeds through exact condition mapping, protocol finality, and observed redemption. Let

$$N_Q = |\mathcal{Q}^*|$$

be the question denominator, N_C the number of exactly linked conditions, N_P the number of protocol-final conditions, and N_R the number with at least one observed redemption by T^* . These counts answer different questions and are not collapsed into one rate.

The mapping report must distinguish:

- exact one-to-one mapping;
- exact one-to-many or many-to-one protocol relation;
- no preparation event in the target stream;
- event present but upstream question linkage unavailable;
- conflicting identity or malformed event;
- right-censored downstream state.

6.2 Protocol-finality path estimands

For conditions with compatible upstream and downstream clocks, the primary intervals are

$$L_c^{OP} = t_{\text{protocol-final}}(c) - t_{\text{oracle-final}}(c), \quad (10)$$

$$L_c^{OA,C} = t_{\text{adapter-terminal}}(c) - t_{\text{oracle-final}}(c), \quad (11)$$

$$D_c^{PA} = t_{\text{adapter-terminal}}(c) - t_{\text{protocol-final}}(c). \quad (12)$$

The signed adapter-protocol relation is reported with an order class:

1. protocol event before adapter-terminal event in the same transaction;
2. adapter-terminal event before protocol event in the same transaction;
3. same block, different transactions;
4. later block;
5. one endpoint unavailable or interval-observed.

A zero duration is not interpreted as simultaneous internal execution. It means the available public clock has zero separation while exact event order is preserved where possible.

6.3 Payout-vector taxonomy

Let $\mathcal{P}_c$ be the raw ordered numerator pattern and π_c the normalized payout vector. The taxonomy records both. For binary conditions the principal normalized classes are:

$$\begin{aligned}
 \text{YES} &: (1, 0), \\
 \text{NO} &: (0, 1), \\
 \text{NEUTRAL} &: \left(\frac{1}{2}, \frac{1}{2}\right), \\
 \text{OTHER VALID} &: \pi_c \text{ valid but outside the canonical three,} \\
 \text{MALFORMED/CONFLICTING} &: \text{protocol or decoding gate fails.}
 \end{aligned}$$

Scale-equivalent raw numerators remain distinct protocol encodings but share one normalized economic class. Slot count, numerator order, and denominator remain visible in descriptive tables.

6.4 First-redemption endpoints

For any-redemption survival, define

$$T_c^R = \min_{j \in \mathcal{R}_c} \{t_{cj} - t_{\text{protocol-final}}(c)\}$$

when a qualifying event exists. Otherwise the observation is censored at

$$C_c = T^* - t_{\text{protocol-final}}(c).$$

The observed pair is

$$\tilde{T}_c^R = \min(T_c^R, C_c), \quad \delta_c^R = \mathbf{1}[T_c^R \leq C_c].$$

For positive-payout redemption, define T_c^{R+} analogously using only events with strictly positive paid collateral. A prior zero-payout event does not remove the condition from the positive-redemption risk set.

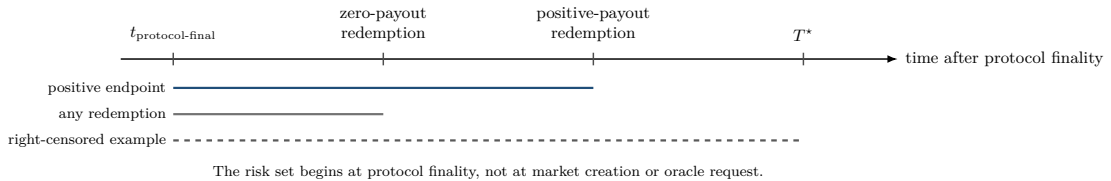


Figure 5: Risk-set and endpoint construction. A zero-payout redemption ends the “any redemption” endpoint, but follow-up for the positive-payout endpoint continues until a positive event or the snapshot. Conditions without a qualifying event by the fixed snapshot are right-censored.

6.5 Ordered redemption histories

The condition-level holder state follows

$$0 = \text{no redemption}, \quad 1 = \text{zero-only observed}, \quad 2 = \text{positive observed}.$$

Allowed transitions are

$$0 \rightarrow 1, \quad 0 \rightarrow 2, \quad 1 \rightarrow 2.$$

State 1 is not a terminal competing cause for state 2. Aalen–Johansen transition probabilities can summarize the ordered multistate process, while Kaplan–Meier curves estimate time to any redemption and time to first positive redemption separately.

6.6 Observed payout realization

The identified condition-level cumulative payout is $A_c(u)$ from Equation (2). Aggregate observed payout can be reported as

$$A(u) = \sum_c A_c(u)$$

over a stated population. Acceptable normalizations include:

- per protocol-final condition;
- per condition with any observed redemption;
- by payout-vector class;
- by adapter route or metadata stratum;
- by observed total payout over the complete follow-up window.

Each normalization is labelled. None is described as entitlement completion unless W_c is exact and G-VALUE passes.

6.7 State-occupation and capital-time estimands

For a state s , the empirical occupation is Ω_{cs} from Equation (9). Relevant states include:

- oracle-final but not protocol-final;
- protocol-final with no observed redemption;
- zero-only observed;
- positive observed.

Occupation summaries can be combined with a registered capital-service rate $\kappa_c^{\text{cap}}(t)$ to form

$$C_c^{\text{cap}}(a, b) = \int_a^b \kappa_c^{\text{cap}}(t) dt, \tag{13}$$

which measures capital-time rather than assuming one flat delay has the same economic value across conditions.

6.8 Stratification

Primary descriptive strata are fixed before results:

- adapter family and route;
- payout-vector class;
- ordinary versus disputed/reset/Data Verification Mechanism (DVM) path inherited from Part I;
- event class where exact metadata exists;
- clarification and rule-update history;
- same-transaction, same-block, and later-block downstream path;
- observation grade and metadata-coverage cohort.

Metadata-conditioned results display the unmatched residual and adapter composition. A modern-adapter, high-coverage subset is not generalized to the full cohort without evidence.

6.9 Uncertainty and inference

The cohort is a frozen historical population rather than a simple random sample from future Polymarket conditions. The primary outputs are exact counts, empirical distributions, and right-censored population summaries. Confidence intervals, when reported, describe estimator uncertainty under stated event-history assumptions and are not automatic superpopulation guarantees.

Duration distributions are heavy-tailed and can contain point masses at zero. Reports therefore use medians, quantiles, restricted means over prespecified horizons, numbers at risk, and full survival coordinates rather than relying only on arithmetic means.

6.10 Negative controls

The empirical build includes negative controls designed to detect false structure:

1. shift protocol-finality times across unrelated conditions while preserving marginal distributions;
2. replace exact condition mapping with a forbidden title-similarity candidate relation and verify that it is excluded from canonical results;
3. randomize downstream event order within blocks to test dependence on exact log ordering;
4. compare source-observation counts with canonical event counts to detect transport duplication;
5. compute a creation-time redemption curve to demonstrate the bias from an incorrect risk-set origin;
6. treat zero-payout redemption as terminal for positive redemption and quantify the resulting endpoint distortion.

Negative controls are diagnostics, not alternative primary estimators.

6.11 Claim hierarchy

The claim hierarchy is cumulative:

1. exact event existence and identity;
2. exact or graded state linkage;
3. protocol-finality path and duration;
4. right-censored holder-action timing;
5. observed payout realization;
6. entitlement-completion claim, only after the value denominator passes.

A failure at one level limits all stronger downstream claims.

7 The Economics of Protocol Finality and Observed Redemption

The state sequence identified in the preceding sections has an economic interpretation, but the interpretation depends on which actor controls the remaining transition. Before protocol finality, the mechanism has not yet recorded the enforceable payout rule. After protocol finality, the claim can be technically redeemable while the holder has not yet exercised the action. These intervals can both create capital time, but they do not represent the same risk.

7.1 Cash-equivalent value

Let $V_c(t)$ be the executable or accounting value of one unit of the winning claim at time t , expressed in collateral units, and let π_c^{win} be its final per-unit winning payout under the

recorded vector. Define the observed cash-equivalent wedge

$$\omega_c(t) = \pi_c^{\text{win}} - V_c(t). \quad (14)$$

Before protocol finality, $\omega_c(t)$ can include adjudication uncertainty, downstream execution uncertainty, liquidity cost, and discounting. After protocol finality, adjudication uncertainty should be absent under the ordinary path, but transaction cost, custody delay, batching, collateral access, and holder optionality can remain. The same numerical wedge can therefore have a different decomposition across states.

A positive post-finality wedge is not automatically protocol failure. It can be rational compensation for the cost of realizing collateral or an artifact of a stale/illiquid quoted price. The empirical design treats the wedge as an outcome to explain, not a target that must mechanically be forced to zero.

7.2 Known-payout carry benchmark

Suppose protocol finality has fixed a claim payout π_c , and a holder expects redemption after random delay Δ_c . Under a simple collateral carry rate r , transaction cost k_c , and no further default risk, a benchmark present value is

$$V_c^{\text{bench}} = \mathbb{E}[\pi_c^{\text{win}} e^{-r\Delta_c}] - k_c. \quad (15)$$

This is a benchmark, not a structural pricing model. It clarifies that a known payout can still have a positive discount when realization is delayed or costly. More elaborate models can include stochastic borrowing rates, custody risk, segmentation, account-level gas sponsorship, and endogenous redemption timing.

7.3 Mechanism delay versus holder delay

Define the mechanism interval

$$\Delta_c^{\text{mech}} = t_{\text{protocol-final}}(c) - t_{\text{oracle-final}}(c)$$

and the holder interval

$$\Delta_c^{\text{holder}} = t_{\text{first-redeem}}(c) - t_{\text{protocol-final}}(c).$$

The first interval is controlled by the adapter/protocol path. The second includes holder or custodian choice after the payout rule exists. A capital provider can be exposed to one, both, or neither interval depending on the instrument architecture. For example, a loan extinguished at protocol finality has no principal exposure to later holder delay, while a service promising immediate collateral delivery can retain an operational obligation until redemption.

7.4 State-occupation value

A scalar duration can conceal differences in state occupation. Let $k_s(t)$ be the per-unit cost rate associated with state s . The total state-conditioned cost is

$$C_c(a, b) = \sum_s \int_a^b k_s(t) \mathbf{1}[X_c(t) = s] dt. \quad (16)$$

Two conditions can have equal protocol-to-redemption duration but different cost because one spends most of the interval in a zero-only state, one requires multiple redemption transactions, or one is handled through a custodian. This motivates reporting occupation and route rather than only a single gap.

7.5 Leverage amplification

For a financed position of notional N and trader equity E , a finality discount d reduces marked equity by approximately Nd before fees and nonlinear execution effects. The same per-unit discount therefore has a larger equity effect at higher leverage. But the economic response depends on the state:

- before protocol finality, the discount can reflect unresolved mechanism risk;
- after protocol finality, it can reflect realization cost or optional delay;
- after debt extinction, it can belong entirely to the holder rather than the lender;
- under a guaranteed conversion service, part of the wedge can belong to the operator or reserve.

The paper does not infer a universal margin add-on from the observed wedge. It supplies the state and duration variables needed by Paper 6 to test such rules.

7.6 Observable economic estimands

The empirical release can support the following observables without an entitlement denominator:

Oracle-to-protocol delay. The distribution of L^{OP} measures downstream mechanism delay after oracle finality.

Adapter-protocol order. The signed D^{PA} and its exact order class measure the emitted sequence without imposing an artificial direction.

First-redemption survival. $\hat{S}_{KM}(u)$ estimates the share of protocol-final conditions with no observed redemption by horizon u , under the stated censoring rules.

Positive-redemption survival. The positive endpoint separates zero-payout cleanup from observed positive collateral realization.

Observed payout curve. $A_c(u)$ and its aggregates measure collateral paid through observed events.

State-price relation. Where executable prices exist, the relation between the cash-equivalent wedge and expected remaining protocol or holder duration can be studied after controlling for spread, staleness, event class, route, and payout class. Such an analysis remains associational.

7.7 Falsification and interpretation

A finality-pricing interpretation is weakened if, within high-grade cohorts, the observed wedge has no stable relation to measured remaining duration, state occupation, route, or realization delay after controlling for liquidity and market characteristics. A null result would be informative: the delay may be too short to price, holders may treat redemption as operationally negligible, or measurement noise may dominate.

A null pricing result would not collapse the state-machine contribution. Funding, collateral, custody, and conversion feasibility can remain state-dependent even when no visible spot discount appears. Conversely, a strong observed discount is not by itself proof of oracle or protocol risk. The claim is conditional on coverage, timing, price, and value gates.

8 Registered Empirical Design and Analysis Sequence

The analysis is ordered because every downstream result depends on an earlier identity, coverage, or population predicate. The sequence below is part of the scientific design rather than a software execution diary. A later table can refine an earlier description, but it cannot repair a failed event-family, coverage, identity, or linkage gate.

8.1 Target-stream integrity and coverage

The first analysis verifies the ABI-derived event registry, exact block-range coverage, canonical identities, source duplication, decoding, and deterministic rebuild for `ConditionPreparation`, `ConditionResolution`, and `PayoutRedemption`. Its outputs distinguish source observations from canonical events and classify every anomaly. Population rates are unavailable until this layer passes.

8.2 Cohort linkage and attrition

The second analysis maps the frozen adapter-question cohort to condition identities. It reports exact one-to-one, one-to-many, many-to-one, unmatched, ambiguous, and inapplicable states. Title similarity, fuzzy matching, and nearest-time candidates appear only as negative controls and never enter the accepted relation. Full-contract event counts remain separate from cohort denominators.

8.3 Protocol-finality paths

The third analysis links Oracle-final, adapter-terminal, and condition-resolution events. It distinguishes same-transaction protocol-before-adapter, same-transaction adapter-before-protocol, same-block different-transaction, later-block, interval-observed, unavailable-upstream, and right-censored paths. Duration summaries are restricted to compatible clock grades, while exact secondary event order is retained even when wall-clock duration is zero.

8.4 Payout-vector taxonomy

The fourth analysis preserves ordered payout numerators, slot counts, denominators, normalized classes, and malformed or conflicting attrition. Scale-equivalent encodings are separated from economically distinct payout classes. Composition by adapter and adjudication route is reported without assuming that a human-readable YES/NO label determines slot order.

8.5 Redemption histories

The fifth analysis constructs first-any, first-positive, and ordered zero-to-positive histories. It reports event and risk-set counts, administrative censoring, Kaplan–Meier coordinates, multistate transitions, numbers at risk, quantiles, and restricted means where identified. A zero-payout redemption terminates the any-redemption endpoint but not the positive-redemption endpoint. Creation-time placebo and false competing-risk specifications remain negative controls.

8.6 Observed payout realization

The sixth analysis aggregates exact collateral paid by observed redemption events and reports explicitly named normalization bases. Absolute observed payout is identified from the event ledger. Entitlement-completion ratios remain unavailable unless the separate balance-consistent denominator passes G-VALUE.

8.7 State variables for related analyses

The analysis identifies state variables relevant to Papers 6, 8, and 9: condition identity, payout class, protocol-finality path, exact event-order keys, first-redemption and first-positive timing, censoring state, and route metadata. Counterfactual margin, cross-venue comparison, and multi-leg replay remain outside this paper.

8.8 Version-locked hypotheses

The empirical analysis evaluates the following hypotheses without retroactive replacement.

Hypothesis 1 (Downstream separation). Among conditions with compatible observed clocks, a non-zero share has a strictly positive or interval-qualified Oracle-to-protocol finality gap; exact event-identity non-equivalence is treated as architecture, not as the empirical test.

Hypothesis 2 (Atomic ordinary path). Among standard ordinary-path conditions, protocol-resolution and adapter-terminal events frequently occur in one transaction, while exact log order remains non-degenerate.

Hypothesis 3 (Payout concentration). Canonical YES and NO payout classes dominate valid binary condition resolutions, with neutral and other valid classes forming a smaller but non-zero tail.

Hypothesis 4 (Redemption censoring). A material share of protocol-final conditions remains without an observed redemption at the fixed follow-up snapshot.

Hypothesis 5 (Positive endpoint delay). A non-zero share of resolved conditions satisfies $T_c^{R+} > T_c^R$; the release reports the share and the distribution of the positive gap rather than testing the pointwise ordering itself.

Hypothesis 6 (Route heterogeneity). Protocol-finality and redemption timing differ across adapter and upstream adjudication routes.

Analytic value boundary. Theorem 6 establishes that redemption events alone do not identify entitlement completion. The empirical analysis therefore reports the share of outputs affected by the missing entitlement denominator and keeps G-VALUE blocked unless a separate balance-complete reconstruction is supplied.

A rejected hypothesis remains part of the analysis. A blocked hypothesis is reported as blocked rather than evaluated on an opportunistic denominator.

8.9 Result order and claim gating

Results appear in the following order: target-stream integrity; cohort mapping and attrition; protocol-finality paths; payout taxonomy; first-any and first-positive redemption; ordered zero-to-positive histories; observed payout realization; the value-gate disposition; and the state-variable boundary. Each table names its population or risk set and its cumulative gate state.

8.10 Source-generated result layer

Reported numerical tables and vector figures are generated from frozen inputs. Their manifests record input hashes, analytical revision, exact denominator, clock origin, gate state, output schema, and deterministic rebuild status. Inherited Part I constants remain documentary inputs rather than regenerated Part II outputs.

Table 6: Frozen result families and minimum denominator reporting.

Result family	Required denominator / risk set	Minimum output
Population flow	frozen questions and exact linked conditions	counts, rates, and exclusion reasons
Protocol-finality paths	exact linked upstream terminal states	same-transaction, same-block, delayed, censored/ineligible
Payout vectors	valid condition-resolution events	raw patterns, normalized classes, malformed attrition
First redemption	protocol-final conditions with follow-up	event count, censoring, quantiles, survival, numbers at risk
Positive redemption	protocol-final conditions; prior zero-payout events retained in the history	first-positive survival and ordered zero-to-positive transition counts
Observed realization	canonical redemption events and explicitly named normalization base	absolute collateral and labelled observed-only curves
Value completion	exact entitlement denominator	reported only if G-VALUE passes

9 Empirical Results

9.1 Population linkage and lifecycle composition

The exact protocol bridge preserves the distinction between adapter-question instances, unique question IDs, link rows, and conditions. One question ID appears in two valid adapter-question instances, and one mapped question ID links to two CTF conditions; neither multiplicity is collapsed by convenience. Table 7 reports the registered units.

Table 7: Frozen cohort, identity units, and exact question-to-condition linkage. Counts with different units are shown separately rather than forced into one additive funnel.

Registered unit	Count
Initialized adapter-question instances	185,550
Unique question IDs	185,549
Exact one-to-one mapped question IDs	108,636
One-to-many mapped question IDs	1
Unmatched unique question IDs	76,912
Exact question-to-condition link rows	108,639
Unique linked conditions	108,638

Among the 108,638 exact-linked conditions, 99,283 have an observed protocol-resolution event by the fixed snapshot at Polygon block 90,114,204 (2026-07-12T17:11:41Z). The remaining lifecycle states are shown in Table 8. Redemption without an observed resolution is retained as its own observational class rather than silently reassigned.

9.2 Payout-vector taxonomy

The corrected payout-vector taxonomy reconciles exactly to the observed resolution counts: 99,283 resolved exact-linked conditions and 1,857,116 resolved conditions in the total target-event union. Binary vectors dominate, while neutral and other valid vectors form a small but non-zero tail. Table 9 reports population-qualified counts.

Table 8: Observed lifecycle states in the exact-linked condition cohort. These are event-observation states, not claims about beneficial ownership or total economic entitlement.

State	Conditions	Share
Positive redemption observed	91,817	84.52%
Zero-only first redemption, no later positive	341	0.31%
Resolved, no redemption by snapshot	7,125	6.56%
Redemption observed without observed resolution	3,669	3.38%
No observed resolution or redemption	5,686	5.23%
Total exact-linked conditions	108,638	100.00%

Table 9: Payout-vector taxonomy by registered population. Orientation follows the ordered protocol vector; no human-readable YES/NO label is used to infer slot order.

Taxonomy	Exact-linked	Full-CTF-only	Total target union
Canonical binary (0, 1)	53,847	1,041,734	1,095,581
Canonical binary (1, 0)	45,024	686,769	731,793
Fifty-fifty	410	29,199	29,609
Other valid vector	2	131	133
No observed resolution	9,355	177,718	187,073

9.3 Protocol-finality paths

Cross-contract finality is deliberately conservative. The frozen evidence does not support a universal same-transaction ordering claim, and an identity join is not promoted to causal ordering. The condition-level classification in Table 10 therefore distinguishes interval-qualified, multiple-candidate, incompatible, and unevaluable paths.

Table 10: Conservative condition-level protocol-finality path classification for the exact-linked cohort. The classification does not infer same-transaction order when exact cross-contract transaction/log identity is unavailable.

Path class	Conditions
Interval-qualified terminal generation	823
Multiple candidate generations	48
No compatible terminal generation in frozen evidence	91,638
Right-censored or otherwise unevaluable	16,129
Total	108,638

The same-transaction Oracle–adapter–CTF and same-block/same-transaction redemption estimands are explicitly not evaluable from the transferred frozen state layer because the required cross-contract transaction/log identity is not retained at publication grade. No ordering is imputed.

9.4 Observed redemption timing

Redemption follow-up uses each condition’s first observed protocol resolution as time zero and right-censors at the exact snapshot. In the exact-linked resolved risk set of 99,283 conditions, 92,158 have an observed redemption of any amount and 91,817 have an observed positive-payout redemption. The Kaplan–Meier medians are 182 and 200 seconds respectively; Table 11 reports the risk-set accounting.

Available follow-up is heterogeneous because conditions resolve at different dates. For exact-linked resolved conditions, the 25th, 50th, and 75th percentiles of available follow-up

Table 11: Condition-specific redemption survival summaries for the exact-linked resolved cohort. Time zero is first observed protocol resolution; unresolved conditions are outside this risk set.

Endpoint	Risk set	Events	Censored	Median (s)	P25 (s)	P75 (s)
First any redemption	99,283	92,158	7,125	182	52	544
First positive redemption	99,283	91,817	7,466	200	58	720

are 21,074,649, 25,254,353, and 33,617,219 seconds, and the maximum is 142,006,845 seconds. These values describe observation exposure, not expected redemption delay.

9.5 Entitlement boundary

Observed redemption events identify actions and paid collateral. They do not identify the fraction of all winning entitlement redeemed because the release does not contain a full balance-complete ERC-1155 entitlement ledger. Accordingly, G-VALUE remains unavailable and the paper reports no entitlement-completion rate, outstanding winning-token supply, or unredeemed collateral value. This is a scope boundary of the event-timing study rather than a failure of the event-coverage or censoring results.

10 Implications for Leveraged Event Markets

The paper is an empirical protocol study, not a complete leveraged-product specification. Its contribution to mechanism design is to identify the exact states and clocks that a financed overlay must distinguish.

10.1 Cash finality and debt maturity

A lender or margin engine should attach discharge to the state that actually satisfies the obligation. Oracle finality can be sufficient for a prediction about direction, but not necessarily for a protocol payout. Protocol finality establishes redeemability, but not observed collateral in a holder account. Redemption can be optional holder behavior rather than an operator obligation.

Design Principle 1 (Finality-state accounting). A leveraged event engine should attach each obligation to the exact state required for discharge: oracle-final, adapter-terminal, protocol-final, delivered claim, or redeemed collateral. A weaker upstream state must not be used as a substitute.

This principle does not require every liability to remain open until holder redemption. Debt can be extinguished earlier through a verified sale, conversion, reserve, or other enforceable transition. The mechanism must state which asset and event satisfy the obligation.

10.2 Perpetual-to-conditional-token conversion

Paper 6 develops conversion from a synthetic event-linked position into fully collateralized conditional-token exposure. Part II supplies three load-bearing inputs:

1. exact condition and outcome-slot structure;
2. the protocol-final payout state and claim identity;
3. the observed distinction between claim delivery, redeemability, and redemption.

A conversion rule triggered before exact condition identity or enforceable delivery can replace one unresolved obligation with another. Conversion after debt extinction can instead leave the user with a fully funded residual claim whose later redemption belongs to the holder rather than the lender.

10.3 State-triggered margin and finality carry

Protocol-finality gaps create carrying costs even when the final economic direction is known. A control rule can condition on

$$L^{OP}, \quad L^{OA}, \quad D^{PA}, \quad L^{PR},$$

but these intervals belong to different actors and risks. Funding before protocol finality can compensate an unresolved mechanism state. A charge after protocol finality may instead be a custody, realization, or capital-service charge. Calling both “basis funding” obscures the change in economic function.

Part II supplies empirical distributions; Paper 6 evaluates candidate margin, funding-freeze, auction, and conversion rules. This paper does not prescribe one calibration.

10.4 Asynchronous multi-leg instruments

An event spread has a protocol-finality and redemption path for each leg. When leg A becomes protocol-final before leg B , the spread becomes a deterministic component plus a residual single-leg exposure. Paper 9 formalizes this state and its collateral consequences. Part II supplies leg-level condition-resolution and holder-action clocks.

A common event title or oracle-final timestamp cannot substitute for exact condition and payout identities. Multi-leg conversion also requires aggregate claim capacity and cannot reuse the same complete-set inventory across positions.

10.5 Risk-transfer boundary

Observed redemption delay should not automatically be booked as protocol risk. The design must separate:

- inability to record a valid payout rule;
- delay between oracle and protocol finality;
- delay between protocol finality and claim delivery;
- holder delay after redeemability;
- missing entitlement information that prevents completion measurement.

This separation avoids charging the protocol for optional holder behavior while retaining the capital-time experienced by a service that guarantees realization.

10.6 Outcome-sensitive exposure

A zero-payout redemption can be operational cleanup, while a positive-payout redemption releases collateral. A leveraged engine should therefore avoid interpreting any redemption event as a uniform reduction in economic exposure. The relevant quantity is the exact payout, claim inventory, and obligation being discharged.

Similarly, a 50/50 or other valid payout vector changes the identity and quantity of claims that carry value. Margin and conversion rules must ingest the actual ordered payout vector rather than a hard-coded YES/NO assumption.

10.7 Design boundary

The empirical clocks do not establish a welfare-optimal leverage cap, conversion rule, or reserve. Those choices require execution cost, strategic response, legal enforceability, shared capacity, and participant behavior. The paper’s design output is a verified state surface and claim boundary, not a deployed product recommendation.

11 Reproducibility and Data Availability

The companion materials are organized by adapter, oracle, rules and metadata, protocol target events, redemption, analysis, coverage, provenance, and manifests. The protocol layer contains only ABI-derived events with complete canonical envelopes. Provider observations remain provenance and do not inflate canonical event counts.

11.1 Event and table lineage

The required lineage is

$$\begin{aligned} \text{source observation} &\rightarrow \text{canonical event} \rightarrow \text{exact relation} \\ &\rightarrow \text{analytical table or figure.} \end{aligned}$$

Each reported table and figure has a source-manifest entry. A claim can therefore be traced to the target-event registry, range ledger, source envelopes, canonical identity, linkage relation, and analytical code.

11.2 Deterministic rebuild

A network-disabled rebuild of the reported tables and figures uses the frozen target-event dataset and accepted upstream Part I relations. The rebuild compares schemas, key sets, semantic hashes, range coverage, linkage, attrition, survival tables, and figure-source hashes. Byte identity is required where deterministic file metadata permits it; semantic identity is required everywhere.

The check has two components:

1. a source-to-canonical verifier for event identity, semantic payload, provenance, duplicate classification, and range coverage; and
2. an analytical verifier for mapping, payout, timing, survival, and observed-realization relations.

A content-addressed inventory check does not replace semantic verification. Both checks are recorded in the reproducibility materials.

11.3 Data availability and privacy boundary

The accompanying public materials describe the analytical tables, schemas, provenance, known limitations, and citation metadata needed to assess the reported claims. Redemption addresses are public pseudonymous identifiers, but the reported material does not provide ranked holder lists by default. Tables are aggregated unless row-level disclosure is necessary for a stated reproducibility purpose and is consistent with minimum-necessary disclosure. Beneficial ownership, intent, institutional identity, and legal status are never inferred from an address alone.

12 Limitations

The paper has sixteen principal limitations.

Contract and venue scope. The protocol layer is Polymarket-, chain-, contract-, and version-specific. Exact event coverage and ABI decoding establish what the pinned contracts recorded; they do not establish legal finality in every jurisdiction or portability to another venue.

Frozen historical cohort. The question cohort ends at block 79,721,080, and follow-up ends at block 90,114,204, whose exact canonical timestamp is 2026-07-12T17:11:41Z. Later questions and events are outside every rate. The manuscript date is not the data cutoff.

Question and condition identity. The primary upstream unit is an adapter address and question-identifier pair. It is not automatically one economic market across migrations, wrappers, duplicate listings, or semantically related questions. Condition mapping is a protocol relation rather than a universal reconciliation of economic identity.

Condition preparation. Preparation is a technical registry event. It does not prove market activity, evidence sufficiency, contractual decidability, or the later use of one specific resolution path.

External semantic clocks. Part I reports that external-source publication and contractual-decidability clocks are unmeasured at population scale. Part II therefore does not reinterpret request, oracle, protocol, or redemption times as substitutes for those semantic clocks.

Protocol finality. A condition-resolution event is protocol finality under the observed contract. It is not necessarily the final movement of collateral into a holder’s externally controlled account, and it does not prove that every interface or custodian exposes immediate redemption.

Adapter–protocol order. The publication-grade frozen state layer does not retain enough cross-contract transaction/log identity to evaluate a universal same-transaction Oracle–adapter–CTF order. Where exact secondary order is unavailable, the paper reports interval-qualified or unevaluable paths rather than inferring an order from equal timestamps or shared identifiers.

Redemption optionality. No observed redemption by the snapshot is right censoring, not proof of protocol failure, abandonment, or economic loss. A holder can choose not to redeem a technically available claim.

Address identity. Address-level counts are not beneficial-owner counts. Multiple addresses can belong to one actor, one address can act for many users, and relayers, custodians, or account-abstraction systems can mediate actions.

Entitlement denominator. The event ledger does not generally identify total outstanding winning-token entitlement. The paper therefore does not estimate true entitlement-completion rates or total unredeemed value unless a separate balance reconstruction passes G-VALUE.

Wrappers and collateral routes. Negative-risk wrappers, collateral wrappers, migrated adapters, bridges, fees, burns, and off-chain netting can affect balances and realization without appearing as a simple binary CTF flow.

Transport and historical labels. Provider transports and historical stream labels are not chain truth. The publication build mitigates this through ABI-derived topics, full envelopes, range ledgers, canonical identities, receipt-based log-index recovery, provenance, and independent overlap checks. Residual provider failure remains an operational limitation.

Censoring and selection. Protocol-final and redemption-observed conditions are selected. Survival methods correct risk-set accounting under stated censoring assumptions but do not identify causal effects of route, payout class, metadata, or governance history.

Price and liquidity after finality. There is no universal post-protocol order book against which all conditions can be compared. Some claims stop trading, become stale, or move through wrappers. Cash-equivalent wedge analysis therefore requires a separate price and liquidity gate.

Leveraged-design boundary. State-triggered margin, claim conversion, auctions, reserves, and multi-leg controls are mechanism families studied in Papers 6 and 9. No result here establishes a production-safe or welfare-optimal leveraged product.

Release boundary. Data disclosure boundary. The article reports aggregate lifecycle, payout, redemption, and censoring results; holder-level entitlement reconstruction and raw holder-level records are not distributed.

Payout-vector scope. Payout-vector frequencies are reported separately for exact-linked conditions and the full CTF-only population. Contract-wide counts are coverage and protocol-history results; they are not substituted for Polymarket cohort rates.

13 Conclusion

Resolution is not one event. On Polymarket, Oracle adjudication, adapter terminality, protocol payout recording, redeemability, and observed holder redemption are distinct states with distinct identities, clocks, actors, and claim boundaries.

The final exact bridge contains 108,638 linked conditions. A protocol-resolution event is observed for 99,283 of them by the exact snapshot at 2026-07-12T17:11:41Z. Among that resolved risk set, 92,158 conditions have an observed redemption of any amount and 91,817 have an observed positive-payout redemption; the corresponding condition-specific Kaplan–Meier medians are 182 and 200 seconds. These are event-timing results conditional on an observed protocol resolution, not estimates of eventual economic entitlement completion.

The corrected payout taxonomy is internally reconciled to protocol-resolution incidence. The exact-linked cohort contains 53,847 canonical $(0, 1)$ payout vectors, 45,024 canonical $(1, 0)$ vectors, 410 fifty-fifty vectors, two other valid vectors, and 9,355 conditions with no observed resolution. The full CTF universe is retained separately and never substituted for the frozen Polymarket cohort.

Cross-contract finality remains intentionally conservative. The frozen publication layer supports condition-level interval and candidate classifications but not a universal same-transaction Oracle–adapter–protocol ordering claim. This non-evaluability is itself a result of the evidence contract: missing exact cross-contract ordering keys are not repaired by timestamps or identity joins.

Finally, event-complete redemption data do not by themselves identify total winning entitlement. A broader balance-complete reconstruction could in principle supply that denominator, but it is not part of this release. The paper therefore makes no G-VALUE claim about the fraction of all entitlement redeemed, outstanding winning-token supply, or unredeemed collateral value.

The resulting protocol states and clocks are now suitable inputs to the downstream margin, cross-venue, and asynchronous-finality studies, subject to the same population, observation-grade, and claim boundaries fixed here.

A Operational Entity, Event, State, and Clock Dictionary

A.1 Entity hierarchy

Table 12: Canonical entities and keys.

Entity	Canonical key	Interpretation
Adapter-question	adapter address + question identifier	frozen upstream population unit inherited from Part I
Oracle request generation	oracle address + request key + generation relation	one technical adjudication request within a question history
Condition	canonical condition identifier	CTF registry object with oracle, question identifier, and slot count
Source observation	accepted page/range + source row identity	provider occurrence; can repeat another observation
Canonical event	chain + contract + transaction hash + log index	one exact on-chain event
Redemption event	canonical event identity	one observed redemption action
Provenance group	content-addressed group ID	set-valued source-to-event relation for indistinguishable repeated observations
Analytical condition row	condition ID + frozen analysis revision	merged protocol-finality and holder-history state

A.2 Core event families

The publication event registry is generated from the pinned ABI. The load-bearing target families are:

- **Condition preparation.** Registry relation among oracle, question identifier, slot count, and condition identifier.
- **Condition resolution.** Ordered payout numerators and protocol-finality event.
- **Payout redemption.** Redeemer, collateral, parent collection, condition, index sets, and paid collateral.

Transfer, split, merge, wrapper, and other known CTF events can support value reconstruction but do not enter a target-event count under a different label.

A.3 Clock dictionary

Table 13: Protocol and holder clocks.

Clock	Exact or graded source	Interpretation
t_{prepare}	condition-preparation event	registry time, not finality
$t_{\text{oracle-final}}$	accepted Part I endpoint	irreversible consumable oracle result; exact or interval-observed
$t_{\text{adapter-consume}}$	adapter call path where identifiable	downstream consumption instant; not always separately emitted
$t_{\text{protocol-final}}$	first valid condition-resolution event	protocol payout rule recorded

Clock	Exact or graded source	Interpretation
$t_{\text{adapter-terminal}}$	exact adapter terminal event	observed adapter emission time
$t_{\text{redeemable}}$	contract-state implication of valid payout recording	technical availability; can coincide with protocol finality
$t_{\text{first-redeem}}$	earliest accepted redemption event	first observed holder action of any payout amount
$t_{\text{first-positive-redeem}}$	earliest strictly positive payout redemption	first observed positive collateral realization
T^*	fixed snapshot block timestamp	administrative censoring boundary

A.4 Condition-level states

- **Unprepared.** No accepted preparation event in the target stream.
- **Prepared.** Condition registry relation exists; no valid payout rule recorded.
- **ProtocolFinal.** Valid payout numerators recorded.
- **Redeemable.** Positions can be redeemed under the recorded rule, subject to deployed contract/collateral path.
- **NoRedemption.** No accepted redemption observed by current time.
- **ZeroOnlyObserved.** At least one zero-payout redemption and no positive redemption observed yet.
- **PositiveObserved.** At least one strictly positive redemption observed.
- **RightCensored.** Follow-up ends before the relevant holder endpoint is observed.
- **Conflict.** Load-bearing identity or semantic evidence disagrees.

A.5 Ordering and atomicity

Block timestamp is the primary wall-clock field. Exact order uses block number and log index, with transaction hash and contract address as deterministic tie-break fields. A nullable transaction index is retained for validation but is not required for canonical event identity. Same-transaction events can have zero duration in seconds and a strict exact order.

A.6 Observation grades

E — **Exact** Exact event time and order.

I — **Interval** Endpoint bounded by exact observations but not point-identified.

S — **Snapshot**

Current or terminal representation observed without transition history.

Prx — **Proxy**

Documented substitute with an explicit relationship to the target coordinate.

U — **Unmeasured**

Evidence does not identify the coordinate.

X — **Conflicting**

Load-bearing evidence disagrees.

Grades attach to coordinates rather than entire conditions. A condition can have exact protocol finality and unmeasured entitlement.

B Exact Mapping and Canonical Data Schema

B.1 Question-to-condition relation

The canonical relation has one row per frozen adapter-question and records:

- adapter-question identifier and initialization evidence;
- exact question identifier used by the condition registry;
- condition identifier;
- oracle address and outcome-slot count;
- condition-preparation canonical identity;
- mapping method and evidence hashes;
- ambiguity, multiplicity, and exclusion status.

Allowed mapping methods are exact protocol identities only. The release retains unmatched questions and every alternative exact relation rather than selecting by title or time proximity.

B.2 Source-observation schema

One source-observation row preserves:

- chain and contract;
- block number/hash/timestamp;
- transaction hash;
- raw nullable transaction index and status;
- exact log index;
- exact **removed** value;
- complete ordered topics and complete data;
- accepted page/range and provider provenance;
- raw response/page hashes;
- ABI-derived event type and decoder revision;
- lossless decoded fields;
- canonical identity and semantic payload hashes.

A source observation is never silently dropped. It maps to one canonical event, a provenance group, or an explicit anomaly.

B.3 Canonical event schema

One canonical event row contains:

- canonical event identity;
- full immutable log envelope;
- actual ABI-derived topic/event class;
- typed decoded fields;
- semantic payload hash;
- direct and group-level provenance references;
- duplicate/conflict classification;
- source coverage/range references.

B.4 Condition-resolution relation

One row per canonical condition-resolution event contains:

- condition and question identifiers;
- oracle and outcome-slot count;
- ordered payout numerators as lossless integer strings;
- denominator and normalized class;
- protocol-final block, transaction, and log identity;

- upstream oracle and adapter linkage where exact;
- emission-order class;
- source/provenance references.

B.5 Redemption relation

One row per canonical redemption event contains:

- condition identifier;
- redeemer and collateral token;
- parent collection identifier;
- ordered index sets;
- exact payout amount;
- block, transaction, and log identity;
- protocol-finality linkage;
- positive/zero payout indicator;
- source/provenance references.

B.6 Condition analytical relation

The condition-level analytical row records:

- preparation and protocol-finality states;
- payout vector and class;
- exact or graded oracle/adapter clocks;
- first-any and first-positive redemption endpoints;
- censoring time and event indicators;
- ordered holder-state transitions;
- observed cumulative payout coordinates;
- metadata and route strata;
- gate states.

Addresses remain pseudonymous. Row-level disclosure requires a review independent of analytical validity.

C Estimand, Denominator, and Gate Dictionary

Table 14: Primary estimands and their populations.

Estimand	Population / risk set	Interpretation
Question-to-condition coverage	frozen question cohort	exact mapping availability, not market completeness
Preparation incidence	frozen question cohort	observed condition registry coverage
Protocol-finality incidence	exact linked conditions	share with a valid resolution event by snapshot
L^{OP}	conditions with compatible oracle/protocol clocks	oracle-to-protocol mechanism interval
L^{OA}	conditions with compatible oracle/adapter clocks	oracle-to-adapter interval
D^{PA}	conditions with exact adapter/protocol events	signed emission gap plus order class

Estimand	Population / risk set	Interpretation
Payout-vector class	valid condition-resolution events	exact protocol payout rule class
L^{PR}	protocol-final conditions with follow-up	time to any observed redemption
L^{PR+}	protocol-final conditions with follow-up	time to first positive-payout redemption
Ordered transition probability	protocol-final conditions	no-redemption/zero-only/positive multistate history
Observed cumulative payout	canonical redemption events	realized collateral through observed actions
Entitlement completion	conditions with exact W_c	reported only if G-VALUE passes

C.1 Gate consequence matrix

Table 15: Gate consequences.

Gate	Pass requirement	Consequence of failure
G-ABI	topic registry and decoder derived from pinned ABI	no target event classification
G-COVERAGE	zero-gap/no-unexplained-overlap ledger	no population-wide target-event rate
G-IDENTITY	exact transaction hash, log index, full envelope	no canonical multiplicity or order claim
G-DECODE	lossless typed decoding with raw envelope retained	no payout/event-field analysis
G-LINK	exact question-condition/upstream linkage	no question-level path claim
G-TIMING	compatible clock grade and order	no point-duration or survival claim
G-PRICE	valid executable price/quote observation	no cash-equivalent wedge claim
G-VALUE	exact balance/entitlement denominator	no entitlement-completion claim
G-REBUILD	deterministic network-disabled rebuild	no result based on unreproducible analytical outputs

C.2 Claim-strength labels

Each analytical claim receives one label:

- **Population exact.** Target coverage, identity, decoding, and denominator pass.
- **Audited subset exact.** Events and relations are exact within an explicitly incomplete coverage set.
- **Interval identified.** Endpoint lies between exact lower and upper bounds.
- **Observed holder action.** Exact event, but not universal holder state.
- **Proxy/model-based.** Depends on an explicit proxy or statistical model.
- **Unmeasured.** Evidence does not identify the coordinate.
- **Blocked.** A load-bearing gate fails.

A table can contain multiple labels when columns rely on different evidence grades.

D Survival and Multistate Protocol

D.1 Time origin and censoring

The time origin is the canonical protocol-finality event. Conditions without an observed valid protocol-finality event do not enter the redemption risk set. Follow-up ends at block 90,114,204, whose exact canonical timestamp is 2026-07-12T17:11:41Z. Administrative censoring is deterministic given the frozen snapshot.

D.2 Endpoints

Endpoint A is first observed redemption of any payout amount. Endpoint B is first observed strictly positive payout. A prior zero-payout redemption ends Endpoint A but does not censor or preclude Endpoint B; follow-up for Endpoint B continues until a positive payout or the fixed snapshot.

D.3 Kaplan–Meier outputs

For each endpoint the release includes:

- event and censoring counts;
- numbers at risk at prespecified horizons;
- Kaplan–Meier coordinates;
- median and selected quantiles where identifiable;
- restricted mean event-free time over a registered horizon;
- route, payout, adapter, and metadata strata.

Ties are handled at the available clock resolution. Same-transaction order is preserved separately from the duration in seconds.

D.4 Ordered multistate outputs

The states are no redemption, zero-only observed, and positive observed. Aalen–Johansen transition probabilities estimate the ordered transitions, including the direct no-redemption-to-positive path. Zero-only is not treated as an absorbing competing cause for positive redemption.

D.5 Interval-observed and unavailable clocks

When protocol finality is exact and redemption is exact, the interval is point-observed. When an upstream clock is interval-observed, oracle-to-protocol estimates are reported as intervals or excluded from point-duration tables. Missing clocks are not midpoint-imputed in primary results.

D.6 Inference boundary

The cohort is a frozen historical population. Nonparametric uncertainty intervals summarize the event-history estimator under stated censoring assumptions. They do not identify causal effects or guarantee transfer to future conditions, other venues, or different fee/custody regimes.

D.7 Required diagnostics

The release includes:

1. event/censoring balance by route and payout class;
2. survival curves with numbers at risk;
3. sensitivity to the positive endpoint definition;

4. comparison with the incorrect market-creation time origin;
5. zero-event and same-block timing diagnostics;
6. common-support diagnostics for stratified comparisons.

E Additional Proofs and Formal Audit

Lemma 8 (Protocol-finality ordering). *Suppose the observed CTF contract accepts a redemption event only after payout numerators for its condition have been recorded. Then every accepted redemption event satisfies*

$$t_{cj} \geq t_{\text{protocol-final}}(c).$$

Proof. By hypothesis, the redemption transition requires an already recorded payout rule. The first valid event establishing that rule occurs at $t_{\text{protocol-final}}(c)$. A redemption accepted before that time would violate the transition precondition. Hence the inequality holds. $\square$

Lemma 9 (Administrative censoring does not imply failure). *For a condition resolved before T^* , absence of a qualifying redemption event by T^* identifies right censoring of the first-redemption endpoint, not an infinite redemption time.*

Proof. The data contain no event after the fixed observation boundary. A redemption may occur after T^* without contradicting the observed history. Therefore the event time is known only to exceed the available follow-up interval. $\square$

Proposition 10 (Risk-set origin matters). *A survival curve measured from market creation generally differs from first-redemption survival measured from protocol finality, even when both use the same redemption events.*

Proof. Let $t_0(c)$ be market creation. The two durations are $t_{\text{first-redeem}}(c) - t_0(c)$ and $t_{\text{first-redeem}}(c) - t_{\text{protocol-final}}(c)$. Their difference is $t_{\text{protocol-final}}(c) - t_0(c)$, which varies across conditions and includes time during which redemption is not yet admissible. The distributions therefore need not coincide and answer different questions. $\square$

Proposition 11 (Positive-redemption follow-up continues after zero payout). *A zero-payout redemption before T^* does not identify failure of a later positive-payout redemption for the same condition.*

Proof. A condition can have several position classes and holders. A zero-payout event can burn a losing or otherwise zero-valued position while a winning position remains outstanding. Another holder can later redeem for positive collateral. Therefore the zero event does not preclude the positive endpoint. $\square$

Proposition 12 (Event coverage and entitlement coverage are logically independent). *Zero-gap coverage of all condition-resolution and redemption events does not imply complete entitlement coverage, and complete entitlement balances do not imply event-range coverage.*

Proof. For the first direction, an event-complete ledger can omit unredeemed balances, so W_c remains unidentified. For the second, a balance snapshot can identify outstanding positions while historical redemption events and their timing remain missing. Neither evidence set logically contains the other. $\square$

Proposition 13 (Canonical multiplicity under repeated transport). *Let $S \geq 1$ provider observations share one canonical identity and one semantic payload, and let exact chain evidence contain one corresponding event. Then the canonical event count is one, the provenance count is S , and the number of duplicate source appearances is $S - 1$.*

Proof. The chain identity establishes one event. Every provider occurrence remains a distinct observation/provenance relation. Counting all occurrences as events would overstate chain multiplicity by $S - 1$; discarding them would lose provenance. The stated accounting preserves both quantities. $\square$

E.1 Formal-claim boundary

The formal results establish identification and accounting properties conditional on the pinned transition system. They do not prove:

- that every historical condition used one standard adapter branch;
- that holder redemption is economically optimal or immediate;
- that a particular leverage rule is welfare optimal;
- that protocol finality has the same legal effect in every jurisdiction;
- that address-level activity identifies beneficial owners.

Those questions require empirical, legal, or mechanism-design evidence beyond the propositions.

E.2 Proof inventory

The article contains direct proofs for:

1. same-transaction order preservation;
2. oracle/protocol non-equivalence;
3. protocol/holder non-equivalence;
4. scalar resolution timestamp insufficiency;
5. payout-vector scale invariance;
6. redemption-event insufficiency for entitlement completion;
7. source-duplication accounting;
8. protocol-finality ordering;
9. censoring interpretation;
10. risk-set origin;
11. zero-to-positive endpoint logic;
12. event/value coverage independence;
13. canonical multiplicity.

F Reproducibility and Evidence Lineage

F.1 Analytical artifacts

The empirical tables and figures are derived from a fixed set of analytical relations:

1. the question-to-condition mapping and attrition relation;
2. protocol-finality paths and exact event-order keys;
3. the ordered payout-vector taxonomy;
4. first-redemption, first-positive-redemption, and multistate histories;
5. observed payout-realization and gate-attrition tables; and
6. source relations for figures, tables, and alternative text.

These relations preserve denominator composition, clock definitions, and the evidence class of each reported quantity. Numerical values are generated from frozen inputs rather than entered individually into tables.

F.2 Event identity and coverage

The target event family is derived from the pinned ABI rather than from stream labels. A canonical event is identified by

(chain, contract, transaction hash, log index).

The retained envelope includes block identity, timestamp, ordered topics, data, decoded fields, and provenance. A nullable transaction index is auxiliary; exact log index remains load-bearing for event order.

Population-wide target-event claims require a zero-gap range ledger over the registered deployment-to-snapshot interval. Recursive ranges are inclusive, non-overlapping, and linked to their parents. A provider response is transport evidence rather than the event itself: duplicate source observations remain provenance when they map to the same canonical event.

F.3 Lineage and reproducibility

The analytical lineage is

source observation $\rightarrow$ canonical event $\rightarrow$ exact relation $\rightarrow$ analytical table or figure.

For each reported table or figure, the lineage records its input relations, schema, key set, denominator, clock origin, and content hash. A network-disabled rebuild compares event identity, semantic payloads, coverage, linkage, attrition, survival relations, and figure-source inputs. Where deterministic file metadata permits, byte identity is checked; otherwise the check is semantic.

F.4 Evidence and disclosure boundary

The scientific record distinguishes public aggregate tables, reconstruction relations needed to reproduce the stated claims, and retained anomaly evidence. Public blockchain visibility does not by itself identify beneficial ownership, intent, institutional identity, or legal status. Accordingly, reported tables aggregate redemption activity by condition, route, payout class, or timing stratum unless row-level disclosure is necessary for the stated reproducibility purpose.

The data and code availability statement identifies the materials needed to assess the reported claims. Absence of an exact entitlement denominator remains a scientific limitation: observed redemption events identify realized actions and paid collateral, not universal entitlement completion.

G Version-Locked Hypotheses and Interpretation Boundaries

G.1 Hypothesis disposition rule

The seven hypotheses in Section 8 are retained whether they pass, fail, or remain blocked. For each hypothesis, the analysis reports its statement, required population and gates, result or uncertainty summary, disposition, and permitted claim language. A failed threshold is not replaced after inspection, and a blocked hypothesis is not evaluated on an opportunistic denominator.

G.2 Interpretation conditions

The formal units, estimands, time origins, event taxonomy, and entitlement boundary are fixed by the analytical design. Population-wide interpretations require the exact target-event dataset to satisfy semantic and zero-gap coverage requirements. Timing and survival

interpretations require the relevant compatible clocks and risk sets. Reported tables and figures are generated from frozen analytical relations and assessed by the reproducibility checks described in Section F.

The absence of an exact balance-consistent entitlement denominator leaves G-VALUE blocked. It does not prevent reporting protocol-finality, payout-vector, censoring, or observed-redemption quantities within their stated populations and evidence classes.

Data and Code Availability

The article reports aggregate lifecycle, payout, redemption, and censoring results; holder-level entitlement reconstruction and raw holder-level records are not distributed.

Generative AI Disclosure

OpenAI ChatGPT and Codex were used for editorial and technical assistance during manuscript preparation. The author made all substantive research decisions, reviewed the final manuscript, and assumes full responsibility for its contents.

Funding

This research received no external funding.

Competing Interests

The author is affiliated with the Research Department of Devnull FZCO and leads the ForesightFlow research programme. No external sponsor influenced the research design, analysis, interpretation, or decision to publish. The article does not evaluate a commercial product or make investment recommendations.

Acknowledgments

This work was completed within the ForesightFlow research programme. All remaining errors are the author’s responsibility.

References

- Aalen, Odd O. and Soren Johansen (1978). “An Empirical Transition Matrix for Non-Homogeneous Markov Chains Based on Censored Observations”. In: *Scandinavian Journal of Statistics* 5.3, pp. 141–150.
- Adler, John, Ryan Berryhill, Andreas Veneris, Zissis Poulos, Neil Veira, and Anastasia Kastania (2018). “Astraea: A Decentralized Blockchain Oracle”. DOI: 10.48550/arXiv.1808.00528. arXiv: 1808.00528.
- Andersen, Per Kragh, Ornulf Borgan, Richard D. Gill, and Niels Keiding (1993). *Statistical Models Based on Counting Processes*. New York: Springer.
- Brunnermeier, Markus K. and Lasse Heje Pedersen (2009). “Market Liquidity and Funding Liquidity”. In: *Review of Financial Studies* 22.6, pp. 2201–2238. DOI: 10.1093/rfs/hhn098.
- Committee on Payment and Settlement Systems and Technical Committee of IOSCO (2012). *Principles for Financial Market Infrastructures*. International standard. Bank for International Settlements and International Organization of Securities Commissions. URL: <https://www.bis.org/cpmi/publ/d101a.pdf>.

- Duffie, Darrell, Nicolae Gârleanu, and Lasse Heje Pedersen (2005). “Over-the-Counter Markets”. In: *Econometrica* 73.6, pp. 1815–1847. DOI: 10.1111/j.1468-0262.2005.00639.x.
- Eskandari, Shayan, Mehdi Salehi, Wanyun Catherine Gu, and Jeremy Clark (2021). “SoK: Oracles from the Ground Truth to Market Manipulation”. In: *Proceedings of the 3rd ACM Conference on Advances in Financial Technologies*. DOI: 10.1145/3479722.3480994. arXiv: 2106.00667.
- Fine, Jason P. and Robert J. Gray (1999). “A Proportional Hazards Model for the Subdistribution of a Competing Risk”. In: *Journal of the American Statistical Association* 94.446, pp. 496–509.
- Gnosis (2020). *Conditional Tokens Framework*. URL: <https://github.com/gnosis/conditional-tokens-contracts> (visited on 08/03/2026).
- Hanson, Robin (2003). “Combinatorial Information Market Design”. In: *Information Systems Frontiers* 5.1, pp. 107–119.
- Kaplan, Edward L. and Paul Meier (1958). “Nonparametric Estimation from Incomplete Observations”. In: *Journal of the American Statistical Association* 53.282, pp. 457–481.
- Kota, Tarun (2026). “Design and Evaluation of Multi-Agent AI Oracle Systems for Prediction Market Resolution”. DOI: 10.48550/arXiv.2605.30802. arXiv: 2605.30802.
- Manski, Charles F. (2006). “Interpreting the Predictions of Prediction Markets”. In: *Economics Letters* 91.3, pp. 425–429.
- Mühlberger, Roman, Stefan Bachhofner, Eduardo Castelló Ferrer, Claudio Di Ciccio, Ingo Weber, Maximilian Wöhrer, and Uwe Zdun (2020). “Foundational Oracle Patterns: Connecting Blockchain to the Off-Chain World”. In: *Business Process Management: Blockchain and Robotic Process Automation Forum*. Springer, pp. 35–51. DOI: 10.1007/978-3-030-58779-6_3. arXiv: 2007.14946.
- Nechepurenko, Maksym (2026a). *A Taxonomy of Event-Linked Perpetual Futures: Design Axes, Failure Modes, and Empirical Evaluability*. SSRN abstract 6748298; arXiv:2605.10428. DOI: 10.2139/ssrn.6748298. arXiv: 2605.10428 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748298>.
- (2026b). *Fill-Side Non-Retail Trading on Polymarket: Identification Limits, Behavioral Tiers, and Microstructure Signatures*. SSRN abstract 6751284; arXiv title differs: Fill-Side Behavioral Concentration on Polymarket: Identification Limits under Record-Level Attribution. DOI: 10.2139/ssrn.6751284. arXiv: 2605.11640 [q-fin.TR]. URL: <https://ssrn.com/abstract=6751284>.
- (2026c). *Manipulation, Informed Trading, and Regulation in Leveraged Event-Linked Markets*. SSRN abstract 6748318; arXiv:2605.10486. DOI: 10.2139/ssrn.6748318. arXiv: 2605.10486 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748318>.
- (2026d). *Resolution Is Not Settlement, Part I: Oracle Adjudication and Semantic Governance on Polymarket*. SSRN abstract 7344079. DOI: 10.2139/ssrn.7344079. URL: <https://ssrn.com/abstract=7344079>.
- (2026e). *Resolution-Aware Perpetual Futures on Binary Prediction Markets: Failure Modes and Mechanical Stress Tests Using Polymarket Data*. SSRN abstract 6748278; arXiv:2605.10400. DOI: 10.2139/ssrn.6748278. arXiv: 2605.10400 [q-fin.TR]. URL: <https://ssrn.com/abstract=6748278>.
- Polymarket (2026a). *Conditional Token Framework Overview*. URL: <https://docs.polymarket.com/trading/ctf/overview> (visited on 07/12/2026).
- (2026b). *Positions and Tokens*. URL: <https://docs.polymarket.com/concepts/positions-tokens> (visited on 07/12/2026).
- (2026c). *Resolution*. URL: <https://docs.polymarket.com/concepts/resolution> (visited on 07/12/2026).
- (2026d). *UMA CTF Adapter*. URL: <https://github.com/Polymarket/uma-ctf-adapter> (visited on 07/12/2026).

- Polymarket (2026e). *UmaCtfAdapter Solidity Source*. URL: <https://github.com/Polymarket/uma-ctf-adapter/blob/8b76cc9e0d46c6f7450a0adb0ddc0f5b0568c9cc/src/UmaCtfAdapter.sol> (visited on 07/12/2026).
- Turnbull, Bruce W. (1976). “The Empirical Distribution Function with Arbitrarily Grouped, Censored and Truncated Data”. In: *Journal of the Royal Statistical Society: Series B* 38.3, pp. 290–295.
- Wolfers, Justin and Eric Zitzewitz (2004). “Prediction Markets”. In: *Journal of Economic Perspectives* 18.2, pp. 107–126.