

# COVariance-Induced Fairness Gap Penalty for Subgroup-Fair Clustering

Kyungseon Lee<sup>1,\*</sup> Hankyo Jeong<sup>1,\*</sup> Kunwoong Kim<sup>2,\*</sup>  
Kwanho Lee<sup>1</sup> Yongdai Kim<sup>1,†</sup>

<sup>1</sup>Department of Statistics, Seoul National University <sup>2</sup>KAIST AI

pplleeqq@snu.ac.kr hankyo2273@snu.ac.kr kwkim.online@gmail.com  
khlee0527@snu.ac.kr ydkim903@snu.ac.kr

## Abstract

Fair clustering aims to make cluster assignments independent of sensitive attributes, but this goal becomes challenging when multiple sensitive attributes jointly define many subgroups. In such settings, directly extending existing fair clustering algorithms is computationally expensive or numerically unstable, especially when the number of subgroups grows exponentially and some subgroups contain only a few instances. To address these challenges, we define a subgroup-fairness gap for clustering and derive a covariance-based surrogate that exactly matches this gap. We then introduce a continuous relaxation of the surrogate, enabling efficient gradient-based optimization and yielding our proposed algorithm, COVA-FC. We also show that subgroup fairness alone does not imply marginal fairness, and extend our framework to capture a subgroup-marginal-fairness gap. Experiments on benchmark datasets show that COVA-FC achieves competitive cost-fairness trade-offs and improves computational efficiency over existing baselines in both subgroup and higher-order marginal settings.

## 1 Introduction

Algorithmic fairness is a critical requirement for decision-making systems that affect access to opportunities, resources, or services, as systematic biases and disparities can harm protected and underrepresented populations. Accordingly, regulations and policies increasingly require trustworthy and non-discriminatory algorithms, making fair learning important both ethically and practically [17, 33]. Fairness in machine learning has been studied across various tasks, including classification [1, 13, 16, 23, 24], regression [2, 11], generation [15, 39], and clustering [5, 10, 27].

Among these, *fair clustering* [10] aims to construct clusters whose memberships are not strongly associated with sensitive attributes. The technical goal is to achieve a desirable trade-off between clustering cost and fairness, since improving fairness typically comes with an increase in cost [6, 9].

However, most existing fair clustering algorithms were developed mainly for a single sensitive attribute [3, 10, 14, 25, 42]. In many modern applications, however, individuals are associated with multiple sensitive attributes, whose intersections can reveal fairness violations even though a given algorithm is fair for each sensitive attribute. For example, a lending model may equalize approval rates across gender and race overall, yet the subgroup “female & minority race” may still receive markedly lower approval rates. This motivates the need for subgroup fairness, where a *subgroup* is defined by a specific combination of sensitive attribute values. Although there is a large number

\*Equal contribution.

†Corresponding author.

of studies for subgroup-fair classification [7, 19, 21, 26, 28, 34], not much work has been done for subgroup-fair clustering, which is the main theme of this paper.

Existing fair clustering algorithms could be extended to this setting by treating multiple sensitive attributes as a single sensitive attribute with multiple categories, but this naive extension creates substantial computational and optimization challenges. Given  $q$  binary sensitive attributes, the number of subgroups becomes  $2^q$ , and many subgroups can be very sparse. Algorithms using linear programming (LP), such as [5, 14, 25], become computationally expensive as the number of subgroup-dependent constraints increases. Penalty-based methods such as VFC [42] and FairKM [37] would be promising but they have their own limitations. VFC becomes numerically unstable when very small subgroups exist because their fairness penalties depend on subgroup sizes. FairKM relies on hard cluster assignment, making it difficult to finely match the desired subgroup proportions across clusters when some subgroups contain only a few instances, but its modification for soft cluster assignment would not be easy. Thus, subgroup-fair clustering remains largely underexplored, especially in settings where the number of subgroups is large.

In this paper, we develop a learning algorithm for subgroup-fair clustering with multiple sensitive attributes. Formally, assume that we are given  $q$  binary sensitive attributes, and let the  $i$ -th instance have a sensitive attribute vector  $s_i \in \{0, 1\}^q$ , which induces  $2^q$  subgroups.

**Our approach.** Inspired by [22], we first define a subgroup-fairness gap for clustering and derive a smooth covariance-based surrogate for this gap. The surrogate leads to a gradient-based algorithm that optimizes the clustering cost with a fairness penalty and supports parallel per-instance assignment updates, making the method scalable to large data with many subgroups. We call the proposed algorithm COVA-FC (*COVA*riance-based *Fair Clustering*).

**Additional marginal control.** Beyond subgroup fairness, marginal fairness (fairness for each sensitive attribute) may also be required in practice, since subgroup fairness alone may fail to control marginal fairness. To handle such cases, we further extend COVA-FC to jointly control subgroup and marginal fairness with little additional computation.

The main contributions of this work are:

- ◇ We develop a subgroup-fair clustering algorithm under multiple sensitive attributes that is numerically stable and easily scalable to achieve competitive cost-fairness trade-offs.
- ◇ We propose a way to ensure subgroup and marginal fairness simultaneously without much additional computation burden.
- ◇ We conduct extensive numerical studies to illustrate the advantages of COVA-FC over existing fair clustering algorithms.

## 2 Subgroup-fairness gap and its relaxation

Suppose we are given a set of instances  $\{(x_i, s_i)\}_{i=1}^n$ , where each  $x_i \in \mathbb{R}^d$  is a  $d$ -dimensional feature vector and  $s_i = (s_i^{(1)}, \dots, s_i^{(q)})^\top \in \{0, 1\}^q$  is a vector of  $q$  binary sensitive attributes. For each  $s \in \{0, 1\}^q$ , let  $n_s := \sum_{i=1}^n \mathbb{I}(s_i = s)$ . For  $N \in \mathbb{N}$ , we write  $[N] = \{1, \dots, N\}$ . We consider only binary sensitive attributes for notational simplicity but our algorithm can be extended to multi-valued sensitive attributes.

**Clustering objective.** Following prior works for fair clustering [5, 14, 25, 30, 40, 42], we consider the  $K$ -means clustering problem. For a given number of clusters  $K \in \mathbb{N}$ , let  $\mu = (\mu_1, \dots, \mu_K)^\top$  with  $\mu_k \in \mathbb{R}^d$ ,  $k \in [K]$  denote the cluster centroids, and let  $\mathbf{A} = (A_1, \dots, A_n)$  with  $A_i \in [K]$ ,  $i \in [n]$  denote the (hard) cluster assignment vector. Later, we overload  $\mathbf{A}$  to also denote a soft cluster assignment  $A_i \in \mathbb{S}^K$  where  $\mathbb{S}^K$  is the simplex on  $\mathbb{R}^K$  (e.g., Section 2.3), whenever the meaning is clear from context. The standard  $K$ -means clustering problem is to find the cluster centroids  $\mu$  and cluster assignments  $\mathbf{A}$  that minimizes the *clustering cost*, i.e., the average of within-cluster distances:  $\min_{\mu, \mathbf{A}} \frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A})$ , where  $L_i(\mu, \mathbf{A}) := \sum_{k=1}^K \mathbb{I}(A_i = k) \|x_i - \mu_k\|^2$  is the cost for the  $i$ -th instance.

## 2.1 Subgroup-fairness gap

Our primary goal is to find the cluster centroids and cluster assignment  $(\mu, \mathbf{A})$  that achieve (i) not only a low clustering cost  $\frac{1}{n} \sum_i L_i(\mu, \mathbf{A})$ , (ii) but also fairness with respect to multiple sensitive attributes. In this subsection, we propose a measure to quantify the level of subgroup unfairness.

For each  $k \in [K]$ , define the overall assignment probability as  $p_k(\mathbf{A}) := \frac{1}{n} \sum_{i=1}^n \mathbb{I}(A_i = k)$ . For each subgroup  $s \in \{0, 1\}^q$  with  $n_s > 0$ , define the conditional assignment probability in subgroup  $s$  as  $p_{k|s}(\mathbf{A}) := \frac{1}{n_s} \sum_{i: s_i = s} \mathbb{I}(A_i = k)$ . Let  $\pi_s := n_s/n$  denote the subgroup proportion. Inspired by the idea of subgroup fairness in [22], we define the following subgroup-fairness gap for clustering.

**Definition 2.1** (Subgroup-fairness gap). The *subgroup-fairness gap* of  $\mathbf{A}$  is defined as

$$\Delta(\mathbf{A}) := \max_{s \in \{0,1\}^q, n_s > 0} \pi_s \sum_{k=1}^K |p_k(\mathbf{A}) - p_{k|s}(\mathbf{A})|. \quad (1)$$

We say  $\mathbf{A}$  is *subgroup-fair at level  $\varepsilon$*  if  $\Delta(\mathbf{A}) \leq \varepsilon$ . The weight  $\pi_s$  reflects the size of subgroup  $s$ , and prevents tiny subgroups from dominating the gap  $\Delta$ . Without this weight, we cannot reduce the subgroup-fairness gap under a certain level that depends on the sizes of tiny subgroups. See Appendix A.1 for an example.

**Objective of learning subgroup-fair clusters.** Based on the subgroup-fairness gap defined in Definition 2.1, a natural goal is to minimize the clustering cost under the subgroup fairness constraint:

$$\min_{\mu, \mathbf{A}} \frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A}) \quad \text{subject to} \quad \Delta(\mathbf{A}) \leq \varepsilon. \quad (2)$$

A common way to handle such a constrained optimization is to solve a penalized problem, i.e., minimize  $\frac{1}{n} \sum_i L_i(\mu, \mathbf{A}) + \lambda \Delta(\mathbf{A})$  where  $\lambda > 0$  is the Lagrangian multiplier.

## 2.2 CR(A): a covariance-based surrogate for $\Delta(\mathbf{A})$

**Motivation: challenges in using  $\Delta$  as the fairness constraint.** Directly using  $\Delta(\mathbf{A})$  as the fairness penalty poses a critical computational challenge. This is because, unlike the standard  $K$ -means objective, the penalized objective is not separable in  $\mathbf{A}$ . In  $K$ -means, the clustering cost  $\frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A})$  decomposes over  $i \in [n]$ , so each assignment  $A_i$  can be updated in parallel given  $\mu$ . In contrast,  $\Delta(\mathbf{A})$  is not separable because it involves the absolute difference between the overall assignment proportion  $p_k(\mathbf{A}) = \frac{1}{n} \sum_{i=1}^n \mathbb{I}(A_i = k)$  and the subgroup-conditional assignment proportion  $p_{k|s}(\mathbf{A}) = \frac{1}{n_s} \sum_{i: s_i = s} \mathbb{I}(A_i = k)$ , both of which depend on sums of assignments over certain instances. As a result, changing a single assignment  $A_i$  affects these proportions as well as  $\Delta(\mathbf{A})$ , making parallel updates of  $A_i$  difficult. To address the problem, we introduce in this subsection a surrogate that rewrites  $\Delta(\mathbf{A})$  in a more optimization-friendly form.

**Proposed surrogate fairness gap.** We now define the *covariance-based* surrogate. This idea comes from the insight that subgroup unfairness can be understood as how well subgroup memberships predict the cluster assignments, and so subgroup unfairness can be viewed as statistical dependence between the cluster assignment and the subgroup membership.

For each subgroup membership  $s \in \{0, 1\}^q$ , define  $c_{is} := 2\mathbb{I}(s_i = s) - 1$  and  $\bar{c}_s := \frac{1}{n} \sum_{i=1}^n c_{is} = 2\pi_s - 1$ . Let  $C(\mathbf{A}, s, \beta) := \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k \mathbb{I}(A_i = k) \right) (c_{is} - \bar{c}_s)$ , and define the **CovaRiance-based (CR) subgroup-fairness gap** as

$$\text{CR}(\mathbf{A}) := \max_{s \in \{0,1\}^q, n_s > 0} \max_{\beta \in \mathcal{B}_\infty} C(\mathbf{A}, s, \beta), \quad \text{where} \quad \mathcal{B}_\infty := \{\beta \in \mathbb{R}^K : \|\beta\|_\infty \leq 1\}. \quad (3)$$

For a given subgroup membership  $s \in \{0, 1\}^q$ , the term  $(c_{is} - \bar{c}_s)$  is the centered subgroup sign, and  $\sum_{k=1}^K \beta_k \mathbb{I}(A_i = k)$  is a signed score assigned to the cluster label  $A_i$  with  $\beta_k \in [-1, 1]$ . Hence,  $C(\mathbf{A}, s, \beta)$  is the empirical covariance between the signed cluster assignment and the centered membership for subgroup  $s$ . Maximizing over  $\beta \in \mathcal{B}_\infty$  chooses the sign pattern that aligns best with the imbalance in subgroups, and maximizing over  $s$  selects the most violated subgroup. Therefore,

$\text{CR}(\mathbf{A})$  can also be understood as a tool to quantify the largest linear dependence between the cluster assignment  $\mathbf{A}$  and the subgroup membership. The following Theorem 2.1 provides a theoretical support for this interpretation, whose proof is deferred to Appendix B.1.

**Theorem 2.1** (Equivalence between  $\Delta$  and CR). *For any hard cluster assignment  $\mathbf{A}$ , we have  $\Delta(\mathbf{A}) = \text{CR}(\mathbf{A})$ .*

Notably,  $\text{CR}(\mathbf{A})$  is not an approximate surrogate, but an exact surrogate for  $\Delta(\mathbf{A})$ .

### 2.3 Optimization challenges of $\text{CR}(\mathbf{A})$ and a continuous relaxation

Although  $\text{CR}(\mathbf{A})$  is exactly equivalent to  $\Delta(\mathbf{A})$ , it is still difficult to be minimized directly in practice. The difficulty comes from two discrete components: the subgroup membership  $s \in \{0, 1\}^q$  and the hard cluster assignment  $\mathbf{A} \in [K]^n$ . Even a small change in  $\mathbf{A}$  can switch the most violated subgroup abruptly, which often makes the optimization unstable. To improve optimization stability, we relax both the hard cluster assignment and the discrete maximization over subgroups into continuous ones.

**(1) Relaxation of the cluster assignment  $\mathbf{A}$ .** We first replace the hard cluster assignment vector with soft cluster assignment vector. Specifically, we let  $\mathbf{A} = (A_1, \dots, A_n)^\top \in [0, 1]^{n \times K}$ , where each row  $A_i = (A_{i1}, \dots, A_{iK})^\top$  lies in the simplex  $\mathbb{S}^K$ . Here,  $A_{ik}$  represents the assignment probability of  $x_i$  to cluster  $k$ . Hard assignment is recovered as the special case in which each  $A_i$  is one-hot.

Under this relaxation, we replace  $\mathbb{I}(A_i = k)$  by  $A_{ik}$  in the covariance term, and rewrite the clustering cost as  $L_i(\mu, \mathbf{A}) = \sum_{k=1}^K A_{ik} \|x_i - \mu_k\|^2$ . This makes both the clustering loss and the covariance term differentiable with respect to  $\mathbf{A}$ , which enables gradient-based updates.

**(2) Relaxation of the worst-case subgroup.** We next relax the hard maximization over subgroups. Let  $\mathcal{S}_+ := \{s \in \{0, 1\}^q : n_s > 0\}$  be the set of observed subgroups and let  $M_+ := |\mathcal{S}_+|$ . Since empty subgroups do not contribute to the empirical fairness gap, we optimize only over  $\mathcal{S}_+$ . Instead of selecting a single observed subgroup, we allow a convex combination of subgroup indicators through a weight vector  $\mathbf{v} \in \mathbb{S}^{M_+}$ . This yields the continuous surrogate

$$\overline{\text{CR}}(\mathbf{A}) := \max_{\mathbf{v} \in \mathbb{S}^{M_+}} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) \mathbf{v}^\top (c_i - \bar{c}), \quad (4)$$

where  $c_i := (c_{is})_{s \in \mathcal{S}_+}$  and  $\bar{c} := \frac{1}{n} \sum_{i=1}^n c_i$ . Optimizing over  $\mathbf{v}$  avoids abrupt switching of the worst-case subgroup and leads to a smoother and continuous objective. The following theorem shows that  $\overline{\text{CR}}(\mathbf{A})$  is a continuous relaxation of  $\Delta(\mathbf{A})$ , whose proof is deferred to Appendix B.1.

**Theorem 2.2** (Relationship between  $\Delta$  and  $\overline{\text{CR}}$ ). *For any hard cluster assignment  $\mathbf{A}$ , we have  $\Delta(\mathbf{A}) = \overline{\text{CR}}(\mathbf{A})$ .*

## 3 Considering marginal fairness

The subgroup-fairness gap introduced in the previous section provides a tractable objective for handling multiple sensitive attributes. However, it evaluates fairness only at the finest subgroup level and may therefore provide loose control over marginal fairness. This can be socially unacceptable in applications, even when subgroup fairness is achieved. Indeed, a small subgroup-fairness gap does not necessarily imply a small marginal-fairness gap. See Appendix A.2 for a counterexample and Section 5.3 for empirical evidence. To address this limitation, we modify the subgroup-fairness gap to enforce subgroup and marginal fairness simultaneously.

### 3.1 Modification of the subgroup-fairness gap for marginal fairness

For  $j \in [q]$  and  $a \in \{0, 1\}$ , define the marginal subgroup as  $W_{j,a} := \{s \in \{0, 1\}^q : s_j = a\}$ . This set contains all of the subgroups whose  $j$ -th sensitive attribute takes the value  $a$ . We call  $W_{j,0}$  and  $W_{j,1}$  the *marginal subgroups* corresponding to the sensitive attribute  $s_j$ . Let  $n_{W_{j,a}} := \sum_{i=1}^n \mathbb{I}(s_i \in W_{j,a})$ ,  $\pi_{W_{j,a}} := \frac{n_{W_{j,a}}}{n}$ , and define  $p_{k|W_{j,a}}(\mathbf{A}) := \frac{1}{n_{W_{j,a}}} \sum_{i: s_i \in W_{j,a}} \mathbb{I}(A_i = k)$ . We say that  $\mathbf{A}$  is

*marginally fair* with respect to  $s_j$  if  $\Delta_j(\mathbf{A})$  is small where

$$\Delta_j(\mathbf{A}) = \max_{a \in \{0,1\}} \pi_{W_{j,a}} \sum_{k=1}^K |p_k(\mathbf{A}) - p_{k|W_{j,a}}(\mathbf{A})|.$$

In turn, we say that  $\mathbf{A}$  is marginally fair if  $\Delta_{\text{marg}}(\mathbf{A}) = \max_{j \in [q]} \Delta_j(\mathbf{A})$ , which we call the marginal-fairness gap, is small. Finally, we propose a modification of the subgroup-fairness gap in Definition 3.1 that ensures subgroup fairness and marginal fairness simultaneously.

**Definition 3.1** (Subgroup-marginal-fairness gap). The subgroup-marginal-fairness gap of  $\mathbf{A}$  is defined as  $\Delta_{\text{sub-marg}}(\mathbf{A}) := \max\{\Delta(\mathbf{A}), \Delta_{\text{marg}}(\mathbf{A})\}$ .

### 3.2 Higher-order marginal fairness

Beyond marginal fairness, one may also consider  $r$ -th order marginal fairness whose fairness gap is defined as follows. Let  $\theta$  be a subset of  $[q]$  with  $|\theta| = r$  and define  $s_\theta = (s_j, j \in \theta)$ . For  $a \in \{0,1\}^r$ , define  $W_{s_\theta,a} = \{s : s_\theta = a\}$ . We say that  $\mathbf{A}$  is  $r$ -th order marginally fair with respect to  $s_\theta$  if  $\Delta_{s_\theta}(\mathbf{A})$  is small, where

$$\Delta_{s_\theta}(\mathbf{A}) := \max_{a \in \{0,1\}^r} \pi_{W_{s_\theta,a}} \sum_{k=1}^K |p_k(\mathbf{A}) - p_{k|W_{s_\theta,a}}(\mathbf{A})|.$$

Here  $\pi_{W_{s_\theta,a}}$  and  $p_{k|W_{s_\theta,a}}(\mathbf{A})$  are defined similarly to  $\pi_{W_{j,a}}$  and  $p_{k|W_{j,a}}(\mathbf{A})$ . In turn, we say that  $\mathbf{A}$  is  $r$ -th order marginally fair if  $\Delta_{\text{marg},r}(\mathbf{A}) = \max_{\theta \subset [q]: |\theta|=r} \Delta_{s_\theta}(\mathbf{A})$ , which we call the  $r$ -th order marginal-fairness gap, is small. Similar to Definition 3.1, we define subgroup-marginal-fairness gap up to the  $r$ -th order as the following.

**Definition 3.2** (Subgroup-marginal-fairness gap up to the  $r$ -th order). The subgroup-marginal-fairness gap of  $\mathbf{A}$  up to the  $r$ -th order is defined as  $\Delta_{\text{sub-marg},r}(\mathbf{A}) := \max\{\Delta(\mathbf{A}), \max_{l \in [r]} \Delta_{\text{marg},l}(\mathbf{A})\}$ .

### 3.3 Surrogate subgroup-marginal-fairness gap

In this subsection, we show that the surrogate subgroup-fairness gap introduced in Section 2.3 can be modified easily for the subgroup-marginal-fairness gap up to the  $r$ -th order. For notational simplicity, we introduce a notion of subgroup-subsets. A *subgroup-subset*  $W$  is nothing but a subset of  $\{0,1\}^q$ . Note that any  $r$ -th order marginal subgroups as well as subgroups themselves are subgroup-subsets.

Let  $\mathcal{W}$  be the set of all subgroup-subsets involving the subgroup-marginal-fairness gap, which includes  $W_{s_\theta,a}$  for all  $\theta \subset [q]$  with  $1 \leq |\theta| \leq r$  and  $a \in \{0,1\}^{|\theta|}$  as well as  $\{s\}$  for all  $s \in \{0,1\}^q$ . Then, we have  $\Delta_{\text{sub-marg},r}(\mathbf{A}) = \Delta(\mathbf{A}; \mathcal{W})$ , where

$$\Delta(\mathbf{A}; \mathcal{W}) := \max_{W \in \mathcal{W}: n_W > 0} \pi_W \sum_{k=1}^K |p_k(\mathbf{A}) - p_{k|W}(\mathbf{A})|. \quad (5)$$

By choosing  $\mathcal{W}$  accordingly, we can make  $\Delta(\mathbf{A}; \mathcal{W})$  equal either the subgroup-fairness gap or the subgroup-marginal-fairness gap (up to the  $r$ -th order). We are going to develop a fair clustering algorithm under the fairness constraint on  $\Delta(\mathbf{A}; \mathcal{W})$  for a given  $\mathcal{W}$ .

Let  $\mathcal{W} = \{W_1, W_2, \dots, W_M\}$  with  $M := |\mathcal{W}|$ , and let  $\mathcal{M}_+ := \{m \in [M] : n_{W_m} > 0\}$  with  $M_+ := |\mathcal{M}_+|$ . For each  $m \in [M]$ , define  $c_{im} := 2\mathbb{I}(s_i \in W_m) - 1$  and  $\bar{c}_m := \frac{1}{n} \sum_{i=1}^n c_{im}$ , and write  $c_i := (c_{im})_{m \in \mathcal{M}_+}$  and  $\bar{c} := \frac{1}{n} \sum_{i=1}^n c_i$ .

Similarly to what we have done in Section 2, for hard assignment, define

$$\text{CR}(\mathbf{A}; \mathcal{W}) := \max_{m \in \mathcal{M}_+} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k \mathbb{I}(A_i = k) \right) (c_{im} - \bar{c}_m), \quad (6)$$

and for soft assignment, replacing  $\mathbb{I}(A_i = k)$  by  $A_{ik}$  and relaxing the worst-group choice gives

$$\overline{\text{CR}}(\mathbf{A}; \mathcal{W}) := \max_{\mathbf{v} \in \mathbb{S}^{M_+}} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) \mathbf{v}^\top (c_i - \bar{c}), \quad (7)$$

**Theorem 3.1** (Equivalence for fairness over  $\mathcal{W}$ ). *For any hard cluster assignment  $\mathbf{A}$ ,*

$$\Delta(\mathbf{A}; \mathcal{W}) = \text{CR}(\mathbf{A}; \mathcal{W}) = \overline{\text{CR}}(\mathbf{A}; \mathcal{W}). \quad (8)$$

The proofs are deferred to Appendix B.1. Theorem 3.1 implies that,  $\text{CR}(\mathbf{A}; \mathcal{W})$  and  $\overline{\text{CR}}(\mathbf{A}; \mathcal{W})$  are both equal to the fairness gap over  $\mathcal{W}$  for hard cluster assignment. When  $\mathcal{W}$  is the collection of all subgroups, Theorem 3.1 reduces to the subgroup-only case.

## 4 Proposed algorithm: COVA-FC

Given a collection  $\mathcal{W}$  of subgroup-subsets, we learn fair clusters by minimizing

$$\frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A}) + \lambda \overline{\text{CR}}(\mathbf{A}; \mathcal{W}) \quad (9)$$

with respect to the centroids  $\mu = (\mu_1, \dots, \mu_K)$  and the soft assignment matrix  $\mathbf{A} = (A_i)_{i=1}^n$ , for  $A_i \in \mathbb{S}^K$ . Here,  $\lambda \geq 0$  controls the trade-off between clustering cost and fairness.

We call the resulting algorithm **Covariance-based Fair Clustering** (COVA-FC). The algorithm alternates between two steps. First, for fixed  $\mathbf{A}$ , it updates the adversarial variables  $(\beta, \mathbf{v})$  to identify the most violated subgroup-subset direction in  $\overline{\text{CR}}$ . Second, for fixed  $(\beta, \mathbf{v})$ , it updates the soft assignment  $\mathbf{A}$  by gradient descent and updates the centroids  $\mu$  as in standard K-means algorithms with soft assignment. The assignment update has a closed-form gradient and decomposes over instances, which enables efficient parallel updates. Detailed update formulas and the full pseudocode are provided in Appendix C. Below, we explain two computational advantages of COVA-FC.

**Computational efficiency.** An additional advantage of using  $\overline{\text{CR}}$  as the fairness penalty is its computational efficiency, i.e., it offers a lower computational complexity than existing algorithms. Each iteration of COVA-FC has complexity  $\mathcal{O}(nKd + n(K + 2^q))$ , where  $nKd$  is the cost for the computation of K-means algorithm and  $n(K + 2^q)$  is the additional cost for adversarial updates for fairness. Table 1 compares the computational complexity of COVA-FC with other baselines. It shows that COVA-FC avoids (i) the cubic dependence in  $n$  of LP-based methods and (ii) the large term  $nK2^q$  of VFC. Further details as well as large-scale experimental results are given in Appendix C.1.

Table 1: Comparison of fair clustering methods in terms of computational complexity.

| Method           | Complexity        |
|------------------|-------------------|
| <b>COVA-FC</b> ✓ | $n(Kd + K + 2^q)$ |
| VFC [42]         | $nK(d + 2^q)$     |
| FairKM [37]      | $nK(nd + 2^q)$    |
| FCA [25]         | $n^2(n + Kd)$     |
| FCBC [14]        | $(nK + 2^q K)^3$  |
| FRA [5]          | $(nK + 2^q)^3$    |

**Parallel updates.** Once the adversarial variables are fixed, the covariance surrogate decomposes over each instance, enabling parallel updates of the cluster assignments, making COVA-FC applicable to large datasets with many subgroups. In contrast, existing fair clustering algorithms including FCBC [14], FCA [25], and FRA [5] as well as FairKM [37] are less suitable for efficient parallel assignment updates because their objectives are not instance-wise decomposable. VFC [42] admits parallel updates, but its gradient update involves inverse subgroup-cluster masses, which can lead to numerical instability in sparse-subgroup settings (see Appendix D.5). Also COVA-FC runs  $3.2\times$  faster than VFC (see Appendix D.3) on a large dataset with  $n$  in the millions.

Note that our original subgroup-fairness gap is also non-separable in the assignment. Since both  $p_k(\mathbf{A})$  and  $p_{k|s}(\mathbf{A})$  depend on all assignments, updating a single  $A_i$  changes the gap globally. In contrast, our covariance surrogate has an instance-wise additive form, enabling parallel updates of the assignment vectors and making COVA-FC more scalable in large subgroup/dataset settings.



## 5 Experiments

This section presents the results of our experimental analyses. Section 5.2 reports cost-fairness trade-offs and runtime on four benchmark datasets (Adult, Dutch, Bank, Civilcomments), confirming favorable trade-offs and computational efficiency. Section 5.3 validates the subgroup-marginal extension on Communities ( $q = 18$ ), where the number of subgroups is large and many subgroups are sparse. Section 5.4 studies scalability to large  $n$  on ACSIncome ( $n \approx 1.66\text{M}$ ) and to high-dimensional features on an image dataset CelebA. Finally, Section 5.5 analyzes the practical effects of the two continuous relaxations introduced in Section 2.3.

### 5.1 Settings

**Datasets.** We use seven benchmark datasets, including five tabular datasets (Adult, Dutch, Bank, Communities, and ACSIncome), one text dataset (Civilcomments), and one image dataset (CelebA). See Table 5 in Appendix D.1 for detailed descriptions of these datasets.

**Baselines.** We compare COVA-FC with well-known existing methods: FCBC [14], VFC [42], FCA [25], FRA [5], and FairKM [37]. Note that FCA faces a bottleneck: it has a step which estimates the joint distributions over subgroups by solving LP, which incurs high computational cost as the number of subgroups increases. On the Adult and Civilcomments datasets, an experiment did not complete within 6 hours, so we omit FCA from the comparisons on these datasets and report it only on Dutch and Bank.

**Performance metrics.** We use the hard assignments  $\hat{A}_i = \arg \max_k A_{ik}$  for performance evaluation (abbreviated  $A_i$  in this section). Clustering performance is measured by the  $K$ -means clustering cost  $\frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A})$ . For fairness, we assess the subgroup fairness gap  $\Delta(\mathbf{A}; \mathcal{W})$  defined in equation 5. We denote the subgroup fairness gap as  $\text{SP} := \Delta(\mathbf{A})$ , and the  $l$ -th order marginal fairness gap as  $\text{MP}^{(l)} := \Delta_{\text{marg}, l}(\mathbf{A})$  defined in Section 3.2. Note that Sections 2 and 3 define  $\Delta$  for binary sensitive attributes ( $a \in \{0, 1\}$ ), but they can be extended easily for a multi-valued sensitive attribute with  $m$  categories by replacing  $a \in \{0, 1\}$  with  $a \in \{0, 1, \dots, m-1\}$ .

*Remark 5.1* (Why we use the fairness gap rather than Balance). A popularly used fairness measure is the Balance metric [10], however, we do not use it as a primary metric for two reasons: (i) Balance is a ratio, so it collapses to zero whenever some cluster receives no instances from a subgroup. It is unavoidable when a subgroup has fewer than  $K$  instances (e.g., on Civilcomments). (ii) Balance depends on absolute subgroup sizes, so the value is unstable when subgroups have very different sizes. The gap remains well-defined under zero cluster counts and reflects group size through the subgroup mass  $\pi_W$ , rather than through raw count ratios. However, for datasets where Balance is well-defined (i.e., each subgroup is of sufficiently large size), we additionally report subgroup Balance results in Appendix D.2.

**Implementation details.** For the convergence criterion, we terminate the algorithm when the objective in Eq. (9) changes by less than  $2 \times 10^{-5}$  for 15 iterations, with a maximum of 10,000 iterations. In the main subgroup-fairness experiments, we construct  $\mathcal{W}$  using all full subgroups only (i.e.,  $\mathcal{W} = \{\{s\} : s \in \{0, 1\}^q\}$ ), and fix  $K = 10$  for all experiments following prior work [25, 42]. Additional details are provided in Appendix D.1.

### 5.2 Performance comparison

**Cost-fairness trade-off.** By examining the cost-fairness trade-off, we quantify the level of subgroup fairness achieved for a given clustering cost. Figure 1 shows the Pareto-front trade-offs between clustering cost and subgroup-fairness gap (SP). COVA-FC attains lower SP than the baselines in most cases. FCBC [14] and VFC [42] often fail to attain high fairness levels due to numerical overflow, whereas COVA-FC works over a wide range of fairness levels. As previously explained, FCA [25] becomes computationally prohibitive on datasets with many subgroups due to its LP-based updates, so we report its results only on Dutch and Bank (see Appendix D.1).

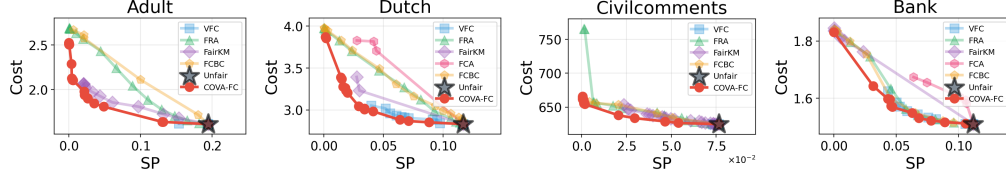


Figure 1: Comparison of trade-offs between subgroup-fairness gap (SP) and cost on (left to right) Adult, Dutch, Civilcomments, and Bank datasets.

**Parallelization and comparison with VFC.** We compare a per-instance loop implementation of the assignment update against our matrix implementation (and so parallel update) on ACSIncome with varying  $n \in \{10k, 100k, 500k, 1M\}$ . While the runtime of this loop version grows almost linearly with  $n$ , the matrix version grows much more slowly over the same range, confirming that the per-instance assignment updates are effectively parallelized on GPU (Figure 2).




Figure 2: Per-iteration runtime of the loop and matrix implementations of the assignment update on ACSIncome.

In contrast, most baselines do not admit the same instance-wise decomposable assignment update: FRA, FCBC, and FCA rely on LP-based optimization, and FairKM uses hard reassignment steps depending on all cluster centroids and sizes of subgroups. Among the baselines, VFC is the only parallelizable baseline. With  $L_2$ -normalized data (as used in [42]), COVA-FC still achieves lower SP at similar cost (Table 2). Further, in Appendix D.5 we discuss numerical instability of VFC in sparse subgroup settings. That is, VFC involves the inverse of subgroup-cluster masses in the fairness penalty which becomes too large when the sizes of some subgroups are too small. COVA-FC does not have such a problem.

Table 2: Comparison between COVA-FC and VFC in terms of the lowest achievable SP.

| Dataset       | SP (Cost)     |                      |
|---------------|---------------|----------------------|
|               | VFC [42]      | COVA-FC              |
| Adult         | 0.0158 (0.47) | <b>0.0002</b> (0.50) |
| Dutch         | 0.0146 (0.40) | <b>0.0026</b> (0.41) |
| Civilcomments | 0.0063 (0.86) | <b>0.0009</b> (0.90) |
| Bank          | 0.0354 (0.24) | <b>0.0000</b> (0.27) |
| Communities   | 0.0171 (0.58) | <b>0.0056</b> (0.86) |

### 5.3 Marginal fairness extension

We evaluate the subgroup-marginal-fairness gap (Section 3) on the Communities dataset [36] with  $q = 18$  sensitive attributes (1,180 subgroups), where many subgroups contain only a few instances. We compare two variants of COVA-FC: the subgroup-only variant, which uses  $\Delta(\mathbf{A})$  as the fairness gap, and the subgroup-marginal variant, which uses  $\Delta_{\text{sub-marg},2}(\mathbf{A})$  from Definition 3.2. The latter includes first- and second-order marginal groups together with full subgroups. The subgroup-marginal variant achieves substantially better  $MP^{(1)}$  and  $MP^{(2)}$  than the subgroup-only variant, at the cost of a mild degradation in SP. Figure 3 reports results averaged over five random splits.

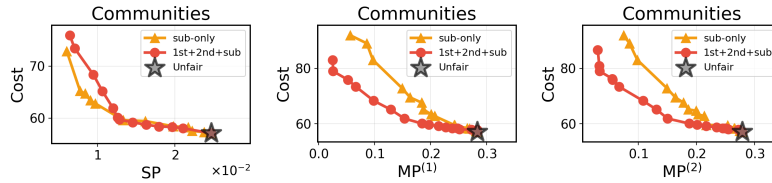


Figure 3: Comparison on Communities between subgroup-only COVA-FC and subgroup-marginal COVA-FC (1st+2nd-order marginal + subgroup): (left) SP, (center)  $MP^{(1)}$ , (right)  $MP^{(2)}$ .



We also report the  $MP^{(1)}$  trade-off on the four main benchmark datasets in Figure 4, where the subgroup-marginal variant similarly improves marginal fairness over the subgroup-only variant.

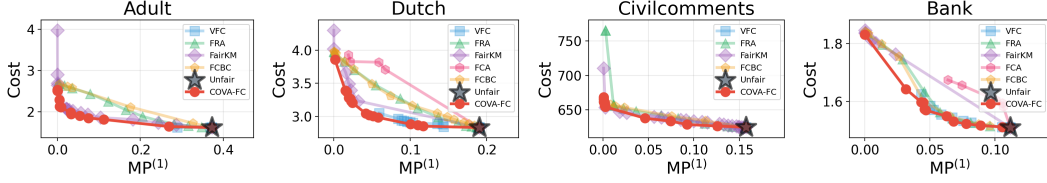


Figure 4: Trade-offs between  $MP^{(1)}$  and cost on (left to right) Adult, Dutch, Civilcomments, and Bank datasets, comparing the subgroup-only and subgroup-marginal variants of COVA-FC.

#### 5.4 Computational complexity

**Computation time.** Motivated by the computational complexity analysis in Table 1, we compare the runtimes of all methods on Dutch dataset. As shown in Table 3, COVA-FC achieves the lowest runtime among all methods, consistent with the theoretical complexity shown in Table 1.

Table 3: Comparison of computation time on Dutch dataset.

| Method           | Total time (sec) |
|------------------|------------------|
| <b>COVA-FC ✓</b> | <b>30.24</b>     |
| VFC [42]         | 48.25            |
| FairKM [37]      | 292.26           |
| FCA [25]         | 226.42           |
| FCBC [14]        | 179.26           |
| FRA [5]          | 64.29            |

**Scalability to large-scale and image data.** On ACSIncome [12] ( $n = 1,664,500$ , 16 subgroups), COVA-FC runs  $3.22\times$  faster than VFC, the fastest baseline in Table 3. A detailed comparison is reported in Table 7 in Appendix D.3. We use 512-dimensional features extracted from a pretrained ResNet-18 [18], and apply COVA-FC on the fixed features without modification. As shown in Figure 11, COVA-FC still improves subgroup fairness as the penalty increases, supporting its applicability across various data modalities.

#### 5.5 Effects of the continuous relaxations

To examine the effect of each continuous relaxation, we consider four variants of the surrogate depending on which discrete component is continuously relaxed: CR (both hard),  $CR_v$  (soft  $v$ , hard  $A$ ),  $CR_A$  (hard  $v$ , soft  $A$ ), and  $\overline{CR}$  (both soft).

We observe that relaxing the assignment  $A$  is crucial for stability: hard-assignment variants often fail to reduce the fairness gap, whereas  $CR_A$  achieves near-zero gaps by smoothing the objective CR (see Table 9). This is also reflected in the loss curves, where  $CR_v$  oscillates but  $CR$  decreases steadily (see Figures 8 and 9). Relaxing the worst-subgroup selection improves efficiency by replacing  $CR_A$  with  $\overline{CR}$ , reducing runtime while preserving comparable cost and SP (see Table 10).

### 6 Concluding remarks

In this paper, we proposed COVA-FC, a novel algorithm for subgroup-fair clustering with multiple sensitive attributes. Our covariance-based surrogate exactly matches the subgroup-fairness gap and admits efficient gradient-based optimization with parallel assignment updates. The framework additionally extends to marginal and higher-order subgroups via a user-specified collection  $\mathcal{W}$ . Across benchmark datasets, COVA-FC achieves favorable cost-fairness trade-offs with improved computational efficiency and scalability, when compared with existing baselines.

It would be interesting to extend our proposed framework in several ways. First, the framework would be naturally extendable for clustering paradigms other than  $K$ -means such as hierarchical clustering

and mixture models, where the cluster assignment matrix  $\mathbf{A}$  admits a similar soft relaxation. Second, the covariance-based surrogate can be applied to constraints other than fairness: any constraint expressible as “low statistical dependence between  $\mathbf{A}$  and a side-information vector” fits the same template. An example would be clustering with size constraints [41, 20]. We leave a systematic study of these extensions as future work.

## References

- [1] Alekh Agarwal, Alina Beygelzimer, Miroslav Dudík, John Langford, and Hanna Wallach. A reductions approach to fair classification. In Jennifer Dy and Andreas Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 60–69. PMLR, 10–15 Jul 2018. URL <https://proceedings.mlr.press/v80/agarwal18a.html>.
- [2] Alekh Agarwal, Miroslav Dudík, and Zhiwei Steven Wu. Fair regression: Quantitative definitions and reduction-based algorithms. In *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, 2019. URL <http://proceedings.mlr.press/v97/agarwal19d.html>.
- [3] Arturs Backurs, Piotr Indyk, Krzysztof Onak, Baruch Schieber, Ali Vakilian, and Tal Wagner. Scalable fair clustering. In *International Conference on Machine Learning*, pages 405–413. PMLR, 2019.
- [4] Barry Becker and Ronny Kohavi. Adult. UCI Machine Learning Repository, 1996. URL <https://doi.org/10.24432/C5XW20>.
- [5] Suman Kalyan Bera, Deeparnab Chakrabarty, Nicolas J. Flores, and Maryam Negahbani. Fair algorithms for clustering. In *Advances in Neural Information Processing Systems*, volume 32, 2019. <https://arxiv.org/abs/1901.02393>.
- [6] Dimitris Bertsimas, Vivek F. Farias, and Nikolaos Trichakis. The price of fairness. *Oper. Res.*, 59(1):17–31, January 2011. ISSN 0030-364X. doi: 10.1287/opre.1100.0865. URL <https://doi.org/10.1287/opre.1100.0865>.
- [7] Avrim Blum and Thodoris Lykouris. Advancing Subgroup Fairness via Sleeping Experts. In Thomas Vidick, editor, *11th Innovations in Theoretical Computer Science Conference (ITCS 2020)*, volume 151 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 55:1–55:24, Dagstuhl, Germany, 2020. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. ISBN 978-3-95977-134-4. doi: 10.4230/LIPIcs.ITCS.2020.55. URL <https://drops.dagstuhl.de/entities/document/10.4230/LIPIcs.ITCS.2020.55>.
- [8] Daniel Borkan, Lucas Dixon, Jeffrey Sorensen, Nithum Thain, and Lucy Vasserman. Nuanced metrics for measuring unintended bias with real data for text classification. In *Companion Proceedings of The 2019 World Wide Web Conference (WWW ’19 Companion)*, 2019. URL <https://arxiv.org/abs/1903.04561>.
- [9] Anshuman Chhabra, Karina Masalkovaitė, and Prasant Mohapatra. An overview of fairness in clustering. *IEEE Access*, 9:130698–130720, 2021. doi: 10.1109/ACCESS.2021.3114099.
- [10] Flavio Chierichetti, Ravi Kumar, Silvio Lattanzi, and Sergei Vassilvitskii. Fair clustering through fairlets. *Advances in neural information processing systems*, 30, 2017.
- [11] Evgenii Chzhen, Christophe Denis, Mohamed Hebiri, Luca Oneto, and Massimiliano Pontil. Fair regression with wasserstein barycenters. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 7321–7331. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/51cbbd2611e844ece5d80878eb770436-Paper.pdf>.
- [12] Frances Ding, Moritz Hardt, John Miller, and Ludwig Schmidt. Retiring adult: new datasets for fair machine learning. In *Proceedings of the 35th International Conference on Neural Information Processing Systems, NIPS ’21*, Red Hook, NY, USA, 2021. Curran Associates Inc. ISBN 9781713845393.

- [13] Michele Donini, Luca Oneto, Shai Ben-David, John S Shawe-Taylor, and Massimiliano Pontil. Empirical risk minimization under fairness constraints. In *Advances in Neural Information Processing Systems*, pages 2791–2801, 2018.
- [14] Seyedali Esmaili, Behzad Nikbakht, Lunjia Ren, Jan Vondrák, and Morteza Zadimoghaddam. Fair clustering under a bounded cost. In *Advances in Neural Information Processing Systems*, volume 34, pages 27679–27691, 2021. <https://papers.neurips.cc/paper/2021/hash/781877bda0783aac5f1cf765c128b437-Abstract.html>.
- [15] Felix Friedrich, Manuel Brack, Lukas Struppek, Dominik Hintersdorf, Patrick Schramowski, Sasha Luccioni, and Kristian Kersting. Fair diffusion: Instructing text-to-image generation models on fairness. *arXiv preprint arXiv:2302.10893*, 2023.
- [16] Gabriel Goh, Andrew Cotter, Maya Gupta, and Michael P Friedlander. Satisfying real-world goals with dataset constraints. In *Advances in Neural Information Processing Systems*, pages 2415–2423, 2016.
- [17] Bryce Goodman and Seth Flaxman. European union regulations on algorithmic decision-making and a “right to explanation”. *AI magazine*, 38(3):50–57, 2017.
- [18] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [19] Francois Hu, Philipp Ratz, and Arthur Charpentier. A sequentially fair mechanism for multiple sensitive attributes. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(11): 12502–12510, March 2024. ISSN 2159-5399. doi: 10.1609/aaai.v38i11.29143. URL <http://dx.doi.org/10.1609/aaai.v38i11.29143>.
- [20] Frank Höppner and Frank Klawonn. Clustering with size constraints. *Studies in Computational Intelligence*, 137, 01 2008. doi: 10.1007/978-3-540-79474-5\_8.
- [21] Michael Kearns, Seth Neel, Aaron Roth, and Zhiwei Steven Wu. An empirical study of rich subgroup fairness for machine learning, 2018.
- [22] Michael Kearns, Seth Neel, Aaron Roth, and Zhiwei Steven Wu. Preventing fairness gerrymandering: Auditing and learning for subgroup fairness. In *International conference on machine learning*, pages 2564–2572. PMLR, 2018.
- [23] Kunwoong Kim, Ilsang Ohn, Sara Kim, and Yongdai Kim. Slide: A surrogate fairness constraint to ensure fairness consistency. *Neural Networks*, 154:441–454, 2022. ISSN 0893-6080. doi: <https://doi.org/10.1016/j.neunet.2022.07.027>. URL <https://www.sciencedirect.com/science/article/pii/S0893608022002891>.
- [24] Kunwoong Kim, Insung Kong, Jongjin Lee, Minwoo Chae, Sangchul Park, and Yongdai Kim. Fairness through matching. *Transactions on Machine Learning Research*, 2025. ISSN 2835-8856. URL <https://openreview.net/forum?id=dHljjaNHh1>.
- [25] Kunwoong Kim, Jihu Lee, Sangchul Park, and Yongdai Kim. Fair clustering via alignment. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=jImLK83NmV>.
- [26] Kunwoong Kim, Kyungseon Lee, Jihu Lee, Dongyoon Yang, and Yongdai Kim. Doubly-regressing approach for subgroup fairness, 2026. URL <https://arxiv.org/abs/2510.21091>.
- [27] Matthäus Kleindessner, Samira Samadi, Pranjal Awasthi, and Jamie Morgenstern. Guarantees for spectral clustering with fairness constraints. In *International conference on machine learning*, pages 3458–3467. PMLR, 2019.
- [28] Yuheng Lai and Leying Guan. FairICP: Encouraging equalized odds via inverse conditional permutation. In Aarti Singh, Maryam Fazel, Daniel Hsu, Simon Lacoste-Julien, Felix Berkenkamp, Tegan Maharaj, Kiri Wagstaff, and Jerry Zhu, editors, *Proceedings of*

- the 42nd International Conference on Machine Learning, volume 267 of *Proceedings of Machine Learning Research*, pages 32228–32245. PMLR, 13–19 Jul 2025. URL <https://proceedings.mlr.press/v267/lai25b.html>.
- [29] Tai Le Quy, Alice Roy, Johannes Friege, Siegfried Nijssen, Fritz Großarth, and Patrick Zschech. A survey on datasets for fairness-aware machine learning. arXiv preprint, 2022. URL <https://arxiv.org/abs/2202.04053>.
  - [30] Peizhao Li, Han Zhao, and Hongfu Liu. Deep fair clustering for visual learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9070–9079, 2020.
  - [31] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In *Proceedings of International Conference on Computer Vision (ICCV)*, December 2015.
  - [32] S. Lloyd. Least squares quantization in pcm. *IEEE Transactions on Information Theory*, 28(2): 129–137, 1982. doi: 10.1109/TIT.1982.1056489.
  - [33] Ninareh Mehrabi, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. A survey on bias and fairness in machine learning. *ACM computing surveys (CSUR)*, 54(6):1–35, 2021.
  - [34] Mathieu Molina and Patrick Loiseau. Bounding and approximating intersectional fairness through marginal fairness, 2023. URL <https://arxiv.org/abs/2206.05828>.
  - [35] Sérgio Moro, Paulo Cortez, and Paulo Rita. A data-driven approach to predict the success of bank telemarketing. *Decision Support Systems*, 62:22–31, 2014. ISSN 0167-9236. doi: 10.1016/j.dss.2014.03.001. URL <https://www.sciencedirect.com/science/article/pii/S016792361400061X>.
  - [36] Michael Redmond and Alok Baveja. A data-driven software tool for enabling cooperative information sharing among police departments. *European Journal of Operational Research*, 141(3):660–678, 2002.
  - [37] Savitha Sam Abraham, Deepak Padmanabhan, and Sowmya S. Sundaram. Fairness in clustering with multiple sensitive attributes. In *Proceedings of the 23rd International Conference on Extending Database Technology (EDBT)*, pages 25–36, 2020. [https://openproceedings.org/2020/conf/edbt/paper\\_148.pdf](https://openproceedings.org/2020/conf/edbt/paper_148.pdf).
  - [38] Weiran Wang and Miguel Á. Carreira-Perpiñán. Projection onto the probability simplex: An efficient algorithm with a simple proof, and an application, 2013. URL <https://arxiv.org/abs/1309.1541>.
  - [39] Depeng Xu, Shuhan Yuan, Lu Zhang, and Xintao Wu. Fairgan: Fairness-aware generative adversarial networks. In *2018 IEEE international conference on big data (big data)*, pages 570–575. IEEE, 2018.
  - [40] Pengxin Zeng, Yunfan Li, Peng Hu, Dezhong Peng, Jiancheng Lv, and Xi Peng. Deep fair clustering via maximizing and minimizing mutual information: Theory, algorithm and metric. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 23986–23995, 2023.
  - [41] Shunzhi Zhu, Dingding Wang, and Tao Li. Data clustering with size constraints. *Knowledge-Based Systems*, 23(8):883–889, 2010. ISSN 0950-7051. doi: <https://doi.org/10.1016/j.knosys.2010.06.003>. URL <https://www.sciencedirect.com/science/article/pii/S095070511000095X>.
  - [42] Imtiaz Masud Ziko, Jing Yuan, Eric Granger, and Ismail Ben Ayed. Variational fair clustering. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 11202–11209, 2021.

## A Two motivating examples

### A.1 Necessity of the weight $\pi_s$

We illustrate why the subgroup-size weight  $\pi_s$  is necessary in the subgroup-fairness gap. The issue is that, without this weight, a tiny subgroup can dominate the worst-case gap regardless of the overall clustering quality.

**Counter example.** Consider two clusters and suppose that one subgroup  $s^*$  contains only one instance. Assume that this instance is assigned to cluster 1. Then the cluster distribution within  $s^*$  is  $(1, 0)$ .

Now suppose that the overall cluster distribution is balanced, namely  $(0.5, 0.5)$ . The unweighted gap for this subgroup is the total absolute difference between these two distributions:

$$\sum_{k=1}^2 |p_k(\mathbf{A}) - p_{k|s^*}(\mathbf{A})| = |0.5 - 1| + |0.5 - 0| = 1.$$

Thus, even a single-instance subgroup can produce a large worst-case gap.

With the weighted gap used in our definition, the same discrepancy is multiplied by the subgroup proportion  $\pi_{s^*} = 1/n$ . Hence the contribution of this subgroup becomes

$$\pi_{s^*} \sum_{k=1}^2 |p_k(\mathbf{A}) - p_{k|s^*}(\mathbf{A})| = \frac{1}{n} \times 1 = \frac{1}{n}.$$

Therefore, the weighted gap prevents a tiny subgroup from determining the whole fairness objective. Instead, the effect of each subgroup is scaled by its empirical size, which makes the objective more stable when many small subgroups exist.

### A.2 Subgroup fairness does not imply marginal fairness

We give a simple example showing that a small subgroup-fairness gap can coexist with a much larger marginal fairness gap.

Let  $q = 8$ ,  $K = 2$ , and  $n = 2^8 = 256$ . Assume that there is exactly one instance in each full subgroup  $s \in \{0, 1\}^8$ , so  $\pi_s = 1/256$  for every  $s$ . Let  $W = \{s \in \{0, 1\}^8 : s^{(1)} = 0\}$ , which is the marginal subgroup defined by fixing the first sensitive attribute to 0. Then  $W$  contains  $2^7 = 128$  subgroups and has proportion  $\pi_W = 1/2$ . Now assign every instance in  $W$  to cluster 1, and every instance outside  $W$  to cluster 2. The overall cluster proportions are therefore  $(p_1(\mathbf{A}), p_2(\mathbf{A})) = (1/2, 1/2)$ .

For each full subgroup  $s$ , the conditional cluster distribution is either  $(1, 0)$  or  $(0, 1)$ . Hence the subgroup-fairness gap is

$$\Delta(\mathbf{A}) = \frac{1}{256} \left( \left| \frac{1}{2} - 1 \right| + \left| \frac{1}{2} - 0 \right| \right) = \frac{1}{256}. \quad (10)$$

By contrast, within the marginal subgroup  $W$ , all instances are assigned to cluster 1, so  $(p_{1|W}(\mathbf{A}), p_{2|W}(\mathbf{A})) = (1, 0)$ . Therefore the marginal fairness gap on  $W$  is

$$\pi_W \sum_{k=1}^2 |p_k(\mathbf{A}) - p_{k|W}(\mathbf{A})| = \frac{1}{2} \left( \left| \frac{1}{2} - 1 \right| + \left| \frac{1}{2} - 0 \right| \right) = \frac{1}{2}. \quad (11)$$

Thus the subgroup-fairness gap is only  $1/256$ , while the marginal fairness gap is  $1/2$ . More generally, under the same construction with arbitrary  $q$ , the subgroup-fairness gap is  $1/2^q$ , which goes to 0 as  $q$  increases, whereas the marginal fairness gap remains  $1/2$ . This shows that subgroup fairness alone does not imply marginal fairness.

## B Theoretical studies

### B.1 Proofs

*Proof of Theorem 2.1.* Take  $\mathcal{W} = \{\{s\} : s \in \{0, 1\}^q, n_s > 0\}$  in Theorem 3.1. Then each  $W_m$  is a singleton subgroup, so  $\Delta(\mathbf{A}; \mathcal{W}) = \Delta(\mathbf{A})$  and  $\text{CR}(\mathbf{A}; \mathcal{W}) = \text{CR}(\mathbf{A})$ .  $\square$

*Proof of Theorem 2.2.* Take  $\mathcal{W} = \{\{s\} : s \in \{0, 1\}^q, n_s > 0\}$  in Theorem 3.1. Then each  $W_m$  is a singleton subgroup, so  $\Delta(\mathbf{A}; \mathcal{W}) = \Delta(\mathbf{A})$  and  $\overline{\text{CR}}(\mathbf{A}; \mathcal{W}) = \overline{\text{CR}}(\mathbf{A})$ .  $\square$

*Proof of Theorem 3.1.* For each  $m \in \mathcal{M}_+$ , define the subgroup indicator  $r_m(i) := \mathbb{I}(s_i \in W_m)$ ,  $i \in [n]$ , and similarly to  $\text{C}(\mathbf{A}, s, \beta)$  in Section 2.2, let

$$\text{C}(\mathbf{A}, m, \beta) := \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k \mathbb{I}(A_i = k) \right) (c_{im} - \bar{c}_m). \quad (12)$$

Let  $n_{W_m} = \sum_{i=1}^n r_m(i)$  and recall  $\pi_m = n_{W_m}/n$ . For each cluster  $k \in [K]$  with  $|\{i : A_i = k\}| > 0$  (which holds by our standing assumption that no cluster is empty), define  $q_k(m) := \frac{1}{|\{i : A_i = k\}|} \sum_{i: A_i = k} r_m(i)$ . A direct calculation gives  $p_{k|W_m}(\mathbf{A}) = \frac{p_k(\mathbf{A})q_k(m)}{\pi_m}$ , so  $p_k(\mathbf{A}) - p_{k|W_m}(\mathbf{A}) = \frac{1}{\pi_m} p_k(\mathbf{A})(\pi_m - q_k(m))$ . Multiplying by  $\pi_m$  and using  $r_m(i) - \pi_m = \frac{1}{2}(c_{im} - \bar{c}_m)$  gives

$$\pi_m (p_k(\mathbf{A}) - p_{k|W_m}(\mathbf{A})) = -p_k(\mathbf{A})(q_k(m) - \pi_m) = -\frac{1}{2n} \sum_{i=1}^n \mathbb{I}(A_i = k)(c_{im} - \bar{c}_m).$$

Hence, letting  $a_k(m) := \frac{1}{2n} \sum_{i=1}^n \mathbb{I}(A_i = k)(c_{im} - \bar{c}_m)$ ,

$$\pi_m \sum_{k=1}^K |p_k - p_{k|W_m}| = \sum_{k=1}^K |a_k(m)| = \max_{\beta \in \mathcal{B}_\infty} \sum_{k=1}^K \beta_k a_k(m) = \max_{\beta \in \mathcal{B}_\infty} \text{C}(\mathbf{A}, m, \beta),$$

where the second equality uses the dual representation  $\sum_k |a_k| = \max_{\|\beta\|_\infty \leq 1} \sum_k \beta_k a_k$  (with maximizer  $\beta_k = \text{sign}(a_k(m))$ ). Taking  $\max_{m \in \mathcal{M}_+}$  on both sides and using Eq. (5) and Eq. (6) yields  $\Delta(\mathbf{A}; \mathcal{W}) = \text{CR}(\mathbf{A}; \mathcal{W})$ .  $\square$

*Proof of Theorem 3.1 (soft assignment case).* The argument mirrors the hard-assignment case with  $\mathbb{I}(A_i = k)$  replaced by  $A_{ik}$ . Fix  $m \in \mathcal{M}_+$ . With  $r_m(i) := \mathbb{I}(s_i \in W_m)$ , define  $q_k(m) := \frac{\sum_i A_{ik} r_m(i)}{\sum_i A_{ik}}$  (well-defined under the standing assumption  $\sum_i A_{ik} > 0$ ). Then  $p_{k|W_m}(\mathbf{A}) = \frac{p_k(\mathbf{A})q_k(m)}{\pi_m}$ , so the same algebra used in the hard case gives

$$\pi_m \sum_{k=1}^K |p_k - p_{k|W_m}| = \max_{\beta \in \mathcal{B}_\infty} g_m(\beta), \quad \text{where } g_m(\beta) := \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) (c_{im} - \bar{c}_m).$$

Taking  $\max_m$ :

$$\Delta(\mathbf{A}; \mathcal{W}) = \max_{m \in \mathcal{M}_+} \max_{\beta \in \mathcal{B}_\infty} g_m(\beta). \quad (13)$$

For the right-hand side of Eq. (13), observe that for any fixed  $\beta$ , the function  $\mathbf{v} \mapsto \mathbf{v}^\top g(\beta)$  is linear on the simplex  $\mathbb{S}^{M_+}$  and so attains its maximum at a vertex. Therefore  $\max_{\mathbf{v} \in \mathbb{S}^{M_+}} \mathbf{v}^\top g(\beta) = \max_{m \in \mathcal{M}_+} g_m(\beta)$ , and

$$\overline{\text{CR}}(\mathbf{A}; \mathcal{W}) = \max_{\beta \in \mathcal{B}_\infty} \max_{\mathbf{v} \in \mathbb{S}^{M_+}} \mathbf{v}^\top g(\beta) = \max_{\beta \in \mathcal{B}_\infty} \max_{m \in \mathcal{M}_+} g_m(\beta) = \max_{m \in \mathcal{M}_+} \max_{\beta \in \mathcal{B}_\infty} g_m(\beta).$$

Combining with Eq. (13) gives  $\Delta(\mathbf{A}; \mathcal{W}) = \overline{\text{CR}}(\mathbf{A}; \mathcal{W})$ .  $\square$



## B.2 Projection of $(A_{i1}, \dots, A_{iK})$ onto the simplex and the computation of $\tau_i$

For each  $i \in [n]$ , after a gradient step we obtain  $\mathbf{A}_i^s \in \mathbb{R}^K$  and project it onto the probability simplex  $\mathbb{S}^K$ . The projection is defined as the unique solution to the strictly convex problem

$$\Pi_{\mathbb{S}^K}(\mathbf{A}_i^s) = \arg \min_{v \in \mathbb{S}^K} \frac{1}{2} \|v - \mathbf{A}_i^s\|^2. \quad (14)$$

By the KKT conditions (see [38]), there exists a scalar threshold  $\tau_i \in \mathbb{R}$  such that the optimizer satisfies

$$v_{ik}^* = \max\{A_{ik}^s - \tau_i, 0\}, \quad k \in [K], \quad (15)$$

and  $\tau_i$  is uniquely determined by the constraint  $\sum_{k=1}^K v_{ik}^* = 1$ .

To compute  $\tau_i$  efficiently, let  $u_1 \geq u_2 \geq \dots \geq u_K$  be the sorted entries of  $\mathbf{A}_i^s$ , and define the cumulative sums  $U_j := \sum_{\ell=1}^j u_\ell$  for  $j \in [K]$ . Let

$$\rho := \max \left\{ j \in [K] : u_j - \frac{1}{j}(U_j - 1) > 0 \right\}, \quad \tau_i := \frac{1}{\rho}(U_\rho - 1). \quad (16)$$

Then Eq. (15) is equal to  $\Pi_{\mathbb{S}^K}(\mathbf{A}_i^s)$ . Finally, we project as

$$A_{ik}^s \leftarrow \max\{A_{ik}^s - \tau_i, 0\}, \quad i \in [n], \quad k \in [K],$$

where each  $\tau_i$  is determined in Eq. (16). The computational complexity of this step is dominated by sorting, i.e.,  $O(K \log K)$  for each  $i \in [n]$ , which is negligible compared to the other computations in COVA-FC (see Table 1).

## C Detailed Updates of COVA-FC

Given a collection  $\mathcal{W}$  of subgroup-subsets, we propose to learn fair clusters by minimizing Eq. (9):  $\frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A}) + \lambda \text{CR}(\mathbf{A}; \mathcal{W})$  with respect to  $\mu = (\mu_1, \dots, \mu_K) \in (\mathbb{R}^d)^K$  and  $\mathbf{A} = (A_i)_{i=1}^n$ ,  $A_i \in \mathbb{S}^K$ , where  $\lambda \geq 0$  controls the trade-off between clustering cost and fairness level. We call this algorithm *Covariance-based Fair Clustering* (COVA-FC). We solve Eq. (9) via an adversarial learning procedure. First, we initialize the centroids  $\mu$  and the assignment  $\mathbf{A}$  using the output of the standard  $K$ -means algorithm [32]. Define  $\bar{C}(\mathbf{A}, \mathbf{v}, \beta) := \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) \mathbf{v}^\top (c_i - \bar{c})$ , so that  $\text{CR}(\mathbf{A}; \mathcal{W}) = \max_{\mathbf{v} \in \mathbb{S}^{M+}} \max_{\beta \in \mathcal{B}_\infty} \bar{C}(\mathbf{A}, \mathbf{v}, \beta)$ . We iteratively (i) maximize  $\bar{C}(\mathbf{A}, \mathbf{v}, \beta)$  over  $(\mathbf{v}, \beta)$  with  $\mathbf{A}$  fixed, and (ii) update  $\mathbf{A}$  by minimizing  $\frac{1}{n} \sum_i L_i(\mu, \mathbf{A}) + \lambda \bar{C}(\mathbf{A}, \mathbf{v}, \beta)$  with  $(\beta, \mathbf{v}, \mu)$  fixed, followed by updating  $\mu$  given  $\mathbf{A}$ .

**Updates of  $\beta$  and  $\mathbf{v}$ .** For fixed  $\mathbf{A}$ , we alternately update  $\beta$  (with  $\mathbf{v}$  fixed) and  $\mathbf{v}$  (with  $\beta$  fixed). We first maximize  $\bar{C}(\mathbf{A}, \mathbf{v}, \beta)$  over  $\beta$  by the closed-form update  $\beta_k \leftarrow \text{sign} \left( \sum_{i=1}^n A_{ik} \mathbf{v}^\top (c_i - \bar{c}) \right)$ , which gives  $\max_{\beta \in \mathcal{B}_\infty} \sum_i \sum_k \beta_k A_{ik} \mathbf{v}^\top (c_i - \bar{c}) = \sum_k \left| \sum_i A_{ik} \mathbf{v}^\top (c_i - \bar{c}) \right|$ . With this updated  $\beta$  fixed, we update  $\mathbf{v}$  via gradient ascent using the closed-form gradient  $\frac{1}{2n} \sum_k \beta_k \left( \sum_i A_{ik} (c_i - \bar{c}) \right)$ , and project onto  $\mathbb{S}^{M+}$  using projection for  $\mathbf{A}$  (see Eq. (19)).

**Updates of  $\mathbf{A}$  and  $\mu$ .** With  $\beta$  and  $\mathbf{v}$  fixed, we update  $\mathbf{A}$  in the direction of minimizing

$$\frac{1}{n} \sum_{i=1}^n L_i(\mu, \mathbf{A}) + \lambda \bar{C}(\mathbf{A}, \mathbf{v}, \beta), \quad (17)$$

whose gradient with respect to  $A_{ik}$  is

$$\frac{\partial \text{Eq. (17)}}{\partial A_{ik}} = \frac{1}{n} \|x_i - \mu_k\|^2 + \frac{\lambda}{2n} \beta_k \mathbf{v}^\top (c_i - \bar{c}). \quad (18)$$

We update  $A_{ik}$  by a gradient-descent step using Eq. (18), then project the vector  $(A_{i1}, \dots, A_{iK})^\top$  onto the simplex  $\mathbb{S}^K$  via

$$A_{ik} \leftarrow \max\{A_{ik} - \tau_i, 0\}, \quad k \in [K], \quad (19)$$

where  $\tau_i$  is chosen so that  $\sum_{k=1}^K A_{ik} = 1$  [38]. The explicit calculation of  $\tau_i$  is given in Appendix B.2. Since the gradient in Eq. (18) is in closed form, this step is computationally cheap.

We then fix  $\mathbf{A}$  and update centroids as in standard  $K$ -means:  $\mu_k \leftarrow \sum_{i=1}^n A_{ik} x_i / \sum_{i=1}^n A_{ik}$ . The overall algorithm is summarized in Algorithm 1.

---

### Algorithm 1 COVA-FC

---

**Require:**  $\{(x_i, s_i)\}_{i=1}^n$ ,  $\mathcal{W} = \{W_m\}_{m=1}^M$ ,  $K$ ,  $\lambda$

**Require:** Step sizes  $\eta_{\mathbf{A}}$  and  $\eta_{\mathbf{v}}$

- 1: Initialize  $\mathbf{A}$  and  $\mu$  by the outputs of the standard  $K$ -means algorithm
  - 2: Compute  $c_{im} = 2\mathbb{I}(s_i \in W_m) - 1$  for  $m \in [M], i \in [n]$ , set  $c_i = (c_{im})_{m \in \mathcal{M}_+}$ , and  $\bar{c} \leftarrow \frac{1}{n} \sum_{i=1}^n c_i$
  - 3: Randomly initialize  $\mathbf{v} \in \mathbb{R}^{M+}$  then project it onto the simplex  $\mathbb{S}^{M+}$
  - 4: **while** not converged **do**
  - 5:   **Adversarial step**
  - 6:    $\beta_k \leftarrow \text{sign} \left( \sum_{i=1}^n A_{ik} \mathbf{v}^\top (c_i - \bar{c}) \right)$ ,  $k \in [K]$
  - 7:    $\mathbf{v} \leftarrow \mathbf{v} + \eta_{\mathbf{v}} \cdot \frac{1}{2n} \sum_{k=1}^K \beta_k \left( \sum_{i=1}^n A_{ik} (c_i - \bar{c}) \right)$  and Project  $\mathbf{v}$  onto the simplex  $\mathbb{S}^{M+}$
  - 8:   **Objective minimization step**
  - 9:    $A_{ik} \leftarrow A_{ik} - \eta_{\mathbf{A}} \left( \frac{1}{n} \|x_i - \mu_k\|^2 + \frac{\lambda}{2n} \beta_k \mathbf{v}^\top (c_i - \bar{c}) \right)$
  - 10:   Project  $(A_{ik})_{k=1}^K$  onto the simplex following Eq. (19)
  - 11:    $\mu_k \leftarrow \sum_{i=1}^n A_{ik} x_i / \sum_{i=1}^n A_{ik}$
  - 12: **end while**
  - 13: **Return**  $\mathbf{A}$ ,  $\mu$
-

### C.1 Computational complexity

An additional advantage of using  $\overline{\text{CR}}$  as the fairness penalty is that it offers competitive computational complexity compared to existing fair clustering algorithms. Let  $M$  be the number of sensitive groups included in the fairness penalty. Each iteration of COVA-FC has computational complexity  $\mathcal{O}(nKd + n(K + M))$ . Here,  $nKd$  is the standard  $K$ -means distance-computation term, while  $n(K + M)$  is the additional cost for the adversarial fairness updates.

In the main subgroup-only setting,  $\mathcal{W}$  is the collection of full subgroups, and hence  $M = 2^q$ . The same complexity expression applies to the optional marginal extension by replacing  $M$  with the size of the chosen subgroup-subset collection. For example, when the extension uses marginal, second-order, and full subgroups,  $M = 2q + 4\binom{q}{2} + 2^q = O(2^q)$ .

Table 4: Comparison of fair clustering methods in terms of computational complexity.

| Method           | Complexity        |
|------------------|-------------------|
| <b>COVA-FC</b> ✓ | $n(Kd + K + 2^q)$ |
| VFC [42]         | $nK(d + 2^q)$     |
| FairKM [37]      | $nK(nd + 2^q)$    |
| FCA [25]         | $n^2(n + Kd)$     |
| FCBC [14]        | $(nK + 2^q K)^3$  |
| FRA [5]          | $(nK + 2^q)^3$    |

In contrast, most of the fair clustering algorithms have higher computational complexity: (i) VFC [42] requires computational complexity linear in  $n$  similarly to COVA-FC but the additional term due to the fairness constraint is  $nK2^q$  which becomes much larger than the additional term in COVA-FC that is  $n(K + 2^q)$  when  $q$  is large. (ii) FairKM [37] includes a quadratic term  $\mathcal{O}(n^2 Kd)$ , which is substantially larger than first-order updates for large-scale datasets. (iii) FCA [25], FCBC [14], and FRA [5] are dominated by solving LPs, yielding cubic complexity with respect to  $n$ .

Overall, COVA-FC achieves a favorable computational complexity, making it more suitable for large datasets with multiple sensitive attributes. We also observe that COVA-FC runs faster than the baselines, whose results are provided in Table 3 of Section 5.2. Furthermore, COVA-FC runs  $3.2\times$  faster than VFC on a large-scale dataset ( $n \approx$  millions, see Appendix D.3 for details).

## D Experiments

### D.1 Settings

In this section, we provide more details about datasets, baseline methods, and implementation details.

**Datasets.** We use seven benchmark datasets: Adult, Dutch, Bank, Civilcomments, Communities, ACSIncome, and CelebA. See table 5 for a summary of these datasets. For tabular datasets, we use numerical (continuous) features only. We standardize the features of all the datasets to zero mean and unit variance.

- **Adult:** The Adult dataset is extracted from the 1994 U.S. Census database [4]. We use  $d = 5$  continuous features: age, fnlwgt, education-num, capital-gain, and hours-per-week. We use four binary sensitive attributes: gender (male/female), race (white/non-white), age ( $\geq 40$  /  $< 40$ ), and marital status (married/unmarried), so  $q = 4$  and there are  $2^q = 16$  subgroups. The number of instances is  $n = 32,561$ .
- **Dutch:** The Dutch dataset is extracted from the 2001 Netherlands census and is used following the fairness dataset construction in [29]. We use  $d = 9$  numeric features (all census attributes except the sensitive ones) which are standardized. We use two binary sensitive attributes: gender (male/female) and age (above median / at or below median), so  $q = 2$  and there are  $2^q = 4$  subgroups. The number of instances is  $n = 60,420$ .
- **Bank:** The Bank dataset contains records from a Portuguese bank’s direct marketing campaigns [35]. We use  $d = 6$  continuous features: age, call-duration, 3-month-Euribor-rate, number-of-employees, consumer-price-index, and number-of-contacts. We treat marital status as a sensitive attribute with three categories (single/married/divorced) and exclude unknown entries, so there are 3 disjoint subgroups. The number of instances is  $n = 41,108$ .
- **Civilcomments:** The Civilcomments dataset is a toxicity dataset of online comments annotated with identity attributes [8]. We use  $d = 768$  feature embeddings extracted from the dataset. We use three multi-valued sensitive attributes: gender (male/female/other), religion (christian/other), and race (black/white/asian/other), so there are  $3 \times 2 \times 4 = 24$  subgroups. The number of instances is  $n = 3,365$ .
- **Communities:** The Communities and Crime dataset records community-level demographic and crime statistics across U.S. communities [36]. We use  $d = 99$  continuous features after removing entries with missing values. We use  $q = 18$  binary sensitive attributes derived from race-related demographic ratios, each binarized at its median. The Cartesian product yields up to  $2^{18}$  combinations, of which 1,180 are non-empty in the data. The number of instances is  $n = 1,994$ .
- **ACSIncome:** ACSIncome is a large-scale tabular dataset extracted from the American Community Survey [12]. We use  $d = 7$  continuous features. We use three sensitive attributes: gender (male/female), marital status (married/unmarried), and race (white/black/asian/other), so  $q = 3$  and there are  $2 \times 2 \times 4 = 16$  subgroups. The number of instances is  $n = 1,664,500$ .
- **CelebA:** The CelebA dataset contains face images annotated with 40 binary attributes [31]. We extract  $d = 512$  image features from a pre-trained ResNet-18 [18] and apply COVA-FC on the fixed features without modification. We use four binary sensitive attributes (Male, Young, Smiling, Attractive), so  $q = 4$  and there are  $2^q = 16$  subgroups. The number of instances is  $n = 202,599$ .

**Baselines.** FCA faces a bottleneck: its core step estimates joint distributions over subgroups by solving a linear program, which incurs high computational cost as the number of subgroups and instances increases. On the larger Adult and Civilcomments datasets, an experiment did not complete within 6 hours, so we omit FCA from these comparisons and report it only on Dutch and Bank.

**Implementation details.** To control the cost-fairness trade-off, we sweep  $\lambda$  on a grid:  $\lambda \in [10^{-1}, 10^4]$  for Adult, Dutch, and Bank, and  $\lambda \in [10^{-1}, 10^6]$  for Civilcomments. We initialize  $\mu$  and  $\mathbf{A}$  using the outputs of the standard  $K$ -means algorithm [32]. For each iteration, we alternate one update for  $(\beta, \mathbf{v})$ , multiple updates for  $\mathbf{A}$ , and then update  $\mu$ . For the  $\mathbf{A}$  updates: the learning rate and the number of updates are set to (0.004, 100) for Adult, (0.005, 100) for Dutch,

Table 5: Summary statistics of datasets.  $n$  is the number of instances,  $d$  is the number of features, and  $q$  is the number of sensitive attributes. “# subgroups per attr” lists the number of categories for each sensitive attribute and “# Subgroups” is the number of subgroups formed by the Cartesian product of sensitive attributes.

| Dataset       | $n$       | $d$ | $q$ | # subgroups per attr | # Subgroups |
|---------------|-----------|-----|-----|----------------------|-------------|
| Adult         | 32,561    | 5   | 4   | 2/2/2/2              | 16          |
| Dutch         | 60,420    | 9   | 2   | 2/2                  | 4           |
| Bank          | 41,108    | 6   | 1   | 3                    | 3           |
| Civilcomments | 3,365     | 768 | 3   | 3/2/4                | 24          |
| Communities   | 1,994     | 99  | 18  | 2 (each)             | 1,180       |
| ACSIncome     | 1,664,500 | 7   | 3   | 2/2/4                | 16          |
| CelebA        | 202,599   | 512 | 4   | 2/2/2/2              | 16          |

(0.005, 100) for Bank, and (0.007, 50) for Civilcomments. All experiments are conducted on a Linux server with four NVIDIA RTX 3090 GPUs (24GB VRAM each) and a 48-core Intel Xeon Silver 4310 CPU.

## D.2 Performance comparison

**Cost-fairness trade-off: sum-aggregated gap.** For a more comprehensive analysis, we further examine whether the same conclusions hold under an alternative aggregation rule. While the gap  $\Delta$  in equation 5 takes a worst-case (maximum) over subgroups, we also report sum-aggregated variants  $SP_{\text{sum}}$  and  $MP_{\text{sum}}^{(l)}$  defined in Table 6.

Table 6: Sum-aggregated variants of the gap. SP and MP are special cases of  $\Delta(\mathbf{A}; \mathcal{W})$  in equation 5 with appropriate  $\mathcal{W}$ . We follow the notation of Sections 2 and 3:  $\theta \subset [q]$  with  $|\theta| = l$  indexes an  $l$ -th order marginal subgroup, and  $W_{s_{\theta}, a} = \{s \in \{0, 1\}^q : s_{\theta} = a\}$  for  $a \in \{0, 1\}^l$ .

| Metric                  | Base                                                                            | Aggregation                                                                                                                |
|-------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| $SP_{\text{sum}}$       | $\delta_{k,s} :=  p_k(\mathbf{A}) - p_{k s}(\mathbf{A}) $                       | $\sum_{s \in \{0,1\}^q} \pi_s \sum_{k \in [K]} \delta_{k,s}$                                                               |
| $MP_{\text{sum}}^{(l)}$ | $\delta_{k,\theta,a} :=  p_k(\mathbf{A}) - p_{k W_{s_{\theta},a}}(\mathbf{A}) $ | $\sum_{\theta \subset [q],  \theta =l} \sum_{a \in \{0,1\}^l} \pi_{W_{s_{\theta},a}} \sum_{k \in [K]} \delta_{k,\theta,a}$ |

As shown in Figure 5, replacing the max with sum aggregation does not change the main messages of our experiments. That is, COVA-FC still attains competitive cost-fairness trade-offs, and this indicates that COVA-FC is not limited to specific aggregation rules.

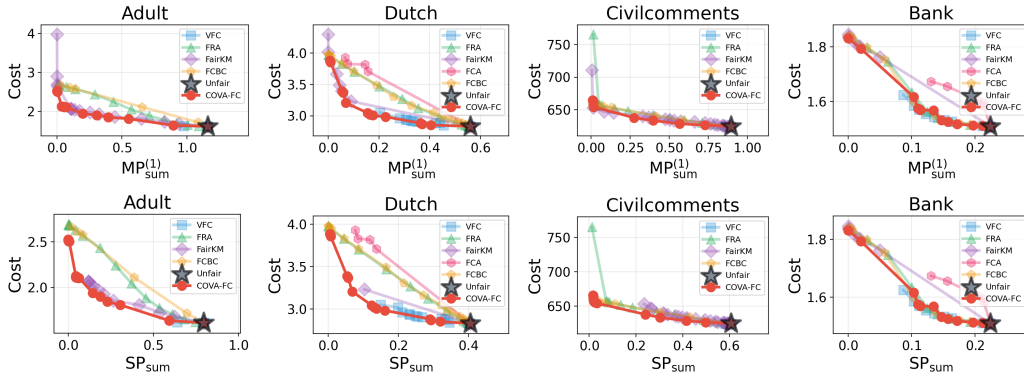


Figure 5: Comparison of trade-offs between ‘sum-aggregated’ gap (top:  $MP_{\text{sum}}^{(1)}$ , bottom:  $SP_{\text{sum}}$ ) and cost on (left to right) Adult, Dutch, Civilcomments, and Bank datasets. Note that  $SP_{\text{sum}} = MP_{\text{sum}}^{(1)}$  for Bank dataset since  $q = 1$ .

**Cost-fairness trade-off: subgroup Balance.** As discussed in the Remark in Section 5.1, Balance [10] is the standard ratio-based fairness measure but degenerates on datasets where some subgroup has fewer than  $K$  instances. We use a probability-ratio version of Balance, rather than the original count-ratio form, because the latter can depend strongly on subgroup-size ratios even under perfectly balanced cluster proportions. Using the notation of Sections 2 and 3, the subgroup Balance (SB) and the  $l$ -th order marginal Balance ( $MB^{(l)}$ ) are defined as

$$SB := \min_{s \neq s'} \min_{k \in [K]} B_{k,s,s'}, \quad MB^{(l)} := \min_{\theta \subset [q], |\theta|=l} \min_{a \neq a'} \min_{k \in [K]} B_{k,W_{s_\theta,a},W_{s_\theta,a'}},$$

where, for any two subgroup-subsets  $W, W'$  with  $n_W, n_{W'} > 0$  and any  $k \in [K]$ ,

$$B_{k,W,W'} := \min \left\{ \frac{p_{k|W}(\mathbf{A})}{p_{k|W'}(\mathbf{A})}, \frac{p_{k|W'}(\mathbf{A})}{p_{k|W}(\mathbf{A})} \right\},$$

$B_{k,s,s'}$  is the special case  $W = \{s\}$ ,  $W' = \{s'\}$ , and the minimum for  $MB^{(l)}$  is over all pairs of  $l$ -th order marginal subgroups. For datasets where these Balances are well-defined (Adult, Dutch, Bank), we additionally report cost vs. SB and  $MB^{(1)}$  in Figure 6. COVA-FC attains higher Balance at comparable clustering cost than the baselines in most cases, consistent with the gap-based results.

On Adult, both VFC and FairKM stay at  $SB = 0$ , while COVA-FC reaches strictly positive SB. Empirically, we observe that FairKM’s hard assignments often leave at least one small subgroup empty in some cluster ( $p_{k|s} = 0$ ), and VFC can collapse to the  $K$ -means solution under tiny subgroups due to its inverse subgroup-cluster mass term (Appendix D.5). COVA-FC’s soft assignment and inverse-mass-free surrogate keep all  $p_{k|s}$  strictly positive, so SB stays positive.

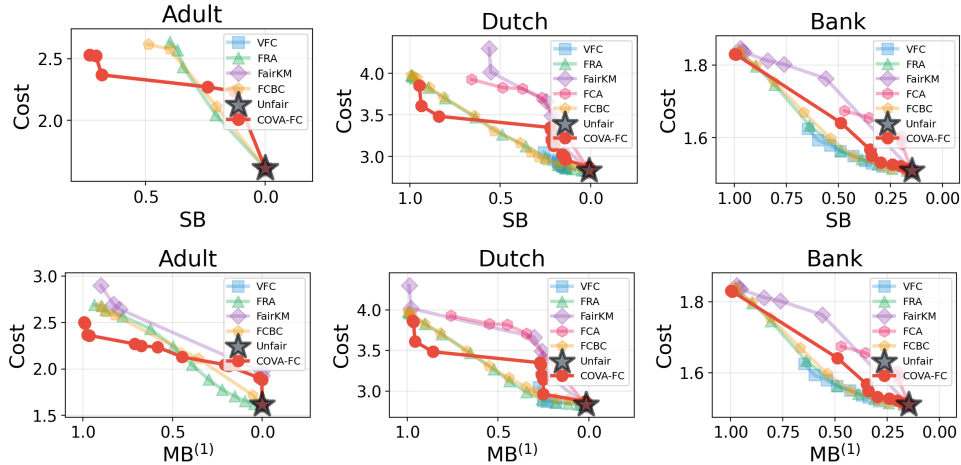


Figure 6: Comparison of trade-offs between subgroup Balance (SB) and cost on (left to right) Adult, Dutch, and Bank datasets. Civilcomments is excluded since its minimum subgroup size is smaller than  $K$ , which causes Balance to collapse to zero.



### D.3 Scalability.

To examine the scalability of COVA-FC, we evaluate runtime on a large-scale dataset and compare COVA-FC with VFC [42], the fastest baseline in Table 3. We use the ACSIncome dataset with  $n = 1,664,500$  instances, feature dimension  $d = 7$ , and  $q = 3$  sensitive attributes (gender, marital status, and race with categories White/Black/Asian/Other), which yields 16 subgroups. We run each method to reach a comparable fairness level. The results in Table 7 show that COVA-FC runs  $3.22\times$  faster than VFC at a comparable SP on this large-scale dataset.

Table 7: Comparison between COVA-FC and VFC on ACSIncome in terms of fairness level (SP) and runtime.

| Dataset   | Method           | SP   | Runtime (sec) |
|-----------|------------------|------|---------------|
| ACSIncome | <b>COVA-FC</b> ✓ | 0.19 | 179.72        |
|           | VFC [42]         | 0.18 | 578.75        |

### D.4 Relationship between $\overline{\text{CR}}$ and $\Delta$

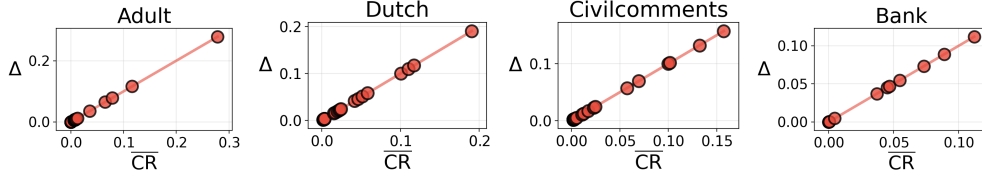


Figure 7: Plots of  $\overline{\text{CR}}$  vs.  $\Delta$  on (left to right) Adult, Dutch, Civilcomments, and Bank datasets.

To empirically support Theorem 3.1, we visualize the relationship between  $\overline{\text{CR}}$  computed on the learned soft assignment and  $\Delta$  computed on the induced hard assignment across different values of  $\lambda$ . Although experiments are conducted with soft assignment, the learned assignment is highly concentrated near one-hot vectors in practice (see Appendix D.6), so this comparison is informative for the final hard clustering as well. Figure 7 shows a clear positive relation: smaller values of  $\overline{\text{CR}}$  are associated with smaller values of  $\Delta$ , supporting  $\overline{\text{CR}}$  as an effective surrogate for optimizing fair hard clustering in practice.

## D.5 Deeper comparison with VFC & FairKM

**Why VFC is the closest baseline.** Among the baselines, VFC is closest to COVA-FC in computational profile: both use soft assignment and per-instance parallel updates. We therefore compare the two methods more closely below.

Let  $\mathbf{S}^{(t)} \in [0, 1]^{N \times K}$  denote the soft assignment matrix at iteration  $t$ , and let  $S_k^{(t)}$  be its  $k$ -th column. Let  $V_j \in \{0, 1\}^N$  be the indicator vector of subgroup  $j$ , and let  $v_{j,p}$  be its  $p$ -th entry. Writing  $\mu_j$  for the target proportion of subgroup  $j$ ,  $a_{p,k}$  for the clustering term, and  $L$  for the bound-update scaling parameter, VFC assignment update is

$$S_{p,k}^{(t+1)} \propto S_{p,k}^{(t)} \exp\left(\frac{-a_{p,k} - \lambda b_{p,k}(\mathbf{S}^{(t)})}{L}\right), \quad (20)$$

followed by row normalization over  $k$ , where

$$b_{p,k}^{(t)} = \sum_j \left( \frac{\mu_j}{\mathbf{1}^\top S_k^{(t)}} - \frac{\mu_j v_{j,p}}{V_j^\top S_k^{(t)}} \right). \quad (21)$$

**High- $\lambda$  breakdown in VFC.** The term  $V_j^\top S_k^{(t)}$  is the soft mass of subgroup  $j$  in cluster  $k$ . When some subgroup-cluster masses are small, the inverse-mass term in  $b_{p,k}^{(t)}$  can become large. Since this term is multiplied by  $\lambda$  inside an exponential update, increasing  $\lambda$  can make the assignment update numerically extreme. In Table 8, VFC initially improves SP on `Communities`. However, at slightly larger  $\lambda$ , the soft update becomes non-finite and the implementation falls back to the K-means solution. COVA-FC avoids this inverse subgroup-cluster mass term.

Table 8: VFC behavior on `Communities` with  $K = 10$ ,  $L = 2$ , as  $\lambda$  increases.

| $\lambda$           | Cost         | SP            | $\max_{p,k}  \lambda b_{p,k} $ |
|---------------------|--------------|---------------|--------------------------------|
| 0                   | <b>56.99</b> | <b>0.0251</b> | —                              |
| $1 \times 10^{-11}$ | 57.06        | 0.0240        | $2.56 \times 10^2$             |
| $2 \times 10^{-11}$ | 57.34        | 0.0216        | $5.12 \times 10^2$             |
| $4 \times 10^{-11}$ | 60.57        | 0.0141        | $1.02 \times 10^3$             |
| $6 \times 10^{-11}$ | <b>56.99</b> | <b>0.0251</b> | $1.54 \times 10^3$             |

**Why FairKM is hard to extend to soft assignment.** FairKM [37] updates cluster assignment by hard reassignment, which can be viewed as solving

$$\arg \min_{A_i \in [K]} (\|x_i - \mu_{A_i}\|^2 + \lambda \cdot \text{FAIRNESSPENALTY}(A_i; \text{others}))$$

for each instance  $i$  under the current assignment of the other instances. The fairness penalty is evaluated from hard membership counts, so this combinatorial update (i) requires evaluating a per-cluster fairness penalty for each candidate  $A_i$ , whose cost increases with both  $K$  and  $M$ , where  $M = 2^q$ ; (ii) is difficult to parallelize across instances because each update changes the global subgroup proportions; and (iii) is non-differentiable in  $A_i$ , ruling out direct gradient-based scaling. A soft-assignment relaxation, replacing  $\mathbb{I}(A_i = k)$  with  $A_{ik}$ , does not preserve the original hard-count-based update structure of FairKM and would require re-deriving the optimization. In contrast, our continuous soft-assignment formulation directly optimizes a differentiable subgroup-fairness surrogate, allowing fine-grained control over small subgroups within a scalable optimization framework.

## D.6 Effects of the continuous relaxation

**Four variants of the surrogate.** Recall that  $\text{CR}(\mathbf{A})$  has two discrete components: the worst-case subgroup membership  $s$  (relaxed by  $\mathbf{v} \in \mathbb{S}^{M+}$ ) and the hard cluster assignment  $\mathbf{A}$  (relaxed by replacing  $\mathbb{I}(A_i = k)$  with  $A_{ik}$ ). Depending on which component is relaxed, we have four variants:

$$\begin{aligned}\text{CR}(\mathbf{A}) &:= \max_{s \in \mathcal{S}_+} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k \mathbb{I}(A_i = k) \right) (c_{is} - \bar{c}_s), \\ \text{CR}_{\mathbf{v}}(\mathbf{A}) &:= \max_{\mathbf{v} \in \mathbb{S}^{M+}} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k \mathbb{I}(A_i = k) \right) \mathbf{v}^\top (c_i - \bar{c}), \\ \text{CR}_{\mathbf{A}}(\mathbf{A}) &:= \max_{s \in \mathcal{S}_+} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) (c_{is} - \bar{c}_s), \\ \overline{\text{CR}}(\mathbf{A}) &:= \max_{\mathbf{v} \in \mathbb{S}^{M+}} \max_{\beta \in \mathcal{B}_\infty} \frac{1}{2n} \sum_{i=1}^n \left( \sum_{k=1}^K \beta_k A_{ik} \right) \mathbf{v}^\top (c_i - \bar{c}).\end{aligned}$$

Here  $\text{CR}$  is the original (both hard),  $\text{CR}_{\mathbf{v}}$  relaxes only  $\mathbf{v}$ ,  $\text{CR}_{\mathbf{A}}$  relaxes only  $\mathbf{A}$ , and  $\overline{\text{CR}}$  relaxes both. The same naming applies to the general  $\mathcal{W}$ -version  $\text{CR}(\mathbf{A}; \mathcal{W})$  by replacing the max over  $s$  with a max over  $W \in \mathcal{W}_+$  and using the corresponding  $c_{i,W}, \bar{c}_W$ .  $\overline{\text{CR}}$  is the final surrogate used in COVA-FC; the other three serve as ablations below.

**$\text{CR}_{\mathbf{v}}$  vs.  $\text{CR}_{\mathbf{A}}$ .** We compare  $\text{CR}_{\mathbf{v}}$  (hard  $\mathbf{A}$ ) with  $\text{CR}_{\mathbf{A}}$  (soft  $\mathbf{A}$ ) on the four benchmark datasets. Table 9 shows that  $\text{CR}_{\mathbf{A}}$  produces fair clusters, whereas  $\text{CR}_{\mathbf{v}}$  often fails to reduce the fairness gap due to the non-smooth indicator  $\mathbb{I}(A_i = k)$ .

Table 9: Comparison between  $\text{CR}_{\mathbf{v}}$  and  $\text{CR}_{\mathbf{A}}$  in terms of Cost and SP.

| Dataset       | Variant                  | Cost   | SP            |
|---------------|--------------------------|--------|---------------|
| Adult         | $\text{CR}_{\mathbf{v}}$ | 1.70   | 0.1046        |
|               | $\text{CR}_{\mathbf{A}}$ | 2.52   | <b>0.0002</b> |
| Dutch         | $\text{CR}_{\mathbf{v}}$ | 2.85   | 0.0888        |
|               | $\text{CR}_{\mathbf{A}}$ | 3.94   | <b>0.0001</b> |
| Civilcomments | $\text{CR}_{\mathbf{v}}$ | 624.99 | 0.0711        |
|               | $\text{CR}_{\mathbf{A}}$ | 657.84 | <b>0.0012</b> |
| Bank          | $\text{CR}_{\mathbf{v}}$ | 1.52   | 0.0877        |
|               | $\text{CR}_{\mathbf{A}}$ | 1.83   | <b>0.0001</b> |

**$\text{CR}_{\mathbf{A}}$  vs.  $\overline{\text{CR}}$ .** We compare  $\text{CR}_{\mathbf{A}}$  (hard  $\mathbf{v}$ , requiring an explicit max over all subgroups) with  $\overline{\text{CR}}$  (soft  $\mathbf{v}$ , optimizing a linear combination via  $\mathbf{v}$ ).  $\overline{\text{CR}}$  avoids the linear scan and admits closed-form gradients in  $\mathbf{v}$ . Table 10 shows that  $\overline{\text{CR}}$  matches the cost and SP of  $\text{CR}_{\mathbf{A}}$  at substantially lower runtime, with larger gains when  $|\mathcal{W}|$  is larger (Adult: 16 subgroups, Civilcomments: 24).

Table 10: Comparison between  $\text{CR}_{\mathbf{A}}$  and  $\overline{\text{CR}}$  in terms of Cost, SP, and Runtime.

| Dataset (# Subgroups) | Variant                  | Cost   | SP     | Runtime (sec)                         |
|-----------------------|--------------------------|--------|--------|---------------------------------------|
| Adult (16)            | $\text{CR}_{\mathbf{A}}$ | 2.53   | 0.0002 | 201.66                                |
|                       | $\overline{\text{CR}}$   | 2.52   | 0.0002 | <b>132.80</b> ( $\times 1.52$ faster) |
| Dutch (4)             | $\text{CR}_{\mathbf{A}}$ | 3.94   | 0.0001 | 34.60                                 |
|                       | $\overline{\text{CR}}$   | 3.94   | 0.0001 | <b>32.00</b> ( $\times 1.08$ faster)  |
| Civilcomments (24)    | $\text{CR}_{\mathbf{A}}$ | 657.84 | 0.0012 | 224.80                                |
|                       | $\overline{\text{CR}}$   | 657.84 | 0.0012 | <b>89.40</b> ( $\times 2.51$ faster)  |
| Bank (3)              | $\text{CR}_{\mathbf{A}}$ | 1.83   | 0.0001 | 42.12                                 |
|                       | $\overline{\text{CR}}$   | 1.83   | 0.0001 | <b>39.43</b> ( $\times 1.07$ faster)  |

**CR<sub>v</sub> vs. CR.** We further isolate the role of relaxing **A** by comparing  $\overline{\text{CR}}$  with  $\text{CR}_v$ , which keeps **v** relaxed but uses the hard indicator on **A**. With  $(\mu, \mathbf{v}, \beta)$  fixed,  $\text{CR}_v$  admits the closed-form update  $A_i \leftarrow \arg \min_{k \in [K]} (\|x_i - \mu_k\|^2 + \lambda \beta_k \mathbf{v}^\top (c_i - \bar{c}))$ ,  $i \in [n]$ .

Figure 8 shows that  $\overline{\text{CR}}$  yields a stable decrease and clear convergence, whereas  $\text{CR}_v$  exhibits oscillations and fails to converge, because the non-smooth indicator  $\mathbb{I}(A_i = k)$  makes the objective discontinuous in **A** and induces frequent switching of the maximizers  $(\mathbf{v}, \beta)$ .

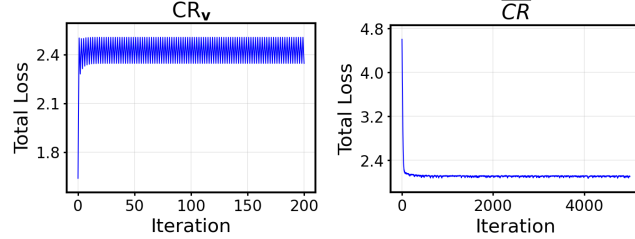


Figure 8: Plots of the total loss (clustering cost +  $\lambda$  fairness penalty) across epochs on Adult, using  $\text{CR}_v$  (left) and  $\overline{\text{CR}}$  (right) as the fairness penalty.

In addition to the total loss, we also track the fairness gap  $\Delta(\mathbf{A}; \mathcal{W})$  over iterations. Figure 9 presents the results across multiple values of  $\lambda$ : (top)  $\text{CR}_v$  with hard cluster assignment as the fairness penalty. (bottom)  $\overline{\text{CR}}$  with soft cluster assignment as the fairness penalty. The number of iterations can differ across settings because each run is terminated once the objective in Eq. (9) satisfies the convergence criterion (see Section 5.1). We observe that  $\text{CR}_v$  (top) (i) exhibits oscillations, (ii) attains substantially larger fairness gap than  $\overline{\text{CR}}$ , and (iii) does not show a clear improvement in the gap even when using a large  $\lambda$ . In contrast,  $\overline{\text{CR}}$  (bottom) reduces the gap clearly and produces fair clusters.

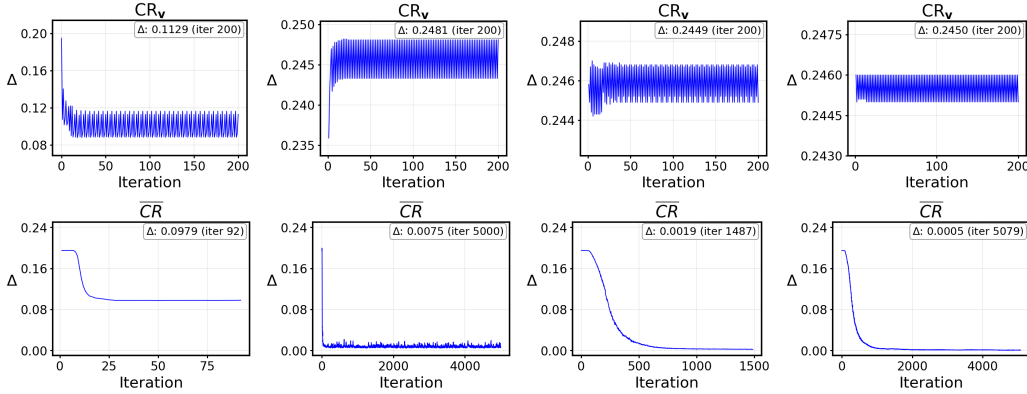


Figure 9: Plots of  $\Delta(\mathbf{A}; \mathcal{W})$  across iterations on Adult dataset when using  $\text{CR}_v$  (top) and  $\overline{\text{CR}}$  (bottom) as the fairness penalty. (left to right)  $\lambda$  ranges from 0.3 to 50.

Overall, these results indicate that using *hard cluster assignment* harms optimization stability even when the most-violated selection is relaxed by the use of **v** instead of **m**, and often fails to produce fair clusters in practice.

**Concentration of soft cluster assignment.** We examine how concentrated each soft cluster assignment  $A_i$  becomes during optimization. Specifically, for each  $i \in [n]$  we compute the maximum probability  $\max_{k \in [K]} A_{ik}$ , and plot histograms of these values across all instances at 100, 300, 500, and 700 iterations (Figure 10). As optimization proceeds, the distribution of  $\max_{k \in [K]} A_{ik}$  increasingly concentrates near 1, indicating that each  $A_i$  becomes sharply peaked and thus close to a hard cluster assignment. This result justifies the use of soft assignment even if our goal is to find a fair hard assignment.

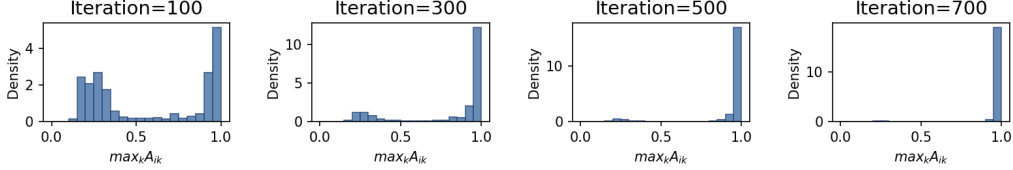


Figure 10: Histograms of the maximum soft cluster assignment,  $\max_{k \in [K]} A_{ik}$ , over all instances  $i \in [n]$  at 100, 300, 500, and 700 iterations.

## D.7 Additional image experiment on CelebA

We additionally evaluate COVA-FC on the CelebA dataset to test its applicability in an image-feature setting. We use four binary sensitive attributes, which induce 16 subgroups, and extract feature vectors using a pre-trained ResNet-18 model. We then apply COVA-FC to these extracted features in the same way as for the other datasets. The results in Figure 11 show that COVA-FC can be applied without modification to image-derived feature representations and still improves subgroup fairness as the fairness penalty increases.

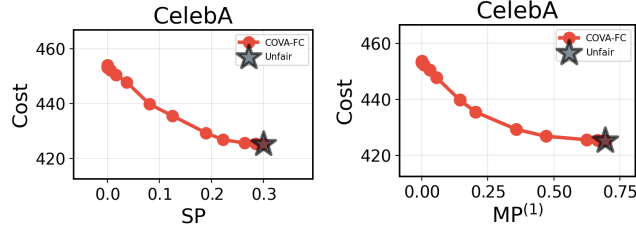


Figure 11: Cost-fairness trade-off on the CelebA dataset with four binary sensitive attributes (16 subgroups), using image features extracted by a pre-trained ResNet-18 model.

## E Broader impact

COVA-FC targets subgroup unfairness under multiple sensitive attributes, a setting common in real applications such as customer segmentation, resource allocation, and large-scale demographic analysis, where unfair treatment is often driven by intersections of attributes rather than a single one. By controlling subgroup and marginal fairness simultaneously and admitting parallel updates that scale to millions of instances, COVA-FC broadens the deployability of fair clustering in practice. At the same time, COVA-FC enforces only a statistical fairness criterion at the clustering level: a balanced cluster assignment does not by itself guarantee fair outcomes in downstream tasks (e.g., recommendation, screening, or pricing), and the choice of sensitive attributes inevitably reflects pre-existing social categories with their own simplifications. Practitioners should therefore audit fairness in the deployment context, document the chosen attributes and groupings, and avoid relying on a single fairness measure as a guarantee of equitable treatment.

## NeurIPS Paper Checklist

### 1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [Yes]

Justification: The abstract and Section 5 state our contributions: a covariance-based fairness gap, its continuous relaxation, the resulting algorithm COVA-FC, an extension to subgroup-marginal fairness, and empirical evaluation against existing baselines.

Guidelines:

- The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

### 2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We discuss limitations and future directions in the concluding remarks (Section 5.5 and the Future directions paragraph), including the binary-attribute assumption (extended in a Remark in Section 5.1) and possible extensions to other clustering paradigms.

Guidelines:

- The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

### 3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [Yes]

Justification: All theorems (Theorems 2.1, 2.2 and 3.1) are stated with explicit assumptions in the main paper, and full proofs are provided in Appendix B.1.

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

#### 4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: Datasets, baselines, sensitive attributes, hyperparameters, and convergence criteria are described in Section 5.1 and Appendix D.1; the algorithm pseudocode and update derivations are in Appendix C.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
  - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
  - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
  - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
  - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in



some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

## 5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: All datasets used are publicly available and properly cited (Appendix D.1); we will release anonymized code with the camera-ready version, and detailed implementation specifications are provided in Appendix C and Appendix D.1.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

## 6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Optimizer choice, learning rate schedule, the fairness penalty  $\lambda$ , initialization, and convergence criteria are specified in Section 5.1 and Appendix D.1.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

## 7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: In Section 5.3, we report results averaged over five random seeds. For the remaining experiments, we follow a shared protocol across baselines and report cost-fairness trade-off curves across multiple penalty levels and datasets; the observed trends are consistent across Section 5 and Appendix D.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

#### 8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: The hardware setup and per-experiment runtimes are reported in Appendix D.1 and the runtime tables (Table 3).

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

#### 9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: We have reviewed the NeurIPS Code of Ethics, and the research conforms in all respects, including anonymity in submission and the use of publicly available datasets.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

#### 10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: Appendix E discusses positive impacts (mitigating subgroup unfairness in real applications, with scalability that broadens deployability), negative impacts (only a statistical criterion at the clustering level, no guarantee of downstream fairness), and practitioner guidelines.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

#### 11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: The paper does not release any pre-trained generative model or scraped dataset; the contribution is a fair clustering algorithm with no high risk for misuse.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

#### 12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: All datasets and baseline algorithms used are publicly available and cited at the original sources (Appendix D.1 and section 5.1); we use them under their respective licenses and terms of use.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, [paperswithcode.com/datasets](https://paperswithcode.com/datasets) has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

### 13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [N/A]

Justification: The paper does not release any new datasets or pre-trained models; we will release anonymized code with the camera-ready version, with documentation following standard open-source practice.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

### 14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: The paper does not involve crowdsourcing or research with human subjects.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

### 15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: The paper does not involve research with human subjects.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

#### 16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [N/A]

Justification: LLMs were not used as part of the core methodology of this research; any use was limited to writing assistance and does not affect the scientific content.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.