

Certified Training for Convolutional Perturbations

Benedikt Brückner
Safe Intelligence

benedikt@safeintelligence.ai

Alessio Lomuscio
Safe Intelligence

Imperial College London

alessio@safeintelligence.ai

Abstract

Vision models have been found to be susceptible to perturbations such as motion blur induced at runtime by a shaking camera. This impedes their deployment in critical applications since phenomena such as slightly blurred vision might lead to failures, for example an object detector missing objects. While methods such as data augmentation or Adversarial Training can improve empirical robustness, they lack formal safety guarantees, making it difficult to identify and mitigate hidden vulnerabilities. We introduce a novel Certified Training approach that leverages an efficient encoding of convolutional perturbations to train provably robust models. Our method significantly outperforms Adversarial Training, achieving, for example, over 80% robust accuracy against motion blur of reasonable intensity on CIFAR10 while maintaining comparable standard accuracy.

1. Introduction

Neural networks trained for image processing tasks are often brittle and may produce unexpected results under slight changes of their inputs [53], including perturbations such as motion blur which frequently appear in real-world systems [15]. This impedes the deployment of such models in safety-critical domains such as self-driving cars and aviation. While additional training data and methods such as Adversarial Training can improve the generalisation capabilities of the model being trained, their safety usually cannot be verified. Since even models which are thought to be robust may have unforeseen weaknesses and blind spots [6], methods for verifying the robustness to input perturbations are needed. To this end, a number of approaches for verifying neural networks [12, 23, 27, 32, 67, 68] have been put forward. Many works focus on perturbations in the l_∞ norm, often referred to as white noise, others consider perturbations such as brightness changes [26], rotations [52] or occlusions [16]. However, models trained using standard training approaches are usually difficult to verify. This is

due to the looseness of the convex relaxations which verifiers employ to model nonlinear dependencies [35]. Certified Training methods aim at training verifiably robust networks, often by adding a loss component based on bounds on the model’s outputs to the training loss [9, 30, 35, 41]. Despite the fact that convolutional perturbations such as motion blur frequently occur in safety-critical systems like autonomous aircraft or self-driving cars [15, 43, 47], no method for training neural networks that are verifiably robust to such convolutional perturbations exist. We fill this gap through the following contributions:

- We present the first method for training models that are certifiably robust to motion blur and related convolutional perturbations. Exploiting the low perturbation dimensionality together with an efficient, batched implementation, we compute tight bounds for training. This significantly reduces the overregularisation of the model to arrive at a sweet spot between standard accuracy and robustness.
- We conduct a comprehensive evaluation across perturbations and corruption strengths. For reasonably sized perturbations we achieve much higher robust accuracies than pure Adversarial Training while standard performance remains comparable. Even for strong perturbations we obtain models with a robust accuracy of over 70% in the majority of cases for CIFAR10. Standard and robust accuracies are often well above those of the state-of-the-art Certified Training methods for white noise.

2. Related Work

Neural Network Verification Neural networks are well known to be susceptible to adversarial attacks [11, 31, 44, 53, 55]. Algorithms for verifying neural networks prove the nonexistence of adversarial examples within the neighbourhood of a given input using standard solvers [23, 51] or custom bound propagation procedures [32, 52, 57–59, 63]. While such methods predominantly target image classifiers, robustness verification has also been extended to other tasks such as object detection [5, 10]. Of special interest to this work are verifiers based on propagat-

ing intervals through a model to bound the output neurons. Interval Bound Propagation (IBP) cheaply propagates concrete bounds through the network. Alternatives such as (Forward) Symbolic Interval Propagation (SIP) or CROWN/back-substitution/RSIP exploit symbolic bounding equations to gain precision [52, 57–59, 63].

Perturbation Types Most works investigate robustness to white noise, represented by pixel-wise perturbations bounded in the l_∞ norm [24, 51]. Further perturbations of interest include brightness and contrast changes [21, 26], geometric perturbations such as translations or rotations [1, 2, 52] as well as occlusions [39]. More complex perturbations may be modeled using generative models [17, 38, 56]. Prior work on convolutional perturbations, which this work focuses on, is scarce. Guo et al. [15] show that motion blur in input images degrades the performance of neural networks, but there is little work on evaluating and verifying the robustness of models to such phenomena [4, 42, 46]. Paterson et al. [46] perform testing for blur perturbations while Mziou-Sallami and Adjed [42] develop a method for verification against general convolutional perturbations. Since this method faces scalability issues, Brückner and Lomuscio [4] suggest to instead focus on verifying robustness to specific convolutional perturbations which enables scaling to larger models. However, both works on convolutional perturbations focus on robustness verification and not training. This raises the question of how the verified robustness of brittle networks can be improved.

Adversarial and Certified Training A problem closely related to robustness verification is that of training networks to be more robust. Adversarial Training increases the empirical robustness [13, 33] while Robust/Verified/Certified Training improves the verified robustness of a model. This can be achieved by adding regularisation to Adversarial Training [8, 62] or computing an upper bound on the worst case loss [14, 49, 60]. State-of-the-art (SoA) approaches for robustification to white noise combine over- and underapproximations of the true worst-case loss [9, 34, 41], making use of IBP for bounding. Henriksen and Lomuscio [20] focus on certified training for low-dimensional bias field perturbations. Since the convolutional perturbation encoding we focus on is also low-dimensional [4], we draw on their insights and also use symbolic bounds to compute upper bounds of the loss.

3. Background

We use bold lower-case letters $\mathbf{a}$ to denote vectors and bold upper-case letters $\mathbf{A}$ to denote matrices and tensors. Square brackets are used for indexing vectors, matrices and tensors with *e.g.* $\mathbf{A}[i, j]$ denoting the element in row i and column j

of the matrix $\mathbf{A}$ and $\mathbf{A}[i, :]$ the i -th row of $\mathbf{A}$. We write $\mathbf{I} * \mathbf{K}$ for the convolution of a matrix $\mathbf{I}$ with a kernel $\mathbf{K}$. $\text{vec}(\mathbf{A})$ is used for the vectorisation of a matrix or tensor, *e.g.* if $\mathbf{A} \in \mathbb{R}^{m \times n}$ and $\mathbf{a} = \text{vec}(\mathbf{A})$ then $\mathbf{a} \in \mathbb{R}^{mn}$. The inverse operation is vec^{-1} , to clarify the shape of the output may be added. For the above example one would write $\text{vec}_{m,n}^{-1}(\mathbf{a})$ to restore the original $\mathbf{A}$. We focus on feed-forward neural networks $f : \mathbb{R}^{n_0} \rightarrow \mathbb{R}^{n_L}$ with L layers which operate on an input $\mathbf{x} \in \mathbb{R}^{n_0}$. We restrict our analysis to networks with ReLU activations, but note that both verification and certified training are equally feasible for networks incorporating other activation functions [50, 61].

3.1. Neural Network Verification

Neural Network Verification aims at verifying the robustness of a trained neural network f to perturbations of its input. For a set of inputs $\mathbb{I} \subset \mathbb{R}^{n_0}$ and a safe output set $\mathbb{O} \subset \mathbb{R}^{n_L}$, the aim is to either prove or disprove that $\forall \mathbf{x} \in \mathbb{I} : f(\mathbf{x}) \in \mathbb{O}$. The verification literature usually considers perturbations of a given strength ϵ bounded in the l_∞ norm. To determine whether a network is robust, most SoA verifiers make use of bound propagation methods.

Interval Bound Propagation [14, 58] is the cheapest and least precise such method which propagates concrete bounds through the network. Let $\mathbf{W}_i, \mathbf{b}_i$ denote the weight matrix and bias vector for the i -th layer and $\mathbf{W}_i^+, \mathbf{W}_i^-$ the matrix containing only the positive/negative elements of $\mathbf{W}_i$ and 0 everywhere else. Given concrete lower and upper bounds $\mathbf{l}_{i-1}, \mathbf{u}_{i-1}$ for a layer, the bounds for the following layer are calculated as $\mathbf{l}_i = \mathbf{W}_i^+ \mathbf{l}_{i-1} + \mathbf{W}_i^- \mathbf{u}_{i-1} + \mathbf{b}_i$ and $\mathbf{u}_i = \mathbf{W}_i^+ \mathbf{u}_{i-1} + \mathbf{W}_i^- \mathbf{l}_{i-1} + \mathbf{b}_i$. Symbolic Bound Propagation methods alleviate the coarseness of IBP by propagating symbolic equations through the network. This tracks dependencies between neurons, leading to notably tighter bounds. Forward SIP (FSIP)/Standard SIP (SSIP) performs these computations in a forward manner, from the input to the output layer [25, 57]. Even tighter bounds can be obtained by bounding from the layer of interest in a reversed manner. This method is referred to as either back-substitution, CROWN [64], DeepPoly [52] or Reversed Symbolic Interval Propagation (RSIP) [19], and can be performed dynamically to improve efficiency [27]. Combining these bounding algorithms with a branching strategy yields subproblems with tighter approximations [3, 7, 29].

3.2. Adversarial and Certified Training

A neural network $f_\theta : \mathbb{R}^{n_0} \rightarrow \mathbb{R}^{n_L}$ with parameters θ is trained on a dataset $\mathbb{D}$ containing pairs of inputs and labels $(\mathbf{x}, \mathbf{y})$ by solving the following optimisation problem

$$\min_{\theta} \mathbb{E}_{(\mathbf{x}, \mathbf{y}) \sim \mathbb{D}} \mathcal{L}(f_\theta(\mathbf{x}), \mathbf{y}) \quad (1)$$

Networks trained by using this standard training loss are easily attackable using various adversarial attack paradigms

since the above formulation does not induce stability of the model around a given input in any way. Let $\mathbb{I}(\mathbf{x}, \epsilon)$ denote a set of admissible perturbations of a clean input $\mathbf{x}$. Madry et al. [33] define $\mathbb{I}(\mathbf{x}, \epsilon) = \{\tilde{\mathbf{x}} \in \mathbb{R}^{n_0} \mid \|\tilde{\mathbf{x}} - \mathbf{x}\|_\infty \leq \epsilon\}$ and suggest to instead solve

$$\min_{\theta} \mathbb{E}_{(\mathbf{x}, \mathbf{y}) \sim \mathbb{D}} \max_{\tilde{\mathbf{x}} \in \mathbb{I}(\mathbf{x}, \epsilon)} \mathcal{L}(f_{\theta}(\tilde{\mathbf{x}}), \mathbf{y}) \quad (2)$$

Maximising $\mathcal{L}(f_{\theta}(\mathbf{x}), \mathbf{y})$ is a nonconvex optimisation problem. Instead of solving it exactly, Adversarial Training (AT) finds samples that locally maximise the inner problem by using *e.g.* Projected Gradient Descent (PGD) [33]. Computing the loss on these yields a lower bound for the true maximum which is used to update the model. This makes it more difficult to find adversarial examples using attacks (increases the empirical robustness), but often leads to decreased standard accuracies and the trained model is usually still difficult to verify. Also, adversarial examples can usually still be found, for example using stronger attacks. Certified Training computes a sound upper bound for the inner problem using bounding algorithms such as IBP or SSIP and then performs gradient descent on this upper bound. For details we refer to [14]. Certified training induces a strong regularisation effect, achieving increased stability of the trained model and facilitating verification at the expense of a decreased standard accuracy. Most importantly, it usually produces models for which we can *prove* that there exist *no incorrectly classified inputs in the neighbourhood of a given input*.

Early methods use IBP bounds or combinations of IBP and tighter CROWN bounds for training [37, 65] but require long training schedules and warm-up phases during which the perturbation size is ramped up to achieve satisfying performance. Shi et al. [49] reduce the length of the training schedules by adding batch normalisation (BN) layers to the network [22], developing a custom weight initialisation called IBP Initialisation and adding a warmup loss during the warmup phase to stabilise bound tightness and activation states. Recent work on Certified Training for white noise uses IBP bounds as a sound overapproximation, but combines them with an Adversarial Training component [9, 34, 41]. For low-dimensional perturbations such as brightness perturbations, the changes of pixels' values are coupled across an image, leading to tighter bounds compared to a white noise perturbation where each pixel can vary independently. Henriksen and Lomuscio [20] show that Certified Training using IBP is ineffective for low dimensional perturbations due to the loss of dependency information in IBP. This can be mitigated by instead using SSIP or RSIP for bounding which produce significantly tighter bounds. One drawback of RSIP is the fact that a separate bound computation pass needs to be initiated for every activation layer. Henriksen and Lomuscio [20] introduce RSIP-SSIP as a cheaper

alternative which first uses SSIP to calculate the bounds for all layers in the network and then uses one final RSIP pass to obtain tight bounds on the robust loss.

3.3. Convolutional Perturbations

The discrete convolution of an image $\mathbf{I}$ with a kernel $\mathbf{K}$ enables a variety of effects such as blurring or sharpening to be applied to an input [54, pp. 95–99]. Such convolutional perturbations of an image are likely to appear in the real world, testing the performance of a system on perturbed images or attacking it using noise models such as adversarial blurring [15] can give an indication of its robustness. Still, neither of these techniques can provide guarantees that a model is actually robust. Mziou-Sallami and Adjed [42] develop a method for verifying the robustness of a model to convolutional perturbations but it provides loose bounds and struggles to scale to larger networks. Parameterised kernels instead model convolutional perturbations in a way that enables scaling to larger networks while still proving robustness for dense input regions containing an infinite number of instantiations of the perturbation [4]. They use a parameter $z \in [0, 1]$ to linearly interpolate between an identity kernel and a perturbation kernel. In the simple example of box blurring with a kernel size of $s = 3$, the parameterised kernel must satisfy

$$\mathbf{P}_{z=0} = \begin{pmatrix} 0 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \end{pmatrix}, \mathbf{P}_{z=1} = \begin{pmatrix} \frac{1}{9} & \frac{1}{9} & \frac{1}{9} \\ \frac{1}{9} & \frac{1}{9} & \frac{1}{9} \\ \frac{1}{9} & \frac{1}{9} & \frac{1}{9} \end{pmatrix}. \quad (3)$$

These equations can be used to derive a linear parameterisation $\mathbf{P}_z = \mathbf{C}z + \mathbf{D}$ where $\mathbf{C}, \mathbf{D}, \mathbf{P} \in \mathbb{R}^{3 \times 3}$ and $z \in \mathbb{R}$. Due to the fact that the identity kernel is not well-defined for even kernel sizes [4], we only consider perturbation kernels with odd sizes s . Let $\mathbf{I}$ be an image with $\mathbf{I} \in \mathbb{R}^{o_c \times o_h \times o_w}$ where o_c the number of channels of the image, o_h the image height and o_w the image width. Increasing z from 0 to 1 increases the strength of the perturbation applied to $\mathbf{I}$ when it is convolved with it. For an image $\mathbf{I}$ and an arbitrary parameterised kernel $\mathbf{K} = \mathbf{A}z + \mathbf{B}$ with $\mathbf{K}, \mathbf{A}, \mathbf{B} \in \mathbb{R}^{s \times s}$ where s is the size of the perturbation kernel, it can be shown that [4, Theorem 1]

$$\mathbf{I} * \mathbf{K} = \underbrace{(\mathbf{I} * \mathbf{A})}_{\mathbf{R}_A} z + \underbrace{(\mathbf{I} * \mathbf{B})}_{\mathbf{R}_B} \quad (4)$$

The result of the two convolutions $\mathbf{R}_A, \mathbf{R}_B$ can therefore be computed separately. The result of the perturbation of $\mathbf{I}$ with $\mathbf{K}$ for an arbitrary $z \in [0, 1]$ can then be obtained by simply computing $\mathbf{I}_{\text{perturbed}} = \mathbf{R}_A \cdot z + \mathbf{R}_B$. No new convolution needs to be run for this, only the multiplication of $\mathbf{R}_A$ with the scalar z is required before adding the result to $\mathbf{R}_B$. This trick can be used to encode convolutional perturbations

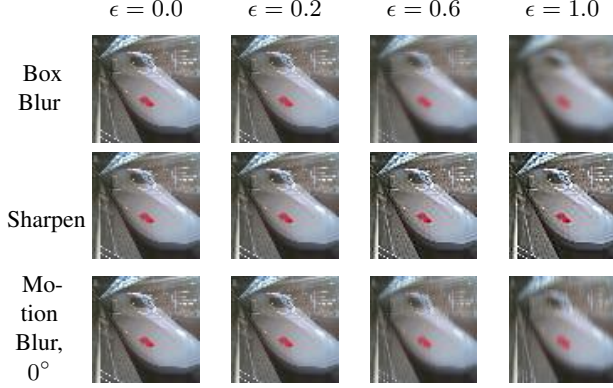


Figure 1. Visualisation of different perturbations and their strengths ϵ on a 64×64 image from the “Bullet Train” class in TinyImageNet using a kernel size of $s = 5$.

for arbitrary kernels $\mathbf{K}$ into a verification framework which may then be used to certify robustness for any perturbation strength within a dense interval $[0, \epsilon]$.

4. Method

Training verifiably robust models with high standard accuracies is a challenging problem since Standard and Adversarial Training as well as training using approaches such as data augmentation produce models that are still vulnerable to corruptions of the inputs. Certified Training is often slow, may suffer from loose bounds and risks overregularising the model. Besides this, IBP-based Certified Training is ineffective for robustifying models against low-dimensional perturbations [20]. We design a Certified Training scheme for convolutional perturbations that makes use of SSIP and RSIP bounds to effectively keep track of the low-dimensional structure of the perturbations at hand. By exploiting this low dimensionality instead of relying on high-dimensional encodings producing looser bounds [42], we avoid overregularisation of the models and preserve a high standard accuracy on the tasks at hand. Together with our efficient, batched perturbation encoding we obtain a highly effective framework for training models that are verifiably robust to convolutional perturbations. To encode the desired perturbations, we prepend suitable layers to the model being trained [26, 39]. Certified Training poses additional challenges to the prepended encodings since they need to support batched processing of the inputs. We assume that for a training step we are given a batch of images $\mathbf{I} \in \mathbb{R}^{o_b \times o_c \times o_h \times o_w}$ where o_b is the batch size. We use the parameterised perturbation kernels described by Brückner and Lomuscio [4] to simulate perturbations such as motion blur or sharpen. These can be written as $\mathbf{K} = \mathbf{A}z + \mathbf{B}$ with $z \in \mathbb{R}$ as well as $\mathbf{K}, \mathbf{A}, \mathbf{B} \in \mathbb{R}^{s \times s}$. To obtain the linear co-

efficients for encoding the perturbation in a parameterised way, we leverage equation 4. Using a batched convolution operation, the coefficient and bias tensor $\mathbf{R}_A, \mathbf{R}_B$ for the entire batch are computed by convolving each input in the batch with $\mathbf{A}, \mathbf{B}$. Reflect padding is used to ensure that $\mathbf{R}_A, \mathbf{R}_B \in \mathbb{R}^{o_b \times o_c \times o_w \times o_h}$.

Let $d = o_c \cdot o_h \cdot o_w$ be the number of pixels in each image in a batch. After running the pre-computation for a batch, the obtained tensors are transformed to

$$\mathbf{R}'_A = \text{vec}_{o_b, d, 1}^{-1}(\text{vec}(\mathbf{R}_A)) \quad (5)$$

$$\mathbf{R}'_B = \text{vec}_{o_b, d}^{-1}(\text{vec}(\mathbf{R}_B)) \quad (6)$$

This is equivalent to flattening each convolution result in a batch to become a vector with a trailing dimension of size one. A reshape layer that encodes the linear operation based on $\mathbf{R}'_A, \mathbf{R}'_B$ is prepended to the network. This layer takes the input to the model $\tilde{z} \in \mathbb{R}^{o_b}$ and applies the linear mapping to each entry in $\tilde{z}$. Here, the i -th entry $\tilde{z}[i]$ controls the degree to which the i -th image in the batch is perturbed. Using Einstein notation, the batched operation can be written as

$$\mathbf{I}'_{\text{perturbed}}[i, j] = \sum_k (\mathbf{R}'_A[i, j, k] \tilde{z}[k]) + \mathbf{R}'_B[i, j] \quad (7)$$

To ultimately obtain the batch of perturbed images,

$$\mathbf{I}_{\text{perturbed}} = \text{vec}_{o_b, o_c, o_h, o_w}^{-1}(\mathbf{I}'_{\text{perturbed}}) \quad (8)$$

is computed. This tensor then serves as the input for the actual neural network to be trained. The convolution of the input can be computed in a parallelised manner as a pre-processing step and is run once for every batch. All other operations (partial flattening, batched multiplication, reconstruction of the correctly shaped perturbed images) are linear, thus differentiable. When these layers are prepended to a network, they support forward passes, bound propagation and backpropagation of gradients through them. For SSIP and RSIP-SSIP based training we use the following approach after prepending the layers encoding the perturbation according to Equations 7 and 8: The bounds for the first layer are set to $[\mathbf{L}_0, \mathbf{U}_0] = [0, \epsilon]^{o_b}$. Using the chosen bounding algorithm, we obtain bounds $[\mathbf{L}_L, \mathbf{U}_L]$ for the final (L -th) layer. Let $\mathbf{Y} \in \{0, 1\}^{o_b \times c}$ be the one-hot encoding of the labels y of a given batch of images $\mathbf{I}$. Since $y[i]$ is the correct class of the i -th input, we then define

$$\tilde{\mathbf{Y}}[i, j] = \begin{cases} \mathbf{L}_L[i, j], & \text{if } j = y[i] \\ \mathbf{U}_L[i, j], & \text{otherwise} \end{cases} \quad (9)$$

and can use this new matrix in the cross-entropy loss function ℓ_{CE} to calculate the robust loss as

$$\mathcal{L}_{\text{method}} = \ell_{\text{CE}}(\tilde{\mathbf{Y}}, \mathbf{Y}) \quad (10)$$

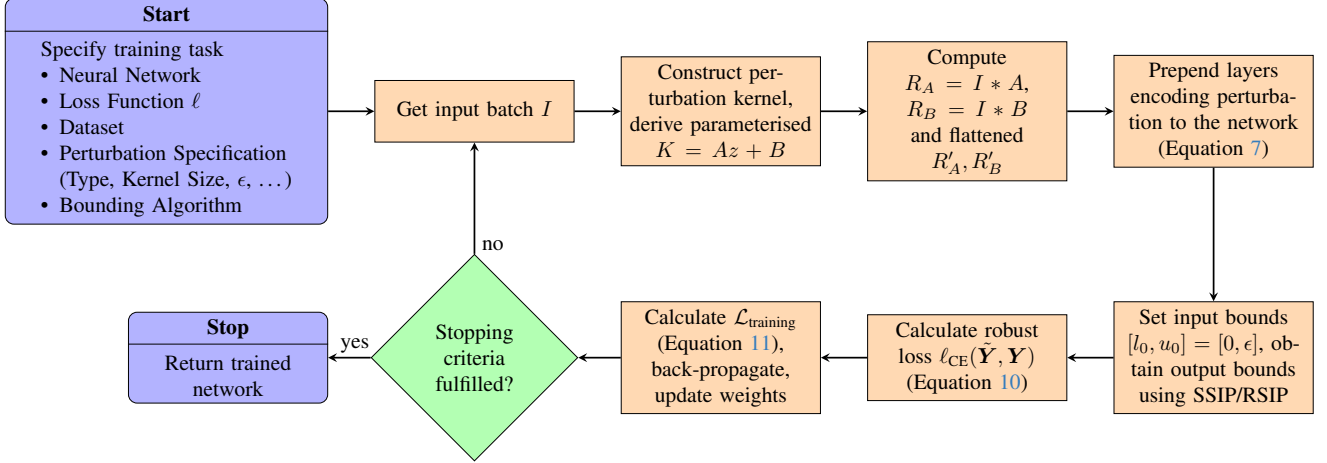


Figure 2. A flowchart showing the certified training pipeline that we propose. Stopping criteria can, for example, be a maximum number of epochs or a (robust) accuracy threshold being surpassed.

where $\text{method} \in \{\text{SSIP}, \text{RSIP-SSIP}\}$ [14]. For Adversarial Training we compute the Projected Gradient Descent (PGD) loss $\mathcal{L}_{\text{PGD}}$ as follows: We randomly initialise the attack point in the $[0, \epsilon]^{o_b}$ interval, calculate the loss and its gradients with respect to the input point, update the attack point by taking a step in the direction of the sign of the gradient and repeat this 8 times. We use Adversarial Training as a baseline to compare the standard accuracy of our method to that of a method inducing a weaker regularisation effect. However, just like approaches such as data augmentation or Adversarial Training based on other attack schemes, PGD training does not improve the certified accuracy of a network. As mentioned in Section 3.2, the current SoA certified training methods are based on loose IBP bounds which overregularise networks when used in the loss function, leading to decreased standard accuracies. The SoA methods introduce an underapproximation component into their loss formulation to prevent this. By using tighter bounds from the SSIP and the RSIP-SSIP method, we circumvent these issues without relying on similar tricks. Our framework retains good standard accuracies while achieving much increased verified accuracies. Denoting the value of the standard cross-entropy loss as $\mathcal{L}_{\text{CE}}$ and the robustification loss as $\mathcal{L}_{\text{method}}$ where $\text{method} \in \{\text{PGD}, \text{SSIP}, \text{RSIP-SSIP}\}$, our loss function becomes

$$\mathcal{L}_{\text{training}} = \frac{\mathcal{L}_{\text{CE}} + \mathcal{L}_{\text{method}}}{2} \quad (11)$$

and we can use a standard machine learning framework to train networks using this loss.

5. Evaluation

We built upon the bound propagation implementation of VeriNet [18, 19], extended it to handle convolutional perturbations and added the required training functionality as well as a PGD attack implementation. PyTorch [45] was used for vectorised computations and the efficient training of models. In line with the SoA robust training literature, we used the CNN7 architecture and the CIFAR10 as well as the TinyImageNet datasets for our experiments. The experimental setup of using this architecture and these datasets is well-accepted practice in certified training works due to the high costs associated with the certified training methods [8, 35, 49] and the fact that bound computation for newer architectures such as transformers is notoriously difficult due to their nonlinearity [48]. CNN7 consists of five convolutional and two fully-connected layers, all layers except for the last one are followed by a ReLU activation layer. Shi et al. [49] suggest multiple variants with and without batch normalisation (BN) layers, we fully add BatchNorm layers since a preliminary ablation study shows that this leads to better performance. To demonstrate the scalability of our method to larger model architectures, we present additional results on a ResNet18 model.

CIFAR10 experiments on CNN7 were run on an Ubuntu server with an AMD Ryzen Threadripper 3970X 32-Core CPU, a Nvidia RTX 3090 GPU and 256GB of RAM. CIFAR10 experiments on ResNet18 and TinyImageNet experiments used four cores of an Ubuntu server with an Intel Xeon Platinum 8358 CPU, a Nvidia L40S GPU and 64GB of RAM.

5.1. Experimental Setup

We tuned the number of warm-up and training epochs to be used and found that the setting used by De Palma et al.

Dataset	Perturbation	s	ϵ	Standard Acc.				Empirical Acc.				Robust Acc.			
				STD	PGD	SSIP	RS	STD	PGD	SSIP	RS	STD	PGD	SSIP	RS
CIFAR10	Box Blur	3	0.2	91.35	88.23	89.45	90.49	90.05	86.88	88.54	89.82	0.00	0.00	87.43	87.43
			0.6	91.35	87.97	85.14	87.31	79.09	84.33	83.15	85.26	0.00	0.00	79.90	80.02
			1.0	91.35	87.08	81.13	83.10	46.80	80.63	78.70	80.76	0.00	0.00	74.25	74.33
		5	0.2	91.35	88.12	88.99	90.60	89.81	86.47	88.27	89.93	0.00	0.00	86.88	87.01
			0.6	91.35	87.91	84.79	87.27	73.04	84.21	81.78	84.22	0.00	0.00	74.76	76.10
			1.0	91.35	86.26	73.52	76.42	37.46	74.40	68.68	71.46	0.00	0.00	62.46	62.58
		7	0.2	91.35	88.22	89.14	90.3	89.65	86.76	88.34	89.62	0.00	0.00	87.00	86.74
			0.6	91.35	87.64	84.98	87.31	74.87	83.47	81.74	84.79	0.00	0.00	74.46	76.88
			1.0	91.35	84.64	69.91	72.73	32.72	69.10	61.64	64.93	0.00	0.00	54.12	56.31
	Sharpen	3	0.2	91.35	88.42	89.08	90.40	90.75	87.69	88.48	89.89	0.00	0.02	87.88	87.99
			0.6	91.35	88.56	87.68	89.48	87.48	87.07	86.61	88.51	0.00	0.00	84.63	84.39
			1.0	91.35	88.50	86.92	88.05	84.35	86.16	85.83	86.93	0.00	0.00	82.54	81.11
		5	0.2	91.35	88.82	89.32	90.41	90.54	87.90	88.64	89.72	0.00	0.00	87.52	87.43
			0.6	91.35	88.75	88.42	90.06	87.01	86.75	87.01	88.89	0.00	0.00	83.62	84.22
			1.0	91.35	88.30	87.52	89.38	82.34	85.80	85.59	87.82	0.00	0.00	80.94	81.91
		7	0.2	91.35	88.71	89.39	90.62	90.16	87.75	88.75	90.01	0.00	0.00	87.58	87.60
			0.6	91.35	88.81	88.10	89.97	87.00	87.00	86.60	88.71	0.00	0.00	83.58	84.21
			1.0	91.35	88.01	87.07	89.00	82.18	85.19	84.89	87.23	0.00	0.00	80.99	82.38
	Motion Blur	3	0.2	91.35	88.19	89.00	89.87	90.24	87.23	88.49	89.39	0.00	0.06	88.05	87.92
			0.6	91.35	88.01	86.94	88.20	85.10	85.98	86.00	87.18	0.00	0.00	84.90	84.27
			1.0	91.35	87.77	85.69	86.94	75.68	84.28	84.40	85.80	0.00	0.00	82.84	82.02
		5	0.2	91.35	88.06	89.13	90.19	90.09	87.02	88.22	89.51	0.00	0.00	86.91	87.00
			0.6	91.35	88.19	84.80	85.92	76.93	84.87	83.01	84.08	0.00	0.00	80.53	79.39
			1.0	91.35	86.51	82.03	83.93	51.78	80.79	80.22	81.92	0.00	0.00	76.58	75.96
		7	0.2	91.35	88.49	89.06	90.36	89.86	87.05	87.96	89.66	0.00	0.00	86.38	86.55
			0.6	91.35	88.65	84.89	86.41	74.70	84.41	82.29	83.86	0.00	0.00	77.26	77.45
			1.0	91.35	86.95	78.6	81.27	45.21	78.20	75.57	78.55	0.00	0.00	70.31	71.29
TinyImageNet	Box Blur	3	0.2	47.05	38.63	38.50	/	42.76	36.19	37.94	/	0.00	0.57	37.24	/
			0.6	47.05	37.83	33.97	/	23.59	33.85	33.16	/	0.00	0.00	31.97	/
			1.0	47.05	36.63	31.69	/	14.42	31.06	30.79	/	0.00	0.00	29.52	/
		5	0.2	47.05	38.73	39.75	/	41.54	35.97	38.86	/	0.00	0.19	37.77	/
			0.6	47.05	37.33	32.76	/	22.21	32.10	31.49	/	0.00	0.00	29.08	/
			1.0	47.05	35.10	26.29	/	10.52	27.31	24.86	/	0.00	0.00	23.43	/
		7	0.2	47.05	39.09	40.01	/	41.36	36.31	39.10	/	0.00	0.08	37.73	/
			0.6	47.05	36.00	31.41	/	22.46	30.49	29.50	/	0.00	0.00	26.54	/
			1.0	47.05	28.80	23.36	/	9.73	19.79	21.15	/	0.00	0.00	19.09	/

Table 1. Experimental evaluation on CNN7. s is the perturbation kernel size, ϵ the perturbation strength for training/verification. STD/PGD denotes Standard and Adversarial Training, SSIP and RS denote Certified Training based on SSIP and RSIP-SSIP bounding, respectively. Standard Acc. is the accuracy on the test dataset, Empirical Acc. the empirical robust accuracy, *i.e.* the percentage of samples that are classified correctly under a PGD adversarial attack. Robust Acc. is the verified robust accuracy computed using RSIP-SSIP.

[9] with 80 warm-up epochs during which the perturbation radius ϵ is linearly increased up to its maximum followed by 80 epochs of training with the full perturbation magnitude yielded the best results. The longer schedule with 80 warm-up epochs and 260 total epochs was outperformed by the shorter 80/160 schedule. In line with other robust training works we used a learning rate of 10^{-5} . We compared the learning rate schedule used by other publications [49] which decays the learning rate twice by a factor of 0.2 after 120 and 140 epochs to a cosine annealing learning rate

schedule. Differences were small with the cosine annealing schedule showing slightly increased standard accuracies at the expense of slightly decreased robust accuracies due to its earlier learning rate decay. We therefore used that schedule in our experiments to preserve standard performance. The results of our extensive evaluation are shown in Table 1. We repeated our runs for $\epsilon \in \{0.2, 0.6, 1.0\}$ and perturbation kernel sizes $s \in \{3, 5, 7\}$. For each of these settings, we considered motion blur perturbations with a blurring angle of 0° as well as box blur and sharpen pertur-

bations. We further considered training setups combining either the PGD, SSIP or RSIP-SSIP loss with a standard cross-entropy loss as outlined in Section 4. We evaluated each of the trained networks on the entire test set and computed the standard accuracy, the empirical robust accuracy using PGD and the verified robust accuracy using RSIP-SSIP. On TinyImageNet [9, 35] we used a slightly modified CNN7 [49] and restricted our analysis to box blur perturbations due to training times. Here, RSIP-based training was infeasible due to the substantial memory requirements associated with RSIP passes through networks with large layers [40]. We therefore restricted our experiments to PGD- and SSIP-based training with RSIP-SSIP only used for test-time verification.

5.2. Results on CIFAR10

Standard (STD) and Adversarial Training (PGD) Both methods achieved high standard accuracies, for small perturbations the empirical robustness of the models was close to the upper bound. For larger perturbations only PGD models preserved high empirical robustness while that of STD models dropped. However, the verified robustness was low since these methods do not promote verifiability in any way, therefore we cannot guarantee the non-existence of failure cases. This prevents the deployment of such models in safety-critical domains.

SSIP and RSIP-SSIP Training The two robust training schemes produced models with significantly increased robust accuracies. For small perturbations they preserved high standard accuracies, for large perturbations (*e.g.* motion and box blur at $\epsilon = 1.0, s = 7$) the standard accuracies were reduced. On CIFAR10, the more precise RSIP-SSIP bounding induced less implicit regularisation due to tighter bounds, leading to slightly lower verified robustness but higher standard accuracies. For very large perturbations, RSIP-SSIP on CIFAR10 achieved a higher robust accuracy than the SSIP-trained models due to the heavily reduced standard accuracy of the SSIP models. On TinyImageNet, SSIP provided robustified networks with small drops in standard accuracy for moderate perturbation sizes and significantly higher robust accuracies. For large perturbations, *e.g.* box blur perturbations with kernel size $s = 7$ and perturbation size $\epsilon = 1.0$ we still attained a verified robustness of 19.09%, albeit with a larger standard performance decrease due to the required strong training-time regularisation.

Box Blur perturbations introduce substantial corruptions to images [4], so robustification against them lead to the largest drop in standard performance. This is consistent with the well-known trade-off between accuracy and robustness [66]. Nevertheless, on CIFAR10, we still obtained ro-

bust accuracies above 70% in all but two cases. On TinyImageNet, we observed similar trends with robustification for smaller perturbation strengths achieving high standard and robust accuracies while for larger perturbation strengths the tradeoff between accuracy and robustness is more evident.

Motion Blur perturbations have much milder effects on inputs, allowing for improved accuracy-robustness trade-offs. For reasonable perturbation sizes on CIFAR10 ($s = 3, \epsilon \in \{0.2, 0.6, 1.0\}$) our method increased the robust accuracy from PGD’s 0% to up to 87.92% while reducing the standard accuracy by at most 1%. For large perturbation strengths, robust accuracies remained above 70% but lead to more evident drops in standard accuracy.

Sharpen perturbations only introduce small changes to inputs. Across all perturbation strengths, certified training achieved strong robust accuracies above 80% while trading off at most 3% in standard performance compared to Standard Training in the worst case.

Summary Using CNN7 on CIFAR10, the state-of-the-art method for Certified Training on white noise achieves a standard accuracy of just 80.61% for a relatively small $\epsilon = 2/255$ with a robust accuracy of 61.65% [9]. This is well below the accuracies for many of our scenarios. Although robustification against white noise is a more difficult problem, our method is very effective at navigating the trade-off between accuracy and robustness. While our method trains models with formal robustness guarantees, no such guarantees can be provided for models trained via STD or PGD.

5.3. Results on ResNet18

We conduct standard, adversarial and SSIP-based robust training runs on a ResNet18 model using the CIFAR10 dataset. Due to the size of the model, RSIP-based robust training leads to substantial memory requirements and is therefore infeasible here. The results of our evaluation are shown in Table 2. We generally observe trends that are similar to those for CNN7. However, we find that ResNet18 models achieves higher standard accuracies on the dataset compared to CNN7 due to its increased model capacity. We also observe that, without robust training, the robust accuracy from single bound propagation passes is zero for both standard and adversarial training across all settings. For models with a depth similar to that of a ResNet18 model, robust training is necessary to achieve a nonzero verified robustness using single bound propagation passes. Comparing the performance of the ResNet18 models with that of CNN7, we observe trends in line with those found in prior works [36]: Due to the large depth of the ResNet model, robust training introduces substantial regularisation at training time in order to preserve verifiability of the neural network. While this leads to increased robustness compared to models trained with standard training, it comes at a high

Perturbation	s	ϵ	Standard Acc.			Empirical Acc.			Robust Acc.		
			STD	PGD	SSIP	STD	PGD	SSIP	STD	PGD	SSIP
Box Blur	3	0.2	94.48	91.08	87.70	92.79	90.16	86.46	0.00	0.00	84.70
		0.6	94.48	90.44	81.64	84.87	87.82	79.80	0.00	0.00	75.42
		1.0	94.48	90.46	77.22	62.02	84.88	74.84	0.00	0.00	70.48
	5	0.2	94.48	90.84	88.58	92.77	90.18	87.74	0.00	0.00	85.26
		0.6	94.48	91.20	79.68	83.32	88.20	75.82	0.00	0.00	66.40
		1.0	94.48	89.90	67.92	46.31	81.44	64.02	0.00	0.00	58.88
	7	0.2	94.48	90.98	87.92	92.64	90.06	87.18	0.00	0.00	84.42
		0.6	94.48	89.98	81.16	84.44	86.86	77.98	0.00	0.00	68.68
		1.0	94.48	88.58	66.64	45.68	75.40	60.18	0.00	0.00	55.46
Sharpen	3	0.2	94.48	92.14	88.28	92.87	91.66	87.98	0.00	0.00	86.04
		0.6	94.48	92.20	85.24	91.24	91.10	84.02	0.00	0.00	80.62
		1.0	94.48	91.94	82.96	89.23	90.90	81.68	0.00	0.00	76.08
	5	0.2	94.48	91.60	88.24	92.84	90.98	87.72	0.00	0.00	86.28
		0.6	94.48	91.84	84.80	90.86	90.96	83.12	0.00	0.00	78.04
		1.0	94.48	92.12	81.32	88.46	91.10	79.32	0.00	0.00	71.48
	7	0.2	94.48	92.02	88.92	92.81	91.48	88.14	0.00	0.00	85.50
		0.6	94.48	92.10	85.78	90.77	90.92	84.34	0.00	0.00	79.44
		1.0	94.48	92.42	83.30	88.37	91.08	81.16	0.00	0.00	73.68
Motion Blur	3	0.2	94.48	91.66	87.78	93.06	90.90	87.18	0.00	0.00	86.10
		0.6	94.48	90.94	85.36	89.22	88.82	84.62	0.00	0.00	82.86
		1.0	94.48	90.88	83.82	82.69	88.30	82.48	0.00	0.00	80.36
	5	0.2	94.48	91.10	87.56	92.72	90.10	86.86	0.00	0.00	84.70
		0.6	94.48	91.22	80.86	85.07	88.76	79.24	0.00	0.00	76.72
		1.0	94.48	90.58	79.02	63.36	85.62	76.94	0.00	0.00	73.02
	7	0.2	94.48	91.08	87.28	92.62	89.88	86.32	0.00	0.00	83.64
		0.6	94.48	91.00	78.00	82.85	87.88	75.64	0.00	0.00	70.76
		1.0	94.48	89.16	74.76	51.19	81.30	71.78	0.00	0.00	67.66

Table 2. Experimental evaluation on ResNet18 using the CIFAR10 dataset. s is the perturbation kernel size, ϵ the perturbation strength for training/verification. STD/PGD denotes Standard and Adversarial Training, SSIP denotes Certified Training based on SSIP bounding. Standard Acc. is the accuracy on the test dataset, Empirical Acc. the empirical robust accuracy, *i.e.* the percentage of samples that are classified correctly under a PGD adversarial attack. Robust Acc. is the verified robust accuracy computed using RSIP-SSIP.

cost in terms of standard accuracy. For the robustly trained models, we generally observe lower standard accuracies for ResNet18 compared to CNN7 due to the heavy regularisation. Nevertheless, we are able to demonstrate that our robust training method extends to larger network architectures and that it can robustify those to a significant extent. We find that, for ResNet18, correctly choosing the weight decay correctly plays an important role and leads to differing accuracies. To account for this, we tune the weight decay for each training run by conducting a run for values of 10^{-3} , 5×10^{-4} , 10^{-4} and selecting the run with the highest standard accuracy.

Besides weight decay, we find that the hyperparameters we used for CNN7 work well for ResNet18 and also add batch normalisation layers to the ResNet18 model.

6. Conclusions

We present the first method for training models that are both accurate and verifiably robust against convolutional perturbations. Robustness can be significantly increased compared to models trained with Adversarial Training which is useful for deploying models in a range of real-life situations where motion blur or optic-created blurring can occur. The verification-based approach evaluates the trained models in a dense neighbourhood of inputs, providing formal safety guarantees before deployment. For reasonable perturbation strengths, our most precise robust training approach improves verified accuracy from 0% to 82% for motion blur on CIFAR10 while only suffering from a 1% decrease in accuracy. We also find that our method can equally be applied to much deeper ResNet18 models which illustrates the scalability of our approach.

Acknowledgements

Benedikt Brückner acknowledges support from the UKRI Centre for Doctoral Training in Safe and Trusted Artificial Intelligence [EP/S023356/1]. Alessio Lomuscio acknowledges partial support from the Royal Academy of Engineering via a Chair of Emerging Technologies.

References

- [1] M. Balunovic, M. Baader, G. Singh, T. Gehr, and M. Vechev. Certifying geometric robustness of neural networks. In *Proceedings of the 33rd Annual Conference on Neural Information Processing Systems (NeurIPS19)*, pages 15313–15323. Curran Associates, Inc., 2019. 2
- [2] B. Batten, Y. Zheng, A. De Palma, P. Kouvaros, and A. Lomuscio. Verification of geometric robustness of neural networks via piecewise linear approximation and lipschitz optimisation. In *Proceedings of the 27th European Conference on Artificial Intelligence (ECAI24)*, pages 2362–2369. IOS Press, 2024. 2
- [3] E. Botoeva, P. Kouvaros, J. Kronqvist, A. Lomuscio, and R. Misener. Efficient verification of neural networks via dependency analysis. In *Proceedings of the 34th AAAI Conference on Artificial Intelligence (AAAI20)*, pages 3291–3299. AAAI Press, 2020. 2
- [4] B. Brückner and A. Lomuscio. Verification of neural networks against convolutional perturbations via parameterised kernels. In *Proceedings of the 39th AAAI Conference on Artificial Intelligence (AAAI25)*, pages 27215–27223. AAAI Press, 2025. 2, 3, 4, 7, 1
- [5] B. Brückner, A. J. Mercado, Y. Zhang, P. Kouvaros, and A. Lomuscio. Ioucert: Robustness verification for anchor-based object detectors. *arXiv preprint 2603.03043*, 2026. 1
- [6] N. Carlini and D. Wagner. Towards evaluating the robustness of neural networks. In *IEEE Symposium on Security and Privacy (SP’17)*, pages 39–57. IEEE Computer Society, 2017. 1
- [7] A. De Palma, R. Bunel, A. Desmaison, K. Dvijotham, P. Kohli, P. Torr, and M. P. Kumar. Improved branch and bound for neural network verification via lagrangian decomposition. *arXiv preprint arXiv:2104.06718*, 2021. 2
- [8] A. De Palma, R. Bunel, K. Dvijotham, M. P. Kumar, and R. Stanforth. IBP regularization for verified adversarial robustness via branch-and-bound. *arXiv preprint arXiv:2206.14772*, 2022. 2, 5
- [9] A. De Palma, R. Bunel, K. Dvijotham, M. P. Kumar, R. Stanforth, and A. Lomuscio. Expressive losses for verified robustness via convex combinations. In *Proceedings of the 12th International Conference on Learning Representations (ICLR24)*. Openreview.net, 2024. 1, 2, 3, 6, 7
- [10] N. Cohen and M. Ducoffe. R. Boumazouza, C. Gabrea, C. Pagetti, X. Pucel, and A. Galametz. Verifiou – robustness of object detection to perturbations. In *Proceedings of the 44th Digital Avionics Systems Conference (DASC25)*, pages 1–10, 2025. 1
- [11] K. Eykholt, I. Evtimov, E. Fernandes, B. Li, A. Rahmati, C. Xiao, A. Prakash, T. Kohno, and D. Song. Robust physical-world attacks on deep learning visual classification. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR18)*, pages 1625–1634, 2018. 1
- [12] C. Ferrari, M.N. Mueller, N. Jovanović, and M. Vechev. Complete verification via multi-neuron relaxation guided branch-and-bound. In *Proceedings of the 10th International Conference on Learning Representations (ICLR22)*. Openreview.net, 2022. 1
- [13] I. Goodfellow, J. Shlens, and C. Szegedy. Explaining and harnessing adversarial examples. In *Proceedings of the 3rd International Conference on Learning Representations (ICLR15)*, 2015. 2
- [14] S. Gawal, K. Dvijotham, R. Stanforth, R. Bunel, C. Qin, J. Uesato, R. Arandjelovic, T. Mann, and P. Kohli. On the effectiveness of interval bound propagation for training verifiably robust models. *arXiv preprint arXiv:1810.12715*, 2019. 2, 3, 5
- [15] Q. Guo, F. Juefei-Xu, X. Xie, L. Ma, J. Wang, B. Yu, W. Feng, and Y. Liu. Watch out! motion is blurring the vision of your deep neural networks. In *Proceedings of the 34th Annual Conference on Neural Information Processing Systems (NeurIPS20)*, pages 975–985. Curran Associates, Inc., 2020. 1, 2, 3
- [16] X. Guo, Z. Zhou, Y. Zhang, G. Katz, and M. Zhang. Ocrob: Efficient smt-based occlusion robustness verification of deep neural networks. In *Proceedings of the 29th International Conference on Tools and Algorithms for the Construction and Analysis of Systems (TACAS23)*, pages 208–226. Springer, 2023. 1
- [17] H. Hanspal and A. Lomuscio. Efficient verification of neural networks against lvm-based specifications. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR23)*. IEEE, 2023. 2
- [18] P. Henriksen and A. Lomuscio. Efficient neural network verification via adaptive refinement and adversarial search. In *Proceedings of the 24th European Conference on Artificial Intelligence (ECAI20)*, pages 2513–2520. IOS Press, 2020. 5
- [19] P. Henriksen and A. Lomuscio. DEEPSPLIT: an efficient splitting method for neural network verification via indirect effect analysis. In *Proceedings of the 30th International Joint Conference on Artificial Intelligence (IJCAI21)*, pages 2549–2555. ijcai.org, 2021. 2, 5
- [20] P. Henriksen and A. Lomuscio. Robust training of neural networks against bias field perturbations. In *Proceedings of the 37th AAAI Conference on Artificial Intelligence (AAAI23)*, pages 14865–14873. AAAI Press, 2023. 2, 3, 4
- [21] P. Henriksen, K. Hammernik, D. Rueckert, and A. Lomuscio. Bias field robustness verification of large neural image classifiers. In *Proceedings of the 32nd British Machine Vision Conference (BMVC21)*. BMVA Press, 2021. 2
- [22] S. Ioffe and C. Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *Proceedings of the 32nd International Conference on Machine Learning (ICML15)*, pages 448–456. PMLR, 2015. 3
- [23] G. Katz, C. Barrett, D. Dill, K. Julian, and M. Kochenderfer. Reluplex: An efficient SMT solver for verifying deep

- neural networks. In *Proceedings of the 29th International Conference on Computer Aided Verification (CAV17)*, pages 97–117. Springer, 2017. 1
- [24] G. Katz, D. Huang, D. Ibeling, K. Julian, C. Lazarus, R. Lim, P. Shah, S. Thakoor, H. Wu, A. Zeljic, D. Dill, M. Kochenderfer, and C. Barrett. The marabou framework for verification and analysis of deep neural networks. In *Proceedings of the 31st International Conference on Computer Aided Verification (CAV19)*, pages 443–452, 2019. 2
- [25] P. Kern, M.K. Büning, and C. Sinz. Optimized symbolic interval propagation for neural network verification. In *1st Workshop on Formal Verification of Machine Learning (WFVML22)*, 2022. 2
- [26] P. Kouvaros and A. Lomuscio. Formal verification of cnn-based perception systems. *arXiv preprint arXiv:1811.11373*, 2018. 1, 2, 4
- [27] P. Kouvaros, B. Brückner, P. Henriksen, and A. Lomuscio. Dynamic back-substitution in bound-propagation-based neural network verification. In *Proceedings of the 39th AAAI Conference on Artificial Intelligence (AAAI25)*, pages 27383–27391. AAAI Press, 2025. 1, 2
- [28] A. Krizhevsky, V. Nair, and G. Hinton. The cifar-10 dataset. <http://www.cs.toronto.edu/kriz/cifar.html>, 2014. 2
- [29] J. Lan, B. Brückner, and A. Lomuscio. A semidefinite relaxation based branch-and-bound method for tight neural network verification. In *Proceedings of the 37th AAAI Conference on Artificial Intelligence (AAAI23)*, pages 14946–14954. AAAI Press, 2023. 2
- [30] L. Li, X. Qi, T. Xie, and B. Li. Sok: Certified robustness for deep neural networks. *arXiv preprint 2009.04131*, 2020. 1
- [31] A. Liu, X. Liu, J. Fan, Y. Ma, A. Zhang, H. Xie, and D. Tao. Perceptual-sensitive gan for generating adversarial patches. In *Proceedings of the 33rd AAAI Conference on Artificial Intelligence (AAAI19)*, pages 1028–1035. AAAI Press, 2019. 1
- [32] C. Liu, T. Arnon, C. Lazarus, C. Strong, C. Barrett, and M. Kochenderfer. Algorithms for verifying deep neural networks. *Foundations and Trends® in Optimization*, 3-4:244–404, 2020. 1
- [33] A. Madry, A. Makelov, L. Schmidt, D. Tsipras, and A. Vladu. Towards deep learning models resistant to adversarial attacks. In *Proceedings of the 6th International Conference on Learning Representations (ICLR18)*. OpenReview.net, 2018. 2, 3
- [34] Y. Mao, M. Müller, M. Fischer, and M. Vechev. Connecting certified and adversarial training. In *Proceedings of the 37th Annual Conference on Neural Information Processing Systems (NeurIPS23)*, pages 73422–73440. Curran Associates, Inc., 2023. 2, 3
- [35] Y. Mao, S. Balauca, and M. Vechev. CTBENCH: A library and benchmark for certified training. *arXiv preprint arXiv:2406.04848*, 2024. 1, 5, 7
- [36] Y. Mao, M. N. Mueller, M. Fischer, and M. Vechev. Understanding certified training with interval bound propagation. In *Proceedings of the 12th International Conference on Learning Representations (ICLR24)*. Openreview.net, 2024. 7
- [37] M. Mirman, T. Gehr, and M. Vechev. Differentiable abstract interpretation for provably robust neural networks. In *Proceedings of the 35th International Conference on Machine Learning (ICML18)*, pages 3575–3583. PMLR, 2018. 3
- [38] M. Mirman, A. Hägele, P. Bielik, T. Gehr, and M. Vechev. Robustness certification with generative models. In *Proceedings of the 42nd ACM SIGPLAN International Conference on Programming Language Design and Implementation (PLDI21)*, page 1141–1154. Association for Computing Machinery, 2021. 2
- [39] J. Mohapatra, T.-W. Weng, P.-Y. Chen, S. Liu, and L. Daniel. Towards verifying robustness of neural networks against a family of semantic perturbations. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR20)*, pages 241–249. IEEE, 2020. 2, 4
- [40] C. Müller, F. Serre, G. Singh, M. Püschel, and M. T. Vechev. Scaling polyhedral neural network verification on gpus. In *Proceedings of the 3rd Conference on Machine Learning and Systems (MLSys20)*. mlsys.org, 2020. 7
- [41] M. N. Müller, F. Eckert, M. Fischer, and M.T. Vechev. Certified training: Small boxes are all you need. In *Proceedings of the 11th International Conference on Learning Representations (ICLR23)*. OpenReview.net, 2023. 1, 2, 3
- [42] M. Mziou-Sallami and F. Adjed. Towards a certification of deep image classifiers against convolutional attacks. In *Proceedings of the 14th International Conference on Agents and Artificial Intelligence (ICAART22)*, pages 419–428, 2022. 2, 3, 4
- [43] T. Oktay, H. Celik, and I. Turkmen. Maximizing autonomous performance of fixed-wing unmanned aerial vehicle to reduce motion blur in taken images. *Journal of Systems and Control Engineering*, 232(7):857–868, 2018. 1
- [44] N. Papernot, P. McDaniel, S. Jha, M. Fredrikson, Z. Celik, and A. Swami. The limitations of deep learning in adversarial settings. In *Proceedings of the IEEE European Symposium on Security and Privacy (EuroS&P16)*, pages 372–387. IEEE, 2016. 1
- [45] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, A. Desmaison, A. Kopf, E. Yang, Z. DeVito, M. Raison, A. Tejani, S. Chilamkurthy, B. Steiner, L. Fang, J. Bai, and S. Chintala. Pytorch: An imperative style, high-performance deep learning library. In *Proceedings of the 33rd Annual Conference on Neural Information Processing Systems (NeurIPS19)*, pages 8024–8035. Curran Associates, Inc., 2019. 5
- [46] C. Paterson, H. Wu, J. Grese, R. Calinescu, C.S. Păsăreanu, and C. Barrett. Deepcert: Verification of contextually relevant robustness for neural network image classifiers. In *Proceedings of the 24th International Conference on Computer Safety, Reliability, and Security (SAFECOMP21)*, pages 3–17. Springer, 2021. 2
- [47] M. Sayed and G. Brostow. Improved handling of motion blur in online object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR21)*, pages 1706–1716, 2021. 1
- [48] Z. Shi, H. Zhang, K.-W. Chang, M. Huang, and C.-J. Hsieh. Robustness verification for transformers. In *Proceedings of*

- the 8th International Conference on Learning Representations (ICLR20). OpenReview.net, 2020. [5](#)
- [49] Z. Shi, Y. Wang, H. Zhang, J. Yi, and C. Hsieh. Fast certified robust training with short warmup. In *Proceedings of the 35th Annual Conference on Neural Information Processing Systems (NeurIPS21)*, pages 18335–18349, 2021. [2](#), [3](#), [5](#), [6](#), [7](#), [4](#)
- [50] Z. Shi, Q. Jin, J.Z. Kolter, S. Jana, C.-J. Hsieh, and H. Zhang. Formal verification for neural networks with general nonlinearities via branch-and-bound. *Proceedings of the 2nd Workshop on Formal Verification of Machine Learning (WFVML23)*, 2024. [2](#)
- [51] G. Singh, T. Gehr, M. Mirman, M. Püschel, and M. Vechev. Fast and effective robustness certification. In *Proceedings of the 32nd Annual Conference on Neural Information Processing Systems (NeurIPS18)*, pages 10802–10813, 2018. [1](#), [2](#)
- [52] G. Singh, T. Gehr, M. Püschel, and M. Vechev. An abstract domain for certifying neural networks. *Proceedings of the ACM on Programming Languages*, 3(POPL):41, 2019. [1](#), [2](#)
- [53] C. Szegedy, W. Zaremba, I. Sutskever, J. Bruna, D. Erhan, I. Goodfellow, and R. Fergus. Intriguing properties of neural networks. In *Proceedings of the 2nd International Conference on Learning Representations (ICLR14)*, 2014. [1](#)
- [54] R. Szeliski. *Computer Vision: Algorithms and Applications*. Springer, 2022. [3](#)
- [55] J. Tu, M. Ren, S. Manivasagam, M. Liang, B. Yang, R. Du, F. Cheng, and R. Urtasun. Physically realizable adversarial examples for lidar object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR20)*, pages 13713–13722, 2020. [1](#)
- [56] T. Waite, A. Robey, H. Hassani, G. J. Pappas, and R. Ivanov. Data-driven modeling and verification of perception-based autonomous systems. *arXiv preprint arXiv:2312.06848*, 2023. [2](#)
- [57] S. Wang, K. Pei, J. Whitehouse, J. Yang, and S. Jana. Efficient formal safety analysis of neural networks. In *Proceedings of the 32nd Annual Conference on Neural Information Processing Systems (NeurIPS18)*, pages 6367–6377. Curran Associates, Inc., 2018. [1](#), [2](#)
- [58] S. Wang, K. Pei, J. Whitehouse, J. Yang, and S. Jana. Formal security analysis of neural networks using symbolic intervals. In *Proceedings of the 27th USENIX Security Symposium (USENIX18)*, 2018. [2](#)
- [59] S. Wang, H. Zhang, K. Xu, X. Lin, S. Jana, C. Hsieh, and J. Kolter. Beta-crown: Efficient bound propagation with per-neuron split constraints for neural network robustness verification. In *Proceedings of the 34th Annual Conference on Neural Information Processing Systems (NeurIPS21)*, pages 29909–29921. Curran Associates, Inc., 2021. [1](#), [2](#)
- [60] E. Wong and J. Kolter. Provable defenses against adversarial examples via the convex outer adversarial polytope. In *Proceedings of the 35th International Conference on Machine Learning (ICML18)*, pages 5286–5295, 2018. [2](#)
- [61] H. Wu, T. Tagomori, A. Robey, F. Yang, N. Matni, G. Pappas, H. Hassani, C. Pasareanu, and C. Barrett. Toward certified robustness against real-world distribution shifts. In *Proceedings of the IEEE Conference on Secure and Trustworthy Machine Learning (SaTML23)*, pages 537–553. IEEE, 2023. [2](#)
- [62] K. Xiao, V. Tjeng, N. Shafiullah, and A. Madry. Training for faster adversarial robustness verification via inducing relu stability. In *Proceedings of the 7th International Conference on Learning Representations (ICLR19)*, pages 1–20. OpenReview.net, 2019. [2](#)
- [63] K. Xu, H. Zhang, S. Wang, Y. Wang, S. Jana, X. Lin, and C.-J. Hsieh. Fast and complete: Enabling complete neural network verification with rapid and massively parallel incomplete verifiers. In *Proceedings of the 9th International Conference on Learning Representations (ICLR21)*. OpenReview.net, 2021. [1](#), [2](#)
- [64] H. Zhang, T. Weng, P. Chen, C. Hsieh, and L. Daniel. Efficient neural network robustness certification with general activation functions. In *Proceedings of the 32nd Annual Conference on Neural Information Processing Systems (NeurIPS18)*, pages 4944–4953, 2018. [2](#)
- [65] H. Zhang, H. Chen, C. Xiao, S. Goyal, R. Stanforth, B. Li, D. Boning, and C. Hsieh. Towards stable and efficient training of verifiably robust neural networks. *arXiv preprint arXiv:1906.06316*, 2019. [3](#)
- [66] H. Zhang, Y. Yu, J. Jiao, E. Xing, L. El Ghaoui, and M. Jordan. Theoretically principled trade-off between robustness and accuracy. In *Proceedings of the 36th International Conference on Machine Learning (ICML19)*, pages 7472–7482, 2019. [7](#)
- [67] H. Zhang, S. Wang, K. Xu, L. Li, B. Li, S. Jana, C.-J. Hsieh, and J. Z. Kolter. General cutting planes for bound-propagation-based neural network verification. In *Proceedings of the 36th Conference on Neural Information Processing Systems (NeurIPS22)*, pages 1656–1670. Curran Associates, Inc., 2022. [1](#)
- [68] D. Zhou, C. Brix, G. A. Hanasusanto, and H. Zhang. Scalable neural network verification with branch-and-bound inferred cutting planes. In *Proceedings of the 38th Annual Conference on Neural Information Processing Systems (NeurIPS24)*, 2024. [1](#)

Certified Training for Convolutional Perturbations

Supplementary Material

A. Further Details on our Method

A.1. Motion Blur Example

To illustrate the perturbation encoding in the layers that are prepended to a neural network, we provide an example of a motion blur perturbation being applied to a small image in the following:

Example 1. For the sample calculations assume that an image $\mathbf{J} \in \mathbb{R}^{4 \times 4}$ and a motion blur kernel $\mathbf{M} \in \mathbb{R}^{3 \times 3}$ simulating blurring along the angle $\phi = 0^\circ$ are given as

$$\mathbf{M} = \begin{pmatrix} 0 & \frac{1}{3} & 0 \\ 0 & \frac{1}{3} & 0 \\ 0 & \frac{1}{3} & 0 \end{pmatrix}, \quad \mathbf{J} = \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & 3 & 6 & 0 \\ 0 & 3 & 6 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad (12)$$

For the sake of simplicity we allow pixel values outside $[0, 1]$ for this example only. Using the information that the parameterised kernel $\mathbf{G}_z$ must be equal to the identity kernel for $z = 0$ and equal to $\mathbf{M}$ for $z = 1$, the parameterisation is computed as

$$\mathbf{M}_z = \underbrace{\begin{pmatrix} 0 & \frac{1}{3} & 0 \\ 0 & -\frac{2}{3} & 0 \\ 0 & \frac{1}{3} & 0 \end{pmatrix}}_{\mathbf{A}} z + \underbrace{\begin{pmatrix} 0 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \end{pmatrix}}_{\mathbf{B}} \quad (13)$$

The result of the convolution of the batched image with the coefficient and bias kernel is

$$\mathbf{R}_A = \begin{pmatrix} 0 & 2 & 4 & 0 \\ 0 & -1 & -2 & 0 \\ 0 & -1 & -2 & 0 \\ 0 & 2 & 4 & 0 \end{pmatrix} \quad (14)$$

$$\mathbf{R}_B = \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & 3 & 6 & 0 \\ 0 & 3 & 6 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad (15)$$

As an example, for $z = 0$ it is obvious that

$$\mathbf{J}_{\text{perturbed}} = \mathbf{R}_A \cdot 0 + \mathbf{R}_B = \mathbf{R}_B = \mathbf{J} \quad (16)$$

To obtain a slightly blurred image, set $z = 0.5$ and calculate the result as

$$\mathbf{J}_{\text{perturbed}} = \mathbf{R}_A \cdot 0.5 + \mathbf{R}_B \quad (17)$$

$$= \begin{pmatrix} 0 & 1 & 2 & 0 \\ 0 & 2.5 & 5 & 0 \\ 0 & 2.5 & 5 & 0 \\ 0 & 1 & 2 & 0 \end{pmatrix} \quad (18)$$

One can see that the result is an image which has been blurred along the $\phi = 0^\circ$ axis.

A.2. Perturbation Batching Example

To demonstrate the batched operations computed by our custom perturbation encoding, we provide some sample calculations detailing the maths behind them in the following.

Example 2. Assume that two result tensors $\mathbf{R}_A, \mathbf{R}_B \in \mathbb{R}^{2 \times 1 \times 2 \times 2}$ are given as

$$\mathbf{R}_A[1, 1, :, :] = \begin{pmatrix} 0 & 3 \\ 2 & 1 \end{pmatrix}, \quad \mathbf{R}_A[2, 1, :, :] = \begin{pmatrix} 1 & 0 \\ 3 & 2 \end{pmatrix} \quad (19)$$

$$\mathbf{R}_B[1, 1, :, :] = \begin{pmatrix} 1 & 1 \\ 1 & 1 \end{pmatrix}, \quad \mathbf{R}_B[2, 1, :, :] = \begin{pmatrix} 2 & 2 \\ 2 & 2 \end{pmatrix} \quad (20)$$

We use small tensors here due to space constraints. However, all of the following computations can equally be run for larger matrices such as the ones from Example A.1. In line with equation 5 and 6 we calculate

$$\mathbf{R}_A[:, :, 1]' = \begin{pmatrix} 0 & 3 & 2 & 1 \\ 1 & 0 & 3 & 2 \end{pmatrix}, \quad (21)$$

$$\mathbf{R}_B[:, :, 1]' = \begin{pmatrix} 1 & 1 & 1 & 1 \\ 2 & 2 & 2 & 2 \end{pmatrix}, \quad (22)$$

Choosing $\tilde{\mathbf{z}} = (0.5 \ 1)^T$ as the perturbation vector, the batched matrix multiplication (see equation 7) returns

$$\mathbf{I}'_{\text{perturbed}} = \begin{pmatrix} 0 & 1.5 & 1 & 0.5 \\ 1 & 0 & 3 & 2 \end{pmatrix} + \begin{pmatrix} 1 & 1 & 1 & 1 \\ 2 & 2 & 2 & 2 \end{pmatrix} \quad (23)$$

$$= \begin{pmatrix} 1 & 2.5 & 2 & 1.5 \\ 3 & 2 & 5 & 4 \end{pmatrix} \quad (24)$$

Using Equation 8, the final output of the operation in the correct shape is $\mathbf{I}_{\text{perturbed}}$ where

$$\mathbf{I}_{\text{perturbed}}[1, 1, :, :] = \begin{pmatrix} 1 & 2.5 \\ 2 & 1.5 \end{pmatrix} \quad (25)$$

$$\mathbf{I}_{\text{perturbed}}[2, 1, :, :] = \begin{pmatrix} 3 & 2 \\ 5 & 4 \end{pmatrix} \quad (26)$$

A.3. Perturbation Kernels Used in This Work

Robust Training is performed for box blur, sharpen and motion blur perturbations with perturbation kernels in different sizes s . The details of the parameterisations that are used in defining those kernels are provided in the following sections. All of the parameterisations are defined as $\mathbf{K} = \mathbf{A} \cdot \mathbf{z} + \mathbf{B}$ with $\mathbf{K}, \mathbf{A}, \mathbf{B} \in \mathbb{R}^{s \times s}$ [4]. By inspecting

the $z = 0$ case of this parameterisation, it is clear that for a kernel K of size s , it always holds that B , i.e. the bias matrix, is the s -dimensional identity matrix. In the following we therefore only present the coefficient matrices A we consider.

A.4. Box Blur

Kernel Size $s = 3$

$$A = \begin{pmatrix} 0.11 & 0.11 & 0.11 \\ 0.11 & -0.89 & 0.11 \\ 0.11 & 0.11 & 0.11 \end{pmatrix} \quad (27)$$

Kernel Size $s = 5$

$$A = \begin{pmatrix} 0.04 & 0.04 & 0.04 & 0.04 & 0.04 \\ 0.04 & 0.04 & 0.04 & 0.04 & 0.04 \\ 0.04 & 0.04 & -0.96 & 0.04 & 0.04 \\ 0.04 & 0.04 & 0.04 & 0.04 & 0.04 \\ 0.04 & 0.04 & 0.04 & 0.04 & 0.04 \end{pmatrix} \quad (28)$$

Kernel Size $s = 7$

$$A = \begin{pmatrix} 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & -0.98 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \\ 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 & 0.02 \end{pmatrix} \quad (29)$$

A.5. Sharpen

Kernel Size $s = 3$

$$A = \begin{pmatrix} 0.00 & -0.25 & 0.00 \\ -0.25 & 1.00 & -0.25 \\ 0.00 & -0.25 & 0.00 \end{pmatrix} \quad (30)$$

Kernel Size $s = 5$

$$A = \begin{pmatrix} 0.00 & 0.00 & -0.08 & 0.00 & 0.00 \\ 0.00 & -0.08 & -0.08 & -0.08 & 0.00 \\ -0.08 & -0.08 & 1.00 & -0.08 & -0.08 \\ 0.00 & -0.08 & -0.08 & -0.08 & 0.00 \\ 0.00 & 0.00 & -0.08 & 0.00 & 0.00 \end{pmatrix} \quad (31)$$

Kernel Size $s = 7$

$$A = \begin{pmatrix} 0.00 & 0.00 & 0.00 & -0.04 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & -0.04 & -0.04 & -0.04 & 0.00 & 0.00 \\ 0.00 & -0.04 & -0.04 & -0.04 & -0.04 & -0.04 & 0.00 \\ -0.04 & -0.04 & -0.04 & 1.00 & -0.04 & -0.04 & -0.04 \\ 0.00 & -0.04 & -0.04 & -0.04 & -0.04 & -0.04 & 0.00 \\ 0.00 & 0.00 & -0.04 & -0.04 & -0.04 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & -0.04 & 0.00 & 0.00 & 0.00 \end{pmatrix} \quad (32)$$

A.6. Motion Blur, $\phi = 0^\circ$

Kernel Size $s = 3$

$$A = \begin{pmatrix} 0.00 & 0.33 & 0.00 \\ 0.00 & -0.67 & 0.00 \\ 0.00 & 0.33 & 0.00 \end{pmatrix} \quad (33)$$

Kernel Size $s = 5$

$$A = \begin{pmatrix} 0.00 & 0.00 & 0.20 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.20 & 0.00 & 0.00 \\ 0.00 & 0.00 & -0.80 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.20 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.20 & 0.00 & 0.00 \end{pmatrix} \quad (34)$$

Kernel Size $s = 7$

$$A = \begin{pmatrix} 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & -0.86 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \\ 0.00 & 0.00 & 0.00 & 0.14 & 0.00 & 0.00 & 0.00 \end{pmatrix} \quad (35)$$

B. Further Details on the Experimental Setup and Results

We use the CIFAR10 dataset [28] which contains colour images of size 32×32 for our experimental evaluation. Images belong to one of ten different classes such as automobile, airplane or bird which are mutually exclusive. We conduct our training runs on the training dataset which contains 50,000 and then run our evaluation on the test dataset with its 10,000 test images. We calculate the mean and standard deviation of each channel on the training dataset and use those values to normalise both the training and test set images. To improve performance, we further employ random horizontal flipping and random cropping as done by other works in the field [9]. The architecture of the employed CNN7 network is shown in Table 3. Additional details on the parameters used for our training runs are provided in Table 4. The weight decay parameter was chosen after evaluating 10^{-3} , 5×10^{-4} , 10^{-4} for it and obtaining the best results in terms of standard accuracy for the value of 5×10^{-4} . We further use TinyImageNet, a downsampled and smaller version of ImageNet, for our experiments. This dataset contains 64×64 RGB images from 200 classes with the training set containing 100,000 samples while the test set contains a further 10,000 images. We similarly use normalisation and random horizontal flips and random cropping here as is standard practice in the literature. In line with usual practice, we further evaluate networks trained on TinyImageNet on the validation set. We also report the average time required for the training runs presented in Section 5 in Table 5. As expected and as is known in the literature, Certified Training with either SSIP or RSIP-SSIP requires additional time when compared to pure Adversarial Training. This is due to the cost of the bound computation which is incurred for every training batch. However, our experiments prove that, depending on the scenario at hand, this additional cost can be justified due to the superior robustness that networks trained using certified training exhibit compared to the adversarially trained ones.

Index	Layer Type	Parameters
1	Convolutional	Width: 64 Kernel Size: 3 Stride: 1 Padding: 1
2	BatchNorm + ReLU	-
3	Convolutional	Width: 64 Kernel Size: 3 Stride: 1 Padding: 1
4	BatchNorm + ReLU	-
5	Convolutional	Width: 128 Kernel Size: 3 Stride: 2 Padding: 1
6	BatchNorm + ReLU	-
7	Convolutional	Width: 128 Kernel Size: 3 Stride: 1 Padding: 1
8	BatchNorm + ReLU	-
9	Convolutional	Width: 128 Kernel Size: 3 Stride: 1 or 2 [†] Padding: 1
10	BatchNorm + ReLU	-
11	Linear	No. of Neurons: 512
12	BatchNorm + ReLU	-
13	Linear	No. of Neurons: 10

Table 3. The CNN7 network used throughout this work. [†] A stride of 1 is used for the architecture employed on CIFAR10 while a stride of 2 is used for TinyImageNet.

Parameter	Value
Warm-up epochs	80
Total epochs	160
Learning rate	1×10^{-5}
Learning rate scheduler	Cosine Annealing
Weight decay	5×10^{-4}
Batch size	128
Number of PGD Steps	8
PGD step size	0.25

Table 4. Additional parameters used throughout our training runs

C. Ablation Studies on CIFAR10

C.1. Ablation: Batch Normalisation

To check whether fully adding Batch Normalisation layers to the CNN7 architecture as suggested for IBP-based Cer-

Model	Dataset	Method	Average Runtime
CNN7	CIFAR10	PGD	6.50×10^3
		SSIP	2.29×10^4
		RSIP-SSIP	3.96×10^4
	TinyImageNet	PGD	4.84×10^4
		SSIP	1.10×10^5
ResNet18	CIFAR10	PGD	1.25×10^4
		SSIP	4.37×10^4

Table 5. Average runtimes for CNN7 and ResNet18 training on CIFAR10 and TinyImageNet. PGD denotes Adversarial Training, SSIP and RSIP-SSIP denote Certified Training based on the respective bounding method.

Perturbation	s	ϵ	STD	PGD	SSIP
Box Blur	3	0.2	1×10^{-4}	1×10^{-4}	1×10^{-3}
		0.6	1×10^{-4}	1×10^{-4}	1×10^{-3}
		1.0	1×10^{-4}	5×10^{-4}	1×10^{-4}
	5	0.2	1×10^{-4}	1×10^{-4}	1×10^{-4}
		0.6	1×10^{-4}	1×10^{-4}	5×10^{-4}
		1.0	1×10^{-4}	5×10^{-4}	5×10^{-4}
	7	0.2	1×10^{-4}	1×10^{-4}	5×10^{-4}
		0.6	1×10^{-4}	5×10^{-4}	5×10^{-4}
		1.0	1×10^{-4}	5×10^{-4}	5×10^{-4}
Sharpen	3	0.2	1×10^{-4}	1×10^{-4}	1×10^{-4}
		0.6	1×10^{-4}	5×10^{-4}	1×10^{-3}
		1.0	1×10^{-4}	1×10^{-4}	1×10^{-3}
	5	0.2	1×10^{-4}	1×10^{-4}	1×10^{-4}
		0.6	1×10^{-4}	1×10^{-4}	5×10^{-4}
		1.0	1×10^{-4}	1×10^{-4}	5×10^{-4}
	7	0.2	1×10^{-4}	1×10^{-4}	5×10^{-4}
		0.6	1×10^{-4}	1×10^{-4}	5×10^{-4}
		1.0	1×10^{-4}	1×10^{-4}	5×10^{-4}
Motion Blur	3	0.2	1×10^{-4}	1×10^{-4}	1×10^{-3}
		0.6	1×10^{-4}	5×10^{-4}	1×10^{-4}
		1.0	1×10^{-4}	1×10^{-4}	5×10^{-4}
	5	0.2	1×10^{-4}	5×10^{-4}	1×10^{-4}
		0.6	1×10^{-4}	1×10^{-4}	1×10^{-3}
		1.0	1×10^{-4}	1×10^{-4}	5×10^{-4}
	7	0.2	1×10^{-4}	5×10^{-4}	1×10^{-4}
		0.6	1×10^{-4}	1×10^{-4}	1×10^{-3}
		1.0	1×10^{-4}	5×10^{-4}	1×10^{-4}

Table 6. Weight decay values used for the best-performing run on ResNet18

tified Training by Shi et al. [49] is beneficial for training neural networks robust to convolutional perturbations, we conduct a small initial ablation study on CIFAR10. Box Blur perturbations with a kernel size of $s = 3$ and a strength

of $\epsilon = 0.2$ are considered as the noise model for this evaluation. We conduct training runs for multiple lengths of training schedules with the CNN7 network as shown in Table 3, but also test CNN7 with all batch normalisation layers removed and refer to it as CNN7*. We train the network using SSIP robust training and evaluate the standard as well as the robust accuracy computed by the SSIP bounds. The results are shown in Table 7. The 80/160 schedule outperforms all other schedules, although the differences in performance are small compared to some of them. We also investigate the benefit of longer training schedules again for stronger perturbations with $\epsilon = 1.0$. However, for this separate experiment, we also find that the 80/160 performs best. Comparing the performance of CNN7 and CNN7*, we find that CNN7 achieves strictly higher standard and robust accuracies than CNN7*. The differences in performance for the two models are already significant in terms of standard accuracy where we see an improvement in performance of at least 1% of CNN7 compared to CNN7*. In terms of robust accuracy, the advantage of CNN7 over CNN7* is even more pronounced with CNN7 reaching robust accuracies up to 3.5% higher than those for the model without batch normalisation. We conclude that batch normalisation layers are not only useful for Certified Training using IBP bounds, but also beneficial in our case where we use tighter symbolic bounds to construct our training loss.

Warm-up/Total epochs	Model	Standard Acc.	Robust Acc.
40/80	CNN7	86.80	79.44
	CNN7*	88.72	83.08
60/120	CNN7	87.28	80.60
	CNN7*	89.46	84.18
80/160	CNN7	88.00	81.5
	CNN7*	89.68	84.24
100/200	CNN7	87.06	80.68
	CNN7*	89.40	84.16
120/240	CNN7	87.64	80.54
	CNN7*	88.62	82.92

Table 7. Ablation Study on using CNN7 with versus without batch normalisation layers on CIFAR10. Networks are trained using SSIP robust training on box blur perturbations with $s = 3$, $\epsilon = 0.2$

C.2. Ablation: IBP Initialisation and Warm-Up Loss

Besides evaluating the use of batch normalisation layers for our Certified Training scenario, we also check whether the IBP initialisation and warm-up loss as introduced by Shi et al. [49] improve performance for the networks we train

on CIFAR10. To do so, we re-implement both of them and compare the standard and robust accuracy for networks without their proposed changes, with just IBP initialisation, with only the warm-up loss and with both IBP initialisation and warm-up loss added. The networks are trained using the SSIP loss with the test set robust accuracy computed using SIP bounds as well. The training runs are repeated for different kernel sizes $s \in \{5, 7\}$ and perturbation strengths $\epsilon \in \{0.2, 0.6, 1.0\}$ while considering box blur perturbations. The results obtained from these runs are visualised in Figure 3. It is easy to see that, irrespective of the perturbation strength and kernel size, using the IBP initialisation to initialise the network weights or the warm-up loss during the warm-up phase of the training process does not have a significant impact on the accuracy of the trained networks. This is true for both the standard and the robust accuracy. Due to these results, we do not use IBP initialisation or warm-up losses for our training runs discussed in Section 5.

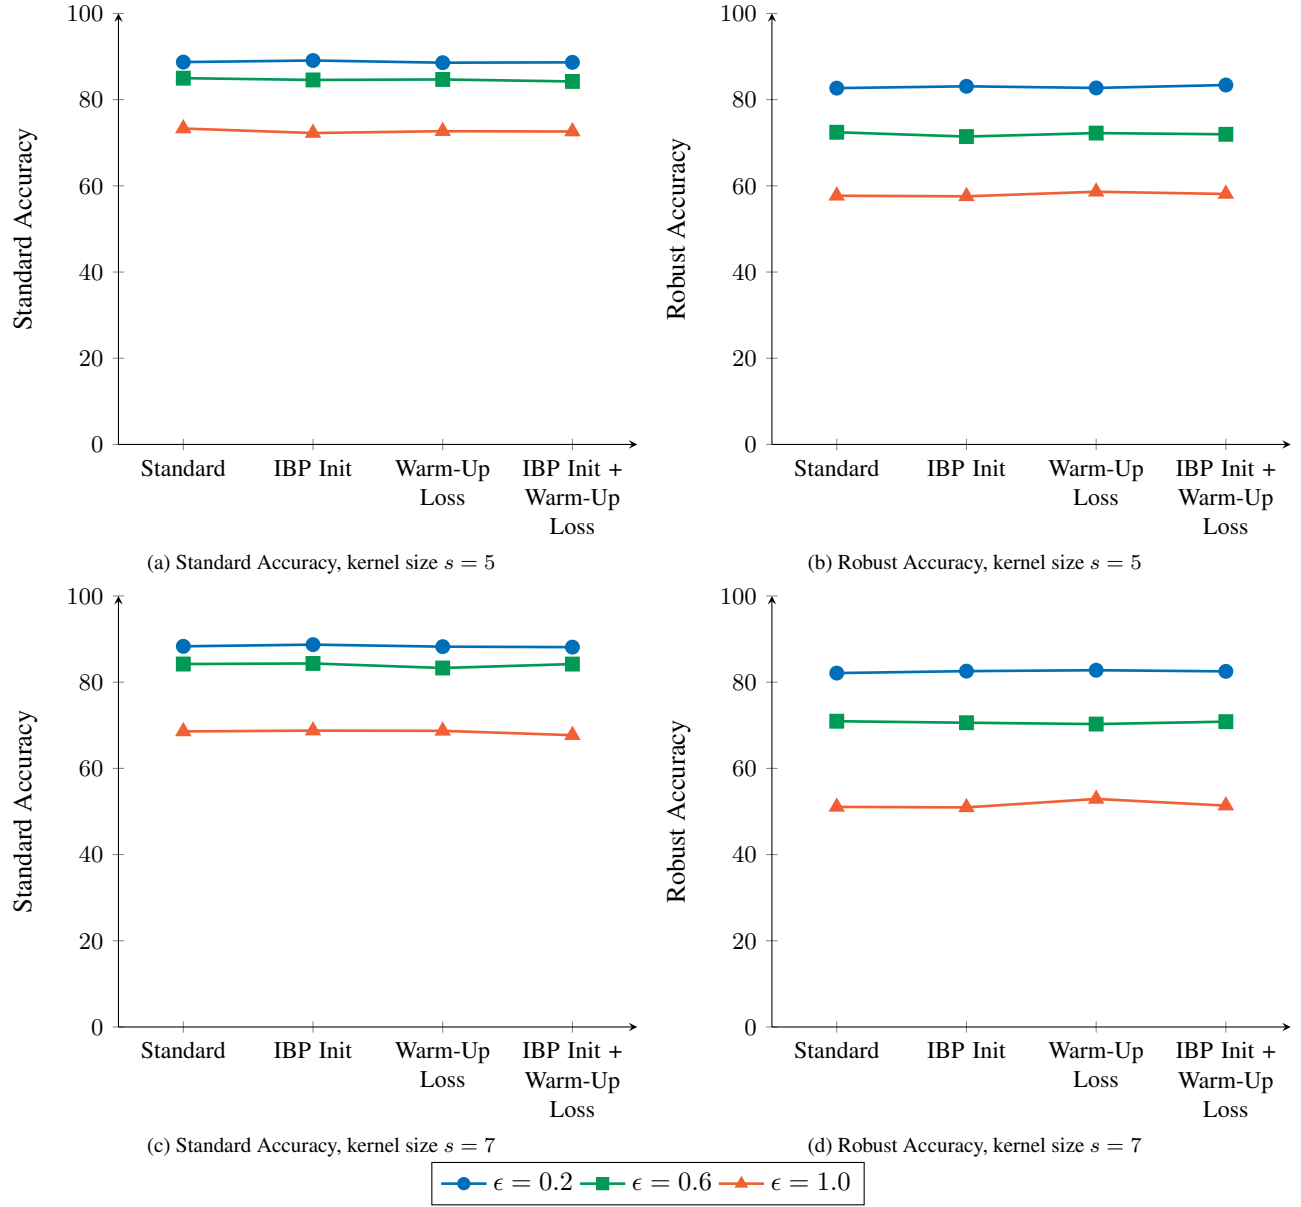


Figure 3. Ablation Study on using IBP initialisation and warm-up loss for Certified Training on convolutional perturbations.