

THREE-BODY SCATTERING FOR GENERATIVE MODELING

Peng Sun^{1,2}, Zhenglin Cheng^{1,2}, Deyuan Liu¹, Jun Xie^{1,2}, Xinyi Shang³, Tao Lin¹

¹Westlake University, ²Zhejiang University, ³University College London
sp12138sp@gmail.com

ABSTRACT

Modern generative models typically rely on an adversarial critic, a prescribed noise-to-data path, or an autoregressive factorization. Instead, we show that a proper distributional energy can induce sample-level motion and provide direct regression supervision for a one-step generator. Three-Body Scattering Modeling (TBSM) for generation turns the energy distance into a constant-size per-projectile interaction: each projectile is attracted toward one real source and repelled from one independently generated source. Conditioned on the projectile and its condition, its expectation equals the 2-Wasserstein gradient-flow velocity of $\frac{1}{2}D_E^2(P_\theta, Q)$. A batch of B frozen-target events yields $O(B)$ sample-level losses, each using one reference for its condition instead of the minibatch-wide all-pairs field used by methods such as Drifting Models. Tracking this conditional expectation online can reduce field noise. Using scattering in frozen image features, TBSM trains one-step generators on ImageNet-256, achieving FID = 2.23 with pixel-space PixelDiT-XL and FID = 1.63 with latent-space DiT-XL at NFE = 1. We provide a design map relating diffusion-related supervision, Drift-like dynamics, and GAN-like objectives. These results establish tracked scattering as a route to high-dimensional one-step generation. Code: <https://github.com/sp12138/TBSM>.



Figure 1: **Samples generated in one step by TBSM-trained models.** From left to right: MNIST, Fashion-MNIST, and CIFAR-10 (top to bottom); *pixel-space* ImageNet-1K samples; and text-to-image samples generated at NFE = 1 by a Qwen-Image-20B (Wu et al., 2025) model fine-tuned using only our TBSM (see App. C).

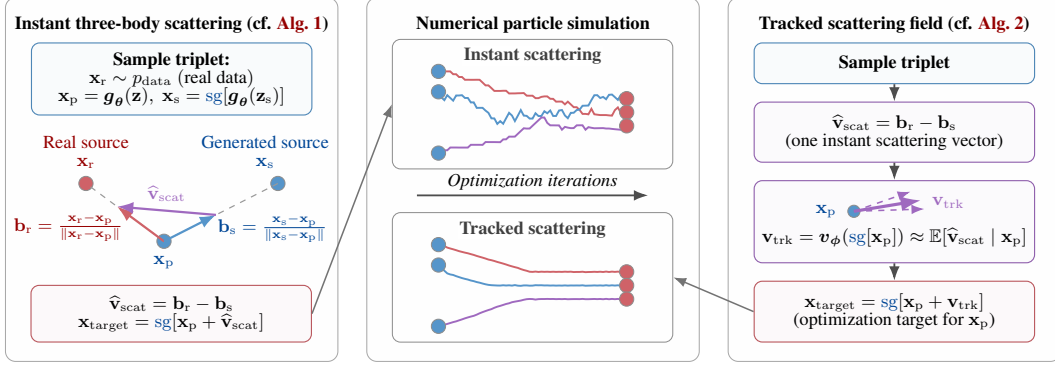


Figure 2: **Overview of TBSM.** Left: a real-generated-generated event yields a noisy scattering vector. Center: instant scattering drives convergence toward the target along noisy trajectories; tracking smooths the motion. Right: at the fully tracked energy-distance endpoint, an online tracker estimates the conditional expectation of the instant scattering vector at each projectile and supervises the generator. Center-panel red, blue, and purple curves show generated-particle paths from blue initial points; red dots mark targets; $\text{sg}[\cdot]$ denotes stop gradient.

1 INTRODUCTION

Generative models rely on adversarial comparison (Goodfellow et al., 2014; Brock et al., 2018), path-indexed diffusion, score, or flow supervision (Ho et al., 2020; Song et al., 2020b; Lipman et al., 2022), or autoregressive prediction (van den Oord et al., 2016; Tian et al., 2024; Sun et al., 2024). Direct one-step distribution-matching methods usually estimate supervision from minibatch fields, statistics, or variational objectives (Deng et al., 2026; Yang et al., 2026; Caucheteux et al., 2026).

Problem 1 . *Can a proper distribution-matching objective yield constant-size per-projectile stochastic interactions for high-dimensional one-step generation without teacher queries?*

We start from the exact population objective $\frac{1}{2}D_E^2(P_\theta, Q)$, a proper discrepancy whose first variation yields particle-wise descent vectors (Székely & Rizzo, 2013; Ambrosio et al., 2008).

Three-Body Scattering Modeling (TBSM) for generation treats a generated sample as a projectile attracted to one real source and repelled from an independent generated source; the latter supplies the model-model interaction absent from pure attraction. Averaging this interaction recovers the 2-Wasserstein descent velocity, while one triplet per projectile gives $O(B)$ detached-source targets for B projectiles. We call this supervision sample-level because each condition-specific loss requires only one paired real observation, naturally fitting text-image datasets with one image per caption rather than same-condition reference sets. This projectile-level update is the classical stochastic gradient behind linear-time distance-kernel MMD (Gretton et al., 2012), deployed with frozen targets and online tracking in high dimensions.

Following detached-target interfaces in direct distribution dynamics and representation matching (Deng et al., 2026; Yang et al., 2026), frozen-target regression makes the current-parameter gradient the generator-Jacobian pullback of the sampled vector up to loss scaling. An online tracker approximates the conditional expectation of this cheap but noisy vector. At the exact endpoint, oracle tracking preserves the population field and removes source-sampling variance; finite tracker error admits exact field- and update-space decompositions. Fig. 2 illustrates this construction.

The exact energy-distance field anchors the theory; experiments retain the regression loop in frozen representation spaces with smoothed bearings and sometimes reweighted intra-source interaction. The TBSM objective requires no path-model teacher queries, prescribed denoising target, adversarial discriminator, or ordered factorization. Training and inference use no classifier-free guidance or guidance-scale sweep; App. D contrasts pipelines that bake guidance into a training field or distillation target. Primary ImageNet runs use multi-step checkpoints only for initialization (App. B). Tab. 1 compares paradigms by sampling form, scaling evidence, and supervision granularity. At NFE = 1, PixelDiT-XL (pixel) and DiT-XL/2 (latent) reach FID = 2.23 and 1.63 on ImageNet-256; DiT-XL/4 reaches 1.92 on ImageNet-512. Fig. 1 adds small-scale and text-to-image samples.

Table 1: **Positioning of major generative modeling paradigms.** We compare direct single-pass sampling, the breadth of empirical scaling evidence, and the granularity of generator supervision.

Paradigm / representative work	Direct single-pass sampling?	Scaling evidence?	Generator-supervision granularity
GANs (Goodfellow et al., 2014; Brock et al., 2018; Sauer et al., 2022; Kang et al., 2023)	Yes direct single-pass generation	Mixed several large-scale successes	Per-sample signal from a learned critic
Diffusion, score, and flow models (Ho et al., 2020; Song et al., 2020b; Lipman et al., 2022; Ma et al., 2024)	No iterative path-based sampling	Strong extensive evidence at large scale	Per-sample denoising, score, or velocity target
Autoregressive models (van den Oord et al., 2016; Tian et al., 2024; Sun et al., 2024)	No iterative structured decoding	Strong extensive evidence at large scale	Per-token predictive likelihood target
One-step or few-step diffusion acceleration (Song et al., 2023; Frans et al., 2024; Geng et al., 2025; Yin et al., 2024b)	Method-dependent one or a few generator evaluations	Growing demonstrated on large image models	Method-dependent teacher, consistency, or auxiliary target
Direct distribution dynamics and distributional losses (Deng et al., 2026; Yang et al., 2026; Caucheteux et al., 2026)	Yes direct single-pass generation	Growing recent ImageNet-scale results	Batch-estimated fields, statistics, or objectives

Under an explicit slope condition, sufficiently small relative tracker excess risk preserves exact full-space energy-distance convergence. Stronger parameter-space assumptions yield expected finite-generator convergence. Finite-error bounds quantify deployed surrogates and smoothing, while representation-space guarantees concern only projected distributions. These results do not establish convergence for general neural-network training. Our contributions are:

- (a) **High-dimensional three-body scattering.** We turn energy-distance motion into constant-size frozen-target supervision for high-dimensional one-step generators with pixel or latent outputs using frozen image-representation fields.
- (b) **Online tracked scattering.** We cast tracking as an online conditional-expectation projection and derive exact field- and update-space error decompositions, finite-error stationarity, and energy-distance convergence under explicit assumptions; matched-update corners favor tracked over instant scattering.
- (c) **An interpretable design map.** We connect TBSM to Drift-like dynamics, a path-regularized GAN-like displacement analogue, and diffusion-related supervision via input and target changes.

2 METHODOLOGY

2.1 DISTRIBUTIONAL OBJECTIVE AND STOCHASTIC OPTIMIZATION

Population objective. Let $Q(\cdot | \mathbf{c})$ be the real probability law on $\mathbb{R}^d$ and let $\mathbf{g}_\theta(\mathbf{z}, \mathbf{c})$ be a conditional generator with $\mathbf{z} \sim p(\mathbf{z})$ and optional condition $\mathbf{c}$. For each condition, the generator induces the probability law $P_\theta(\cdot | \mathbf{c}) = (\mathbf{g}_\theta(\cdot, \mathbf{c}))_{\#} p(\mathbf{z})$; in the unconditional case we write these laws as P_θ and Q . We use $\mathbf{x}$ for a generic spatial argument of a potential or vector field and reserve $\mathbf{x}_p$ for a sampled generated projectile in a stochastic three-body event. The learning goal is condition-wise distribution matching:

$$\mathcal{F}(\theta) = \mathbb{E}_{\mathbf{c} \sim p_{\text{data}}(\mathbf{c})} \left[\frac{1}{2} D_E^2(P_\theta(\cdot | \mathbf{c}), Q(\cdot | \mathbf{c})) \right]. \quad (1)$$

The unconditional case is recovered by dropping $\mathbf{c}$. For finite paired datasets with one observation per condition, $Q(\cdot | \mathbf{c})$ is a population object rather than the literal empirical distribution for that condition. We use the squared energy distance as the population discrepancy:

$$D_E^2(P_\theta, Q) = 2\mathbb{E}_{\mathbf{x}_p \sim P_\theta, \mathbf{x}_r \sim Q} [\|\mathbf{x}_p - \mathbf{x}_r\|] - \mathbb{E}_{\mathbf{x}_p, \mathbf{x}_s \sim P_\theta} [\|\mathbf{x}_p - \mathbf{x}_s\|] - \mathbb{E}_{\mathbf{x}_r, \mathbf{x}'_r \sim Q} [\|\mathbf{x}_r - \mathbf{x}'_r\|]. \quad (2)$$

Euclidean space is of strong negative type, so $D_E^2(P_\theta, Q) \geq 0$ and equality holds exactly when $P_\theta = Q$ under finite first moments. Equivalently, $\frac{1}{2} D_E^2$ is a squared distance-kernel MMD; App. D.5 states its precise relation to the stochastic update below.

Algorithm 1 Three-Body Scattering Regression for Simple One-Step Generator Training

- 1: Initialize generator parameters θ .
 - 2: **repeat**
 - 3: Sample real source-condition pairs $(\mathbf{x}_r, \mathbf{c})$ from dataset.
 - 4: Sample noise $\mathbf{z}, \mathbf{z}_s \sim p(\mathbf{z})$, and generate $\mathbf{x}_p = g_\theta(\mathbf{z}, \mathbf{c})$ and $\mathbf{x}_s = \text{sg}[g_\theta(\mathbf{z}_s, \mathbf{c})]$.
 - 5: Compute inter-source bearing: $\mathbf{b}_r = (\mathbf{x}_r - \mathbf{x}_p) / \|\mathbf{x}_r - \mathbf{x}_p\|$.
 - 6: Compute intra-source bearing: $\mathbf{b}_s = (\mathbf{x}_s - \mathbf{x}_p) / \|\mathbf{x}_s - \mathbf{x}_p\|$.
 - 7: Update θ by descending $\|\mathbf{x}_p - \text{sg}[\mathbf{x}_p + \mathbf{b}_r - \mathbf{b}_s]\|_2^2$.
 - 8: **until** convergence
-

Population vector field. For a fixed condition, suppress $\mathbf{c}$ and write $\mathcal{F}(P_\theta) = \frac{1}{2}D_E^2(P_\theta, Q)$. Ignoring the real-real constant, a representative of its first variation, defined up to an additive constant, is

$$\frac{\delta \mathcal{F}}{\delta P_\theta}(\mathbf{x}) = \mathbb{E}_{\mathbf{x}_r \sim Q, \mathbf{x}_s \sim P_\theta} [\|\mathbf{x} - \mathbf{x}_r\| - \|\mathbf{x} - \mathbf{x}_s\|]. \quad (3)$$

The coefficient of the generated-source term is one because the model-model term in (2) depends on P_θ through both arguments; the symmetric variation cancels the factor 1/2 in the definition of $\mathcal{F}$. The 2-Wasserstein negative-gradient flow of a functional $\mathcal{F}(P)$ has velocity $\mathbf{v}(\mathbf{x}) = -\nabla_{\mathbf{x}} \frac{\delta \mathcal{F}}{\delta P}(\mathbf{x})$. Applying this identity to (3) condition-wise gives the generated-particle scattering vector field

$$\mathbf{v}_\theta(\mathbf{x}, \mathbf{c}) = \mathbb{E}_{\mathbf{x}_r \sim Q(\cdot | \mathbf{c})} \left[\frac{\mathbf{x}_r - \mathbf{x}}{\|\mathbf{x}_r - \mathbf{x}\|} \right] - \mathbb{E}_{\mathbf{x}_s \sim P_\theta(\cdot | \mathbf{c})} \left[\frac{\mathbf{x}_s - \mathbf{x}}{\|\mathbf{x}_s - \mathbf{x}\|} \right]. \quad (4)$$

These inter- and intra-source expected bearings have unit-norm integrands away from coincidence. For estimator identities we set each bearing to zero at exact coincidence; code uses denominator smoothing, which is the exact gradient of a differentiable radial potential and converges pointwise to the bearing field as detailed in App. E.5.1. The ideal flow follows $d\mathbf{x}/dt = \mathbf{v}_\theta(\mathbf{x}, \mathbf{c})$, and its generator update pulls this field back through the generator Jacobian:

$$\nabla_\theta \mathcal{F} = -\mathbb{E}_{\mathbf{c} \sim p_{\text{data}}(\mathbf{c}), \mathbf{z} \sim p(\mathbf{z})} [J_\theta g_\theta(\mathbf{z}, \mathbf{c})^\top \mathbf{v}_\theta(g_\theta(\mathbf{z}, \mathbf{c}), \mathbf{c})]. \quad (5)$$

Stochastic estimator. A full empirical evaluation of (2) uses pairwise distances, whereas classical random-pair MMD estimators are linear in batch size (Gretton et al., 2012). We use one side of this stochastic gradient as a projectile-level field with one differentiable projectile, one real source, one detached generated source, and an explicit target that an auxiliary field can track; its $O(B)$ scaling refers to sample interactions, not per-sample network cost. The exact relation to the symmetrized estimator is given in App. D.5.

2.2 THREE-BODY SCATTERING VECTOR FIELD

Triplet estimator. We estimate (4) with a constant-size signed interaction; App. E.4.1 makes precise why a real-only estimator cannot recover its model-dependent term. For a condition $\mathbf{c}$ and projectile $\mathbf{x}_p \sim P_\theta(\cdot | \mathbf{c})$, sample one real source $\mathbf{x}_r \sim Q(\cdot | \mathbf{c})$ and one independently generated source $\mathbf{x}_s \sim P_\theta(\cdot | \mathbf{c})$. The corresponding sample-level scattering estimator is

$$\hat{\mathbf{v}}_{\text{scat}}(\mathbf{x}_p; \mathbf{x}_r, \mathbf{x}_s) = \mathbf{b}_r - \mathbf{b}_s, \quad \mathbf{b}_r = \underbrace{\frac{\mathbf{x}_r - \mathbf{x}_p}{\|\mathbf{x}_r - \mathbf{x}_p\|}}_{\text{inter-source bearing}}, \quad \mathbf{b}_s = \underbrace{\frac{\mathbf{x}_s - \mathbf{x}_p}{\|\mathbf{x}_s - \mathbf{x}_p\|}}_{\text{intra-source bearing}}, \quad (6)$$

Averaging over the two sources recovers the population scattering vector field:

$$\mathbb{E}_{\mathbf{x}_r \sim Q(\cdot | \mathbf{c}), \mathbf{x}_s \sim P_\theta(\cdot | \mathbf{c})} [\hat{\mathbf{v}}_{\text{scat}}(\mathbf{x}_p; \mathbf{x}_r, \mathbf{x}_s)] = \mathbf{v}_\theta(\mathbf{x}_p, \mathbf{c}). \quad (7)$$

Equivalently, the same vector is the negative projectile gradient of the single-event energy $\|\mathbf{x}_p - \mathbf{x}_r\| - \|\mathbf{x}_p - \mathbf{x}_s\|$, whose source expectation is (3) evaluated at the projectile.

Scattering interpretation. Here, three-body denotes a projectile’s signed interaction with real and model sources, not Newtonian dynamics; Thm. 1 formalizes its objective-to-update identity.

2.3 SCATTERING TARGET REGRESSION

Frozen target. For each loss event, we sample a projectile, real source, and independently generated source, displace the projectile by the sampled inter-minus-intra vector, and regress the generator output toward this detached target. The one-step target is

$$\mathbf{x}_{\text{target}} = \text{sg}[\mathbf{x}_p + \hat{\mathbf{v}}_{\text{scat}}(\text{sg}[\mathbf{x}_p]; \mathbf{x}_r, \mathbf{x}_s)], \quad \mathbf{x}_p = \mathbf{g}_\theta(\mathbf{z}, \mathbf{c}), \quad \mathbf{x}_s = \text{sg}[\mathbf{g}_\theta(\mathbf{z}_s, \mathbf{c})]. \quad (8)$$

The generator objective averages this target regression over triplets:

$$\mathcal{L}_{\text{gen}}(\theta) = \frac{1}{2} \mathbb{E}_{(\mathbf{x}_r, \mathbf{c}) \sim p_{\text{data}}(\mathbf{x}, \mathbf{c}), \mathbf{z}, \mathbf{z}_s \sim p(\mathbf{z})} [\|\mathbf{g}_\theta(\mathbf{z}, \mathbf{c}) - \mathbf{x}_{\text{target}}\|_2^2]. \quad (9)$$

Detaching freezes the stochastic field estimate, so gradients pass only through the projectile and pull the fixed vector back through the generator Jacobian.

Formal scope. Fix $\mathbf{c}$ and current parameters $\bar{\theta}$, abbreviate $Q = Q(\cdot \mid \mathbf{c})$, write $P_\theta = (\mathbf{g}_\theta(\cdot, \mathbf{c}))_{\#} p(\mathbf{z})$ and $\mathcal{F}_c(\theta) = \frac{1}{2} D_E^2(P_\theta, Q)$, and let $\mathcal{L}_{\text{gen}, c}(\theta; \bar{\theta})$ freeze all target-side quantities at $\bar{\theta}$. For independent $\mathbf{x}_r \sim Q$ and $\mathbf{z}, \mathbf{z}_s \sim p(\mathbf{z})$, set $\mathbf{x}_p = \mathbf{g}_{\bar{\theta}}(\mathbf{z}, \mathbf{c})$, $J_{\bar{\theta}} = \nabla_{\theta} \mathbf{g}_{\bar{\theta}}(\mathbf{z}, \mathbf{c})|_{\theta=\bar{\theta}}$, $\mathbf{x}_s = \mathbf{g}_{\bar{\theta}}(\mathbf{z}_s, \mathbf{c})$, and $\hat{\mathbf{v}} = \hat{\mathbf{v}}_{\text{scat}}(\mathbf{x}_p; \mathbf{x}_r, \mathbf{x}_s)$. We assume exact bearings, finite first moments, zero collision probability, almost-sure generator differentiability, and valid differentiation under the expectation; App. E states the full scope.

Theorem 1 (Energy-distance three-body local gradient equivalence). *Source independence gives $\mathbb{E}[\hat{\mathbf{v}} \mid \mathbf{x}_p, \mathbf{c}] = \mathbf{v}_{\bar{\theta}}(\mathbf{x}_p, \mathbf{c})$ and, for the generator pullback, $\mathbb{E}[\hat{\mathbf{v}} \mid \mathbf{z}, J_{\bar{\theta}}, \mathbf{c}] = \mathbf{v}_{\bar{\theta}}(\mathbf{x}_p, \mathbf{c})$. Consequently, at the current parameters, exact-bearing frozen-target regression obeys the local identity*

$$\nabla_{\theta} \mathcal{L}_{\text{gen}, c}(\theta; \bar{\theta})|_{\theta=\bar{\theta}} = \nabla_{\theta} \mathcal{F}_c(\bar{\theta}). \quad (10)$$

Moreover, $\|\hat{\mathbf{v}}\|_2 \leq 2$ almost surely and $\mathbb{E}[\|\hat{\mathbf{v}} - \mathbf{v}_{\bar{\theta}}(\mathbf{x}_p, \mathbf{c})\|_2^2 \mid \mathbf{x}_p, \mathbf{c}] \leq 2$, a dimension-free bound;

Prop. 3 gives the exact variance and one-draw-class optimality. Whenever the 2-Wasserstein chain rule is valid, the exact population flow dissipates energy at rate $\frac{d}{dt} \frac{1}{2} D_E^2(P_t, Q) = - \int \|\mathbf{v}_t(\mathbf{x})\|_2^2 P_t(d\mathbf{x}) \leq 0$. One joint real-condition draw gives an unbiased gradient estimate for (1), since the real-real term is θ -independent; the objective vanishes exactly when conditional laws agree $p_{\text{data}}(\mathbf{c})$ -almost surely.

Gradient surrogate. Since $\mathbf{x}_{\text{target}}$ is detached, the per-projectile loss has output gradient $-\hat{\mathbf{v}}_{\text{scat}}$. Thus the regression is a local loss surrogate: with the $1/2$ convention, its expected current-parameter gradient equals $\nabla_{\theta} \mathcal{F}$, while its value is not an estimator of the energy distance. Alg. 1 omits that conventional factor because the optimizer learning rate absorbs the resulting gradient scale. The per-sample pullback and the formal local-objective proof are given in App. E.1.

2.4 TRACKED SCATTERING TARGETS

Motivation. The estimator in (6) is cheap but noisy, using one source per distribution. A *scattering tracker* approximates this conditional expectation online, lowering target error when its error is below residual source-sampling variance.

Exact and weighted targets. Write $\hat{\mathbf{v}}_\lambda = \mathbf{b}_r - \lambda \mathbf{b}_s$, where the coupled design parameter $\lambda \in [0, 1]$ controls both the intra-source coefficient and the tracker-query range defined below. At the exact energy-distance endpoint, $\lambda = 1$ and the tracker is queried at the projectile, where $\mathbb{E}[\hat{\mathbf{v}}_{\text{scat}} \mid \mathbf{x}_p, \mathbf{c}] = \mathbf{v}_{\bar{\theta}}(\mathbf{x}_p, \mathbf{c})$. This population field is conservative. If a tracker constrained as $\mathbf{v}_\phi(\mathbf{x}, \mathbf{c}) = \nabla_{\mathbf{x}} u_\phi(\mathbf{x}, \mathbf{c})$ matches it throughout a connected domain, then u_ϕ equals the negative first variation there up to an additive constant.

More generally, before tracker conditioning, the exact-bearing source mean of $\hat{\mathbf{v}}_\lambda$ is the negative Wasserstein gradient field of

$$\mathcal{F}_\lambda(P; Q) = \mathbb{E}_{\mathbf{x} \sim P, \mathbf{y} \sim Q} [\|\mathbf{x} - \mathbf{y}\|] - \frac{\lambda}{2} \mathbb{E}_{\mathbf{x}, \mathbf{x}' \sim P} [\|\mathbf{x} - \mathbf{x}'\|]. \quad (11)$$

At $\lambda = 1$, $\mathcal{F}_\lambda$ equals $\mathcal{F}(P) = \frac{1}{2} D_E^2(P, Q)$ up to a Q -dependent constant, and $\hat{\mathbf{v}}_\lambda = \hat{\mathbf{v}}_{\text{scat}}$. For $\lambda < 1$, $\mathcal{F}_\lambda = \mathcal{F}_1 + \frac{1-\lambda}{2} \mathbb{E}[\|\mathbf{x} - \mathbf{x}'\|]$, so this positive pairwise term favors lower generated-sample dispersion and generally shifts the optimum away from Q .

Algorithm 2 Full TBSM: Tracked Three-Body Scattering Regression

- 1: Initialize generator parameters θ and tracker parameters ϕ .
 - 2: Choose tracked-supervision weight $\rho \in [0, 1]$ and intra-source weight $\lambda \in [0, 1]$.
 - 3: **repeat**
 - 4: Sample real source-condition pairs $(\mathbf{x}_r, \mathbf{c})$ from dataset.
 - 5: Sample noise $\mathbf{z}, \mathbf{z}_s \sim p(\mathbf{z})$, and generate $\mathbf{x}_p = g_\theta(\mathbf{z}, \mathbf{c})$ and $\mathbf{x}_s = \text{sg}[g_\theta(\mathbf{z}_s, \mathbf{c})]$.
 - 6: Compute bearings $\mathbf{b}_r = (\mathbf{x}_r - \mathbf{x}_p) / \|\mathbf{x}_r - \mathbf{x}_p\|$ and $\mathbf{b}_s = (\mathbf{x}_s - \mathbf{x}_p) / \|\mathbf{x}_s - \mathbf{x}_p\|$.
 - 7: Form λ -weighted scattering vector $\hat{\mathbf{v}}_\lambda = \mathbf{b}_r - \lambda \mathbf{b}_s$.
 - 8: Sample $\alpha \sim \mathcal{U}(0, 1 - \lambda)$ and set $\tilde{\mathbf{x}} = \alpha \mathbf{x}_r + (1 - \alpha) \text{sg}[\mathbf{x}_p]$.
 - 9: Query tracked vector $\mathbf{v}_{\text{trk}} = \mathbf{v}_\phi(\tilde{\mathbf{x}}, \mathbf{c})$.
 - 10: Form mixed scattering vector $\hat{\mathbf{v}}_{\text{mix}} = (1 - \rho)\hat{\mathbf{v}}_\lambda + \rho \mathbf{v}_{\text{trk}}$.
 - 11: Update θ by descending $\|\mathbf{x}_p - \text{sg}[\mathbf{x}_p + \hat{\mathbf{v}}_{\text{mix}}]\|_2^2$.
 - 12: Update ϕ by descending $\|\mathbf{v}_{\text{trk}} - \text{sg}[\hat{\mathbf{v}}_\lambda]\|_2^2$.
 - 13: **until** convergence
-

Tracker query and mixing. The tracker is queried at $\tilde{\mathbf{x}} = \alpha \mathbf{x}_r + (1 - \alpha) \text{sg}[\mathbf{x}_p]$, with $\alpha \sim \mathcal{U}(0, 1 - \lambda)$ and point mass at $\alpha = 0$ when $\lambda = 1$. This design choice, not a consequence of (11), moves the query from the projectile at $\lambda = 1$ to the fake-to-real corridor at $\lambda = 0$. For $\lambda < 1$, $\tilde{\mathbf{x}}$ generally does not determine the projectile, so its population regression target is a query-conditioned expectation generally distinct from the projectile-conditioned negative-gradient field induced by $\mathcal{F}_\lambda$. The tracker is trained by the regression objective $\mathcal{L}_{\text{trk}}(\phi) = \mathbb{E} [\|\mathbf{v}_\phi(\tilde{\mathbf{x}}, \mathbf{c}) - \text{sg}[\hat{\mathbf{v}}_\lambda]\|_2^2]$. The tracked-supervision weight $\rho \in [0, 1]$ then mixes the instantaneous and tracked vectors as $\hat{\mathbf{v}}_{\text{mix}} = (1 - \rho)\hat{\mathbf{v}}_\lambda + \rho \mathbf{v}_\phi(\tilde{\mathbf{x}}, \mathbf{c})$. The generator target is still (8), with $\hat{\mathbf{v}}_{\text{scat}}$ replaced by $\hat{\mathbf{v}}_{\text{mix}}$. For a fixed current generator and square-integrable tracker, at $\lambda = 1$ define the conditional source variance $s_\theta(\mathbf{x}_p, \mathbf{c}) = \text{tr Var}(\hat{\mathbf{v}}_{\text{scat}} | \mathbf{x}_p, \mathbf{c})$ and tracker error $e_\phi(\mathbf{x}_p, \mathbf{c}) = \|\mathbf{v}_\phi(\mathbf{x}_p, \mathbf{c}) - \mathbf{v}_\theta(\mathbf{x}_p, \mathbf{c})\|_2^2$.

Corollary 1 (Finite-tracker error at the energy-distance endpoint). *At $\lambda = 1$, the mixed scattering vector satisfies the exact decomposition*

$$\mathbb{E} [\|\hat{\mathbf{v}}_{\text{mix}} - \mathbf{v}_\theta(\mathbf{x}_p, \mathbf{c})\|_2^2 | \mathbf{x}_p, \mathbf{c}] = (1 - \rho)^2 s_\theta(\mathbf{x}_p, \mathbf{c}) + \rho^2 e_\phi(\mathbf{x}_p, \mathbf{c}). \quad (12)$$

Pointwise, the MSE-optimal mixture is $\rho^* = s_\theta / (s_\theta + e_\phi)$ when the denominator is positive; at $\lambda = 1$, full oracle tracking is the Rao–Blackwellization of the instant field estimator, eliminating source variance. Learned full tracking improves on the instant target exactly when tracker error is below that variance. **Thm. 2** extends the identity to corridor-conditioned targets, and **Cor. 2** gives its generator-update-space counterpart. At $\lambda = 1$, tracker excess risk directly controls population energy dissipation and, under a slope condition, convergence; after Jacobian pullback, finite errors control stationarity. For $\lambda \neq 1$, the instant projectile-conditioned expectation follows (11), whereas tracker regression targets a generally distinct query-conditioned expectation; even an oracle tracker need not preserve the $\mathcal{F}_\lambda$ generator gradient after pullback, and finite tracker error adds approximation error.

Full tracked algorithm. In **Alg. 2**, the three gray steps after REPEAT are inherited from **Alg. 1**. For $\rho > 0$, each sampled event supplies a detached mixed target for the generator and an instantaneous regression target for the tracker. At $\rho = 0$, the tracker query and update may be omitted; $\lambda = 1$ then makes the generator update identical to **Alg. 1**. All reported experiments use this generator–tracker update structure with the representation interfaces in **Sec. 2.6**; **Alg. 3** below is an expository displacement analogue only.

2.5 DISPLACEMENT ANALOGUE OF THE GAN-LIKE STATE

Fake-to-real state at $\rho = 1, \lambda = 0$. At $\rho = 1, \lambda = 0$, **Alg. 2** uses the unit-bearing target $\mathbf{b}_r$ and queries the learned tracker along the fake-to-real corridor. **Alg. 3** preserves this corridor but replaces the unit bearing with the displacement $\mathbf{x}_r - \mathbf{x}_p$, so it is not a parameter-only specialization. The resulting tracker learns both orientation and magnitude without a generated-source branch, while its

Algorithm 3 GAN-like Displacement Analogue of TBSM at $\rho = 1, \lambda = 0$

- 1: Initialize generator parameters θ and tracker parameters ϕ .
 - 2: **repeat**
 - 3: Sample real source-condition pairs $(\mathbf{x}_r, \mathbf{c})$ from dataset.
 - 4: Sample noise $\mathbf{z} \sim p(\mathbf{z})$ and generate projectile $\mathbf{x}_p = \mathbf{g}_\theta(\mathbf{z}, \mathbf{c})$.
 - 5: Sample $\alpha \sim \mathcal{U}(0, 1)$ and set $\tilde{\mathbf{x}} = \alpha \mathbf{x}_r + (1 - \alpha) \text{sg}[\mathbf{x}_p]$.
 - 6: Query tracker field $\mathbf{v}_{\text{trk}} = \mathbf{v}_\phi(\tilde{\mathbf{x}}, \mathbf{c})$.
 - 7: Update θ by descending $\|\mathbf{x}_p - \text{sg}[\mathbf{x}_p + \mathbf{v}_{\text{trk}}]\|_2^2$.
 - 8: Update ϕ by descending $\|\mathbf{v}_{\text{trk}} - \text{sg}[\mathbf{x}_r - \text{sg}[\mathbf{x}_p]]\|_2^2$.
 - 9: **until** convergence
-

detached output supervises the generator; feature normalization and the generator learning rate set the effective update scale.

Line-integral critic interpretation. The GAN-like connection becomes precise when the tracker is conservative, $\mathbf{v}_\phi(\mathbf{x}, \mathbf{c}) = \nabla_{\mathbf{x}} u_\phi(\mathbf{x}, \mathbf{c})$. Let $\Delta = \mathbf{x}_r - \mathbf{x}_p$ and $\mathbf{x}_\alpha = (1 - \alpha)\mathbf{x}_p + \alpha\mathbf{x}_r$. The line-integral identity along $\mathbf{x}_\alpha$ implies that, for a fixed generator,

$$\mathcal{L}_{\text{trk}}^{\text{disp}}(\phi) = \mathbb{E} \left[\|\nabla_{\mathbf{x}} u_\phi(\mathbf{x}_\alpha, \mathbf{c})\|_2^2 \right] - 2(\mathbb{E}[u_\phi(\mathbf{x}_r, \mathbf{c})] - \mathbb{E}[u_\phi(\mathbf{x}_p, \mathbf{c})]) + C, \quad (13)$$

where $C = \mathbb{E}[\|\Delta\|_2^2]$ is independent of ϕ during the tracker update. Thus, for this conservative displacement analogue, tracker regression maximizes the real-generated potential gap minus one half of the corridor-averaged squared gradient norm; App. E.5.3 derives the identity and its conservative-field projection. This is still not identical to conventional GAN minimax training: the generator queries the field at a random corridor point rather than necessarily at $\mathbf{x}_p$, and a general vector-valued tracker has no scalar-potential line-integral identity.

2.6 PRACTICAL DEPLOYMENT GUIDANCE

Exact endpoint and deployed surrogates. At $\lambda = 1$, exact and smoothed source means are the negative Wasserstein-gradient fields of the proper objectives $\mathcal{F}$ and $\mathcal{F}_\epsilon$ (App. E.5.1). Tracker identities apply to both; tracked convergence additionally requires the corresponding chain rule, slope, and relative-error conditions. For $\lambda < 1$, Prop. 5 gives objective consistency as $\lambda \uparrow 1$, while Prop. 6 combines reweighting, corridor, and tracker errors; under a linear endpoint slope, these errors yield an explicit convergence neighborhood.

Representation-space scattering. We use raw-pixel scattering for low-dimensional data and small images and scattering through frozen encoders for natural images. For a fixed representation map $\mathbf{f}$, Alg. 2 is applied to $\mathbf{f}(\mathbf{x}_p)$, $\mathbf{f}(\mathbf{x}_r)$, and $\mathbf{f}(\mathbf{x}_s)$; projectile gradients backpropagate through $\mathbf{f}$ into the generator, while source features remain detached. Pixel outputs enter $\mathbf{f}$ directly, whereas latent outputs are first decoded, so this projects the loss computation rather than changing the generator output domain. At $\lambda = 1$, the exact and denominator-smoothed objectives are proper only for the projected distributions; at $\lambda < 1$, the weighted functional is a projected surrogate. Neither case guarantees full image matching without sufficient representation informativeness.

Tracker parameterization. The conservative tracker in Sec. 2.4 can be implemented as the input gradient of a scalar potential network, but higher-order autograd is expensive at image scale. A lightweight vector-valued network with the representation dimension avoids higher-order autograd but drops exact conservativity. See App. B for architecture details.

Multiple representation fields. Each fixed representation map defines its own feature-space field, query, and regression loss; vectors from incompatible spaces are never added. At $\lambda = 1$, exact or smoothed, the expected current-parameter gradient of the summed instant or oracle-tracked losses equals that of the corresponding sum of proper projected discrepancies; finite-tracker errors combine only after Jacobian pullback. Zero summed discrepancy matches every projected marginal, not their joint or the full image law unless the representations are jointly measure-determining.

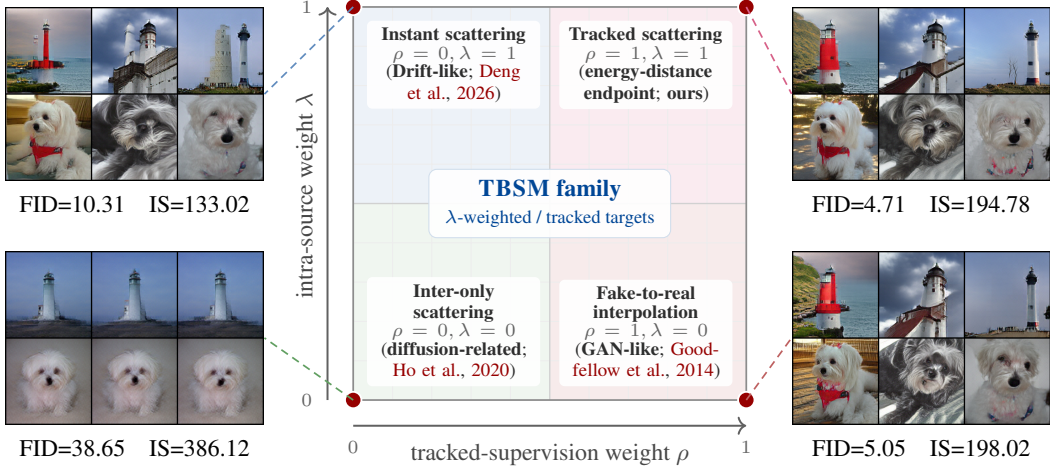


Figure 3: **One-step generated samples across the (ρ, λ) design map.** See Tab. 4 for optimization settings.

3 THE GENERATIVE DESIGN MAP

The (ρ, λ) map organizes four reference configurations and interior settings within Alg. 2.

3.1 REFERENCE CONFIGURATIONS AND MATCHED GENERATOR UPDATES

Here ρ mixes the instantaneous stochastic vector and learned tracker field, while λ jointly sets the intra-source coefficient in $\hat{\mathbf{v}}_\lambda = \mathbf{b}_r - \lambda \mathbf{b}_s$ and the tracker-query range $\alpha \in [0, 1 - \lambda]$. Because λ couples two changes, this is neither a factorized ablation nor a claim of exact equivalence to neighboring method families.

Instant scattering / Drift-like. At $\rho = 0, \lambda = 1$, the generator uses the instant energy-distance scattering update derived above; this is closest to Drift-like particle dynamics, but with a constant-size three-body estimator rather than a batch-level pairwise field.

Tracked scattering / energy-distance endpoint. At $\rho = 1, \lambda = 1$, the tracker is trained to estimate the same inter-minus-intra field; Cor. 1 gives its exact error decomposition.

Inter-only scattering and the denoising connection. At $\rho = 0, \lambda = 0$, the one-step update reduces to instantaneous attraction toward an independently sampled real source and is not itself a diffusion objective. An exact denoising-style reduction additionally requires paired $(\mathbf{x}_t, \mathbf{x}_0)$ across noise levels, conditioning on t , and a clean-sample, noise, or velocity target rather than a unit bearing; pure-noise input alone is insufficient.

Fake-to-real scattering and the GAN connection. At $\rho = 1, \lambda = 0$, Alg. 2 follows a learned field regressed from unit-bearing targets and queried along the fake-to-real corridor. The displacement analogue in Alg. 3 exposes the potential-tracker interpretation in (13), which does not transfer unchanged to the unit-bearing target.

Empirical comparison. At matched generator updates, $\rho = 1, \lambda = 1$ gives the lowest FID in Fig. 3, consistent with retaining attraction and self-repulsion while replacing source-sampling noise with a learned field. The $\rho = 0, \lambda = 0$ corner has the worst FID but highest IS, a pattern compatible with the contraction pressure induced by $\mathcal{F}_\lambda$ when $\lambda < 1$. The comparison is not factorized: $\rho = 0$ leaves the λ -specific field instantaneous, whereas changing λ also changes the tracker corridor. Interior ρ trades instant variance against tracker error, while λ near one retains self-repulsion; this motivates the near-endpoint benchmark settings in Sec. 4.3, without making the $\lambda < 1$ objective proper.

Table 2: **Representation-field ablation on ImageNet-256.** Runtime is per step; see Tab. 4 for training settings.

Metric	ResNet-18	SigLIP2-B	MAE-B	ResNet-18 + SigLIP2-B	SigLIP2-B + MAE-B	ResNet-18 + MAE-B	ResNet-18 + MAE-B + SigLIP2-B
FID ↓	13.47	21.87	16.18	9.12	9.36	11.45	8.29
FDr ⁶ ↓	36.49	39.01	27.74	27.49	21.80	27.50	22.25
IS ↑	104.58	131.49	93.25	149.91	161.36	113.14	152.23
Avg. sec/step ↓	0.1389	0.1736	0.1583	0.1982	0.2184	0.1832	0.2411

3.2 CONNECTIONS TO RELATED DISTRIBUTION-MATCHING OBJECTIVES

The following relations require restrictions or input/target modifications beyond choosing (ρ, λ) and are interpretive rather than additional experimental algorithms.

A condition-only tracker and FD-loss. In the displacement analogue of Alg. 3, let $\mu_r(\mathbf{c})$ and $\mu_\theta(\mathbf{c})$ be the conditional real and generated feature means. Restricting the representation-space tracker to $\mathbf{c}$ alone gives $\mathbf{v}^*(\mathbf{c}) = \mu_r(\mathbf{c}) - \mu_\theta(\mathbf{c})$ and generator descent on $\frac{1}{2} \|\mu_\theta(\mathbf{c}) - \mu_r(\mathbf{c})\|_2^2$. This is an online, first-moment-only analogue of representation FD-loss (Yang et al., 2026), whose full Fréchet objective also matches feature covariances.

A displacement tracker and DMD. The displacement analogue in Alg. 3 resembles Distribution Matching Distillation (DMD) (Yin et al., 2024b) through an auxiliary model following the generated distribution and supplying a detached generator direction. DMD approximates a reverse-KL gradient from a fixed diffusion-teacher score and an online generated-distribution score at noise-perturbed generated samples; the analogue instead regresses fake-to-real displacements along straight corridors between independent endpoints, without teacher queries, score estimation, or a noise-time schedule.

Noisy-input inter-only scattering and perceptual supervision. If the inter-only corner receives a time-indexed noisy input $\mathbf{x}_t$, its paired clean sample $\mathbf{x}_0$, and condition t , its template approaches Perceptual Flow Matching (PFM) (Zhao et al., 2026) and PixelGen (Ma et al., 2026): each compares a clean prediction with $\mathbf{x}_0$ through frozen perceptual features. The objectives remain distinct because inter-only TBSM uses a normalized feature bearing and frozen-target regression, whereas PFM and PixelGen retain time-indexed flow/diffusion training with their perceptual losses.

4 EXPERIMENTS

We evaluate representation fields and one-step ImageNet benchmarks; Fig. 3 compares design-map corners at matched generator updates, and App. A reports conversion and refinement studies.

4.1 EXPERIMENTAL SETUP

Datasets. Our quantitative evaluation uses ImageNet-1K (Deng et al., 2009) at 256×256 (ImageNet-256); App. A adds a 512×512 conversion study (ImageNet-512). MNIST, Fashion-MNIST, and CIFAR-10 are used only for qualitative observations in Fig. 1.

Network architectures. On ImageNet, we evaluate JiT (Li & He, 2025), DiT (Peebles & Xie, 2023), and PixelDiT (Yu et al., 2025) backbones. JiT and PixelDiT operate in pixel space, while DiT operates on pretrained SD-VAE (Rombach et al., 2022) latents, following standard high-resolution latent-generation practice (Dhariwal & Nichol, 2021; Karras et al., 2024; Song et al., 2023). For these qualitative observations, we use compact U-Net generators on all three small-scale datasets. Tracker architectures and representation interfaces are detailed in App. B.

Implementation details. All models are implemented in PyTorch (Paszke et al., 2019) and optimized with AdamW (Loshchilov & Hutter, 2017). To reduce training compute, all ImageNet-1K TBSM runs except the FD-loss refinement in Fig. 5 initialize the generator from a pretrained multi-step model trained with diffusion or flow matching; see the *Generator initialization* paragraph in

Table 3: **ImageNet benchmark comparison.** Space denotes the generator output domain, and Params counts inference-time generator parameters. TBSM rows show their (ρ, λ) settings; † denotes longer training.

Method	Space	Backbone	NFE	Params	FID ↓	FDr ⁶ ↓	IS ↑
Reference statistics							
Validation set images	pixel	-	-	-	1.68	1.00	232.2
Iterative diffusion and flow baselines							
ADM (Dhariwal & Nichol, 2021)	pixel	U-Net cascade	250+250	608M	3.94	-	215.8
VDM++ (Kingma & Gao, 2023)	pixel	U-ViT-L/2	512×2	2B	2.12	-	267.7
DiT (Peebles & Xie, 2023)	latent	DiT-XL/2	250×2	675M	2.27	-	278.2
JiT (Li & He, 2025)	pixel	JiT-H/16	200	953M	1.97	7.66	296.0
PixelDiT (Yu et al., 2025)	pixel	PixelDiT-XL/16	100×2	797M	1.61	-	292.7
Autoregressive visual generators							
VAR (Tian et al., 2024)	discrete	VAR-d30	10×2	2B	1.97	6.70	304.6
BAR (Yu et al., 2026)	discrete	BAR-L	2048	1.1B	1.01	3.57	281.9
MAR (Li et al., 2024)	latent	MAR-H	51,200	942M	1.56	5.61	299.5
GAN-based one-step generators							
BigGAN (Brock et al., 2018)	pixel	BigGAN-deep	1	-	6.95	-	171.4
StyleGAN (Sauer et al., 2022)	pixel	StyleGAN-XL	1	-	2.30	-	265.1
One-step and few-step diffusion acceleration							
iCT (Song & Dhariwal, 2023)	latent	DiT-XL/2	1	675M	34.24	-	-
Shortcut (Frans et al., 2024)	latent	DiT-XL/2	1	676M	10.60	-	-
MeanFlow (Geng et al., 2025)	latent	DiT-XL/2	1	676M	3.43	-	-
pMF (Lu et al., 2026)	pixel	pMF-H/16	1	935M	2.29	6.87	267.2
Direct distribution-dynamics and representation-distance methods							
Drift (Deng et al., 2026)	pixel	DiT-L/16	1	465M	1.43	10.51	305.8
FD-loss (Yang et al., 2026)	pixel	JiT-H/16	1	953M	0.75	2.65	313.0
TBSM variants							
TBSM ($\rho=1.0, \lambda=1.0$)	pixel	JiT-B/16	1	131M	3.09	10.73	208.6
TBSM ($\rho=0.9, \lambda=1.0$)	pixel	JiT-B/16	1	131M	3.35	11.60	205.3
TBSM ($\rho=0.9, \lambda=0.9$)	pixel	JiT-B/16	1	131M	2.92	13.21	228.7
TBSM [†] ($\rho=0.9, \lambda=0.9$)	pixel	JiT-B/16	1	131M	2.69	13.21	247.4
TBSM ($\rho=0.9, \lambda=1.0$)	pixel	PixelDiT-XL/16	1	797M	2.23	7.15	210.0
TBSM ($\rho=0.9, \lambda=0.9$)	pixel	PixelDiT-XL/16	1	797M	2.23	7.59	230.9
TBSM ($\rho=0.9, \lambda=0.9$)	latent	DiT-XL/2	1	675M	1.63	6.76	243.0

App. B. The instant baseline uses $\rho = 0, \lambda = 1$, with the unused tracker update omitted. All reported TBSM ImageNet metrics use 50,000 generated samples and training-set reference statistics. We report FID (Heusel et al., 2017), FDr⁶ (Yang et al., 2026) (the mean generated-to-training FD normalized by validation-to-training FD over six feature spaces), and Inception Score (IS). NFE (number of function evaluations) counts the generator forward passes required to produce one sample. The corner comparison matches the generator-update budget, but tracked variants additionally optimize the tracker, so total training compute is not matched.

4.2 REPRESENTATION-FIELD ABLATION

Following FD-loss (Yang et al., 2026), we compare scattering vectors computed in single and multiple frozen feature spaces. The encoders include a supervised ResNet-18 (He et al., 2016), SigLIP2-B (Tschannen et al., 2025), and MAE-B (He et al., 2022). For each encoder, we EMA-whiten and channelwise ℓ_2 -normalize its final-layer map, then use a separate tracker and equally weighted loss (App. B). Tab. 2 is the only ImageNet-1K experiment that varies this set; every other ImageNet-1K experiment sums all three losses.

Within this matched-budget ablation, the three-encoder field gives the best FID, whereas SigLIP2-B + MAE-B gives the best FDr⁶ and IS at lower per-step cost. All combined fields containing SigLIP2-B have better reported values than every single encoder across the three quality metrics, while adding the third encoder trades additional computation for the lowest FID.

4.3 BENCHMARK RESULTS

Tab. 3 shows that TBSM is competitive at $\text{NFE} = 1$ in both output spaces, reaching $\text{FID} = 2.23$ with pixel-space PixelDiT-XL and $\text{FID} = 1.63$ with latent-space DiT-XL/2; the JiT-B results further demonstrate compatibility with a substantially smaller pixel backbone. At fixed $\rho = 0.9$, reducing λ from 1.0 to 0.9 produces an empirical tuning effect reminiscent of classifier-free guidance (CFG) (Ho & Salimans, 2022): on JiT-B, FID decreases from 3.35 to 2.92 while IS rises from 205.3 to 228.7; on PixelDiT-XL, FID rounds to 2.23 in both settings while IS rises from 210.0 to 230.9. This is an empirical analogy only: λ weights intra-source scattering rather than implementing CFG. Using the high-resolution curriculum in **App. A**, one-step DiT-XL/4 reaches $\text{FID} = 1.92$ and PixelDiT-XL reaches $\text{FID} = 3.84$ on ImageNet-512. FD-loss (Yang et al., 2026) has the strongest table scores; in a separate JiT-B case study, the random-sample grid after TBSM training in **Fig. 5** displays fewer block-like and grid-like artifacts despite worse metrics, illustrating a possible metric-artifact mismatch. ImageNet optimizer, batch-size, and training-step settings appear in **App. B**. The table is not exhaustive: W-Flow and Representation Distribution Matching are discussed in **App. D** rather than included as numerical baselines because their supervision is built from minibatch-level distribution estimates, whereas this study isolates constant-size sample-level targets; we claim no numerical superiority over them (Han et al., 2026; Feng et al., 2026).

5 DISCUSSION

At its energy-distance endpoint, TBSM turns a proper distributional energy into sample-level motion. The framework is close in spirit to particle systems and kernel discrepancies, but differs from classical sample optimization because the moving particles are outputs of a shared neural generator. The main practical finding is that this constant-size interaction remains effective for high-dimensional image generation. The resulting family also provides a common language for relating explicit distributional motion to Drift-like dynamics, GAN-like learned fields, and representation-space distribution matching.

6 LIMITATIONS

First, population-flow convergence assumes the exact $\lambda = 1$ field, chain-rule regularity, a slope inequality, and relative tracking; finite-generator convergence instead assumes a smooth exact objective, realizability, gradient dominance, relative bias, bounded variance, and diminishing steps. Neither establishes convergence for general neural generators trained by SGD. Second, vector estimates may be noisy near coincident particles; at $\lambda = 1$, fixed denominator smoothing stabilizes them and retains a proper smoothed objective, but changes its geometry. Third, the efficiency and quality of TBSM from random initialization at ImageNet scale remain untested. Fourth, even at $\lambda = 1$, representation-space properness concerns only projected distributions, so full image matching depends on the information retained by the encoder. Fifth, the benchmark establishes sample quality at $\text{NFE} = 1$, but not compute-matched training efficiency against mature diffusion and autoregressive systems. Finally, in strongly conditional settings where each condition is paired with only one real sample, the empirical conditional energy objective may encourage matching that single paired sample unless diversity is supplied through data augmentation, shared statistical structure across conditions, or additional regularization.

7 CONCLUSION

We presented TBSM as a direct particle-interaction paradigm for high-dimensional one-step generation without teacher predictions. Starting from the energy distance, its core algorithm contrasts data-model attraction with model-model self-interaction in local three-body events, and our experiments take this rule from particle optimization to image generation. Tracked scattering converts noisy instantaneous observations into an online learned field, while the design map clarifies connections to Drift-like dynamics, GAN-like critic fields, and representation-space objectives.

REFERENCES

- Luigi Ambrosio, Nicola Gigli, and Giuseppe Savaré. *Gradient Flows in Metric Spaces and in the Space of Probability Measures*. Birkhäuser, 2 edition, 2008.
- Michael Arbel, Anna Korba, Adil Salim, and Arthur Gretton. Maximum mean discrepancy gradient flow. In *Advances in Neural Information Processing Systems*, volume 32, 2019.
- Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibong Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-VL technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- Marc G. Bellemare, Ivo Danihelka, Will Dabney, Shakir Mohamed, Balaji Lakshminarayanan, Stephan Hoyer, and Rémi Munos. The Cramér distance as a solution to biased Wasserstein gradients. *arXiv preprint arXiv:1705.10743*, 2017.
- Siwan Boufadène and François-Xavier Vialard. On the global convergence of Wasserstein gradient flow of the Coulomb discrepancy. *SIAM Journal on Mathematical Analysis*, 57(4):4556–4587, 2025.
- Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale gan training for high fidelity natural image synthesis. *arXiv preprint arXiv:1809.11096*, 2018.
- Paul Caucheteux, Clément Bonet, and Anna Korba. A unifying view of variational generative wasserstein flows. *arXiv preprint arXiv:2605.31369*, 2026.
- Lénaïc Chizat, Maria Colombo, Roberto Colombo, and Xavier Fernández-Real. Quantitative convergence of Wasserstein gradient flows of kernel mean discrepancies. *arXiv preprint arXiv:2603.01977*, 2026.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Mingyang Deng, He Li, Tianhong Li, Yilun Du, and Kaiming He. Generative modeling via drifting. *arXiv preprint arXiv:2602.04770*, 2026.
- Prafulla Dhariwal and Alex Nichol. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems*, 34:8780–8794, 2021.
- Richard Duong, Viktor Stein, Robert Beinert, Johannes Hertrich, and Gabriele Steidl. Wasserstein gradient flows of MMD functionals with distance kernel and cauchy problems on quantile functions. *ESAIM: Control, Optimisation and Calculus of Variations*, 32:10, 2026. doi: 10.1051/cocv/2025097.
- Maria Esteban-Casadevall, Jorge Carrasco-Pollo, Max Welling, Jan-Willem van de Meent, Erik J. Bekkers, and Floor Eijkelboom. Kernel-gradient drifting models. *arXiv preprint arXiv:2605.10727*, 2026.
- Lan Feng, Wuyang Li, Eloi Zablocki, Matthieu Cord, and Alexandre Alahi. Representation distribution matching for one-step visual generation. *arXiv preprint arXiv:2607.02375*, 2026.
- Kevin Frans, Danijar Hafner, Sergey Levine, and Pieter Abbeel. One step diffusion via shortcut models. *arXiv preprint arXiv:2410.12557*, 2024.
- Leonard T Franz, Sebastian Hoffmann, Tim Weiland, Bernhard Schölkopf, and Georg Martius. Drifting fields are not conservative. *arXiv preprint arXiv:2604.06333*, 2026.
- Alexandre Galashov, Valentin de Bortoli, and Arthur Gretton. Deep MMD gradient flow without adversarial training. In *International Conference on Learning Representations*, 2025.
- Zhengyang Geng, Mingyang Deng, Xingjian Bai, J. Zico Kolter, and Kaiming He. Mean flows for one-step generative modeling. *arXiv preprint arXiv:2505.13447*, 2025.

-
- Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. *Advances in neural information processing systems*, 27, 2014.
- Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *Journal of Machine Learning Research*, 13(25):723–773, 2012.
- Paul Hagemann, Johannes Hertrich, Fabian Altekrüger, Robert Beinert, Jannis Chemseddine, and Gabriele Steidl. Posterior sampling based on gradient flows of the MMD with negative distance kernel. In *International Conference on Learning Representations*, 2024.
- Jiaqi Han, Puheng Li, Qiushan Guo, Renyuan Xu, Stefano Ermon, and Emmanuel J. Candès. One-step generative modeling via wasserstein gradient flows. *arXiv preprint arXiv:2605.11755*, 2026.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778, 2016.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16000–16009, 2022.
- Ping He, Om Khangaonkar, Hamed Pirsiavash, Yikun Bai, and Soheil Kolouri. Sinkhorn-drifting generative models. *arXiv preprint arXiv:2603.12366*, 2026.
- Johannes Hertrich, Christian Wald, Fabian Altekrüger, and Paul Hagemann. Generative sliced MMD flows with Riesz kernels. In *International Conference on Learning Representations*, 2024.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems*, 30, 2017.
- Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- Richard Jordan, David Kinderlehrer, and Felix Otto. The variational formulation of the Fokker–Planck equation. *SIAM Journal on Mathematical Analysis*, 29(1):1–17, 1998.
- Minguk Kang, Jun-Yan Zhu, Richard Zhang, Jaesik Park, Eli Shechtman, Sylvain Paris, and Taesung Park. Scaling up gans for text-to-image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10124–10134, 2023.
- Tero Karras, Miika Aittala, Jaakko Lehtinen, Janne Hellsten, Timo Aila, and Samuli Laine. Analyzing and improving the training dynamics of diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 24174–24184, 2024.
- Diederik P. Kingma and Ruiqi Gao. Understanding diffusion objectives as the ELBO with simple data augmentation. In *Advances in Neural Information Processing Systems*, 2023.
- Chun-Liang Li, Wei-Cheng Chang, Yu Cheng, Yiming Yang, and Barnabás Póczos. MMD GAN: Towards deeper understanding of moment matching network. In *Advances in Neural Information Processing Systems*, volume 30, 2017.
- Tianhong Li and Kaiming He. Back to basics: Let denoising generative models denoise. *arXiv preprint arXiv:2511.13720*, 2025.
- Tianhong Li, Yonglong Tian, He Li, Mingyang Deng, and Kaiming He. Autoregressive image generation without vector quantization. *Advances in Neural Information Processing Systems*, 37: 56424–56445, 2024.

-
- Yujia Li, Kevin Swersky, and Richard Zemel. Generative moment matching networks. In *Proceedings of the 32nd International Conference on Machine Learning*, volume 37 of *Proceedings of Machine Learning Research*, pp. 1718–1727, 2015.
- Shanchuan Lin, Ceyuan Yang, Zhijie Lin, Hao Chen, and Haoqi Fan. Adversarial flow models. *arXiv preprint arXiv:2511.22475*, 2025.
- Shanchuan Lin, Ceyuan Yang, Zhijie Lin, Hao Chen, and Haoqi Fan. Continuous adversarial flow models. *arXiv preprint arXiv:2604.11521*, 2026.
- Yaron Lipman, Ricky TQ Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow matching for generative modeling. *arXiv preprint arXiv:2210.02747*, 2022.
- Qiang Liu and Dilin Wang. Stein variational gradient descent: A general purpose Bayesian inference algorithm. In *Advances in Neural Information Processing Systems*, volume 29, 2016.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Cheng Lu and Yang Song. Simplifying, stabilizing and scaling continuous-time consistency models. *arXiv preprint arXiv:2410.11081*, 2024.
- Yiyang Lu, Susie Lu, Qiao Sun, Hanhong Zhao, Zhicheng Jiang, Xianbang Wang, Tianhong Li, Zhengyang Geng, and Kaiming He. One-step latent-free image generation with pixel mean flows. *arXiv preprint arXiv:2601.22158*, 2026.
- Nanye Ma, Mark Goldstein, Michael S Albergo, Nicholas M Boffi, Eric Vanden-Eijnden, and Saining Xie. Sit: Exploring flow and diffusion-based generative models with scalable interpolant transformers. In *European Conference on Computer Vision*, pp. 23–40. Springer, 2024.
- Zehong Ma, Ruihan Xu, and Shiliang Zhang. PixelGen: Improving pixel diffusion with perceptual supervision. *arXiv preprint arXiv:2602.02493*, 2026.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. PyTorch: An imperative style, high-performance deep learning library. *arXiv preprint arXiv:1912.01703*, 2019.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 4195–4205, 2023.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022.
- Nicolaj Rux, Michael Quellmalz, and Gabriele Steidl. Smoothed distance kernels for MMDs and applications in Wasserstein gradient flows. *Advances in Computational Mathematics*, 52:24, 2026.
- Tim Salimans and Jonathan Ho. Progressive distillation for fast sampling of diffusion models. *arXiv preprint arXiv:2202.00512*, 2022.
- Axel Sauer, Katja Schwarz, and Andreas Geiger. Stylegan-xl: Scaling stylegan to large diverse datasets. In *ACM SIGGRAPH 2022 conference proceedings*, pp. 1–10, 2022.
- René L. Schilling, Renming Song, and Zoran Vondraček. *Bernstein Functions: Theory and Applications*. De Gruyter, 2 edition, 2012. doi: 10.1515/9783110269338.
- Dino Sejdinovic, Bharath Sriperumbudur, Arthur Gretton, and Kenji Fukumizu. Equivalence of distance-based and RKHS-based statistics in hypothesis testing. *The Annals of Statistics*, 41(5): 2263–2291, 2013.

-
- Oriane Siméoni, Huy V. Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seungeun Yi, Michaël Ramamonjisoa, Francisco Massa, Daniel Haziza, Luca Wehrstedt, Jianyuan Wang, Timothée Darcet, Théo Moutakanni, Leonel Sentana, Claire Roberts, Andrea Vedaldi, Jamie Tolan, John Brandt, Camille Couprie, Julien Mairal, Hervé Jégou, Patrick Labatut, and Piotr Bojanowski. DINOv3, 2025.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*, 2020a.
- Yang Song and Prafulla Dhariwal. Improved techniques for training consistency models. *arXiv preprint arXiv:2310.14189*, 2023.
- Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020b.
- Yang Song, Prafulla Dhariwal, Mark Chen, and Ilya Sutskever. Consistency models. *arXiv preprint arXiv:2303.01469*, 2023.
- Peize Sun, Yi Jiang, Shoufa Chen, Shilong Zhang, Bingyue Peng, Ping Luo, and Zehuan Yuan. Autoregressive model beats diffusion: Llama for scalable image generation. *arXiv preprint arXiv:2406.06525*, 2024.
- Peng Sun, Yi Jiang, and Tao Lin. Unified continuous generative models. *arXiv preprint arXiv:2505.07447*, 2025.
- Gábor J. Székely and Maria L. Rizzo. Energy statistics: A class of statistics based on distances. *Journal of Statistical Planning and Inference*, 143(8):1249–1272, 2013.
- Chenyang Tian, Bharath K. Sriperumbudur, Arthur Gretton, and Zonghao Chen. Sobolev regularized MMD gradient flow. *arXiv preprint arXiv:2605.11884*, 2026.
- Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autoregressive modeling: Scalable image generation via next-scale prediction. *Advances in neural information processing systems*, 37:84839–84865, 2024.
- Michael Tschanen, Alexey Gritsenko, Xiao Wang, Muhammad Ferjad Naeem, Ibrahim Alabdulmohsin, Nikhil Parthasarathy, Talfan Evans, Lucas Beyer, Ye Xia, Basil Mustafa, Olivier Hénaff, Jeremiah Harmsen, Andreas Steiner, and Xiaohua Zhai. SigLIP 2: Multilingual vision-language encoders with improved semantic understanding, localization, and dense features. *arXiv preprint arXiv:2502.14786*, 2025.
- Thomas Unterthiner, Bernhard Nessler, Calvin Seward, Günter Klambauer, Martin Heusel, Hubert Ramsauer, and Sepp Hochreiter. Coulomb GANs: Provably optimal Nash equilibria via potential fields. In *International Conference on Learning Representations*, 2018.
- Aäron van den Oord, Nal Kalchbrenner, and Koray Kavukcuoglu. Pixel recurrent neural networks. In *Proceedings of the 33rd International Conference on Machine Learning*, volume 48 of *Proceedings of Machine Learning Research*, pp. 1747–1756, 2016.
- Chenfei Wu, Jiahao Li, Jingren Zhou, Junyang Lin, Kaiyuan Gao, Kun Yan, Sheng ming Yin, Shuai Bai, Xiao Xu, Yilei Chen, Yuxiang Chen, Zecheng Tang, Zekai Zhang, Zhengyi Wang, An Yang, Bowen Yu, Chen Cheng, Dayiheng Liu, Deqing Li, Hang Zhang, Hao Meng, Hu Wei, Jingyuan Ni, Kai Chen, Kuan Cao, Liang Peng, Lin Qu, Minggang Wu, Peng Wang, Shuting Yu, Tingkun Wen, Wensen Feng, Xiaoxiao Xu, Yi Wang, Yichang Zhang, Yongqiang Zhu, Yujia Wu, Yuxuan Cai, and Zenan Liu. Qwen-image technical report, 2025. URL <https://arxiv.org/abs/2508.02324>.
- Jiawei Yang, Zhengyang Geng, Xuan Ju, Yonglong Tian, and Yue Wang. Representation Fréchet loss for visual generation. *arXiv preprint arXiv:2604.28190*, 2026.
- Tianwei Yin, Michaël Gharbi, Taesung Park, Richard Zhang, Eli Shechtman, Fredo Durand, and William T Freeman. Improved distribution matching distillation for fast image synthesis. *arXiv preprint arXiv:2405.14867*, 2024a.

-
- Tianwei Yin, Michaël Gharbi, Richard Zhang, Eli Shechtman, Fredo Durand, William T Freeman, and Taesung Park. One-step diffusion with distribution matching distillation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 6613–6623, 2024b.
- Lijun Yu, José Lezama, Nitesh B. Gundavarapu, Luca Versari, Kihyuk Sohn, David Minnen, Yong Cheng, Vighnesh Birodkar, Agrim Gupta, Xiuye Gu, Alexander G. Hauptmann, Boqing Gong, Ming-Hsuan Yang, Irfan Essa, David A. Ross, and Lu Jiang. Language model beats diffusion—tokenizer is key to visual generation. *arXiv preprint arXiv:2310.05737*, 2023.
- Qihang Yu, Qihao Liu, Ju He, Xinyang Zhang, Yang Liu, Liang-Chieh Chen, and Xi Chen. Autoregressive image generation with masked bit modeling. *arXiv preprint arXiv:2602.09024*, 2026.
- Yongsheng Yu, Wei Xiong, Weili Nie, Yichen Sheng, Shiqiu Liu, and Jiebo Luo. PixelDiT: Pixel diffusion transformers for image generation. *arXiv preprint arXiv:2511.20645*, 2025.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. *arXiv preprint arXiv:2303.15343*, 2023.
- Chuyang Zhao, Yifei Song, Hongfa Wang, Jianlong Yuan, Yuan Zhang, Siming Fu, Zhineng Chen, Huilin Deng, Haoyang Huang, and Nan Duan. Perceptual flow matching for few-step generative modeling. *arXiv preprint arXiv:2607.03524*, 2026.

CONTENTS

1	Introduction	2
2	Methodology	3
2.1	Distributional Objective and Stochastic Optimization	3
2.2	Three-Body Scattering Vector Field	4
2.3	Scattering Target Regression	5
2.4	Tracked Scattering Targets	5
2.5	Displacement Analogue of the GAN-Like State	6
2.6	Practical Deployment Guidance	7
3	The Generative Design Map	8
3.1	Reference Configurations and Matched Generator Updates	8
3.2	Connections to Related Distribution-Matching Objectives	9
4	Experiments	9
4.1	Experimental Setup	9
4.2	Representation-Field Ablation	10
4.3	Benchmark Results	11
5	Discussion	11
6	Limitations	11
7	Conclusion	11
A	Additional ImageNet Results	18
B	Implementation Details	19
C	Text-to-Image Generation	21
D	Related Work and Positioning	21
D.1	Adversarial One-Step Generators	21
D.2	Diffusion, Score, and Flow-Based Models	21
D.3	Autoregressive Visual Generation	21
D.4	One-Step and Few-Step Diffusion Acceleration	22
D.5	Generative Wasserstein Flows and Particle Dynamics	22
E	Derivation and Theoretical Foundations	23
E.1	Exact Scattering Field and Frozen-Target Equivalence	23
E.2	Tracker Accuracy and Bias–Variance	24
E.3	Population Dissipation and Idealized Optimization Guarantees	26
E.3.1	Exact-flow dissipation	26
E.3.2	Tracked population flow	26
E.3.3	Finite-generator reference recursion	27
E.4	Additional Estimator Properties	29
E.4.1	Source-law necessity and variance optimality	29
E.5	Implementation and Interpretive Derivations	29
E.5.1	Denominator smoothing as a proper objective	29
E.5.2	Near-endpoint surrogate control	30
E.5.3	Line-integral interpretation of the displacement tracker	31

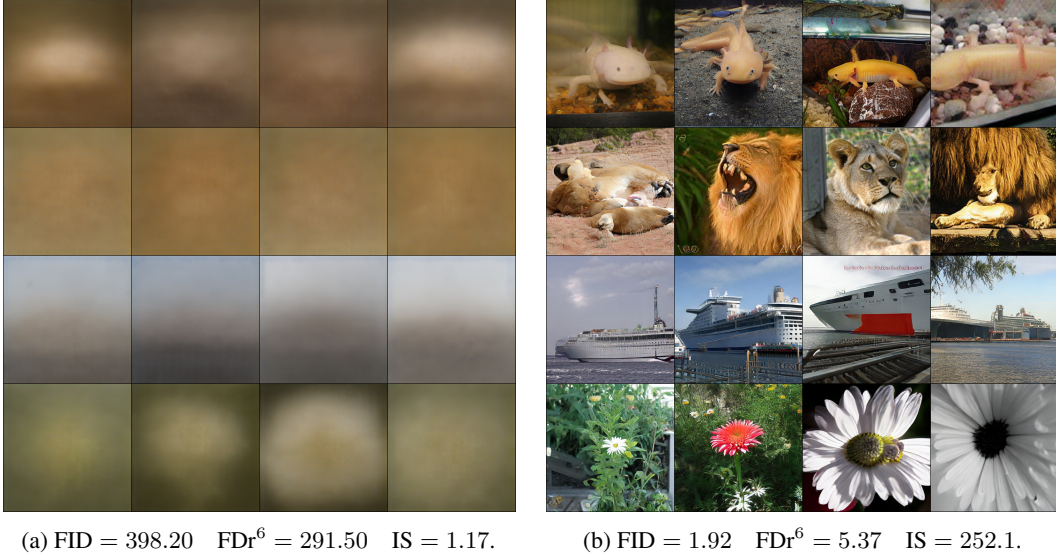


Figure 4: **Converting a multi-step ImageNet-512 model into a one-step generator.** Single-pass samples from a pretrained multi-step DiT-XL/4 before (left) and after TBSM training with $\rho = \lambda = 0.9$ (right). Both grids are random and uncensored.

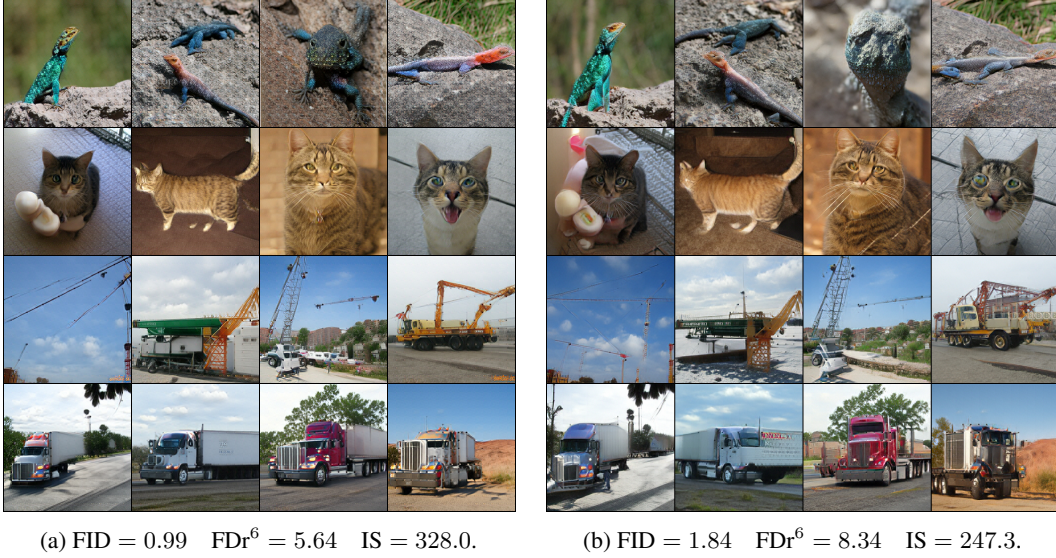


Figure 5: **FD-loss-trained JiT-B checkpoint refinement on ImageNet-256.** Random, uncensored single-pass samples before (left) and after continued TBSM training with $\rho = \lambda = 0.9$ (right).

A ADDITIONAL IMAGENET RESULTS

Tab. 4 gives optimizer, batch-size, and training-step settings for both studies.

Multi-step-to-one-step conversion at 512×512 . The left panel of **Fig. 4** evaluates a pretrained multi-step DiT-XL/4 at $\text{NFE} = 1$, outside its intended sampler; after TBSM training, the same architecture operates as an $\text{NFE} = 1$ ImageNet-512 generator. For the first half of this high-resolution experiment, we use an empirical paired noisy-input curriculum with **Alg. 2**: we sample $t \in \{0.5, 1.0\}$ with equal probability, form $\mathbf{x}_t = t\mathbf{z} + (1-t)\mathbf{x}_r$, set $\mathbf{x}_p = \mathbf{g}_\theta(\mathbf{x}_t, t, \mathbf{c})$, and additionally condition the tracker on t . Throughout, the generated source $\mathbf{x}_s = \text{sg}[\mathbf{g}_\theta(\mathbf{z}_s, 1, \mathbf{c})]$ uses an independent pure-noise draw $\mathbf{z}_s$ and does not depend on the sampled t . When $t = 0.5$, however, $\mathbf{x}_p$ is constructed from $\mathbf{x}_r$ and therefore does not satisfy real-source-projectile independence; moreover, $\mathbf{x}_p$ and $\mathbf{x}_s$ are not

Table 4: ImageNet training configurations: shared optimizer settings and per-experiment batch sizes and steps.

Configuration	Shared setting				
Generator optimizer	AdamW				
Generator learning rate	1.0×10^{-5}				
Generator betas	(0.9, 0.999)				
Tracker optimizer	AdamW				
Tracker learning rate	1.0×10^{-3}				
Tracker betas	(0.9, 0.999)				
Generator EMA decay	0.999				
Training precision	BF16				
Configuration	JiT-B (Tab. 3)	PixelDiT-XL (Tab. 3)	DiT-XL/2 (Tab. 3)	DiT-XL/4 (Fig. 4)	JiT-B (Tab. 2; Fig. 3, Fig. 5)
Global batch size	256	128	256	256	256
Training steps	100,000 (200,000 for †)	100,000	50,000	25,000	5,000

sampled iid from the same current generated law, as assumed by the exact field and convergence analysis. We use this curriculum solely as an empirical stabilization heuristic; none of our theoretical claims relies on it. For the second half, we fix $t = 1.0$, restoring the pure-noise generator input used at one-step deployment. Using the same optimization settings, PixelDiT-XL reaches $\text{FID} = 3.84$, $\text{IS} = 236.44$, and $\text{FDr}^6 = 8.17$ on ImageNet-512.

FD-loss checkpoint case study. In this separate JiT-B case, the post-training grid displays fewer block-like and grid-like artifacts although all three aggregate metrics worsen (Fig. 5; Yang et al., 2026). This illustrates a possible metric–artifact mismatch in the displayed samples, not a general limitation of FD-loss.

B IMPLEMENTATION DETAILS

Each training step performs one generator update and, when $\rho > 0$, one tracker update on the same triplet minibatch.

Numerical stabilization. All reported experiments compute each bearing as $(\mathbf{y} - \mathbf{x}) / (\|\mathbf{y} - \mathbf{x}\|_2 + \varepsilon)$ with fixed, untuned $\varepsilon = 10^{-6}$ to prevent division by zero. Sec. E.5.1 characterizes the induced smoothed objective and its relation to the exact bearing field.

Tracker architecture. The tracker is a lightweight conditional Transformer with approximately 30M parameters, comprising four layers with hidden dimension 736, eight attention heads, and an MLP expansion ratio of 4. Input features are linearly embedded and augmented with two-dimensional sinusoidal positional encodings and a joint class–timestep conditioning embedding, then processed by four self-attention–MLP blocks with RMSNorm, residual connections, and spectral normalization. Reported image experiments use a linear vector-valued head that projects the resulting tokens back to the input feature dimension. The conservative-field alternative instead predicts a scalar potential per token; these potentials are summed, and differentiating the resulting scalar with respect to the input yields the vector field.

Representation interfaces. For latent-output models, each generated latent is decoded by the corresponding frozen decoder before the resulting image is passed through the frozen representation encoders used to compute the scattering loss; ImageNet DiT uses the SD-VAE. On the projectile branch, gradients propagate through both decoder and encoders into the generator, while source features remain detached as in Alg. 2. Thus, “latent” and “pixel” in Tab. 3 denote the generator output domain; scattering is computed in frozen image-representation spaces in both cases. For every representation model, we use only its final-layer feature map; unlike Drifting Models (Deng et al., 2026), which combines features from multiple stages, scales, and locations, we do not aggregate intermediate layers. For a feature tensor $\mathbf{F} \in \mathbb{R}^{B \times C \times H \times W}$, each minibatch supplies channel-wise means and standard deviations over (B, H, W) in $\mathbb{R}^{1 \times C \times 1 \times 1}$; we maintain detached exponential moving averages with decay 0.999. Each sample is whitened with the pre-update running statistics



Figure 6: **One-step text-to-image generation.** NFE = 1 samples generated at 1024×1024 resolution by a TBSM-fine-tuned Qwen-Image-20B model.

and then ℓ_2 -normalized along C at each spatial location. For scattering, we then identify each normalized $C \times H \times W$ sample with its vectorization in $\mathbb{R}^{CHW}$, so every bearing denominator uses the global Euclidean norm (equivalently, the tensor Frobenius norm) across all channels and spatial locations, not a positionwise norm. Only after the losses are formed are the running statistics updated with the current minibatch. Thus the preprocessing map is fixed conditional on the history before each loss event, so the current-step estimator and tracker identities remain valid conditionally on that history. The theory below treats the vectors entering the scattering objective as the primitive sample space and does not cover the slow time variation induced by these EMA updates. Each representation model has its own tracker; all representation branches use the same feature processing and tracker architecture, and their losses are summed only after being formed in their respective feature spaces.

Generator initialization. Except for the FD-loss checkpoint case in Fig. 5, all ImageNet-1K TBSM runs initialize the generator from an architecture- and resolution-matched multi-step checkpoint trained with a diffusion or flow-matching objective. For JiT and PixelDiT, we use the authors’ public checkpoints for their best-reported multi-step configurations (Li & He, 2025; Yu et al., 2025), available from the official project repositories. For DiT, we instead initialize DiT-XL/2 and DiT-XL/4 from the multi-step checkpoints released by UCGM (Sun et al., 2025). The initialized network is then optimized with the relevant setting of Alg. 2. Unlike consistency distillation (Song et al., 2023), which couples predictions across noise levels, and DMD (Yin et al., 2024b), which queries diffusion and generated-distribution scores, this warm start supplies only initial parameters: no consistency target, teacher prediction, score, or noise-time target enters the TBSM update. Thus, the reported one-step models use TBSM supervision and a single-pass sampler; “one-step” does not imply random initialization. For the primary runs, this practical warm start improves training efficiency while leaving the TBSM objective independent of the initialization source. Tab. 4 reports the shared optimizer settings and per-experiment batch sizes and step counts for this TBSM training.

C TEXT-TO-IMAGE GENERATION

Initialization and supervision. We initialize the generator directly from the original pretrained multi-step Qwen-Image-20B (Wu et al., 2025) checkpoint, without an intermediate distillation stage or teacher-assisted conversion. Thereafter, all generator and tracker updates use only Alg. 2. Relative to teacher-based distillation and adversarial post-training pipelines (Yin et al., 2024b; Lin et al., 2026), the supervision interface is simpler in this respect: it requires no path-model teacher query, score estimate, denoising-trajectory target, or adversarial critic.

Model and representation interfaces. The samples in Fig. 1 and Fig. 6 are generated at NFE = 1 without classifier-free guidance. Relative to the ImageNet implementation, each tracker introduces cross-attention to the text-conditioning sequence from the Qwen2.5-VL (Bai et al., 2025) text encoder in Qwen-Image-20B. We form separate scattering losses from the final-layer features of three frozen representation models: the same Qwen2.5-VL encoder, DINOv3 (Siméoni et al., 2025), and SigLIP (Zhai et al., 2023). Each representation has its own tracker and follows the whitening, normalization, and loss-aggregation procedure in Sec. B.

Training configuration. We set $\rho = 1$ and $\lambda = 0$ and train for 1,000 generator updates with batch size 16. The generator uses learning rate 5×10^{-6} and AdamW betas (0.9, 0.99); each tracker uses learning rate 1×10^{-5} and betas (0.9, 0.999). Training likewise uses no classifier-free guidance.

Evaluation scope. The current draft reports this initial 1,000-step study. Subsequent updates will evaluate additional generator families, longer training, and broader benchmarks with direct baseline comparisons.

D RELATED WORK AND POSITIONING

We position TBSM from its exact energy-distance endpoint: an explicit distributional energy whose population field is estimated with constant-size stochastic interactions, without adversarial, path-indexed, autoregressive, or distillation-based supervision.

D.1 ADVERSARIAL ONE-STEP GENERATORS

GANs (Goodfellow et al., 2014; Brock et al., 2018; Sauer et al., 2022; Kang et al., 2023) provide direct single-pass sampling but train the generator through a jointly learned discriminator or critic. Adversarial Flow Models use adversarial training for native one- or multi-step flow-style generation, while Continuous Adversarial Flow Models adversarially post-train continuous flow models (Lin et al., 2025; 2026). TBSM instead uses non-adversarial frozen-target regression; at its exact endpoint, the sampled scattering vector estimates the 2-Wasserstein negative-gradient field of the energy-distance functional. A GAN-like objective arises only for the conservative displacement analogue in Sec. 2.5, where (13) gives a quadratically path-regularized potential objective.

D.2 DIFFUSION, SCORE, AND FLOW-BASED MODELS

Standard diffusion, score-based, and flow-matching models (Ho et al., 2020; Song et al., 2020b;a; Lipman et al., 2022; Ma et al., 2024) use path-indexed supervision: a network predicts a denoising target, score, or velocity along a noise-to-data trajectory and is typically evaluated repeatedly during sampling. The exact energy-distance formulation requires no noise schedule or transport path; it updates the generator distribution directly through real-generated-generated particle interactions.

D.3 AUTOREGRESSIVE VISUAL GENERATION

Autoregressive visual generators (van den Oord et al., 2016; Yu et al., 2023; Li et al., 2024; Tian et al., 2024; Sun et al., 2024) formulate image generation as ordered conditional prediction over discrete or continuous token, patch, or scale representations. They exploit sequence-modeling infrastructure, while sampling follows a chosen order or scale schedule; parallel and masked variants can reduce the number of decoding rounds. TBSM is non-autoregressive: it emits a full continuous sample in one generator evaluation and trains it through the population scattering vector field.

D.4 ONE-STEP AND FEW-STEP DIFFUSION ACCELERATION

The sampling cost of diffusion and flow models has motivated a large body of one-step and few-step acceleration methods, including progressive distillation (Salimans & Ho, 2022), consistency models (Song et al., 2023; Lu & Song, 2024; Song & Dhariwal, 2023), shortcut models (Frans et al., 2024), mean flows (Geng et al., 2025), and distribution matching distillation (Yin et al., 2024b;a). They obtain one- or few-step sampling through method-specific combinations of path- or noise-time supervision, consistency constraints, teachers, or auxiliary distribution estimators. At its energy-distance endpoint, TBSM instead trains the one-step generator with a population distribution-matching objective that does not require teacher outputs, trajectory targets, or score estimates. Our primary ImageNet experiments use a multi-step checkpoint only for parameter initialization, as detailed in Sec. B; this practical warm start is distinct from making a path model part of the TBSM supervision.

D.5 GENERATIVE WASSERSTEIN FLOWS AND PARTICLE DYNAMICS

The closest line directly optimizes distributional discrepancies or their induced dynamics. Energy distance is equivalent to MMD with a distance-induced kernel (Sejdinovic et al., 2013); both yield proper population objectives under their standard assumptions (Székely & Rizzo, 2013; Gretton et al., 2012). Generative Moment Matching Networks directly backpropagate an MMD objective (Li et al., 2015), whereas MMD-GAN and Cramér GAN learn the comparison kernel or feature map adversarially (Li et al., 2017; Bellemare et al., 2017). Coulomb GAN uses a learned potential field with data attraction and generated-particle repulsion (Unterthiner et al., 2018). Under the normalization below, the $\lambda = 1$ population field in (4) is exactly the velocity field of the 2-Wasserstein gradient flow of distance-kernel MMD²; alternative constant normalizations only rescale time. MMD Wasserstein flows have been developed for interacting-particle transport, one-dimensional negative-distance dynamics, sliced Riesz kernels, posterior sampling, and deep generative modeling (Arbel et al., 2019; Duong et al., 2026; Hertrich et al., 2024; Hagemann et al., 2024; Galashov et al., 2025). Smoothed distance kernels have also been constructed to restore differentiability and flow well-posedness near particle collisions (Rux et al., 2026). Recent work strengthens this theory in complementary directions: Sobolev-regularized MMD flow penalizes witness gradients and proves global MMD convergence under embedding-regularity assumptions, while kernel-gradient drifting expresses general-kernel drifts as score differences between kernel-smoothed laws, yielding a smoothed-KL descent interpretation (Tian et al., 2026; Esteban-Casadevall et al., 2026). The population energy flow is therefore not claimed as new; our theory concerns its constant-size source-detached estimator, online conditional-expectation tracking, and finite-error transfer to generator updates. More broadly, Wasserstein gradient-flow theory and Stein variational methods provide related distributional and interacting-particle views (Jordan et al., 1998; Ambrosio et al., 2008; Liu & Wang, 2016). MMD admits both full pairwise empirical estimates and linear-time random-pair approximations (Gretton et al., 2012).

Relation to linear-time MMD estimation. For distributions with finite first moments and any anchor $\mathbf{a}$, the distance-induced kernel $k_{\mathbf{a}}(\mathbf{x}, \mathbf{y}) = \frac{1}{2}(\|\mathbf{x} - \mathbf{a}\| + \|\mathbf{y} - \mathbf{a}\| - \|\mathbf{x} - \mathbf{y}\|)$ makes $\frac{1}{2}D_E^2(P_\theta, Q)$ equal to the squared MMD. For independent $\mathbf{x}_1, \mathbf{x}_2 \sim P_\theta$ and $\mathbf{x}_{r,1}, \mathbf{x}_{r,2} \sim Q$, one block of its classical linear-time estimator and its generator gradient can be written as

$$\begin{aligned}\widehat{\mathcal{F}}_{\text{lin}} &= \frac{1}{2} (\|\mathbf{x}_1 - \mathbf{x}_{r,2}\| + \|\mathbf{x}_2 - \mathbf{x}_{r,1}\| - \|\mathbf{x}_1 - \mathbf{x}_2\| - \|\mathbf{x}_{r,1} - \mathbf{x}_{r,2}\|), \\ \nabla_{\theta} \widehat{\mathcal{F}}_{\text{lin}} &= -\frac{1}{2} (J_1^\top \widehat{\mathbf{v}}_{\text{scat}}(\mathbf{x}_1; \mathbf{x}_{r,2}, \mathbf{x}_2) + J_2^\top \widehat{\mathbf{v}}_{\text{scat}}(\mathbf{x}_2; \mathbf{x}_{r,1}, \mathbf{x}_1)),\end{aligned}\tag{14}$$

where $J_i = \nabla_{\theta} \mathbf{x}_i$ and the identity holds away from coincident samples. Thus a symmetrized linear-time distance-kernel MMD gradient decomposes into two three-body projectile updates. By exchangeability, sampling either projectile term uniformly and omitting its factor 1/2 has the same expectation as the displayed average. Alg. 1 realizes this update through regression with the generated source detached; up to conventional loss scaling, Thm. 1 proves equality with the energy-distance gradient at the current parameters. Thus Alg. 1 is a source-detached projectile-level realization of a classical stochastic gradient, not a new linear-time MMD estimator.

Recent direct distribution-training methods differ mainly in how they estimate distribution-level supervision. Drifting Models construct minibatch kernel attraction–repulsion fields, with subsequent

work analyzing when such fields are conservative (Deng et al., 2026; Franz et al., 2026); FD-loss instead optimizes representation-space feature means and covariances using population statistics and batch-level gradients (Yang et al., 2026). Representation Distribution Matching uses a frozen Nyström data reference but retains exact within-batch generated-sample repulsion, making the fresh generated batch an operative optimization variable (Feng et al., 2026). Variational generative Wasserstein flows use JKO or dual formulations (Caucheteux et al., 2026), whereas Sinkhorn-Drifting and W-Flow construct minibatch cross- and self-transport plans (He et al., 2026; Han et al., 2026). W-Flow is especially close at the training interface: it regresses a one-step generator toward detached particle updates obtained from minibatch Sinkhorn plans. At its exact endpoint, TBSM estimates each projectile’s energy-distance field from one real and one independently generated source. A batch of B projectiles therefore uses $O(B)$ sampled source interactions and explicit frozen targets, without solving a minibatch transport problem; tracked scattering learns their conditional expectation online. Operationally, this sample-level interface requires one observed real source per condition-specific loss rather than a same-condition real minibatch, fitting text–image data with one image per caption. It does not remove the statistical limitation of observing one sample from each conditional law, discussed in Sec. 6.

Guidance-free training interface. Classifier-free guidance is not intrinsic to the neighboring families, but leading implementations may build it into training: Drifting samples a guidance scale and unconditional real negatives, although its best reported FID uses the scale it identifies as “no CFG”; W-Flow adopts velocity guidance as its default; and text-to-image DMD distills teachers at fixed guidance scales (Deng et al., 2026; Han et al., 2026; Yin et al., 2024b; Ho & Salimans, 2022). The reported TBSM pipeline uses neither unconditional reference particles nor a guided teacher or sampler and introduces no separate guidance hyperparameter beyond its intrinsic (ρ, λ) controls. This is a claim about guidance-related pipeline simplicity, not that these methods cannot operate without CFG.

E DERIVATION AND THEORETICAL FOUNDATIONS

Unless stated otherwise, distribution-level identities are for one fixed condition. They extend by averaging over c when the required expectations and interchanges are valid; condition-wise rates require corresponding integrable or uniform control. Parameter-space results apply to the aggregate conditional objective only when all their stated assumptions hold for it. Throughout this section, $\mathbf{x} \in \mathbb{R}^d$ denotes the vector supplied to the scattering objective. We assume finite first moments and set every bearing to zero at exact coincidence. Classical spatial and parameter gradients additionally require zero collision probability and valid differentiation under the expectation; with collision mass, zero is only a generalized-gradient selection. Population 2-Wasserstein flow statements further assume $P_t \in \mathcal{P}_2(\mathbb{R}^d)$ solves the continuity equation regularly enough for the 2-Wasserstein chain rule. At $\lambda = 1$, the code’s denominator smoothing retains a proper objective; the frozen-target, tracker-error, and conditional convergence arguments apply to its corresponding smoothed field as detailed in Sec. E.5.1.

E.1 EXACT SCATTERING FIELD AND FROZEN-TARGET EQUIVALENCE

For one fixed condition, or in the unconditional case, write $P = P_\theta$ and retain Q for the corresponding data law; the energy from the main text is

$$\mathcal{F}(P) = \mathbb{E}[\|\mathbf{x}_p - \mathbf{x}_r\|] - \frac{1}{2}\mathbb{E}[\|\mathbf{x}_p - \mathbf{x}_s\|] - \frac{1}{2}\mathbb{E}[\|\mathbf{x}_r - \mathbf{x}'_r\|], \quad (15)$$

where $\mathbf{x}_p, \mathbf{x}_s \sim P$ and $\mathbf{x}_r, \mathbf{x}'_r \sim Q$ are independent within and across laws. The real–real term is constant in P , while symmetry of the model–model term removes its factor $1/2$ under variation.

Thus, up to an additive constant,

$$\frac{\delta \mathcal{F}}{\delta P}(\mathbf{x}) = \mathbb{E} [\|\mathbf{x} - \mathbf{x}_r\|] - \mathbb{E} [\|\mathbf{x} - \mathbf{x}_s\|], \quad (16)$$

$$\nabla_{\mathbf{x}} \frac{\delta \mathcal{F}}{\delta P}(\mathbf{x}) = \mathbb{E} \left[\frac{\mathbf{x} - \mathbf{x}_r}{\|\mathbf{x} - \mathbf{x}_r\|} \right] - \mathbb{E} \left[\frac{\mathbf{x} - \mathbf{x}_s}{\|\mathbf{x} - \mathbf{x}_s\|} \right], \quad (17)$$

$$\mathbf{v}(\mathbf{x}) = -\nabla_{\mathbf{x}} \frac{\delta \mathcal{F}}{\delta P}(\mathbf{x}) = \mathbb{E} \left[\frac{\mathbf{x}_r - \mathbf{x}}{\|\mathbf{x}_r - \mathbf{x}\|} \right] - \mathbb{E} \left[\frac{\mathbf{x}_s - \mathbf{x}}{\|\mathbf{x}_s - \mathbf{x}\|} \right]. \quad (18)$$

Evaluating the last line at a projectile and sampling one source from each law gives (6).

Frozen-target pullback. For directly optimized particles, descending $\frac{1}{2} \|\mathbf{x}_p - \text{sg}[\mathbf{x}_p + \hat{\mathbf{v}}_{\text{scat}}]\|_2^2$ takes the Euler step $\mathbf{x}_p \leftarrow \mathbf{x}_p + \eta \hat{\mathbf{v}}_{\text{scat}}$. For a generator, detach fixes this sampled field and the chain rule pulls it back through the projectile Jacobian.

Proof of Theorem 1. Independence of both sources from the projectile branch gives $\mathbb{E}[\hat{\mathbf{v}} \mid \mathbf{x}_p, \mathbf{c}] = \mathbf{v}_{\bar{\theta}}(\mathbf{x}_p, \mathbf{c})$ and, for the pullback, the same identity conditional on the projectile latent and its Jacobian; also $\|\hat{\mathbf{v}}\|_2 \leq 2$. Under the regularity assumptions in the theorem, all target-side quantities are fixed at $\bar{\theta}$, so at the current parameters

$$\nabla_{\theta} \mathcal{L}_{\text{gen}, \mathbf{c}}(\theta; \bar{\theta})|_{\theta=\bar{\theta}} = -\mathbb{E}[J_{\bar{\theta}}^{\top} \hat{\mathbf{v}}] = -\mathbb{E}[J_{\bar{\theta}}^{\top} \mathbf{v}_{\bar{\theta}}] = \nabla_{\theta} \mathcal{F}_{\mathbf{c}}(\bar{\theta}). \quad (19)$$

The middle equality uses conditional unbiasedness, and the last is (5). Without detach, derivatives through the generated source and target construction would add terms and change this identity. $\square$

Dropping the conventional factor 1/2 doubles the regression gradient and is absorbed by the learning rate.

E.2 TRACKER ACCURACY AND BIAS–VARIANCE

Let $\mathcal{H}$ denote the training history before a fresh triplet is drawn, and evaluate the current tracker before updating it on that triplet, so the current generator and tracker are fixed conditional on $\mathcal{H}$. Write $\mathbf{q} = (\tilde{\mathbf{x}}, \mathbf{c})$, $Y = \hat{\mathbf{v}}_{\lambda}$, $m_{\lambda}(\mathbf{q}) = \mathbb{E}[Y \mid \mathbf{q}, \mathcal{H}]$, and $h_{\phi}(\mathbf{q}) = \mathbf{v}_{\phi}(\tilde{\mathbf{x}}, \mathbf{c})$. Assume $h_{\phi}(\mathbf{q})$ is square integrable and define $G_{\rho} = (1 - \rho)Y + \rho h_{\phi}(\mathbf{q})$ for $\rho \in [0, 1]$. The population tracker risk is $R(h) = \mathbb{E}[\|h(\mathbf{q}) - Y\|_2^2 \mid \mathcal{H}]$.

Theorem 2 (Tracked scattering as a conditional-expectation projection). *Over all square-integrable functions measurable with respect to the query and history, the conditional expectation m_{λ} minimizes R , and the excess risk of the learned tracker is $R(h_{\phi}) - R(m_{\lambda}) = \mathbb{E}[\|h_{\phi}(\mathbf{q}) - m_{\lambda}(\mathbf{q})\|_2^2 \mid \mathcal{H}]$. Moreover, almost surely, the mixed target has the exact error decomposition*

$$\mathbb{E}[\|G_{\rho} - m_{\lambda}(\mathbf{q})\|_2^2 \mid \mathbf{q}, \mathcal{H}] = (1 - \rho)^2 \text{tr Var}(Y \mid \mathbf{q}, \mathcal{H}) + \rho^2 \|h_{\phi}(\mathbf{q}) - m_{\lambda}(\mathbf{q})\|_2^2. \quad (20)$$

At $\lambda = 1$, $\mathbf{q} = (\mathbf{x}_p, \mathbf{c})$ and $m_1(\mathbf{q}) = \mathbf{v}_{\theta}(\mathbf{x}_p, \mathbf{c})$. In this case, the expected tracked velocity remains a strict energy-descent direction whenever $\rho \|h_{\phi} - \mathbf{v}_{\theta}\|_{L^2(P_{\theta})} < \|\mathbf{v}_{\theta}\|_{L^2(P_{\theta})}$, condition-wise.

Proof. The conditional expectation is the L^2 orthogonal projection of Y onto the sigma-algebra generated by $\mathbf{q}$ together with $\mathcal{H}$. Hence, for every square-integrable $h(\mathbf{q})$, the cross term between $Y - m_{\lambda}(\mathbf{q})$ and $h(\mathbf{q}) - m_{\lambda}(\mathbf{q})$ vanishes conditional on $\mathcal{H}$. Expanding the tracker risk proves the minimizer and excess-risk statements.

For the mixed target, $G_{\rho} - m_{\lambda}(\mathbf{q}) = (1 - \rho)(Y - m_{\lambda}(\mathbf{q})) + \rho(h_{\phi}(\mathbf{q}) - m_{\lambda}(\mathbf{q}))$. The same conditional orthogonality removes the cross term, proving (20).

At $\lambda = 1$, the tracker query is the projectile, and **Thm. 1** identifies m_1 with the exact population scattering vector field $\mathbf{v}_{\theta}$. Suppress the condition and write $\epsilon_{\phi} = h_{\phi} - \mathbf{v}_{\theta}$. The conditional

expectation of G_ρ is then $\mathbf{v}_\theta + \rho \epsilon_\phi$. Whenever the Wasserstein chain rule is valid, the corresponding population flow satisfies

$$\frac{d}{dt} \mathcal{F}(P_t) = - \|\mathbf{v}_t\|_{L^2(P_t)}^2 - \rho \langle \mathbf{v}_t, \epsilon_{\phi,t} \rangle_{L^2(P_t)} \leq - \|\mathbf{v}_t\|_{L^2(P_t)} \left(\|\mathbf{v}_t\|_{L^2(P_t)} - \rho \|\epsilon_{\phi,t}\|_{L^2(P_t)} \right), \quad (21)$$

where the inequality is Cauchy–Schwarz. $\square$

At $\lambda = 1$, full oracle tracking replaces Y by $m_1 = \mathbb{E}[Y \mid \mathbf{x}_p, \mathbf{c}, \mathcal{H}]$, its Rao–Blackwellization with respect to $\sigma(\mathbf{x}_p, \mathbf{c}, \mathcal{H})$; this preserves the energy field and removes source-sampling variance but not projectile-sampling variance.

For any $\lambda \in [0, 1]$, define the projectile-conditioned source expectation $\bar{\mathbf{v}}_\lambda(\mathbf{x}_p, \mathbf{c}) = \mathbb{E}[Y \mid \mathbf{x}_p, \mathbf{c}, \mathcal{H}]$, which is the negative Wasserstein-gradient field of (11) before tracker conditioning. Then

$$\mathbb{E}[G_\rho \mid \mathbf{x}_p, \mathbf{c}, \mathcal{H}] = (1 - \rho) \bar{\mathbf{v}}_\lambda(\mathbf{x}_p, \mathbf{c}) + \rho \mathbb{E}[h_\phi(\mathbf{q}) \mid \mathbf{x}_p, \mathbf{c}, \mathcal{H}]. \quad (22)$$

For $\lambda < 1$, the query- and projectile-generated sigma-algebras are generally not nested, so even for an oracle tracker $h_\phi = m_\lambda$, the second conditional expectation in (22) need not equal $\bar{\mathbf{v}}_\lambda$. At $\lambda = 1$, $\mathbf{q} = (\mathbf{x}_p, \mathbf{c})$, so the two expectations coincide for an oracle tracker. Thus (20) remains exact around m_λ for every λ , but for $\lambda < 1$ it does not imply descent of either the energy distance or $\mathcal{F}_\lambda$ after generator pullback.

If mixing can depend on the query, (20) is minimized pointwise by $\rho^*(\mathbf{q}) = s_\lambda(\mathbf{q})/(s_\lambda(\mathbf{q}) + e_\phi(\mathbf{q}))$ whenever the denominator is positive, where $s_\lambda(\mathbf{q}) = \text{tr Var}(Y \mid \mathbf{q}, \mathcal{H})$ and $e_\phi(\mathbf{q}) = \|h_\phi(\mathbf{q}) - m_\lambda(\mathbf{q})\|_2^2$. For the query-independent weight used in the algorithm, let $S_\lambda = \mathbb{E}[s_\lambda(\mathbf{q}) \mid \mathcal{H}]$ and $E_\phi = \mathbb{E}[e_\phi(\mathbf{q}) \mid \mathcal{H}]$. When $S_\lambda + E_\phi > 0$, integrating (20) and minimizing its quadratic in ρ gives $\rho_{\text{const}}^* = S_\lambda/(S_\lambda + E_\phi)$ and minimum error $S_\lambda E_\phi/(S_\lambda + E_\phi)$. Thus full tracking ($\rho = 1$) improves on the instant target, relative to m_λ , precisely when its excess regression risk E_ϕ is below the residual target variance S_λ . At $\lambda = 1$, this residual is exactly the source-sampling noise around the energy-distance field. At this endpoint, (20) specializes to Cor. 1; in the oracle case, $E_\phi = 0$ and $\rho_{\text{const}}^* = 1$.

A two-draw tracker diagnostic. Fix $\lambda = 1$ and condition on a history $\mathcal{H}$. For each projectile query $\mathbf{q} = (\mathbf{x}_p, \mathbf{c})$, hold the generator, tracker, query, and $h_\phi(\mathbf{q})$ fixed while independently resampling two complete source pairs, producing conditionally iid targets Y_1, Y_2 . Then

$$S_1 = \frac{1}{2} \mathbb{E}[\|Y_1 - Y_2\|_2^2 \mid \mathcal{H}], \quad E_\phi = \mathbb{E}[\langle h_\phi(\mathbf{q}) - Y_1, h_\phi(\mathbf{q}) - Y_2 \rangle \mid \mathcal{H}]. \quad (23)$$

Indeed, conditional on $(\mathbf{q}, \mathcal{H})$, writing $Y_i = m_1(\mathbf{q}) + \xi_i$ with independent centered residuals gives the two identities after expansion and averaging over $\mathbf{q}$. Consequently, when $S_1 + E_\phi > 0$, the field-MSE-optimal constant mixture is $\rho_{\text{const}}^* = S_1/(S_1 + E_\phi)$, and full tracking has lower field MSE than the instant target exactly when $E_\phi < S_1$. Neither identity requires the unknown field m_1 , so when the required conditional redraws are available, paired Monte Carlo averages provide unbiased snapshot estimates of S_1 and E_ϕ . The resulting ratio is only a plug-in diagnostic (and may require clipping at finite sample size), not an unbiased estimate of ρ_{const}^* or a certificate of generator convergence or sample quality.

At $\lambda = 1$, the same orthogonal decomposition holds after the field is pulled back through the generator. Let $J = \nabla_\theta g_\theta(\mathbf{z}, \mathbf{c})$ and $\mathbf{v}(\mathbf{q}) = m_1(\mathbf{q})$. Assume $J^\top(Y - \mathbf{v}(\mathbf{q}))$ and $J^\top(h_\phi(\mathbf{q}) - \mathbf{v}(\mathbf{q}))$ are square integrable, and define, conditional on $\mathcal{H}$, $S_J = \mathbb{E}[\|J^\top(Y - \mathbf{v}(\mathbf{q}))\|_2^2 \mid \mathcal{H}]$ and $E_{J,\phi} = \mathbb{E}[\|J^\top(h_\phi(\mathbf{q}) - \mathbf{v}(\mathbf{q}))\|_2^2 \mid \mathcal{H}]$.

Corollary 2 (Generator-update tracker decomposition). *If $\mathbb{E}[Y - \mathbf{v}(\mathbf{q}) \mid \mathbf{q}, J, \mathcal{H}] = 0$, as ensured by the independent projectile and source draws in Alg. 2, then*

$$\mathbb{E}[\|J^\top(G_\rho - \mathbf{v}(\mathbf{q}))\|_2^2 \mid \mathcal{H}] = (1 - \rho)^2 S_J + \rho^2 E_{J,\phi}. \quad (24)$$

Proof. Conditional on $(\mathbf{q}, J, \mathcal{H})$, both J and $h_\phi(\mathbf{q}) - \mathbf{v}(\mathbf{q})$ are fixed. The assumed conditional-expectation identity makes the cross term vanish after multiplication by $J^\top$, proving (24). $\square$

Thus, when $S_J + E_{J,\phi} > 0$, the query-independent mixture minimizing the per-sample Jacobian-pullback error is $\rho_J^* = S_J/(S_J + E_{J,\phi})$; full tracking improves on the instant update exactly when $E_{J,\phi} < S_J$. This parameter-space criterion can differ from the output-space criterion because the generator Jacobian suppresses or amplifies different field directions.

E.3 POPULATION DISSIPATION AND IDEALIZED OPTIMIZATION GUARANTEES

E.3.1 EXACT-FLOW DISSIPATION

Let P_t solve $\partial_t P_t + \nabla \cdot (P_t \mathbf{v}_t) = 0$ with $\mathbf{v}_t = -\nabla(\delta\mathcal{F}/\delta P_t)$.

Whenever the 2-Wasserstein chain rule is valid,

$$\frac{d}{dt}\mathcal{F}(P_t) = - \int \|\mathbf{v}_t(\mathbf{x})\|_2^2 P_t(d\mathbf{x}) \leq 0. \quad (25)$$

Indeed, writing $\phi_t = \delta\mathcal{F}/\delta P_t$, the chain rule, continuity equation, and integration by parts give $\frac{d}{dt}\mathcal{F}(P_t) = \int \nabla \phi_t^\top \mathbf{v}_t dP_t = - \int \|\mathbf{v}_t\|_2^2 dP_t$. Consequently, for every $T > 0$,

$$\inf_{0 \leq t \leq T} \int \|\mathbf{v}_t\|_2^2 dP_t \leq \frac{1}{T} \int_0^T \int \|\mathbf{v}_t\|_2^2 dP_t dt \leq \frac{\mathcal{F}(P_0)}{T}. \quad (26)$$

This is field stationarity, not distributional or finite-generator convergence. Properness by itself is insufficient to rule out nonoptimal stationary measures, so the slope condition used below is substantive. A global slope inequality is not automatic because kernel discrepancies are generally not geodesically convex in Wasserstein geometry. Related Riesz-flow theory proves global exponential convergence in the Coulomb regime under regularity assumptions (Boufaden & Vialard, 2025) and local polynomial guarantees in higher-order Sobolev regimes under stronger assumptions (Chizat et al., 2026); neither directly supplies the energy-distance slope inequality used next.

E.3.2 TRACKED POPULATION FLOW

We now close the population-level chain for the exact energy-distance endpoint $\lambda = 1$. Let Q be fixed, write $\mathcal{F}(P) = \frac{1}{2}D_E^2(P, Q)$, and let $\mathbf{v}_t = -\nabla(\delta\mathcal{F}/\delta P_t)$ be its exact scattering field. For a fixed $\rho \in [0, 1]$, let h_t be the current population tracker, set $e_t = h_t - \mathbf{v}_t$, and suppose P_t solves the continuity equation with the mean mixed velocity $u_t = (1 - \rho)\mathbf{v}_t + \rho h_t = \mathbf{v}_t + \rho e_t$. Let R_t denote the population tracker risk from Sec. E.2 at P_t . The conditional-expectation projection gives $R_t(h_t) - R_t(\mathbf{v}_t) = \|e_t\|_{L^2(P_t)}^2$. In addition to the chain-rule regularity assumed above, suppose that along this trajectory there are constants $\gamma \in [0, 1)$, $c > 0$, and $q \geq 1$ such that

$$\rho \sqrt{R_t(h_t) - R_t(\mathbf{v}_t)} \leq \gamma \|\mathbf{v}_t\|_{L^2(P_t)}, \quad \|\mathbf{v}_t\|_{L^2(P_t)}^2 \geq c \mathcal{F}(P_t)^q \quad \text{for all } t \geq 0. \quad (27)$$

The first inequality directly controls tracker excess risk relative to field energy; the second is a trajectory-wise slope inequality, with exponential and polynomial regimes at $q = 1$ and $q > 1$, respectively.

Theorem 3 (Tracked population-flow convergence from excess risk). *Under the preceding assumptions, $\mathcal{F}(P_t) \rightarrow 0$ and hence $D_E(P_t, Q) \rightarrow 0$. If $\mathcal{F}(P_0) > 0$, the quantitative bound is*

$$\mathcal{F}(P_t) \leq \begin{cases} \mathcal{F}(P_0) \exp[-c(1 - \gamma)t], & q = 1, \\ [\mathcal{F}(P_0)^{1-q} + c(q - 1)(1 - \gamma)t]^{-1/(q-1)}, & q > 1. \end{cases} \quad (28)$$

Proof. Since $\mathbf{v}_t = -\nabla(\delta\mathcal{F}/\delta P_t)$, the Wasserstein chain rule and Cauchy–Schwarz give

$$\frac{d}{dt}\mathcal{F}(P_t) = -\langle \mathbf{v}_t, u_t \rangle_{L^2(P_t)} \leq -(1 - \gamma) \|\mathbf{v}_t\|_{L^2(P_t)}^2 \leq -c(1 - \gamma)\mathcal{F}(P_t)^q. \quad (29)$$

If $\mathcal{F}(P_0) > 0$, integrating this scalar differential inequality proves (28). If $\mathcal{F}(P_0) = 0$, the same inequality and nonnegativity imply $\mathcal{F}(P_t) = 0$ for all $t \geq 0$. In either case, properness and $D_E^2(P_t, Q) = 2\mathcal{F}(P_t)$ give the stated convergence. $\square$

Broader quantile-space analyses characterize negative-distance MMD flows on the real line (Duong et al., 2026); the following elementary bound isolates a sufficient slope regime for tracked convergence.

Proposition 1 (A concrete one-dimensional slope regime) . *Let P_t and Q be supported on a common finite interval $I \subset \mathbb{R}$, and suppose P_t has a density $p_t \geq m > 0$ almost everywhere on I , uniformly in t . Writing F_t and F_Q for their cumulative distribution functions, the exact energy-distance field satisfies*

$$\|\mathbf{v}_t\|_{L^2(P_t)}^2 = 4 \int_I (F_t - F_Q)^2 p_t dx \geq 4m \mathcal{F}(P_t). \quad (30)$$

Hence the slope condition in Thm. 3 holds with $q = 1$ and $c = 4m$; under the theorem’s remaining assumptions, $\mathcal{F}(P_t) \leq \mathcal{F}(P_0) \exp[-4m(1 - \gamma)t]$.

Proof. The one-dimensional energy-distance identity gives $D_E^2(P_t, Q) = 2 \int_I (F_t - F_Q)^2 dx$, and therefore $\mathcal{F}(P_t) = \int_I (F_t - F_Q)^2 dx$. Differentiating the first variation in (3) at Lebesgue-almost every x yields $\mathbf{v}_t(x) = 2(F_t(x) - F_Q(x))$. Integrating its square against p_t and using $p_t \geq m$ proves (30); the rate then follows from Thm. 3. $\square$

Meaning for tracker training. The first condition in (27) is a population-level certificate stated in the tracker’s own regression geometry: full tracking requires its root excess risk to remain below the field norm, while mixing by $\rho < 1$ attenuates tracker error. The algorithm alone does not guarantee that a finite neural tracker maintains this relative certificate as the signal vanishes. Absolute-error neighborhoods, smoothing, reweighting, and corridor conditioning are unified by Prop. 6 below.

E.3.3 FINITE-GENERATOR REFERENCE RECURSION

The results below analyze the stated first-order stochastic recursion and isolate how field-estimation error enters. They do not cover AdamW momentum or preconditioning or the $\lambda < 1$ corridor dynamics, and they do not establish the displayed bias and variance conditions for EMA-evolving quantities or the jointly trained tracker.

Suppose the parameterized objective $\mathcal{F}(\theta)$ is lower bounded by $\mathcal{F}_*$ and L -smooth, with $L > 0$, on a region containing every update segment between θ_t and θ_{t+1} . Let $\mathcal{H}_t$ be the history before iteration t , and absorb any fixed algorithmic loss scaling into the learning rate. Write the parameter update as $\theta_{t+1} = \theta_t - \eta_t g_t$ and assume $\mathbb{E}[g_t | \mathcal{H}_t] = \nabla \mathcal{F}(\theta_t) + b_t$ and $\mathbb{E}[\|g_t - \mathbb{E}[g_t | \mathcal{H}_t]\|_2^2 | \mathcal{H}_t] \leq \sigma^2$. Here b_t collects systematic field-estimation error, while σ^2 controls the residual stochastic variation.

Proposition 2 (Optimization with finite field-estimation error) . *For constant step size $\eta_t = \eta \leq 1/L$, the stochastic update satisfies*

$$\min_{0 \leq t < T} \mathbb{E}[\|\nabla_{\theta} \mathcal{F}(\theta_t)\|_2^2] \leq \frac{2(\mathcal{F}(\theta_0) - \mathcal{F}_*)}{\eta T} + L\eta\sigma^2 + \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\|b_t\|_2^2]. \quad (31)$$

Proof. Let $a_t = \nabla \mathcal{F}(\theta_t)$, $\bar{g}_t = \mathbb{E}[g_t | \mathcal{H}_t] = a_t + b_t$, and let $\mathbb{E}_t$ condition on $\mathcal{H}_t$. By L -smoothness,

$$\begin{aligned} \mathbb{E}_t[\mathcal{F}(\theta_{t+1})] &\leq \mathcal{F}(\theta_t) - \eta \langle a_t, \bar{g}_t \rangle + \frac{L\eta^2}{2} \mathbb{E}_t[\|g_t\|_2^2] \\ &\leq \mathcal{F}(\theta_t) - \frac{\eta}{2} \|a_t\|_2^2 + \frac{\eta}{2} \|b_t\|_2^2 + \frac{L\eta^2\sigma^2}{2}, \end{aligned} \quad (32)$$

where the second inequality uses $-\langle a_t, \bar{g}_t \rangle = (\|b_t\|_2^2 - \|a_t\|_2^2 - \|\bar{g}_t\|_2^2)/2$, $\mathbb{E}_t \|g_t\|_2^2 \leq \|\bar{g}_t\|_2^2 + \sigma^2$, and $\eta \leq 1/L$. Taking expectations, summing over $t = 0, \dots, T-1$, and using $\mathcal{F}(\theta_T) \geq \mathcal{F}_*$ proves (31). $\square$

Under the local-gradient regularity conditions of Thm. 1, exact bearings have $b_t = 0$ relative to $\mathcal{F}$; at $\lambda = 1$, smoothed bearings likewise have $b_t = 0$ relative to $\mathcal{F}_\varepsilon$. For the exact-bearing tracked

algorithm at $\lambda = 1$, let $e_t(\mathbf{x}, \mathbf{c}) = h_{\phi,t}(\mathbf{x}, \mathbf{c}) - \mathbf{v}_t(\mathbf{x}, \mathbf{c})$. The conditional expectation is $\mathbf{v}_t + \rho e_t$, so the parameter-gradient bias in [Prop. 2](#) is $b_t = -\rho \mathbb{E}[J_t^\top e_t \mid \mathcal{H}_t]$, where $J_t = \nabla_{\theta} g_{\theta_t}(\mathbf{z}_t, \mathbf{c}_t)$. Jensen's inequality gives $\|b_t\|_2^2 \leq \rho^2 \mathbb{E}[\|J_t^\top e_t\|_2^2 \mid \mathcal{H}_t]$. Combining this estimate with (31) makes the Jacobian-weighted dependence explicit:

$$\min_{0 \leq t \leq T} \mathbb{E}[\|\nabla_{\theta} \mathcal{F}(\theta_t)\|_2^2] \leq \frac{2(\mathcal{F}(\theta_0) - \mathcal{F}_*)}{\eta T} + L\eta\sigma^2 + \frac{\rho^2}{T} \sum_{t=0}^{T-1} \mathbb{E}[\|J_t^\top e_t\|_2^2]. \quad (33)$$

If $\|J_t\|_{\text{op}} \leq \kappa_J$ almost surely, the final term is further bounded by $\rho^2 \kappa_J^2 T^{-1} \sum_t \mathbb{E}[\|e_t\|_2^2]$. Thus the Jacobian-weighted tracker error in [Cor. 2](#) controls the optimization neighborhood; under the operator-norm bound, the output-space excess risk in [Thm. 2](#) does as well. An oracle tracker eliminates this term, but residual stochastic variance σ^2 may remain. At $\lambda \neq 1$, intra-source reweighting changes the reference objective from $\mathcal{F}$ to $\mathcal{F}_\lambda$, and query conditioning can change the mean direction even relative to $\mathcal{F}_\lambda$. Choosing $\mathcal{F}_\varepsilon$ as the reference removes smoothing bias at $\lambda = 1$; relative to the unsmoothed $\mathcal{F}$, the field difference enters through b_t when bounded.

Under explicit additional assumptions, this reference recursion also yields an expected convergence result. Consider the exact-bearing $\lambda = 1$ objective, assume the target is realizable, i.e., some θ^* satisfies $\mathcal{F}(\theta^*) = 0$, and suppose the parameterized objective satisfies $\|\nabla \mathcal{F}(\theta)\|_2^2 \geq 2\mu \mathcal{F}(\theta)$ with $\mu > 0$ throughout the training region. Assume also that $\|b_t\|_2 \leq \chi \|\nabla \mathcal{F}(\theta_t)\|_2$ almost surely for some $\chi < 1$. For tracked scattering, the stronger but directly interpretable condition $\rho^2 \mathbb{E}[\|J_t^\top e_t\|_2^2 \mid \mathcal{H}_t] \leq \chi^2 \|\nabla \mathcal{F}(\theta_t)\|_2^2$ is sufficient by Jensen's inequality. Let positive deterministic step sizes satisfy $\eta_t \leq \min\{(1 - \chi)/(L(1 + \chi)^2), [\mu(1 - \chi)]^{-1}\}$.

Corollary 3 (Finite-generator convergence under PL and relative tracking) . *Under the preceding assumptions, if $\sum_t \eta_t = \infty$ and $\sum_t \eta_t^2 < \infty$, then*

$$\mathbb{E}[\mathcal{F}(\theta_{t+1}) \mid \mathcal{H}_t] \leq [1 - \mu(1 - \chi)\eta_t] \mathcal{F}(\theta_t) + \frac{L\eta_t^2 \sigma^2}{2}. \quad (34)$$

Consequently, $\mathbb{E}[D_E^2(P_{\theta_t}, Q)] \rightarrow 0$.

Proof. Write $a_t = \nabla \mathcal{F}(\theta_t)$. The relative-bias condition gives $\langle a_t, a_t + b_t \rangle \geq (1 - \chi) \|a_t\|_2^2$ and $\|a_t + b_t\|_2^2 \leq (1 + \chi)^2 \|a_t\|_2^2$. Applying L -smoothness as in the proof of [Prop. 2](#) and using the step-size bound therefore yields

$$\mathbb{E}[\mathcal{F}(\theta_{t+1}) \mid \mathcal{H}_t] \leq \mathcal{F}(\theta_t) - \frac{(1 - \chi)\eta_t}{2} \|a_t\|_2^2 + \frac{L\eta_t^2 \sigma^2}{2}. \quad (35)$$

The parameter-space PL inequality proves (34). After taking expectations, set $x_t = \mathbb{E}[\mathcal{F}(\theta_t)]$, $a = \mu(1 - \chi)$, and $d = L\sigma^2/2$. Then $x_t + d \sum_{k=t}^{\infty} \eta_k^2$ decreases by at least $a\eta_t x_t$; convergence of this sequence, the vanishing tail, and $\sum_t \eta_t = \infty$ force $x_t \rightarrow 0$. Finally, $D_E^2(P_{\theta_t}, Q) = 2\mathcal{F}(\theta_t)$. $\square$

The same proof applies to $\mathcal{F}_\varepsilon$ under the corresponding smoothness, realizability, PL, and relative-tracking assumptions, yielding $\mathbb{E}[\mathcal{F}_\varepsilon(\theta_t)] \rightarrow 0$.

Interpretation. The unconstrained exact and smoothed $\lambda = 1$ energies have the unique optimum $P = Q$; [Thm. 3](#) and its smoothed counterpart show that sufficiently accurate tracking preserves convergence whenever the corresponding flow satisfies the stated slope condition. A finite generator instead restricts the reachable distributions to $\{(g_\theta)_\# p(\mathbf{z})\}$, and SGD optimizes a nonconvex parameterization; finite tracking, corridor conditioning, intra-source reweighting, and the choice of comparison geometry separate deployment from the exact full-space flow. Accordingly, within this reference recursion, (31) gives a finite-error stationarity bound, while [Cor. 3](#) obtains expected energy-distance convergence only after adding realizability, parameter-space PL geometry, relative tracker accuracy, and diminishing step sizes.

E.4 ADDITIONAL ESTIMATOR PROPERTIES

E.4.1 SOURCE-LAW NECESSITY AND VARIANCE OPTIMALITY

Fix a projectile $\mathbf{x}_p$ and let $\beta_{\mathbf{x}_p}(\mathbf{y}) = (\mathbf{y} - \mathbf{x}_p) / \|\mathbf{y} - \mathbf{x}_p\|$ away from coincidence and zero at coincidence. For independent $\mathbf{x}_r \sim Q$ and $\mathbf{x}_s \sim P$, define $T = \beta_{\mathbf{x}_p}(\mathbf{x}_r) - \beta_{\mathbf{x}_p}(\mathbf{x}_s)$ and $\mathbf{v}_P(\mathbf{x}_p) = \mathbb{E}[T]$. Consider square-integrable source-sampling rules whose measurable form and auxiliary-randomness law do not depend on the unknown (P, Q) ; call such a rule universally unbiased when its expectation equals $\mathbf{v}_P(\mathbf{x}_p)$ for every (P, Q) .

Proposition 3 (Source-law necessity and Rao–Blackwell optimality) . *No universally unbiased rule can omit either source law entirely. Among rules observing one independent draw from each law, T is the unique deterministic universally unbiased rule and minimizes covariance in the positive-semidefinite order; hence also mean-squared error, among randomized universally unbiased rules. For the average $\bar{T}_K$ of K independent copies,*

$$\mathbb{E} \left[\|\bar{T}_K - \mathbf{v}_P(\mathbf{x}_p)\|_2^2 \right] = \frac{\text{tr Cov}_Q(\beta_{\mathbf{x}_p}) + \text{tr Cov}_P(\beta_{\mathbf{x}_p})}{K} \leq \frac{2}{K}. \quad (36)$$

Proof. Without a draw from P (respectively Q), a rule’s expectation cannot vary with that law, and two point masses with different bearings contradict universal unbiasedness. For any randomized one-draw-per-law rule A , taking $Q = \delta_r$ and $P = \delta_s$ forces $\mathbb{E}[A \mid \mathbf{x}_r, \mathbf{x}_s] = T$ pointwise. Hence $\text{Cov}(A) = \text{Cov}(T) + \mathbb{E}[\text{Cov}(A \mid \mathbf{x}_r, \mathbf{x}_s)]$, proving the optimality and deterministic uniqueness claims. Independence gives the variance identity, averaging supplies $1/K$, and each covariance trace is at most one because a bearing has norm at most one. $\square$

Also $\|T\|_2 \leq 2$ almost surely. With zero collision probability, the numerator in (36) equals $2 - \|\mathbb{E}_{\mathbf{x}_r \sim Q} [\beta_{\mathbf{x}_p}(\mathbf{x}_r)]\|_2^2 - \|\mathbb{E}_{\mathbf{x}_s \sim P} [\beta_{\mathbf{x}_p}(\mathbf{x}_s)]\|_2^2$. The source-law statement concerns universal dependence on both laws, not whether every randomized realization must query both.

E.5 IMPLEMENTATION AND INTERPRETIVE DERIVATIONS

E.5.1 DENOMINATOR SMOOTHING AS A PROPER OBJECTIVE

Related work constructs differentiable approximations of negative-distance kernels for Wasserstein gradient flows (Rux et al., 2026); here we analyze the denominator form used in our implementation. For $\varepsilon > 0$, define $\psi_\varepsilon(r) = r - \varepsilon \log(1 + r/\varepsilon)$ and let $\mathcal{F}_\varepsilon$ be (15) with every distance r replaced by $\psi_\varepsilon(r)$.

Proposition 4 (Proper objective induced by denominator smoothing) . *Wherever the first variation is valid, the denominator-smoothed $\lambda = 1$ field satisfies*

$$\mathbf{v}_\varepsilon(\mathbf{x}) = \mathbb{E}_{\mathbf{x}_r \sim Q} \left[\frac{\mathbf{x}_r - \mathbf{x}}{\|\mathbf{x}_r - \mathbf{x}\|_2 + \varepsilon} \right] - \mathbb{E}_{\mathbf{x}_s \sim P} \left[\frac{\mathbf{x}_s - \mathbf{x}}{\|\mathbf{x}_s - \mathbf{x}\|_2 + \varepsilon} \right] = -\nabla_{\mathbf{x}} \frac{\delta \mathcal{F}_\varepsilon}{\delta P}(\mathbf{x}). \quad (37)$$

Moreover, $\mathcal{F}_\varepsilon(P) \geq 0$ and, under finite first moments, equality holds if and only if $P = Q$.

Proof. Since $\psi'_\varepsilon(r) = r/(r + \varepsilon)$, $\nabla_{\mathbf{x}} \psi_\varepsilon(\|\mathbf{x} - \mathbf{y}\|_2) = (\mathbf{x} - \mathbf{y})/(\|\mathbf{x} - \mathbf{y}\|_2 + \varepsilon)$, with zero gradient at coincidence. Applying this identity to the first variation proves (37); the frozen-target pullback gives the corresponding local parameter gradient.

For properness, write $\psi_\varepsilon(\sqrt{t}) = f_\varepsilon(t)$. Because $e^{-u\sqrt{t}}$ is completely monotone in t , the identity $(\sqrt{t} + \varepsilon)^{-1} = \int_0^\infty e^{-u\varepsilon} e^{-u\sqrt{t}} du$ shows that $f'_\varepsilon(t) = 1/[2(\sqrt{t} + \varepsilon)]$ is also completely monotone. Since $f_\varepsilon(0) = 0$, $f_\varepsilon(t)/t \rightarrow 0$ as $t \rightarrow \infty$, and f_ε is nonconstant, the Bernstein-function representation theorem (Schilling et al., 2012) gives a Lévy–Khintchine representation with neither constant nor linear term: $f_\varepsilon(t) = \int_{(0, \infty)} (1 - e^{-st}) \nu_\varepsilon(ds)$ for a nonzero positive Lévy measure ν_ε . Consequently, $2\mathcal{F}_\varepsilon(P) = \int_{(0, \infty)} \text{MMD}_{k_s}^2(P, Q) \nu_\varepsilon(ds)$ with Gaussian kernels $k_s(\mathbf{x}, \mathbf{y}) = e^{-s\|\mathbf{x} - \mathbf{y}\|_2^2}$. Each k_s is

characteristic for $s > 0$, proving nonnegativity and identity of indiscernibles; finite first moments suffice because $0 \leq \psi_\varepsilon(r) \leq r$. $\square$

The map $\mathbf{a} \mapsto \mathbf{a}/(\|\mathbf{a}\|_2 + \varepsilon)$ is globally $1/\varepsilon$ -Lipschitz. Consequently, $\mathbf{v}_\varepsilon$ is $2/\varepsilon$ -Lipschitz in its spatial argument and $1/\varepsilon$ -Lipschitz in P under W_1 ; for fixed Q , the associated McKean–Vlasov characteristic dynamics are therefore well posed under finite first moments. The smoothed source estimator remains conditionally unbiased for $\mathbf{v}_\varepsilon$; hence the frozen-target, tracker-decomposition, and tracked-convergence arguments apply with $(\mathcal{F}, \mathbf{v})$ replaced by $(\mathcal{F}_\varepsilon, \mathbf{v}_\varepsilon)$ under the corresponding chain-rule and slope assumptions. Replacing the model–model coefficient by λ gives the analogous smoothed λ -weighted functional; before corridor conditioning, its negative-gradient field equals the corresponding source mean. The properness claim above is specific to $\lambda = 1$. Away from coincidence, the exact and smoothed source bearings differ in norm by $\varepsilon/(\|\mathbf{y} - \mathbf{x}\|_2 + \varepsilon)$; both are zero at coincidence. Therefore

$$\|\mathbf{v}_\varepsilon(\mathbf{x}) - \mathbf{v}(\mathbf{x})\|_2 \leq \mathbb{E}_{\mathbf{x}_r \sim Q} \left[\frac{\varepsilon \mathbf{1}\{\mathbf{x}_r \neq \mathbf{x}\}}{\|\mathbf{x}_r - \mathbf{x}\|_2 + \varepsilon} \right] + \mathbb{E}_{\mathbf{x}_s \sim P} \left[\frac{\varepsilon \mathbf{1}\{\mathbf{x}_s \neq \mathbf{x}\}}{\|\mathbf{x}_s - \mathbf{x}\|_2 + \varepsilon} \right] \rightarrow 0 \quad (\varepsilon \downarrow 0). \quad (38)$$

The convergence follows by dominated convergence; if both source distances are at least $\delta > 0$, the bound is at most $2\varepsilon/(\delta + \varepsilon)$. Thus smoothing retains a proper objective while changing its geometry, and its field converges pointwise to the exact bearing field as $\varepsilon \downarrow 0$.

E.5.2 NEAR-ENDPOINT SURROGATE CONTROL

Let ψ be either the exact potential $\psi(r) = r$ or the smoothed potential ψ_ε above, and define $\beta_\psi(\mathbf{a}) = \psi'(\|\mathbf{a}\|_2)\mathbf{a}/\|\mathbf{a}\|_2$ away from zero and $\beta_\psi(0) = 0$. In both cases $\|\beta_\psi\|_2 \leq 1$, and

$$\begin{aligned} D_\psi^2(P, Q) &= 2\mathbb{E}[\psi(\|\mathbf{x} - \mathbf{y}\|_2)] - \mathbb{E}[\psi(\|\mathbf{x} - \mathbf{x}'\|_2)] - \mathbb{E}[\psi(\|\mathbf{y} - \mathbf{y}'\|_2)], \\ \mathcal{F}_{\psi, \lambda}(P; Q) &= \mathbb{E}[\psi(\|\mathbf{x} - \mathbf{y}\|_2)] - \frac{\lambda}{2}\mathbb{E}[\psi(\|\mathbf{x} - \mathbf{x}'\|_2)], \end{aligned}$$

where $\mathbf{x}, \mathbf{x}' \sim P$ and $\mathbf{y}, \mathbf{y}' \sim Q$ are independent. The discrepancy D_ψ^2 is proper for either choice of ψ . Write $\mathbf{v}_{\psi, \lambda}(\mathbf{x}) = \mathbb{E}_{\mathbf{y} \sim Q}[\beta_\psi(\mathbf{y} - \mathbf{x})] - \lambda \mathbb{E}_{\mathbf{x}' \sim P}[\beta_\psi(\mathbf{x}' - \mathbf{x})]$ for the corresponding source-mean field before tracker conditioning.

The instant attraction-only endpoint. For $\lambda = 0$, define $f_{\psi, Q}(\mathbf{x}) = \mathbb{E}_{\mathbf{y} \sim Q}[\psi(\|\mathbf{x} - \mathbf{y}\|_2)]$ and $M_\psi(Q) = \arg \min_{\mathbf{x} \in \mathbb{R}^d} f_{\psi, Q}(\mathbf{x})$. If Q has a finite first moment, continuity and coercivity make $M_\psi(Q)$ nonempty for either admissible potential, and

$$\mathcal{F}_{\psi, 0}(P; Q) = \int f_{\psi, Q}(\mathbf{x}) P(d\mathbf{x})$$

is minimized exactly by laws supported on $M_\psi(Q)$. For $\psi(r) = r$, this is the geometric-median set; if it is a singleton $\{\mathbf{x}^*\}$, the unique minimizer is $\delta_{\mathbf{x}^*}$ rather than Q , unless Q is already that point mass. Thus the instant $\rho = 0, \lambda = 0$ objective is generally not proper without generated-source repulsion. This characterization concerns the functional before corridor conditioning and does not characterize the tracked $\rho > 0$ update.

Proposition 5 (Controlled intra-source reweighting) . *Before corridor conditioning, the source-mean field $\mathbf{v}_{\psi, \lambda}$ obeys $\|\mathbf{v}_{\psi, \lambda}(\mathbf{x}) - \mathbf{v}_{\psi, 1}(\mathbf{x})\|_2 \leq 1 - \lambda$. Moreover, if $\delta \geq 0$ and $\mathcal{F}_{\psi, \lambda}(P; Q) \leq \mathcal{F}_{\psi, \lambda}(Q; Q) + \delta$, then*

$$D_\psi^2(P, Q) \leq (1 - \lambda)\mathbb{E}[\psi(\|\mathbf{y} - \mathbf{y}'\|_2)] + 2\delta. \quad (39)$$

Proof. The field difference is $(1 - \lambda)\mathbb{E}_{\mathbf{x}' \sim P}[\beta_\psi(\mathbf{x}' - \mathbf{x})]$, proving the uniform bound. Also, $\mathcal{F}_{\psi, \lambda}(P; Q) = \frac{1}{2}D_\psi^2(P, Q) + \frac{1}{2}\mathbb{E}[\psi(\|\mathbf{y} - \mathbf{y}'\|_2)] + \frac{1-\lambda}{2}\mathbb{E}[\psi(\|\mathbf{x} - \mathbf{x}'\|_2)]$. Comparing this identity at P and Q and dropping the nonnegative model–model term proves (39). $\square$

Consequently, if $\lambda_n \uparrow 1$, $\delta_n \rightarrow 0$, and $\mathcal{F}_{\psi, \lambda_n}(P_n; Q) \leq \mathcal{F}_{\psi, \lambda_n}(Q; Q) + \delta_n$, then $D_\psi(P_n, Q) \rightarrow 0$; this includes global minimizers whenever they exist.

For the full mixed target, let $Y_{\psi,\lambda}$ denote the instant vector, retain the query $\mathbf{q}$ and history $\mathcal{H}$ from [Sec. E.2](#), and write $m_\lambda(\mathbf{q}) = \mathbb{E}[Y_{\psi,\lambda} \mid \mathbf{q}, \mathcal{H}]$ and $\bar{\mathbf{v}}_{\psi,\lambda}(\mathbf{x}) = \mathbb{E}[Y_{\psi,\lambda} \mid \mathbf{x}, \mathcal{H}] = \mathbf{v}_{\psi,\lambda}(\mathbf{x})$. Define the tracker excess risk $E_\phi = \mathbb{E}[\|h_\phi(\mathbf{q}) - m_\lambda(\mathbf{q})\|_2^2 \mid \mathcal{H}]$ and the oracle corridor mismatch $C_\lambda = \|\mathbb{E}[m_\lambda(\mathbf{q}) \mid \mathbf{x}, \mathcal{H}] - \bar{\mathbf{v}}_{\psi,\lambda}(\mathbf{x})\|_{L^2(P)}$. Let $u_\rho(\mathbf{x}) = \mathbb{E}[G_\rho \mid \mathbf{x}, \mathcal{H}]$ be the mean mixed field.

Proposition 6 (Stability of the deployed mixed field) . *The deviation from the proper endpoint field satisfies*

$$\|u_\rho - \mathbf{v}_{\psi,1}\|_{L^2(P)} \leq \underbrace{(1 - \lambda) + \rho(C_\lambda + \sqrt{E_\phi})}_{\Delta}. \quad (40)$$

Proof. The exact decomposition is $u_\rho - \mathbf{v}_{\psi,1} = (\bar{\mathbf{v}}_{\psi,\lambda} - \mathbf{v}_{\psi,1}) + \rho\mathbb{E}[h_\phi(\mathbf{q}) - m_\lambda(\mathbf{q}) \mid \mathbf{x}, \mathcal{H}] + \rho(\mathbb{E}[m_\lambda(\mathbf{q}) \mid \mathbf{x}, \mathcal{H}] - \bar{\mathbf{v}}_{\psi,\lambda})$. Apply conditional L^2 contraction and [Prop. 5](#). $\square$

At $\lambda = 1$, the query is the projectile and $C_1 = 0$; for $\lambda < 1$, C_λ isolates the bias caused by conditioning on the corridor rather than the projectile. Along a flow, let Δ_t denote the right-hand side of (40) and write $\mathcal{F}_\psi(P) = \frac{1}{2}D_\psi^2(P, Q)$. Under the corresponding chain rule and linear slope $\|\mathbf{v}_{\psi,1,t}\|_{L^2(P_t)}^2 \geq c\mathcal{F}_\psi(P_t)$, Young's inequality yields

$$\mathcal{F}_\psi(P_t) \leq e^{-ct/2}\mathcal{F}_\psi(P_0) + \frac{1}{2}\int_0^t e^{-c(t-s)/2}\Delta_s^2 ds. \quad (41)$$

Hence bounded $\Delta_t \rightarrow 0$ gives $D_\psi(P_t, Q) \rightarrow 0$, while $\sup_t \Delta_t \leq \bar{\Delta}$ gives $\limsup_{t \rightarrow \infty} \mathcal{F}_\psi(P_t) \leq \bar{\Delta}^2/c$. If instead $\Delta_t \leq \gamma\|\mathbf{v}_{\psi,1,t}\|_{L^2(P_t)}$ for some $\gamma < 1$, the argument of [Thm. 3](#) gives exact convergence under its remaining assumptions. Thus (39) controls the weighted objective, while (41) quantifies stability of the deployed flow around the proper endpoint.

E.5.3 LINE-INTEGRAL INTERPRETATION OF THE DISPLACEMENT TRACKER

For the modified displacement analogue in [Sec. 2.5](#), let $\mathbf{v}_\phi = \nabla u_\phi$, $\Delta = \mathbf{x}_r - \mathbf{x}_p$, and $\mathbf{x}_\alpha = (1 - \alpha)\mathbf{x}_p + \alpha\mathbf{x}_r$. The fundamental theorem for line integrals gives

$$\int_0^1 \nabla_{\mathbf{x}} u_\phi(\mathbf{x}_\alpha, \mathbf{c})^\top \Delta d\alpha = u_\phi(\mathbf{x}_r, \mathbf{c}) - u_\phi(\mathbf{x}_p, \mathbf{c}). \quad (42)$$

Expanding $\mathbb{E}[\|\nabla u_\phi(\mathbf{x}_\alpha, \mathbf{c}) - \Delta\|_2^2]$ for $\alpha \sim \mathcal{U}(0, 1)$ and applying this identity gives (13); the remaining $\mathbb{E}[\|\Delta\|_2^2]$ is constant for fixed generator parameters. Hence displacement regression maximizes the real-generated potential gap minus one half of the corridor-averaged squared gradient norm. The infimum over conservative fields is characterized by the L^2 projection of $\mathbb{E}[\Delta \mid \mathbf{x}_\alpha, \mathbf{c}]$ onto their closure under the corridor measure; a finite network is further restricted by its parameterization. This is not an identity for the deployed unit-bearing update, and a general vector tracker retains the conditional-expectation decomposition but not the scalar line-integral interpretation.