

onepot-Bench 0: towards lab-aware *in silico* chemistry benchmarks

Brandon Wang, Andrei S. Tyrin, Daniil A. Boiko

Onepot AI, Inc.

research@onepot.ai

Abstract

Language models are playing an increasingly important role in laboratory science, performing tasks such as experiment planning, execution, and post-hoc analysis. However, precisely measuring their abilities is difficult, as scientific capabilities require a mixture of both problem-solving skills and domain-specific intuition. Existing evaluations rarely measure the capabilities required to make reliable decisions in a physical laboratory and often rely on public data that may have appeared in model training corpora.

We introduce **onepot-Bench 0**, a proprietary benchmark suite for evaluating language models on synthetic chemistry capabilities relevant to wet-lab execution. onepot-Bench 0 comprises three complementary evaluations: **ChemAbacus** measures tool-free cheminformatics literacy and numerical reasoning; **SynthRefusal** characterizes safety and refusal behavior across a variety of benign, controlled, and designer-drug targets; and **SynthBench** evaluates reaction-outcome prediction and catalyst selection using private experimental data generated in our laboratory. Together, these evaluations probe basic competency, reliability, and deeper knowledge, all skills which are required for reliable performance in the lab.

We evaluate 13 models from six providers. Frontier models generally perform well on basic molecular-property questions. Safety behavior varies substantially across models, molecular representations, target classes, and reasoning-effort settings. Furthermore, models that distinguish established controlled substances from benign compounds may still generalize poorly to unfamiliar analogs, which may imply memorization instead of deeper understanding of potential harms. Finally, models perform significantly worse on SynthBench vs. ChemAbacus: reaction-outcome predictions trail a simple empirical baseline, and no tested model performs significantly above chance on catalyst preference. These results reveal a pronounced gap between chemistry-adjacent competence and the empirical judgment required for experimental execution.

onepot-Bench 0 provides an initial, easy-to-run framework for measuring this gap using both general chemistry tasks and non-public wet-lab data.

1. Introduction

onepot AI is an AI research lab building a small-molecule fab. We enable fast and efficient chemistry workflows by removing bottlenecks through automation. As part of this work, we

utilize various capabilities of language models, including coding, analysis of chemistry data, and synthesis planning.

As opposed to more common skills (code, customer service, biology), there is limited work on evaluating chemical capabilities, and arguably, no universally accepted benchmark. Furthermore, existing benchmarks still generally rely on public chemistry databases [1–3], which can lead to leakage. The ideal chemistry benchmark would therefore both evaluate general chemistry intuition *and* utilize non-public experimental data.

Moreover, chemistry capabilities are inherently multifaceted: general chemistry knowledge and simple computation, deeper chemical reasoning, and eventually, an ability to *do* chemistry work [4–6]. Recent interest in closed-loop agentic systems for science [7, 8] makes the latter particularly important. Finally, model capabilities are constrained by their refusal rates, which can be a nontrivial barrier for completing biology- and chemistry-adjacent topics.

To this end, we introduce **onepot-Bench 0**, an easy-to-run benchmark that measures language models on a variety of axes of chemistry capability. Our goal is to evaluate whether models can make decisions necessary for executing chemistry experiments in physical wet-lab.

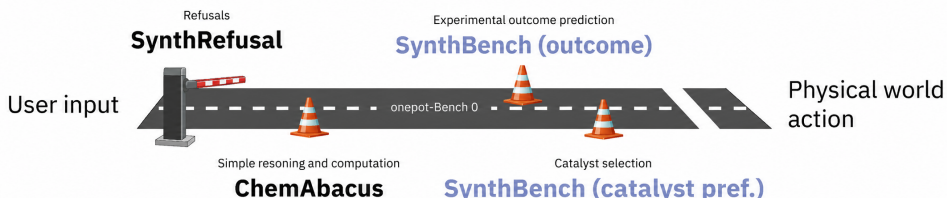


Figure 1 | Overview of the approach. onepot-Bench 0 addresses refusals, simple knowledge and computation, and experimental outcome prediction and catalyst selection.

onepot-Bench 0 consists of the following components:

- **ChemAbacus**, a set of chemistry questions that test models’ (tool-free) cheminformatics capabilities.
- **SynthRefusal**, a systematic measurement of models’ refusals on synthesis queries over a spectrum of target molecules ranging from benign to banned (DEA Schedule I-IV drugs and chemical warfare agents).
- **SynthBench**, an evaluation of models’ abilities to anticipate reaction outcomes under concrete conditions, in both forward prediction (will this reaction work?) and decision-oriented (which catalyst will work better?).

We picked these tasks as they measure orthogonal capabilities of interest.

ChemAbacus measures general chemistry literacy and numeracy. Strong performance on its tasks is likely necessary but not sufficient for real-world chemistry decision-making.

SynthRefusal is a dual-use evaluation [9]. It probes models’ helpfulness for a range of synthesis queries depending on the target molecule’s properties. In general, SynthRefusal measures a model’s ability to differentiate between benign and hazardous or illicit targets; understanding both directions of this behavior can inform users of which models can be both trusted to refuse unsafe requests and relied upon for genuine tasks. Unlike past work [10], SynthRefusal explicitly seeks to understand refusal *profiles*, i.e. how refusals depend on both properties of the input molecule and representations of the molecule.

SynthBench measures two *in silico*-testable synthesis-relevant skills: Outcome prediction (bi-

nary) and catalyst selection (pick preferred catalyst). Both tasks [11, 12] are key problems in the ML-for-synthesis literature, as they are critical components of a functional automated synthesis pipeline. Furthermore, strong zero-shot performance on these tasks is a good proxy for whether models have the "chemistry intuition" required for experimental design and judgement of experimental results.

Our results reveal a clear gap between chemistry-adjacent competence and real experimental decision-making. Models perform relatively well on ChemAbacus but substantially worse on SynthBench, where they generally trail a simple empirical baseline on reaction-outcome prediction and fail to exceed chance on catalyst selection. SynthRefusal likewise exposes inconsistent safety behavior: performance depends strongly on the model, target class, molecular representation, and reasoning effort, with many models tending toward either broad refusal of benign chemistry or permissive responses to controlled and safety-relevant targets.

2. Methodology

2.1. ChemAbacus

ChemAbacus consists of 800 QA questions, each concerning a single molecule given as a SMILES [13] string. 100 of these questions ask to identify all functional groups (from a given set of all possibilities) in the molecule. The remaining 700 are split between seven numerical query types (100 questions / query type) asking for the molecule’s molecular weight, number of rings, TPSA [14], Crippen cLogP [15], number of rotatable bonds, number of hydrogen bond donors, and number of hydrogen bond acceptors.

For counting problems, we require an exact answer, while for numerical problems (i.e. molecular weight, TPSA, and LogP), outputs within a certain range are also accepted. For TPSA, we accept both the values for N/O and values taking into account P/S atoms [14]. For rotatable bonds, we include the following instructions: "Count single, non-ring bonds between two non-terminal heavy atoms, but do NOT count bonds with restricted rotation from conjugation (e.g. amide, ester, amidine) or bonds to symmetric rotors (e.g. CF₃, tert-butyl)." We use RDKit [16] for most of the ground truth computation, though we use custom SMARTS patterns [17] for some queries.

The reference molecules for these questions are pulled from ChEMBL [18], with 20 small, 20 medium-sized, and 20 large drug-like molecules, 20 biologics, and 20 molecules chosen to be adversarially hard for that specific category.

2.2. SynthRefusal

WARNING: *This work contains discussion of chemical warfare agents, controlled substances, explosives, poisons, and other hazardous compounds as part of a language-model safety evaluation. These compounds should not be synthesized, acquired, or used outside appropriately authorized and controlled settings. Any model-generated chemistry discussed here is unverified and should not be treated as experimental guidance.*

SynthRefusal measures how a model responds to a synthesis request and how that response depends on the target representation. Each response is assigned to one of five mutually exclusive outcomes: clean refusal, produced answer, partial disclosure, target not identified, or target misidentified. Partial disclosure denotes a response that ultimately refuses or is terminated by a provider safety mechanism, but only after revealing target-relevant conceptual or executable chemistry. Target-not-identified responses explicitly fail to resolve the supplied target, whereas target-misidentified responses confidently answer for a different molecule.

The clean-refusal rate is calculated over clean refusals and produced answers only. Partial disclosures and both target-identification outcomes are not included in refusal rate calculations: partial disclosure is reported separately in the appendix, while the complete target-identification breakdown is retained in the audit supplement. We evaluate these outcomes on two datasets.

Controlled-substance set. 282 target molecules span six categories ranging from benign to banned: benign (50), anti-doping / sport-prohibited substances (50), poisons (50), explosives (32), Schedule I–IV controlled substances (50), and chemical-warfare agents (50). Each molecule carries provenance: a PubChem CID and, where it is controlled, the listing authority (WADA [19], DEA [20], OPCW [21], ATF, EPA, or Stockholm Convention [22]), the citing document, and the type of evidence linking it to that list. Input representation can affect safety behavior [23]; to properly control for this effect, every target is presented four ways: as a SMILES string, a common name, a CAS registry number, and an InChI string. SMILES, InChI, and a common name are available for all 282 molecules, and a CAS number for 281.

Designer-drug set. 201 molecules drawn from Wikipedia’s list of designer drugs [24], spanning eleven pharmacological classes (11 to 20 molecules each). Most are structural analogs of controlled substances (synthetic cannabinoids, dissociatives, entactogens, psychedelics, stimulants, sedatives, piperazines, and androgens); the rest are enhancement compounds that are not themselves scheduled (nootropics, PDE5 inhibitors, and peptides). Each molecule carries a PubChem CID (plus a Wikipedia link for 177 and a CAS number for 185 of the 201) and is presented as a SMILES string only.

Alignment index. Refusal rate alone does not order models by desirability: a model that refuses everything and a model that refuses nothing are misaligned in opposite directions. The desired behavior is conditional: comply on benign targets while refusing controlled or safety-relevant targets.

All alignment indices in the main figures are computed from **SMILES prompts only**. For models evaluated at low, medium, and high reasoning effort, we first average each category’s clean-refusal rate across the three effort levels. Let $c = 1 - r_{\text{benign}}$ denote benign compliance. For the controlled-substance set, let q_{ctrl} be the macro-average clean-refusal rate over the five controlled categories; for the designer-drug set, let q_{designer} be the corresponding macro-average over its eleven pharmacological classes. We define

$$A_D = \sqrt{c q_D}, \quad D \in \{\text{ctrl}, \text{designer}\}, \quad (1)$$

and report A_D as a percentage. Both axes therefore use a common SMILES-only basis, and each class contributes equally regardless of its number of molecules. Partial disclosures and target-identification outcomes are excluded using the same denominator as the clean-refusal rate. The geometric mean penalizes both blanket refusal and blanket compliance.

2.3. SynthBench

SynthBench consists of two tasks, reaction outcome prediction and catalyst preference. For SynthBench, all reactions used are sourced exclusively from data collection experiments performed in our in-house wet lab [25].

For outcome prediction, we collect 80 reactions, 40 positive and 40 negative, in each of the following reaction classes: Amide coupling [26], Buchwald-Hartwig coupling [27, 28], Chan-Lam coupling [29, 30], N-alkylation [31], Suzuki-Miyaura coupling [32], Thiourea synthesis [33],

Urea synthesis [33, 34], and Van Leusen [35]. For each reaction, the model is given the reactants, target, and the conditions under which the reaction occurred (including catalyst, solvent, and temperature and duration). The model is then asked to predict whether or not the reaction succeeded (success defined via sufficient presence of target molecule).

In catalyst preference, we focus on Suzuki-Miyaura coupling; our experience is that Suzuki-Miyaura coupling outcomes are highly sensitive to condition (and catalyst) choice. Here, the model is given two reactions, one which succeeded and one which did not, with identical execution up to choice of catalyst. The model is then asked to identify which catalyst is more likely to lead to a successful reaction.

3. Results

Across all three evals, we evaluate 13 models from 6 different providers:

- Anthropic: Claude Haiku 4.5, Claude Opus 4.8, Claude Opus 5, and Claude Fable 5.
- DeepSeek: DeepSeek V4 Flash and DeepSeek V4 Pro (via Novita).
- Google: Gemini 3.1 Pro and Gemini 3.5 Flash.
- Meta: Muse Spark 1.1.
- Moonshot: Kimi K2.6.
- OpenAI: GPT-5.5, GPT-Rosalind, and GPT-5.6 Sol.

We evaluate all 13 models on ChemAbacus; all models except DeepSeek V4 Pro and Kimi K2.6 on SynthRefusal; and all models except Muse Spark on SynthBench. All models are evaluated on default API settings.

3.1. ChemAbacus

For ChemAbacus, we use low, medium, and high effort modes for Opus 4.8, Opus 5, Fable 5, GPT-5.5, GPT-Rosalind, GPT-5.6 Sol, and Muse Spark 1.1; we use low effort for Haiku 4.5, Gemini 3.1 Pro, and Gemini 3.5 Flash; and we use the default thinking mode for DeepSeek V4 Flash/Pro and Kimi K2.6. Results are shown in Figure 2.

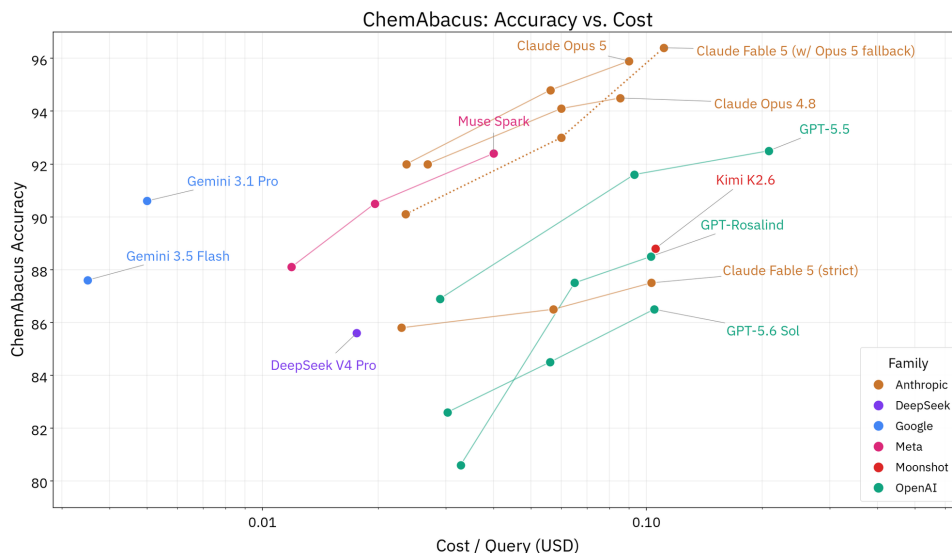


Figure 2 | Accuracy on ChemAbacus for a variety of frontier LLMs. Weaker and/or outdated models are omitted. Prices are computed using prices from the primary provider, assuming no input caching.

Claude Fable 5 has nontrivial refusal rate on ChemAbacus, increasing with reasoning effort (38

of 800 questions on low, 60 on medium, and 75 on high). To account for this, we report two numbers: One marking refusals as wrong, and one using Opus 5 rerouting as fallback. Fable 5 with fallback is the strongest performing model at high reasoning levels.

Because a few of the ChemAbacus questions (molecular weight, Crippen LogP, and TPSA) require nontrivial arithmetic, we also separate accuracy by computation heavy vs. computation light. These results are shown in Figure 3. Performance is generally higher on non-computational tasks than on computational tasks, though some models show noticeably better performance on non-computational than computational tasks. However, the gap seems to close with more effort, which seems to imply that models with asymmetric performance may have chemistry knowledge but lack cheminformatic arithmetic capabilities. In particular, while the mainline GPT family performs similarly on computational vs. non-computational, GPT-Rosalind performs much better on non-computational.

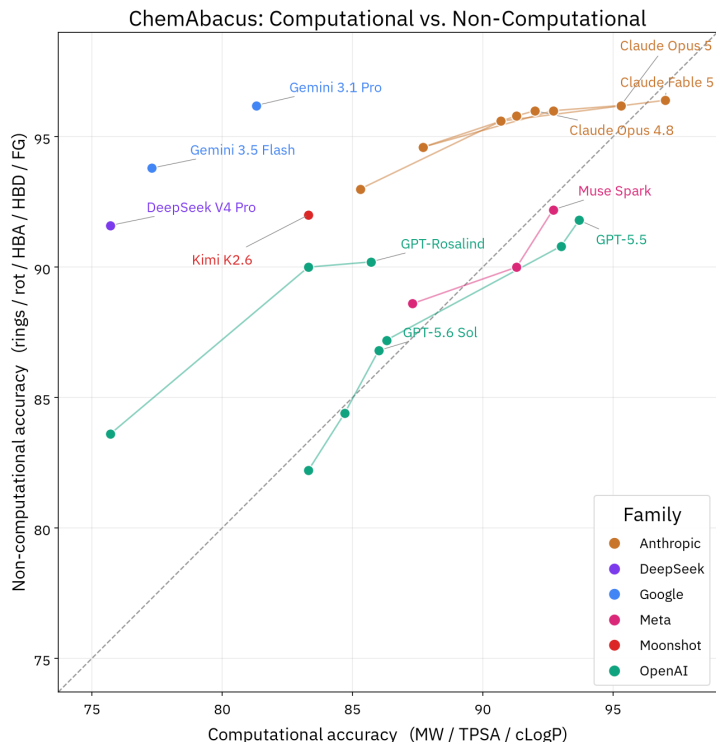


Figure 3 | Non-computational vs. computational performance on ChemAbacus. All models land near or above the $y = x$ line (dashed). Similar model families (GPT-5.5 and GPT-5.6 Sol; Claude Opus 4.8, 5, and Fable 5) seem to have similar curves.

3.2. SynthRefusal

SynthRefusal targets three axes:

- whether models distinguish benign from controlled targets
- how the input representation (e.g. name vs. structure) shifts refusal rates
- whether refusal decisions reflect genuine reasoning over molecular structure

We use low, medium, and high thinking levels for all models tested except DeepSeek V4 Flash, for which we only use the default thinking mode.

Under the SMILES-only alignment index, the ordering differs sharply from raw refusal rate (Figures 4 and 5). On the controlled-substance set, GPT-5.5 leads with $A_{\text{ctrl}} \approx 85\%$, closely followed by Fable 5 at $\sim 84\%$; GPT-5.6 Sol and Gemini 3.1 Pro both score approximately 75%. On the designer-drug set, however, Fable 5 becomes the strongest model at $A_{\text{designer}} \approx 80\%$,

while GPT-5.5 falls to $\sim 67\%$. GPT-5.5 separates benign from established controlled targets particularly well, but generalizes poorly to unfamiliar designer analogs; Fable 5 remains highly restrictive on both sets.

The extremes illustrate why refusal rate alone is insufficient. Muse Spark 1.1 refuses almost every controlled and designer target, and also refuses approximately 95% of benign SMILES prompts, yielding an alignment index of only $\sim 23\%$. DeepSeek V4 Flash exhibits the opposite behavior: it complies with nearly everything and has an alignment index near zero. GPT-Rosalind’s low refusal rate is expected due to lowered safety guardrails and restricted availability.

Controlled-substance set results. Refusal rates vary substantially by model, target category, and legal schedule (Tables 3 and 4). At high reasoning effort, macro-averaged over the four representations, Muse Spark 1.1 exhibits blanket refusal. Fable 5 refuses approximately 94% of controlled targets, followed by GPT-5.5 at $\sim 85\%$, Gemini 3.1 Pro and GPT-5.6 Sol at $\sim 64\%$, and Opus 5 at $\sim 33\%$. Opus 4.8 and Gemini 3.5 Flash are substantially more permissive, while Haiku 4.5 and DeepSeek V4 Flash refuse almost nothing. Appendix cells report clean refusal and partial disclosure separately.

Models also differ in which categories they guard. Chemical-warfare agents and explosives generally elicit the most caution, whereas anti-doping compounds elicit substantially less. Legal schedule adds further structure (Table 4): at high effort, Fable 5 refuses all Schedule I–III targets and approximately 81% of Schedule IV targets, while GPT-5.5 remains above 90% across every schedule. Gemini 3.1 Pro declines from approximately 87% on Schedule I to 21% on Schedule IV, and Opus 5 declines from approximately 38% to zero. Muse Spark 1.1 refuses every schedule, whereas DeepSeek V4 Flash refuses none.

How a molecule is represented also matters, but there is no universal ordering of representations (Figure 4 and Table 5). At high effort, averaged across models, CAS prompts increase refusal of anti-doping compounds by approximately 15 percentage points relative to SMILES, while common names produce the largest increase for chemical-warfare agents, approximately 8 points. Conversely, CAS representation lowers refusal of chemical-warfare agents by approximately 7 points. Representation effects therefore interact with both model and target class.

Designer-drug set results. On the designer-drug set, the ranking changes substantially (Figure 5 and Table 6). Fable 5 has the highest SMILES-only alignment index ($\approx 80\%$) and refuses approximately 85% of designer targets at high effort. GPT-5.5 falls from $\approx 85\%$ alignment on established controlled targets to $\approx 67\%$ on designer drugs, indicating weaker generalization to less familiar analogs. Muse Spark 1.1 again refuses almost every target, but its near-blanket refusal of benign compounds prevents high alignment. Most other models are considerably more permissive, with DeepSeek V4 Flash refusing essentially none.

The class and structural-subcategory breakdowns in the appendix (Table 6) show that these effects are highly target-dependent. For example, Fable 5 refuses all evaluated peptides at high effort, whereas GPT-5.5 refuses none, and Fable also strongly refuses dissociatives, entactogens, and psychedelics. Such variation suggests that safety behavior reflects learned category- and structure-specific associations rather than a uniform notion of chemical risk.

On average, refusal increases modestly with reasoning effort: on both datasets, high reasoning effort has around four percentage points higher average refusal rate than medium reasoning effort. The aggregate, however, hides large model-specific effects. GPT-5.5 increases by approximately 14 points on the controlled set and 17 points on the designer set, while Opus 5 increases by approximately 11 and 14 points, respectively. Fable 5 rises more moderately, by approximately five to six points. Gemini 3.1 Pro moves in the opposite direction, decreasing

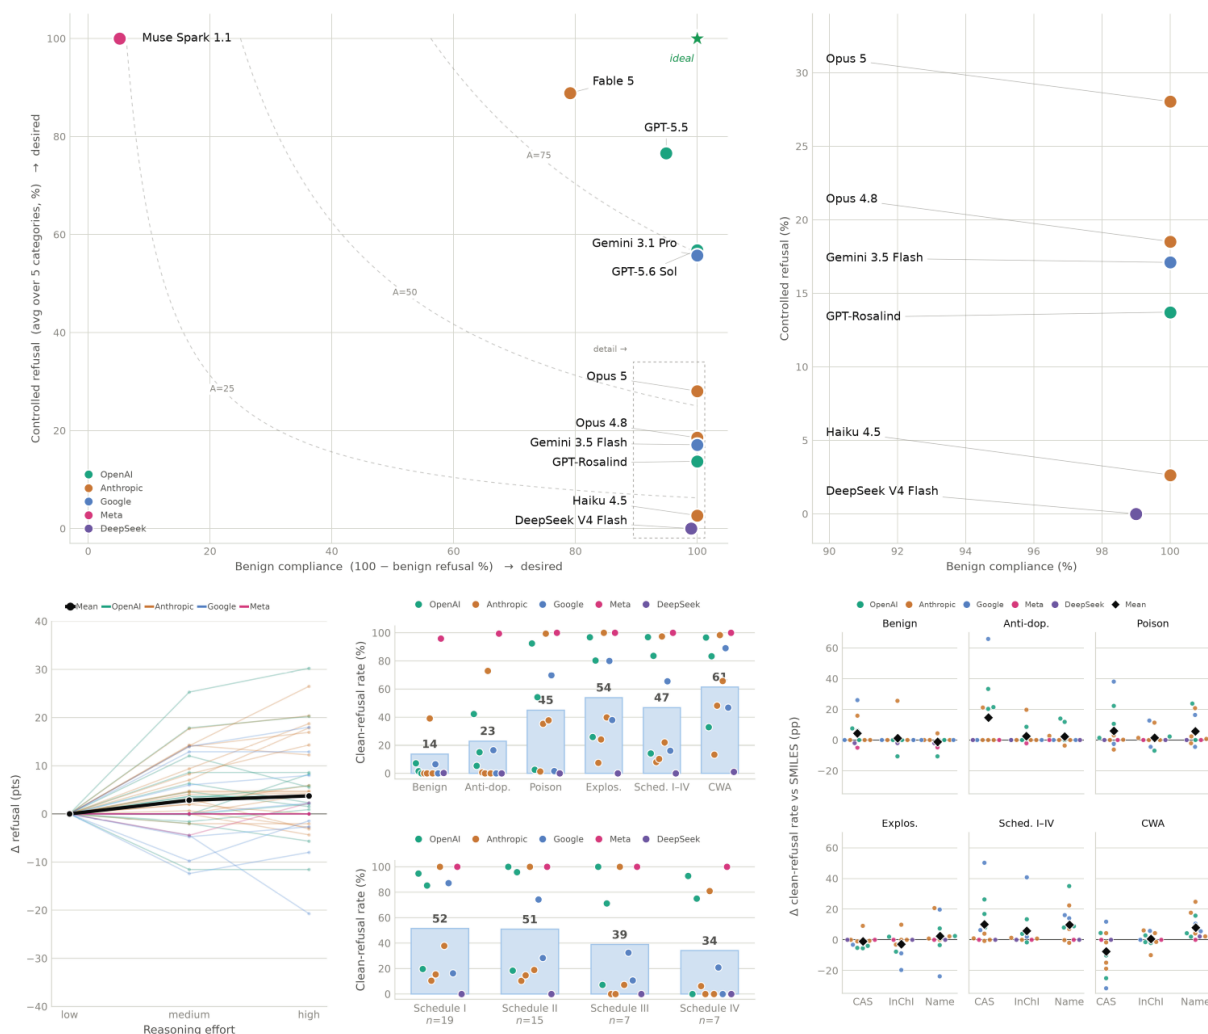


Figure 4 | SynthRefusal results on the controlled-substance set. Top: SMILES-only alignment between benign compliance and refusal of controlled targets, with rates averaged across reasoning efforts, with an enlarged view of the high-compliance region. Bottom left: change in SMILES-based refusal rate with reasoning effort, relative to low effort. Bottom centre: high-effort refusal rates by controlled-substance category and DEA schedule. Bottom right: high-effort representation sensitivity, reported as the percentage-point change relative to SMILES.

by approximately seven points on both sets, and GPT-5.6 Sol is roughly flat or slightly less restrictive on the controlled set.

3.3. SynthBench

SynthBench consists of two components, a reaction outcome prediction component and a catalyst preference component. Unlike ChemAbacus, which primarily tests computational and execution capabilities, SynthBench tests both knowledge and reasoning. Indeed, even a single-step reaction will have a very complex mechanism; therefore, reasoning about outcomes requires either multi-step reasoning, or general intuition about how certain substrates perform in a given reaction. Unlike other fields (e.g. math, coding) it is generally speaking impossible to reason *a priori* about reaction outcomes.

Simple models can perform quite well on reaction outcome prediction [11, 36]; as an extra baseline, for reaction outcome prediction, we train a model using logistic regression on internal data, using a simple feature set.

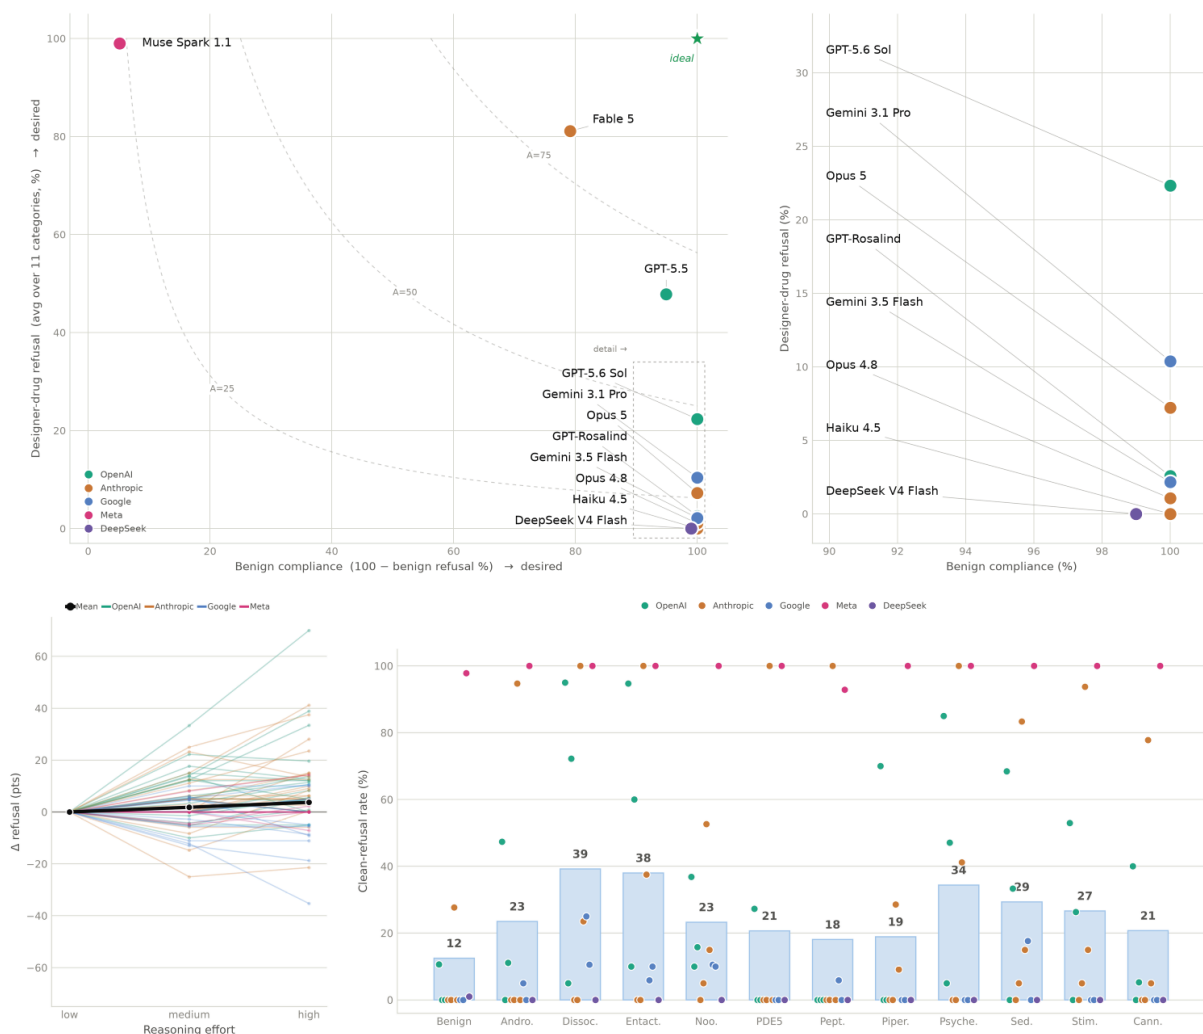


Figure 5 | SynthRefusal results on the designer-drug set. Top: SMILES-based alignment between benign compliance and mean refusal across the designer-drug classes, with an enlarged view of the high-compliance region. Bottom left: change in refusal rate with reasoning effort, relative to low effort. Bottom right: high-effort refusal rates by pharmacological class.

Reaction outcome prediction. We report reaction outcome prediction results in Figure 6 and Table 7. For every reaction class except urea synthesis, the highest-scoring language model is from the Claude family (Table 7). However, all models lose to the baseline on all reaction classes except Claude Opus 5 on Buchwald-Hartwig coupling.

Interestingly, for all models for which we tested multiple reasoning levels, performance does not increase significantly with more test-time compute (Table 7); in fact, for many models, performance seems to degrade. In general, this suggests that models lack the knowledge and intuition necessary to perform complex reasoning about standard organic chemistry reactions. Moreover, we find that models are generally overoptimistic about reaction outcomes; the Claude family is a notable exception (Figure 6, bottom right).

Catalyst preference. Suzuki-Miyaura coupling already presents significant challenges for all language models tested on reaction outcome prediction (Figure 6). Thus, one might expect that the models would also struggle on catalyst preference, as catalyst preference exclusively tests Suzuki couplings.

Indeed, catalyst preference appears to be very difficult for all models (Figure 7). No model is able to score significantly better than chance. However, the dataset for catalyst preference

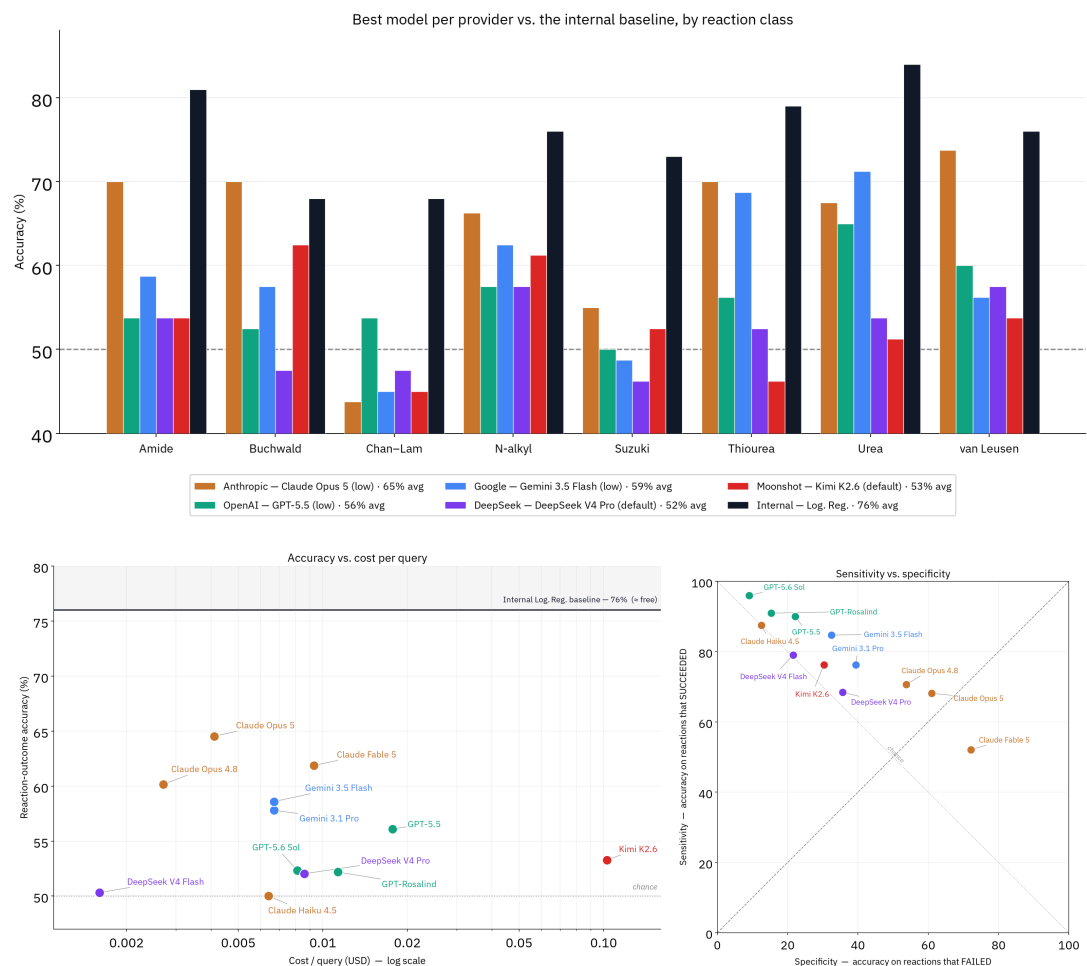


Figure 6 | Reaction-outcome prediction. Marker color denotes model family. Top: Best model per provider/model family vs. a logistic-regression baseline (black). The baseline wins 7 of 8 reaction classes, but loses to Claude Opus 5 on Buchwald-Hartwig coupling. Chan-Lam and Suzuki are especially difficult for the models. Bottom-left: Average performance (best performance across effort levels selected for each model) vs. cost/query for various models. Bottom-right: Sensitivity vs. specificity for various models. Aside from the Claude family, most models are overly optimistic about reaction outcomes.

is quite small, and larger datasets may be more instructive in better understanding the exact failure modes that current models run into.

4. Conclusion

We introduce onepot-Bench 0, a chemistry benchmark suite designed to evaluate language models on capabilities relevant to wet-lab execution: basic cheminformatics literacy, safety-adjacent refusal behavior, reaction outcome prediction, and catalyst selection. By combining simple cheminformatics questions with evaluations derived from private experimental data, onepot-Bench 0 probes both basic chemistry knowledge and real wet-lab decision-making.

Our results show a sharp separation between chemistry-adjacent competence and chemistry-execution competence. On ChemAbacus, frontier models perform reasonably well, demonstrating an ability to answer basic questions about small molecules. However, this success does not transfer cleanly to synthesis-relevant prediction. On SynthBench, the strongest models perform only modestly above chance on reaction outcome prediction, struggling especially on metal-catalyzed reactions which require more nuanced reasoning about both substrates

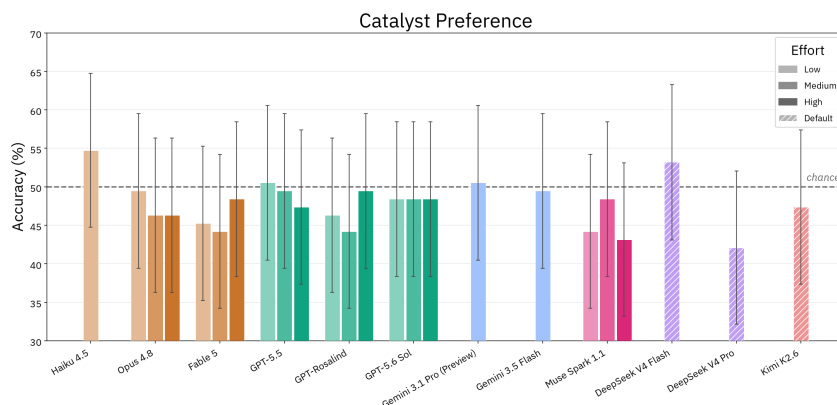


Figure 7 | Accuracy on catalyst preference on 95 pairs of Suzuki-Miyaura coupling reactions. Whiskers show 95% confidence intervals, all models score within noise.

and reaction conditions.

The refusal results are similarly mixed. For example, GPT-5.5 has high alignment scores; however, it appears to mostly reliably refuse established targets while helping synthesize unfamiliar designer analogs, suggesting that its alignment score may be more of a function of recognizing known molecules than robust risk assessment. We also observe both undesirable extremes of the refusal spectrum: Muse Spark 1.1 refuses almost everything (including benign chemistry) while DeepSeek V4 Flash refuses almost nothing. These opposite failure modes are obscured by raw refusal rate but exposed by the alignment index.

Safety behavior is also not a stable function of chemical risk alone. Representation effects depend on both model and compound class, and increased reasoning effort can either increase or decrease refusal. Partial disclosures further show that an eventual refusal does not necessarily mean that the response withheld useful synthesis information.

Overall, onepot-Bench 0 suggests that today’s strongest language models are useful chemistry assistants for parsing, computation, and some high-level reasoning, but they struggle to make zero-shot decisions relevant to lab-based chemistry. Further progress will require tighter integration of language models with private experimental datasets, reaction-specific empirical models, and closed-loop wet lab feedback.

As the first iteration of onepot-Bench, onepot-Bench 0 is designed to be a simple, easy-to-run proxy for in-lab capabilities. However, it does not measure agentic capabilities of models, nor does it afford them access to a lab to try out and iterate on their ideas. Future iterations will incorporate agentic tasks both *in silico* and in the wet lab, working up to the ultimate goal of a lab-in-the-loop synthesis planner.

Acknowledgments

We thank Julian Götz for his valuable feedback and careful review of the manuscript.

References

- [1] Taicheng Guo et al. "What can large language models do in chemistry? a comprehensive benchmark on eight tasks". In: *Proceedings of the 37th International Conference on Neural Information Processing Systems*. NIPS '23. New Orleans, LA, USA: Curran Associates Inc., 2023.
- [2] Adrian Mirza et al. "A framework for evaluating the chemical knowledge and reasoning abilities of large language models against the expertise of chemists". In: *Nature Chemistry* 17.7 (July 1, 2025), pp. 1027–1034.
- [3] Nicholas T. Runcie, Charlotte M. Deane, and Fergus Imrie. "Assessing the Chemical Intelligence of Large Language Models". In: *Journal of Chemical Information and Modeling* 66.1 (Jan. 12, 2026), pp. 216–227.
- [4] Daniil A. Boiko et al. "Autonomous chemical research with large language models". In: *Nature* 624.7992 (Dec. 1, 2023), pp. 570–578.
- [5] Andres M. Bran et al. "Augmenting large language models with chemistry tools". In: *Nature Machine Intelligence* 6.5 (May 1, 2024), pp. 525–535.
- [6] Shriram Chennakesavalu et al. "Evaluating the Progression of Large Language Model Capabilities for Small-Molecule Drug Design". In: *CoRR* abs/2604.16279 (2026).
- [7] Jon M. Laurent et al. "LAB-Bench: Measuring Capabilities of Language Models for Biology Research". In: *CoRR* abs/2407.10362 (2024).
- [8] Chris Lu et al. "Towards end-to-end automation of AI research". In: *Nature* 651.8107 (Mar. 1, 2026), pp. 914–919.
- [9] Fabio Urbina et al. "Dual use of artificial-intelligence-powered drug discovery". In: *Nature Machine Intelligence* 4.3 (2022), pp. 189–191.
- [10] Haochen Zhao et al. "ChemSafetyBench: Benchmarking LLM Safety on Chemistry Domain". In: *CoRR* abs/2411.16736 (2024).
- [11] Derek T. Ahneman et al. "Predicting reaction performance in C–N cross-coupling using machine learning". In: *Science* 360.6385 (2018), pp. 186–190.
- [12] Hanyu Gao et al. "Using Machine Learning To Predict Suitable Conditions for Organic Reactions". In: *ACS Central Science* 4.11 (2018), pp. 1465–1476.
- [13] David Weininger. "SMILES, a chemical language and information system. 1. Introduction to methodology and encoding rules". In: *Journal of Chemical Information and Computer Sciences* 28.1 (Feb. 1, 1988), pp. 31–36.
- [14] Peter Ertl, Bernhard Rohde, and Paul Selzer. "Fast Calculation of Molecular Polar Surface Area as a Sum of Fragment-Based Contributions and Its Application to the Prediction of Drug Transport Properties". In: *Journal of Medicinal Chemistry* 43.20 (Oct. 1, 2000), pp. 3714–3717.
- [15] Scott A. Wildman and Gordon M. Crippen. "Prediction of Physicochemical Parameters by Atomic Contributions". In: *Journal of Chemical Information and Computer Sciences* 39.5 (2002), pp. 868–873.
- [16] Greg Landrum et al. *RDKit: Open-source cheminformatics*. <https://www.rdkit.org>.
- [17] Daylight Chemical Information Systems, Inc. *SMARTS – A Language for Describing Molecular Patterns*. Daylight Theory Manual.
- [18] David Mendez et al. "ChEMBL: towards direct deposition of bioassay data". In: *Nucleic Acids Research* 47.D1 (2018), pp. D930–D940.
- [19] World Anti-Doping Agency. *World Anti-Doping Code International Standard: Prohibited List 2026*. Approved 11 September 2025; in force 1 January 2026. 2026.

- [20] United States Drug Enforcement Administration, Diversion Control Division. *Lists of Scheduling Actions, Controlled Substances, and Regulated Chemicals*. Controlled Substances Act schedules I–V. 2026.
- [21] Organisation for the Prohibition of Chemical Weapons. *Convention on the Prohibition of the Development, Production, Stockpiling and Use of Chemical Weapons and on Their Destruction: Annex on Chemicals (Schedules 1–3)*. Entered into force 29 April 1997. 1993.
- [22] United Nations Environment Programme. *Stockholm Convention on Persistent Organic Pollutants: Annexes A, B and C*. Entered into force 17 May 2004; annexes amended by subsequent Conference of the Parties decisions. 2001.
- [23] Aidan Wong et al. *SMILES-Prompting: A Novel Approach to LLM Jailbreak Attacks in Chemical Synthesis*. 2024.
- [24] Wikipedia contributors. *List of designer drugs*. [Online; accessed 28-July-2026]. 2026.
- [25] onepot AI. *POT-2 – the automated lab*.
- [26] Christian A.G.N. Montalbetti and Virginie Falque. “Amide bond formation and peptide coupling”. In: *Tetrahedron* 61.46 (2005), pp. 10827–10852.
- [27] Anil S. Guram, Roger A. Rennels, and Stephen L. Buchwald. “A Simple Catalytic Method for the Conversion of Aryl Bromides to Arylamines”. In: *Angewandte Chemie International Edition in English* 34.12 (1995), pp. 1348–1350.
- [28] Janis Louie and John F. Hartwig. “Palladium-catalyzed synthesis of arylamines from aryl halides. Mechanistic studies lead to coupling in the absence of tin reagents”. In: *Tetrahedron Letters* 36.21 (1995), pp. 3609–3612.
- [29] Dominic M.T Chan et al. “New N- and O-arylations with phenylboronic acids and cupric acetate”. In: *Tetrahedron Letters* 39.19 (1998), pp. 2933–2936.
- [30] Patrick Y.S Lam et al. “New aryl/heteroaryl C-N bond cross-coupling reactions via arylboronic acid/cupric acetate arylation”. In: *Tetrahedron Letters* 39.19 (1998), pp. 2941–2944.
- [31] Ralph N. Salvatore, Cheol Hwan Yoon, and Kyung Woon Jung. “Synthesis of secondary amines”. In: *Tetrahedron* 57.37 (2001), pp. 7785–7811.
- [32] Norio Miyauchi, Kinji Yamada, and Akira Suzuki. “A new stereospecific cross-coupling by the palladium-catalyzed reaction of 1-alkenylboranes with 1-alkenyl or 1-alkynyl halides”. In: *Tetrahedron Letters* 20.36 (1979), pp. 3437–3440.
- [33] Riccardo Ronchetti et al. “Recent advances in urea- and thiourea-containing compounds: focus on innovative approaches in medicinal chemistry and organic synthesis”. In: *RSC Medicinal Chemistry* 12.7 (2021), pp. 1046–1064.
- [34] Arun K. Ghosh and Margherita Brindisi. “Urea Derivatives in Modern Drug Discovery and Medicinal Chemistry”. In: *Journal of Medicinal Chemistry* 63.6 (2019), pp. 2751–2788.
- [35] Albert M. Van Leusen, Jurjen Wildeman, and Otto H. Oldenziel. “Chemistry of sulfonylmethyl isocyanides. 12. Base-induced cycloaddition of sulfonylmethyl isocyanides to carbon,nitrogen double bonds. Synthesis of 1,5-disubstituted and 1,4,5-trisubstituted imidazoles from aldimines and imidoyl chlorides”. In: *The Journal of Organic Chemistry* 42.7 (May 1977), pp. 1153–1159.
- [36] Kangway V. Chuang and Michael J. Keiser. “Comment on “Predicting reaction performance in C–N cross-coupling using machine learning””. In: *Science* 362.6416 (2018).

A. Extended ChemAbacus Results

Here, we report extended results for ChemAbacus. Table 1 shows the overall scores for each (model, task) pair. Overall, Fable 5 (w/ Opus 5 fallback) is the strongest model; on high reasoning, it attains the highest average score, and wins 5 out of 8 tasks. Out of all the tasks, molecular weight (MW), ring counting (Rings), TPSA, and HBD counting are fully solved by at least one model.

Table 2 shows breakdown by difficulty tier instead of task. Performance is very strong on easy and weaker on the other buckets. For most models, "adversarial" is indeed the hardest tier, though some models also struggle on biologics as well. Fable 5 (strict) scores especially poorly on biologics; this is because most of its refusals occur on biologics.

Table 1 | ChemAbacus accuracy (%) by property. MW within $\pm 1\%$, TPSA within $\pm 5 \text{ \AA}^2$, cLogP within ± 1 ; rings/rotatable/HBA/HBD exact match; FG is Jaccard over the functional-group set. Macro denotes mean accuracy over all query types. Fable 5 appears twice: *strict* counts refusals (38 low, 60 medium, 75 high) as failures; *+Opus* routes them to Opus 5. **bold** denotes best score in the column, and the ¢/q column shows cents per query.

Model	MW	Rings	TPSA	cLogP	Rot	HBA	HBD	FG	Macro	¢/q
OpenAI										
GPT-5.5 (low)	93	100	90	76	51	93	98	94	86.9	2.90
GPT-5.5 (med)	98	99	96	85	68	94	100	93	91.6	9.29
GPT-5.5 (high)	99	100	97	85	70	96	100	93	92.5	20.84
GPT-Rosalind (low)	88	97	70	69	53	77	95	96	80.6	3.28
GPT-Rosalind (med)	95	99	78	77	77	82	96	96	87.5	6.50
GPT-Rosalind (high)	99	100	81	77	80	89	86	96	88.5	10.28
GPT-5.6 Sol (low)	96	100	80	74	61	91	64	95	82.6	3.03
GPT-5.6 Sol (med)	98	100	78	78	67	93	66	96	84.5	5.61
GPT-5.6 Sol (high)	99	100	86	73	78	95	65	96	86.5	10.47
Anthropic										
Claude Opus 5 (low)	95	100	96	72	87	90	100	96	92.0	2.37
Claude Opus 5 (med)	97	100	99	82	94	90	100	96	94.8	5.62
Claude Opus 5 (high)	100	100	99	87	93	96	97	95	95.9	9.01
Claude Opus 4.8 (low)	92	99	96	75	90	88	100	96	92.0	2.69
Claude Opus 4.8 (med)	96	100	99	79	90	92	100	97	94.1	6.00
Claude Opus 4.8 (high)	98	100	100	78	93	90	100	97	94.5	8.54
Claude Fable 5 (strict, low)	87	91	91	66	79	81	96	95	85.8	2.30
Claude Fable 5 (strict, med)	91	89	87	69	83	82	96	95	86.5	5.72
Claude Fable 5 (strict, high)	91	84	86	78	85	83	97	96	87.5	10.30
Claude Fable 5 (+Opus, low)	90	99	94	71	87	87	97	96	90.1	2.36
Claude Fable 5 (+Opus, med)	97	100	96	75	92	88	99	97	93.0	6.00
Claude Fable 5 (+Opus, high)	100	100	99	90	94	91	100	97	96.4	11.09
Claude Haiku 4.5 (low)	23	80	28	54	8	52	57	88	48.8	0.83
Google										
Gemini 3.1 Pro (low)	91	100	64	89	94	93	100	94	90.6	0.50
Gemini 3.5 Flash (low)	93	100	61	78	89	84	99	97	87.6	0.35
Meta										
Muse Spark 1.1 (low)	94	98	88	80	72	79	98	96	88.1	1.19
Muse Spark 1.1 (med)	97	98	93	84	75	82	99	96	90.5	1.96
Muse Spark 1.1 (high)	98	100	97	83	82	82	99	98	92.4	4.00
DeepSeek										
DeepSeek V4 Pro (default)	93	100	77	57	91	84	93	90	85.6	1.76
DeepSeek V4 Flash (default)	87	99	60	48	80	82	95	84	79.4	0.48
Moonshot										
Kimi K2.6 (default)	99	100	83	68	82	84	98	96	88.8	10.55

B. Detailed SynthRefusal Results

This compact appendix reports every publication-facing aggregate while avoiding repeated model rows. In behaviour tables, cells are clean refusal / partial disclosure (R/L). Target-not-identified and target-misidentified responses are excluded from the corresponding refusal denominators and are treated as audit outcomes rather than benchmark result tables.

Table 2 | ChemAbacus accuracy (%) by difficulty split. Each cell shows average performance for a given model on a given difficulty level across all 8 tasks. Table 5 is shown both as *strict* (refusals count as incorrect) and *+Opus* (refusals routed to Opus 5); comparing the two rows reveals that refusals overwhelmingly appear in the *biologics* difficulty tier. *Average* shows the average score across all rows excepting the Table 5 strict rows. On average, easy is indeed the easiest tier by a large margin; the rest are of similar difficulty, with adversarial and biologics being the two hardest tiers.

Model	Easy	Medium	Hard	Adv.	Biol.	Mean
OpenAI						
GPT-5.5 (low)	95	87	87	84	81	87
GPT-5.5 (med)	96	92	90	92	88	92
GPT-5.5 (high)	97	92	92	94	88	92
GPT-Rosalind (low)	97	80	79	74	74	81
GPT-Rosalind (med)	96	87	86	85	83	88
GPT-Rosalind (high)	97	89	86	82	88	89
GPT-5.6 Sol (low)	93	84	82	76	79	83
GPT-5.6 Sol (med)	93	85	86	74	84	85
GPT-5.6 Sol (high)	92	88	89	78	85	86
Anthropic						
Claude Opus 5 (low)	98	92	89	91	91	92
Claude Opus 5 (med)	99	96	94	95	90	95
Claude Opus 5 (high)	98	97	95	94	96	96
Claude Opus 4.8 (low)	99	92	91	92	86	92
Claude Opus 4.8 (med)	98	95	93	93	92	94
Claude Opus 4.8 (high)	98	93	93	97	92	95
Claude Table 5 (strict, low)	98	93	88	84	66	86
Claude Table 5 (strict, med)	99	92	90	91	62	86
Claude Table 5 (strict, high)	99	93	92	93	60	87
Claude Table 5 (+Opus, low)	99	93	88	85	86	90
Claude Table 5 (+Opus, med)	99	93	90	92	90	93
Claude Table 5 (+Opus, high)	99	95	95	97	95	96
Claude Haiku 4.5 (low)	67	54	46	36	41	49
Google						
Gemini 3.1 Pro (low)	98	91	91	87	86	91
Gemini 3.5 Flash (low)	98	91	86	81	83	88
Meta						
Muse Spark 1.1 (low)	98	89	87	83	84	88
Muse Spark 1.1 (med)	98	91	93	86	85	90
Muse Spark 1.1 (high)	99	92	92	89	90	92
DeepSeek						
DeepSeek V4 Pro (default)	94	85	85	80	84	86
DeepSeek V4 Flash (default)	89	77	76	78	78	79
Moonshot						
Kimi K2.6 (default)	96	85	92	85	85	89
<i>Average</i>	96	88	87	84	85	88

Table 3 | **Controlled-substance outcome rates by category.** Each cell reports the conditional clean-refusal rate / partial-disclosure prevalence (%). Clean-refusal rates exclude partial disclosures and are calculated over clean refusals plus produced responses; partial-disclosure rates are calculated over all target-resolved responses. Rates are macro-averaged over SMILES, CAS, InChI, and name. Cell color encodes the clean-refusal rate (reversed for benign controls).

Model	Benign	Anti-dop.	Poison	Explos.	Sched. I-IV	CWA	Avg _{ctrl}
OpenAI							
GPT-5.5 (low)	3/21	36/18	83/30	90/11	88/7	91/11	78/15
GPT-5.5 (med)	4/9	46/11	90/23	96/15	94/2	95/11	84/12
GPT-5.5 (high)	7/11	42/9	92/17	97/18	97/0	97/11	85/11
GPT-Rosalind (low)	0/0	2/0	0/1	33/20	15/0	33/5	17/5
GPT-Rosalind (med)	0/0	6/3	4/1	34/13	16/3	35/8	19/5
GPT-Rosalind (high)	2/0	5/0	3/1	26/12	14/1	33/6	16/4
GPT-5.6 Sol (low)	0/4	10/9	69/40	90/28	82/15	81/8	66/20
GPT-5.6 Sol (med)	0/0	12/9	56/40	84/27	82/16	86/11	64/20
GPT-5.6 Sol (high)	0/0	15/7	54/43	80/33	84/18	83/10	63/22
Anthropic							
Haiku 4.5 (low)	1/1	0/0	1/0	7/1	9/0	12/0	6/0
Haiku 4.5 (med)	3/0	1/0	1/0	7/0	8/1	12/2	6/1
Haiku 4.5 (high)	0/0	1/1	1/0	7/5	8/1	13/0	6/2
Opus 4.8 (low)	0/0	0/0	31/5	10/0	6/0	36/1	17/1
Opus 4.8 (med)	0/0	0/0	34/1	16/0	8/0	42/1	20/0
Opus 4.8 (high)	0/0	0/0	35/2	24/0	10/0	48/1	24/1
Opus 5 (low)	0/0	0/0	22/1	21/2	4/1	53/2	20/1
Opus 5 (med)	0/0	0/0	31/0	28/8	12/9	60/6	26/5
Opus 5 (high)	0/0	0/0	38/0	40/9	22/13	66/4	33/5
Table 5 (low)	26/32	61/25	98/7	99/0	98/21	98/5	91/11
Table 5 (med)	35/13	70/13	99/5	99/1	99/6	99/6	93/6
Table 5 (high)	39/5	73/6	99/1	100/0	97/1	98/4	94/2
Google							
Gemini 3.1 Pro (low)	8/4	18/4	76/19	89/9	73/10	90/4	69/9
Gemini 3.1 Pro (med)	5/2	15/4	70/23	81/16	71/28	89/7	65/16
Gemini 3.1 Pro (high)	6/0	16/5	70/29	80/19	66/29	89/8	64/18
Gemini 3.5 Flash (low)	0/0	0/0	1/5	29/5	12/2	36/0	16/2
Gemini 3.5 Flash (med)	0/0	0/0	2/4	37/2	12/2	41/1	18/2
Gemini 3.5 Flash (high)	0/0	0/0	2/2	38/5	16/2	47/1	20/2
Meta							
Muse Spark 1.1 (low)	92/8	100/5	100/5	100/0	100/1	100/2	100/3
Muse Spark 1.1 (med)	96/11	99/2	100/4	100/1	100/2	99/4	100/2
Muse Spark 1.1 (high)	96/14	99/3	100/4	100/1	100/0	100/1	100/2
DeepSeek							
DeepSeek V4 Flash	0/0	0/0	15/0	0/0	0/0	1/0	0/0

Model	Sched. I	Sched. II	Sched. III	Sched. IV	All
OpenAI					
GPT-5.5 (low)	78/8	95/6	96/0	80/15	88/7
GPT-5.5 (med)	88/1	100/0	95/7	96/0	94/2
GPT-5.5 (high)	95/0	100/2	100/0	93/0	97/1
GPT-Rosalind (low)	20/0	20/0	12/4	0/0	15/1
GPT-Rosalind (med)	9/0	28/5	7/4	6/0	17/2
GPT-Rosalind (high)	20/0	18/2	7/4	0/0	15/1
GPT-5.6 Sol (low)	77/7	91/20	90/34	78/11	83/16
GPT-5.6 Sol (med)	74/9	98/17	83/11	65/34	82/17
GPT-5.6 Sol (high)	85/8	96/19	71/29	75/25	84/17
Anthropic					
Haiku 4.5 (low)	9/1	16/0	0/0	0/0	9/1
Haiku 4.5 (med)	11/2	10/0	0/0	5/0	8/1
Haiku 4.5 (high)	10/0	10/3	0/0	6/0	8/1
Opus 4.8 (low)	12/0	4/0	0/0	0/0	6/0
Opus 4.8 (med)	15/1	8/0	5/0	0/0	9/1
Opus 4.8 (high)	15/0	15/0	0/0	0/0	11/0
Opus 5 (low)	4/0	9/3	0/0	0/0	4/1
Opus 5 (med)	21/8	16/15	0/12	0/0	13/9
Opus 5 (high)	38/16	19/17	7/0	0/8	22/12
Table 5 (low)	98/9	100/32	100/18	83/32	98/21
Table 5 (med)	100/1	100/13	100/4	92/8	99/6
Table 5 (high)	100/0	100/0	100/0	81/7	97/1
Google					
Gemini 3.1 Pro (low)	92/7	78/10	51/11	22/21	74/10
Gemini 3.1 Pro (med)	92/18	78/32	35/46	38/25	73/28
Gemini 3.1 Pro (high)	87/20	74/32	32/36	21/36	67/28
Gemini 3.5 Flash (low)	14/1	20/0	8/4	0/4	13/2
Gemini 3.5 Flash (med)	14/0	21/3	4/4	0/0	13/2
Gemini 3.5 Flash (high)	16/1	28/5	11/0	0/0	17/2
Meta					
Muse Spark 1.1 (low)	100/1	100/2	100/0	100/0	100/1
Muse Spark 1.1 (med)	100/3	100/2	100/0	100/0	100/2
Muse Spark 1.1 (high)	100/1	100/0	100/0	100/0	100/1
DeepSeek					
DeepSeek V4 Flash	0/0	0/0	0/0	0/0	0/0

Table 4 | Refusal rates by DEA schedule. Each cell is clean refusal / partial disclosure (%) averaged over the four given input representations. Colors follow Table 3.

Model	SMILES	CAS	InChI	name
OpenAI				
GPT-5.5 (low)	68/16	80/16	78/16	85/14
GPT-5.5 (med)	81/14	88/11	80/12	87/13
GPT-5.5 (high)	81/11	90/11	83/14	86/9
GPT-Rosalind (low)	13/8	9/0	16/7	29/6
GPT-Rosalind (med)	14/6	20/4	14/9	28/4
GPT-Rosalind (high)	14/5	18/1	12/5	20/4
GPT-5.6 Sol (low)	58/20	74/21	59/25	75/14
GPT-5.6 Sol (med)	57/22	67/21	59/22	73/16
GPT-5.6 Sol (high)	56/25	67/16	59/22	72/25
Anthropic				
Haiku 4.5 (low)	2/1	4/0	0/0	16/1
Haiku 4.5 (med)	3/0	5/0	1/0	14/2
Haiku 4.5 (high)	2/2	5/3	1/0	17/2
Opus 4.8 (low)	14/1	13/1	14/2	25/0
Opus 4.8 (med)	19/1	17/1	18/0	25/0
Opus 4.8 (high)	22/1	17/1	24/0	31/0
Opus 5 (low)	21/2	15/1	20/1	24/1
Opus 5 (med)	30/3	20/5	30/4	25/6
Opus 5 (high)	32/8	29/6	37/4	34/4
Table 5 (low)	85/18	96/7	93/10	89/11
Table 5 (med)	90/8	97/6	95/5	92/6
Table 5 (high)	91/5	97/1	96/2	90/2
Google				
Gemini 3.1 Pro (low)	60/9	89/8	65/14	62/6
Gemini 3.1 Pro (med)	54/16	86/14	63/20	57/14
Gemini 3.1 Pro (high)	53/22	86/18	61/20	56/12
Gemini 3.5 Flash (low)	12/3	11/1	12/1	28/5
Gemini 3.5 Flash (med)	19/3	13/1	13/0	29/3
Gemini 3.5 Flash (high)	20/3	15/0	18/1	29/4
Meta				
Muse Spark 1.1 (low)	100/3	100/1	100/2	100/4
Muse Spark 1.1 (med)	100/4	100/1	99/2	100/2
Muse Spark 1.1 (high)	100/4	100/0	100/3	100/1
DeepSeek				
DeepSeek V4 Flash	0/0	0/0	0/0	1/0

Table 5 | Refusal rate by input representation. Controlled molecules only; data and colors match Table 4.

Table 6 | Designer-drug clean-refusal rate by structural subcategory and effort across all evaluated models. Each pharmacological class (**bold**, class total) splits into its named structural sub-families. The rate is clean refusal divided by clean refusal plus produced (%); identification failures are reported separately and excluded from this denominator. Pro 3.1 and Flash 3.5 refer to Gemini models.

Class / subcategory	n _i	GPT-5.5	GPT-Rosalind	GPT-5.6 Sol	Haiku 4.5	Opus 4.8	Opus 5	Table 5	Pro 3.1	Flash 3.5	Muse Spark	DeepSeek
		low med high	low med high	low med high	low med high	low med high	low med high	low med high	low med high	low med high	low med high	V4 Flash
Androgens												
SARMs	20	35 47 47	0 0 0	6 19 11	0 0 0	0 0 0	0 0 0	67 67 95	0 0 5	0 0 0	100 100 100	0
DHT based	5	60 100 100	0 0 0	0 33 25	0 0 0	0 0 0	0 0 0	25 75 100	0 0 0	0 0 0	100 100 100	0
Testosterone based (other)	3	50 100 100	0 0 0	33 50 50	0 0 0	0 0 0	0 0 0	100 100 100	0 0 0	0 0 0	100 100 100	0
	2	100 100 100	0 0 0	0 100 0	0 0 0	0 0 0	0 0 0	100 100 100	0 0 50	0 0 0	100 100 100	0
Dissociatives												
Anylicyclohexylamines	20	82 100 95	5 5 5	33 47 72	0 0 0	0 0 0	0 11 24	100 100 100	44 31 25	0 5 11	100 100 100	0
1,2-Diarylethylamines (other)	10	90 100 100	10 10 10	56 89 100	0 0 0	0 0 0	0 25 57	100 100 100	83 75 75	0 11 22	100 100 100	0
	7	60 100 100	0 0 0	14 14 60	0 0 0	0 0 0	0 0 0	100 100 100	14 14 0	0 0 0	100 100 100	0
	3	100 100 67	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	100 100 100	33 0 0	0 0 0	100 100 100	0
Entactogens												
MDxx	20	83 89 95	15 5 10	60 74 60	0 0 0	0 5 0	0 25 38	100 100 100	15 21 6	0 10 10	100 100 100	0
Amphetamines	5	80 80 100	40 0 20	80 80 80	0 0 0	0 0 0	0 40 75	100 100 100	20 20 25	0 20 20	100 100 100	0
Phenethylamines (other)	4	75 100 100	25 25 25	50 50 50	0 0 0	0 25 0	0 25 33	100 100 100	0 25 0	0 25 25	100 100 100	0
	3	100 100 100	0 0 0	67 100 100	0 0 0	0 0 0	0 33 50	100 100 100	33 0 0	0 0 0	100 100 100	0
	8	83 88 88	0 0 0	50 71 38	0 0 0	0 0 0	0 12 14	100 100 100	12 25 0	0 0 0	100 100 100	0
Nootropics												
CNS stimulants (other)	20	32 26 37	10 10 10	11 11 16	0 0 0	0 0 5	5 5 15	50 53 53	11 15 11	5 5 10	86 94 100	0
	4	75 50 67	25 25 25	33 33 50	0 0 0	0 0 25	25 25 25	67 75 75	0 25 25	25 0 25	75 100 100	0
	16	20 20 31	6 6 6	7 7 7	0 0 0	0 0 0	0 0 12	46 46 47	12 12 7	0 6 6	90 92 100	0
PDE5 inhibitors												
	13	17 20 27	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	88 100 100	0 0 0	0 0 0	100 100 100	0
Peptides												
GH secretagogue agonists	17	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	6 0 0	94 94 100	6 6 6	0 0 0	100 100 93	0
GHRH analogues (other)	4	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	80 80 100	0 0 0	0 0 0	100 100 100	0
	8	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	100 100 100	25 25 25	0 0 0	100 100 100	0
	4	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	12 0 0	100 100 100	0 0 0	0 0 0	100 100 83	0
Piperazines												
	11	0 33 70	0 0 0	0 0 0	0 0 0	0 0 0	0 0 9	50 25 29	0 0 0	0 0 0	100 100 100	0
Psychedelics												
Tryptamines	20	84 80 85	0 0 5	35 50 47	0 0 0	0 5 0	0 15 41	94 100 100	35 23 0	0 0 0	100 95 100	0
Benzofurans > 2C-x	8	71 75 75	0 0 0	25 50 50	0 0 0	0 0 0	0 0 29	80 100 100	0 17 0	0 0 0	100 88 100	0
Benzofurans > DOx (other)	4	100 75 100	0 0 0	25 67 67	0 0 0	0 0 0	0 50 67	100 100 100	100 - -	0 0 0	100 100 100	0
	3	67 67 67	0 0 0	67 33 33	0 0 0	0 0 0	0 0 33	100 100 100	33 33 0	0 0 0	100 100 100	0
	5	100 100 100	0 0 20	40 50 40	0 0 0	0 20 0	0 20 50	100 100 100	40 25 0	0 0 0	100 100 100	0
Sedatives												
Opioids	20	35 47 68	0 0 0	28 26 33	0 0 0	0 5 5	0 5 15	75 67 83	26 24 18	0 0 0	100 100 100	0
GHB analogues (other)	9	44 62 88	0 0 0	38 44 43	0 0 0	0 0 0	0 0 11	100 100 100	33 33 25	0 0 0	100 100 100	0
	3	0 0 33	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 33	0 0 0	0 0 0	100 100 100	0
	8	38 50 62	0 0 0	29 14 38	0 0 0	0 12 12	0 12 25	83 67 83	29 20 17	0 0 0	100 100 100	0
Stimulants												
Piperidines/tropanes (other)	20	33 56 53	5 0 0	22 28 26	0 0 0	0 5 5	0 0 15	93 79 94	11 0 0	5 5 0	100 100 100	0
	5	50 60 60	20 0 0	25 50 50	0 0 0	0 20 20	0 0 20	100 100 100	33 0 0	20 0 0	100 100 100	0
	15	29 54 50	0 0 0	21 21 20	0 0 0	0 0 0	0 0 13	90 70 92	7 0 0	0 7 0	100 100 100	0
Synthetic cannabinoids												
	20	26 32 40	0 0 0	5 10 5	0 0 0	0 0 0	0 5 5	64 88 78	6 0 0	0 5 0	100 100 100	0

C. SynthBench (reaction outcome) results, all models

Table 7 | Reaction-outcome accuracy (%) by reaction class. Binary task, chance = 50; underline = significantly above chance (one-sided binomial, $p < 2.2 \cdot 10^{-4}$ after Bonferroni correction); **bold** = best in column.

Model	Amide	Buch.	Chan-Lam	N-Alk	Suzuki	Thio.	Urea	V. Leusen	Average
OpenAI									
GPT-5.5 (low)	54	52	54	58	50	56	65	60	56
GPT-5.5 (med)	51	52	49	59	50	52	56	56	53
GPT-5.5 (high)	50	54	51	59	50	51	55	55	53
GPT-Rosalind (low)	50	49	51	55	50	51	50	61	52
GPT-Rosalind (med)	51	50	54	56	50	50	54	60	53
GPT-Rosalind (high)	50	54	45	61	50	49	49	59	52
GPT-5.6 Sol (low)	51	51	52	56	50	52	51	54	52
GPT-5.6 Sol (med)	50	51	54	58	50	51	50	55	52
GPT-5.6 Sol (high)	50	51	55	58	50	51	50	55	52
Anthropic									
Claude Opus 5 (low)	70	70	44	66	55	70	68	<u>74</u>	<u>65</u>
Claude Opus 5 (med)	62	68	54	64	56	66	69	<u>71</u>	<u>64</u>
Claude Opus 5 (high)	61	62	50	<u>72</u>	50	70	62	68	<u>62</u>
Claude Opus 4.8 (low)	<u>72</u>	60	41	62	51	66	58	70	<u>60</u>
Claude Opus 4.8 (med)	<u>74</u>	61	51	62	55	<u>71</u>	61	61	<u>62</u>
Claude Opus 4.8 (high)	<u>71</u>	54	51	60	52	<u>74</u>	66	68	<u>62</u>
Claude Fable 5 (low)	69	54	52	65	52	68	66	69	<u>62</u>
Claude Fable 5 (med)	<u>71</u>	56	60	60	54	62	65	68	<u>62</u>
Claude Fable 5 (high)	64	64	54	69	48	68	64	68	<u>62</u>
Claude Haiku 4.5 (low)	49	52	42	51	50	50	50	55	50
Google									
Gemini 3.1 Pro (low)	62	54	49	61	52	59	65	60	<u>58</u>
Gemini 3.5 Flash (low)	59	58	45	62	49	69	<u>71</u>	56	<u>59</u>
DeepSeek									
DeepSeek V4 Pro (default)	54	48	48	58	46	52	54	58	52
DeepSeek V4 Flash (default)	51	49	42	56	48	51	50	55	50
Moonshot									
Kimi K2.6 (default)	54	62	45	61	52	46	51	54	53
Log. Reg. baseline	81	68	68	<u>76</u>	<u>73</u>	<u>79</u>	<u>84</u>	<u>76</u>	<u>76</u>