

Linear Temporal Logic Translation via Human-Inspired Self-Constrained Reasoning for Robot Task Specification

Submitted to: The International Journal of
Robotics Research
XX(X):1–19
©The Author(s) 2026
Reprints and permission:
sagepub.co.uk/journalsPermissions.nav
DOI: 10.1177/ToBeAssigned
www.sagepub.com/

SAGE

Haofei Hou^{1*}, Fanxu Meng^{1*}, Shunyi Zhao^{2*}, Kairui Yang¹, Mengchen Cai¹,
Lecheng Ruan^{1†}, Qining Wang^{1‡}

Abstract

Many robotic tasks are temporally extended and demand precise specifications of subgoals, constraints, and their temporal ordering. Yet human operators typically communicate such tasks in natural language, which is inherently ambiguous, underspecified, and context dependent. Translating human instructions into formal task specifications, such as Linear Temporal Logic (LTL), is therefore essential for verifiable and safe robotic execution. Existing LLM-based translators attempt to bridge this gap through open-ended reasoning or post-hoc constraint enforcement, but the former may violate domain constraints, whereas the latter can disrupt the reasoning needed for novel instructions. This paper proposes Self-Constrained Reasoning (SCR), a framework that mitigates this trade-off by internalizing structural knowledge into the model's decision-making process rather than imposing it as an external filter. By combining a structural constraint representation with a hierarchical decision-making formulation, SCR guides reasoning within a formally grounded space while preserving adaptability to unseen instructions. Experiments show that SCR improves both domain-constraint satisfaction and generalization, providing an effective and interpretable approach for translating human intent into verifiable specifications for robotic execution.

Keywords

Robotic Task Specification, Linear Temporal Logic, Natural Language Translation

Introduction

As physical extensions of human capabilities, robots are designed to execute complex human intentions in the real world (Black et al. 2025; Ma et al. 2026). A wide range of tasks delegated to robots by humans are temporally extended, unfolding over multiple interdependent stages rather than being defined by a single objective (Liu et al. 2023). Examples include cooking assistance, urban navigation, and robotic assembly, which involve sequences of sub-tasks governed by ordering constraints and time-varying requirements (Mavrogiannis et al. 2024; Liu et al. 2024a; Mendoza et al. 2024; Rabiei et al. 2025; Brodo et al. 2026). Prior work has demonstrated that, without precise specifications, even minor misinterpretations can lead to incorrect or unsafe behavior (Pan et al. 2023; Guo et al. 2026). Consequently, reliable execution requires unambiguous definitions of both the goals and their temporal dependencies.

Natural Language (NL) provides an intuitive interface for humans to communicate task intentions, yet it is inherently ambiguous, underspecified, and dependent on context (ichter et al. 2023). Robotic systems, however, require these intentions to be grounded in representations that are precise, task-relevant, and executable (Shi et al. 2024; Wang et al. 2026). This gap is especially prominent in Human-Robot Interaction (HRI), where users in voice-commanded assistance, domestic service, and laboratory automation often describe temporally extended tasks in everyday language, while the robot must infer the corresponding

goals, constraints, and ordering relations (Tellex et al. 2011; Rankin et al. 2021; Argenziano et al. 2025). Asking users to provide these specifications directly in formal logic is not a practical alternative, since it requires expertise in symbolic reasoning and familiarity with logical syntax that most end users lack (Pakonen et al. 2016; Santos et al. 2025; Schlör et al. 2006; Ma et al. 2025). Bridging this gap by automatically translating NL instructions into formal task specifications has therefore become a central challenge at the intersection of robotics, formal methods, and natural language understanding (Chen et al. 2023; Germiniani et al. 2025).

Linear Temporal Logic (LTL) offers a structured and expressive formalism for specifying temporally extended tasks, and has therefore become a widely used target representation for translating NL instructions into formal specifications, as illustrated in Fig. 1(A). By extending propositional logic with temporal operators, LTL can express properties that must hold over complete execution trajectories rather than at individual states (Raman et al. 2014; Wang et al. 2025). For example, an instruction

* These authors contributed equally to this work.

¹ School of Advanced Manufacturing and Robotics, Peking University, Beijing 100871, China.

² School of Integrated Circuits, Peking University, Beijing 100871, China.

Corresponding author:

Lecheng Ruan, Email: ruanlecheng@ucla.edu

Qining Wang, Email: qiningwang@pku.edu.cn

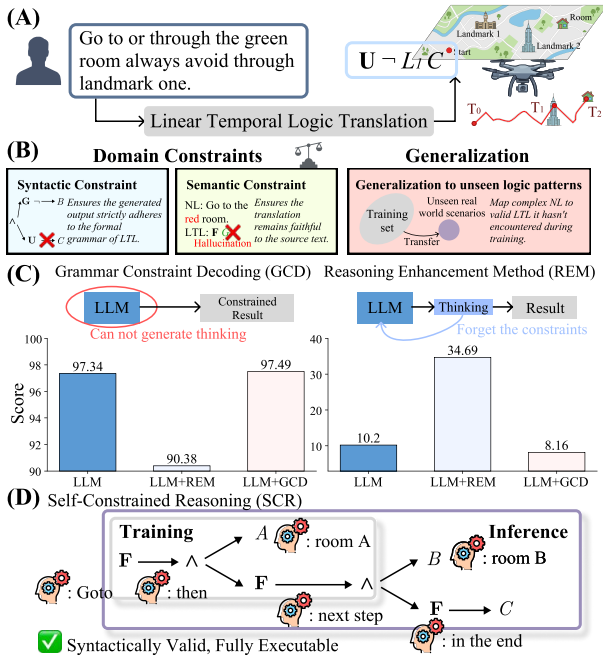


Figure 1. Challenges and methodologies in linear temporal logic translation. (A) A demonstration of translating a natural language instruction into a formal LTL expression to guide autonomous systems. (B) Challenges in LTL translation: domain constraints and generalization. (C) Comparative performance and pitfalls of two mainstream methods for existing challenges. Experiments demonstrate that while constraint-based methods improve adherence to domain constraints, they often fail to generate proper reasoning, leading to a decrease in the model’s generalization ability. Conversely, reasoning-based methods enhance generalization capabilities but tend to overlook specific domain constraints during the process. (D) Our approach effectively balances domain-specific constraints with generalization capabilities, demonstrating robust performance even when presented with novel and increasingly complex task specifications. Furthermore, the method ensures strict adherence to grammatical rules to guarantee executability, while enforcing textual alignment between the output and human intent.

such as “go to room one, then to room three, and always avoid landmark one” can be encoded as a single specification that combines an ordering requirement with a safety constraint. Given such a specification, correct-by-construction controllers or motion plans can be synthesized to provably satisfy the desired constraints (Gopalan et al. 2018; Patel et al. 2020; Gundana and Kress-Gazit 2022; Liu et al. 2026a). This connection between high-level task specification, formal verification, and controller synthesis makes LTL particularly attractive for safety-critical and long-horizon robotic applications (Wu et al. 2025).

Translating NL instructions into LTL presents unique challenges compared to conventional language-to-structure mapping (Gopalan et al. 2018; Oh et al. 2019; Quartey et al. 2025), as illustrated in Fig. 1(B). On one hand, specification tasks impose strict domain constraints, including both syntactic and semantic requirements. Generated formulas must adhere to the operator grammar of LTL (Baier and Katoen 2008; Li et al. 2026), respect domain-specific action semantics, and remain executable within robotic environments (Shi et al. 2024). On the other hand, robots

frequently encounter out-of-distribution instructions and novel task compositions, requiring strong generalization beyond the training distribution (Liu et al. 2024a; Guo et al. 2025b). Effectively addressing these demands requires methods that enforce strict domain conformance while generalizing to novel instructions, making this a fundamental challenge in translating NL into LTL.

Existing methods have approached this problem from two broad directions. Constraint-guided decoding methods prioritize formal correctness by restricting the output space during inference (Hokamp and Liu 2017; Kumar et al. 2022). Such constraints are effective in preventing syntactically invalid formulas, but overly rigid enforcement can interfere with the models intermediate reasoning process, which is often important for interpreting complex or unfamiliar instructions (Beurer-Kellner et al. 2024; English et al. 2025). In contrast, reasoning-enhanced methods improve generalization by encouraging the model to generate intermediate logical steps through strategies such as Chain-of-Thought (CoT), Self-Consistency, and Tree-of-Thought (Wei et al. 2022; Wang et al. 2023; Yao et al. 2023; Guo et al. 2025a). However, because these methods rely on open-ended generation, they remain susceptible to hallucinations and may overlook domain-specific constraints (Yao et al. 2025; Sun et al. 2025). As illustrated in Fig. 1(C), these trends reveal a persistent trade-off: stronger passive constraint enforcement tends to reduce reasoning-based generalization, whereas greater reasoning flexibility can weaken constraint adherence.

Recent work has sought to mitigate this trade-off through hybrid mechanisms that combine open-ended reasoning with symbolic structure (Liu et al. 2024b; Quansah and Bonnah 2026). The reason-then-constrain paradigm, exemplified by In-Writing, decouples exploratory reasoning from structured formatting, allowing models to reason in natural language before invoking constraint enforcement (Nguyen et al. 2026). Grammar augmentation methods, such as CRANE, introduce additional primitives into the reasoning process to help determine when grammatical constraints should be applied (Banerjee et al. 2025; Agarwal et al. 2025). Multi-stage pipelines, such as DICORE, use an open-ended Large Language Model (LLM) for broad task discovery and an FSM-based LLM for structural mapping (Parekh et al. 2025). Together, these studies suggest that progress in NL-to-LTL translation depends not merely on stronger filtering, but on neuro-symbolic mechanisms that preserve reasoning flexibility while maintaining formal discipline.

Although these methods partially mitigate the tension between constraint enforcement and reasoning (Nguyen et al. 2026), they generally rely on post-hoc correction or external intervention rather than integrating constraints throughout the reasoning process. This reliance reflects two pervasive, underlying assumptions, which ultimately constrain current approaches. First, constraints are typically treated as external filters applied during inference, rather than as formal knowledge internalized during training (Dash et al. 2022; Liu et al. 2026b). While such filters can intercept syntactic errors, they are less effective at resolving semantic inconsistencies: a forcibly corrected formula may satisfy the grammar of LTL yet deviate from the user’s intended task (Liu et al. 2024b; Loula et al. 2025). Second, reasoning is often modeled as a

linear token-generation process, which makes it difficult to regulate intermediate logic without globally restricting the model’s expressive capacity (Wei et al. 2022; Zhou et al. 2026). This is problematic for robotic task execution, where procedural safety requires intermediate inference steps to remain verifiable and consistent with task constraints (Guo et al. 2025a; Ildiz et al. 2026). When latent reasoning proceeds without such regulation, the model may neglect constraints embedded in the input and ultimately produce semantically inconsistent or unsafe actions (Xu et al. 2025). Together, these limitations suggest that existing methods address the symptoms of the constraint–reasoning conflict rather than its underlying cause.

Insights into the limitations of externalized constraints and linear reasoning can be drawn from human language processing. Linguistic theory, particularly Chomsky’s Universal Grammar, posits that language production is guided by internalized grammatical structures (Chomsky 2014; Verkerk et al. 2026), and psycholinguistic and neuroscientific evidence suggests that comprehension and reasoning operate over hierarchical representations rather than purely linear sequences (Rayner 1975; Chomsky 2000; Keshishian et al. 2026). These perspectives suggest a useful analogy for specification learning: constraints need not be applied only after reasoning, but can instead shape the reasoning process itself.

Inspired by these observations, we introduce Self-Constrained Reasoning (SCR), a framework that formulates NL-to-LTL translation as a cognitively bounded process. Our framework reflects a mechanism where structural constraints actively govern hierarchical reasoning, much like how internalized grammar inherently bounds human language. This framework is driven by two core principles: 1. Structural knowledge is internalized during the training process, rather than applying constraints as external post-hoc filters. This forces the model to operate within a valid constraint space, eliminating syntactic errors at the source. 2. Specification generation is treated as a hierarchical planning procedure, where each intermediate reasoning step is anchored by domain-valid constructs. This allows the model to explore novel linguistic expressions while maintaining formal correctness. Built upon these two principles, the Self-Constrained Reasoning (SCR) design directly addresses the limitations of prior methods. By internalizing constraints and enabling verifiable intermediate reasoning, our approach reduces syntactic and semantic errors when mapping unseen human intent to verifiable robotic specifications, as illustrated in Fig. 1(D).

Our contributions are summarized as follows:

1. We propose Self-Constrained Reasoning (SCR), a cognitively inspired framework for NL-to-LTL translation that generalizes to novel instructions while maintaining strict domain-constraint satisfaction.
2. We tailor the Synchronized Context-Free Grammar (SCFG) specifically to the LTL translation task and introduce an LTL-SCFG constraint representation. This internalizes domain knowledge during training and decision-making, allowing the model to reason over new information while remaining within a valid constraint space.
3. We develop a hierarchical decision-making formulation for LTL translation that enables hierarchical rea-

soning and constraint injection throughout generation.

4. We conduct extensive experiments showing that SCR consistently outperforms constrained and unconstrained baselines in domain-constraint satisfaction, generalization, safety violation reduction, and interpretability.

Methodology

Preliminaries

In this paper, robotic tasks are specified using LTL, which augments propositional logic with temporal operators to express properties of trajectories over time. We consider the planning problem for discrete-time systems governed by the dynamics $x_{t+1} = f(x_t, u_t)$, where $x \in \mathcal{X}$ represents the state and $u \in \mathcal{U}$ the control input. The control objective is to synthesize a policy that satisfies a high-level task specification derived from a NL instruction s .

The LTL specifications considered in this work follow a recursive grammar in prefix notation:

$$\varphi ::= p \mid \neg\varphi_1 \mid \wedge\varphi_1\varphi_2 \mid \vee\varphi_1\varphi_2 \mid \mathbf{G}\varphi \mid \mathbf{F}\varphi \mid \mathbf{U}\varphi_1\varphi_2, \quad (1)$$

where $p \in \mathcal{P} = \{p_i\}_{i=1}^N$ are Atomic Propositions (APs). In this work, the APs correspond to sets of salient regions in the state space that the robot may visit or avoid. Within this framework, each AP is associated with a constrained region in the state space defined as $x \models p_i \iff g_i(x) \leq 0$, where $g_i : \mathcal{X} \rightarrow \mathbb{R}$ represents a constraint function. The temporal operators are defined as follows: $\mathbf{G}\phi$ denotes that the condition ϕ must hold **globally** for all time; $\mathbf{F}\phi$ denotes that ϕ must hold **eventually** (i.e., there exists some time step t where ϕ is true); $\mathbf{U}\phi_1\phi_2$ denotes that ϕ_1 must hold for all time steps **until** ϕ_2 holds.

Cognitive Foundations and Overview of the Framework

To resolve the inherent tension between flexible reasoning and rigid constraint satisfaction, we propose a hierarchical framework for translating NL into LTL. Our approach adopts an SCR architecture that internalizes domain knowledge directly into the model’s decision-making dynamics.

Our framework is inspired by psycholinguistic evidence suggesting that human language production is a hierarchical process governed by internalized structural rules (Chomsky 2014; Frankland and Greene 2020). When a human expert translates a complex instruction such as “Visit room A, then B, while avoiding C,” they do not generate symbols blindly; they intuitively identify APs and decompose the temporal logic into a nested tree of subgoals (Correa et al. 2023).

As illustrated in Fig. 2, our framework achieves a synergy of flexible reasoning and rigid constraint satisfaction through a closed-loop hierarchical planning architecture. This ensures that the model’s reasoning is naturally bounded by the formal grammar of LTL, preventing the hallucinations common in unconstrained reasoning models while maintaining the fluidity often lost in post-hoc filtering methods.

The proposed framework bridges data-driven grammar learning with hierarchical execution. First, the framework ingests a parallel corpus of language instructions and

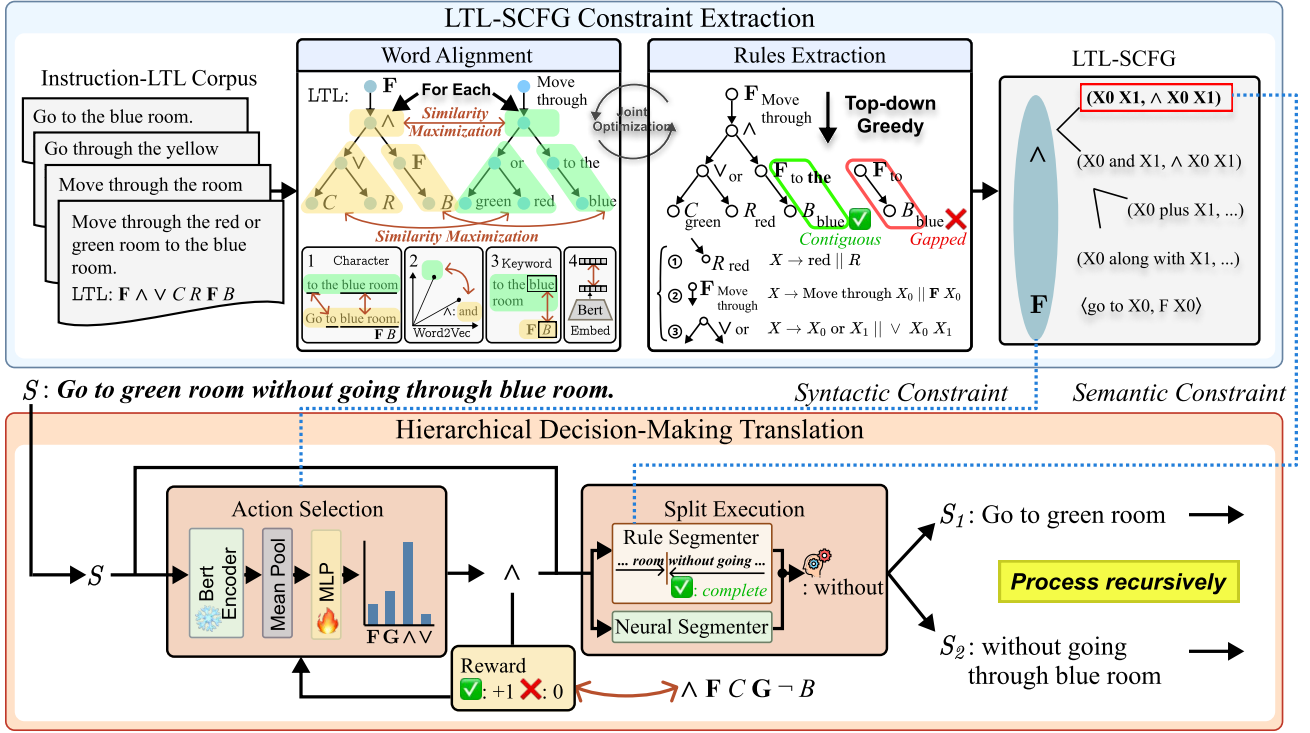


Figure 2. Overview of the proposed framework. The pipeline extracts an LTL-SCFG from parallel corpora (top) and utilizes it to constrain the Reinforcement Learning (RL) agent’s action space during hierarchical translation (bottom).

LTL formulas to automatically construct a synchronized LTL-SCFG grammar. This is achieved through a word alignment that optimizes multi-dimensional semantic and lexical similarities to map formal operators to text spans, followed by a hierarchical rule extraction that employs a top-down greedy algorithm to recursively compose grammar rules along the LTL syntax tree. Based on this learned structural space, the system then translates novel instructions by decoupling high-level logical reasoning from low-level text segmentation: an RL-trained language agent policy dynamically selects the dominant outermost LTL operator, while an adaptive segmenter simultaneously decomposes the remaining text into constituent sub-sentences. This decision-and-split process recursively descends along the LTL syntax tree until all subtasks are resolved, ultimately outputting a verifiable, structurally sound formal LTL formula.

Unlike standard RL approaches that explore an unconstrained action space, our agent operates within a space defined by this prefix grammar:

- **Syntactic Constraints:** The LTL grammar serves as the primary decision-making objective, ensuring that every generated formula is syntactically valid and executable within the robot’s domain.
- **Semantic Constraints:** The source language provides the semantic foundation, allowing the model to segment the instruction into manageable subtasks that correspond to specific logical operators and operands.

LTL-SCFG Constraint Extraction

In this section, we introduce the LTL-SCFG and describe the procedure for extracting and constructing the constraint G from a parallel corpus $C = \{(s_i, \varphi_i)\}$, where s_i denotes

an NL instruction and φ_i represents its corresponding LTL formula. LTL-SCFG allows the policy to incorporate and reason about new information while operating within a formal constraint space. The extraction process consists of two major stages: word alignment and rule extraction.

LTL-SCFG Definition The Synchronized Context-Free Grammar (SCFG) has a long-established role in statistical machine translation. Formally, an SCFG comprises a set of production rules R of the following form:

$$X \rightarrow \alpha \parallel \beta, \quad (2)$$

where X is a nonterminal symbol, $\alpha \in (\{X\} \cup \Sigma_\alpha)^*$ is a sequence of terminal and/or nonterminal symbols in the source language (English), and $\beta \in (\{X\} \cup \Sigma_\beta)^*$ is the corresponding sequence in the target language (*i.e.*, LTL). The terminal symbol sets of the source and target languages are denoted as Σ_α and Σ_β , respectively. This parallel structure captures the synchronization between the source and target representations.

For example, consider a rule in prefix notation:

$$X \rightarrow X_0 \text{ and } X_1 \parallel \wedge X_0 X_1. \quad (3)$$

An SCFG typically uses a single nonterminal symbol, where subscripts indicate the correspondence between source and target nonterminals. By recursively applying such rules, a complete translation can be generated in a top-down manner. However, since NLS generally do not conform to $LL(k)$ grammar constraints, top-down parsing is often infeasible for natural language. Consequently, traditional statistical translation models usually employ bottom-up parsing instead.

In the context of LTL translation, the set of APs $\mathcal{P}$ is comparatively small. When we consider LTL expressions containing at most one operator and restrict operands to nonterminal symbols, the total number of valid target-side expressions is bounded by $|\mathcal{P}| + 6$. Owing to this property, humans naturally reason about LTL expressions in a top-down manner—contrasting with the mixed strategies commonly observed in general NL translation. This cognitive observation provides the theoretical foundation for imposing structural constraints on the language model.

We define LTL-SCFG as a tuple $(X, \Sigma_\alpha, \Sigma_\beta, f)$, where $\Sigma_\beta = \mathcal{P} \cup \{\neg, \wedge, \vee, \mathbf{G}, \mathbf{F}, \mathbf{U}\}$, and the mapping function f associates each target-side operator $o \in \Sigma_\beta$ with its corresponding set of source-side realizations and weights $\{(\alpha_i, w_i) \mid \alpha_i \in (\{X\} \cup \Sigma_\alpha)^*, w_i > 0\}$. This formulation enables Σ_β to serve as the decision-making target—specifically, determining the outermost operator or primitive of the current sentence—thereby constraining the exploration space of RL during translation. Simultaneously, the source-side expressions provide the foundation for task decomposition.

Word Alignment As defined in the LTL-SCFG framework, identifying the textual counterparts of APs and operators in LTL is essential, as it directly determines the construction of the mapping function f . Specifically, word alignment, denoted as $\omega_i : \Sigma_\beta \rightarrow \Sigma_\alpha^*$, aims to establish a correspondence between each AP or operator in an LTL formula φ_i and its corresponding textual element $s_{m,n} \in s_i$.

Although one could attempt to optimize the mapping by directly maximizing similarity, such local optimization is inherently flawed as it lacks global contextual consideration, often resulting in suboptimal alignments. Moreover, the existence of synonyms in NL further increases the risk of incorrect alignments. Given the back-translation-friendly nature of LTL, it is feasible to define an SCFG that translates LTL into structured English (Pan et al. 2023). Aligning the formulas within this structured English space facilitates clause-level reasoning and significantly reduces alignment complexity.

According to the definition in Eq. (1), the syntactic tree of any LTL formula can be directly derived from its prefix form. Each LTL formula φ can thus be represented as a rooted, ordered syntactic tree $T_\varphi = (V_\varphi, E_\varphi, \lambda_\varphi, \ell_\varphi, \mathbf{r}_\varphi)$, where V_φ denotes the set of nodes, $\mathbf{r}_\varphi \in V_\varphi$ is the root, $E_\varphi \subseteq V_\varphi \times V_\varphi$ is the set of directed edges, $\lambda_\varphi : V_\varphi \rightarrow \Sigma_\beta$ is a labeling function, and $\ell_\varphi : V_\varphi \rightarrow \Sigma_\beta^*$ denotes a sub-LTL labeling function. The structure satisfies $\ell_\varphi(\mathbf{r}_\varphi) = \varphi$ and

$$\begin{cases} \lambda_\varphi(v) = p, \ell_\varphi(v) = p_i \Leftrightarrow p_i \in \mathcal{P}, \\ \lambda_\varphi(v) = \mathbf{o}, \ell_\varphi(v) = \mathbf{o} \ell_\varphi(v_1) \Leftrightarrow \begin{matrix} (v, v_1) \in E_\varphi \\ \mathbf{o} \in \{\neg, \mathbf{G}, \mathbf{F}\}, \end{matrix} \\ \lambda_\varphi(v) = \mathbf{o}, \ell_\varphi(v) = \mathbf{o} \ell_\varphi(v_1) \ell_\varphi(v_2) \Leftrightarrow \begin{matrix} (v, v_1) \in E_\varphi \\ (v, v_2) \in E_\varphi, \\ \mathbf{o} \in \{\wedge, \vee, \mathbf{U}\} \end{matrix} \end{cases} \quad (4)$$

Since LTL can be naturally represented as a syntax tree, we leverage LLM-based sampling to construct a plausible mapping function f_B , which is subsequently used to build the back-translation grammar G_B for LTL-SCFG. By recursively applying f_B , structured English sentences $s_B(\ell_\varphi(v))$ can be generated for any LTL clause $\ell_\varphi(v \in V_\varphi)$

through an Markov Chain Monte Carlo (MCMC) process:

$$\begin{aligned} s_B(\ell_\varphi(v)) &\sim \text{MCMC}(v, f_B) \\ &\sim P(s_B(\ell_\varphi(v)) \mid s_B(\ell_\varphi(v_s))) \quad (v, v_s) \in E_\varphi \\ &\sim \text{Uniform}(f_B(\lambda_\varphi(v))) \times \prod_{v_s} P(s_B(\ell_\varphi(v_s))), \end{aligned} \quad (5)$$

where v_s denotes a child node of v in the syntax tree T_φ , and $\text{Uniform}(L)$ denotes probability mass function of the discrete uniform distribution over the set L .

To address the limitations of direct similarity maximization, we formulate the following optimization objective:

$$\begin{aligned} \omega_i &= \arg \max_{\omega_i} J(\omega_i, s_i, T_{\varphi_i}) \\ &= \arg \max_{\omega_i} \sum_{v \in V_{\varphi_i}} \left[S(\text{MCMC}(v, \omega_i), s_B(\ell_{\varphi_i}(v))) \right. \\ &\quad \left. + S(\omega_i(\lambda_{\varphi_i}(v)), f_B(\lambda_{\varphi_i}(v))) \right]. \end{aligned} \quad (6)$$

where

$$\begin{aligned} S(s_{m,n}, L) &= \frac{1}{|L|} \sum_{\xi \in L} \left[\gamma_1 S_{\text{char}}(s_{m,n}, \xi) + \gamma_2 S_{\text{w2v}}(s_{m,n}, \xi) \right. \\ &\quad \left. + \gamma_3 S_{\text{key}}(s_{m,n}, \xi) + \gamma_4 S_{\text{sent}}(s_{m,n}, \xi) \right]. \end{aligned} \quad (7)$$

where each term measures a specific aspect of similarity: S_{char} for character-level matching, S_{w2v} for word-level semantic similarity, S_{key} for key-term overlap, and S_{sent} for sentence-level meaning. The coefficients $\gamma_i > 0$ are weighting factors that balance the contributions of each similarity component.

Rule Extraction Upon obtaining the alignment function ω_i , we proceed to extract a set of grammar rules following a Hiero-style hierarchical phrase-based framework (Chiang 2005). This process identifies consistent phrase pairs and recursively composes them into larger hierarchical translation rules. Fig. 3 visualizes examples of these extracted grammar rules across three different domains (CleanUp, Drone, and Pick), demonstrating how NL phrases map to specific LTL operators and APs.

Given the assumption that target-side LTL expressions contain at most one operator and restrict operands to nonterminal symbols, we can recursively compose rules along the syntax tree of the LTL formula. More precisely, a grammar rule is derived from each node $v \in V_{\varphi_i}$ in the syntax tree. Let $s_i(v) \in s_i$ denote the NL phrase corresponding to the subformula $\ell_{\varphi_i}(v)$. The extraction follows:

$$\begin{cases} \omega_i(\lambda_{\varphi_i}(v)) \parallel \lambda_{\varphi_i}(v) \\ \Leftrightarrow \lambda_{\varphi_i}(v) \in \mathcal{P}, \\ p_v(\omega_i(\lambda_{\varphi_i}(v)), X_{v_1}) \parallel \lambda_{\varphi_i}(v) X_{v_1} \\ \Leftrightarrow (v, v_1) \in E_{\varphi_i}, \lambda_{\varphi_i}(v) \in \text{OpsU}, \\ p_v(X_{v_1}, \omega_i(\lambda_{\varphi_i}(v)), X_{v_2}) \parallel \lambda_{\varphi_i}(v) X_{v_1} X_{v_2} \\ \Leftrightarrow (v, v_1), (v, v_2) \in E_{\varphi_i}, \lambda_{\varphi_i}(v) \in \text{OpsB}, \end{cases} \quad (8)$$

where $p_v(L) \in \text{Perm}(L)$ denotes an arbitrary permutation of the corresponding symbols that preserves the lexical order in the NL text. The sets OpsU and OpsB represent the unary and binary operators supported by the system, respectively. We further assume the following composition property for

CleanUp		Drone		Pick	
$F X0$	X0 go to X0 move to X0 enter X0 lead you to X0 move to X0 reach X0 get to X0 navigate to X0 ...	$U X0 X1$	X0 until X1 only if X0 X1 X0 without going through X1 X0 but do not first go through X1 ...	$F X0$	X0 place X0 in X0 pick up X0 deposit X0 put X0 move X0 to X0 drop X0 transfer X0 ...
$G X0$	remaining on X0 only moving in X0 not through X0 navigate within X0 never X0 stay in X0 ...	$F X0$	X0 go to X0 navigate to X0 move to X0 proceed to X0 get to X0 travel to X0 head to X0 visit X0 reach X0 go through X0 pass through X0 going to X0 ...	S	scan for cubes scan for blocks move back and forth locate blocks hover over the table ...
$\wedge X0 X1$	X0 X1 X0 to X1 X0 and then X1 X0 but X1 X0 after X1 X0 via X1 X0 to go through X1 ...	$G X0$	remain on X0 stay in X0 stay on X0 leaving X0 without leaving X0 only moving in X0 navigating within X0 ...	$G X0$	X0 always X0 continuously X0 keep X0 ...
$\neg X0$	not X0 not through X0 avoiding X0 avoid X0 without going through X0 non X0 except X0 ...	$\wedge X0 X1$	X0 and X1 X0 through X1 X0 to X1 X0 while X1 X0 but X1 X0 then X1 X0 before X1 X0 after X1 X0 without X1 ...	$\neg X0 X1$	X0 X1 X0 and X1 X0 but X1 X0 while X1 X0 then X1 ...
$\vee X0 X1$	X0 or X1 X0 and X1 X0 to X1 X0 either X1 ...	$\neg X0$	avoid X0 do not enter X0 without going to X0 ...	$\neg X0$	X0 not X0 while ignoring X0 if not X0 avoid X0 when not X0 do not pick up X0 ...
Entity	R: red room red area ... B: blue room blue area blue box blue square ... C: green room green area green box green square ... Y: yellow room yellow area yellow box yellow square ...	Entity	purple/yellow/blue/red room landmark 1/2/3 first/second/third floor	Entity	R: red ones red blocks B: blue ones blue blocks Y: yellow yellow blocks C: blocks that are green green blocks green ones A: all blocks any block colored blocks

Figure 3. Extracted LTL-SCFG rules across domains. The tables display the mapping between formal LTL operators (e.g., F , G , $\neg$) and their lexical realizations in different datasets.

the source-side phrase:

$$\sum_{x \in p_v} [x \cdot \mathbb{I}(x \in \Sigma_\alpha^*) + s_i(u) \cdot \mathbb{I}(x = X_u)] = s_i(v). \quad (9)$$

Under this assumption, the rule extraction process can be further optimized. The objective function J can be expanded as:

$$\begin{aligned} J(\omega_i, s_i, T_{\varphi_i}) &= \sum_v [S(\text{MCMC}(v, \omega_i), s_B(\ell_{\varphi_i}(v))) \\ &\quad + S(\omega_i(\lambda_{\varphi_i}(v)), f_B(\lambda_{\varphi_i}(v)))] \\ &= \sum_v [S(s_i(v), s_B(\ell_{\varphi_i}(v))) \\ &\quad + S(\omega_i(\lambda_{\varphi_i}(v)), f_B(\lambda_{\varphi_i}(v)))] \\ &= \sum_v S(\omega_i(\lambda_{\varphi_i}(v)), f_B(\lambda_{\varphi_i}(v))) \\ &\quad + \sum_{v_s \in \text{Son}(v)} S(s_i(v_s), s_B(\ell_{\varphi_i}(v_s))). \end{aligned} \quad (10)$$

This formulation reveals that word alignment and rule extraction can be optimized jointly by refining $s_i(v)$ along the LTL syntax tree T_{φ_i} using a top-down greedy algorithm. This approach is predicated on the assumption that $s_i(v)$ is composed of its children's phrases $s_i(v_s)$ and the aligned operator text $\omega_i(\lambda_{\varphi_i}(v))$ under a specific permutation.

By leveraging the simplified optimization described above, we can obtain the set of grammar rules corresponding to Eq. (8). Subsequently, the proposed LTL-SCFG can be derived through the merging grammar rules with same target-side operator $o \in \Sigma_\beta$. The complete LTL-SCFG rule extraction procedure is detailed in Alg. 1.

Hierarchical Decision-Making Translation

This section presents how the LTL-SCFG constraints are integrated into the RL exploration process within our translation model. We first formulate LTL translation as an Markov Decision Process (MDP). Our framework constrains the agent's decision space according to LTL-SCFG rules by decoupling high-level decision-making from subtask decomposition. Subsequently, we discuss the optimization process, where the agent is trained through RL with teacher forcing, which improves exploration efficiency while preserving translation quality.

Translation as a Markov Decision Process The process of translating LTL can be modeled as a sequential decision-making task: selecting the outermost corresponding operator or APs in the NL $\mathbf{o} \in \Sigma_\beta$ and applying the corresponding LTL-SCFG rule to transition into different branch states (the sub-sentences $\{\hat{s}(v_s)\}$ corresponding to $\{v_s\}$ in the translation model). Hence, the translation process can be expressed in a top-down, tree-structured manner as

$$\mathbf{o}, \{\hat{s}(v_s)\} = \pi(v, \hat{s}(v), T_\varphi). \quad (11)$$

Accordingly, we define that the translation model receives a fixed reward for correct primitive $r_v = \epsilon \times [\mathbf{o} = \lambda_\varphi(v)]$. The optimization objective of the translation model can thus be

expressed as

$$\pi^* = \arg \max_{\pi} \mathbb{E}_{(s_i, \varphi_i) \sim \mathcal{D}, \pi} [U(s_i(\mathbf{r}_{\varphi_i}))], \quad (12a)$$

$$U(\hat{s}(v)) = r_v + \frac{\gamma}{|\mathcal{N}(v)|} \sum_{v_s \in \mathcal{N}(v)} U(\hat{s}(v_s)), \quad (12b)$$

where γ denotes the discount factor.

We define an MDP $\mathcal{M} = \langle \mathcal{S}, \mathcal{A}, P, R, \gamma \rangle$, where $\mathcal{S} = \{s_t = (v, \hat{s}) \mid v \in T_{\varphi}, \hat{s} \in \Sigma_{\alpha}^*\}$ is the set of states, and $\mathcal{A} = \{a_t = (\mathbf{o}, \{\hat{s}(v_s)\}) \mid \mathbf{o} \in \Sigma_{\beta}, \hat{s}(v_s) \in \Sigma_{\alpha}^*, (v, v_s) \in E_{\varphi}\}$ is the set of actions. And

$$P(s_{t+1} = (v_s, \hat{s}(v_s)) \mid s_t = (v, \hat{s}(v)), a_t = (\mathbf{o}, \{\hat{s}(v_s)\})) = \frac{1}{|\{v_s\}|}, \quad (13)$$

where $P(s_{t+1} \mid s_t, a_t)$ denotes the transition probability from state s_t to s_{t+1} under action a_t , $R(s_t, a_t) = r_t = \epsilon \times [\mathbf{o}_t = \lambda_t(v_t)]$ represents the expected immediate reward for taking action a_t in state s_t , and $\gamma \in [0, 1]$ is the discount factor that balances immediate and future rewards.

The goal of the translation agent interacting with this MDP is to find a policy $\pi(a_t \mid s_t)$ that maximizes the expected discounted return:

$$\arg \max_{\pi} \mathbb{E}_{\pi} \left[\sum_{t=0}^{\infty} \gamma^t r_t \right]. \quad (14)$$

It can be proved that the objective of the MDP optimization strategy in Eq. (14) is equivalent to optimizing the translation model in Eq. (12), i.e., the translation task can be reformulated as an equivalent MDP.

Proof. Let $U_t = \sum_{k=0}^{\infty} \gamma^k r_{t+k}$ denote the cumulative discounted return at time step t . It is easy to see that $U_t = r_t + \gamma \sum_{k=0}^{\infty} \gamma^k r_{t+k+1} = r_t + \gamma U_{t+1}$. Taking the expectation conditioned on s_t and the policy π , we obtain

$$\begin{aligned} \mathbb{E}_{\pi}[U_t \mid s_t] &= \mathbb{E}_{\pi}[r_t \mid s_t] + \gamma \mathbb{E}_{\pi}[U_{t+1} \mid s_t] \\ &= r_v + \gamma \mathbb{E}_{\pi}[U_{t+1} \mid s_t] \\ &= r_v + \frac{\gamma}{|\{v_s\}|} \sum_{v_s} \mathbb{E}_{\pi}[U_{t+1} \mid s_{t+1}]. \end{aligned}$$

This recursive relationship aligns exactly with the definition of $U(\hat{s}(v))$ in Eq. (12). Therefore, $\mathbb{E}_{\pi}[U_t \mid s_t] = \mathbb{E}_{\pi}[U(\hat{s}(v))]$.

$$\begin{aligned} \mathbb{E}_{\pi} \left[\sum_{t=0}^{\infty} \gamma^t r_t \right] &= \mathbb{E}_{\pi}[U_0 \mid s_0] \\ &= \mathbb{E}_{s_0, \pi}[U_0] \\ &= \mathbb{E}_{(s_i, \varphi_i), \pi} [U(s_i(\mathbf{r}_{\varphi_i}))]. \end{aligned}$$

Self-Constrained Reasoning Language Agent Inspired by human cognitive processes, we design a hierarchical translation framework that effectively integrates the constraints into the translation model:

$$\mathbf{o} = \pi^1(s_t = (v, \hat{s})), \quad (15)$$

$$\{\hat{s}(v_s)\} = \pi^2(s_t, \mathbf{o}, f(\mathbf{o})). \quad (16)$$

This approach decouples decision-making from subtask decomposition, enabling the model to operate within a constrained space and to produce evidence-based outputs.

The model first conducts action selection which generates an output decision under the constraints of the LTL-SCFG grammar, which restricts the number of possible actions $|\Sigma_{\beta}|$. These constraints narrow the search space for the RL agent, ensuring that the exploration remains focused on valid and meaningful actions. In practice, π^1 serves as the target for RL training, employing a frozen Bidirectional Encoder Representations Transformer (BERT) model for text embeddings, while the remaining components are encoded in one-hot format. The overall network follows an MLP architecture, with additional history state $h_t = \{s_{t-1}, s_{t-2}, \dots\}$ information incorporated.

Following the action-selection phase, the model performs split execution which decomposes the overall translation task into smaller subtasks guided by the LTL-SCFG constraints. This submodel acts as a frozen module. We trained a neural segmenter based on BERT, $P_{\text{Bert}}(\{b_i\} \mid \hat{s}, \mathbf{o})$, where the segmentation boundaries $\{b_i\}$ divide a sentence into three parts. To further improve segmentation accuracy, we measure the structural completeness of candidate segments by evaluating their semantic similarity against canonical back-translations derived from the grammar:

$$P_{\text{Scfg}}(\{b_i\} \mid \hat{s}, \mathbf{o}) = \frac{F(\{b_i\} \mid \hat{s}, \mathbf{o})}{\sum_{\{b_k\}} F(\{b_k\} \mid \hat{s}, \mathbf{o})}, \quad (17)$$

where the scoring function $F(\{b_i\} \mid \hat{s}, \mathbf{o})$ evaluates the optimal syntactic alignment between the segmented text spans and the right-hand side components of an SCFG rule:

$$F(\{b_i\} \mid \hat{s}, \mathbf{o}) = \max_{m, p \in \mathbf{P}} \left(\log w_m \times \sum_j S(\hat{s}_{p(j)}, s_B(x_j^{(m)})) \right). \quad (18)$$

Here, $w_m \geq 1$ denotes the prior weight of rule $\alpha_m \in f(\mathbf{o})$, $p \in \mathbf{P}$ represents a permutation that matches the segmented textual spans $\{\hat{s}_j\}$ to the components $\{x_j^m\} \in \alpha_m$, and $s_B(x_j)$ represents the canonical structured English sentence for sub-clause x_j^m . The similarity function $S(\cdot, \cdot)$ utilizes the metrics defined in Eq. (7) to measure semantic alignment.

To balance domain-specific performance and generalization capability, the weights assigned to the neural network and the grammar-based rules are adaptively combined, $P_{\text{Seg}} = \eta_1 P_{\text{Bert}} + \eta_2 P_{\text{Scfg}}$. The subtask decomposition model can be defined as

$$\{b_i\} = \arg \max_{\{b_i\}} P_{\text{Seg}}, \quad (19)$$

$$\hat{s}(v_s) = \arg \max_{\hat{s}_j \in \hat{s}[b_i, b_{i+1}]} S(s_j, s_B(v_s)).$$

Reinforcement Learning Training To optimize the translation decision agent π^1 under the LTL-SCFG constraints, we adopt a RL framework based on Proximal Policy Optimization (PPO) (Schulman et al. 2017). The objective is to maximize the expected cumulative reward defined by the MDP described in Sec. Translation as a Markov Decision Process. Let π_{θ}^1 denote the agent's policy parameterized by θ ; the PPO objective with a clipped surrogate is expressed as:

$$\mathcal{L}^{\text{PPO}}(\theta) = \mathbb{E}_t \left[\min \left(r_t(\theta) \hat{A}_t, \text{clip}(r_t(\theta), 1 - \epsilon, 1 + \epsilon) \hat{A}_t \right) \right], \quad (20)$$

Algorithm 1: Extraction of LTL-SCFG

Input: Corpus $C = \{(s_i, \varphi_i)\}$, Back translation rules f_B , Optimization function parameters γ_i

Output: Extracted LTL-SCFG rules f

Function `Extract_Rules` (s, v, T) :

```

 $\beta \leftarrow \lambda(v);$ 
 $\omega(\lambda(v)), \{s(v_s)\} \leftarrow$ 
   $\arg \max S(\omega(\lambda(v)), f_B(\lambda(v))) +$ 
   $\sum_{v_s} S(s(v_s), s_B(\ell_\varphi(v_s))) ;$ 
s.t.  $\exists p \in \text{Perm}(\omega(\lambda(v)), \{s(v_s)\}), \sum_{x \in p} x = s;$ 
Get  $\alpha$  according to Eq. (8) and Eq. (9);
 $R \leftarrow \{(\alpha, \beta)\};$ 
foreach ( $v, v_s$ )  $\in E$  do
   $R \leftarrow R \cup \text{Extract\_Rules}(s(v_s), v_s, T);$ 
return  $R;$ 

```

$f \leftarrow \emptyset;$

foreach (s_i, φ_i) $\in C$ **do**

```

  Build syntax tree  $T_{\varphi_i}$  according to Eq. (4);
  foreach ( $\alpha, \beta$ )  $\in \text{Extract\_Rules}(s_i, r_{\varphi_i}, T_{\varphi_i})$  do
     $f(\beta)[\alpha] \leftarrow f(\beta)[\alpha] + 1;$ 

```

return $f;$

where $r_t(\theta) = \frac{\pi_\theta^1(a_t|s_t)}{\pi_{\theta_{\text{old}}}^1(a_t|s_t)}$ is the probability ratio, $\hat{A}_t$ is the advantage estimate at timestep t , and ϵ is a small clipping parameter that ensures stable updates. The advantage function $\hat{A}_t$ is computed using the Generalized Advantage Estimation (GAE) formulation:

$$\begin{aligned} \hat{A}_t &= \delta_t + (\gamma\lambda)\delta_{t+1} + \dots + (\gamma\lambda)^{T-t-1}\delta_{T-1}, \\ \delta_t &= r_t + \gamma V(s_{t+1}) - V(s_t), \end{aligned} \quad (21)$$

where $V(s_t)$ denotes the value function, γ is the discount factor, and λ controls the bias-variance trade-off in advantage estimation.

Given that our translation objective emphasizes the correctness of the current state over long-term rewards in Eq. (12), we incorporate *teacher forcing* during training. Instead of always starting from the root node, the initial state s_0 is sampled from any subtree within the LTL syntax tree, i.e., $s_0 = (v_s, s(v_s))$. During this process, the agent generates sub-sentences $\hat{s}(v_s)$ under the supervision of the corresponding ground-truth English sentence $s(v_s)$. This strategy facilitates locally consistent decision-making across substructures, ensuring high translation accuracy at each hierarchical level while preserving the global optimization properties of RL. Fig. 4 provides step-by-step derivation examples from the CleanUp and Drone domains.

Experiment Setup

Dataset

To evaluate the capability of our framework to translate NL instructions into LTL formulas, we utilized three distinct domain-specific datasets (Pan et al. 2023). Each dataset comprises triplets consisting of NL instructions, permissible AP, and their corresponding target LTL formulas. These

datasets span diverse application domains, enabling a comprehensive assessment of the framework’s performance, its adaptability to heterogeneous contexts, and its ability to generalize mappings from natural language to formal specifications.

Specifically, our evaluation employed three datasets with varying characteristics: Drone Navigation tasks (343 distinct LTL formulas), CleanUp tasks (39 distinct LTL formulas), and Pick-and-Place tasks (5 distinct LTL formulas). For each dataset, the data was partitioned into training and testing sets using a 4:1 ratio. We evaluate the models’ capability to satisfy domain constraints on this test set, which is consistently annotated and features the same distribution of LTL formulas.

Furthermore, to rigorously assess the framework’s ability to generalize to entirely novel scenarios, we established a zero-shot generalization benchmark. This benchmark consists of distinct formulas that were withheld from the training phase, requiring the model to translate instructions without prior exposure to these specific targets. The generalization sets include 51 distinct LTL formulas for Drone Navigation and corresponding sentences, 49 for CleanUp, and 3 for Pick-and-Place tasks with 47 different sentences.

Baselines

We categorize the compared LLM baseline methods into three major classes based on how they incorporate constraints and enhance model capabilities:

Knowledge Injection (Soft Constraints): These methods provide domain-specific knowledge to the model either via in-context learning or parameter updates. This category includes LLM-RAG, an LLM-based method incorporating Retrieval-Augmented Generation (RAG) (Lewis et al. 2020) where the optimal shot number is determined via a grid search (range 1–30) on a 10% validation set, and fine-tuned models trained on domain data using the Llama-Factory framework (Zheng et al. 2024) with the Low-Rank Adaptation (LoRA) approach (Hu et al. 2022). Notably, knowledge injection frequently serves as a foundational component that is combined with the subsequent two categories to further augment performance.

Decoding Guidance (Hard Constraints): These methods enforce strict structural or lexical adherence during the generation process. We employ Grammar-Constrained Decoding (GCD), implemented via the Guidance framework (Willard and Louf 2023), which provides a mechanism to inject hard constraints during decoding to ensure output validity.

Reasoning and Exploration Enhancement: These methods aim to improve the model’s reasoning and generalization ability. This includes CoT reasoning following the methodology of Wei et al. (2022), allowing the model to generate intermediate steps, and RL-based models built on the simpleRL-reason framework (Zeng et al. 2025) using a sparse-reward setting where rewards are granted only for entirely correct translations.

Beyond these LLM-based approaches, we also compare against **traditional models**, including RNN (Mikolov et al. 2010), CopyNet (Gu et al. 2016), BERT (Devlin et al. 2019), and the BERT-based E-NL2LTL model (Pan et al. 2023), as

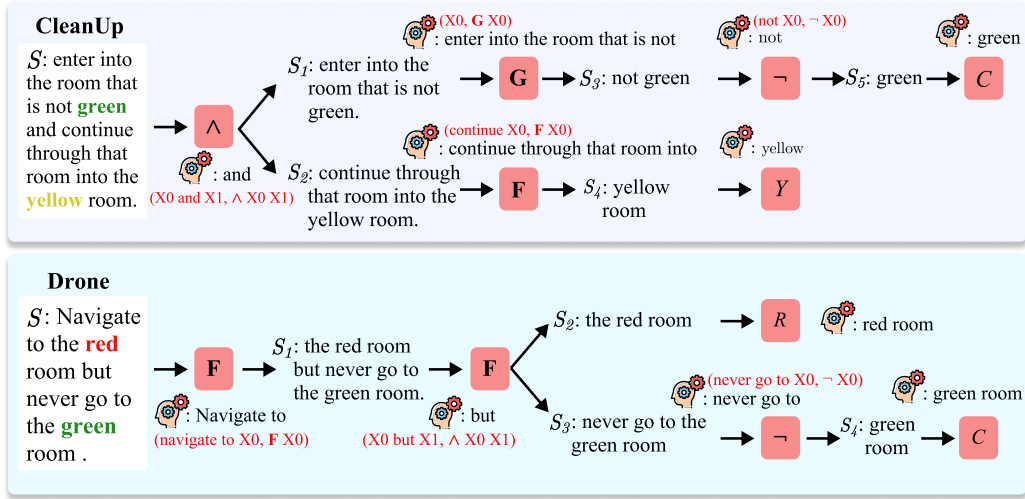


Figure 4. Recursive translation showcases. The diagrams illustrate the step-by-step derivation for CleanUp (top) and Drone (bottom) tasks. The agent recursively selects operators (red blocks) and decomposes the NL instruction, yielding a structured and interpretable translation trace.

well as a **rule-based reference**, a reimplementation of the classical symbolic Hiero framework (Chiang 2005).

Training and Evaluation Settings

For evaluation on public datasets and generalization tests, we adopted the Exact Match (EM) metric as the primary measure (Rajpurkar et al. 2016). This metric serves as the standard benchmark, reflecting the requirement that robot-executable translations must be fully accurate to ensure operational safety. We evaluate the model’s constraint satisfaction on the domain constraint test set and its generalization capability on the generalization test set, both using the EM metric. To prevent false negatives arising from syntactically distinct yet semantically equivalent expressions (e.g., $a \wedge b$ vs. $b \wedge a$), we apply commutative normalization to reorder operands canonically.

For the human evaluation experiments, we employed metrics commonly used in studies of interpretable models, including *Comprehensibility*, *Trust*, *Transparency*, *Fidelity*, *Interactivity*, and *Decision support*.

- **Comprehensibility:** I can fully understand the logic of the explanation.
- **Trust:** I completely trust the model because of the explanation.
- **Transparency:** I believe the explanation is sufficient for me to clearly understand the model’s internal mechanisms or reasoning process.
- **Fidelity:** I believe the explanation fully aligns with my expectations.
- **Interactivity:** I believe I can fully interact with, influence, or explore the model’s behavior based on the explanation.
- **Decision Support:** I can fully trust the robot to carry out the next step of the lower-level plan according to the top-level plan, because I believe the explanation significantly reduces the risk of errors caused by incorrect instruction translation.

The final human evaluation score was computed by averaging ratings across these six dimensions. In the

behavioral experiment, examples were randomly sampled from three distinct scenarios. The explanation processes generated by the interpretable models were standardized and refined into textual form through an LLM. Each participant completed a Likert-scale questionnaire assessing their responses to six statements, with 1 representing “strongly disagree,” 9 representing “strongly agree,” and 5 representing “neutral.” A total of 12 participants took part in the experiments.

All model outputs were verified to contain no harmful or sensitive content. The evaluation protocol of this study was approved by the Institutional Review Board (IRB) of Peking University. We adhered to strict ethical standards to safeguard the rights and welfare of all participants.

Twelve participants, none of whom had prior experience with robot planning or LTL-related knowledge, took part in the behavioral experiments. Each participant was compensated at a rate of \$22.5 per hour. Informed consent was obtained from all participants after providing a detailed explanation of the study’s purpose, procedures, potential risks and benefits, and their right to withdraw at any time without penalty. All personal information, including name, age, gender, institution, and educational background, was anonymized and handled in compliance with relevant privacy laws and regulations.

In addition to baseline comparisons, we conducted extensive ablation studies. We ablated our proposed constraint extraction algorithm and compared the results with both the Hiero-based traditional extraction method and unconstrained models. We further examined the contribution of the RL component by comparing our constraint-based model with a purely statistical translation model and a fine-tuned action classifier.

During experiments, GPT-4o was used for sampling the back-translation grammar G_B . For the sentence similarity function S in Eq. (7), all γ_i values were set to 1. To balance long-term rewards and variance, the MDP discount factor was set to $\gamma = 1$. In constraint extraction, for public dataset evaluation we emphasized the segmenter output by setting $\eta_1 = 0.75$ and $\eta_2 = 0.25$; for generalization testing,

Table 1. Domain constraint satisfaction (%) comparison. Distinct background colors indicate different method categories.

Model	Method	Drone	CleanUp	Pick
Gemini-3	RAG	87.31	89.79	73.65
Gemini-3	RAG+CoT	80.76	85.36	73.65
Gemini-3-think	RAG+RL	79.55	90.38	71.62
Deepseek-V3	RAG	79.71	91.72	82.43
Deepseek-V3	RAG+CoT	74.45	86.54	85.81
Deepseek-R1	RAG+RL	62.73	90.98	82.43
GPT-5	RAG	88.44	93.93	87.84
GPT-5	RAG+CoT	73.65	93.93	85.81
GPT-5-thinking	RAG+RL	62.65	85.50	66.22
Qwen-3-7B	RAG	76.80	82.25	60.14
Qwen-3-7B	RAG+CoT	51.82	65.24	47.30
Qwen-3-7B	RAG+GCD	79.79	89.79	70.95
Qwen-3-7B	Finetune	88.36	97.34	91.22
Qwen-3-7B	Finetune+RL	87.63	90.38	73.65
Qwen-3-7B	Finetune+GCD	91.59	97.49	93.92
Llama-3-8B	RAG	35.33	58.28	34.46
Llama-3-8B	RAG+CoT	17.30	35.95	35.14
Llama-3-8B	RAG+GCD	48.10	86.24	70.95
Llama-3-8B	Finetune	91.59	98.22	93.92
Llama-3-8B	Finetune+RL	86.90	88.91	69.59
Llama-3-8B	Finetune+GCD	92.24	96.75	94.59
RNN	From Scratch	87.15	95.41	93.24
CopyNet	From Scratch	88.92	95.41	92.57
BERT	Finetune	91.35	97.63	92.57
E-NL2LTL	Finetune+GCD	90.70	97.78	95.95
Hiero	Statistical	30.64	30.47	27.70
Ours	SCR	94.66	98.82	97.30

we reversed these weightings ($\eta_1 = 0.25$, $\eta_2 = 0.75$).

Except for the RL-based LLM baseline, all experiments were conducted on a single NVIDIA RTX 3090 GPU. For our framework, the batch size was set to 128, with a total of 3×10^6 time steps and a constant learning rate of 1×10^{-5} . The action decision module π^1 was implemented as an Multilayer Perceptron (MLP) fine-tuned on top of the frozen BERT output concatenated with historical context features, and a similar model was used for the segmentation component P_{BERT} .

Experiment Results

Domain Constraint Satisfaction Evaluation

We evaluated our framework against state-of-the-art methods across three domains: Drone Navigation, CleanUp, and Pick-and-Place. Domain constraint satisfaction was measured using the EM metric in domain constraint test set (Rajpurkar et al. 2016). Tab. 1 summarizes the comparison with baseline methods.

Overall performance. Our proposed framework (Ours, SCR) achieves the best performance across all benchmarks, with constraint satisfaction rates of 94.66%, 98.82%, and 97.30% respectively. It consistently outperforms the strongest baselines, including fine-tuned Llama-3-8B and specialized encoder-based models like E-NL2LTL, demonstrating superior domain constraint satisfaction in translating NL to LTL.

LLM with RAG. In the few-shot context, LLMs equipped with RAG show moderate success, with GPT-5 leading this category. However, a critical observation is that Reasoning Enhancement Method (REM) techniques

Table 2. Ablation study results.

Model	Drone	CleanUp	Pick
Ours w/o LTL-SCFG	87.15	97.34	95.95
Ours w/o Hierarchical	89.73	92.90	89.19
Ours	94.66	98.82	97.30

Table 3. Generalization performance (%) comparison.

Model Architecture	Method	Drone	CleanUp	Pick
GPT-5	RAG	45.10	26.53	38.30
GPT-5	RAG+CoT	43.14	32.65	68.09
GPT-5-thinking	RAG+RL	45.10	40.82	68.09
Qwen-3-7B	RAG	23.53	14.29	31.91
Qwen-3-7B	RAG+CoT	29.41	20.41	57.45
Qwen-3-7B	RAG+GCD	19.61	4.08	14.89
Qwen-3-7B	Finetune	41.18	10.20	59.57
Qwen-3-7B	Finetune+RL	41.18	34.69	68.09
Qwen-3-7B	Finetune+GCD	31.37	8.16	59.57
E-NL2LTL	Finetune+GCD	33.33	2.04	36.17
Hiero	Statistic	5.88	10.20	10.64
Ours	SC+RL	54.90	48.98	74.47

consistently degrade domain constraint satisfaction. For instance, GPT-5’s score in the Drone domain drops from 88.44% to 73.65% when CoT is introduced. This suggests that while reasoning chains help with general logic, they often introduce violation of strict domain-specific grammar. In contrast, incorporating GCD significantly enhances performance; for Llama-3-8B, GCD improves the Pick domain score from a low 34.46% to 70.95%, effectively grounding the model’s output within valid symbolic boundaries.

Fine-tuned Models and REM vs. GCD. While domain-specific fine-tuning provides a high baseline, the choice of optimization strategy is crucial. We find that REM via unconstrained RL (Finetune+RL) tends to decrease performance compared to standard fine-tuning (e.g., Llama-3-8B drops from 91.59% to 86.90% in the Drone domain). This indicates that without structural priors, RL agents may sacrifice grammatical correctness for partial reward signals. Conversely, the application of GCD to fine-tuned models provides a consistent performance boost, achieving the highest baseline results (92.24% for Llama-3-8B in Drone).

Specialized and statistical models. Encoder-based architectures like BERT and E-NL2LTL (which utilizes GCD) maintain robust performance, particularly in the CleanUp domain (97.78%). However, purely statistical methods (Hiero) fail to scale, with satisfaction rates hovering around 30%. This underscores the necessity of combining high-capacity neural models with explicit structural constraints to solve complex formal translation tasks.

Ablation Study

We conducted an ablation study (Tab. 2) to isolate the contributions.

Impact of LTL-SCFG. The removal of the LTL-SCFG (Ours w/o LTL-SCFG) resulted in a significant performance drop, particularly in the Drone domain (down from 94.66% to 87.15%). Without the internalized constraints to guide the model’s action space, the system reverts to a more standard translation process that lacks structural grounding.

Table 4. Safety violation comparison across different models and tasks using Parsing Failure (PF), Unintended Action (UA), and overall Safety Violation (SV) metrics (%).

Model	Method	Drone			Cleanup			Pick		
		PF	UA	SV	PF	UA	SV	PF	UA	SV
GPT-5	RAG	7.19	8.57	10.75	1.92	1.78	3.11	2.03	8.78	9.46
GPT-5	RAG+CoT	22.23	22.64	25.46	2.22	1.48	2.96	0.00	13.51	13.51
GPT-5-thinking	RAG+RL	31.93	29.91	35.00	10.50	7.84	11.39	21.62	23.65	33.11
Qwen-3-7B	RAG	7.44	8.97	11.72	10.65	9.62	12.57	22.30	36.49	39.19
Qwen-3-7B	RAG+CoT	31.93	31.04	35.49	31.51	14.05	32.99	36.49	45.95	48.65
Qwen-3-7B	RAG+GCD	0.00	4.04	4.04	0.00	2.51	2.51	0.00	27.03	27.03
Qwen-3-7B	Finetune	0.00	6.71	6.71	0.00	0.44	0.44	0.00	5.41	5.41
Qwen-3-7B	Finetune+RL	6.79	9.78	11.16	5.62	7.10	7.69	4.73	27.03	27.70
Qwen-3-7B	Finetune+GCD	0.00	7.60	7.60	0.00	0.59	0.59	0.00	6.08	6.08
E-NL2LTL	Finetune+GCD	0.00	7.92	7.92	0.00	0.59	0.59	0.00	6.76	6.76
Hiero	Statistic	0.00	2.75	2.75	0.00	4.73	4.73	0.00	3.38	3.38
Ours	SCR	0.00	1.86	1.86	0.00	0.30	0.30	0.00	2.03	2.03

This confirms that embedding domain knowledge directly into the decision-making dynamics is superior to treating constraints as external, post-hoc filters.

Importance of Hierarchical Translation Modeling. The most substantial degradation occurred when we disabled the hierarchical translation mechanism (Ours w/o Hierarchical). In the Pick-and-Place domain, accuracy plummeted by over 8 percentage points (from 97.30% to 89.19%). This aligns with our hypothesis that complex LTL tasks are inherently multi-stage and require hierarchical reasoning. By forcing a flat, linear token-generation process, the model struggles to maintain long-range temporal dependencies and ordering relations.

Generalization Evaluation

To evaluate robustness against unseen instructions, we further assessed generalization performance on held-out test sets across three domains, each consisting entirely of novel LTL formulas. Tab. 3 summarizes the comparative results.

The Conflict between Constraint and Generalization. A key finding is that while GCD improves domain constraint satisfaction in the main experiments (Tab. 1), it severely hampers generalization on unseen formulas. For example, Qwen-3-7B using RAG+GCD drops to a mere 4.08% in the Cleanup domain, significantly lower than its unconstrained RAG counterpart (14.29%). This confirms that purely passive constraint enforcement filters out valid reasoning paths when the model encounters novel linguistic structures, stifling its ability to reason beyond the training distribution.

REM and Generalization. In contrast, REM techniques (CoT and RL) demonstrate clear benefits for generalization. Both GPT-5 and Qwen-3-7B see substantial gains in the Pick domain when CoT or RL is applied, with GPT-5’s accuracy jumping from 38.30% to 68.09%. This suggests that unconstrained reasoning allows LLMs to leverage their internal logic to decompose complex, unseen instructions.

Synergy of Self-Constrained Reasoning. Our framework (Ours) effectively resolves this tension by achieving the highest generalization scores across all domains (54.90%, 48.98%, and 74.47%). Unlike GCD, which acts as a rigid filter, our approach internalizes the LTL-SCFG within the decision-making process. This allows the RL agent to explore a wide range of reasoning strategies for novel instructions while ensuring that every exploration step

remains within the bounds of valid LTL syntax.

Safety Violation Evaluation

To investigate the impact of translation failures on robot safety, we categorize translation-induced errors into two primary failure modes: (i) Parsing Failure (PF), which occur when the synthesized formula violates syntactical constraints, rendering it unparseable by downstream formal planners and leading to system deadlock or execution aborts; and (ii) Unintended Action (UA), which occur when the formula is syntactically valid but maps to non-existent or misaligned environmental entities and behaviors, directly leading to hazardous control decisions and safety violations in the physical workspace.

Tab. 4 reveals that techniques such as CoT and RL often exacerbate safety violations in formal tasks. For instance, the PF rate for GPT-5-thinking surges to 31.93 in the Drone domain, suggesting that unconstrained reasoning frequently generates syntactically invalid structures.

Analysis of safety violations across various models further clarifies the sources of domain constraint violations. While GCD eliminates grammatical errors, it fails to improve semantic grounding, as evidenced by Qwen-3-7Bs 27.03% UA rate in the Pick domain. In contrast, our SCR framework effectively resolves both issues. By internalizing the LTL-SCFG, our method achieves zero PFs while maintaining the lowest UA rates across all domains, reaching as low as 0.30% in Cleanup and 2.03% in Pick. These results demonstrate that the SCR framework provides a formally grounded reasoning space that outperforms both unconstrained LLMs and passive filtering methods.

Interpretability Evaluation

To assess the practical utility of our framework in human-robot collaboration, we conducted a human study evaluating the interpretability and trustworthiness of the generated LTL specifications. We compared our approach against four representative baselines: DeepSeek-R1, Qwen-3-7B, GPT-5, and the statistical Hiero model. Participants rated the models on a 1–9 Likert scale across six dimensions.

As illustrated in Fig. 5, our method achieves the highest average scores across all evaluated domains: 7.15 in Drone, 7.61 in Cleanup, and 6.39 in Pick. These results consistently

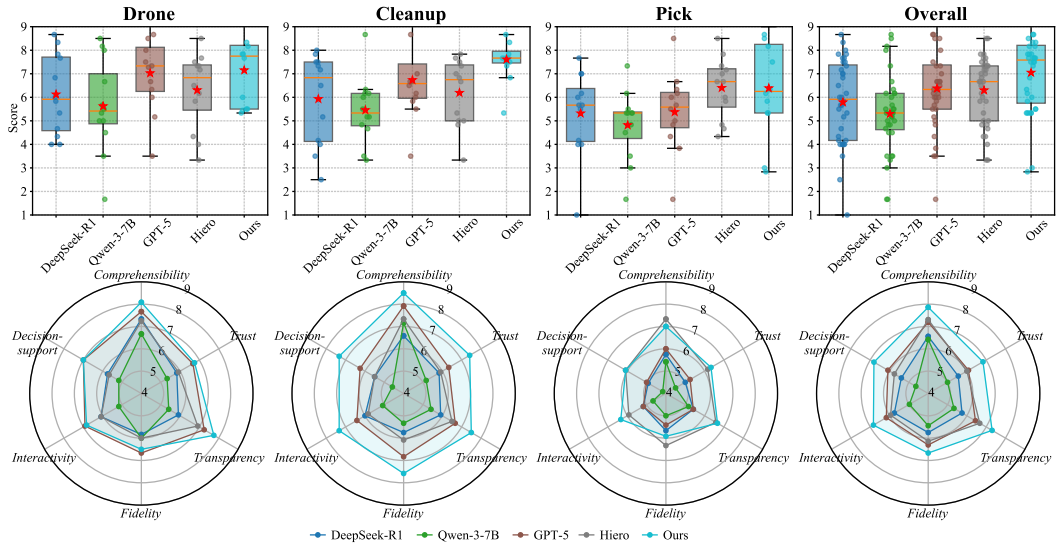


Figure 5. Human evaluation and multi-dimensional interpretability analysis. The top row displays boxplots of evaluation scores across the Drone, Cleanup, and Pick domains, along with the Overall performance; red stars indicate mean values. The bottom row presents radar charts comparing our framework against baselines across six qualitative metrics: Comprehensibility, Trust, Transparency, Fidelity, Interactivity, and Decision-support.

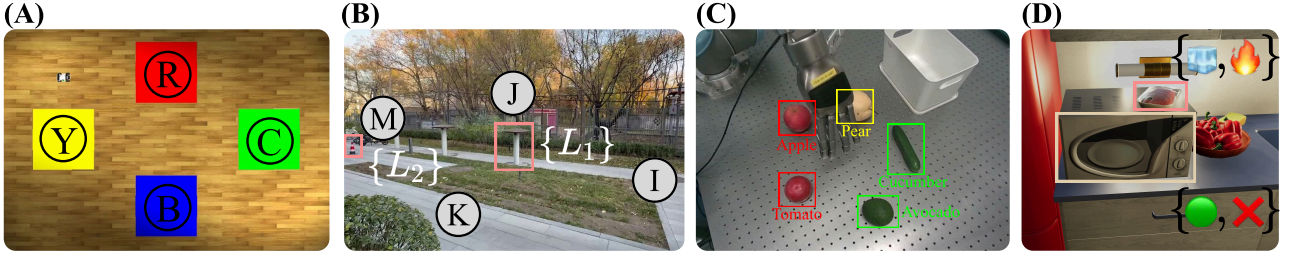


Figure 6. Illustration of application experiment environments. (A) The room cleaning environment features a rectangular wood-grain floor divided into four semantic rooms, each labeled by its color. A red room marks the upper-left corner, a yellow room the lower-left, a green room the middle-right, and a blue room the bottom-center. These colored rooms serve as coordinate waypoints for robot navigation. (B) The cargo delivery environment is set in an outdoor pedestrian area bordered by greenery. The layout includes several key coordinates: starting point I on the right, and waypoint J (labeled Landmark 1, $\{L_1\}$) marked by a rectangular stone pedestal in the upper-left. Landmark 2 ($\{L_2\}$) is located at point M on the left lawn’s edge, with an additional waypoint K near the bottom. To reach M from I, the agent must pass through either J or K. (C) The manipulation environment features a gray metallic tabletop with a white rectangular storage basket in the upper-right. Scattered across the table are several objects labeled by color: two red fruits (Apple and Tomato), one yellow Pear, and two green fruits (Avocado and Cucumber). (D) The household environment features a kitchen countertop setup with a microwave on the left and a piece of salmon placed on top. The environment involves the following object states: the salmon can be in either a cold or hot state ($\{\text{ice, fire}\}$), while the microwave can be toggled between an active or inactive status ($\{\text{green, red}\}$).

outperform the strongest reasoning-based baseline, GPT-5+CoT, by a margin of 0.12 to 1.01 points, with statistically significant improvements ($p < 0.05$) observed in the CleanUp and Pick scenarios. This performance gain confirms that the integration of hierarchical structures with formal constraints aligns more effectively with human mental models than unconstrained reasoning chains.

The radar charts further highlight our model’s superior cognitive profile, particularly regarding comprehensibility and trust. By decomposing complex temporal logic into verifiable hierarchical steps and internalizing domain constraints via the LTL-SCFG, our approach reduces the execution exception compared to end-to-end models such as DeepSeek-R1, as Sec. **Safety Violation Evaluation**, thereby providing clearer decision support for human operators. While the Hiero baseline achieves comparable performance in the simpler Pick domain (6.40 vs. 6.39) due to the

limited number of primitive formulas and structural depth, the advantages of our self-constrained hierarchical method become critical as task complexity increases. In the Drone and CleanUp domains, our framework remains indispensable for maintaining both high transparency and strict formal correctness.

Application Experiments

This section presents experimental results demonstrating the proposed LTL translation framework in simulation and real-world environments. The framework was validated across various embodiments, including wheeled robots, humanoid robots, and dexterous hands. Each experiment was repeated at least three times, achieving a 100% success rate. The software architecture is implemented on Ubuntu 20.04 and ROS Noetic, running on a remote host equipped with an Intel Xeon Gold 5218 CPU (2.30 GHz), 128 GB RAM, and an

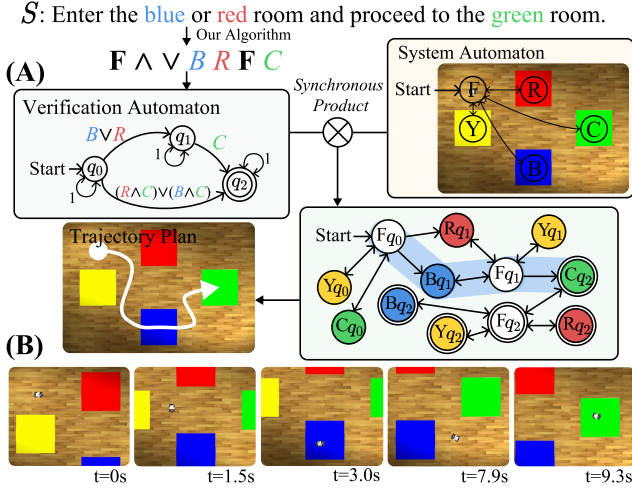


Figure 7. Translation and execution experiments for the robot room cleaning task. (A) Upon receiving the natural language instruction S , the algorithm translates it into an LTL formula. Subsequently, a verification automaton and a system automaton are constructed, and a feasible execution path (indicated by the blue shaded path) is identified by computing their synchronous product. (B) The sequence illustrates the robot's execution trajectory from $t = 0s$ to $t = 9.3s$. Following the trajectory plan, the robot first enters the blue room ($t = 3.0s$) and then proceeds to the final objective, the green room ($t = 9.3s$), verifying the effectiveness of the algorithm in handling logical instructions and motion planning.

NVIDIA RTX 3090 GPU.

Room Cleaning Experiment To further verify the effectiveness of the proposed algorithm in translating natural language instructions with logical relationships and motion planning, we conducted a room cleaning task experiment. As shown in Fig. 6(A), the simulation environment based on Gazebo consists of four distinct colored rooms, each labeled by its color: the Yellow room (labeled by Y), Blue room (labeled by B), Red room (labeled by R), and Green room (labeled by C).

The system can be defined by a labeled Finite Transition System (FTS) $\mathcal{T} = (\mathbf{S}, \Sigma, \mathcal{P}, \rightarrow, \mathbf{S}_0, \mathbf{L})$, where $\mathbf{S} = \{F, Y, B, R, C\}$ is a finite set of states representing the robot's presence in the four colored rooms and a floor area (F); $\Sigma = \{a_{i,F}, a_{F,i} | i \in \mathbf{S}\}$ is a set of actions denoting the navigation commands to move between a specific room and the floor; $\mathcal{P} = \{Y, B, R, C\}$ is a set of atomic propositions corresponding to the semantic properties of being inside the Yellow, Blue, Red, or Green rooms; $\rightarrow = \{(i, a_{i,F}, F), (F, a_{F,i}, i) | i \in \mathbf{S}\} \subseteq \mathbf{S} \times \Sigma \times \mathbf{S}$ is a transition relation that models the topological connectivity, implying the robot must pass through the floor area to transition between different rooms; $\mathbf{S}_0 = \{F\} \subseteq \mathbf{S}$ is the set of initial states, indicating the robot starts its task from the wood-grain floor; and $\mathbf{L} = \{(Y, \{Y\}), (B, \{B\}), (R, \{R\}), (C, \{C\})\} : \mathbf{S} \rightarrow 2^{\mathcal{P}}$ is a labeling function that maps each physical room state to its corresponding semantic color observation while leaving the floor state F unlabeled.

Consider a task defined by the natural language instruction S : "Enter the blue or red room and proceed to the green room." Using our algorithm, this instruction is translated into an LTL formula, represented symbolically as $\varphi_1 = F \wedge$

$\vee B R F C$.

We utilize the LTL2BA tool (Gastin and Oddoux 2001) to convert the translated LTL formula into a verification automaton $\mathcal{A}_{\varphi_1} = (\mathbf{Q}, 2^{\mathcal{P}}, \mathbf{d}, \mathbf{Q}_0, \mathbf{F})$ for automated verification. A system behavior satisfies the given task if and only if its execution trace is accepted by this automaton. Here, $\mathbf{Q} = \{q_0, q_1, q_2\}$ is the set of automaton states; $2^{\mathcal{P}} = 2^{\{Y, B, R, C\}}$ is the input alphabet consisting of the power set of the atomic propositions; $\mathbf{d} : \mathbf{Q} \times 2^{\mathcal{P}} \rightarrow 2^{\mathbf{Q}}$ is the transition relation defined as $\mathbf{d} = \{(q_0, R \vee B, q_1), (q_1, C, q_2), (q_0, (R \wedge C) \vee (B \wedge C), q_2), (q_0, 1, q_0), (q_1, 1, q_1), (q_2, 1, q_2)\}$, which dictates the state evolution based on environmental observations; and $\mathbf{Q}_0 = \{q_0\}$ and $\mathbf{F} = \{q_2\}$ represent the initial and accepting states, respectively.

To find a feasible plan, we construct the synchronous product of the system model and the verification automaton $\mathbf{P} = \mathcal{T} \otimes \mathcal{A}_{\varphi_1} = (\mathbf{Q}_P, \Sigma, \mathbf{d}_P, \mathbf{Q}_{P,0}, \mathbf{F}_P)$, where $\mathbf{Q}_P = \mathbf{S} \times \mathbf{Q}$ is the set of product states, $\mathbf{d}_P \subseteq \mathbf{Q}_P \times \Sigma \times \mathbf{Q}_P$ is the transition relation defined as $((s, q), a, (s', q')) \in \mathbf{d}_P$ if $(s, a, s') \in \rightarrow$ and $q' \in \mathbf{d}(q, L(s'))$, $\mathbf{Q}_{P,0} = \{(s_0, q_0) | q_0 \in \mathbf{Q}_0\}$ is the set of initial states, and $\mathbf{F}_P = \{(s, q_f) | s \in \mathbf{S}, q_f \in \mathbf{F}\}$ is the set of accepting states. Then, we can identify a system behavior that satisfies both the transition constraints and the task requirements by searching on $\mathbf{P}$, thereby yielding an executable plan, as shown in Fig. 7(A).

As illustrated by the sequence frames in Fig. 7(B), the execution strictly follows the generated automaton strategy, beginning at $t = 0s$ with the robot positioned near the yellow region. According to the executable plan, the robot selects the blue room as its intermediate task between $t = 1.5s$ and $t = 3.0s$. By $t = 3.0s$, the robot successfully enters the blue region, thereby satisfying the first logical operator $(B \vee R)$ of the LTL formula. Following the visit to the blue room, the plan directs the robot toward the final objective—the green room (C) between $t = 7.9s$ and $t = 9.3s$. At $t = 9.3s$, the robot arrives at the green region, marking the successful completion of the global task.

Cargo Delivery Experiment To evaluate the capability of the proposed model in extracting logical constraints from natural language instructions and mapping them to formal temporal specifications, we conducted a cargo delivery experiment. As shown in Fig. 6(B), the experiment is set in an outdoor pedestrian area characterized by a starting point I , a landmark L_1 (waypoint J , marked by a stone pedestal), and a destination landmark L_2 (point M on the lawn's edge). An additional waypoint K serves as an alternative path.

The environment is modeled as a labeled FTS $\mathcal{T} = (\mathbf{S}, \Sigma, \mathcal{P}, \rightarrow, \mathbf{S}_0, \mathbf{L})$, where $\mathbf{S} = \{I, J, K, M\}$ represents the set of waypoints; $\Sigma = \{a_{IK}, a_{IJ}, a_{JM}, a_{KM}, a_{KI}, a_{JI}, a_{MJ}, a_{MK}\}$ is the set of navigation actions between adjacent waypoints; $\mathcal{P} = \{L_1, L_2\}$ contains the atomic propositions for the specified landmarks; $\rightarrow = \{(i, a_{ij}, j) | a_{ij} \in \Sigma\}$ defines the topological connectivity, where the agent can move from I to $\{J, K\}$ and from $\{J, K\}$ to M ; $\mathbf{S}_0 = \{I\}$ is the set of initial states; and the labeling function $\mathbf{L}$ maps J to $\{L_1\}$ and M to $\{L_2\}$, with other states being unlabeled.

Consider the natural language instruction S : "Always avoid landmark 1 and navigate to landmark 2." Our algorithm translates this instruction into the LTL formula

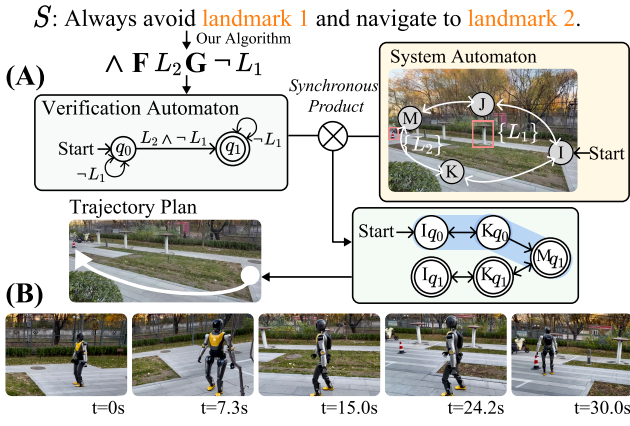


Figure 8. Translation and execution experiments for the robot cargo delivery task. (A) The system translates the natural language instruction S into an LTL formula. By constructing a verification automaton and a system automaton, a feasible execution plan $I_{q_0} \rightarrow K_{q_0} \rightarrow M_{q_1}$ is identified within the synchronous product (highlighted by the blue shaded path), which strategically bypasses the forbidden waypoint J (L_1). (B) The sequence frames illustrate the humanoid robot's real-world trajectory from $t = 0s$ to $t = 30.0s$. To satisfy the safety constraint $G \neg L_1$, the robot selects the path through waypoint K ($t = 15.0s$) and successfully arrives at landmark L_2 at point M ($t = 30.0s$), demonstrating the algorithm's precision in extracting logical constraints and planning safe motion.

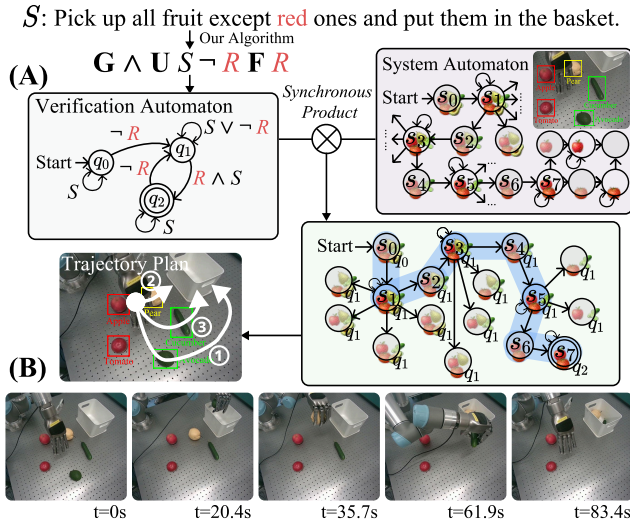


Figure 9. Translation and execution experiments for the manipulation task. (A) The system translates the natural language instruction S into the LTL formula φ_3 . The synchronous product P is obtained from the verification automaton $\mathcal{A}_{\varphi_3}$ and the labeled FTS $\mathcal{T}$. Only the key segments of the system automaton and the synchronous product are illustrated; opaque states within the system automaton denote that those states are unobserved (i.e., without s flag). A feasible execution strategy is identified within the product (highlighted by the blue shaded path), which guides the robot to sequentially interact with non-red objects while satisfying the logical constraints. (B) The trajectory plan and sequence frames illustrate the robotic arm's real-world execution from $t = 0s$ to $t = 83.4s$. The robot selectively picks the avocado ($t = 20.4s$), pear ($t = 35.7s$), and cucumber ($t = 61.9s$), successfully reaching the accepting state q_2 and completing the task while leaving the red fruits untouched.

$\varphi_2 = \wedge F L_2 G \neg L_1$. To verify this task, we construct

a verification automaton $\mathcal{A}_{\varphi_2} = (\mathbf{Q}, 2^{\mathcal{P}}, \mathbf{d}, \mathbf{Q}_0, \mathbf{F})$, where $\mathbf{Q} = \{q_0, q_1\}$ represents the set of internal logic states. The transition relation $\mathbf{d}$ is designed such that the automaton stays in q_0 while $\neg L_1$ is satisfied and transitions to the accepting state q_1 only when L_2 is reached without having ever visited L_1 .

By computing the synchronous product $\mathbf{P} = \mathcal{T} \otimes \mathcal{A}_{\varphi_2}$, we search for an execution path that satisfies the safety constraint. As depicted in the trajectory plan of Fig. 8(A), the resulting strategy selects the sequence of product states $I_{q_0} \rightarrow K_{q_0} \rightarrow M_{q_1}$, effectively bypassing the forbidden landmark L_1 .

The real-world execution by the humanoid robot is illustrated in Fig. 8(B). At $t = 0s$, the robot starts at position I . To satisfy the global safety constraint $G \neg L_1$, the robot navigates towards waypoint K instead of J . By $t = 15.0s$, the robot reaches the vicinity of K . Subsequently, it proceeds toward the final objective M . At $t = 30.0s$, the robot arrives at landmark L_2 , triggering the transition to the accepting state q_1 and successfully completing the delivery task while strictly adhering to the avoidance constraint throughout the process.

Manipulation Experiment To evaluate the model's capability in processing natural language instructions for object manipulation, we conducted a series of manipulation experiments. As illustrated in Fig. 6(C), the experimental setup consists of a horizontal workspace containing a white storage bin and three types of colored fruits. Their color mappings are defined as: $\mathbf{C} = \{(\text{Apple}, \{R\}), (\text{Tomato}, \{R\}), (\text{Pear}, \{Y\}), (\text{Cucumber}, \{C\}), (\text{Avocado}, \{C\})\}$ where R, Y , and C represent red, yellow, and green, respectively.

The environment is modeled as a labeled FTS $\mathcal{T} = (\mathbf{S}, \Sigma, \mathcal{P}, \rightarrow, \mathbf{S}_0, \mathbf{L})$, where the state space $\mathbf{S} = 2^{\text{dom}(\mathbf{C})} \cup \{s\}$ represents the power set of fruits remaining on the tabletop, augmented with an observation flag s that indicates the completion of a sensing action. The set of actions $\Sigma = \{a_i \mid i \in \text{dom}(\mathbf{C})\} \cup \{S\}$ includes picking a fruit i (denoted as a_i) and the state observation action S , while the set of atomic propositions $\mathcal{P} = \{R, Y, C, \neg R, \neg Y, \neg C, S\}$ characterizes the colors of the fruits, where $\neg R, \neg Y$, and $\neg C$ represent the existence of fruits that are not red, yellow, or green, respectively, and S denotes the observation status. The transition relation $\rightarrow \subseteq \mathbf{S} \times \Sigma \times \mathbf{S}$ is defined by transitions $(x \cup \{i\}, a_i, x \setminus \{s\})$ for $i \in \text{dom}(\mathbf{C})$ and $s \in x$, modeling the removal of a fruit, and $(x, S, x \cup \{s\})$ for the observation action which sets the flag. The initial state $\mathbf{S}_0 = \{\text{dom}(\mathbf{C})\}$ represents the tabletop with all fruits present and no prior observation. Finally, the labeling function $\mathbf{L} : \mathbf{S} \rightarrow 2^{\mathcal{P}}$ is defined for any state $x \in \mathbf{S}$ as: $\mathbf{L}(x) = \mathbf{C}(x \setminus \{s\}) \cup \{\neg c \mid \exists i \in x \setminus \{s\}, c \notin \mathbf{C}(i)\} \cup \{S \mid s \in x\}$, which maps each state to the colors of the remaining fruits and includes the proposition S whenever the observation flag s is present in the state.

Consider the natural language instruction S : "Pick up all fruit except red ones and put them in the basket." Our algorithm translates this instruction into the LTL formula $\varphi_3 = G \wedge U S \neg R F R$. To verify the property φ_3 , a verification automaton is automatically constructed as a 5-tuple $\mathcal{A}_{\varphi_3} = (\mathbf{Q}, 2^{\mathcal{P}}, \mathbf{d}, \mathbf{Q}_0, \mathbf{F})$. Here, $\mathbf{Q} = \{q_0, q_1, q_2\}$ represents the set of internal logic

states. The initial and final state sets are defined as $\mathbf{Q}_0 = \{q_0\}$ and $\mathbf{F} = \{q_2\}$, respectively. The state transitions are governed by the relation $\mathbf{d}$, defined as: $\mathbf{d} = \{(q_0, S, q_0), (q_0, \neg R, q_1), (q_1, S \vee \neg R, q_1), (q_1, R \wedge S, q_2), (q_2, \neg R, q_1), (q_2, S, q_2)\}$. This automaton captures the evolution of the system logic under the propositional constraints defined in $2^{\mathcal{P}}$.

By computing the synchronous product $\mathbf{P} = \mathcal{T} \otimes \mathcal{A}_{\varphi_3}$, we search for an execution path that satisfies the instruction. As depicted in the trajectory plan of Fig. 9(A), the resulting strategy selects a sequence of product states that sequentially navigate the robot through the required workspace configurations. Specifically, the execution begins with the observation action S . The path then proceeds to pick the avocado and the pear, which belong to the sets of green (C) and yellow (Y) fruits, respectively. Since these actions satisfy the $\neg R$ constraint, the system maintains the logic state q_1 . Finally, the robot picks the cucumber, completing the removal of all non-red fruits. This sequence ensures that the system satisfies the LTL formula φ_3 by reaching the accepting state q_2 in the verification automaton.

The real-world execution by the robotic manipulator is illustrated in Fig. 9(B). At $t = 0\text{s}$, the robot begins in the initial configuration with all five fruits present on the tabletop. Following the trajectory plan derived from the synchronous product, the robot first identifies the target objects and picks up the avocado at $t = 20.4\text{s}$, which satisfies the $\neg R$ constraint and maintains the logic state q_1 . Subsequently, it proceeds to pick the pear at $t = 35.7\text{s}$ and the cucumber at $t = 61.9\text{s}$. By $t = 83.4\text{s}$, all fruits except the red ones (apple and tomato) have been successfully placed into the storage bin. This sequence of actions ensures that the system transitions through states $s_1 \rightarrow s_3 \rightarrow s_5$ and finally reaches the accepting state q_2 at s_7 , demonstrating the algorithm’s effectiveness in parsing linguistic exclusions and executing precise, multi-step manipulation sequences.

Household Experiment To evaluate the algorithm’s effectiveness in managing interactions within new action spaces, we conducted a household task experiment in the VirtualHome kitchen environment (Puig et al. 2018). To adapt our model to this specific domain, we constructed a small dataset comprising 13 natural language sentences and their corresponding LTL formulas, covering 12 distinct environmental states. We utilized this dataset to fine-tune our model, which was previously trained on the CleanUp dataset. For the testing phase, we focused on a new specific subset of these states involving the interactions between a piece of salmon and a microwave.

As depicted in Fig. 6(D), the household environment features a kitchen countertop. The environment involves the following object states: the salmon’s temperature ($\{\text{cold}, \text{hot}\}$) and the microwave’s operational status ($\{\text{inactive}, \text{active}\}$). We model this environment as a labeled FTS $\mathcal{T} = (\mathbf{S}, \Sigma, \mathcal{P}, \rightarrow, \mathbf{S}_0, \mathbf{L})$. Based on the System Automaton in Fig. 10, the state space $\mathbf{S} = \{s_0, s_1, s_2\}$ defines their combinations: the initial state s_0 (cold salmon, inactive microwave), s_1 (hot salmon, active microwave), and s_2 (hot salmon, inactive microwave). The action set Σ contains physical interaction primitives (e.g., opening, inserting, toggling), while the atomic propositions $\mathcal{P} = \{\text{hot}, \text{closed}\}$ denote the semantic conditions of the food

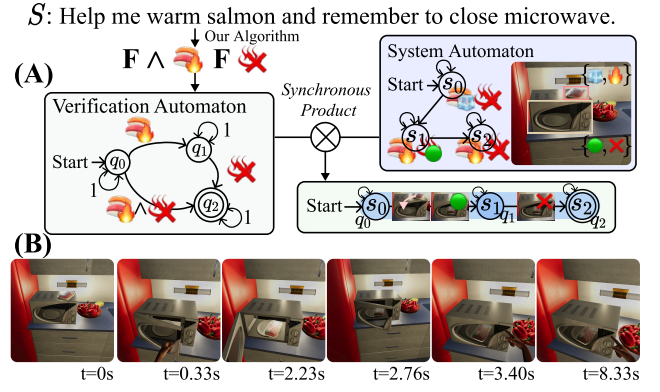


Figure 10. Translation and execution experiments for the household task. (A) The system translates the natural language instruction S into an LTL formula. By constructing a verification automaton and a system automaton that model the object states, a feasible execution plan $s_{0,q_0} \rightarrow s_{1,q_1} \rightarrow s_{2,q_2}$ is identified within the synchronous product (highlighted by the blue shaded path). This plan guides the agent to successfully heat the food while ensuring the appliance is properly shut off. (B) The sequence frames illustrate the virtual agent’s execution trajectory from $t = 0\text{s}$ to $t = 8.33\text{s}$. Following the generated plan, the agent opens the microwave to insert the salmon ($t = 2.23\text{s}$), activates it to warm the food ($t = 3.40\text{s}$), and ultimately deactivates and closes the microwave ($t = 8.33\text{s}$). This sequence successfully reaches the accepting state q_2 , demonstrating the algorithm’s effectiveness in managing interactions within new action spaces.

being hot and the appliance being inactive.

Consider the natural language instruction S : “Help me warm salmon and remember to close microwave.” Our algorithm translates this instruction into an LTL formula φ_4 that dictates the temporal logic of heating the food and subsequently ensuring the appliance is shut off. To verify this task, a verification automaton $\mathcal{A}_{\varphi_4} = (\mathbf{Q}, 2^{\mathcal{P}}, \mathbf{d}, \mathbf{Q}_0, \mathbf{F})$ is constructed, where $\mathbf{Q} = \{q_0, q_1, q_2\}$ is the set of logic states. The transition relation dictates that the automaton moves from q_0 to q_1 when the food is heated (hot), and from q_1 to the accepting state q_2 when the microwave is closed (closed), with an alternative direct transition from q_0 to q_2 if both conditions are met simultaneously.

By computing the synchronous product $\mathbf{P} = \mathcal{T} \otimes \mathcal{A}_{\varphi_4}$, we search for a feasible execution path. By constructing a verification automaton and a system automaton that model the object states, a feasible execution plan $s_{0,q_0} \rightarrow s_{1,q_1} \rightarrow s_{2,q_2}$ is identified within the synchronous product (highlighted by the blue shaded path in Fig. 10(A)). This plan sequentially guides the agent to successfully heat the food while ensuring the appliance is properly shut off.

The simulation execution by the virtual agent is illustrated by the sequence frames in Fig. 10(B), tracking the trajectory from $t = 0\text{s}$ to $t = 8.33\text{s}$. Following the generated plan, the agent starts in the initial state, opens the microwave to insert the salmon at $t = 2.23\text{s}$, and activates it to warm the food at $t = 3.40\text{s}$ (triggering the transition to q_1). Ultimately, the agent deactivates and closes the microwave at $t = 8.33\text{s}$. By successfully generalizing to this specific task after fine-tuning the model on a small dataset with different states, the execution explicitly demonstrates the algorithm’s robust capacity to adapt to and manage entirely new action spaces.

Conclusion

In this study, we proposed the SCR framework, which provides an effective way to resolve the inherent tension between reasoning flexibility and formal constraint satisfaction in NL to LTL translation by internalizing structural knowledge into hierarchical decision-making processes. Unlike traditional post-hoc filtering, our framework integrates an LTL-SCFG constraint representation with reinforcement learning optimization, enabling the model to explore within a formally grounded space to eliminate syntactic errors while significantly enhancing generalization to out-of-distribution instructions. Experimental results demonstrate that the framework consistently outperforms existing baselines in domain-constraint satisfaction, generalization, safety violation reduction, and interpretability, providing a robust and efficient pipeline for transforming human intent into verifiable robotic behavior for complex, long-horizon tasks.

Acknowledgements

This work was supported by the National Natural Science Foundation of China (Grant No. 52475001). The authors would like to thank Hecbot Co., Ltd., for providing the humanoid robot platform, and Linkerbot Co., Ltd., for providing the dexterous robotic hand used in this study.

References

- Agarwal B, Joshi I and Rojkova V (2025) Think inside the json: Reinforcement strategy for strict llm schema adherence. *arXiv preprint arXiv:2502.14905*.
- Argenziano F, Umili E, Leotta F and Nardi D (2025) Defining and monitoring complex robot activities via llms and symbolic reasoning. In: *2025 IEEE 37th International Conference on Tools with Artificial Intelligence (ICTAI)*. IEEE, pp. 1037–1044.
- Baier C and Katoen JP (2008) *Principles of model checking*. MIT press.
- Banerjee D, Suresh T, Ugare S, Misailovic S and Singh G (2025) CRANE: Reasoning with constrained LLM generation. In: Singh A, Fazel M, Hsu D, Lacoste-Julien S, Berkenkamp F, Maharaj T, Wagstaff K and Zhu J (eds.) *Proceedings of the 42nd International Conference on Machine Learning, Proceedings of Machine Learning Research*, volume 267. PMLR, pp. 2836–2857.
- Beurer-Kellner L, Fischer M and Vechev M (2024) Guiding LLMs the right way: Fast, non-invasive constrained generation. In: Salakhutdinov R, Kolter Z, Heller K, Weller A, Oliver N, Scarlett J and Berkenkamp F (eds.) *Proceedings of the 41st International Conference on Machine Learning, Proceedings of Machine Learning Research*, volume 235. PMLR, pp. 3658–3673.
- Black K, Brown N, Darpinian J, Dhabalia K, Driess D, Esmail A, Equi M, Finn C, Fusai N, Galliker MY, Ghosh D, Groom L, Hausman K, Ichter B, Jakubczak S, Jones T, Ke L, LeBlanc D, Levine S, Li-Bell A, Mothukuri M, Nair S, Pertsch K, Ren AZ, Shi LX, Smith L, Springenberg JT, Stachowicz K, Tanner J, Vuong Q, Walke H, Walling A, Wang H, Yu L and Zhilinsky U (2025) $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*.
- Brodo L, Scalora G and Henkler S (2026) Property refinement in linear temporal logic: Formal semantics and algorithms for software verification. *Proceedings of the ACM on Software Engineering* 3(FSE): 2698–2719.
- Chen Y, Gandhi R, Zhang Y and Fan C (2023) NL2TL: Transforming natural languages to temporal logics using large language models. In: Bouamor H, Pino J and Bali K (eds.) *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*. Singapore: Association for Computational Linguistics, pp. 15880–15903. DOI:10.18653/v1/2023.emnlp-main.985.
- Chiang D (2005) A hierarchical phrase-based model for statistical machine translation. In: Knight K, Ng HT and Oflazer K (eds.) *Proceedings of the 43rd Annual Meeting of the Association for Computational Linguistics (ACL'05)*. Ann Arbor, Michigan: Association for Computational Linguistics, pp. 263–270. DOI: 10.3115/1219840.1219873.
- Chomsky N (2000) *New horizons in the study of language and mind*. Cambridge University Press.
- Chomsky N (2014) *Aspects of the Theory of Syntax*. MIT press.
- Correa CG, Ho MK, Callaway F, Daw ND and Griffiths TL (2023) Humans decompose tasks by trading off utility and computational cost. *PLoS computational biology* 19(6): e1011087. DOI:10.1371/journal.pcbi.1011087.
- Dash T, Chitlangia S, Ahuja A and Srinivasan A (2022) A review of some techniques for inclusion of domain-knowledge into deep neural networks. *Scientific Reports* 12(1): 1040.
- Devlin J, Chang MW, Lee K and Toutanova K (2019) Bert: Pre-training of deep bidirectional transformers for language understanding. In: *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics: human language technologies, volume 1 (long and short papers)*. pp. 4171–4186.
- English WH, Simon D, Jha SK and Ewetz R (2025) Grammar-forced translation of natural language to temporal logic using LLMs. In: Singh A, Fazel M, Hsu D, Lacoste-Julien S, Berkenkamp F, Maharaj T, Wagstaff K and Zhu J (eds.) *Proceedings of the 42nd International Conference on Machine Learning, Proceedings of Machine Learning Research*, volume 267. PMLR, pp. 15370–15383.
- Frankland SM and Greene JD (2020) Concepts and compositionality: in search of the brain's language of thought. *Annual Review of Psychology* 71: 273–303. DOI:10.1146/annurev-psych-122216-011829.
- Gastin P and Oddoux D (2001) Fast ltl to büchi automata translation. In: *International Conference on Computer Aided Verification*. Springer, pp. 53–65.
- Germiniani S, Nicoletti D and Pravadelli G (2025) A systematic literature review on mining ltl specifications. *IEEE Access*.
- Gopalan N, Arumugam D, Wong LL and Tellex S (2018) Sequence-to-sequence language grounding of non-markovian task specifications. In: *Robotics: Science and Systems*, volume 2018. pp. 1–10.
- Gu J, Lu Z, Li H and Li VO (2016) Incorporating copying mechanism in sequence-to-sequence learning. In: *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. pp. 1631–1640.
- Gundana D and Kress-Gazit H (2022) Event-based signal temporal logic tasks: Execution and feedback in complex environments. *IEEE Robotics and Automation Letters* 7(4): 10001–10008.

- Guo D, Yang D, Zhang H, Song J, Wang P, Zhu Q, Xu R, Zhang R, Ma S, Bi X, Zhang X, Yu X, Wu Y, Wu ZF, Gou Z, Shao Z, Li Z, Gao Z, Liu A, Xue B, Wang B, Wu B, Feng B, Lu C, Zhao C, Deng C, Ruan C, Dai D, Chen D, Ji D, Li E, Lin F, Dai F, Luo F, Hao G, Chen G, Li G, Zhang H, Xu H, Ding H, Gao H, Qu H, Li H, Guo J, Li J, Chen J, Yuan J, Tu J, Qiu J, Li J, Cai JL, Ni J, Liang J, Chen J, Dong K, Hu K, You K, Gao K, Guan K, Huang K, Yu K, Wang L, Zhang L, Zhao L, Wang L, Zhang L, Xu L, Xia L, Zhang M, Zhang M, Tang M, Zhou M, Li M, Wang M, Li M, Tian N, Huang P, Zhang P, Wang Q, Chen Q, Du Q, Ge R, Zhang R, Pan R, Wang R, Chen RJ, Jin RL, Chen R, Lu S, Zhou S, Chen S, Ye S, Wang S, Yu S, Zhou S, Pan S, Li SS, Zhou S, Wu S, Yun T, Pei T, Sun T, Wang T, Zeng W, Liu W, Liang W, Gao W, Yu W, Zhang W, Xiao WL, An W, Liu X, Wang X, Chen X, Nie X, Cheng X, Liu X, Xie X, Liu X, Yang X, Li X, Su X, Lin X, Li XQ, Jin X, Shen X, Chen X, Sun X, Wang X, Song X, Zhou X, Wang X, Shan X, Li YK, Wang YQ, Wei YX, Zhang Y, Xu Y, Li Y, Zhao Y, Sun Y, Wang Y, Yu Y, Zhang Y, Shi Y, Xiong Y, He Y, Piao Y, Wang Y, Tan Y, Ma Y, Liu Y, Guo Y, Ou Y, Wang Y, Gong Y, Zou Y, He Y, Xiong Y, Luo Y, You Y, Liu Y, Zhou Y, Zhu YX, Huang Y, Li Y, Zheng Y, Zhu Y, Ma Y, Tang Y, Zha Y, Yan Y, Ren ZZ, Ren Z, Sha Z, Fu Z, Xu Z, Xie Z, Zhang Z, Hao Z, Ma Z, Yan Z, Wu Z, Gu Z, Zhu Z, Liu Z, Li Z, Xie Z, Song Z, Pan Z, Huang Z, Xu Z, Zhang Z and Zhang Z (2025a) Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature* 645(8081): 633–638.
- Guo W, Kingston Z and Kavraki LE (2025b) Castl: Constraints as specifications through llm translation for long-horizon task and motion planning. In: *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 11957–11964.
- Guo Z, Işık İ, Ahmad H and Li W (2026) One subgoal at a time: Zero-shot generalization to arbitrary linear temporal logic requirements in multi-task reinforcement learning. *Advances in Neural Information Processing Systems* 38: 77500–77529.
- Hokamp C and Liu Q (2017) Lexically constrained decoding for sequence generation using grid beam search. In: *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. pp. 1535–1546.
- Hu EJ, Shen Y, Wallis P, Allen-Zhu Z, Li Y, Wang S, Wang L and Chen W (2022) LoRA: Low-rank adaptation of large language models. In: *International Conference on Learning Representations*. pp. 1–13.
- ichter b, Brohan A, Chebotar Y, Finn C, Hausman K, Herzog A, Ho D, Ibarz J, Irpan A, Jang E, Julian R, Kalashnikov D, Levine S, Lu Y, Parada C, Rao K, Sermanet P, Toshev AT, Vanhoucke V, Xia F, Xiao T, Xu P, Yan M, Brown N, Ahn M, Cortes O, Sievers N, Tan C, Xu S, Reyes D, Rettinghouse J, Quiambao J, Pastor P, Luu L, Lee KH, Kuang Y, Jesmonth S, Joshi NJ, Jeffrey K, Ruano RJ, Hsu J, Gopalakrishnan K, David B, Zeng A and Fu CK (2023) Do as i can, not as i say: Grounding language in robotic affordances. In: Liu K, Kulic D and Ichnowski J (eds.) *Proceedings of The 6th Conference on Robot Learning, Proceedings of Machine Learning Research*, volume 205. PMLR, pp. 287–318.
- Ildiz ME, Gozeten HA, Taga EO and Oymak S (2026) Learning to correct: Reinforcement learning for multi-attempt chain-of-thought. In: *Forty-third International Conference on Machine Learning*. pp. 1–31.
- Keshishian M, Mischler G, Thomas S, Kingsbury B, Bickel S, Mehta AD and Mesgarani N (2026) Parallel hierarchical encoding of linguistic representations in the human auditory cortex and recurrent automatic speech recognition systems. *Nature Machine Intelligence* 8(2): 257–269.
- Kumar S, Paria B and Tsvetkov Y (2022) Gradient-based constrained sampling from language models. In: Goldberg Y, Kozareva Z and Zhang Y (eds.) *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*. Abu Dhabi, United Arab Emirates: Association for Computational Linguistics, pp. 2251–2277. DOI:10.18653/v1/2022.emnlp-main.144.
- Lewis P, Perez E, Piktus A, Petroni F, Karpukhin V, Goyal N, Küttler H, Lewis M, Yih Wt, Rocktäschel T, Riedel S and Kiela D (2020) Retrieval-augmented generation for knowledge-intensive nlp tasks. In: Larochelle H, Ranzato M, Hadsell R, Balcan M and Lin H (eds.) *Advances in Neural Information Processing Systems*, volume 33. Curran Associates, Inc., pp. 9459–9474.
- Li L, Chen Z and Kan Z (2026) Environment-driven and llm-guided multi-robot task inference and allocation under temporal logic specifications. *IEEE Transactions on Automation Science and Engineering*.
- Liu JX, Shah A, Konidaris G, Tellex S and Paulius D (2024a) Lang2l-2: Grounding spatiotemporal navigation commands using large language and vision-language models. In: *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, pp. 2325–2332.
- Liu JX, Yang Z, Idrees I, Liang S, Schornstein B, Tellex S and Shah A (2023) Grounding complex natural language commands for temporal tasks in unseen environments. In: Tan J, Toussaint M and Darvish K (eds.) *Proceedings of The 7th Conference on Robot Learning, Proceedings of Machine Learning Research*, volume 229. PMLR, pp. 1084–1110.
- Liu MX, Liu F, Fiannaca AJ, Koo T, Dixon L, Terry M and Cai CJ (2024b) ” we need structured output”: Towards user-centered constraints on large language model output. In: *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*. pp. 1–9.
- Liu R, Hou A, Yu X and Yin X (2026a) Zero-shot trajectory planning for signal temporal logic tasks. *Advances in Neural Information Processing Systems* 38: 130405–130442.
- Liu Y, Zhou C, Chen Y, Zhang S, Lin X and Wang X (2026b) Hard constraints meet soft generation: Guaranteed feasibility for llm-based combinatorial optimization. *arXiv preprint arXiv:2602.01090*.
- Loula J, LeBrun B, Du L, Lipkin B, Pasti C, Grand G, Liu T, Emara Y, Freedman M, Eisner J et al. (2025) Syntactic and semantic control of large language models via sequential monte carlo. In: *International Conference on Learning Representations*, volume 2025. pp. 64758–64791.
- Ma Y, Song Z, Zhuang Y, Hao J and King I (2026) A survey on vision–language–action models for embodied ai. *IEEE Transactions on Neural Networks and Learning Systems*.
- Ma Z, Wen C, Su Z, Liang X, Tian C, Qin S and Yang M (2025) Bridging natural language and formal specification–automated translation of software requirements to ltl via hierarchical semantics decomposition using llms. In: *2025 40th IEEE/ACM International Conference on Automated Software Engineering (ASE)*. IEEE, pp. 1208–1220.
- Mavrogiannis A, Mavrogiannis C and Aloimonos Y (2024)

- Cook2Ltl: Translating cooking recipes to Ltl formulae using large language models. In: *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 17679–17686.
- Mendoza D, Hahn C and Trippel C (2024) Translating natural language to temporal logics with large language models and model checkers. In: *2024 Formal Methods in Computer-Aided Design (FMCAD)*. IEEE, pp. 1–11.
- Mikolov T, Karafiát M, Burget L, Cernocký J and Khudanpur S (2010) Recurrent neural network based language model. In: *Interspeech*, volume 2. Makuhari, pp. 1045–1048.
- Nguyen NTH, Silva A, Zumot L, Tupikina L, Aghasaryan A and Alam M (2026) Thinking before constraining: A unified decoding framework for large language models. *arXiv preprint arXiv:2601.07525*.
- Oh Y, Patel R, Nguyen T, Huang B, Pavlick E and Tellex S (2019) Planning with state abstractions for non-markovian task specifications. In: *Robotics: Science and Systems XV*. pp. 1–10. DOI:10.15607/rss.2019.xv.059.
- Pakonen A, Pang C, Buzhinsky I and Vyatkin V (2016) User-friendly formal specification languages-conclusions drawn from industrial experience on model checking. In: *2016 IEEE 21st International Conference on Emerging Technologies and Factory Automation (ETFA)*. IEEE, pp. 1–8.
- Pan J, Chou G and Berenson D (2023) Data-efficient learning of natural language to linear temporal logic translators for robot task specification. In: *2023 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 11554–11561.
- Parekh T, Mehta K, Mehrabi N, Chang KW and Peng N (2025) Dicore: Enhancing zero-shot event detection via divergent-convergent llm reasoning. In: *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*. pp. 20571–20593.
- Patel R, Pavlick E and Tellex S (2020) Grounding language to non-markovian tasks with no supervision of task specifications. In: *Robotics: Science and Systems*, volume 2020. pp. 1–12.
- Puig X, Ra K, Boben M, Li J, Wang T, Fidler S and Torralba A (2018) Virtualhome: Simulating household activities via programs. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. pp. 8494–8502.
- Quansah PK and Bonnah E (2026) Neuronl2ltl: A neurosymbolic framework for natural language translation of linear temporal logic. In: *International Conference on Formal Techniques for Distributed Objects, Components, and Systems*. Springer, pp. 56–73.
- Quartey B, Rosen E, Tellex S and Konidaris G (2025) Verifiably following complex robot instructions with foundation models. In: *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 1–8.
- Rabiei B, AR MK, Dai Z, Pilla SL, Dong Q and Atanasov N (2025) Ltlcodegen: Code generation of syntactically correct temporal logic for robot task planning. In: *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, pp. 19240–19247.
- Rajpurkar P, Zhang J, Lopyrev K and Liang P (2016) Squad: 100,000+ questions for machine comprehension of text. In: *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*. pp. 2383–2392.
- Raman V, Donzé A, Maasoumy M, Murray RM, Sangiovanni-Vincentelli A and Seshia SA (2014) Model predictive control with signal temporal logic specifications. In: *53rd IEEE Conference on Decision and Control*. IEEE, pp. 81–87.
- Rankin IC, McCammon S and Hollinger GA (2021) Robotic information gathering using semantic language instructions. In: *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 4882–4888.
- Rayner K (1975) The perceptual span and peripheral cues in reading. *Cognitive psychology* 7(1): 65–81.
- Santos L, Li Z, Peters L, Bansal S and Bajcsy A (2025) Updating robot safety representations online from natural language feedback. In: *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 7778–7785.
- Schlör R, Josko B and Werth D (2006) Using a visual formalism for design verification in industrial environments. In: *Services and Visualization Towards User-Friendly Design: ACoS'98, VISUAL'98, AIN'97 Selected Papers*. Springer, pp. 208–221.
- Schulman J, Wolski F, Dhariwal P, Radford A and Klimov O (2017) Proximal policy optimization algorithms.
- Shi YZ, Hou H, Bi Z, Meng F, Wei X, Ruan L and Wang Q (2024) Autodsl: Automated domain-specific language design for structural representation of procedures with constraints. In: *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. pp. 12177–12214.
- Sun Z, Wang Q, Wang H, Zhang X and Xu J (2025) Detection and mitigation of hallucination in large reasoning models: A mechanistic perspective. In: *Socially Responsible and Trustworthy Foundation Models at NeurIPS 2025*. pp. 1–25.
- Tellex S, Kollar T, Dickerson S, Walter M, Banerjee A, Teller S and Roy N (2011) Understanding natural language commands for robotic navigation and mobile manipulation. In: *Proceedings of the AAAI conference on artificial intelligence*, volume 25. pp. 1507–1514.
- Verkerk A, Shcherbakova O, Haynie HJ, Skirgård H, Rzymiski C, Atkinson QD, Greenhill SJ and Gray RD (2026) Enduring constraints on grammar revealed by bayesian spatiophylogenetic analyses. *Nature human behaviour* 10(1): 126–136.
- Wang J, Sundarsingh DS, Deshmukh JV and Kantaros Y (2025) Conformalnl2ltl: Translating natural language instructions into temporal logic formulas with conformal correctness guarantees. *arXiv preprint arXiv:2504.21022*.
- Wang S, Wu Q and Xia Y (2026) Logicflow: Amortizing signal temporal logic into continuous vector fields for safe driving. *IEEE Robotics and Automation Letters*.
- Wang X, Wei J, Schuurmans D, Le QV, Chi EH, Narang S, Chowdhery A and Zhou D (2023) Self-consistency improves chain of thought reasoning in language models. In: *The Eleventh International Conference on Learning Representations*. pp. 1–24.
- Wei J, Wang X, Schuurmans D, Bosma M, Ichter B, Xia F, Chi E, Le QV and Zhou D (2022) Chain-of-thought prompting elicits reasoning in large language models. In: Koyejo S, Mohamed S, Agarwal A, Belgrave D, Cho K and Oh A (eds.) *Advances in Neural Information Processing Systems*, volume 35. Curran Associates, Inc., pp. 24824–24837.
- Willard BT and Louf R (2023) Efficient guided generation for large language models. *arXiv preprint arXiv:2307.09702*.
- Wu Y, Xiong Z, Hu Y, Iyengar SS, Jiang N, Bera A, Tan L and Jagannathan S (2025) Selp: Generating safe and efficient task

- plans for robot agents with large language models. In: *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, pp. 2599–2605.
- Xu F, Hao Q, Shao C, Zong Z, Li Y, Wang J, Zhang Y, Wang J, Lan X, Gong J, Ouyang T, Meng F, Yan Y, Yang Q, Song Y, Ren S, Hu X, Feng J, Gao C and Li Y (2025) Toward large reasoning models: A survey of reinforced reasoning with large language models. *Patterns* 6(10).
- Yao S, Yu D, Zhao J, Shafran I, Griffiths T, Cao Y and Narasimhan K (2023) Tree of thoughts: Deliberate problem solving with large language models. *Advances in neural information processing systems* 36: 11809–11822.
- Yao Z, Liu Y, Chen Y, Chen J, Fang J, Hou L, Li J and Chua TS (2025) Are reasoning models more prone to hallucination? *arXiv preprint arXiv:2505.23646*.
- Zeng W, Huang Y, Liu Q, Liu W, He K, Ma Z and He J (2025) Simplerl-zoo: Investigating and taming zero reinforcement learning for open base models in the wild.
- Zheng Y, Zhang R, Zhang J, Ye Y and Luo Z (2024) LlamaFactory: Unified efficient fine-tuning of 100+ language models. In: Cao Y, Feng Y and Xiong D (eds.) *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*. Bangkok, Thailand: Association for Computational Linguistics, pp. 400–410. DOI:10.18653/v1/2024.acl-demos.38.
- Zhou J, Hu Q, Wang J and Wang W (2026) Policy-guided stepwise action planning for controllable llm reasoning. In: *Findings of the Association for Computational Linguistics: ACL 2026*. pp. 40740–40765.