

Offline-Verifiable Accountability for Cross-Organization Agent Messaging: A Preserved Evidence-Bundle Approach

Adil Alshammari^{a,b,*}, Hayretin Bahsi^{a,c}

^a*School of Informatics, Computing, and Cyber Systems, Northern Arizona University, United States*

^b*Department of Computer Science, College of Computer and Information Sciences, Majmaah University, Majmaah 11952, Saudi Arabia*

^c*School of Information Technologies, Tallinn University of Technology, Estonia*

Abstract

Cross-organization agent workflows require preserved evidence that remains independently verifiable during later audit or dispute review. Such workflows may involve multiple organizations, delegated actions, policy-relevant events, and disputed accountability claims. This is difficult when live systems are unavailable, controlled by one party, or not trusted by all participants. Existing mechanisms provide useful pieces, including authenticated logging, delegation semantics, signed checkpoints, and consistency checks. What remains missing is a verifier-centered event-level bundle for checking evidence sufficiency offline under an explicit policy.

We propose a preserved evidence-bundle model and a policy-controlled offline verifier for agent-to-agent workflow events. Each bundle preserves policy-required evidence, including sender authentication, authenticated log commitment, witness-backed checkpoint evidence, append-only continuity, delegation-aware authorization evidence, and, when issued and required by policy, explicit receiver-signed receipt evidence.

The verifier accepts only claims supported by the selected policy-required evidence, giving a later dispute reviewer an offline basis for assessing evidence sufficiency. It does not infer delivery or receipt from transport behavior or log inclusion alone.

In a prototype evaluation over 300 complete workflows and 1200 valid preserved bundles, we measure offline verifier-side latency across policy profiles and workflow-event evidence requirements. Checkpoint-context anchoring has the highest verifier-side latency in the current prototype, while events with delegation and workflow-prerequisite evidence require additional verification steps. In targeted negative-evidence tests, all corrupted or policy-insufficient bundles were rejected, with no false acceptance observed. These results support evidence-based audit and dispute review without relying on live services or platform-specific logs.

Keywords: Accountability, Agent-to-agent communication, Offline verification, Evidence bundles, Authenticated logging, Delegation

1. Introduction

In cross-organization agent workflows, structured messages carry requests, results, and policy-relevant actions across administrative boundaries. Therefore, a later dispute may involve more than whether a message was sent. It may also involve authorship, authenticated logging, policy compliance, delegated authority, or whether receipt is supported by explicit receiver-signed evidence.

Ordinary operational records are a weak basis for resolving such disputes. The needed evidence may be held by one party, changed after the event, or no longer available when the dispute is reviewed. A verifier may also be unable to query the original live system. The accountability evidence therefore has to be preserved in a form that can be checked independently of the runtime services. This issue also appears in recent work on multi-agent systems and AI-agent relationships, where studies

discuss contestability, accountability, and credible agent identity when autonomous agents operate across organizational or service boundaries [1, 2, 3].

This evidence problem becomes concrete in sectors such as healthcare. Prior work in this domain has examined privacy-preserving medical data protection and controlled access [4, 5]. Agentic AI and AI-agent systems are increasingly being studied for healthcare workflows and clinical decision support [6, 7, 8]. A single workflow may involve several organizations, delegated actions, and later audit or dispute review. In such workflows, a later reviewer may need evidence that can be checked without relying only on the systems that originally produced or stored the event. More broadly, recent surveys describe autonomous, goal-oriented, and workflow-oriented agent systems beyond the healthcare example [9, 10].

Industry reporting suggests that this is not only a theoretical concern. For example, a Cloud Security Alliance report states that 53% of organizations observed AI agents exceeding intended permissions at least occasionally, and 47% reported a security incident involving AI-agent behavior [11]. Surveys and assurance work on agentic large language model (LLM)

*Corresponding author.

Email addresses: aha388@nau.edu (Adil Alshammari), Hayretin.Bahsi@nau.edu (Hayretin Bahsi)

deployments raise related concerns about permissions, delegated tool use, and third-party service boundaries [12, 13]. For this paper, the implication is narrower: the verifier should be able to check preserved evidence directly, instead of relying on platform-specific logs, live service access, or informal operational assurances.

We treat agent-to-agent message events as observable workflow events at organizational boundaries. These events give the system a concrete point for attaching and preserving evidence. Later accountability claims are evaluated from the preserved bundle and the selected policy profile. The verifier can therefore assess a specific preserved event without reconstructing the full runtime state of the agent system.

The examples include LLM-based agents, but the verification model is not tied to an LLM or to a specific agent architecture. It applies to software agents that exchange structured workflow messages and preserve the evidence artifacts required by the selected policy.

Prior work gives useful building blocks, but most of them are studied in separate settings. Transparency-logging and key-transparency work provide authenticated commitments, signed log states, and consistency checks [14, 15]. Delegation and auditable-authorization work addresses authority transfer, authorization provenance, and policy-governed access in multi-party environments [16, 17]. Formal workflow-delegation studies also show that delegated authority can interact with separation-of-duty constraints and workflow satisfiability [18]. Formally verified accountability protocols define non-repudiation and evidence-driven verdict semantics for message exchange [19].

Our previous paper provided the message-level basis for this work by showing how a verifier can check message authorship and log inclusion from preserved artifacts without contacting the sender or receiver [20]. Its scope was limited to message-level evidence at a signed checkpoint. This article moves beyond that baseline to policy-controlled workflow-event accountability. The central question is not only whether individual evidence artifacts are valid, but whether the preserved evidence for a specific workflow event satisfies the evidence checks required by the selected policy profile.

This leads to the following research question: **How can message-level evidence for agent-to-agent workflows be extended into policy-controlled workflow-event evidence that enables an offline verifier to decide whether a preserved bundle satisfies the selected policy profile and its required evidence checks?**

This question is addressed through four design objectives and claim boundaries. First, evidence is preserved per workflow event because later disputes usually concern a specific workflow action, not only the overall system state. Second, verification is performed offline because live services may be unavailable, controlled by one party, or not trusted during later review. Third, receipt requires explicit receiver-signed evidence because receipt cannot be inferred from transport behavior, storage, or log inclusion. Fourth, acceptance remains bounded by the selected policy so that the verifier does not treat a valid signature, log commitment, or capability chain as proof of de-

livery, endpoint correctness, semantic correctness, or workflow completion.

The novelty of this paper is the policy-controlled, workflow-event-level verification of evidence sufficiency. For a specific agent-to-agent workflow event, the offline verifier checks whether the preserved bundle satisfies the evidence checks required by the selected policy profile. The key question is not only whether individual artifacts are valid, but whether the preserved evidence is sufficient to support the claim under that policy. Acceptance is interpreted according to these claim boundaries, and the evaluation is claim-matched instead of a general throughput benchmark.

The paper makes three contributions:

- 1) **Preserved evidence-bundle model.** We introduce a verifier-centered evidence-bundle model for agent-to-agent workflow events in cross-organization workflows. The model preserves sender, log, receipt, checkpoint, continuity, and delegation evidence as independently checkable evidence classes.
- 2) **Policy-controlled workflow-event verifier.** We define a policy-controlled offline verifier for workflow-event evidence. The selected policy profile determines both which evidence predicates must succeed before the verifier returns **ACCEPT** and which evidence-level claims are supported by the acceptance decision. Therefore, stronger claims require the corresponding preserved evidence, such as receipt, witness-backed checkpoint, continuity, checkpoint-context, or delegation evidence.
- 3) **Claim-matched evaluation.** We implement a prototype and evaluate it using three experiments: policy-level verifier-side latency, event-specific evidence requirements, and targeted negative-evidence diagnostics.

The paper is structured as follows: Section 2 reviews related work. Section 3 presents the system model, assumptions, threat model, and evidence-control boundaries. Section 4 describes the system design and evidence lifecycle. Section 5 presents the policy-controlled offline verification procedure. Section 6 defines the verifier acceptance semantics and bounded claims. Section 7 provides an evidence-level security assessment. Section 8 reports the evaluation results. Section 9 discusses implications and limitations. Finally, Section 10 concludes the paper and presents future work.

2. Related Work

The closest related work falls into four lines: transparency logging, key transparency, witness-assisted consistency, and delegation-aware authorization. Transparency logging provides append-only log commitments, signed log states, and inclusion or consistency evidence [21, 22, 14]. Key-transparency systems provide verifiable support for identity-to-key bindings and key-directory consistency [15]. Witness-assisted consistency uses additional observation or consistency evidence to reduce

Table 1: Comparison of related work by verifier-relevant evidence support.

Reference	Year	Context	Evidence bundle	Offline verification	Signed checkpoint	Inclusion proof	Witness / consistency	Delegation evidence
Dirksen et al. [14]	2021	Web PKI	×	△	△	△	✓	×
Malvai et al. [15]	2023	E2EE messaging	×	△	△	△	✓	×
Li et al. [17]	2024	Medical data	×	△	×	×	×	✓
Ferretti et al. [16]	2021	IIoT	×	△	△	△	×	✓
This work	2026	Agent messaging	✓	✓	✓	✓	✓	✓

Note: ✓ = explicitly supported in the cited design. △ = supports a related sub-capability, but not the preserved per-event bundle and policy-controlled offline verification model proposed here. × = not supported or not explicit in the cited design.

reliance on a single log view [14, 15]. Delegation-aware authorization preserves evidence about authority transfer or policy-governed action in multi-party settings [16, 17]. In this paper, delegation means that one actor performs a workflow action on behalf of another actor under preserved authority evidence, such as a capability chain or a policy-bound authorization artifact. These lines provide useful evidence mechanisms, but they do not by themselves define a preserved workflow-event bundle whose evidence sufficiency is checked offline under a selected policy profile.

Much of the related work strengthens one evidence property at a time. Some systems focus on transparency or logged-state verifiability. Others focus on cross-view consistency, delegation semantics, or auditable authorization. On the logging side, the main cryptographic basis is Merkle/hash-tree commitment and certificate-transparency-style append-only logging [23, 21, 22]. These mechanisms underlie the inclusion proofs, signed log-state checkpoints, and consistency proofs used in append-only logs.

Later, transparency-log and verifiable-storage systems use authenticated data structures to improve scalability, monitoring, and storage-layer verification [24, 25, 26]. These systems address infrastructure problems such as scalable authenticated storage, log monitoring, and storage-layer verification. However, they do not define a policy-controlled preserved workflow-event bundle that allows an offline verifier to assess evidence sufficiency across Merkle inclusion evidence, signed checkpoints, receipt evidence, append-only continuity, and delegation-aware workflow evidence.

At the deployment level, work on multi-ownership digital service chains shows how security responsibilities and security-relevant information can span multiple providers and administrative domains [27]. This supports our focus on verifier-centered artifacts for offline assessment.

Table 1 uses the verifier’s evidence dimensions to compare the selected studies. Here, an evidence bundle means a preserved per-event artifact set for later verifier use. Offline verification means that a third party checks preserved artifacts and local trust inputs without contacting the live services. A signed checkpoint records the committed log state. The inclusion proof binds an event commitment to the signed state. Witness/consistency refers to witness-assisted or cross-view consistency support. Delegation evidence refers to preserved cryptographic evidence of authority for the events.

Parakeet and LogPicker support authenticated commitments and consistency-related checks. They do not preserve per-event workflow evidence for later verification of a workflow

event [14, 15]. DAMFSD and the auditable-authorization architecture of Ferretti et al. cover a different side of the problem: delegation, authorization provenance, and auditable authorization. They do not, however, provide a policy-controlled workflow-event verifier that evaluates explicit receipt semantics, signed-checkpoint evidence, workflow-event inclusion evidence, workflow-bound delegation evidence, and bounded claim support under a selected policy profile [17, 16].

Formal work on non-repudiation, evidence-driven verdicts, and accountability shows how preserved evidence can support later accountability decisions [19, 28]. This motivates our verifier model, but our scope is narrower. The verifier checks the evidence preserved for one workflow event under the selected policy. The decision remains tied to that specific workflow event.

Our previous paper introduced a proof-carrying evidence layer for offline-verifiable agent-to-agent messaging. A verifier could check authorship, payload-hash binding, log inclusion, and the associated signatures from preserved artifacts alone, without contacting the sender, receiver, or a live service [20]. However, that work was limited to message-level evidence within a signed log snapshot. The present paper extends that foundation to policy-controlled workflow-event accountability. For a workflow event, the offline verifier checks whether the preserved evidence bundle satisfies the evidence checks required by the selected policy profile. Depending on that profile, the required checks may cover explicit receiver-signed receipt evidence, witness-backed checkpoint evidence, append-only continuity evidence, checkpoint-context evidence, and delegation-aware authorization evidence.

Overall, the related work provides important mechanisms for authenticated state, consistency evidence, authorization provenance, policy-governed access, capability-based access control, accountable credentials, and privacy-preserving access control [14, 15, 16, 17, 29, 30, 31, 32]. However, these works do not provide a verifier-centered preserved workflow-event bundle whose evidence sufficiency can be checked offline under a selected policy profile for cross-organization agent-message events. Therefore, we frame offline accountability review as an evidence-sufficiency problem: the verifier receives a preserved workflow-event bundle and checks whether the policy-required evidence is present, valid, and properly bound to the reviewed workflow event.

3. System Model, Assumptions, and Threat Model

3.1. Deployment Context and Accountability Scope

The model covers cross-organization workflows in which autonomous or semi-autonomous software agents exchange structured messages across administrative boundaries. A deployment may involve several institutions and several steps, with one organization initiating a request and other parties performing delegated actions. A verifier may later review the preserved evidence without contacting the original runtime environment. The examples are illustrative and do not limit the domain. The framework applies when accountability depends on preserved cryptographic evidence. It does not assume continued access to online services.

The unit of analysis is the message event, not generalized application state. Each accountability decision is anchored to a preserved evidence bundle for a specific message event and, when required by policy, its checkpoint and delegation context. We do not reconstruct arbitrary execution state. The verifier instead checks bounded claims about message authorship, authenticated logging, explicit receipt, append-only continuity, and delegation-aware authorization.

In this model, each evidence class supports a different bounded claim. Sender-authenticated inputs support exact-message binding. Inclusion and signed-checkpoint evidence support authenticated log commitment. Explicit signed receipts support a receipt claim only when preserved and verified. Witness evidence supports checkpoint validation. Append-only extension proof (AOEP) evidence supports continuity between authenticated checkpoints. Stronger checkpoint reasoning requires the corresponding checkpoint evidence. Delegation evidence supports authorization-related claims under policy.

3.2. Trust Assumptions, Adversary Scope, and Claim Boundaries

The framework assumes standard security for the digital signature and hash functions used in the implementation. It also assumes that the offline verifier has the required public keys and trust anchors. If a signing key is compromised, revoked outside the evidence context, or incorrectly bound to an identity, verification is limited to the keys and trust anchors accepted by the verifier.

The transport path is the channel used to transfer messages and evidence artifacts between parties. It may use ordinary operational protections, but it is not trusted as an accountability source: messages or artifacts may be delayed, replayed, omitted, reordered, modified, or replaced before offline verification. Therefore, transport success is treated as operational information only, not as an accountability signal. The offline verifier detects tampering, omission, substitution, rebinding, or missing policy-required evidence only when these affect preserved artifacts checked under the selected policy profile. Message reordering during runtime is detected when it causes the preserved evidence bundle to fail a policy-required evidence check. Thus, reordering is treated as a policy-relative evidence-sufficiency issue, not as a complete reconstruction of transport history.

We model the adversary primarily as an evidence manipulator, not as an attacker with unrestricted runtime control. The adversary may present incomplete bundles, inconsistent checkpoint material, invalid witness-related evidence, or forged capability and workflow references in an attempt to induce an incorrect acceptance decision.

The adversary model does not assume malicious replacement of the offline verifier’s trust anchors. It also does not claim protection against compromised signing keys or collusion among all evidence-producing parties. Such cases are treated as trust-anchor, key-management, or deployment failures rather than evidence-verification failures.

The verifier is assumed to execute correctly once provisioned with the required trust anchors, public verification keys, policy inputs, and policy-permitted offline references. It is limited to preserved artifacts and those local inputs. It does not query runtime services, treat transport success as evidence, perform online freshness checks, or reconcile live system views during verification.

In this paper, a witness is an independent checkpoint observation service. Its role is limited to observing checkpoint material, checking consistency with previously observed checkpoints when applicable, and co-signing checkpoint material. It does not receive plaintext payloads, issue receipts, infer receipts, or decide whether a workflow action is correct. Witness evidence is used only for witness-backed checkpoint validity assessment and, when required by policy, append-only continuity validation. When checkpoint-context anchoring is enabled, the verifier may use preserved material from the witnessed checkpoint log (WCL) as context for checkpoint validation.

These claim boundaries are necessary because verifier acceptance is limited to claims justified by the preserved evidence and the selected policy profile. The verifier supports an authenticated logged-message claim when sender-authentication and authenticated logging evidence validate. It supports a receipt claim only when an explicit receiver-signed receipt object is preserved and successfully verified. Receipt cannot be claimed from transport acknowledgments, HTTP status codes, forwarding, storage, log inclusion, or execution side effects. Accordingly, verifier acceptance does not establish delivery, endpoint correctness, or semantic correctness of the workflow action. Runtime LLM threats are also outside the verifier’s evidence-level scope, including prompt injection, malicious planning, and unsafe tool use.

Table 2 summarizes the evidence-control boundaries considered in the threat model. An evidence-control boundary is a point in the evidence lifecycle where evidence is generated, transferred, preserved, or evaluated. These boundaries are not trusted zones. They indicate where artifacts may be modified, omitted, substituted, replayed, or rebound before offline verification.

3.3. Main Notation

Table 3 gives the main notation used in the system description, algorithms, and acceptance semantics. Several paper-specific terms are also used consistently in the sections that

Table 2: Evidence-control boundaries and verifier implications.

Boundary	Verifier implication
Agent-side domains	Verify sender identity and policy-bound evidence.
Untrusted transport	Do not treat transport success as evidence.
Evidence-producing services	Check only policy-required evidence.
Preserved evidence stores	Check for omission, substitution, or tampering.
Local verifier trust base	Use local policy, keys, and trust anchors.
External action boundary	Do not infer endpoint correctness or execution.

Table 3: Main notation.

Notation	Description
m	Canonicalized message representation.
$h(m)$	Message commitment derived from m .
$H(\cdot)$	Hash or commitment function.
σ_S	Sender signature over the canonical message.
σ_R	Explicit receiver-signed receipt.
σ_L	Log signature over signed-checkpoint fields.
π_{incl}	Inclusion proof for the message commitment.
π_{ext}	Append-only extension proof (AOEP) between checkpoints.
WCL	Witnessed checkpoint log for checkpoint-context anchoring.
STH	Signed tree head comprising r , t , τ , and σ_L .
r	Checkpoint root, as used in STH.
t	Authenticated tree size or checkpoint index, as used in STH.
τ	Checkpoint context, e.g., timestamp, as used in STH.
C_{cap}	Capability chain used as delegation evidence.
P	Selected policy profile.
CP	Set of verification predicates required under policy P .
Φ	Universe of verifier predicates.
φ	Generic verifier predicate.
$\mathcal{B}$	Preserved evidence bundle.

follow. An evidence bundle denotes the preserved set of artifacts used by the offline verifier to evaluate one message event. A policy profile specifies which verification predicates are required for acceptance. Authenticated log commitment denotes evidence that a message commitment is included in a signed checkpoint of the append-only log. An explicit signed receipt denotes receiver-signed evidence that supports a receipt claim only when such a receipt object is present and valid.

Append-only continuity means that a later authenticated checkpoint validly extends an earlier one. We use π_{ext} for the append-only extension proof (AOEP) that validates this continuity. Checkpoint-context evidence is preserved checkpoint material and associated WCL references that link a signed checkpoint to the workflow and policy context required for checkpoint validation. Witness-backed checkpoint evidence is a preserved witness signature or attestation over checkpoint material and, when applicable, checked its consistency with earlier checkpoints. Delegation-aware authorization evidence is preserved authority evidence showing that one actor was authorized to perform a workflow action on behalf of another actor, for example through a capability chain or a policy-bound authorization artifact.

The meaning of ACCEPT as the offline verifier’s acceptance outcome is defined formally in Section 6 as a policy-relative decision conditioned on the evidence required under P .

3.4. Evidence Support and Claim Limits

Table 2 identifies where evidence may be generated, transferred, preserved, or evaluated in the evidence lifecycle. In contrast, Table 4 summarizes the bounded claim support of each preserved artifact: what the artifact supports and what it does not establish on its own.

Table 4: Evidence artifacts and claim limits.

Artifact	Supports	Does not establish
Sender signature	Message authorship	Logging, receipt, or delivery
Log evidence	Log commitment	Receipt, delivery, or endpoint correctness
Signed receipt	Receipt claim	Delivery or downstream execution
Witness evidence	Checkpoint support	Receipt, delivery, or real-time equivocation prevention
AOEP evidence	Append-only extension	Global consistency or collusion resistance
Checkpoint context	Checkpoint anchoring	Continuity, receipt, or endpoint correctness
Capability chain	Delegated authorization	Logging, receipt, or workflow completion

4. System Design and Evidence Lifecycle

4.1. Architecture Overview

Figure 1 shows the high-level architecture and evidence flows of the proposed framework. The design uses five logical roles: a sender agent, a receiver-side decision point, an append-only logging service, a checkpoint-witnessing role, and an offline verifier. Checkpoint witnessing is used only when required by policy. We use the term receiver-side decision point because the receiving organization may implement this role as an agent, gateway, policy service, or workflow controller. The required property is the ability to validate the incoming message and attach the evidence required by policy, not a specific software architecture.

Following the flow in Figure 1, the sender agent originates a canonicalized message together with sender-authentication evidence. The receiver-side decision point validates the incoming message under the applicable workflow and policy logic. If validation succeeds, a verified digest of the message is committed to the append-only log. The logging service returns authenticated logging artifacts, including an inclusion proof and signed checkpoint evidence. When checkpoint witnessing is enabled, a witness contributes witness-backed checkpoint evidence. This evidence supports witness-backed checkpoint validation and, when required, later append-only continuity validation. The resulting artifacts are assembled into a preserved evidence bundle for offline verification.

The architecture is verifier-centered. Live message processing produces preserved evidence. Later dispute resolution evaluates that evidence offline. This separation allows the verifier to assess the preserved bundle without live access to the sender, receiver-side decision point, logging service, or checkpoint-witnessing role.

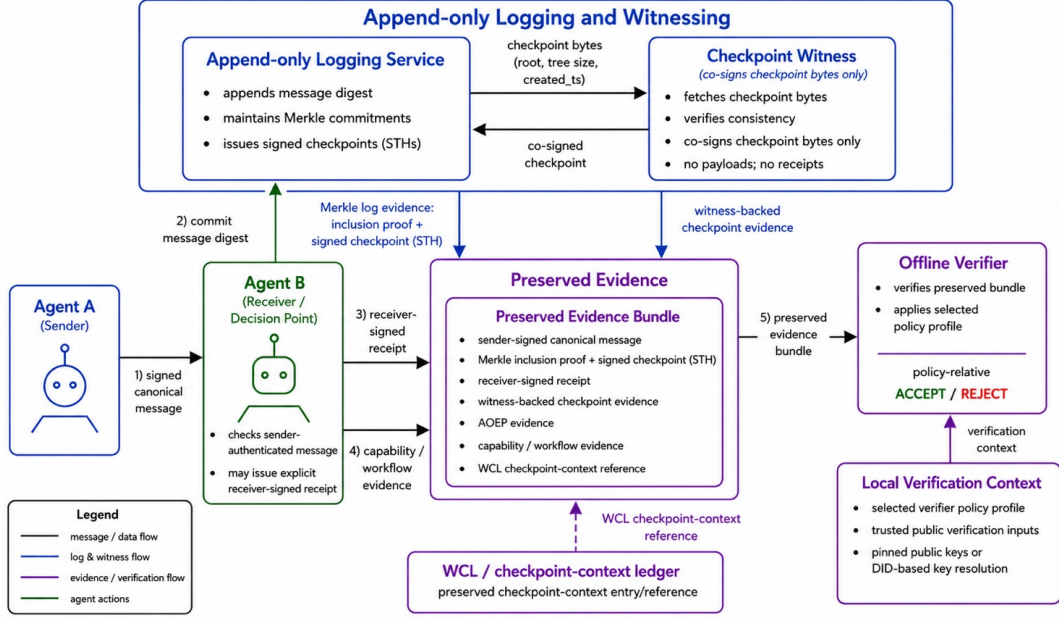


Figure 1: Sender-authenticated messages are validated, logged, augmented with policy-required checkpoint evidence, and preserved as evidence bundles for offline verification.

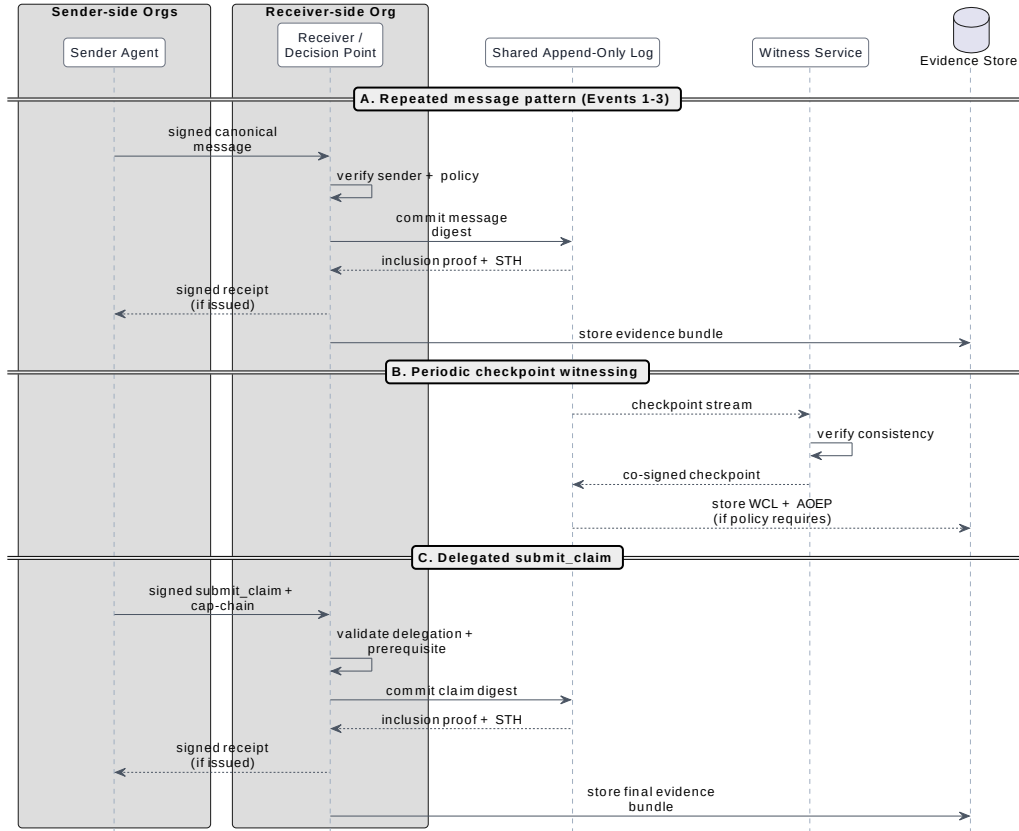


Figure 2: Sequence-level evidence generation for the running workflow example. Event 1 is `refer_patient`, Event 2 is `order_mri`, Event 3 is `send_result`, and Event 4 is `submit_claim`. Events 1-3 share the signed-message, validation, logging, and evidence-storage pattern. Event 4 adds delegation and workflow-prerequisite evidence.

4.2. Evidence Issuance Path

Issuance follows four stages. First, the system validates sender-authenticated inputs and any applicable workflow, policy, or delegation conditions. Second, it commits the verified

message digest to the append-only log and obtains authenticated logging evidence. Third, it attaches any additional evidence class required by the active policy profile. Finally, it assembles and preserves the evidence bundle for offline verification.

cation.

The running example is a cross-organization healthcare workflow executed by agents on behalf of participating actors. A workflow event is a signed agent-to-agent message instance that represents a workflow action and is preserved with the evidence required for verification under the selected policy profile. In this example, Event 1 is `refer_patient`, where a general practitioner (GP) agent refers a patient to a consultant. Event 2 is `order_mri`, where a consultant-side agent requests an MRI from a lab or imaging provider. Event 3 is `send_result`, where the lab or imaging agent returns the result. Event 4 is `submit_claim`, where a claim-related follow-up action is submitted to the insurer. The example is illustrative. The verifier operates on preserved evidence bundles and does not depend on healthcare-specific semantics.

Figure 2 shows the evidence-generation sequence at the message-event level. Events 1–3 share the repeated signed-message, validation, logging, and evidence-storage pattern, while Event 4 adds delegation and workflow-prerequisite evidence.

The canonical message representation m is the deterministic representation of the workflow message fields used for hashing and signing. In the prototype, each agent-message event contains an event type, case identifier, sender and receiver identifiers, timestamp or context fields, payload commitment, policy-context references, and sender-authentication evidence. This representation is used to verify sender authentication and to derive the message commitment $h(m)$. The prototype evaluates preserved evidence generated from these structured message events, not a transport-level agent communication protocol.

Algorithm 1 summarizes the issuance-side process that turns a validated message event into a preserved evidence bundle.

Algorithm 1 follows the same issuance sequence: sender validation and message commitment in lines 1–2, logging evidence in lines 3–4, policy-required evidence attachment in lines 6–20, and bundle assembly and preservation in lines 21–22. Lines 6–20 also show why stronger later claims are not inferred retroactively: receipt, witness, continuity, checkpoint-context, and delegation evidence must be issued, available, and preserved when required by policy.

Evidence generation is therefore policy-aware at issuance time. If a deployment requires stronger append-only continuity validation, the runtime system must preserve the corresponding witness or checkpoint-context artifacts. If it requires explicit receipt semantics, the receiver must issue and preserve a receiver-signed receipt object rather than relying on transport or storage side effects. If delegation-aware reasoning is required, the delegation chain must be attached. The verifier later checks these evidence classes under the selected policy.

4.3. Evidence Bundle Structure and Verifier Inputs

The preserved evidence bundle is the main accountability artifact evaluated by the offline verifier. It contains core evidence for sender authentication and authenticated log commitment. It may also contain policy-required evidence, such as explicit receipt evidence, witness-backed checkpoint evidence,

Algorithm 1 Message processing and evidence bundle issuance

Require: Canonical message representation m , sender evidence σ_S , policy profile P

Ensure: Preserved evidence bundle $\mathcal{B}$

```

1: Validate sender-authenticated inputs over the canonical message representation
2: Derive the message commitment  $h(m)$ 
3: Commit the verified message digest to the append-only logging service
4: Obtain authenticated logging evidence, including inclusion proof and signed checkpoint
5: Apply any issuance-time workflow checks required by policy
6: if  $P$  requires witness-backed checkpoint evidence then
7:   Obtain witness-backed checkpoint evidence
8: end if
9: if  $P$  requires checkpoint-context evidence then
10:   Preserve checkpoint-context evidence and associated WCL references
11: end if
12: if  $P$  requires append-only continuity validation and a prior checkpoint is available then
13:   Attach prior-checkpoint context and append-only extension evidence
14: end if
15: if  $P$  requires delegation-aware authorization evidence then
16:   Attach capability and policy-required workflow evidence
17: end if
18: if an explicit signed receipt is issued and preserved then
19:   Attach explicit signed receipt evidence
20: end if
21: Assemble the preserved evidence bundle  $\mathcal{B}$ 
22: Persist  $\mathcal{B}$  for later offline verification
23: return  $\mathcal{B}$ 

```

AOEP continuity evidence, checkpoint-context material, or delegation/workflow evidence. If the selected policy requires an artifact and that artifact is absent or invalid, the corresponding verifier check fails.

The verifier evaluates the bundle using only local offline inputs: the selected policy profile, public verification keys, trust anchors, key-resolution references, and any checkpoint-context references permitted by the policy. It does not require online access to the sender, receiver, logging service, or witness. The system therefore separates evidence issuance during live message processing from later evidence verification under the verifier’s local control.

5. Offline Verification and Policy-Controlled Evidence

5.1. Offline Verification Procedure

The verifier checks a preserved evidence bundle using local offline inputs, including verification keys, trust anchors, and the selected policy profile. It does not use transport logs, online service responses, or live infrastructure queries. The policy profile is a verifier-side input, not a choice made by the evidence producer for a later dispute.

The verifier returns `ACCEPT` only when all mandatory and policy-required evidence checks succeed. Otherwise, it returns `REJECT`. A minimal profile may require only sender authentication and authenticated log commitment, while stronger profiles may also require receipt, witness, checkpoint-context, append-only continuity, or delegation-aware authorization evidence.

Figure 3 shows which bundle components the offline verifier checks. The figure separates always-on core checks from policy-controlled checks and shows the local context used for

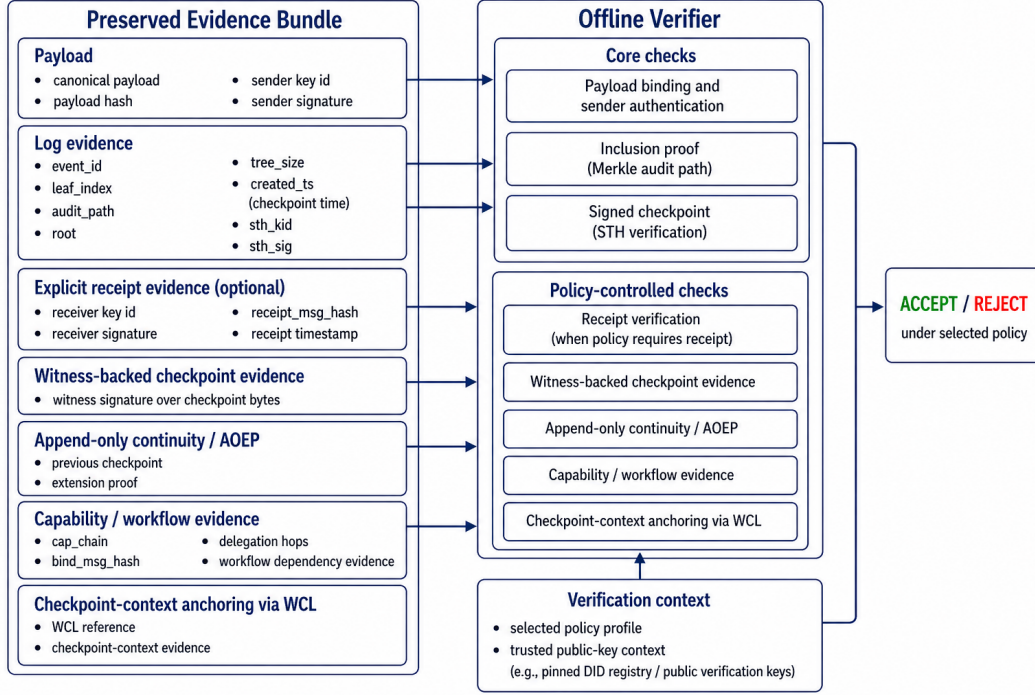


Figure 3: Offline verification inputs and policy-controlled checks over a preserved evidence bundle.

offline verification, including the selected policy profile and trusted public keys.

Explicit receipt evidence is profile-dependent: it is checked only when the selected policy requires a receipt-related claim. Receipt verification proves only the validity of the receiver-signed receipt object. It does not imply human reading, semantic understanding, successful downstream processing, or delivery.

Algorithm 2 performs the core checks in lines 1–4, the policy-controlled checks in lines 5–19, and the final ACCEPT/REJECT decision in lines 20–24. It returns ACCEPT only when all mandatory and policy-required checks succeed. Section 6 defines the formal meaning of ACCEPT.

5.2. Append-Only Continuity Verification

Algorithm 3 summarizes the verifier-side AOEP check performed when the selected policy requires append-only continuity between two authenticated checkpoints.

Authenticated log commitment proves inclusion only relative to the signed checkpoint presented to the verifier. Stronger reasoning across checkpoints requires append-only continuity evidence. Algorithm 3 verifies the checkpoint signatures, ordering conditions, and append-only extension proof in lines 1–3. When required by the selected policy profile, this check shows that the later authenticated checkpoint validly extends the earlier one.

This continuity check supports append-only continuity between the authenticated checkpoints presented to the verifier. It does not support claims based on one isolated checkpoint. Broader claims, such as real-time equivocation prevention, universal consistency across all observers, or resistance to log-witness collusion, require assumptions or evidence outside this

Algorithm 2 Offline verification of an evidence bundle

Require: Evidence bundle $\mathcal{B}$, offline verification inputs, policy profile P
Ensure: ACCEPT or REJECT with the first failing check

- 1: Validate bundle structure and mandatory fields
- 2: Verify payload-hash binding for the preserved canonical message representation
- 3: Verify sender-authentication evidence σ_S against the canonical message and reject if absent or invalid
- 4: Verify authenticated log commitment via inclusion proof and signed checkpoint and reject if verification fails
- 5: **if** P requires witness-backed checkpoint validation **then**
- 6: Verify witness evidence against the authenticated checkpoint
- 7: **end if**
- 8: **if** P requires checkpoint-context validation **then**
- 9: Verify checkpoint-context evidence against the permitted WCL-backed context
- 10: **end if**
- 11: **if** P requires append-only continuity validation **then**
- 12: Verify prior-checkpoint context and AOEP evidence
- 13: **end if**
- 14: **if** P requires delegation or policy-required workflow checks **then**
- 15: Verify capability and policy-required workflow evidence
- 16: **end if**
- 17: **if** P requires explicit receipt **then**
- 18: Verify explicit signed receipt evidence
- 19: **end if**
- 20: **if** all mandatory and policy-required checks succeed **then**
- 21: **return** ACCEPT
- 22: **else**
- 23: **return** REJECT with the first failing check
- 24: **end if**

AOEP check.

5.3. Delegation-Aware Authorization Verification

In cross-organization workflows, message admissibility may depend on authorship and logging. It may also depend on whether the sender or intermediary acted under valid delegated

Algorithm 3 AOEP verification between two checkpoints

Require: Prior authenticated checkpoint STH_{old} , later authenticated checkpoint STH_{new} , extension proof π_{ext}

Ensure: Valid append-only extension or failure

- 1: Verify the authenticity of STH_{old} and STH_{new}
 - 2: Check that checkpoint ordering and applicability conditions hold
 - 3: Verify that π_{ext} validates append-only extension from STH_{old} to STH_{new}
 - 4: **if** all checks succeed **then**
 - 5: **return** valid append-only extension
 - 6: **else**
 - 7: **return** failure
 - 8: **end if**
-

authority. For that reason, the bundle may include delegation-aware authorization evidence. The verifier treats this evidence as a separate input, not as something implied by message transmission.

Algorithm 4 gives the capability-chain check performed when the selected policy requires delegation-aware authorization evidence.

Algorithm 4 Capability-chain verification

Require: Delegation evidence C_{cap} , message commitment $h(m)$, policy profile P

Ensure: Valid delegation evidence or failure

- 1: Check actor-target consistency across delegation links
 - 2: Check audience progression and parent-link consistency
 - 3: Check scope and constraint consistency
 - 4: Check temporal validity of delegation artifacts
 - 5: Check message binding to the delegation context when required
 - 6: Verify signatures or authenticators on delegation artifacts
 - 7: **if** all required checks succeed **then**
 - 8: **return** valid delegation evidence
 - 9: **else**
 - 10: **return** failure
 - 11: **end if**
-

Delegation-aware authorization evidence supports authorization-related claims under the selected policy. It shows whether the message event satisfied the required capability and workflow predicates. Log commitment, receipt, and workflow-completion claims remain separate evidence checks.

Figure 4 shows the policy-controlled checks used by the fully enabled verifier profile and the single-control policy comparison. In the figure, EPOCH/WCL denotes the checkpoint-context anchoring control implemented using preserved WCL/checkpoint-context material. These policy-controlled checks are evaluated only when required by the active verifier profile and strengthen different parts of the preserved evidence chain. In the single-control comparison, disabling one control removes only that policy-controlled check. The core payload-binding, sender-authentication, inclusion-verification, and signed-checkpoint checks remain enabled.

6. Acceptance Semantics and Bounded Claims

Section 5 described the offline verifier. This section defines the verifier-side meaning of **ACCEPT**. The decision is policy-relative and evidence-relative: it records that the preserved bundle satisfies the selected policy, not a general guarantee about delivery, endpoint execution, or workflow correctness.

The statements below define verifier-side semantics, not cryptographic reduction proofs for the full runtime system.

We use the notation from Section 3.3. Let $\mathcal{B}$ be the preserved evidence bundle for one message event, and let P be the selected policy profile. Let $CP(P)$ be the set of verification predicates required under P . When the policy is clear, we write CP .

We use φ for verifier predicates to distinguish them from proof artifacts such as π_{incl} and π_{ext} . The verifier predicates considered in this paper are

$$\Phi = \{\varphi_{fmt}, \varphi_{hash}, \varphi_{sig}, \varphi_{incl}, \varphi_{sth}, \varphi_{wit}, \varphi_{ctx}, \varphi_{aoep}, \varphi_{cap}, \varphi_{rcpt}\}. \quad (1)$$

These predicates correspond to bundle format validity, payload-hash binding, sender-authenticated message binding, Merkle inclusion verification, signed-checkpoint verification, witness-backed checkpoint validation, checkpoint-context validation, append-only extension validation, capability and workflow validation, and explicit signed-receipt validation.

A policy profile selects the predicates required for acceptance:

$$CP(P) \subseteq \Phi. \quad (2)$$

All verifier profiles require the following core predicates:

$$CP_{core} = \{\varphi_{fmt}, \varphi_{hash}, \varphi_{sig}, \varphi_{incl}, \varphi_{sth}\} \subseteq CP(P). \quad (3)$$

Thus, authenticated log commitment is checked through both inclusion verification and signed-checkpoint verification. Stronger profiles may also require witness evidence, checkpoint-context evidence, AOEP continuity evidence, capability/workflow evidence, and explicit receipt evidence.

6.1. Acceptance Conditions

Definition 6.1 (Policy-relative acceptance). For an evidence bundle $\mathcal{B}$ and policy profile P , acceptance is defined as

$$\text{Accept}_P(\mathcal{B}) \iff \bigwedge_{\varphi \in CP(P)} (\varphi(\mathcal{B}) = 1). \quad (4)$$

Thus, $\mathcal{B}$ is accepted only if every mandatory and policy-required predicate succeeds.

If any required predicate fails, the verifier returns **REJECT**. Acceptance is therefore policy-relative. A weaker policy may accept a bundle that a stronger policy rejects. This means only that the weaker policy required fewer evidence checks.

The preserved message commitment is represented as

$$h(m) = H(m), \quad (5)$$

where m is the preserved canonical message representation and $H(\cdot)$ is the hash or commitment function.

An authenticated checkpoint is represented abstractly as a signed tree head:

$$\sigma_L = \text{Sign}_L(r \parallel t \parallel \tau), \quad \text{STH} = (r, t, \tau, \sigma_L), \quad (6)$$

where r is the authenticated root, t is the tree size or checkpoint index, τ is the checkpoint context, and σ_L is the log signature. This is a semantic representation. It does not prescribe a byte layout.

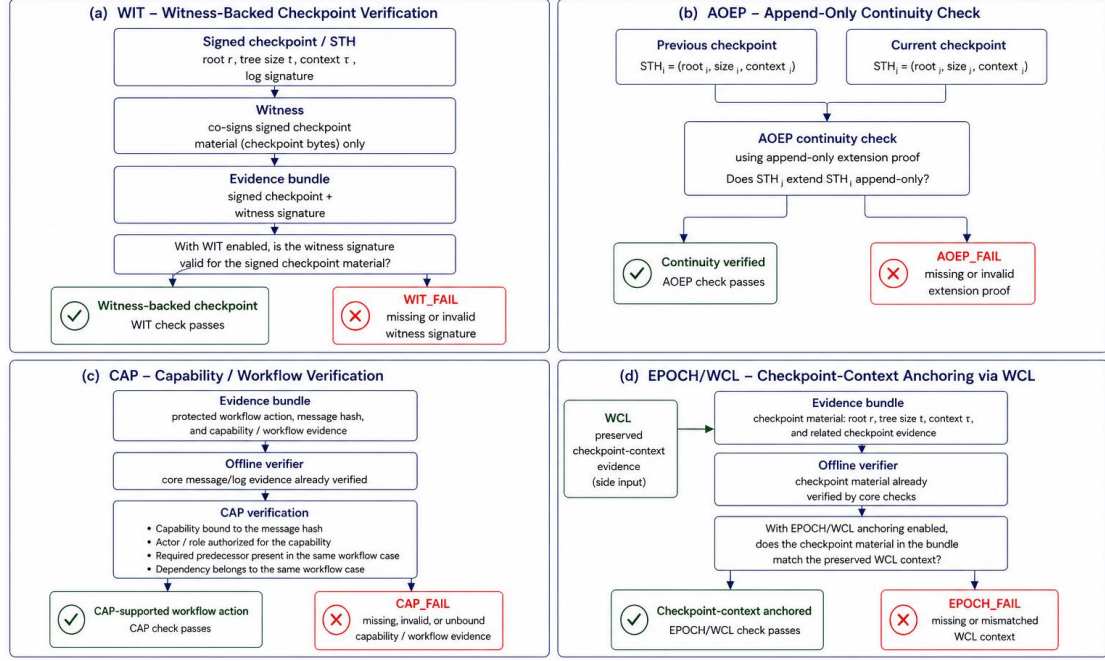


Figure 4: Policy-controlled evidence checks used by the fully enabled verifier profile and the single-control policy comparison.

6.2. Claim Support

Acceptance and claim support are different. A bundle may be accepted under a policy, but it supports only the claims justified by the predicates required by that policy.

Let Claim be the set of evidence-level claims considered by the verifier. For each claim $c \in \text{Claim}$, let $\text{Req}(c) \subseteq \Phi$ be the predicates required to support that claim.

Definition 6.2 (Policy-relative claim support). A bundle $\mathcal{B}$ supports claim c under policy P only if all predicates required for c are required by P and succeed on $\mathcal{B}$:

$$\text{Supports}_P(\mathcal{B}, c) \iff \text{Req}(c) \subseteq CP(P) \wedge \bigwedge_{\varphi \in \text{Req}(c)} (\varphi(\mathcal{B}) = 1). \quad (7)$$

For an authenticated logged-message claim, the required predicates are

$$\text{Req}(c_{\text{logged_msg}}) = \{\varphi_{\text{fmt}}, \varphi_{\text{hash}}, \varphi_{\text{sig}}, \varphi_{\text{incl}}, \varphi_{\text{sth}}\}. \quad (8)$$

This claim means that the preserved message is bound to sender-authentication evidence and to an authenticated log checkpoint. It does not imply delivery, receiver acknowledgment, endpoint execution, or workflow completion.

A receipt claim requires explicit receiver-signed receipt evidence:

$$\text{Req}(c_{\text{receipt}}) = \{\varphi_{\text{fmt}}, \varphi_{\text{hash}}, \varphi_{\text{sig}}, \varphi_{\text{incl}}, \varphi_{\text{sth}}, \varphi_{\text{rept}}\}. \quad (9)$$

Thus, transport behavior, HTTP status codes, forwarding, storage, log inclusion, checkpoint validity, witness evidence, AOEP continuity, or capability evidence cannot replace φ_{rept} .

Definition 6.3 (Explicit receipt predicate). When evaluated, the predicate $\varphi_{\text{rept}}(\mathcal{B})$ evaluates to 1 only if $\mathcal{B}$ contains an explicit

receiver-signed receipt object and that object verifies under the applicable receiver key, message commitment, and policy context. Otherwise,

$$\varphi_{\text{rept}}(\mathcal{B}) = 0. \quad (10)$$

6.3. Bounded Interpretation of ACCEPT

Proposition 6.1 (Bounded interpretation of ACCEPT). *If $\text{Accept}_P(\mathcal{B})$ holds, then every predicate in $CP(P)$ has succeeded for $\mathcal{B}$. The accepted bundle supports only the evidence-level claims whose required predicates are included in $CP(P)$ and have succeeded on $\mathcal{B}$. No stronger claim follows from ACCEPT alone.*

Proof. By Definition 6.1, $\text{Accept}_P(\mathcal{B})$ means that all predicates in $CP(P)$ evaluate to 1. By Definition 6.2, a claim c is supported only when $\text{Req}(c) \subseteq CP(P)$ and all predicates in $\text{Req}(c)$ evaluate to 1. Therefore, acceptance supports only the claims whose required predicates are satisfied under the selected policy. Claims requiring predicates outside $CP(P)$ do not follow from ACCEPT.

Proposition 6.2 (Policy monotonicity under fixed predicate semantics). *Let P_1 and P_2 be two policy profiles evaluated with the same bundle representation, trust anchors, verification keys, verifier inputs, and predicate definitions. If*

$$CP(P_1) \subseteq CP(P_2), \quad (11)$$

then, for any evidence bundle $\mathcal{B}$,

$$\text{Accept}_{P_2}(\mathcal{B}) \Rightarrow \text{Accept}_{P_1}(\mathcal{B}). \quad (12)$$

The converse does not necessarily hold.

Proof. If $\text{Accept}_{P_2}(\mathcal{B})$ holds, then every predicate in $CP(P_2)$ succeeds. Since $CP(P_1) \subseteq CP(P_2)$, every predicate required by P_1 also succeeds. Therefore, $\text{Accept}_{P_1}(\mathcal{B})$ holds. The converse may fail because P_2 may require additional predicates.

This monotonicity statement applies only when one policy strengthens another by adding predicates. It does not apply if the policies use different trust anchors, freshness rules, key-resolution rules, predicate definitions, or external verifier context.

6.4. Corollary and Interpretation

Corollary 6.1. *Let $\mathcal{B}$ be evaluated under policy profile P . If $\varphi_{\text{rcpt}} \notin CP(P)$ or $\varphi_{\text{rcpt}}(\mathcal{B}) = 0$, then $\mathcal{B}$ does not support a receipt claim under P :*

$$\neg \text{Supports}_P(\mathcal{B}, c_{\text{receipt}}). \quad (13)$$

Proof. By Equation 9, a receipt claim requires φ_{rcpt} . By Definition 6.2, the claim is supported only if all required predicates are required by P and succeed on $\mathcal{B}$. Therefore, if φ_{rcpt} is not required by P , or if it evaluates to 0, the receipt claim is unsupported.

Thus, receipt cannot be claimed from transport behavior, log inclusion, checkpoint validity, witness evidence, AOEP continuity, checkpoint-context evidence, or capability evidence. Similarly, ACCEPT does not establish endpoint execution correctness, semantic correctness, workflow completion, universal consistency, real-time equivocation prevention, or runtime protection against LLM-specific threats.

7. Evidence-Level Security Assessment

Section 6 defined the formal acceptance and claim-support semantics. This section assesses evidence-level security threats by mapping them to the preserved evidence they may invalidate, omit, modify, or rebind. It does not provide a separate cryptographic reduction proof or a full runtime-security analysis.

7.1. Verifier-Supported Security Properties

Table 5 summarizes the verifier-supported evidence properties and the evidence required for each property. These properties are derived from preserved evidence checks under the selected policy profile.

The properties cover message binding, authenticated logging, checkpoint reasoning, and delegation-aware authorization. Explicit receipt semantics are handled separately because a receipt claim requires a preserved and valid receiver-signed receipt object.

The distinction among P3, P4, and P6 is deliberate. P3 concerns append-only extension between authenticated checkpoints. P4 concerns witness-contributed checkpoint evidence. P6 concerns contextual anchoring of checkpoint material under the selected policy.

The properties in Table 5 should be read together with the acceptance semantics in Section 6.

7.2. Evidence-Level Security Threats and Mapping

Table 6 links each evidence-level security threat to the affected evidence class and the corresponding verifier-supported property. The mapping is evidence-level rather than deployment-wide: it shows how identity spoofing, log tampering, rebinding, repudiation, tampering or omission, and unauthorized delegation may affect the evidence checked by the verifier.

This assessment is narrower than a full runtime threat inventory. It explains which preserved evidence may be invalidated, omitted, modified, or rebound by each evidence-level threat, and which verifier-supported property would be affected. The mapping also provides the basis for the targeted negative-evidence cases evaluated later.

8. Evaluation

8.1. Evaluation Scope and Methodology

Table 7 summarizes the evaluation design. The performance part of the evaluation measures offline verifier-side latency, and the diagnostic part measures rejection behavior over preserved evidence bundles. It does not measure memory utilization, network delay, delivery, runtime LLM safety, end-to-end orchestration, or workflow throughput. The three experiments separate verifier-side latency attribution, workflow-event evidence requirements, and diagnostic rejection behavior.

The evaluated workflow contains four event types: `refer_patient`, `order_mri`, `send_result`, and `submit_claim`. These are the same four events introduced earlier in the running cross-organization healthcare scenario shown in Figure 2. Briefly, the general practitioner (GP) refers the patient to the consultant, the consultant requests the MRI, the lab or imaging provider returns the result, and a follow-up claim action is submitted to the insurer. The labels are used as a running example. Verification uses preserved evidence bundles and does not depend on healthcare-specific semantics.

Each workflow case was generated as a sequence of four signed agent-to-agent message events with distinct case identifiers, actor identifiers, event timestamps, message commitments, authenticated logging artifacts, and policy-required evidence references. The 300 cases use the same workflow structure but differ in these generated identifiers and preserved evidence artifacts. Across these cases, we generated 1200 valid preserved evidence bundles. In addition to the core verifier checks, the fully enabled profile requires witness validation, AOEP continuity validation, delegation/workflow checks, and checkpoint-context anchoring.

8.2. Experimental Environment

All timing results report offline verifier-side processing over preserved evidence bundles. They exclude application start-up time, manual inspection, agent execution, and artifact-generation steps not executed by the offline verifier. The prototype was evaluated on a Microsoft Surface Laptop Studio 2

Table 5: Verifier-supported security properties and required evidence.

ID	Property	Required evidence and scope
P1	Authenticated log commitment	Inclusion proof and signed checkpoint; verified checkpoint only.
P2	Sender-authenticated message binding	Sender-authenticated message fields and payload-to-log binding evidence.
P3	Append-only continuity	Prior-checkpoint context and append-only extension evidence; policy-enabled.
P4	Witness-backed checkpoint validity	Witness evidence; does not imply receipt, delivery, or real-time equivocation prevention.
P5	Capability and policy-required workflow checks	Delegation-aware authorization evidence and required workflow evidence.
P6	Checkpoint-context validation	Checkpoint-context evidence and permitted WCL context; policy-enabled.

Table 6: Evidence-level security threats mapped to verifier-supported properties.

ID	Security threat	Affected evidence	Evidence issue	Props.
T1	Identity spoofing	Signed-message submission	False or impersonated sender identity.	P2
T2	Log tampering	Log evidence	Inclusion proof, signed checkpoint, or log material modified.	P1
T3	Rebinding	Payload-to-log binding	Commitment, leaf index, or Merkle path modified or rebound.	P1, P2
T4	Repudiation	Sender evidence	Sender denies authorship despite preserved sender authentication.	P2
T5	Tampering or omission	Witness/AOEP/context	Required evidence missing or modified.	P3, P4, P6
T6	Unauthorized delegation	Workflow/delegation	Capability or workflow evidence forged, rebound, or missing.	P5

Table 7: Evaluation design and claim-matched purpose of each experiment.

Exp.	Evaluation question	Method	Interpretation
E1	Which policy checks add verifier time?	Single-control comparison over valid <code>submit_claim</code> bundles.	Latency attribution relative to the <code>ALL_ON</code> baseline.
E2	Does latency vary by event evidence?	Paired comparison across the four workflow events.	Event-level evidence analysis, not throughput benchmarking.
E3	Does invalid or policy-insufficient evidence fail at the expected check?	Targeted negative-evidence cases mapped to checks, threats, and properties.	Diagnostic rejection coverage, not exhaustive adversarial search.

running Windows 11 Home version 10.0.26200, with an Intel Core i7-13700H processor, 14 cores, 20 logical processors, 32 GB RAM, and Python 3.9.13 in a virtual environment. All measurements were collected in controlled local execution on an x64/AMD64 architecture. The verifier and evaluation scripts were implemented in Python using standard cryptographic, web, and statistical-analysis libraries.

8.3. Statistical Treatment

Verifier-side latency is measured from the start of parsing and checking a preserved evidence bundle to the production of the final `ACCEPT/REJECT` decision. For negative-evidence cases, the interval ends at the first-failing verifier check. We report medians and P95 values because this latency may have a tail. The median gives the typical verifier-side latency, and P95 captures higher-latency behavior relevant to deployment. For workflow-event medians, 95% bootstrap confidence intervals are reported in Figure 5 to show the stability of the median estimates without relying on a parametric normality assumption.

Workflow-event measurements are paired because each complete workflow case contributes one observation for each event type. We therefore use the Friedman test for the repeated-measures comparison, Kendall’s *W* for effect size, and Wilcoxon signed-rank tests with Holm correction for post-hoc comparisons. The negative-evidence suite is treated diagnostically because its purpose is to test rejection behavior rather than latency differences.

8.4. Policy-Level Latency–Assurance Trade-off

Experiment E1 evaluates verifier-side latency attribution for policy-controlled evidence requirements. The comparison fixes the `submit_claim` event because this event exercises the richest accountability path in the implemented workflow: prior-event dependency, delegation-aware capability evidence, witness-backed checkpoint evidence, AOEP continuity, and checkpoint-context anchoring.

Table 8 reports a single-control policy comparison. Each comparison disables one policy-controlled verifier control while keeping the same corpus and timing procedure. The purpose is to attribute verifier-side latency to policy-controlled checks relative to the `ALL_ON` baseline within the same experiment. It is not intended to compare absolute latency values with the workflow-event analysis in E2. Accordingly, E1 and E2 answer different timing questions. E1 is a single-control policy comparison using `submit_claim` bundles, whereas E2 is a paired event-type comparison within complete workflow cases.

All 300 valid `submit_claim` bundles were accepted under each tested profile in Experiment E1. The `ALL_ON` profile serves as the within-experiment baseline for this single-control policy comparison. Across the E1 profiles, median verifier-side latency ranges from 183.04 ms under `NO_EPOCH` to 785.52 ms under `ALL_ON`. Disabling checkpoint-context anchoring produced the largest median reduction, 76.7% relative to `ALL_ON`. The remaining single-control comparison profiles produced smaller latency reductions.

These reductions should not be interpreted as recommendations to disable verifier controls. Each disabled con-

Table 8: Experiment E1 within-experiment verifier-side latency attribution under single-control policy comparisons for valid `submit_claim` bundles ($n = 300$ per profile).

Profile	Disabled verifier control	Median [95% CI] (ms)	P95 (ms)	Reduction vs. ALL_ON
ALL_ON	None	785.52 [774.38–799.62]	1064.33	–
NO_WIT	Witness validation	745.60 [738.85–755.89]	954.92	5.1%
NO_AOEP	AOEP continuity	761.93 [754.90–772.95]	1063.04	3.0%
NO_CAP	Capability/workflow check	761.82 [751.83–775.11]	1027.94	3.0%
NO_EPOCH	Checkpoint-context anchoring	183.04 [174.52–200.43]	417.64	76.7%

trol weakens a specific assurance component: NO_WIT removes witness-backed checkpoint validation, NO_AOEP removes append-only continuity validation, NO_CAP removes delegation and workflow-prerequisite validation, and NO_EPOCH removes checkpoint-context anchoring. The comparison therefore exposes the intended latency–assurance trade-off.

8.5. Workflow-Event Evidence Requirements

For E2, the first three event types follow the same core evidence path: signed-message validation, authenticated logging, signed-checkpoint evidence, and preserved bundle checking. The `submit_claim` event follows the same path but also requires prior-event evidence from `send_result` and delegation/workflow-prerequisite evidence. This difference explains the event-level comparison in Figure 5.

Experiment E2 evaluates whether verifier-side latency changes with the evidence required by each workflow event. Figure 5 summarizes median latency, 95% bootstrap confidence intervals, P95 latency, and median-to-P95 spans for the four workflow event types under the fully enabled policy profile. This comparison is interpreted as a workflow-event evidence-requirement analysis, not as a general throughput benchmark. The verifier is not simply checking a message signature. Depending on the event, it may also validate workflow prerequisites, delegated capability evidence, append-only continuity, witness-backed checkpoint evidence, and checkpoint-context anchoring.

As shown in Figure 5, the first three event types have nearly identical median verifier-side latencies: 399.98 ms for `refer_patient`, 400.37 ms for `order_mri`, and 401.13 ms for `send_result`. In contrast, `submit_claim` requires a higher median latency of 680.21 ms. Its P95 latency is also higher at 712.70 ms, compared with 429.83–434.84 ms for the other three event types. The Friedman test indicates a statistically significant event-type effect ($\chi^2 = 536.740$, $p = 5.20 \times 10^{-116}$), with Kendall’s $W = 0.596$. Holm-corrected Wilcoxon signed-rank tests show that `submit_claim` differs significantly from each of the other event types, while the first three event types are not significantly separated.

This behavior follows the evidence distinction stated before Figure 5: `submit_claim` adds prior-event and delegation/workflow-prerequisite checks beyond the core evidence path. Therefore, the event-type study identifies where additional verifier-side latency is introduced.

8.6. Negative-Evidence Diagnostic Coverage

Experiment E3 focuses on rejection behavior, not latency comparison. Each case introduces one targeted evidence cor-

ruption or workflow misuse operation.

Table 9 maps each case to the verifier check expected to fail first, the corresponding evidence-level security threat, and the verifier-supported property.

Each negative-evidence case was generated from an otherwise valid evidence bundle by applying one targeted mutation or misuse operation. The cases are not intended to be mutually exclusive attack classes. Each case is designed to exercise a specific verifier predicate and confirm rejection at the expected first-failing check.

Across the 17-case diagnostic suite, every manipulated bundle or bundle not allowed by the selected policy was rejected, and no false acceptance was observed. The cases cover all verifier predicate classes exercised by the evaluated fully enabled profile, including payload binding, sender authentication, Merkle inclusion, signed-checkpoint validation, witness validation, AOEP continuity, capability binding, workflow prerequisites, and checkpoint-context anchoring. These results support the claim that offline verification enforces evidence sufficiency under the selected policy, rather than merely returning a generic binary decision. The first-failing check also provides a structured diagnostic signal for interpreting why the preserved bundle is insufficient under the selected policy.

9. Discussion

9.1. Interpretation of Results

The results answer the research question within the paper’s stated limits. They show that message-level evidence can be extended to workflow-event evidence in agent-to-agent workflows. This extension is policy-controlled: the offline verifier returns `ACCEPT` for a workflow-event bundle only when the preserved evidence satisfies the selected policy profile. The main result is not that every operational fact about a workflow action is confirmed. Instead, `ACCEPT` has a bounded and policy-relative meaning. Sender signatures support authorship. Log evidence supports authenticated commitment. Receiver-signed receipts support only a receipt claim when present and required. Capability evidence supports delegation-aware authorization.

Experiment E1 shows a measurable latency–assurance trade-off. The single-control comparison results should be read as within-experiment latency attribution: they identify which policy-controlled checks contribute most to verifier-side latency relative to the ALL_ON baseline. In the current prototype, checkpoint-context anchoring contributes most to verification time. This higher latency is likely caused by the extra

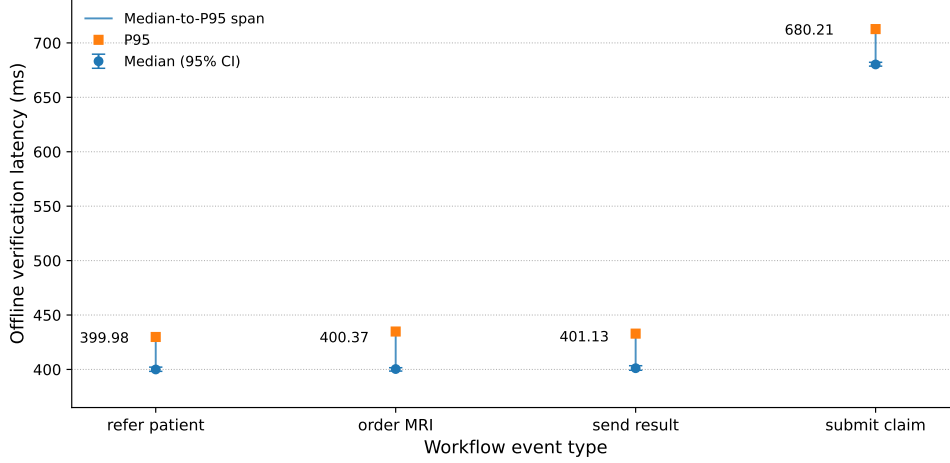


Figure 5: Offline verification latency across workflow event types under the fully enabled verifier profile ($n = 300$ paired workflows). Circles show median latency with 95% bootstrap confidence intervals, square markers show P95 latency, and vertical spans show the median-to-P95 range. The y-axis uses a truncated lower bound for readability. The `submit_claim` event requires the most verification time because it exercises the richest workflow-accountability path.

Table 9: Negative-evidence cases mapped to evidence-level security threats and verifier-supported properties.

Case	Verifier check	Threat ID	Property	Mutation or misuse
C1	Payload binding	T3	P2	Canonical payload modified after issuance.
C2	Merkle inclusion	T3	P1	Audit-path sibling hash replaced.
C3	Merkle inclusion	T3	P1	Leaf index modified while preserving the bundle structure.
C4	Signed checkpoint validation	T2	P1	Signed checkpoint root modified.
C5	Append-only continuity	T5	P3	AOEP proof element modified between checkpoints.
C6	Capability binding	T6	P5	Capability scope modified.
C7	Capability binding	T6	P5	Capability evidence rebound to another message commitment.
C8	Witness validation	T5	P4	Witness signature over checkpoint material modified.
C9	Workflow prerequisite omission	T6	P5	Prior bundle for <code>submit_claim</code> removed.
C10	Workflow prerequisite misbinding	T6	P5	Prior <code>send_result</code> replaced by another event type.
C11	Workflow prerequisite misbinding	T6	P5	Prior bundle from another workflow case used.
C12	Workflow prerequisite misbinding	T6	P5	Prior bundle from another examination/resource identifier used.
C13	Witness-evidence omission	T5	P4	Required witness evidence removed.
C14	Checkpoint-context anchoring	T5	P6	WCL/checkpoint-context material for checkpoint anchoring corrupted.
C15	Signed checkpoint validation	T2	P1	Previous checkpoint signature modified.
C16	Append-only continuity	T5	P3	AOEP extension-size relation modified.
C17	Sender authentication	T1	P2	Sender signature over canonical message corrupted.

Note: T_i refers to the evidence-level security threat in Table 6, and P_i refers to the verifier-supported property in Table 5.

work needed to parse and match WCL/checkpoint-context material, resolve checkpoint-context references, and validate the preserved context against the current evidence bundle. This does not weaken the value of checkpoint-context anchoring. It identifies the main optimization target when stronger offline assurance is required at scale. Possible optimizations include indexing WCL entries by checkpoint identifier, caching already verified checkpoint contexts, pre-validating WCL material, and compacting context records.

Experiment E2 shows that verifier-side latency depends on the evidence required by the workflow event. The first three events, `refer_patient`, `order_mri`, and `send_result`, have similar latency because they follow the same core evidence path: sender-authenticated message checking, payload binding, authenticated logging, inclusion verification, and signed-checkpoint validation. By contrast, `submit_claim` adds prior-event dependency checking against `send_result` and delegation/workflow evidence. Therefore, the verifier must process

additional evidence before accepting the corresponding claim. This explains why `submit_claim` requires more verification time, while the other three events remain close to core logged-message verification under the implemented policy.

Experiment E3 shows that the rejection reason is also important. A rejected bundle provides more than a binary outcome. It also points to the verifier check that failed first. This supports audit and dispute resolution because the result includes both a policy-relative decision and a structured rejection reason. A failed Merkle-inclusion check indicates that the presented message commitment is not authenticated by the supplied checkpoint. A failed witness check means that the checkpoint lacks the required witness support. A failed workflow-prerequisite check means that required prior workflow evidence is absent or incorrectly bound.

Together, these results show that the central design choice is not simply whether evidence can be verified offline, but which evidence classes should be required for the dispute being re-

viewed. The verifier makes an evidence-sufficiency decision: it determines whether the preserved bundle satisfies the selected policy profile and whether the reviewed evidence-level claim is supported by the required preserved evidence.

This distinction matters in dispute-specific review. In an authorship or repudiation dispute, the relevant evidence would normally be sender-authentication evidence, payload binding, and authenticated log commitment. In a receipt dispute, the verifier must require an explicit receiver-signed receipt object, because receipt is not supported by log inclusion, storage, or transport behavior alone. In a delegation dispute, the relevant evidence is the capability chain and any policy-required workflow evidence showing that the actor was authorized to act on behalf of another actor. In a workflow-prerequisite dispute, such as whether a `submit_claim` event was properly supported by a prior `send_result`, the verifier checks the preserved prior-event evidence and its binding to the current bundle. If the dispute concerns checkpoint continuity or checkpoint context, the profile should require the corresponding AOEP, witness-backed checkpoint evidence, or WCL/checkpoint-context material.

This interpretation connects the evaluation results to practical policy selection. Latency alone should not determine the verifier profile. A lighter profile may be sufficient for authorship and authenticated log-commitment disputes, while a stronger profile is justified when the dispute concerns receipt, delegated authority, checkpoint continuity, checkpoint context, or workflow prerequisites. The evidence bundle therefore provides a structured basis for dispute-specific accountability. When the required evidence validates, it identifies which evidence-level claim is supported. When a bundle is rejected, it identifies which required evidence is missing or invalid. In both cases, it helps prevent stronger claims from being inferred from the preserved artifacts.

9.2. Limitations and Threats to Validity

Several limitations qualify the interpretation of the results. First, the reported timings are verifier-side prototype measurements rather than production measurements. They show feasibility and relative latency attribution in the evaluated implementation, but they should not be treated as universal runtime constants. Larger deployments, multi-host execution, concurrent agents, different storage backends, and longer checkpoint histories may change the absolute latency. The current evaluation also does not measure operational deployment factors such as network delay, organizational key-management processes, or independent witness availability.

A second limitation is that the timing experiments answer different questions. The single-control policy comparison attributes verifier-side latency to policy-controlled verifier checks relative to its own `ALL_ON` baseline. The workflow-event analysis compares event types within complete workflow cases. For this reason, absolute latency values should be read within that analysis, not as a universal runtime benchmark.

A third limitation concerns checkpoint-context anchoring. Its verification time reflects both the role of this evidence and the current prototype implementation choices. The result identifies where verifier-side latency is introduced. It does not

show that checkpoint-context validation is inherently expensive. The optimization directions discussed above, such as indexing, caching, and pre-validating WCL material, should therefore be evaluated in larger implementations.

Fourth, the workflow evaluation uses a fixed four-step workflow. This setup is sufficient to compare simple message events with a dependency- and delegation-heavy event. However, it does not establish performance or coverage for all possible workflows. Longer traces, branching dependencies, multiple delegation hops, and cross-case policy dependencies require further evaluation.

Fifth, the negative-evidence suite is diagnostic rather than exhaustive. It uses targeted mutations to exercise known verifier predicates. It is not exhaustive fuzzing or adaptive adversarial search over malformed bundles. It also does not cover all deployment failures. Endpoint compromise, key compromise, collusion, and semantic errors in agent decisions remain outside the framework guarantees.

Finally, the framework evaluates preserved evidence only when such evidence is available. If no preserved bundle is available, the verifier cannot support the corresponding evidence-level claim. Absence of a bundle is not treated as proof of the underlying workflow fact.

10. Conclusion and Future Work

10.1. Conclusion

This paper introduced a preserved evidence-bundle framework for offline-verifiable accountability in cross-organization agent messaging. The framework extends message-level authorship and log-inclusion evidence for agent-to-agent workflows into policy-controlled workflow-event accountability. Its central contribution is a policy-controlled offline verifier in which `ACCEPT` supports only the evidence-level claims justified by the preserved evidence required under the selected policy.

The evaluation shows that the approach is feasible within these bounded claim semantics. Stronger verifier profiles introduce additional verifier-side latency, and `submit_claim` requires more verification time because it carries delegation and workflow-prerequisite evidence. The negative-evidence cases further show that manipulated bundles or bundles not allowed by the selected policy are rejected under the intended checks.

10.2. Future Work

Future work will first evaluate the prototype in larger multi-host deployments with concurrent agents and longer checkpoint histories. We will then optimize checkpoint-context and WCL validation to reduce verifier-side latency. We also plan to study longer workflows with branching dependencies and multi-hop delegation across organizations. Finally, we will investigate reduced-disclosure evidence views that preserve offline verifiability while exposing less workflow information to external verifiers.

References

- [1] T. T. H. Nguyen, H. Fournier, P. Jackson, M. Itoh, S. Freeman, R. Richard, H. Cao, Position: Multi-Agent Algorithmic Care Systems Demand Contestability for Trustworthy AI, 2026. URL: <http://arxiv.org/abs/2603.20595>. doi:10.48550/arXiv.2603.20595, arXiv:2603.20595 [cs].
- [2] B. Lange, G. Keeling, A. Manzini, A. McCroskery, We need accountability in human–AI agent relationships, *npj Artificial Intelligence* 1 (2025) 38. URL: <https://www.nature.com/articles/s44387-025-00041-7>. doi:10.1038/s44387-025-00041-7.
- [3] Z. Lin, S. Zhang, G. Liao, D. Tao, T. Wang, Binding Agent ID: Unleashing the Power of AI Agents with accountability and credibility, 2025. URL: <http://arxiv.org/abs/2512.17538>. doi:10.48550/arXiv.2512.17538, arXiv:2512.17538 [cs].
- [4] A. K. Jakhar, M. Singh, R. Sharma, W. Viriyasitavat, G. Dhiman, S. Goel, A blockchain-based privacy-preserving and access-control framework for electronic health records management, *Multimedia Tools and Applications* 83 (2024) 84195–84229. URL: <https://link.springer.com/article/10.1007/s11042-024-18827-3>. doi:10.1007/s11042-024-18827-3.
- [5] A. Alshammari, D. G. Miandoab, S. Assiri, B. Cambou, B. Riggs, Efficient Medical File Protection via Adaptive CRP-based Ephemeral Key Encapsulation and Robust Error Correction, in: 2025 IEEE 15th Annual Computing and Communication Workshop and Conference (CCWC), 2025, pp. 983–988. URL: <https://ieeexplore.ieee.org/document/10903918>. doi:10.1109/CCWC62904.2025.10903918.
- [6] B. G. Collaco, S. A. Haider, S. Prabha, C. A. Gomez-Cabello, A. Genovese, N. G. Wood, S. P. Bagaria, N. Gopala, C. Tao, A. J. Forte, The role of agentic artificial intelligence in healthcare: a scoping review, *npj Digital Medicine* 9 (2026) 345. URL: <https://www.nature.com/articles/s41746-026-02517-5>. doi:10.1038/s41746-026-02517-5.
- [7] L. Zhao, S. Liu, T. Xin, J. Tan, X. Wang, Y. Li, Z. Bian, Y. Chen, F. Kong, J. Bian, C. Qian, Z. Zhang, AI agent in healthcare: applications, evaluations, and future directions, *npj Artificial Intelligence* 2 (2026) 31. URL: <https://www.nature.com/articles/s44387-026-00076-4>. doi:10.1038/s44387-026-00076-4.
- [8] X. Zheng, H. Zou, L. Wu, P. Dong, W. Yuan, Y. Chen, Large language model-driven agents in nursing practice: A scoping review, *International Journal of Nursing Sciences* 12 (2025) 532–540. URL: <https://www.sciencedirect.com/science/article/pii/S2352013225001309>. doi:10.1016/j.ijnss.2025.10.007.
- [9] D. B. Acharya, K. Kuppan, B. Divya, Agentic AI: Autonomous Intelligence for Complex Goals—A Comprehensive Survey, *IEEE Access* 13 (2025) 18912–18936. URL: <https://ieeexplore.ieee.org/document/10849561>. doi:10.1109/ACCESS.2025.3532853.
- [10] C. Yu, Z. Cheng, H. Cui, Y. Gao, Z. Luo, Y. Wang, H. Zheng, Y. Zhao, A Survey on Agent Workflow – Status and Future, in: 2025 8th International Conference on Artificial Intelligence and Big Data (ICAIBD), 2025, pp. 770–781. URL: <https://ieeexplore.ieee.org/document/11082076>. doi:10.1109/ICAIBD64986.2025.11082076, ISSN: 2769-3554.
- [11] Cloud Security Alliance, More Than Half of Organizations Experience AI Agent Scope Violations, Cloud Security Alliance Study Finds, 2026. URL: <https://cloudsecurityalliance.org/press-releases/2026/04/16/more-than-half-of-organizations-experience-ai-agent-scope-violations-cloud-security-alliance-study-finds>.
- [12] M. Q. Li, B. C. M. Fung, Security concerns for Large Language Models: A survey, *Journal of Information Security and Applications* 95 (2025) 104284. URL: <https://www.sciencedirect.com/science/article/pii/S2214212625003217>. doi:10.1016/j.jisa.2025.104284.
- [13] S. Stamnes Karlsen, M. M. Yamin, E. Hashmi, B. Katt, M. Ullah, Securing large language models: A quantitative assurance framework approach, *Journal of Information Security and Applications* 97 (2026) 104351. URL: <https://www.sciencedirect.com/science/article/pii/S2214212625003874>. doi:10.1016/j.jisa.2025.104351.
- [14] A. Dirksen, D. Klein, R. Michael, T. Stehr, K. Rieck, M. Johns, LogPicker: Strengthening Certificate Transparency Against Covert Adversaries, *Proceedings on Privacy Enhancing Technologies* (2021) 184–202. URL: <https://petsymposium.org/popets/2021/popets-2021-0066.php>. doi:10.2478/popets-2021-0066.
- [15] H. Malvai, L. Kokoris-Kogias, A. Sonnino, E. Ghosh, E. Oztürk, K. Lewi, S. Lawlor, Parakeet: Practical Key Transparency for End-to-End Encrypted Messaging, in: *Proceedings 2023 Network and Distributed System Security Symposium*, Internet Society, San Diego, CA, USA, 2023. URL: https://www.ndss-symposium.org/wp-content/uploads/2023/02/ndss2023_f545_paper.pdf. doi:10.14722/ndss.2023.24545.
- [16] L. Ferretti, F. Longo, G. Merlino, M. Colajanni, A. Puliafito, N. Tapas, Verifiable and auditable authorizations for smart industries and industrial Internet-of-Things, *Journal of Information Security and Applications* 59 (2021) 102848. URL: <https://www.sciencedirect.com/science/article/pii/S2214212621000831>. doi:10.1016/j.jisa.2021.102848.

- [17] M. Li, J. Xue, Z. Liu, Y. Suo, T. Lei, Y. Wang, DAMFSD: A decentralized authorization model with flexible and secure delegation, *Internet of Things* 27 (2024) 101317. URL: <https://www.sciencedirect.com/science/article/pii/S2542660524002580>. doi:10.1016/j.iot.2024.101317.
- [18] B. Yang, H. Hu, Delegation Security Analysis in Workflow Systems, *IEEE Transactions on Dependable and Secure Computing* 21 (2024) 229–240. URL: <https://ieeexplore.ieee.org/document/10052704>. doi:10.1109/TDSC.2023.3248602.
- [19] R. Falanji, M. Asplund, N. Carlsson, MoMEP: A formally verified protocol with modifiable signed messages, *Journal of Information Security and Applications* 98 (2026) 104378. URL: <https://www.sciencedirect.com/science/article/pii/S2214212626000086>. doi:10.1016/j.jisa.2026.104378.
- [20] A. Alshammari, S. Assiri, H. Bahsi, Authenticated and Offline-Verifiable Agent-to-Agent Messaging for LLM Agents, in: 2026 IEEE 16th Annual Computing and Communication Workshop and Conference (CCWC), 2026, pp. 1424–1430. URL: <https://ieeexplore.ieee.org/document/11393740>. doi:10.1109/CCWC67433.2026.11393740.
- [21] B. Laurie, E. Messeri, R. Stradling, Certificate Transparency Version 2.0, Request for Comments RFC 9162, Internet Engineering Task Force, 2021. URL: <https://datatracker.ietf.org/doc/rfc9162>. doi:10.17487/RFC9162.
- [22] R. Dahlberg, T. Pulls, Verifiable Light-Weight Monitoring for Certificate Transparency Logs, in: N. Gruschka (Ed.), *Secure IT Systems*, Springer International Publishing, Cham, 2018, pp. 171–183. doi:10.1007/978-3-030-03638-6_11.
- [23] R. C. Merkle, A Digital Signature Based on a Conventional Encryption Function, in: C. Pomerance (Ed.), *Advances in Cryptology — CRYPTO ’87*, Springer, Berlin, Heidelberg, 1988, pp. 369–378. doi:10.1007/3-540-48184-2_32.
- [24] Y. Hu, K. Hooshmand, H. Kalidhindi, S. J. Yang, R. A. Popa, Merkle2: A Low-Latency Transparency Log System, in: 2021 IEEE Symposium on Security and Privacy (SP), 2021, pp. 285–303. URL: <https://ieeexplore.ieee.org/document/9519459/citations>. doi:10.1109/SP40001.2021.00088, iSSN: 2375-1207.
- [25] V. Fang, E. Dauterman, A. Ravoor, A. Dewan, R. A. Popa, LegoLog: A configurable transparency log, in: 2025 IEEE 10th European Symposium on Security and Privacy (EuroS&P), 2025, pp. 1082–1103. URL: <https://ieeexplore.ieee.org/document/11129295>. doi:10.1109/EuroSP63326.2025.00066, iSSN: 2995-1356.
- [26] C. Yue, T. T. A. Dinh, Z. Xie, M. Zhang, G. Chen, B. C. Ooi, X. Xiao, GlassDB: An Efficient Verifiable Ledger Database System Through Transparency, *Proceedings of the VLDB Endowment* 16 (2023) 1359–1371. URL: <https://dl.acm.org/doi/10.14778/3583140.3583152>. doi:10.14778/3583140.3583152.
- [27] M. Repetto, Cybersecurity Digital Twins: Concept, blueprint, and challenges for multi-ownership digital service chains, *Journal of Information Security and Applications* 96 (2026) 104299. URL: <https://www.sciencedirect.com/science/article/pii/S2214212625003369>. doi:10.1016/j.jisa.2025.104299.
- [28] R. Küsters, T. Truderung, A. Vogt, Accountability: definition and relationship to verifiability, in: *Proceedings of the 17th ACM conference on Computer and communications security, CCS ’10*, Association for Computing Machinery, New York, NY, USA, 2010, pp. 526–535. URL: <https://dl.acm.org/doi/10.1145/1866307.1866366>. doi:10.1145/1866307.1866366.
- [29] X. Zhu, S. Zou, G. Xu, J. Xi, Group-Capability-Based Access Control with Ring Signature, *Journal of Information Security and Applications* 90 (2025) 104014. URL: <https://www.sciencedirect.com/science/article/pii/S2214212625000523>. doi:10.1016/j.jisa.2025.104014.
- [30] S. Tegane, F. Semchedine, A. Boudries, An extended Attribute-based access control with controlled delegation in IoT, *Journal of Information Security and Applications* 76 (2023) 103473. URL: <https://www.sciencedirect.com/science/article/pii/S2214212623000571>. doi:10.1016/j.jisa.2023.103473.
- [31] H. Cheng, X. Li, H. Zhao, T. Zhou, B. Yu, N. Sheng, S-Cred: An accountable anonymous credential scheme with decentralized verification and flexible revocation, *Journal of Information Security and Applications* 82 (2024) 103735. URL: <https://www.sciencedirect.com/science/article/pii/S2214212624000383>. doi:10.1016/j.jisa.2024.103735.
- [32] Q. Hu, C. Huang, G. Zhang, L. Cai, T. Jiang, Towards accountable and privacy-preserving blockchain-based access control for data sharing, *Journal of Information Security and Applications* 85 (2024) 103866. URL: <https://www.sciencedirect.com/science/article/pii/S2214212624001686>. doi:10.1016/j.jisa.2024.103866.