

tse_tick: A Python Library for Parsing and Querying Nikkei NEEDS Tick Data from the Tokyo Stock Exchange

Kazumi Li¹ Masataka Hayashi² Teruo Nakatsuma² Peter Romero³

¹Graduate School of Economics, Keio University

²Faculty of Economics, Keio University

³Psychometrics Centre, University of Cambridge

Corresponding author: kaiwenli@keio.jp

Abstract

Tick-level trade-and-quote data for the Tokyo Stock Exchange is distributed through the Nikkei NEEDS service as thousands of zipped CSV archives spanning four data types with era-dependent schemas and Japanese-language layouts. We present **tse_tick**, an open-source Python library that converts these raw archives into clean, typed Polars DataFrames and a Hive-partitioned Parquet store queryable through DuckDB. The library offers two access paths sharing one parse-and-clean core: a one-shot reader that returns a ticker- and time-filtered DataFrame directly from raw ZIP files, and a two-stage ingest-then-query pipeline with resume-safe, memory-aware parallel ingestion, part-pruning, and a materialized intra-day time key for row-group pruning. The engineering, more than the parsing, is what the library contributes: ingestion runs in per-date atomic units whose completion is recorded by coverage markers rather than inferred from file existence, writes stream in bounded morsels so that peak memory is independent of trading-day size (24.5 GB to 2.4 GB on the worst measured day), a RAM-aware process pool sizes itself to available memory, and part-pruning opens only the archive parts a ticker can occupy. Full English and Japanese column definitions ship for all four types, and a translation layer maps yfinance, Polygon, and ccxt names onto their **tse_tick** equivalents. In benchmarks on a commodity 16-thread workstation, parsing a representative 4.8-million-row archive part, one of a trading day's nine parts, is 59.8× faster than the original pandas prototype (34.3× against an engine-matched pandas baseline), and a single-ticker time-window query from the store completes roughly 410× faster than a pandas scan of the equivalent CSV. **tse_tick** is available on PyPI (`pip install tse-tick`) under the MIT license.

1 Introduction

Market-microstructure research depends on tick-level data, and for the Tokyo Stock Exchange (TSE) the standard institutional source is the Nikkei NEEDS tick archive [9]. The raw deliverable, however, is far from analysis-ready: a single year of individual-stock ticks arrives as thousands of zipped CSV files, each trading day split across numbered multi-part archives; four distinct data types share the delivery with different schemas; the schemas themselves changed between the 2016 and 2017 eras, with the 2016 index files using fixed-width rather than CSV records; and column layouts are documented in Japanese, with categorical fields encoded as numeric codes. Researchers who license the data typically re-implement the same brittle parsing, decoding, and filtering code before any economics can begin.

The cost of doing this in-house is easy to underestimate. A working parser has to encode four file codes and two schema eras, a fixed-width 2016 layout, 187 bilingual column names, and categorical fields whose meanings live in Japanese-language vendor manuals—and the mistakes surface late: the structured pre-release passes reported in Appendix A still found, in a mature

version, a full-day read that exhausted memory as an untrappable panic and a query that truncated silently at its row cap. The machine cost compounds it. The pandas prototype this library replaced needed 286s for one of a trading day’s nine parts (Section 7); at that rate a single 2017-scale year of individual-stock ticks is on the order of a week of wall-clock parsing, on an archive that has since grown from 101.9 GB to 351.9 GB a year. What `tse_tick` offers instead is convenience of a specific kind: `pip install tse-tick`, and the four types, two eras, coded fields, and Japanese layouts are already handled—in either language, behind two calls.

`tse_tick` closes this gap. It is a Python library, built on Polars [11] and Apache Arrow [1], that turns raw NEEDS archives into clean, explicitly typed DataFrames with English or Japanese column names, and—for repeated analysis—into a Hive-partitioned Parquet [2] store served by embedded DuckDB [10] SQL. Its contributions are:

- a unified parser for all four NEEDS data types and both schema eras, with automatic type and era detection from file names (Section 2);
- two access paths over one parse core—a one-shot filtered reader and a two-stage ingest-then-query pipeline—so that exploratory and production workflows use the same cleaning semantics (Section 4);
- an ingestion engine designed for commodity hardware: per-date atomic units with resume safety, morsel-bounded streaming writes whose peak memory is independent of trading-day size, RAM-aware process parallelism, and part-pruning that exploits the archive’s physical layout (Sections 4.3–4.4);
- analysis utilities for order-book features and event-window extraction, plus a translation layer that maps familiar API names from yfinance, Polygon, and ccxt onto `tse_tick` equivalents (Section 5, Appendix B);
- a reproducible benchmark suite quantifying the engine and storage choices (Section 7).

The library supports data from 2016 through 2025, requires only Python ≥ 3.9 with Polars and PyArrow (DuckDB is an optional extra), and is installed with `pip install tse-tick`. This paper describes version 0.15.1.

2 The Nikkei NEEDS Data Format

2.1 Data types and eras

NEEDS tick deliveries comprise four data types, summarized in Table 1. Individual-stock ticks (file code TICST120) are the largest by far: each trading day is split into numbered ZIP parts ordered by ascending stock code, plus a final “appendix” part, and a busy day can span dozens of parts. The other three types arrive as one monthly archive each. Raw volumes grow steadily: the individual-stock archive for 2017 totals 101.9 GB of compressed data and the 2025 archive 351.9 GB, with the largest single month (April 2025) at 42.0 GB. A complete 2016–2025 delivery of all four types is 35,080 archives and 1.725 TiB, of which the individual-stock ticks alone are 34,720 archives and 1.72 TiB—large enough that local storage, rather than parsing, is often the binding constraint on a research machine.

The schema break between eras is not cosmetic. The 2016 index-tick files use fixed-width 69-byte records with a 15-column layout, whereas the 2017-onward files are CSV with 23 raw columns; the index summary type similarly moved from a compact 2016 hybrid to an 83-column summary layout. `tse_tick` detects the type and era from the file name and routes to the appropriate parser, so user code is era-agnostic. Table 2 gives the shape of each type’s layout at a glance; complete column-level schemas for all four types, in both languages, are reproduced in Appendix C.

Table 1: The Four NEEDS Data Types Handled by `tse_tick`.

Data Type	File Code	Content	Output Fields (Raw)
<code>individual_stock</code>	TICST120	Trade-and-quote ticks per stock; ten quote levels per side	95
<code>stock_summary</code>	TICSS110	Daily per-stock summary records	82 (83)
<code>indices</code>	TICIT110	Intraday index updates	10 (23; 15 in 2016)
<code>indices_summary</code>	TICIS110	Daily index summary records	17 (83 from 2017)

Note: Field counts follow the library’s convention of reporting cleaned *output* columns, with raw parsed column counts in parentheses where they differ. In 2016 the two index types were delivered as fixed-width files under the legacy codes TICIT010 and TICIS010; from 2017 all types are CSV. The era is detected automatically from the ZIP file name.

Table 2: Schema Summary by Data Type.

Data Type (Output Fields)	Field Groups
<code>individual_stock</code> (95)	identification 6 · timestamps 5 · trade 6 · best quote, both sides 6 · depth levels 2–10, both sides 54 · limit and special quotes 12 · OVER/UNDER overflow 6
<code>stock_summary</code> (82)	identification 5 · share attributes 2 · execution-size histogram 8 · morning session 25 · afternoon session 25 · full-day aggregates 5 · quote-side execution splits 12
<code>indices</code> (10)	identification 6 · index tick fields 4
<code>indices_summary</code> (17)	identification 5 · morning session 6 · afternoon session 6

Note: Group sizes are counts of cleaned output columns and sum to each type’s field count. The ten-level quote ladder dominates the individual-stock layout, and the two summary types are session-blocked rather than time-stamped. Column-by-column definitions in both languages are in Appendix C.

2.2 Bilingual schemas and coded fields

NEEDS documents its layouts in Japanese. The library ships full English and Japanese column definitions for every type—a 187-entry mapping connects the two, e.g. *Stock Code* ↔ 銘柄コード and *Execution Price* ↔ 約定価格—and every reader accepts `language="en"` or `"jp"`. Categorical fields arrive as numeric codes and are decoded into readable labels during cleaning; for example, the volume flag decodes `"0"` → **Final** and `"128"` → **Estimated**. Time fields are normalized to fixed-width HHMMSS strings across types and eras.

3 Related Work

Tooling for reconstructing research-grade microstructure data exists for other venues. LOBSTER [3] reconstructs limit-order books from NASDAQ ITCH feeds and distributes ready-made event files widely used in the empirical literature. ArcticDB [6] provides a high-performance DataFrame store for tick data, but is agnostic to any vendor’s raw format—it solves storage, not parsing. Popular market-data client libraries such as yfinance, Polygon’s official client, and ccxt wrap vendor *APIs* rather than local file deliveries, and none understands the NEEDS layout.

Closed tooling for Japanese market data exists, but not for this deliverable. Nikkei’s own retrieval front-end over the NEEDS databases, NEEDS FinancialQUEST [8], is a browser-based download tool for fundamentals and daily price data rather than for the tick archive. On the exchange side, JPX Market Innovation & Research sells FLEX Historical packet captures of the Tokyo Stock Exchange feed and, since June 2026, a processed ten-level order-book historical

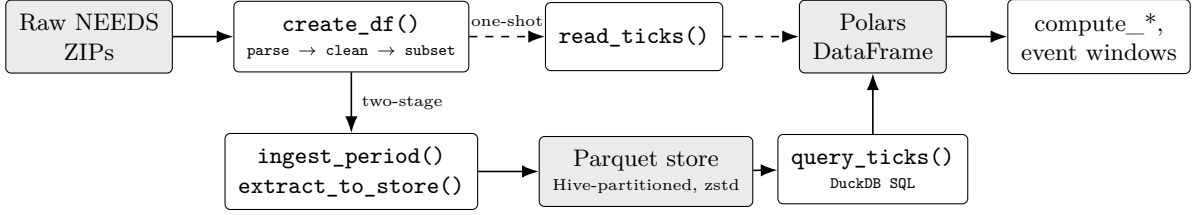


Figure 1: The two access paths of `tse_tick`. The dashed one-shot path returns a filtered DataFrame directly from raw ZIPs; the two-stage path ingests into a Hive-partitioned Parquet store served by DuckDB. Both share the same parse-and-clean core.

dataset [4]; both are commercial products built on the exchange’s own messages rather than on the NEEDS delivery. Groups that license the NEEDS tick archive are left with in-house code. `tse_tick` is, to our knowledge, the first open-source library specific to the NEEDS tick format; it complements rather than competes with the tools above, and its translation layer (Appendix B) deliberately bridges the naming conventions of those client libraries so their users can locate the equivalent `tse_tick` calls.

4 Software Architecture

4.1 Two access paths, one core

Every code path in `tse_tick` funnels through a single parse-and-clean core, exposed through two access paths (Figure 1):

1. **One-shot:** `read_ticks()` reads raw ZIPs straight into a filtered DataFrame with no intermediate store, selecting tickers, dates, and intraday time ranges through keyword filters. It caps results at 10 million rows by default (emitting a capturable `TruncationWarning`) and guards cumulative decompressed input at 5 GB, raising a catchable `OneShotMemoryError` rather than exhausting RAM.
2. **Two-stage:** the `ingest_*` family converts archives into a Hive-partitioned Parquet store once; `query_ticks` then serves repeated, sub-second filtered queries through DuckDB. `extract_to_store()` performs both stages in one call for a chosen ticker set and period.

Table 3 lists the package modules.

4.2 The parse-and-clean core

NEEDS CSV content mixes numeric fields, zero-padded codes, blank-heavy quote columns, and coded categoricals in a 95-column layout; naive type inference fails unpredictably across files. `create_df` therefore reads *every* column as a string, assigns schema names, and only then applies explicit casts in `clean_data`: integer volume and flag columns to `Int64`, price and quote-price columns to `Float64`, time strings normalized to `HHMMSS`, whitespace stripped vectorized, and categorical codes decoded in batched expressions (batching the decode gave a measured $2.15\times$ on four cores with byte-identical output). Japanese output reuses the identical pipeline: columns are renamed JP→EN internally, cleaned in English, and renamed back, so both languages share one tested code path. Cleaned frames are subset to each type’s documented output columns (Table 1).

4.3 The ingestion engine

Ingestion converts raw archives into the store in per-date atomic units: all ZIP parts of a trading day are processed together, so multi-part days can never be half-written. Resume safety is keyed per date through a coverage marker that records what the partition actually contains, rather

Table 3: Module Structure of `tse_tick`.

Module	Responsibility
<code>enhanced.py</code>	One-shot core: <code>create_df</code> , <code>read_ticks</code> , <code>discover_zips</code> , <code>parse_period</code> , ZIP-bomb guards, warning and error types
<code>core.py</code>	<code>clean_data</code> (casts and categorical decoding), 2016 fixed-width parser, tick timestamps
<code>schemas.py</code>	English and Japanese column definitions for the four types
<code>ingest.py</code>	Per-date grouped ingestion, process pool with RAM-aware worker cap, <code>extract_to_store</code>
<code>partscan.py</code>	Part-pruning: probe each part’s first stock code, open only the ticker’s run
<code>query.py</code>	DuckDB SQL over the Parquet store (optional <code>[query]</code> extra)
<code>event_window.py</code>	Event-window extraction around corporate-event timestamps
<code>features.py</code>	Order-book features: spread, depth, flow imbalance, volatility
<code>io/parquet.py</code>	Hive-partitioned Parquet read and write
<code>constants.py</code>	<code>DataType</code> / <code>Language</code> enums and type-classification sets
<code>translate.py</code>	External-name translation (yfinance / Polygon / ccxt $\rightarrow$ <code>tse_tick</code>)
<code>cli.py</code>	<code>tse-tick ingest</code> and <code>tse-tick export</code> command-line verbs

than inferring completion from file existence—a store built for ticker A must not cause a later request for ticker B to be skipped. Partition writes are atomic (hidden temporary file, then an atomic rename), and resume validates Parquet footers before trusting existing output.

For `individual_stock` days with a ticker filter of at most 64 codes, the engine streams: each part is parsed and cleaned in newline-aligned 64 MB *morsels* (in the sense of morsel-driven processing [5]) that are handed directly to a partitioned Parquet appender as row groups, so neither a part’s frame nor the day’s frame is ever materialized. Peak memory becomes independent of trading-day size: on the worst measured real day, peak ingestion memory fell from 24.52 GB to 2.40 GB (10 $\times$) with a byte-identical store. Full-frame days and the summary and index types use a concatenate path sized by a per-day estimate.

Date units are independent, so ingestion parallelizes across a `spawn`-started process pool. A RAM-aware cap bounds workers to the logical core count *and* to what fits in 70% of available memory (measured as `MemAvailable` on Linux and its Windows equivalent), with each worker’s internal Polars thread count bounded so the pool does not oversubscribe cores. Measured on the reference 16-thread machine over one month of ticker-filtered `individual_stock` ingestion (19 trading days, 4.07 million kept rows, two interleaved repetitions), the pool reaches 1.9 $\times$ at two workers and 3.3 $\times$ at four; a request for eight is clamped to five by the memory ceiling—3.0 GB per streaming worker against 70% of available RAM—and reaches 3.6 $\times$. The store is byte-identical at every worker count. Appendix A.2 reports the same shape of workload at production scale on a 36-thread host.

4.4 Part-pruning

NEEDS numbers a day’s individual-stock parts in ascending stock-code order, so any single ticker lives in a contiguous run of parts (plus the day’s final appendix part). The part scanner probes only each part’s first record, arithmetically bounds the ticker’s run, and opens just that run plus the last part—a median 6.3 $\times$ faster single-ticker read (range 1.3–25.8 $\times$) across 18 days sampled over three years, every one of them returning a frame row-for-row identical to a full scan. Whenever the ascending layout cannot be confirmed, the scanner falls back to a full scan, so pruning is never less correct than scanning. Stock codes are compared as fixed-width four-character tokens because the TSE began assigning alphanumeric codes (e.g. 162A) in 2024; on one affected 27-part day, restoring pruning cut a single-ticker read from 472 s to 13 s.

4.5 Store layout

The store is Hive-partitioned Parquet, zstd-compressed by default: tick types are laid out as `{type}/date=YYYYMMDD/ticker=CODE.parquet`, so DuckDB prunes both date and ticker partitions before touching data. The two summary types instead write one file per date with the code kept as a column: per-ticker files would explode a 15 MB month into tens of thousands of near-empty files. For the two index types the partition key is the raw numeric index code (e.g. 101), while query filters also accept display names.

Since version 0.15.0 every `individual_stock` partition also materializes an **Effective Time** key—an `Int32 HHMMSS` column resolving the trade-versus-quote timestamp choice—so time-window predicates can use Parquet row-group statistics instead of a computed expression that defeats them. Measured on a real trading day’s 2.56-million-row single-ticker partition, a one-minute slice query accelerated 7.64× and a five-minute window 5.65×, for a storage cost of +0.52%; the key is excluded from documented query output, so schemas are unchanged.

5 Query and Analysis Layer

5.1 Store queries

`query_ticks()` builds a pruned DuckDB scan over the store and returns a Polars `DataFrame`, accepting a data type, ticker, date, intraday time range, column subset, and row limit as keyword filters. DuckDB is an optional dependency (`pip install "tse-tick[query]"`); the core install stays `polars-plus-pyarrow`. Dates accept a day, a month, a year, or a range; four-character stock codes select the parent listing together with its suffixed share classes, while five-character codes select exactly one class. Results are capped at 10 million rows with a `TruncationWarning` (the cap probes `limit+1`, so truncation is detected, not guessed), and zero-row results warn through a capturable `NoDataWarning` while still returning a correctly typed empty frame. For extracts beyond the cap, `export_query` streams a store slice to a single Parquet file with bounded memory, and `extract_to_store` builds ticker-scoped stores without any row cap. `query_sql` exposes raw SQL over the store as a documented escape hatch, and `get_available_dates / get_available_tickers` enumerate store contents.

5.2 Optional analysis helpers

The two modules below are conveniences layered on query output rather than parts of the parse-store-query core: each takes an ordinary `DataFrame` and returns one, so a user with existing feature code can ignore them entirely and lose nothing.

Order-book features. `features.py` computes standard microstructure quantities directly on query output:

- `compute_spread`: best bid–ask spread;
- `compute_depth`: quote volumes for up to ten levels per side;
- `compute_flow_imbalance`: rolling signed-volume imbalance;
- `compute_volatility`: rolling realized or Garman–Klass volatility over trade rows only, with `null`—not `NaN`—for undefined rows.

`compute_all_features` appends all of the above to the input frame.

Event windows. `extract_event_window()` takes a ticker, an event date and time, and window sizes (default ± 60 minutes), and returns the ticks around the event with a signed `seconds_from_event` column, falling back to quote-update times for rows without an execution time; a batch variant processes an events table. A dedicated ingestion mode consumes an event list with precomputed reaction anchors—for after-hours announcements the

anchor is the next session's 09:00 open, since centering on the announcement itself would yield an empty window—and writes a compact `year=YYYY/month=MM` store of window slices; it is reachable as `ingest_event_windows_period` and from the command line as `tse-tick ingest --filter-csv`.

5.3 The translation layer

Researchers arriving from `yfinance`, `Polygon`, or `ccxt` can ask the library for its equivalent of the API names they already know: `translate("yfinance", "download")` returns `"create_df"`, and `mapping()` exposes the full table programmatically. The mapping ships as packaged JSON, can be extended through an environment variable, and is reproduced in full in Appendix B.

6 Usage Examples

Listing 1 shows the core reader; Listing 2 the one-shot path; Listing 3 the two-stage pipeline; Listing 4 the feature chain; Listing 5 the enums and translation helpers; and Listing 6 the command-line equivalents.

```
import tse_tick as tt

df      = tt.create_df("HTICST120.20230704.1.zip", language="en") # 95 columns
df_jp   = tt.create_df("HTICST120.20230704.1.zip", language="jp") # Japanese names
head    = tt.create_df("HTICST120.20230704.1.zip", rows=10)      # capped preview
```

Listing 1: Parsing a raw ZIP into a typed DataFrame.

```
df = tt.read_ticks(
    r"G:\data\needs",          # folder of raw ZIPs (or a single ZIP)
    ticker_filter="7203",      # Toyota; also accepts iterables of codes
    date="20230704",
    start_time="09:00:00",
    end_time="11:30:00",
)
```

Listing 2: One-shot reading: raw ZIPs to a filtered DataFrame, no store.

```
from tse_tick import extract_to_store, query_ticks

extract_to_store(r"G:\data\needs", "store", period="202301-202312",
                 ticker="7203", max_workers="auto")

df = query_ticks("store", data_type="individual_stock", ticker=7203,
                 date="20230704", start_time="09:00:00", end_time="11:30:00")
```

Listing 3: Two-stage pipeline: build a ticker-scoped store once, query repeatedly.

```
from tse_tick import (compute_spread, compute_depth, compute_flow_imbalance,
                      compute_volatility, compute_all_features)

df      = query_ticks("store", ticker=7203, date="20230704")
spread  = compute_spread(df)
depth   = compute_depth(df, levels=5, side="both")
ofi     = compute_flow_imbalance(df, window="5min")
vol     = compute_volatility(df, window="5min")
features = compute_all_features(df) # input columns + 23 feature columns
```

Listing 4: Order-book features on query output.

```

from tse_tick import DataType, Language, translate, mapping

DataType.INDIVIDUAL_STOCK          # 'individual_stock' (str enum)
Language.JP                        # 'jp'
translate("yfinance", "download") # -> 'create_df'
translate("polygon", "from_")      # -> 'start_time'
mapping("ccxt")["functions"]["fetch_trades"] # -> ['query_ticks', 'read_ticks']

```

Listing 5: Enums and the name-translation layer.

The same workflows are scriptable without Python through the CLI:

```

tse-tick ingest --data-type individual_stock --period 202301-202312 \
  --input-root G:\data\needs --output-root store \
  --tickers 7203 --parallel auto

tse-tick export --data-type individual_stock --input-root G:\data\needs \
  --period 20230704 --tickers 7203 --output toyota_20230704.csv

```

Listing 6: Command-line interface.

`ingest` accepts periods from a single day to a multi-year range, resumes interrupted runs by default, and sizes its worker pool automatically; `export` writes CSV or Parquet chosen by the output extension, and `--store` switches it to the two-stage path.

7 Performance Evaluation

To validate the design choices described above, we benchmarked the processing pipeline on representative files for all four NEEDS data types from January 2017. The headline comparison uses HTICST120 (individual stock ticks, 4.8 million rows, 95 columns). Two pandas [7] baselines are reported: the *original prototype*, which uses the Python CSV engine (`engine='python'`) because the NEEDS CSV has ragged lines that the C engine rejects without additional configuration; and a *fair* baseline that uses the pandas C engine with forced column count and all-string types (matching the Polars parsing strategy), so that only the dataframe engine differs.

Table 4 shows the results. With all 16 logical cores, Polars completes parse-and-clean in a median of 4.8s—three speedup comparisons tell different parts of the story:

1. *vs. the original prototype* (Python CSV engine, 286s): 59.8 $\times$. This is what the rewrite achieved over the tool researchers previously used, but it conflates the CSV-parser change (Python $\rightarrow$ C/Rust) with the dataframe-engine change.
2. *vs. the fair pandas baseline, 16 threads* (C engine, 164s): 34.3 $\times$. Both libraries now parse identically configured CSV; the gap is the dataframe engine plus Polars’ multithreaded I/O.
3. *vs. the fair pandas baseline, single thread* (C engine, 164s; Polars 1-thread 22.8s): 7.2 $\times$. This is the purest library-vs-library comparison: single thread, same CSV configuration, same downstream work.

The gap between the 16-thread (34.3 $\times$) and 1-thread (7.2 $\times$) factors reflects the parallelism that Polars exploits internally; pandas’ C engine is single-threaded, so its time is the same in both comparisons. Peak process memory is 13.1 GiB for Polars, versus 28.1 GiB for the prototype and 9.7 GiB for the fair baseline. All three figures are for a single monolithic parse of the whole part—what the one-shot reader does without a ticker filter, and the only shape in which the three engines are comparable—not for the streaming ingest path of Section 4.3, whose peak is bounded per morsel instead.

The same benchmark was applied to the three remaining data types. Fair-baseline speedups for Polars (16 threads):

Table 4: Processing Engine Benchmark Across Four NEEDS Data Types (January 2017).

Data Type	Backend	Rows	Median (s)	RSS (MiB)	vs. Proto.	vs. Fair
Individual Stock Ticks	pandas, Python eng.	4,777,240	285.552	28783	1.0×	0.6×
	pandas, C eng.		163.829	9967	1.7×	1.0×
	Polars, 16T		4.774	13460	59.8×	34.3×
	Polars, 1T		22.789	13059	12.5×	7.2×
Stock Summary	pandas, Python eng.	81,688	3.785	625	1.0×	0.5×
	pandas, C eng.		1.842	464	2.1×	1.0×
	Polars, 16T		0.861	379	4.4×	2.1×
	Polars, 1T		1.087	315	3.5×	1.7×
Index Ticks	pandas, Python eng.	1,213,984	10.910	1462	1.0×	0.6×
	pandas, C eng.		6.208	1067	1.8×	1.0×
	Polars, 16T		0.880	1215	12.4×	7.1×
	Polars, 1T		1.980	1190	5.5×	3.1×
Index Summary [†]	pandas, Python eng.	209	0.223	116	1.0×	1.0×
	pandas, C eng.		0.217	117	1.0×	1.0×
	Polars, 16T		0.636	132	0.4×	0.3×
	Polars, 1T		0.617	125	0.4×	0.4×

Note: Each condition was run 7 times in an isolated subprocess; the first run (warm-up) was discarded. Memory measured as peak process working set via `psutil`. “Proto.” = original pandas prototype (`engine='python'`); “Fair” = pandas with C engine, forced columns, all-string dtype. System: Intel Core i5-14400F (10-core/16-thread), 32 GB RAM, Python 3.11, Polars 1.42, pandas 2.3, PyArrow 24.0, DuckDB 1.5.2; measured on `tse_tick` 0.15.1 (2026-07-18 run). On the headline comparison the six measured runs span 4.723–4.785 s (Polars, 16T) against 154.98–173.19 s (fair baseline), so the median 34.3× is bounded by 32.4× and 36.7× across the observed extremes.

[†]HTICIS110 has only 209 rows; at this scale fixed startup costs dominate and speedup ratios are not meaningful for throughput comparison.

- Stock Summary (HTICSS110, 82K rows, 82 cols (83 raw)): 2.1×. The file is small enough that fixed per-file costs and CSV parsing damp the achievable gap.
- Index Ticks (HTICIT110, 1.2M rows, 10 cols (23 raw)): 7.1×.

HTICIS110 (index summary) contains only 209 rows; at that scale, fixed interpreter and library startup costs dominate, and Polars is slower than pandas. Its results appear in Table 4 with a footnote but are excluded from aggregate speedup claims. The suite behind every number and figure in this section ships with the library as `benchmarks/`, driven by `run_all.py`. It reads a local NEEDS mirror, so it is reproducible by any licensee. A correctness gate in the same suite checks that the pandas and Polars pipelines emit the same cleaned output for all four data types—shape, integer and string equality, floats within 10^{-6} —so the comparisons are like-for-like rather than merely similarly named.

Table 5 evaluates storage formats. Parquet with `zstd` compression—the store default—is 34.4× smaller than uncompressed CSV (68.9 MB versus 2.37 GB), yet reads the full file back in 0.29 s versus 24.7 s. The columnar advantage is sharpest in selective reads: loading 3 of 95 columns from Parquet takes 0.0124 s versus 12.42 s for CSV (1002× faster). Snappy compression trades roughly twice the file size (139.9 MB) for a marginally faster write; Feather (Arrow IPC) writes fastest but is 4.8× larger than Parquet–`zstd`, reads more slowly, and lacks the predicate pushdown and Hive partition pruning that Parquet provides. CSV.gz is smaller still (49.9 MB), but pays for it on every read: 30.4 s for the full file and 13.3 s for the three-column read, 105× and 1,070× slower than Parquet–`zstd`.

For the query workload central to `tse_tick`’s design (Table 6), a single-ticker one-hour slice from a Hive-partitioned Parquet store (1,500,000 rows, a ticker subset of multi-day data) completes in 0.0169 s via DuckDB, versus 6.92 s for a pandas scan of the equivalent monolithic CSV (410× faster). DuckDB prunes irrelevant date and ticker partitions before reading, touching

Table 5: Storage Format Comparison for HTICST120 (4.8 M rows, 95 columns).

Format	Size (MB)	Write (s)	Read All (s)	Read 3/95 (s)
CSV	2369.27	101.1405	24.6933	12.4232
CSV.gz	49.88	170.0348	30.3507	13.2691
Parquet (Snappy)	139.85	0.7107	0.3162	0.0146
Parquet (Zstd)	68.86	0.9116	0.2887	0.0124
Feather (IPC)	327.19	0.5827	0.5104	0.0608
Pickle	3202.08	14.8280	3.5429	—

Note: Medians of 5 runs (1 warm-up discarded). “Read 3/95” reads only Stock Code, Execution Price, and Volume. Pickle lacks selective reads. HDF5 omitted (pytables not installed).

Table 6: Query Latency: Single-Ticker Hour Slice from Multi-Day Store.

Method	Median (s)	Rows Returned	Speedup
DuckDB + Hive Parquet	0.0169	52	409.6×
DuckDB + CSV scan	0.8123	52	8.5×
pandas CSV scan	6.9223	52	1.0×

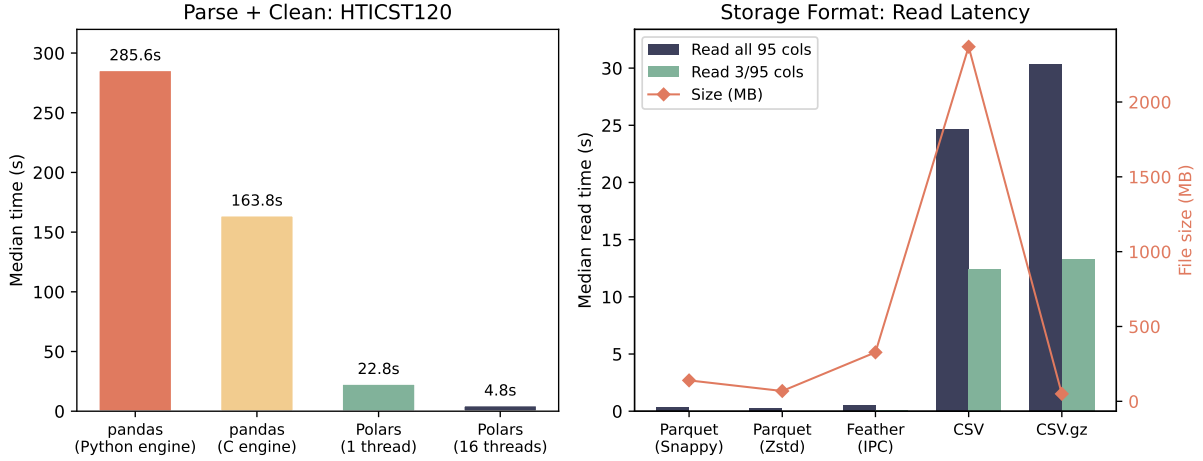


Figure 2: Left: parse-and-clean time by processing engine (HTICST120). Right: storage-format read latency and file size.

only the rows that match the filter. Figure 2 summarizes these results.

8 Testing

The test suite collects 637 tests and fails nowhere on either supported platform. Because the underlying data is proprietary, the suite is synthetic-first: a fixture generator emits obviously fake NEEDS-format archives that are pushed through the *real* ingest pipeline, so parsing, cleaning, storage, query, feature, and CLI behavior are all exercised without any licensed data. The generator emits individual-stock, stock-summary, and index archives—the last in both the 2017-onward CSV and the fixed-width 2016 layouts—so era-specific parsing is exercised on synthetic input as well. Tests that require real archives are gated on their presence (Table 7). Three conventions keep the suite honest as the library changes: every fixed defect keeps its own regression file—`test_alpha_fixes.py` and one per audit round—so a bug that has been fixed once cannot quietly return; every performance change proves output identity, a byte-identical store or a row-identical frame, alongside its speedup, which is the evidence on which the streaming

Table 7: Test-Suite Profiles (637 Collected, Version 0.15.1).

Environment	Result	Skips
Without licensed data (any OS)	587 pass / 50 skip	48 data-gated, 2 platform-gated
Windows, with licensed data	635 pass / 2 skip	case-sensitive-filesystem tests
Linux, with licensed data	636 pass / 1 skip	Windows-console encoding test

write path and part-pruning were accepted; and drift tests assert that data-type classification stays single-sourced, so the four types cannot come to disagree between modules. Continuous integration runs Python 3.9, 3.11, and 3.13; the usage listings in Section 6 are themselves locked by tests (`tests/test_paper_examples.py`), so the printed API cannot drift from the shipped one. Beyond the automated suite, two structured pre-release passes were run on machines other than the development host—an alpha pass across all four data types, both schema eras, and both access paths, and an independent beta pass over a three-year ingestion—and are reported in Appendix A.

9 Security and Robustness

The library treats untrusted archives and user-supplied query parameters defensively; Table 8 summarizes the guards, whose values are deliberate design decisions rather than defaults.

Archives are validated before they are decompressed. Every entry is checked against a decompressed-size ceiling, a compression ratio, and an entry count before any bytes are expanded, and a violation raises `SuspiciousZipError` instead of filling memory or disk. A NEEDS archive holds a single CSV, so a five-entry ceiling is generous for legitimate input while still refusing the nesting a ZIP bomb needs.

Row and memory limits are explicit, and refusals happen up front. Reads are capped at 10 million rows. In the query path the cap is enforced by asking for one row beyond the limit, so a truncated result is detected rather than guessed at from an exactly-full one; the one-shot reader additionally tracks whether any archive was left unread, and warns on that rather than on the row count alone. That path also sums the decompressed size it is about to materialize and refuses the read with a catchable `OneShotMemoryError` before allocating; the query path raises `QueryMemoryError` on the same principle. Callers who need more rows than the cap allows use the paths built to stream—`export_query` for a single file, `extract_to_store` for a ticker-scoped store—neither of which is capped.

User input reaching SQL or the filesystem is validated, not trusted. Identifiers interpolated into generated SQL pass a character blocklist that rejects quoting and control characters while still allowing the spaces that legitimate NEEDS column names contain—which is why the check is a blocklist rather than an alphanumeric allowlist. Dates, times, and ticker codes are matched against strict patterns before they reach a path or a predicate.

Failures are typed values, not printed text. Empty results warn through `NoDataWarning` and still return a correctly typed zero-row frame; truncation warns through `TruncationWarning`; a failed ingest worker surfaces as `IngestWorkerError` rather than as a silent gap in the store. All of them are capturable, so a batch job can decide for itself what a warning means. Library code logs and never prints—only the CLI prints—and importing the package reconfigures the process’s standard streams to UTF-8, so a Japanese Windows console cannot turn non-ASCII output into an encoding error.

Table 8: Resource and Input Guards.

Guard	Default
ZIP decompressed size	5 GB per ZIP entry
ZIP compression ratio	100:1 maximum
ZIP entry count	5 entries maximum
One-shot decompressed input	5 GB (<code>max_oneshot_bytes</code> , catchable)
Query / one-shot row cap	10,000,000 rows, warning on truncation
Ingest worker pool	RAM-aware cap: $\text{cores} \wedge 70\%$ of available RAM
SQL identifiers	Character blocklist; strict date, time, ticker patterns

10 Limitations

`tse_tick` ships no data—NEEDS archives require an institutional license—and parses that format alone, though its Parquet stores are readable by any Arrow-compatible tool. Four behaviors are deliberate: same-timestamp tie order is unfixed, so exports of one slice on different platforms are multiset-equal but not byte-identical; `read_ticks` and `query_ticks` cap results at 10 million rows, with `extract_to_store` and `export_query` uncapped; intraday time filters are rejected for the daily `*_summary` types with a clear error; and event-window ingestion consumes precomputed reaction anchors rather than deriving them from an exchange calendar.

Maintenance and schema evolution. The library describes the 2016–2025 delivery, and data formats outlive papers. Releases follow semantic versioning, and the store schema has changed twice so far (in versions 0.4.0 and 0.9.0), each recorded in the changelog together with the re-ingest it implies. Era detection is filename-driven and additive, so a post-2025 layout enters as another branch of the same detector plus its synthetic fixtures, without touching the code paths of existing eras—and because the test suite is synthetic-first, that work needs no licensed data: a contributor holding a new delivery can encode it from the vendor manual alone. Development continues in the open at https://github.com/tse-tick/tse_tick, where issues and pull requests are the supported channel, and the authors intend to track NEEDS format changes for as long as the data underpins their own research.

11 Conclusion

`tse_tick` turns the raw Nikkei NEEDS tick delivery—four data types, two schema eras, thousands of multi-part Japanese-documented archives—into typed DataFrames and a portable Parquet store on commodity hardware. One parse core serves both an exploratory one-shot reader and a production two-stage pipeline whose ingestion is atomic, resumable, memory-bounded, and RAM-aware parallel. It is MIT-licensed, tested across platforms and Python versions, and available at https://github.com/tse-tick/tse_tick.

Acknowledgments

We thank Yutaka Ozeki (Nakatsuma Seminar, Keio University) for independently beta-testing version 0.15.1 against the 2023–2025 archives.

AI-Assisted Writing Disclosure

Portions of this manuscript and of the described software were drafted with the assistance of AI coding and writing tools (GitHub Copilot, OpenAI Codex, xAI Grok, and Anthropic Claude). All AI-assisted content was reviewed, verified, and edited by the authors, who take responsibility for the final text and software.

References

- [1] Apache Software Foundation. Apache arrow: A cross-language development platform for in-memory analytics. <https://arrow.apache.org/>, 2026.
- [2] Apache Software Foundation. Apache parquet: Columnar storage format. <https://parquet.apache.org/>, 2026.
- [3] Ruihong Huang and Tomas Polak. LOBSTER: Limit order book reconstruction system. SSRN Working Paper, 2011. <https://lobsterdata.com/>.
- [4] JPX Market Innovation & Research, Inc. Historical market data: FLEX Historical and 10-level order book historical data. <https://www.jpx.co.jp/english/markets/paid-info-equities/historical/index.html>, 2026. The 10-level order-book dataset launched 29 June 2026.
- [5] Viktor Leis, Peter Boncz, Alfons Kemper, and Thomas Neumann. Morsel-driven parallelism: A NUMA-aware query evaluation framework for the many-core age. In *Proceedings of the 2014 ACM SIGMOD International Conference on Management of Data*, pages 743–754, 2014.
- [6] Man Group. ArcticDB: A high-performance DataFrame database. <https://github.com/man-group/ArcticDB>, 2026.
- [7] Wes McKinney. Data structures for statistical computing in Python. In *Proceedings of the 9th Python in Science Conference*, pages 56–61, 2010.
- [8] Nikkei Inc. NEEDS FinancialQUEST. <https://nkbb.nikkei.co.jp/en/service/needs-financialquest/>, 2026. Web-based retrieval service for the NEEDS databases.
- [9] Nikkei Media Marketing, Inc. NEEDS: Nikkei economic electronic databank system. <https://www.nikkei.co.jp/needs/>, 2026.
- [10] Mark Raasveldt and Hannes Mühleisen. DuckDB: An embeddable analytical database. In *Proceedings of the 2019 International Conference on Management of Data (SIGMOD '19)*, pages 1981–1984. ACM, 2019.
- [11] Ritchie Vink and Polars contributors. Polars: Blazingly fast DataFrames in Rust. <https://github.com/pola-rs/polars>, 2026. Version 1.42.

The appendices are reference material. Appendix A records the pre-release validation passes, Appendix B reproduces the complete API translation table, and Appendix C the complete column-level schemas of all four data types. None of them is required to follow the main text; the schema tables are intended for readers working directly against a NEEDS delivery.

A Pre-Release Validation

A.1 Alpha Test (Version 0.11.4)

One of the authors (M. Hayashi) alpha-tested version 0.11.4, installing it with its `[query]` extra from PyPI into a fresh Windows 11 environment on a Python release outside the project’s CI matrix (3.14, against CI’s 3.9, 3.11 and 3.13), with no build step required. All four data types parsed on both schema eras and both access paths; one-shot and two-stage row counts agreed on real data; record counts and dates matched the raw source; and full-width text was handled without corruption. With 46 GB of free disk against the 1.725 TiB corpus, slices were fetched, verified, tested and deleted in turn rather than mirrored. Three defects surfaced, all fixed in version 0.11.5 three days later (Table A.1), each with a regression test (`tests/test_alpha_fixes.py`).

Table A.1: Alpha-Test Findings and Their Resolution.

Finding (0.11.4)	Resolution (0.11.5)
A one-shot read of a full multi-part <code>individual_stock</code> day exhausted memory and surfaced as an uncatchable Rust panic, which <code>except Exception</code> cannot trap	A cumulative decompressed-size ceiling refuses the read up front, and any panic during the load is converted, so both raise the catchable <code>OneShotMemoryError</code> of Section 4.1
<code>query_ticks</code> truncated silently at its row cap, unlike <code>read_ticks</code>	The cap now emits <code>TruncationWarning</code> , distinguishing a truncated result from an exactly-full one by probing one row beyond the limit (Section 5)
An explicit <code>year=</code> argument was ignored under automatic detection	Detection now applies only to the arguments left unset, so an explicit value is honored

Two observations were recorded without code changes: stock codes are kept exactly as delivered rather than normalized from full-width forms—none has appeared in the archives sampled, so the case stays latent—and a Japanese Windows console could raise an encoding error on non-ASCII output, which the package now avoids by reconfiguring its streams to UTF-8 at import. The pass predates this release by four minor versions, but it is where the one-shot memory guard and the truncation warning originate.

A.2 Independent Beta Test (Version 0.15.1)

Version 0.15.1 was beta-tested independently by Yutaka Ozeki against the raw NEEDS archives for 2023–2025 on the workstation of Table A.2. The test was clean-slate: the prior dataset was wiped, the package updated from PyPI, and a three-year single-ticker ingestion (Toyota, code 7203) run with the native `max_workers="auto"` selection, followed by a whole-corpus time-window query.

Ingestion. All three years completed cleanly: 246 trading days for 2023, 241 for 2024, and 243 for 2025—730 in total—ingesting approximately 414 million rows in 2,104 s (≈ 35 minutes), i.e. roughly 2.9 s per trading day or 197,000 rows per second end-to-end.

Table A.2: Beta-Test Environment.

Component	Specification
CPU	Intel Core i9-9980XE, 18 cores / 36 threads
Memory	128 GiB total ($\approx$ 113 GB available at launch)
Operating system	Windows 10 Pro (22H2)
Storage	Local NTFS volumes
Package	<code>tse-tick</code> 0.15.1 from PyPI

The RAM guard fired correctly. Automatic selection detected all 36 logical processors, applied the streaming-path estimate of 3.0 GB per worker (Section 4.3), and found that 36 workers (108 GB) would exceed the 70% ceiling on available memory ($\approx$ 79 GB of 113 GB); it clamped the pool to 26 (78 GB) before starting, and ingestion then ran without memory exhaustion on precisely the kind of high-core, high-RAM host where an unguarded pool would oversubscribe.

Whole-corpus window query. A five-minute market-open window (09:00:00–09:05:00) was then extracted across the full three-year corpus by scanning all 730 daily Parquet partitions with Polars directly, returning 22.3 million rows in 7.39 s. The store carried the materialized **Effective Time** key of Section 4.5, so the bounded window could prune row groups, and using Polars rather than the DuckDB layer exercised the store’s portability to other Arrow-compatible engines.

Scope. The workload is single-ticker, on hardware unlike the reference machine of Section 7: its figures, taken from the tester’s logs, attest guard-respecting operation and end-to-end usability rather than being comparable to the controlled benchmarks.

B The API Translation Mapping

Table B.1 reproduces the complete translation table the package ships as `translations.json` (23 entries across three source libraries). Lookups resolve argument names before function names and exact-case matches before case-insensitive ones; when one external call corresponds to several `tse_tick` calls, `translate()` returns the first listed and `mapping()` exposes all of them. Users can extend or override the table by pointing the `TSE_TICK_TRANSLATIONS` environment variable at a JSON file with the same shape.

Table B.1: Complete API Translation Mapping (Version 0.15.1).

Kind	External Name	tse_tick Name	Note
yfinance			
function	<code>download</code>	<code>create_df</code>	also <code>read_ticks</code> , <code>ingest_period</code>
function	<code>Ticker.history</code>	<code>query_ticks</code>	
function	<code>history</code>	<code>query_ticks</code>	
function	<code>tickers</code>	<code>get_available_tickers</code>	
function	<code>Tickers</code>	<code>get_available_tickers</code>	
argument	<code>tickers</code>	<code>ticker_filter</code>	arguments resolve before functions
argument	<code>start</code>	<code>start_time</code>	
argument	<code>end</code>	<code>end_time</code>	
Polygon			
function	<code>get_aggs</code>	<code>query_ticks</code>	

Continued on next page

Table B.1 continued

Kind	External Name	tse_tick Name	Note
function	list_aggs	query_ticks	
function	list_trades	query_ticks	
function	list_tickers	get_available_tickers	
argument	ticker	ticker	
argument	from_	start_time	
argument	to	end_time	
argument	limit	limit	
ccxt			
function	fetch_ohlcv	query_ticks	
function	fetch_trades	query_ticks	also read_ticks
function	symbols	get_available_tickers	
function	load_markets	get_available_tickers	
argument	symbol	ticker	
argument	since	start_time	
argument	limit	limit	

C Complete Schema Documentation

Tables C.1–C.4 give the four types’ complete schemas: column numbers are positions in the output DataFrame, the Type column is each field’s logical type (physical dtypes follow Section 4.2), and both name languages appear, selected with `language`.

Table C.1: TICST120 Individual Stock Tick Data Schema (95 fields).

Col	English Name	Japanese Name	Type	Description
1	Record Type	レコード種別	string	Record format identifier (e.g., 1200 = Stocks with multiple quotes)
2	Data Date	データ日付	date	Trading date (YYYYMMDD format, parsed to Date type)
3	Exchange Code	取引所コード	string	Stock exchange (e.g., 11 = Tokyo Stock Exchange)
4	Security Type	証券種別	string	Market section (e.g., 1 = First Section, 4 = Mothers); the vendor still delivers these pre-2022 segment labels
5	Session	場区分	string	Trading session (1 = Morning 09:00–11:30, 2 = Afternoon 12:30–15:00; –15:30 from 2024-11-05)
6	Stock Code	銘柄コード	string	4-digit ticker symbol with optional suffix character
7	Execution Time	約定時刻	time	Trade execution time (HHMMSS)
8	Sell Quote Time	売り気配時刻	time	Sell-side best quote update time (HHMMSS)
9	Buy Quote Time	買い気配時刻	time	Buy-side best quote update time (HHMMSS)
10	Update Time	銘柄更新時刻	time	Full-precision update timestamp (HHMMSSNNNNNN)
11	Management Number	管理番号	string	Internal sequence number for record ordering
12	Execution Price	約定価格	float	Trade price in yen
13	Execution Type	約定種別	string	Trade classification (Opening, At Buy Quote, Between Quotes, etc.)
14	Ayumi Flag	歩み値フラグ	string	Tick status (Regular, System Halt, Suspension, Circuit Breaker, etc.)
15	Volume	売買高	int	Number of shares traded in this execution
16	Volume Flag	売買高フラグ	string	Volume status, decoded to “Final” (0) or “Estimated” (128)
17	Close Quote Flag	終了時気配フラグ	string	End-of-session quote condition indicator
18	Sell Quote 1 Best	売り気配 1	float	Best ask price (Level 1)
19	Sell Quote Vol 1	売り気配数量 1	int	Volume at best ask
20	Sell Quote Flag 1	売り気配フラグ 1	int	Quote condition flag at best ask
21	Buy Quote 1 Best	買い気配 1	float	Best bid price (Level 1)
22	Buy Quote Vol 1	買い気配数量 1	int	Volume at best bid
23	Buy Quote Flag 1	買い気配フラグ 1	int	Quote condition flag at best bid
24	Sell Limit Quote	売り成行気配	float	Sell-side limit order accumulated quote
25	Sell Limit Vol	売り成行数量	int	Volume at sell limit quote
26	Sell Limit Flag	売り成行フラグ	int	Sell limit quote condition flag
27	Sell Market Quote	売り特別気配	float	Sell-side special quote (tokubetsu kehai)
28	Sell Market Vol	売り特別数量	int	Volume at sell special quote
29	Sell Market Flag	売り特別フラグ	int	Sell special quote condition flag

Continued on next page

Table C.1 continued

Col	English Name	Japanese Name	Type	Description
30	Sell Quote 2	売り気配 2	float	Ask price at depth Level 2
31	Sell Quote Vol 2	売り気配数量 2	int	Volume at ask Level 2
32	Sell Quote Flag 2	売り気配フラグ 2	int	Quote condition flag at ask Level 2
33	Sell Quote 3	売り気配 3	float	Ask price at depth Level 3
34	Sell Quote Vol 3	売り気配数量 3	int	Volume at ask Level 3
35	Sell Quote Flag 3	売り気配フラグ 3	int	Quote condition flag at ask Level 3
36	Sell Quote 4	売り気配 4	float	Ask price at depth Level 4
37	Sell Quote Vol 4	売り気配数量 4	int	Volume at ask Level 4
38	Sell Quote Flag 4	売り気配フラグ 4	int	Quote condition flag at ask Level 4
39	Sell Quote 5	売り気配 5	float	Ask price at depth Level 5
40	Sell Quote Vol 5	売り気配数量 5	int	Volume at ask Level 5
41	Sell Quote Flag 5	売り気配フラグ 5	int	Quote condition flag at ask Level 5
42	Sell Quote 6	売り気配 6	float	Ask price at depth Level 6
43	Sell Quote Vol 6	売り気配数量 6	int	Volume at ask Level 6
44	Sell Quote Flag 6	売り気配フラグ 6	int	Quote condition flag at ask Level 6
45	Sell Quote 7	売り気配 7	float	Ask price at depth Level 7
46	Sell Quote Vol 7	売り気配数量 7	int	Volume at ask Level 7
47	Sell Quote Flag 7	売り気配フラグ 7	int	Quote condition flag at ask Level 7
48	Sell Quote 8	売り気配 8	float	Ask price at depth Level 8
49	Sell Quote Vol 8	売り気配数量 8	int	Volume at ask Level 8
50	Sell Quote Flag 8	売り気配フラグ 8	int	Quote condition flag at ask Level 8
51	Sell Quote 9	売り気配 9	float	Ask price at depth Level 9
52	Sell Quote Vol 9	売り気配数量 9	int	Volume at ask Level 9
53	Sell Quote Flag 9	売り気配フラグ 9	int	Quote condition flag at ask Level 9
54	Sell Quote 10	売り気配 1 0	float	Ask price at depth Level 10
55	Sell Quote Vol 10	売り気配数量 1 0	int	Volume at ask Level 10
56	Sell Quote Flag 10	売り気配フラグ 1 0	int	Quote condition flag at ask Level 10
57	Sell Quote OVER	売り気配 OVER	float	Ask overflow price (orders beyond Level 10)
58	Sell Quote Vol OVER	売り気配数量 OVER	int	Volume at ask overflow
59	Sell Quote Flag OVER	売り気配フラグ OVER	int	Quote condition flag at ask overflow
60	Buy Limit Quote	買い成行気配	float	Buy-side limit order accumulated quote
61	Buy Limit Vol	買い成行数量	int	Volume at buy limit quote
62	Buy Limit Flag	買い成行フラグ	int	Buy limit quote condition flag
63	Buy Market Quote	買い特別気配	float	Buy-side special quote (tokubetsu kehai)
64	Buy Market Vol	買い特別数量	int	Volume at buy special quote

Continued on next page

Table C.1 continued

Col	English Name	Japanese Name	Type	Description
65	Buy Market Flag	買い特別フラグ	int	Buy special quote condition flag
66	Buy Quote 2	買い気配 2	float	Bid price at depth Level 2
67	Buy Quote Vol 2	買い気配数量 2	int	Volume at bid Level 2
68	Buy Quote Flag 2	買い気配フラグ 2	int	Quote condition flag at bid Level 2
69	Buy Quote 3	買い気配 3	float	Bid price at depth Level 3
70	Buy Quote Vol 3	買い気配数量 3	int	Volume at bid Level 3
71	Buy Quote Flag 3	買い気配フラグ 3	int	Quote condition flag at bid Level 3
72	Buy Quote 4	買い気配 4	float	Bid price at depth Level 4
73	Buy Quote Vol 4	買い気配数量 4	int	Volume at bid Level 4
74	Buy Quote Flag 4	買い気配フラグ 4	int	Quote condition flag at bid Level 4
75	Buy Quote 5	買い気配 5	float	Bid price at depth Level 5
76	Buy Quote Vol 5	買い気配数量 5	int	Volume at bid Level 5
77	Buy Quote Flag 5	買い気配フラグ 5	int	Quote condition flag at bid Level 5
78	Buy Quote 6	買い気配 6	float	Bid price at depth Level 6
79	Buy Quote Vol 6	買い気配数量 6	int	Volume at bid Level 6
80	Buy Quote Flag 6	買い気配フラグ 6	int	Quote condition flag at bid Level 6
81	Buy Quote 7	買い気配 7	float	Bid price at depth Level 7
82	Buy Quote Vol 7	買い気配数量 7	int	Volume at bid Level 7
83	Buy Quote Flag 7	買い気配フラグ 7	int	Quote condition flag at bid Level 7
84	Buy Quote 8	買い気配 8	float	Bid price at depth Level 8
85	Buy Quote Vol 8	買い気配数量 8	int	Volume at bid Level 8
86	Buy Quote Flag 8	買い気配フラグ 8	int	Quote condition flag at bid Level 8
87	Buy Quote 9	買い気配 9	float	Bid price at depth Level 9
88	Buy Quote Vol 9	買い気配数量 9	int	Volume at bid Level 9
89	Buy Quote Flag 9	買い気配フラグ 9	int	Quote condition flag at bid Level 9
90	Buy Quote 10	買い気配 10	float	Bid price at depth Level 10
91	Buy Quote Vol 10	買い気配数量 10	int	Volume at bid Level 10
92	Buy Quote Flag 10	買い気配フラグ 10	int	Quote condition flag at bid Level 10
93	Buy Quote UNDER	買い気配 UNDER	float	Bid underflow price (orders beyond Level 10)
94	Buy Quote Vol UNDER	買い気配数量 UNDER	int	Volume at bid underflow
95	Buy Quote Flag UNDER	買い気配フラグ UNDER	int	Quote condition flag at bid underflow

Table C.2: TICSS110 Stock Summary Schema (82 output fields from 83 raw fields; Identification Flag is dropped during processing).

Col	English Name	Japanese Name	Type	Description
1	Record Type	レコード種別	string	Record format identifier
2	Data Date	データ日付	date	Trading date
3	Exchange Code	取引所コード	string	Stock exchange identifier
4	Security Type	証券種別	string	Market section code
5	Stock Code	銘柄コード	string	4-digit ticker symbol
6	Trading Unit	単位株数	int	Shares per trading unit
7	Issued Shares	発行済株式数	int	Total issued share count
8	Executions ≤ 3 units	約定 ≤ 3 単位	int	Trades with ≤ 3 trading units
9	Executions $3 < x \leq 6$ units	約定 $3 < x \leq 6$ 単位	int	Trades with $3 < x \leq 6$ units
10	Executions $6 < x \leq 9$ units	約定 $6 < x \leq 9$ 単位	int	Trades with $6 < x \leq 9$ units
11	Executions $9 < x \leq 29$ units	約定 $9 < x \leq 29$ 単位	int	Trades with $9 < x \leq 29$ units
12	Executions $29 < x \leq 49$ units	約定 $29 < x \leq 49$ 単位	int	Trades with $29 < x \leq 49$ units
13	Executions $49 < x \leq 99$ units	約定 $49 < x \leq 99$ 単位	int	Trades with $49 < x \leq 99$ units
14	Executions $99 < x \leq 199$ units	約定 $99 < x \leq 199$ 単位	int	Trades with $99 < x \leq 199$ units
15	Executions $199 < x \leq 299$ units	約定 $199 < x \leq 299$ 単位	int	Trades with $199 < x \leq 299$ units
16	AM Opening Price	前場始値	float	Morning session opening price
17	AM Opening Time	前場始値時刻	time	Morning session opening time
18	AM Opening Volume	前場始値約定株数	int	Shares traded at morning open
19	AM High Price	前場高値	float	Morning session high price
20	AM Low Price	前場安値	float	Morning session low price
21	AM Close Price	前場終値	float	Morning session close price
22	AM Close Time	前場終値時刻	time	Morning session close time
23	AM Close Volume	前場終値約定株数	int	Shares traded at morning close
24	AM UpTick Volume	前場値上がり株数	int	Shares on uptick trades (AM)
25	AM UpTick Amount	前場値上がり金額	float	Yen amount on uptick trades (AM)
26	AM UpTick Count	前場値上がり回数	int	Number of uptick trades (AM)
27	AM DownTick Volume	前場値下がり株数	int	Shares on downtick trades (AM)
28	AM DownTick Amount	前場値下がり金額	float	Yen amount on downtick trades (AM)
29	AM DownTick Count	前場値下がり回数	int	Number of downtick trades (AM)
30	AM Total Volume	前場約定株数	int	Total shares traded (AM)
31	AM Total Amount	前場約定金額	float	Total yen traded (AM)
32	AM Execution Count	前場約定回数	int	Total number of executions (AM)
33	AM VWAP	前場 VWAP	float	Volume-weighted average price (AM)

Continued on next page

Table C.2 continued

Col	English Name	Japanese Name	Type	Description
34	AM Std Dev	前場標準偏差	float	Price standard deviation (AM)
35	AM Sell Quote Time	前場売り気配時刻	time	AM sell quote observation time
36	AM Buy Quote Time	前場買い気配時刻	time	AM buy quote observation time
37	AM Spread Time	前場スプレッド時刻	time	AM spread observation time
38	AM Avg Sell Quote Vol	前場平均売り気配数量	float	Average sell quote volume (AM)
39	AM Avg Buy Quote Vol	前場平均買い気配数量	float	Average buy quote volume (AM)
40	AM Avg Spread	前場平均スプレッド	float	Average bid-ask spread (AM)
41	PM Opening Price	後場始値	float	Afternoon session opening price
42	PM Opening Time	後場始値時刻	time	Afternoon session opening time
43	PM Opening Volume	後場始値約定株数	int	Shares traded at afternoon open
44	PM High Price	後場高値	float	Afternoon session high price
45	PM Low Price	後場安値	float	Afternoon session low price
46	PM Close Price	後場終値	float	Afternoon session close price
47	PM Close Time	後場終値時刻	time	Afternoon session close time
48	PM Close Volume	後場終値約定株数	int	Shares traded at afternoon close
49	PM UpTick Volume	後場値上がり株数	int	Shares on uptick trades (PM)
50	PM UpTick Amount	後場値上がり金額	float	Yen amount on uptick trades (PM)
51	PM UpTick Count	後場値上がり回数	int	Number of uptick trades (PM)
52	PM DownTick Volume	後場値下がり株数	int	Shares on downtick trades (PM)
53	PM DownTick Amount	後場値下がり金額	float	Yen amount on downtick trades (PM)
54	PM DownTick Count	後場値下がり回数	int	Number of downtick trades (PM)
55	PM Total Volume	後場約定株数	int	Total shares traded (PM)
56	PM Total Amount	後場約定金額	float	Total yen traded (PM)
57	PM Execution Count	後場約定回数	int	Total number of executions (PM)
58	PM VWAP	後場 VWAP	float	Volume-weighted average price (PM)
59	PM Std Dev	後場標準偏差	float	Price standard deviation (PM)
60	PM Sell Quote Time	後場売り気配時刻	time	PM sell quote observation time
61	PM Buy Quote Time	後場買い気配時刻	time	PM buy quote observation time
62	PM Spread Time	後場スプレッド時刻	time	PM spread observation time
63	PM Avg Sell Quote Vol	後場平均売り気配数量	float	Average sell quote volume (PM)
64	PM Avg Buy Quote Vol	後場平均買い気配数量	float	Average buy quote volume (PM)
65	PM Avg Spread	後場平均スプレッド	float	Average bid-ask spread (PM)
66	Daily VWAP	全日 VWAP	float	Full-day volume-weighted average price
67	Daily Std Dev	全日標準偏差	float	Full-day price standard deviation
68	Daily Weighted Avg Sell Quote	全日加重平均売り気配	float	Full-day weighted average sell quote

Continued on next page

Table C.2 continued

Col	English Name	Japanese Name	Type	Description
69	Daily Weighted Avg Buy Quote	全日加重平均買い気配	float	Full-day weighted average buy quote
70	Daily Avg Spread	全日平均スプレッド	float	Full-day average bid–ask spread
71	AM Sell Quote Execution Vol	前場売り気配約定株数	int	AM shares executed at sell quote
72	AM Sell Quote Execution Amt	前場売り気配約定金額	float	AM yen amount executed at sell quote
73	AM Sell Quote Execution Cnt	前場売り気配約定回数	int	AM execution count at sell quote
74	AM Buy Quote Execution Vol	前場買い気配約定株数	int	AM shares executed at buy quote
75	AM Buy Quote Execution Amt	前場買い気配約定金額	float	AM yen amount executed at buy quote
76	AM Buy Quote Execution Cnt	前場買い気配約定回数	int	AM execution count at buy quote
77	PM Sell Quote Execution Vol	後場売り気配約定株数	int	PM shares executed at sell quote
78	PM Sell Quote Execution Amt	後場売り気配約定金額	float	PM yen amount executed at sell quote
79	PM Sell Quote Execution Cnt	後場売り気配約定回数	int	PM execution count at sell quote
80	PM Buy Quote Execution Vol	後場買い気配約定株数	int	PM shares executed at buy quote
81	PM Buy Quote Execution Amt	後場買い気配約定金額	float	PM yen amount executed at buy quote
82	PM Buy Quote Execution Cnt	後場買い気配約定回数	int	PM execution count at buy quote

Table C.3: TICIT110 Index Tick Data Schema (10 output fields selected from 23 raw fields; 13 reserved fields are dropped).

Col	English Name	Japanese Name	Type	Description
1	Record Type	レコード種別	string	Record format identifier
2	Data Date	データ日付	date	Trading date
3	Exchange Code	取引所コード	string	Exchange identifier
4	Security Type	証券種別	string	Security type code (10 = Cash Index)
5	Session	場区分	string	Trading session (1 = AM, 2 = PM)
6	Index Code	指数コード	string	Index identifier (e.g., 101 = Nikkei 225, 113 = TOPIX)
7	Execution Time	約定時刻	time	Index value calculation time (HHMMSS)
8	Index Value	指数値	float	Index level (scaled $\times 0.01$ from raw integer)
9	Execution Type	約定種別	string	Record type (1 = Opening, 2 = Post-Closing, 0 = Other)
10	Ayumi Flag	歩み値フラグ	string	Tick status (0 = Regular, 128 = Closing)

Table C.4: TICIS110 Index Summary Schema (17 output fields selected from 83 raw fields in the 2017-onward era; the 2016 era is a fixed-width hybrid with the same output).

Col	English Name	Japanese Name	Type	Description
1	Record Type	レコード種別	string	Record format identifier
2	Data Date	データ日付	date	Trading date
3	Exchange Code	取引所コード	string	Exchange identifier
4	Security Type	証券種別	string	Security type code (10 = Cash Index)
5	Index Code	指数コード	string	Index identifier (e.g., 101 = Nikkei 225, 113 = TOPIX)
6	AM Opening Price	前場始値	float	Morning session opening index level
7	AM Opening Time	前場始値時刻	time	Morning session opening time (HHMMSS)
8	AM High Price	前場高値	float	Morning session high
9	AM Low Price	前場安値	float	Morning session low
10	AM Close Price	前場終値	float	Morning session close
11	AM Close Time	前場終値時刻	time	Morning session close time (HHMMSS)
12	PM Opening Price	後場始値	float	Afternoon session opening index level
13	PM Opening Time	後場始値時刻	time	Afternoon session opening time (HHMMSS)
14	PM High Price	後場高値	float	Afternoon session high
15	PM Low Price	後場安値	float	Afternoon session low
16	PM Close Price	後場終値	float	Afternoon session close
17	PM Close Time	後場終値時刻	time	Afternoon session close time (HHMMSS)