

UniCross: Unified Cross-Skill Dexterous Manipulation Synthesis

Hui Zhang^{1,2} Julian Ferchow² Jie Song³ Mirko Meboldt¹

¹ETH Zürich, Switzerland ²inspire AG, Zürich, Switzerland ³HKUST (Guangzhou), China

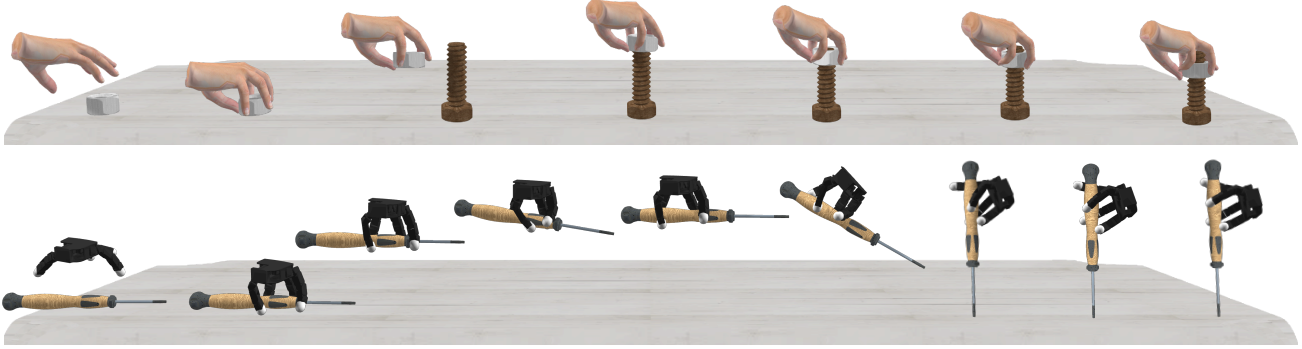


Figure 1. We present a unified dexterous manipulation framework that models grasping, relocation, in-hand translation, and in-hand rotation under a shared hand-object relational formulation. This coherent formulation facilitates cross-skill compatibility and continuity, enabling a single policy that performs long-horizon manipulation through seamless skill chaining. The embodiment-agnostic framework transfers effectively across different hand morphologies.

Abstract

Many dexterous manipulation tasks require the object to remain securely held throughout the interaction. From the perspective of hand-object relational motion, such manipulation comprises four canonical skills: grasping, relocation, in-hand rotation, and in-hand translation. Human hands flexibly compose these skills to accomplish complex tasks. Existing approaches, however, model these skills separately with skill-specific action constraints, objectives, or even dedicated hand morphologies, which breaks the compatibility and continuity required for long-horizon composition. In this work, we present a unified framework that models all four skills in a single formulation that shares the same state and action spaces and a common objective structure. This formulation enables straightforward distillation of a single cross-skill policy that performs strongly on every skill, generalizes to unseen objects, stays robust to disturbances, and chains skills seamlessly into long-horizon manipulation. The framework also transfers effectively across different hand morphologies. Overall, our results suggest that different dexterous manipulation skills can be viewed as instantiations of a shared task formulation, revealing the intrinsic consistency across different behaviors.

1. Introduction

Human hands exhibit remarkable dexterity and agility. Through diverse contact modulation, they can establish stable grasps, reposition objects, and perform in-hand adjustments while keeping the object securely held by the hand under gravity and disturbances. With the capability of maintaining object stability while preserving operational flexibility, this kind of manipulation is the foundation for complex downstream tasks such as plug insertion, screw tightening, and cutting with a knife, which are common in natural human activities. As a result, modeling such manipulation motions is meaningful in different domains, including animation, AR/VR, and robotics.

From the perspective of hand-object relational motion, this kind of manipulation comprises four canonical behaviors: grasping, relocation, in-hand rotation, and in-hand translation. Together, these behaviors form fundamental building blocks of everyday human actions and collectively enable human dexterity. Prior works in dexterous manipulation have primarily focused on individual skills with specific settings, such as encouraging persistent large contact forces around static grasping poses [10], performing in-hand translation with fixed palm-up wrist poses [63], or utilizing a specific hand morphology for in-hand rotation [9]. Human manipulation, in contrast, usually involves the continuous composition and seamless transition of these skills,

rather than their isolated execution. This motivates a unified formulation that captures the shared structures and intrinsic consistency across different dexterous manipulation skills, instead of relying on skill-specific designs that disrupt the compatibility and continuity for skill composition.

A cross-skill unified formulation for dexterous manipulation, however, is challenging in several aspects. First, these skills require fundamentally different contact regimes. Grasping and relocation favor persistent, strong, stable contacts, while in-hand rotation and translation often demand frequent contact reconfiguration to balance stability and mobility. This diversity makes it challenging to unify state spaces, reward structures, and other task definitions across skills. Second, unifying different skills imposes higher requirements on object shape representation. Grasping needs to identify shape regions that can support stable contact forces, while in-hand manipulation requires dynamically capturing shape features to adjust finger poses according to motion objectives. A unified representation must capture these diverse shape characteristics across all skills, rather than resorting to skill-specific heuristics or object-dependent tuning. Third, seamless skill composition for long-horizon manipulation requires compatibility across skills. States reached by one skill should remain valid for another, making skill-specific settings (palm-up in-hand manipulation with palm support, skill-specific hand morphologies, etc.) infeasible.

In this work, we take a step toward unified dexterous manipulation synthesis. Instead of defining skills based on contact regimes, we adopt a different perspective centered on hand-object relational motion. This perspective is inherently unifying, as all four skills fundamentally aim to realize desired hand-object relational motions while maintaining object stability, regardless of their specific contact patterns. Guided by this view, we model different skills as different instantiations of a single formulation conditioned on desired relational motions, while sharing state representations, action spaces, and reward structures. To capture object shapes, we adopt the hand-centric representation from [67], originally proposed for grasping, and show that it remains effective across all four skills by dynamically tracking interaction-relevant contact states and local geometric features. Instead of relying on skill-specific settings, our framework coherently models all four skills within a single formulation, and trains a unified cross-skill policy to handle diverse hand-object configurations, thereby broadening the state space coverage and ensuring compatibility between skills for seamless long-horizon manipulation.

Overall, our contributions can be summarized as follows:

- We introduce a hand-object relational perspective for dexterous manipulation synthesis, under which grasping, relocation, in-hand rotation, and in-hand translation are modeled with a unified formulation.

- This formulation yields straightforward distillation of a single cross-skill policy with strong per-skill performance, disturbance robustness, and generalization to unseen objects. It also transfers across hand morphologies.
- The formulation preserves cross-skill compatibility and continuity, enabling seamless long-horizon skill chaining.
- More broadly, our results suggest that different dexterous manipulation skills can be viewed as instantiations of a shared solution space, offering a practical basis for unified cross-skill synthesis.

2. Related Work

2.1. Hand-object Interaction Synthesis

Hand-object interaction (HOI) synthesis has long been studied in computer graphics and vision [3, 7, 15, 17, 18, 35, 42, 56–58]. Prior work usually formulated HOI synthesis as optimization problems. Specifically, some works focus on utilizing existing static grasping poses to generate new poses or animated motions, such as generating grasping poses for new objects by finetuning similar poses retrieved from a database [6, 24], generating finger motions by fitting given reference poses [39], or fitting a partial object motion with an initial grasp [25]. To better handle physical plausibility, some work explicitly incorporated contact into the synthesis pipeline by fitting captured contact forces for other objects [20], sampling contact-consistent trajectories [62], performing contact-invariant optimization [1, 33], or optimizing compliant contact forces under shape uncertainty [8]. While effective for specific manipulation problems, these optimization-based methods are usually computationally expensive, and rely on per-task objectives such as reference poses, contact modes, or annotated grasp templates [2]. Furthermore, these methods usually simplify physical constraints (e.g., no object gravity [1]), leading to unrealistic motion behaviors.

Instead of relying on specifically defined objectives, some recent work utilizes data-driven learning approaches that train generative models [4, 26, 36, 52, 71–73] by extracting priors from captured hand-object motion datasets [5, 12, 29, 50, 65]. While these methods can synthesize realistic motions within the data distribution, their generalization is fundamentally constrained by dataset coverage, particularly when transferring to unseen object geometries or hand embodiments with different morphologies. Some of these works require reference trajectories during inference (e.g., wrist or object motions [22, 66]), which limits their ability to synthesize novel manipulation behaviors. Moreover, without explicit physics modeling, these methods usually suffer from physical implausibility such as interpenetration or jittering [13, 51].

Another line of work learns dexterous manipulation in simulation via reinforcement learning (RL) [10, 14, 31, 41,

48, 61, 68, 69]. By leveraging physics-driven exploration, these methods offer stronger physical grounding while alleviating the constraints imposed by limited real-world data. However, due to the difficulty of extracting shared representations and unified objectives across different manipulation behaviors, existing RL methods typically focus on individual skills and rely heavily on task-specific heuristics, reward shaping, architectures, or exploration constraints, such as restricted action spaces [30], specific hand-object configurations [40, 63], or specialized hand morphologies [9]. These skill-specific constraints break the continuity of hand-object states across skills and make skill composition infeasible. Our work, following the RL-in-simulation paradigm, departs from skill-specific designs by formulating different dexterous manipulation behaviors from a unified cross-skill hand-object relational perspective.

2.2. Multi-Skill and Generalist Policy Learning

Generalist policy learning has shown promising results in character animation. Based on a unified solution space which models different skills, a single controller can synthesize diverse whole-body behaviors, such as different locomotion modes [16, 37, 38, 53] and complex scene interactions [34, 54, 59]. Dexterous manipulation, however, is still at an early stage of generalist policy learning. The fundamental challenge lies in that seemingly small changes in object geometry, contact configuration, or hand morphology can induce largely different manipulation strategies, making it difficult to extract the shared motion primitives. As a result, it is still unclear whether a unified solution space exists for dexterous manipulation, and can be modeled with a shared formulation.

Due to this challenge, prior work on dexterous manipulation mainly focuses on individual skills with specific contact patterns. Most research still centers on grasping [11, 23, 48, 55, 67, 74], as the consistent contact makes it easier to model and formulate. Recently, some works extend dexterous manipulation from grasping to other skills such as articulation [49, 68, 70, 71, 73]. However, these works depend heavily on existing articulated datasets [12, 28] and do not generalize to unseen shapes. Moreover, articulation primarily involves wrist-level motion under a fixed grasp, while fine-grained in-hand manipulation with coordinated finger motion remains unexplored.

Several works in the robotics domain explore in-hand rotation [9, 27, 40] and translation [63], but they are still restricted to single-skill policies and often rely on highly specific assumptions. For example, Yin et al. [63] rely on palm support for object in-hand translation, which requires hand-up configurations, while Chen et al. [9] utilize a symmetric-finger hand morphology to rotate objects with fixed wrist poses. Such assumptions limit cross-skill compatibility and prevent skill composition.

A few recent works go beyond single-skill policies with different focuses from ours. Some works [19, 21] specifically target reaching a given object pose, where the task is specified by a goal configuration rather than by the manipulation behavior to be performed. Yin et al. [64] instead extract a dexterous manipulation motion prior from grasp switching, which is used to regularize teleoperation commands around a few dominant modes rather than to synthesize novel manipulation motions. In contrast, our work investigates whether the synthesis of multiple canonical dexterous manipulation skills can be unified under a common relational formulation.

3. Method

This work aims to unify the formulation of different dexterous manipulation skills within a single framework, ensuring cross-skill coherence. To this end, we formulate the four skills from a shared hand-object relational perspective. As illustrated in Fig. 2, we first train per-skill policies with PPO [46], which share a unified observation space, network architecture, action space, and reward structure (Sec. 3.1). The unified representation is instantiated for each policy based on the relational-motion-relevant objectives (Sec. 3.2), and enables straightforward distillation of a single cross-skill policy with the same architecture using DAgger [45] (Sec. 3.3). All policies are trained in Isaac-Gym [32], using a simulation frequency of 120 Hz and a control frequency of 20 Hz. More training details are provided in the supplementary material.

3.1. Task Formulation

3.1.1. Task Definition

Given a dexterous hand model and a rigid object, the framework trains policies in physics simulation to control the hand and generate diverse hand-object interaction motions. To model the hand, we first define a root frame at the beginning of each episode using the initial wrist pose in the world frame, and keep it fixed thereafter for the entire episode. We then parameterize the wrist motion with six zero-initialized virtual joints, including three translational and three rotational joints. This formulation represents wrist motion relative to the initial pose instead of absolute world coordinates, which benefits generalization. On top of this, we define the hand frame using the current hand pose (see Hand State in Fig. 2). The object pose is then represented in the hand frame by $\mathbf{x}_o^h$ and $\mathbf{q}_o^h$, and in the root frame by $\mathbf{x}_o^r$ and $\mathbf{q}_o^r$. The hand pose in the root frame is represented by $\mathbf{x}_h^r$ and $\mathbf{q}_h^r$. Target poses are indicated by $\hat{\cdot}$, including $\hat{\mathbf{x}}_o^h$, $\hat{\mathbf{q}}_o^h$, $\hat{\mathbf{x}}_o^r$, $\hat{\mathbf{q}}_o^r$, $\hat{\mathbf{x}}_h^r$, and $\hat{\mathbf{q}}_h^r$. With these definitions, each manipulation skill can be characterized from the perspective of hand-object relational movements in two frames:

- **Grasp:** the object is fixed in the root frame, while the hand moves in the root frame towards the object.

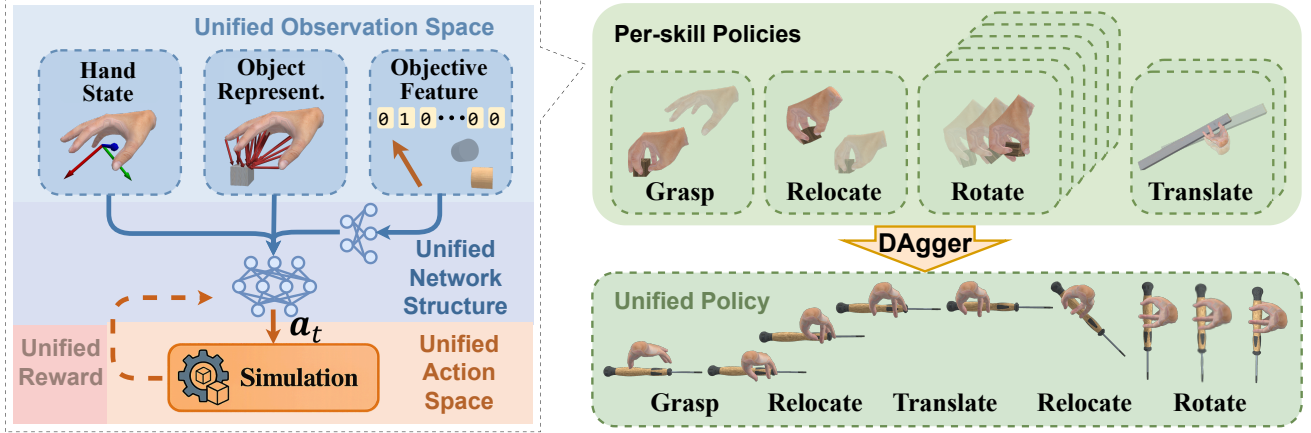


Figure 2. Overview of the proposed unified framework. Ten per-skill policies (one for grasp, one for relocate, six for rotation (x+/x-/y+/y-/z+/z- of the hand frame), and two for translation (z+/z- of the hand frame)) are first trained independently and then distilled into a single unified policy via DAgger. All policies share a unified observation space, network architecture, and action space, and the per-skill policies share a unified reward formulation.

- **Relocate:** the object is fixed in the hand frame, while the wrist moves in the root frame to reach a target object pose.
- **Rotate:** the wrist is fixed in the root frame, the object position is fixed in the hand frame, and the object orientation rotates about a designated axis in the hand frame.
- **Translate:** the wrist is fixed in the root frame, the object orientation is fixed in the hand frame, and the object position translates along a designated axis in the hand frame.

3.1.2. Observation Space

The observation space $\mathbf{o}_t$ provides the representation of the current hand-object states, interaction-relevant object shape features shared across skills, and the hand-object relational motion objectives. It is designed as $\mathbf{o}_t = (\mathbf{s}_t^h, \mathbf{s}_t^o, \mathbf{g}_t)$, where $\mathbf{s}_t^h$ is the hand state, $\mathbf{s}_t^o$ is the interaction-aware object representation, and $\mathbf{g}_t$ is the relation-based objective features.

Specifically, $\mathbf{s}_t^h = [\mathbf{q}_t, \mathbf{q}_{t-1}^{\text{target}}]$ includes the current positions and previous target positions of all hand joints (finger joints and virtual wrist joints). The object is represented with $\mathbf{s}_t^o = [\mathbf{c}_t, \mathbf{f}_t, \mathbf{v}_t]$, including the per-link contact states $\mathbf{c}_t$, contact force magnitudes $\mathbf{f}_t$, and the distance vectors $\mathbf{v}_t$ from each finger link to their nearest points on the object surface. This interaction-centric representation, inspired by [67], captures hand-object spatial relationships as well as object geometry features shared across manipulation skills. The relation-based objective features are represented as a 55-dimensional vector $\mathbf{g}_t = [\mathbb{I}_t, \mathbf{d}_t^h, \mathbf{g}_t^{\text{current}}, \mathbf{g}_t^{\text{target}}]$, where $\mathbb{I}_t \in \mathbb{R}^{10}$ is a one-hot vector indicating the current task mode (grasping, relocation, translation along two directions, or rotation around six directions), and $\mathbf{d}_t^h \in \mathbb{R}^3$ is a unit direction vector in the hand frame defining the task axis. Using the pose notation above, $\mathbf{g}_t$ also includes the current multi-frame relational poses $\mathbf{g}_t^{\text{current}} = [\mathbf{x}_o^h, \mathbf{q}_o^h, \mathbf{x}_o^r, \mathbf{q}_o^r, \mathbf{x}_h^r, \mathbf{q}_h^r]$ and their tar-

get poses $\mathbf{g}_t^{\text{target}} = [\hat{\mathbf{x}}_o^h, \hat{\mathbf{q}}_o^h, \hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^r, \hat{\mathbf{x}}_h^r, \hat{\mathbf{q}}_h^r]$. $\mathbf{d}_t^h$ and $\mathbf{g}_t^{\text{target}}$ are instantiated in Sec. 3.2 according to the motion objectives as described in Sec. 3.1.1.

3.1.3. Action Space

The action space parameterizes the full hand motion, including six virtual wrist joints and all articulated finger joints. The policy outputs incremental motion commands $\mathbf{a}_t$ that are transformed to target joint positions with $\mathbf{q}_t^{\text{act}} = \text{clamp}(\mathbf{q}_t^{\text{ref}} + \alpha \cdot \mathbf{a}_t, \mathbf{q}_{\min}, \mathbf{q}_{\max})$, where α is the joint-wise action scales and $\text{clamp}(\cdot)$ enforces anatomical joint limits defined by $\mathbf{q}_{\min}$ and $\mathbf{q}_{\max}$. Specifically, $\mathbf{q}_t^{\text{ref}}$ is set to $\mathbf{q}_{t-1}^{\text{act}}$ for the finger joints and to the current target wrist pose ($\hat{\mathbf{x}}_h^r$ and the Euler angles of $\hat{\mathbf{q}}_h^r$) for the virtual wrist joints. This incremental motion parameterization facilitates temporally coherent and smooth finger motions while accelerating wrist motion exploration. Target joint positions $\mathbf{q}_t^{\text{act}}$ are then converted to joint torques by a PD controller, which are applied to the joints to generate the desired motion in simulation.

3.1.4. Reward Design

From the shared hand-object relational perspective, we define a set of reward terms to encourage efficient and effective completion of different manipulation skills:

$$r_t = r_t^{\text{goal}} + r_t^{\text{track}} + r_t^{\text{reg}} \quad (1)$$

where r_t^{goal} encodes general hand-object interaction objectives, r_t^{track} encourages tracking of the hand-object target poses $\mathbf{g}_t^{\text{target}}$ defined in Sec. 3.1.2, and r_t^{reg} promotes stable and efficient manipulation via a set of penalty terms.

The object should remain securely held by the hand while performing desired movements. Motivated by this,

the goal term r_t^{goal} is designed to encourage stable hand-object contact and object motion along the target axis:

$$r_t^{\text{goal}} = r_t^{\text{contact}} + r_t^{\text{motion}} \quad (2)$$

The contact term is defined as $r_t^{\text{contact}} = \frac{1}{N} \sum_i^N (-w_{\text{dis}} \cdot d_i + w_{\text{con}} \cdot c_i + w_f \cdot f_i)$, where N is the number of hand links, d_i is the distance from link i to the object, $c_i \in \{0, 1\}$ indicates whether link i is in contact, and f_i is the contact force magnitude. The motion term is $r_t^{\text{motion}} = w_p \cdot \min(\mathbf{v}_o^h \cdot \mathbf{d}^h, v_{\text{max}})$, where $\mathbf{v}_o^h$ is the object hand-frame velocity, $\mathbf{d}^h$ is the unit direction vector defined in Sec. 3.1.2, and v_{max} is a threshold to limit excessive motion.

The target tracking component r_t^{track} penalizes the hand and object deviations from target poses in both root and hand frames, with $\mathcal{A}(\cdot, \cdot)$ computing the angular difference of two quaternions:

$$\begin{aligned} r_t^{\text{track}} = & w_{opr} \|\mathbf{x}_{o,t}^r - \hat{\mathbf{x}}_o^r\|^2 + w_{ogr} \mathcal{A}(\mathbf{q}_{o,t}^r, \hat{\mathbf{q}}_o^r) \\ & + w_{oph} \|\mathbf{x}_{o,t}^h - \hat{\mathbf{x}}_o^h\|^2 + w_{ogh} \mathcal{A}(\mathbf{q}_{o,t}^h, \hat{\mathbf{q}}_o^h) \\ & + w_{hpr} \|\mathbf{x}_{h,t}^r - \hat{\mathbf{x}}_h^r\|^2 + w_{hqr} \mathcal{A}(\mathbf{q}_{h,t}^r, \hat{\mathbf{q}}_h^r). \end{aligned} \quad (3)$$

The regularization component r_t^{reg} encourages stable and efficient manipulation through multiple penalty terms:

$$r_t^{\text{reg}} = r_t^{\text{pose}} + r_t^{\text{vel}} + r_t^{\text{energy}} + r_t^{\text{drop}} \quad (4)$$

where $r_t^{\text{pose}} = w_{\text{pose}} \sum_{i=1}^N (q_{i,t} - q_{i,0})^2$ penalizes deviations from the initial finger joint positions to prevent excessive finger movements, with N being the number of finger joints and $q_{i,0}$ the initial joint position. The wrist velocity penalty $r_t^{\text{vel}} = w_{\text{vel}} \|\dot{\mathbf{x}}_{h,t}\|^2 + w_{\text{ang}} \|\boldsymbol{\omega}_{h,t}\|^2$ penalizes wrist translational and angular velocities $\dot{\mathbf{x}}_{h,t}$ and $\boldsymbol{\omega}_{h,t}$, promoting smooth wrist motion. The energy penalty $r_t^{\text{energy}} = w_{\tau} \|\boldsymbol{\tau}_t\|^2$ penalizes the magnitude of applied joint torques $\boldsymbol{\tau}_t$, encouraging energy-efficient control. The drop penalty $r_t^{\text{drop}} = w_{\text{drop}} \mathbb{I}_{\text{drop}}$ penalizes the early termination caused by object dropping, with the indicator $\mathbb{I}_{\text{drop}}$ defined by whether the distance between all hand links and the object exceeds a threshold.

All the reward weights and other hyperparameters are provided in the supplementary material.

3.2. Relational-Based Objective Instantiation

$\mathbf{d}^h$ is a unit vector that defines the task axis in the hand frame. For grasping, it points from the object center to the hand frame origin. For relocation, it points from the current object position to the target position. For rotation, it aligns with one of six axis directions (x+/x-/y+/y-/z+/z-). For translation, it aligns with one of two directions (z+/z-).

$\mathbf{g}_t^{\text{target}}$ contains the target hand and object poses in the root and hand frames: $\hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^r, \hat{\mathbf{x}}_o^h, \hat{\mathbf{q}}_o^h, \hat{\mathbf{x}}_h^r$, and $\hat{\mathbf{q}}_h^r$, which instantiates the motion objectives defined in Sec. 3.1.1. As

Table 1. Instantiation of the target poses $\mathbf{g}_t^{\text{target}}$ for each skill.

Skill	Tracked	Fixed	Free
Grasp	$\hat{\mathbf{x}}_o^h$	$\hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^r$	$\hat{\mathbf{q}}_o^h, \hat{\mathbf{x}}_h^r, \hat{\mathbf{q}}_h^r$
Relocate	$\hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^r, \hat{\mathbf{x}}_h^r, \hat{\mathbf{q}}_h^r$	$\hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^h$	None
Rotate	$\hat{\mathbf{q}}_o^h, \hat{\mathbf{q}}_o^r$	$\hat{\mathbf{x}}_h^r, \hat{\mathbf{q}}_h^r, \hat{\mathbf{x}}_o^r, \hat{\mathbf{x}}_o^h$	None
Translate	$\hat{\mathbf{x}}_o^h, \hat{\mathbf{x}}_o^r$	$\hat{\mathbf{x}}_h^r, \hat{\mathbf{q}}_h^r, \hat{\mathbf{q}}_o^r, \hat{\mathbf{q}}_o^h$	None

summarized in Tab. 1, each target is set as *Tracked* (dynamically updated toward the skill objective), *Fixed* (held at the initial variable value), or *Free* (set to the current variable value so the corresponding DOF is unconstrained).

For grasping, the object should maintain its initial root-frame pose ($\hat{\mathbf{x}}_o^r = \mathbf{x}_{o,0}^r, \hat{\mathbf{q}}_o^r = \mathbf{q}_{o,0}^r$), with the target position in the hand frame set to the origin ($\hat{\mathbf{x}}_o^h = \mathbf{x}_{\text{hand}}^h$). The other variables are set to current values for free movements: $\hat{\mathbf{q}}_o^h = \mathbf{q}_o^h, \hat{\mathbf{x}}_h^r = \mathbf{x}_h^r, \hat{\mathbf{q}}_h^r = \mathbf{q}_h^r$.

For relocation, the object should be stationary in the hand frame ($\hat{\mathbf{x}}_o^h = \mathbf{x}_{o,0}^h, \hat{\mathbf{q}}_o^h = \mathbf{q}_{o,0}^h$). With a given object final 6D pose $\mathbf{T}^{\text{final}}$, the target root-frame object pose $\hat{\mathbf{x}}_o^r$ and $\hat{\mathbf{q}}_o^r$ are calculated by linearly interpolating between the current pose $\mathbf{x}_o^r$ and $\mathbf{q}_o^r$ towards $\mathbf{T}^{\text{final}}$, and the root-frame wrist targets $\hat{\mathbf{x}}_h^r$ and $\hat{\mathbf{q}}_h^r$ are calculated from $\hat{\mathbf{x}}_o^r, \hat{\mathbf{q}}_o^r$ by maintaining the current object hand-frame pose $\mathbf{x}_o^h$ and $\mathbf{q}_o^h$.

For rotation, the wrist should remain stationary in the root frame ($\hat{\mathbf{x}}_h^r = \mathbf{x}_{h,0}^r, \hat{\mathbf{q}}_h^r = \mathbf{q}_{h,0}^r$), and the target object orientation in the hand frame is dynamically updated by rotating the current object orientation around $\mathbf{d}^h$: $\hat{\mathbf{q}}_{o,t}^h = \mathbf{R}(\omega_{\text{max}} \Delta t, \mathbf{d}^h) \cdot \mathbf{q}_{o,t}^h$, with $\hat{\mathbf{q}}_o^r$ accordingly calculated from the current wrist orientation $\mathbf{q}_h^r$. The object position maintains initial values in both frames ($\hat{\mathbf{x}}_o^r = \mathbf{x}_{o,0}^r, \hat{\mathbf{x}}_o^h = \mathbf{x}_{o,0}^h$).

For translation, the wrist remains stationary in the root frame ($\hat{\mathbf{x}}_h^r = \mathbf{x}_{h,0}^r, \hat{\mathbf{q}}_h^r = \mathbf{q}_{h,0}^r$), and the target object position in the hand frame is dynamically updated by moving the current object position along $\mathbf{d}^h$: $\hat{\mathbf{x}}_{o,t}^h = \mathbf{x}_{o,t}^h + v_{\text{max}} \Delta t \cdot \mathbf{d}^h$, with $\hat{\mathbf{x}}_o^r$ accordingly calculated from the current wrist pose $\mathbf{x}_h^r$ and $\mathbf{q}_h^r$. The object orientation maintains initial values in both frames ($\hat{\mathbf{q}}_o^r = \mathbf{q}_{o,0}^r, \hat{\mathbf{q}}_o^h = \mathbf{q}_{o,0}^h$).

3.3. Unified Policy Distillation

Modeled with a unified relational formulation, the per-skill policies share the same observation space, action space, and network structure. Distilling them into a single unified policy is therefore a straightforward consequence of the framework. To this end, we apply vanilla DAgger [45] to distill the ten per-skill policies into a single policy. Specifically, we roll out the distilled policy to collect states, query the corresponding per-skill expert actions for the visited states, and train the unified policy on the aggregated state-action pairs using an MSE imitation loss. The environments are uniformly distributed across all valid (object, skill) pairs during training. More details are provided in the supplementary material.

4. Experiment

This section presents several experiments to evaluate the effectiveness, generalization, and robustness of the policy trained by our unified framework. We first describe the experimental setup in Sec. 4.1, then evaluate the per-skill performance of our unified cross-skill policy against skill-specific baselines in Sec. 4.2. Then we evaluate the policy generalization to unseen objects and framework transferability across hand morphologies in Sec. 4.3. We further evaluate the policy robustness under disturbances in Sec. 4.4 and long-horizon manipulation performance in Sec. 4.5. Ablations are finally conducted in Sec. 4.6.

4.1. Experiment Details

4.1.1. Objects

We randomly sample boxes and cylinders in two categories: wrappable objects (all dimensions in $[0.045, 0.075]$ m), and elongated objects (length in $[0.6, 0.8]$ m, other dimensions in $[0.045, 0.065]$ m). Grasping and relocation are trained and evaluated on both categories, while rotation uses the former and translation the latter. For each category and object type we sample 200 shapes (100 train / 100 test), yielding 400 training and 400 testing objects.

4.1.2. Evaluation Setup

Grasping: Each object is evaluated with 25 random tabletop poses. The fingers are initially spread around the object (see the supplementary material for details), and the wrist is initially 5 cm above the object. With the policy continuously running for 75 time steps, a fixed upward force is applied on the wrist after 50 time steps to lift the object. We report the average success rate (SR (%)), where success requires the object to be lifted and does not drop throughout the entire episode.

Relocation: Each object is evaluated using 25 randomly sampled successful grasping poses. For each trial, a target object pose $\mathbf{T}^{\text{final}}$ is generated by adding a random positional offset of $[-0.1, 0.1]$ m along the x and y directions, $[0.2, 0.4]$ m along the z direction, and a random angular offset of $[-0.75, 0.75]$ rad for roll, pitch, yaw. The policy runs for 75 time steps, and we report the average position (PE, cm) and orientation (AE, rad) errors with respect to the target pose over the last 25 time steps of all non-dropping trials. We also report the success rate (SR (%)), where success requires the object to arrive at the target pose within 3 cm and 0.15 rad without object dropping, respectively.

Rotation & Translation: Each object is evaluated with 25 randomly sampled successful grasping poses for each rotation/translation direction, leading to 150 trials for rotation and 50 trials for translation. The wrist pose is randomly initialized in the world frame. A trial is considered successful if it achieves an angular displacement exceeding $\pi/2$ rad within 400 time steps or a linear displacement exceeding 5

Table 2. Comparison with Per-skill Baselines under the original settings of the baselines (Ori.) and our general setting (Gen.).

	Grasp		Relocate				Rotate		Translate	
Method	SR $\uparrow$	SR $\uparrow$	PE $\downarrow$	AE $\downarrow$	SR $\uparrow$	Rot. $\uparrow$	SR $\uparrow$	Trans. $\uparrow$	SR $\uparrow$	Trans. $\uparrow$
Ori. (Base.)	97.5	—	—	—	76.5	15.4	98.3	12.8	98.3	12.8
Ori. (Ours)	98.9	—	—	—	99.1	15.8	99.4	18.1	99.4	18.1
Gen. (Base.)	97.1	92.8	0.85	0.0231	62.7	9.43	70.6	5.81	70.6	5.81
Gen. (Ours)	98.7	99.0	0.54	0.0134	98.8	13.6	99.1	20.3	99.1	20.3

cm within 50 time steps, without object dropping. We report the success rate (SR (%)) and the average incremental rotation angle (Rot. (rad)) or translation distance (Trans. (cm)), computed over all non-dropping trials.

4.2. Per-skill Comparison

We first compare the performance of our unified policy with the per-skill baselines. We choose the RL-in-simulation methods as they are most relevant to our setting. For grasping, we choose GraspXL [67], a method that generates diverse grasping motions for various objects. For rotation and translation, we choose RotateIt [40] and [63], respectively, and adopt their teacher policies with full access to simulated object and hand states for a fair comparison. As no prior work specifically addresses relocation, we construct a naive baseline by slightly tightening the fingers around the generated grasp poses to maintain stable contact, and drive the wrist with a PD controller toward the pose that realizes the target root-frame object pose with a fixed hand-frame object pose. We use Allegro [43] hand in this section, which is widely used in previous related works.

We evaluate under two settings, as reported in Tab. 2. We first compare under the original settings of the baselines (Ori.), where grasping is performed without table collision, while rotation and translation are conducted with a fixed wrist-up pose. This aims to demonstrate the advantage of our method under their own favorable conditions. We then adapt the baselines to our more general setting described in Sec. 4.1.2, and retrain and re-evaluate them (Gen.), which further reveals their limitations under more general settings. Relocation is only evaluated in the general setting as no prior work addresses it. Each baseline is trained separately for Ori. and Gen. under the corresponding setting, whereas ours is a single cross-skill policy trained only under our general setting and evaluated in both without retraining. Additional baseline details are in the supplementary material.

Although our single policy is never trained under baseline settings, it consistently outperforms the per-skill baselines that are specifically designed and trained for that setting. Moving to our more general setting, the rotation and translation baselines drop sharply even after retraining. This is mainly because they rely heavily on finger or palm support rather than stably holding the object. As a result, they degrade sharply once the palm moves away from the up-

Table 3. Generalization & Robustness Evaluation.

	Grasp		Relocate				Rotate		Translate	
Setting	SR $\uparrow$	SR $\uparrow$	PE $\downarrow$	AE $\downarrow$	SR $\uparrow$	Rot. $\uparrow$	SR $\uparrow$	Trans. $\uparrow$	SR $\uparrow$	Trans. $\uparrow$
Allegro	98.7	99.0	0.54	0.0134	98.8	13.6	99.1	20.3	98.8	18.1
Allegro (Uns.)	95.8	98.6	0.50	0.0152	98.3	14.5	96.0	18.1	95.3	10.3
MANO	96.8	96.6	1.26	0.0207	94.5	10.3	95.3	10.3	99.0	17.8
Sharpa Wave	99.1	98.0	0.80	0.0116	98.5	13.5	99.0	17.8	98.4	13.7
Allegro (Dis.)	98.6	99.0	0.55	0.0136	98.4	13.7	97.6	20.2		

ward direction, as the object is much more likely to slip or drop. In contrast, our policy remains strong in this more difficult general setting, as it starts from grasping poses compatible with subsequent in-hand manipulation and keeps the object stably held throughout the manipulation process.

4.3. Generalization

4.3.1. Object Property Generalization

For a controlled quantitative evaluation of the generalization capabilities, we construct a test set by randomly sampling 100 spheres and 100 hexagonal prisms with all dimensions in $[0.045, 0.075]$ m, and 200 elongated octagonal prisms with diameter in $[0.045, 0.065]$ m and length in $[0.6, 0.8]$ m. As Tab. 3 (Allegro (Uns.)) shows, despite being trained only on boxes and cylinders, the policy achieves comparable performance on the unseen geometries, indicating its strong generalization. It consistently performs robust behaviors across non-convex and geometrically irregular objects as demonstrated in Fig. 3. More examples are in the supplementary material and video.

Notably, leveraging the interaction-aware object representation, the policy exhibits shape- and scale-adaptive manipulation strategies. As shown in the supplementary video, during in-hand rotation, it adapts finger motion patterns to object geometry (e.g., smooth wrapping for round objects vs. edge-aware periodic motions for prisms), and adjusts contact spacing and manipulation gaits across different scales and aspect ratios. These behaviors suggest that the policy learns transferable geometry-adaptive manipulation strategies rather than memorizing object-specific motions.

4.3.2. Hand Morphology Generalization

To further verify the generalization capability of our framework, we apply it to another two hands, with one unified policy trained for each. The first is MANO [44], a widely used human hand model, for which we build a simulatable hand with 26 degrees of freedom (4 per finger and 6 for the wrist) using the joint definitions from CPF [60]. The second is Sharpa Wave [47], an agile dexterous robot hand with five fingers and 28 degrees of freedom (6 for the wrist). The experimental settings are the same as in Sec. 4.2, except that all objects are scaled by 0.7 to match the smaller hand sizes. As shown in Tab. 3, while there are some slight performance drops for MANO due to its more limited joint ranges, our

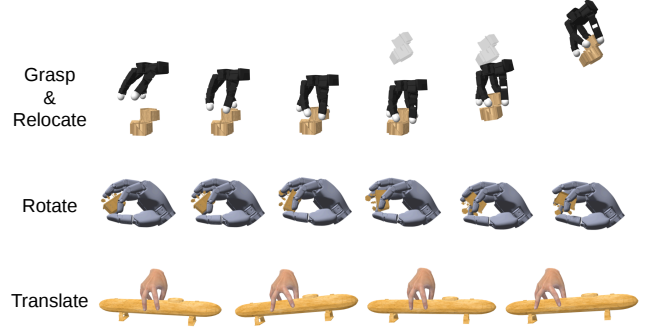


Figure 3. Qualitative results on different hand morphologies and geometrically irregular non-convex unseen objects.

framework achieves overall good performance among all three hands, demonstrating its morphology-agnostic generalization capability. Qualitative demonstrations are provided in Fig. 3, supplementary material, and video.

4.4. Robustness

As discussed before, we aim to unify the manipulation behaviors where the object remains stably constrained by the hand throughout interaction. To evaluate this property, we conduct an experiment with random forces applied to the object as external disturbances. Specifically, at each episode reset, we sample a force with a random direction and a magnitude randomly drawn from $[0, 10m_{\text{obj}}g]$, where m_{obj} denotes the object mass and g is gravitational acceleration magnitude. For relocation, rotation, and translation, the force is applied for the whole episode, while for grasping, it is applied during lifting. As shown in Tab. 3 (Allegro (Dis.)), rotation and translation show slightly larger performance drops than grasping and relocation, as stably constraining the object is more challenging during relative hand-object motion. However, the policy overall remains robust to disturbances, indicating that the hand can stably hold the object even under persistent perturbations.

4.5. Long-horizon Manipulation

With cross-skill capability and state compatibility captured by the unified formulation, our unified policy naturally supports long-horizon manipulation by chaining different skills, which is infeasible for prior per-skill methods due to their skill-specific settings. We evaluate this capability on the two groups of test objects with sequences of either grasp + relocate + rotate (Gr. + Re. + Rot.) or grasp + relocate + translate (Gr. + Re. + Trans.). Each test object is evaluated with 25 random poses on the table. The policy continuously executes a seamless sequence: starting from the initial pose, it grasps the object, relocates it to a target pose randomly sampled within the same ranges as in Sec. 4.1.2, and continues to perform in-hand rotation

Table 4. Long-horizon Manipulation.

Sequence	Grasp SR $\uparrow$	Relocate SR $\uparrow$	In-hand SR $\uparrow$	Overall SR $\uparrow$
Gr. + Re. + Rot.	99.7	92.2	95.1	87.4
Gr. + Re. + Trans.	99.9	98.3	98.0	96.3

or translation along a randomly selected direction, all in a single continuous execution. We count a sequence as successful only if all three phases succeed, including grasping (the object is lifted without dropping), relocation (the object arrives at the target pose within 3 cm and 0.15 rad), and in-hand manipulation (rotation or translation exceeds $\pi/2$ rad or 5 cm respectively without object dropping).

We report the per-phase and overall success rates in Tab. 4. The rotation success rate is lower than in the per-skill evaluation because, after relocation, the hand starts from downward or diagonally downward orientations rather than from randomly sampled ones, making the task inherently more challenging as the object is more prone to slipping or dropping. In addition, since relocation starts immediately after grasping, residual motion from the grasping phase can perturb the subsequent relocation, which explains the slight relocation performance drop observed on the smaller wrappable objects used in the rotation sequences. Nevertheless, the policy achieves consistently good overall performance for the long-horizon manipulation tasks, demonstrating the cross-skill capability and state compatibility enabled by our unified framework. We provide some qualitative results in Fig. 1, and more demonstrations are provided in the supplementary material and video.

4.6. Ablation

Our relation-driven formulation shares observation, action, and reward structures, in which the target-conditioned components play an important role. To verify their contribution, we ablate the target pose observation $\mathbf{g}_t^{\text{target}}$ (W/o Tar. Obs.), the tracking reward r_t^{track} (W/o Tar. Rew.), and the residual wrist action (W/o Tar. Act.), where the wrist $\mathbf{q}_t^{\text{ref}}$ is set to $\mathbf{q}_{t-1}^{\text{act}}$ as for the finger joints. As shown in Tab. 5, all three variants degrade performance, indicating that the target-conditioned components collectively encode manipulation objectives across observation, action, and reward spaces. Specifically, W/o Tar. Act. hurts relocation most as it impairs efficient wrist exploration for large-amplitude motions. W/o Tar. Rew. also drops relocation without dense pose-tracking supervision, while the other skills which do not require exact pose matching degrade less since r_t^{goal} still provides interaction objectives. W/o Tar. Obs. gets relatively less performance drop, as $\mathbf{d}^h$ still preserves relational-relevant objective information.

To further demonstrate the effectiveness of the formulation, we also compare our unified policy with the ten per-skill experts it is distilled from (Experts in Tab. 5). Although

Table 5. Ablation Study.

Method	Grasp		Relocate			Rotate		Translate	
	SR $\uparrow$	SR $\uparrow$	PE $\downarrow$	AE $\downarrow$		SR $\uparrow$	Rot. $\uparrow$	SR $\uparrow$	Trans. $\uparrow$
W/o Tar. Obs.	96.0	98.2	0.60	0.0158		98.6	13.1	98.9	19.5
W/o Tar. Act.	94.5	37.4	2.95	0.1828		98.5	12.7	96.1	19.7
W/o Tar. Rew.	98.5	62.9	5.47	0.0176		98.4	13.5	91.9	20.1
W/o Distance	96.7	98.9	0.58	0.0134		96.5	12.2	98.8	16.4
W/o Contact	96.9	99.0	0.55	0.0129		82.7	8.78	98.1	14.4
Experts	99.0	99.1	0.53	0.0140		99.1	14.1	99.3	20.5
Ours	98.7	99.0	0.54	0.0134		98.8	13.6	99.1	20.3

multi-skill distillation typically incurs degradation, our policy closely matches the experts on all four skills. This near-lossless distillation indicates that the motions learned under our formulation are compatible rather than conflicting across skills, so a single network of the same capacity can naturally capture them via simple vanilla DAGger.

We further remove distance vectors (W/o Distance) and contact states (W/o Contact) from the object representation to evaluate its cross-skill contribution. Relocation remains largely unaffected, as it requires little finger reconfiguration, making object geometry awareness less critical, while all other skills exhibit consistent performance drops. In particular, rotation suffers pronounced degradation in both success rate and rotation angle, and translation shows clear distance reduction despite its small success rate drop. These results verify that the interaction-aware representation effectively captures object geometry across different skills, which is particularly critical for more dynamic manipulation skills that require continuous fine-grained finger-object interactions and reconfigurations.

5. Conclusion

In this work, we presented a unified framework for cross-skill dexterous manipulation that models grasping, relocation, in-hand rotation, and in-hand translation from the hand-object relational perspective, leading to a unified formulation with shared state spaces, action spaces, and reward structures, and further enabling straightforward distillation of a single unified cross-skill policy. Experiments show strong per-skill performance, generalization to unseen geometries with adaptive behaviors, and robustness under disturbances. The framework supports different hand morphologies, and provides cross-skill compatibility for effective long-horizon manipulation. Overall, this work represents a meaningful step toward general-purpose hand-object motion synthesis, suggesting that different dexterous manipulation behaviors can be viewed as structured variations of a shared task formulation.

References

- [1] S. Andrews and P.G. Kry. Goal directed multi-finger manipulation: Control policies and analysis. *Computers & Graphics*, 37(7):830–839, 2013. 2
- [2] Samarth Brahmhatt, Cusuh Ham, Charles C Kemp, and James Hays. Contactdb: Analyzing and predicting grasp contact via thermal imaging. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8709–8719, 2019. 2
- [3] Jona Braun, Sammy Christen, Muhammed Kocabas, Emre Aksan, and Otmar Hilliges. Physically plausible full-body hand-object interaction synthesis. In *2024 International Conference on 3D Vision (3DV)*, pages 464–473. IEEE, 2024. 2
- [4] Junuk Cha, Jihyeon Kim, Jae Shin Yoon, and Seungryul Baek. Text2hoi: Text-guided 3d motion generation for hand-object interaction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1577–1585, 2024. 2
- [5] Yu-Wei Chao, Wei Yang, Yu Xiang, Pavlo Molchanov, Ankur Handa, Jonathan Tremblay, Yashraj S Narang, Karl Van Wyk, Umar Iqbal, Stan Birchfield, et al. Dexycb: A benchmark for capturing hand grasping of objects. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9044–9053, 2021. 2
- [6] Jiayi Chen, Yubin Ke, Lin Peng, and He Wang. Dexonomy: Synthesizing all dexterous grasp types in a grasp taxonomy. *Robotics: Science and Systems*, 2025. 2
- [7] Sirui Chen, Albert Wu, and C. Karen Liu. Synthesizing dexterous nonprehensile pregrasp for ungraspable objects. In *ACM SIGGRAPH 2023 Conference Proceedings*, New York, NY, USA, 2023. Association for Computing Machinery. 2
- [8] Sirui Chen, Jeannette Bohg, and C Karen Liu. Springgrasp: Synthesizing compliant, dexterous grasps under shape uncertainty. *Robotics: Science and Systems*, 2024. 2
- [9] Tao Chen, Megha Tippur, Siyang Wu, Vikash Kumar, Edward Adelson, and Pulkit Agrawal. Visual dexterity: In-hand reorientation of novel and complex object shapes. *Science Robotics*, 8(84):eadc9244, 2023. 1, 3
- [10] Sammy Christen, Muhammed Kocabas, Emre Aksan, Jemin Hwangbo, Jie Song, and Otmar Hilliges. D-grasp: Physically plausible dynamic grasp synthesis for hand-object interactions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022. 1, 2
- [11] Sammy Christen, Shreyas Hampali, Fadime Sener, Edoardo Remelli, Tomas Hodan, Eric Sauser, Shugao Ma, and Bugra Tekin. Diffh2o: Diffusion-based synthesis of hand-object interactions from textual descriptions. In *SIGGRAPH Asia 2024 Conference Papers*, pages 1–11, 2024. 3
- [12] Zicong Fan, Omid Taheri, Dimitrios Tzionas, Muhammed Kocabas, Manuel Kaufmann, Michael J Black, and Otmar Hilliges. Arctic: A dataset for dexterous bimanual hand-object manipulation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12943–12954, 2023. 2, 3
- [13] Anindita Ghosh, Rishabh Dabral, Vladislav Golyanik, Christian Theobalt, and Philipp Slusallek. Imos: intent-driven full-body motion synthesis for human-object interactions. In *Computer Graphics Forum*, pages 1–12. Wiley Online Library, 2023. 2
- [14] Linyi Huang, Hui Zhang, Zijian Wu, Sammy Christen, and Jie Song. FunGrasp: Functional grasping for diverse dexterous hands. *IEEE Robotics and Automation Letters*, 2025. 2
- [15] Hanwen Jiang, Shaowei Liu, Jiashun Wang, and Xiaolong Wang. Hand-object contact consistency reasoning for human grasps generation. In *Proceedings of the International Conference on Computer Vision*, 2021. 2
- [16] Jordan Juravsky, Yunrong Guo, Sanja Fidler, and Xue Bin Peng. Superpadl: Scaling language-directed physics-based control with progressive supervised distillation. In *SIGGRAPH 2024 Conference Papers*, 2024. 3
- [17] Maciej Kalisiak and Michiel Van de Panne. A grasp-based motion planning algorithm for character animation. *The Journal of Visualization and Computer Animation*, 12(3): 117–129, 2001. 2
- [18] Korrawe Karunratanakul, Jinlong Yang, Yan Zhang, Michael J Black, Krikamol Muandet, and Siyu Tang. Grasping field: Learning implicit representations for human grasps. In *2020 International Conference on 3D Vision (3DV)*, pages 333–344. IEEE, 2020. 2
- [19] Kushal Kedia, Tyler Ga Wei Lum, Jeannette Bohg, and C. Karen Liu. Simtoolreal: An object-centric policy for zero-shot dexterous tool manipulation, 2026. 3
- [20] Paul G Kry and Dinesh K Pai. Interaction capture and synthesis. *ACM Transactions on Graphics (TOG)*, 25(3):872–880, 2006. 2
- [21] Yuxuan Kuang, Sungjae Park, Katerina Fragkiadaki, and Shubham Tulsiani. Dex4d: Task-agnostic point track policy for sim-to-real dexterous manipulation. *arXiv preprint arXiv:2602.15828*, 2026. 3
- [22] Kailin Li, Puhao Li, Tengyu Liu, Yuyang Li, and Siyuan Huang. Maniptrans: Efficient dexterous bimanual manipulation transfer via residual learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. 2
- [23] Muchen Li, Sammy Christen, Chengde Wan, Yujun Cai, Renjie Liao, Leonid Sigal, and Shugao Ma. Latenthoi: On the generalizable hand object motion generation with latent hand diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17416–17425, 2025. 3
- [24] Ying Li, Jiabin L. Fu, and Nancy S. Pollard. Data-driven grasp synthesis using shape matching and task-based pruning. *IEEE Transactions on Visualization and Computer Graphics*, 13(4):732–747, 2007. 2
- [25] C. Karen Liu. Dextrous manipulation from a grasping pose. *ACM Trans. Graph.*, 28(3), 2009. 2
- [26] Xueyi Liu and Li Yi. Geneoh diffusion: Towards generalizable hand-object interaction denoising via denoising diffusion. In *The Twelfth International Conference on Learning Representations*, 2024. 2

- [27] Xueyi Liu, He Wang, and Li Yi. Dexndm: Closing the reality gap for dexterous in-hand rotation via joint-wise neural dynamics model, 2025. 3
- [28] Yunze Liu, Yun Liu, Che Jiang, Kangbo Lyu, Weikang Wan, Hao Shen, Boqiang Liang, Zhoujie Fu, He Wang, and Li Yi. Hoi4d: A 4d egocentric dataset for category-level human-object interaction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 21013–21022, 2022. 3
- [29] Yun Liu, Haolin Yang, Xu Si, Ling Liu, Zipeng Li, Yuxiang Zhang, Yebin Liu, and Li Yi. Taco: Benchmarking generalizable bimanual tool-action-object understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21740–21751, 2024. 2
- [30] Tyler Ga Wei Lum, Martin Matak, Viktor Makoviychuk, Ankur Handa, Arthur Allshire, Tucker Hermans, Nathan D. Ratliff, and Karl Van Wyk. DextrAH-g: Pixels-to-action dexterous arm-hand grasping with geometric fabrics. In *Conference on Robot Learning (CoRL)*, 2024. 3
- [31] Zhengyi Luo, Jinkun Cao, Sammy Christen, Alexander Winkler, Kris Kitani, and Weipeng Xu. Omnigrasp: Grasping diverse objects with simulated humanoids. *Advances in Neural Information Processing Systems*, 37:2161–2184, 2024. 2
- [32] Viktor Makoviychuk, Lukasz Wawrzyniak, Yunrong Guo, Michelle Lu, Kier Storey, Miles Macklin, David Hoeller, Nikita Rudin, Arthur Allshire, Ankur Handa, and Gavriel State. Isaac gym: High performance gpu-based physics simulation for robot learning, 2021. 3
- [33] Igor Mordatch, Zoran Popović, and Emanuel Todorov. Contact-invariant optimization for hand manipulation. In *Proceedings of the ACM SIGGRAPH/Eurographics Symposium on Computer Animation*, pages 137–144, 2012. 2
- [34] Liang Pan, Zeshi Yang, Zhiyang Dou, Wenjia Wang, Buzhen Huang, Bo Dai, Taku Komura, and Jingbo Wang. Tokenhsi: Unified synthesis of physical human-scene interactions through task tokenization. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 5379–5391, 2025. 3
- [35] Youxin Pang, Ruizhi Shao, Jiajun Zhang, Hanzhang Tu, Yun Liu, Boyao Zhou, Hongwen Zhang, and Yebin Liu. Manivideo: Generating hand-object manipulation video with dexterous and generalizable grasping. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. 2
- [36] Xiaogang Peng, Yiming Xie, Zizhao Wu, Varun Jampani, Deqing Sun, and Huaizu Jiang. Hoi-diff: Text-driven synthesis of 3d human-object interactions using diffusion models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 2878–2888, 2025. 2
- [37] Xue Bin Peng, Michael Chang, Grace Zhang, Pieter Abbeel, and Sergey Levine. Mcp: Learning composable hierarchical control with multiplicative compositional policies. *Advances in neural information processing systems*, 32, 2019. 3
- [38] Xue Bin Peng, Yunrong Guo, Lina Halper, Sergey Levine, and Sanja Fidler. Ase: Large-scale reusable adversarial skill embeddings for physically simulated characters. *ACM Trans. Graph.*, 41(4), 2022. 3
- [39] Nancy S. Pollard and Victor Brian Zordan. Physically based grasping control from example. In *Proceedings of the 2005 ACM SIGGRAPH/Eurographics Symposium on Computer Animation*, 2005. 2
- [40] Haozhi Qi, Brent Yi, Sudharshan Suresh, Mike Lambeta, Yi Ma, Roberto Calandra, and Jitendra Malik. General In-Hand Object Rotation with Vision and Touch. In *Conference on Robot Learning (CoRL)*, 2023. 3, 6, 12
- [41] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. In *Proceedings of Robotics: Science and Systems (RSS)*, 2018. 2
- [42] Hans Rijkema and Michael Girard. Computer animation of knowledge-based human grasping. *ACM Siggraph Computer Graphics*, 25(4):339–348, 1991. 2
- [43] Wonik Robotics. Allegro robot hand, 2013. <https://www.wonikrobotics.com/robot-hand>. 6
- [44] Javier Romero, Dimitrios Tzionas, and Michael J. Black. Embodied hands: Modeling and capturing hands and bodies together. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 36(6), 2017. 7
- [45] Stéphane Ross, Geoffrey Gordon, and Drew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, pages 627–635. JMLR Workshop and Conference Proceedings, 2011. 3, 5, 12
- [46] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv:1707.06347*, 2017. 3, 12
- [47] Sharpa. Sharp wave, 2025. <https://www.sharpa.com/pages/wave>. 7
- [48] Qijin She, Ruizhen Hu, Juzhan Xu, Min Liu, Kai Xu, and Hui Huang. Learning high-dof reaching-and-grasping via dynamic representation of gripper-object interaction. *arXiv preprint arXiv:2204.13998*, 2022. 3
- [49] Wenqian Sun, Binghui Zuo, Zimeng Zhao, Zijing Wu, and Yangang Wang. Two-stage diffusion for hands and articulated objects interaction synthesis. *Pattern Recognition*, 2026. 3
- [50] Omid Taheri, Nima Ghorbani, Michael J Black, and Dimitrios Tzionas. Grab: A dataset of whole-body human grasping of objects. In *European conference on computer vision*, pages 581–600. Springer, 2020. 2
- [51] Omid Taheri, Vasileios Choutas, Michael J. Black, and Dimitrios Tzionas. GOAL: Generating 4D whole-body motion for hand-object grasping. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022. 2
- [52] Omid Taheri, Yi Zhou, Dimitrios Tzionas, Yang Zhou, Duygu Ceylan, Soren Pirk, and Michael J. Black. GRIP: Generating interaction poses using latent consistency and spatial cues. In *International Conference on 3D Vision (3DV)*, 2024. 2
- [53] Chen Tessler, Yoni Kasten, Yunrong Guo, Shie Mannor, Gal Chechik, and Xue Bin Peng. Calm: Conditional adversarial latent models for directable virtual characters. In *ACM*

- SIGGRAPH 2023 Conference Proceedings*, New York, NY, USA, 2023. Association for Computing Machinery. 3
- [54] Chen Tessler, Yunrong Guo, Ofir Nabati, Gal Chechik, and Xue Bin Peng. Maskedmimic: Unified physics-based character control through masked motion inpainting. *ACM Transactions on Graphics (TOG)*, 2024. 3
- [55] Weikang Wan, Haoran Geng, Yun Liu, Zikang Shan, Yaodong Yang, Li Yi, and He Wang. Unidexgrasp++: Improving dexterous grasping policy learning via geometry-aware curriculum and iterative generalist-specialist learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3891–3902, 2023. 3
- [56] Yinhuai Wang, Runyi Yu, Hok Wai Tsui, Xiaoyi Lin, Hui Zhang, Qihan Zhao, Ke Fan, Miao Li, Jie Song, Jingbo Wang, et al. Learning generalizable hand-object tracking from synthetic demonstrations. *arXiv preprint arXiv:2512.19583*, 2025. 2
- [57] Yan Wu, Jiahao Wang, Yan Zhang, Siwei Zhang, Otmar Hilliges, Fisher Yu, and Siyu Tang. Saga: Stochastic whole-body grasping with contact. In *European Conference on Computer Vision*, pages 257–274. Springer, 2022.
- [58] Pei Xu and Ruocheng Wang. Synchronize dual hands for physics-based dexterous guitar playing. In *SIGGRAPH Asia 2024 Conference Papers*, New York, NY, USA, 2024. Association for Computing Machinery. 2
- [59] Sirui Xu, Hung Yu Ling, Yu-Xiong Wang, and Liangyan Gui. Intermimic: Towards universal whole-body control for physics-based human-object interactions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. 3
- [60] Lixin Yang, Xinyu Zhan, Kailin Li, Wenqiang Xu, Jiefeng Li, and Cewu Lu. CPF: Learning a contact potential field to model the hand-object interaction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11097–11106, 2021. 7
- [61] Zeshi Yang, Kangkang Yin, and Libin Liu. Learning to use chopsticks in diverse gripping styles. *ACM Transactions on Graphics (TOG)*, 41(4):1–17, 2022. 3
- [62] Yuting Ye and C. Karen Liu. Synthesis of detailed hand manipulations using contact sampling. *ACM Transactions on Graphics (TOG)*, 31(4), 2012. 2
- [63] Jessica Yin, Haozhi Qi, Jitendra Malik, James Pikul, Mark Yim, and Tess Hellebrekers. Learning in-hand translation using tactile skin with shear and normal force sensing. In *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*. IEEE, 2025. 1, 3, 6, 12
- [64] Zhao-Heng Yin, Changhao Wang, Luis Pineda, Francois Hogan, Krishna Bodduluri, Akash Sharma, Patrick Lancaster, Ishita Prasad, Mrinal Kalakrishnan, Jitendra Malik, et al. Dexteritygen: Foundation controller for unprecedented dexterity. *arXiv preprint arXiv:2502.04307*, 2025. 3
- [65] Xinyu Zhan, Lixin Yang, Yifei Zhao, Kangrui Mao, Hanlin Xu, Zenan Lin, Kailin Li, and Cewu Lu. Oakink2: A dataset of bimanual hands-object manipulation in complex task completion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 445–456, 2024. 2
- [66] He Zhang, Yuting Ye, Takaaki Shiratori, and Taku Komura. ManipNet: Neural manipulation synthesis with a hand-object spatial representation. *ACM Trans. Graph.*, 2021. 2
- [67] Hui Zhang, Sammy Christen, Zicong Fan, Otmar Hilliges, and Jie Song. GraspXL: Generating grasping motions for diverse objects at scale. In *European Conference on Computer Vision*, pages 386–403. Springer, 2024. 2, 3, 4, 6, 12
- [68] Hui Zhang, Sammy Christen, Zicong Fan, Luocheng Zheng, Jemin Hwangbo, Jie Song, and Otmar Hilliges. ArtiGrasp: Physically plausible synthesis of bi-manual dexterous grasping and articulation. In *2024 International Conference on 3D Vision (3DV)*, pages 235–246. IEEE, 2024. 3
- [69] Hui Zhang, Zijian Wu, Linyi Huang, Sammy Christen, and Jie Song. RobustDexGrasp: Robust dexterous grasping of general objects. In *Conference on Robot Learning (CoRL)*, 2025. 3
- [70] Jiajun Zhang, Yuxiang Zhang, Liang An, Mengcheng Li, Hongwen Zhang, Zonghai Hu, and Yebin Liu. Manidext: Hand-object manipulation synthesis via continuous correspondence embeddings and residual-guided diffusion. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2025. 3
- [71] Wanyue Zhang, Rishabh Dabral, Vladislav Golyanik, Vasileios Choutas, Eduardo Alvarado, Thabo Beeler, Marc Habermann, and Christian Theobalt. Bimart: A unified approach for the synthesis of 3d bimanual interaction with articulated objects. In *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2025. 2, 3
- [72] Wenping Zhao, Jianjie Zhang, Jianyuan Min, and Jinxiang Chai. Robust realtime physics-based motion control for human grasping. *ACM Transactions on Graphics (TOG)*, 32(6):1–12, 2013.
- [73] Juntian Zheng, Qingyuan Zheng, Lixing Fang, Yun Liu, and Li Yi. Cams: Canonicalized manipulation spaces for category-level functional hand-object manipulation synthesis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023. 2, 3
- [74] Keyang Zhou, Bharat Lal Bhatnagar, Jan Eric Lenssen, and Gerard Pons-Moll. Gears: Local geometry-aware hand-object interaction synthesis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. 3

UniCross: Unified Cross-Skill Dexterous Manipulation Synthesis

Supplementary Material

The supplementary material includes this PDF and a video, which show qualitative results of our method.

A. Implementation Details

As explained in Section 3, we use PPO [46] to train the per-skill policies, and DAgger [45] to distill the ten policies into a single multi-skill policy. The policies share the same network structure, with one MLP encoder for the relational-based objective features $\mathbf{g}_t$, and one main MLP that predicts the actions with $\mathbf{s}_t^h, \mathbf{s}_t^o$ and the output of the encoder as input. The encoder has 2 hidden layers with dimensions [128, 64], while the main MLP has 3 hidden layers with dimensions [512, 256, 128]. We present the PPO hyperparameters in Tab. 6, and the DAgger hyperparameters in Tab. 7. We further provide the reward coefficients in Tab. 8.

Table 6. Hyperparameters of PPO.

Hyperparameter	Value
Discount factor γ	0.99
GAE parameter λ	0.95
Learning rate	0.005
KL threshold	0.02
Truncate gradients	True
Max. gradient norm	1.0
Mini epochs	5
Batch size	32768
Episode length (rotation)	400
Episode length (other skills)	64
Horizon length (grasp & relocate)	64
Horizon length (rotation & translation)	8

Table 7. Hyperparameters of DAgger.

Hyperparameter	Value
Batch size	16384
Learning rate	3.0e-4
Max. epochs	3500
Gradient updates per epoch	100
Rollout steps	32
Replay buffer size	1.0e6
Expert query rate	100%

B. Baseline Details

Even though there are some previous works that address dexterous manipulation with isolated skills, they usually have different focuses or run under more limited settings compared with ours. As a result, we adapt the baselines for the general setting evaluation.

Table 8. Reward coefficients.

Reward Term	Reward Coefficient	Value
<i>Interaction Objective</i> (r_t^{goal})	w_{dis} (grasp)	20.0
	w_{dis} (other skills)	0.2
	w_{con} (grasp)	0.75
	w_{con} (other skills)	0.075
	w_f (grasp)	0.05
	w_f (other skills)	0.005
	w_p (grasp & relocate)	0.0
	w_p (rotation)	1.0
<i>Target Tracking</i> (r_t^{track})	w_p (translation)	10.0
	w_{opr} (object position, root frame)	-5.0
	w_{oqr} (object quaternion, root frame)	-1.0
	w_{oph} (object position, wrist frame)	-5.0
	w_{oqh} (object quaternion, wrist frame)	-1.0
	w_{hpr} (hand position, root frame)	-15.0
<i>Regularization</i> (r_t^{reg})	w_{hqr} (hand quaternion, root frame)	-3.0
	w_{pose} (finger pose penalty)	-0.3
	w_{vel} (wrist translational velocity)	-0.5
	w_{ang} (wrist angular velocity)	-0.05
	w_τ (torque magnitude)	-0.1
	w_{drop} (drop penalty)	-10.0

GraspXL [67] focuses on generating grasping motions with diverse approach directions regardless of table collision. To adapt it for our setting, we apply the top-down approach direction and add a table collision penalty reward term during training for a fair comparison.

The rotation baseline RotateIt [40] and the translation baseline [63] are both designed for a hand-up setting with fixed wrists, and they highly rely on the palm support to stabilize the object. For a fair comparison, we utilize their teacher policy as the baseline. For [63], specifically, as it encourages translation to a specific target position instead of continuous translation, we change the reward to encourage translation along the target axis.

C. Domain Randomization

During training, we randomize several low-level physical parameters to improve robustness. Specifically, the object mass is randomly sampled at every reset from [0.002, 0.04] kg, while the contact friction coefficient is randomly sampled from [0.3, 3.0] and applied consistently to both the hand and the object. We also inject additive joint-position noise with magnitude 0.02 rad, i.e., each joint observation is perturbed by i.i.d. uniform noise $\epsilon_q \sim \mathcal{U}(-0.02, 0.02)$ before being fed to the policy. For external perturbations, we inject random forces on the object, which are randomly

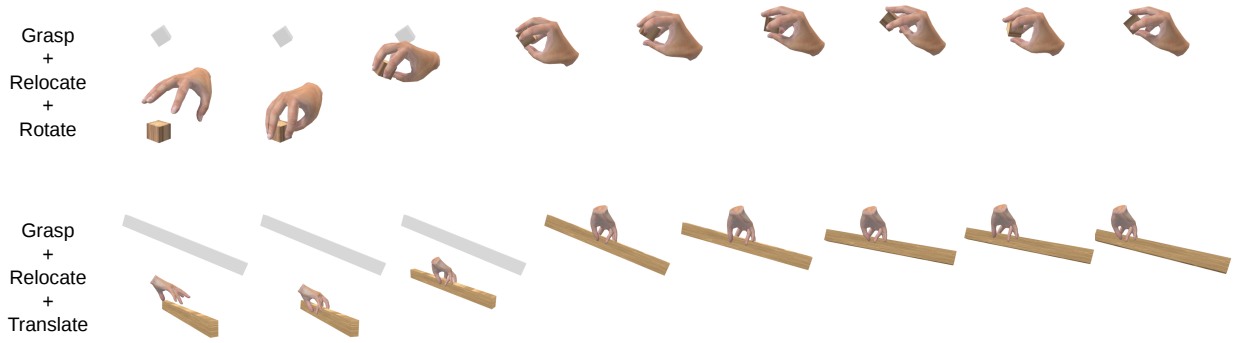


Figure 4. Human Hand long-horizon manipulation

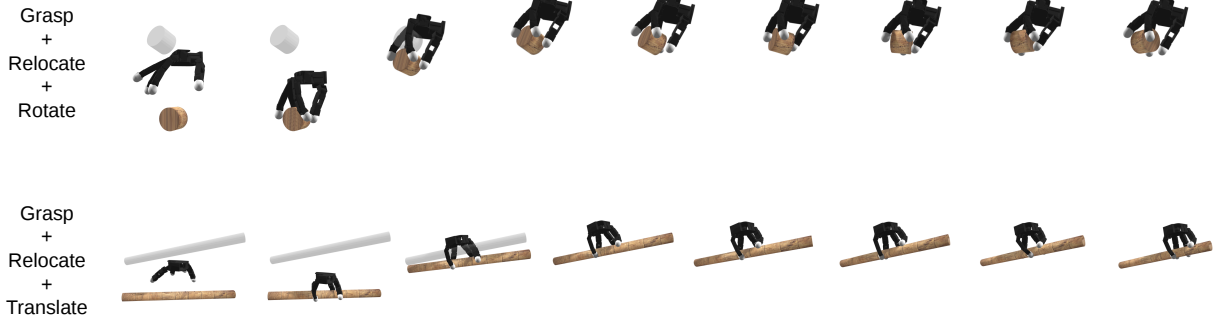


Figure 5. Allegro long-horizon manipulation

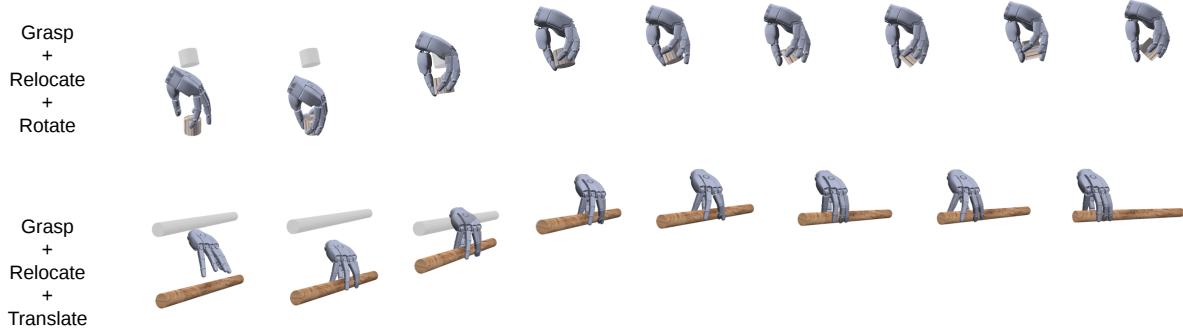


Figure 6. Sharpa Wave long-horizon manipulation

sampled with $\mathbf{f} = 2.0 m_{\text{obj}} \epsilon_f$, where $\epsilon_f \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_3)$ and m_{obj} is the object mass. At each simulation step, the current perturbation force decays by 0.9, or is replaced by a new $\mathbf{f}$ with probability 0.25.

D. Additional Qualitative Results

We provide qualitative long-horizon manipulation results for the MANO, Allegro, and Sharpa Wave hands in Figs. 4 to 6. More qualitative results are provided in the supplementary video.

E. Initial finger poses for grasping

As explained in Section 4, we utilize two object groups for both training and evaluation (with wrappable objects for rotation and elongated objects for translation). We design the initial finger poses to facilitate the generation of grasping poses feasible for subsequent in-hand manipulation. Intuitively, the fingers should spread to cover different directions for wrappable objects to facilitate the subsequent rotation, while there should be at least two fingers on each side of the elongated object to support the subsequent translation. Specifically, with the Allegro Hand model, the initial finger pose is set to be $\theta_0 = [0.3, 1.544, 0.265, 0.298, 1.104, 1.13, 0.853, -0.138, 0.005, 0.8, 0.080, 0.150, -0.3, 1.537, 0.285, 0.317]$ for wrappable objects, and $\theta_1 = [0.47, 1.2, 0.13, 0.2, 1.15, 1.15, 0.51, 0.16, -0.3, 0.8, 0.1, 0.2, -0.47, 1.6, 0.56, 0.28]$ for elongated objects, corresponding to the joint angles for index, thumb, middle, and ring fingers, respectively. For the MANO hand model, the initial finger pose is set to be $\theta_0 = [0.7, 0.95, 0.3, 0.2, 0.15, 0.8, 0.3, 0.2, -0.7, 1.15, 0.3, 0.2, -0.5, 0.95, 0.3, 0.2, 1.5, 0.5, 0.3, 0.2]$ for wrappable objects, and $\theta_1 = [0.5, 0.4, 0.2, 0.2, -0.5, 0.3, 0.1, 0.1, -0.2, 1.5, 0.0, 0.0, -0.2, 1.5, 0.0, 0.0, 1.0, 0.5, 0.3, 0.2]$ for elongated objects, corresponding to the joint angles for index, middle, pinky, ring, and thumb fingers, respectively.