

SemAnCorr: Semantic Anchored Correspondence for Zero-Shot Manipulation Skill Transfer

Xiaoxiang Dong¹ William Baron^{1,2} Hongyi Chen¹ Uksang Yoo^{1,3} Jeffrey Ichnowski^{1,†} Weiming Zhi^{2,4,†}

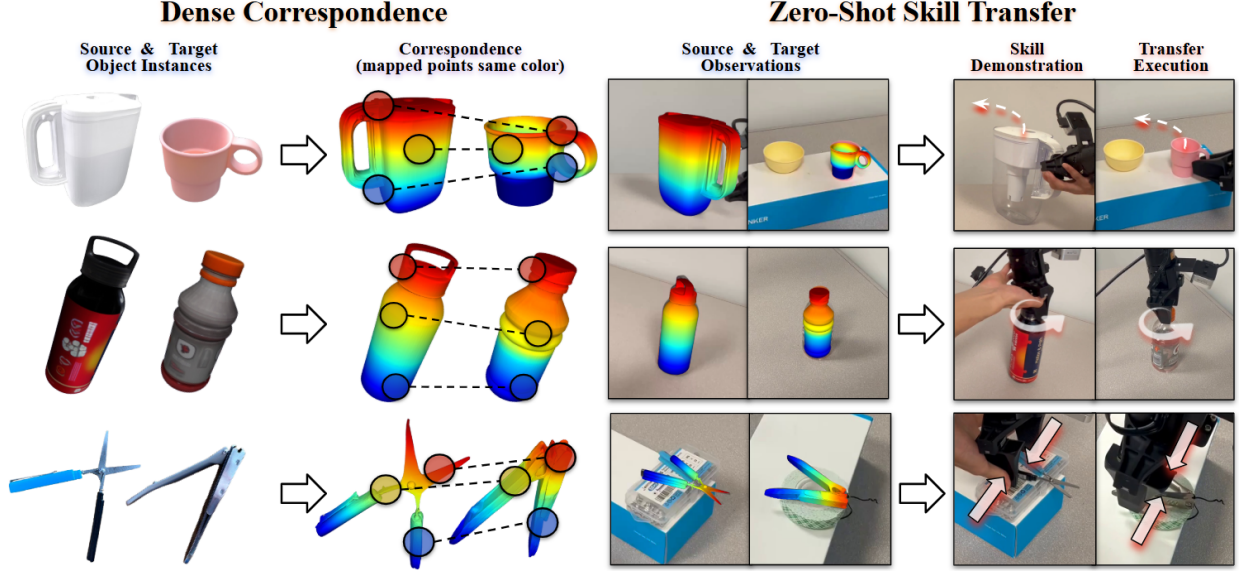


Fig. 1: We propose **SemAnCorr**, a dense vertex-level correspondence across geometrically diverse object instances that respects semantically similar parts between objects while smoothly spanning object surface (left). The resulting correspondence enables zero-shot transfer of manipulation skills across instances that share functional structure but differ in geometry (right).

Abstract—Transferring manipulation skills across object instances that share functionality but differ in geometry remains a fundamental challenge in robot learning. While recent correspondence methods leverage dense visual descriptors and 3D feature fields, nearest-neighbor feature matching often produces spatially incoherent correspondences that fail to recover the local geometric frames required for reliable skill transfer. We introduce **SemAnCorr**, a training-free framework that establishes dense correspondence by selecting semantically consistent anchor regions through joint pose-correspondence optimization and propagating these constraints over the object surface using functional maps. The resulting correspondences preserve both semantic consistency and geometric coherence, enabling object-centric manipulation skills to transfer across geometrically diverse instances. We evaluate **SemAnCorr** on a dense correspondence benchmark built on PartNet-Mobility, achieving 90.8% semantic accuracy in our benchmark evaluation while improving geometric coherence over recent state-of-the-art baselines. Finally, we show that these improvements translate directly into real-world manipulation performance: using a single demonstration, **SemAnCorr** enables substantially more reliable zero-shot manipulation skill transfer to previously unseen objects than existing correspondence methods. Videos and additional visualizations are available at semancorr.github.io.

I. INTRODUCTION

A robot should be able to reuse a manipulation skill it learned on a new object that serves the same function, even when its geometry is substantially different: a mug with a

different handle shape, a bottle with a different cap, a pair of pliers with a different jaw length.

Existing approaches typically transfer demonstrations by identifying semantically corresponding interaction regions or affordances. While sufficient for locating approximate contact regions, these methods often fail to capture the functional intent of manipulation skills: not just where to interact with an object, but how, in what sequence, and with what relationship to the object’s articulated structure.

Dense correspondence naturally addresses this limitation by preserving a dense mapping between object surfaces. For manipulation, semantic correspondence determines **where** a robot should interact, whereas geometrically coherent correspondence determines **how** that interaction should be executed through the recovery of consistent local geometric frames. Effective skill transfer therefore requires correspondences that are both semantically consistent and geometrically coherent, motivating a dense correspondence formulation.

We propose *Semantic Anchored Correspondence* (**SemAnCorr**), a training-free framework that establishes dense correspondence across object instances by anchoring semantically meaningful regions and propagating these constraints over the object surface using functional maps (Fig. 1). By jointly preserving semantic consistency and geometric coherence, **SemAnCorr** recovers the local geometric structure required to transfer demonstrated manipulation skills across geometrically diverse objects.

We evaluate **SemAnCorr** on a dense correspondence benchmark constructed from PartNet-Mobility [1] and validate its

¹ Robotics Institute, Carnegie Mellon University, USA.

² College of Connected Computing, Vanderbilt University, USA.

³ College of Engineering, University of California, Berkeley, USA.

⁴ School of Computer Science, The University of Sydney, Australia.

practical utility through real-world articulated manipulation. Experiments show that improved geometric correspondence translates directly into more reliable zero-shot manipulation skill transfer across previously unseen object instances.

In summary, this paper makes the following contributions:

- We introduce **SemAnCorr**, a training-free dense correspondence framework that combines semantic anchor selection with functional map propagation to produce correspondences that are both semantically consistent and geometrically coherent.
- We construct a **dense correspondence benchmark** on PartNet-Mobility that evaluates both semantic accuracy (*where* to interact) and geometric coherence (*how* to execute the interaction).
- We develop an **object-centric manipulation skill transfer pipeline** that leverages SemAnCorr to transfer demonstrated skills across object instances, enabling zero-shot articulated manipulation from a single demonstration.

II. RELATED WORK

Dense 3D Correspondence. Classical functional map methods [2] use geometric descriptors such as WKS [3] to establish surface correspondences, but rely solely on intrinsic geometry and fail across semantically diverse objects. Deep functional map methods [4] learn optimized feature extractors but require category-specific training data. DenseMatcher [5] combines SD-DINO features with a learned DiffusionNet refiner and functional maps, achieving strong cross-category correspondence. SemAnCorr shares the functional map backbone but replaces learned feature refinement with semantic anchor selection from pretrained features, enabling training-free generalization at the cost of per-object-pair optimization.

Semantic Correspondence for Manipulation. Establishing semantic correspondence has emerged as a principled approach to manipulation skill transfer without large-scale demonstration collection [6]. Recent work leverages 2D foundation model features for zero-shot correspondence: DIFT [7] extracts correspondences from diffusion features, SD-DINO [8] fuses Stable Diffusion and DINOv2 for richer representations, and Robo-ABC [9] and RAM [10] apply these ideas to affordance transfer and demonstration retrieval respectively. UAD [11] distills affordance knowledge unsupervisedly from visual features. Adapt by Analogy [12] further extends functional correspondence to the policy level, mapping OOD observations to in-distribution training conditions. While effective, these 2D approaches neglect 3D geometric orientation such as interaction poses, that are crucial for articulated object manipulation.

3D Feature Fields for Manipulation Generalization. Lifting visual features into 3D has proven effective for manipulation generalization [6], [13]. D3Fields [14] builds dynamic 3D descriptor fields by lifting DINOv2 features from RGB-D observations, and O3Afford [15] combines 3D features with cross-attention for one-shot affordance grounding. 3D descriptor fields excel at capturing fine-grained local semantics; however, point-wise nearest-neighbor matching can generate spatially incoherent correspondences across distant surface regions. Building on 3D descriptor fields, we introduce func-

tional map propagation to enforce global surface smoothness.

Affordance Learning and Tool-Use Manipulation. Affordance learning for tool use has been approached through actionability prediction [16], [17] and part-centric representations [18], establishing which object regions support specific manipulation actions. AdaAfford [19] extends this to few-shot generalization across instances. However, these methods require category-specific training and do not address transferring demonstrated tool-use skills to novel object instances.

Keypoint and retrieval-based methods offer more transferable representations: KETO [20] learn task-specific and SE(3)-equivariant keypoints respectively for tool manipulation, GIFT [21] identifies functional affordances without labels, and recent work explores task-oriented grasping via imitation [22], robust grasp transfer [23], and training-free retrieve-align pipelines [24]. While effective for grasping, these methods rely on sparse keypoints or coarse alignment and cannot recover the local geometric frames. SemAnCorr addresses this by establishing dense surface correspondence that transfers complete functional signatures without task-specific training.

III. PROBLEM STATEMENT

Given two object instances represented as triangular meshes $\mathcal{M}_1 = (\mathcal{V}_1, \mathcal{F}_1)$ and $\mathcal{M}_2 = (\mathcal{V}_2, \mathcal{F}_2)$, where $\mathcal{V}_i \subset \mathbb{R}^3$ denotes the vertex set and $\mathcal{F}_i$ the set of faces, the goal is to compute a dense vertex-level correspondence $f : \mathcal{V}_1 \rightarrow \mathcal{V}_2$ that is both **semantically consistent**: semantically similar parts correspond to each other, and **geometrically coherent**: the correspondence is smooth and spans the full object surface. We assume each mesh forms a single connected component, which our functional map formulation (Section IV-C) requires for a well-posed spectral basis. To ground the correspondence in semantic structure, we assume there exists α semantically corresponding region pairs between $\mathcal{M}_1$ and $\mathcal{M}_2$: $\mathcal{K} = \{(k_1^i, k_2^i) \mid i = 1, \dots, \alpha\}$, where $k_1^i \subset \mathcal{V}_1$ and $k_2^i \subset \mathcal{V}_2$ are vertex subsets representing semantically similar parts. These regions serve as high-level *semantic anchors* that constrain f :

$$f(k_1^i) \approx k_2^i, \quad \forall i = 1, \dots, \alpha, \quad (1)$$

where the approximation indicates a small error, while f varies smoothly over the surface beyond the anchor regions. Given such a correspondence, any object-relative quantity defined on $\mathcal{M}_1$ can be transferred to $\mathcal{M}_2$ by applying f .

IV. METHOD: SEMANTIC ANCHORED CORRESPONDENCE

At a high level, the proposed method first identifies semantically meaningful parts on each object’s surface, then selects a small set of corresponding part pairs that are consistent in both meaning and geometry, and finally uses these pairs as constraints to smoothly propagate a dense correspondence across the object surface. These stages are illustrated in Fig. 2.

A. 3D Semantic Acquisition and Clustering

Let $\mathcal{M} = (\mathcal{V}, \mathcal{F})$ denote a triangular surface mesh of a 3D object as defined in Section III. To obtain multi-view observations of the 3D surface, we define a set of N virtual cameras $\{\mathcal{C}_i\}_{i=1}^N$ and generate RGB images $\mathcal{R}$:

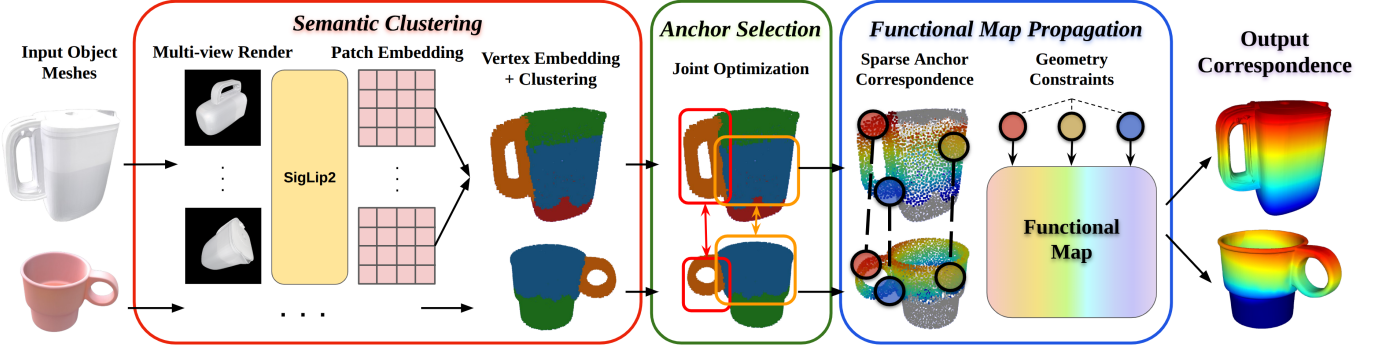


Fig. 2: Overview of the proposed SemAnCorr framework. To capture rich semantic representations, SemAnCorr extracts semantic embeddings using pretrained models and lifts them into 3D, and then used to identify semantic clusters (Section IV-A, red box); Corresponding anchor regions are selected through joint semantic-geometric optimization (Section IV-B, green box), which constrain a functional map (Section IV-C, blue box) to produce smooth, dense correspondences.

$\{ \mathbf{I}_i = \mathcal{R}(\mathcal{M}; \mathcal{C}_i) \mid i = 1, \dots, N \}$ using a differentiable renderer, each corresponds to a distinct viewpoint of the mesh.

Semantic Feature Extraction. For each rendered image $\mathbf{I}_i$, we extract per-patch semantic embeddings using the pretrained SigLip2Vision model [25]. To obtain richer representations than a single hidden layer, we average the last 4 hidden states of the model, yielding

$$\mathbf{E}_i = \Phi(\mathbf{I}_i) = \{ \mathbf{e}_i^{(p)} \in \mathbb{R}^d \}_{p=1}^P, \quad (2)$$

where P is the number of image patches and d the embedding dimension. Each patch embedding $\mathbf{e}_i^{(p)}$ is associated with a 3D surface location via a lifting operator $\mathcal{L}_i : \mathbb{R}^2 \rightarrow \mathbb{R}^3$, defined using camera parameters and depth from the rendering stage. Applying $\mathcal{L}_i$ to each patch and aggregating across all views yields a semantic point cloud $\mathcal{P}_s = \{ (\mathbf{p}_j, \mathbf{s}_j) \}_{j=1}^M$, where each point $\mathbf{p}_j \in \mathcal{M}$ is endowed with a semantic embedding $\mathbf{s}_j \in \mathbb{R}^d$, computed as the mean of all patch embeddings whose lifted 3D location is nearest to $\mathbf{p}_j$.

Semantic Clustering. Given $\mathcal{P}_s$, we partition the object surface into semantically coherent part regions. We first reduce the embedding dimensionality via principle component analysis and form a joint feature vector for each point by concatenating the reduced semantic embedding with its normalized 3D position. We then apply k -means clustering in this joint feature space to obtain an initial partition of K clusters.

To produce contiguous parts, SemAnCorr refines the initial clusters by splitting spatially disconnected regions into separate parts and merging small fragments into their nearest neighboring cluster. This results in a set of K semantically meaningful parts $\{ \mathcal{C}_c \}_{c=1}^K$, each with an associated embedding

$$\bar{\mathbf{s}}_c = \frac{1}{|\mathcal{C}_c|} \sum_{(\mathbf{p}_j, \mathbf{s}_j) \in \mathcal{C}_c} \mathbf{s}_j, \quad (3)$$

which is as a compact descriptor for downstream computation.

B. Joint Alignment and Anchor Selection

Given cluster embeddings $\{ \bar{\mathbf{s}}_c^{(1)} \}_{c=1}^{K_1}$ and $\{ \bar{\mathbf{s}}_{c'}^{(2)} \}_{c'=1}^{K_2}$ from two object meshes $\mathcal{M}^{(1)}$ and $\mathcal{M}^{(2)}$, our goal is to identify α high-confidence semantic anchor pairs $\mathcal{A} = \{ (c, c') \}$ that constrain the downstream functional map.

Relative Cosine Similarity. Directly comparing raw cluster embeddings conflates object-level category signal with part-

discriminative signal: two objects of the same category will have uniformly high cosine similarity across all cluster pairs, making part-level discrimination difficult. To isolate the residual part-discriminative signal from category-level features, we subtract each object’s mean embedding prior to comparison:

$$\tilde{\mathbf{s}}_c^{(i)} = \frac{\bar{\mathbf{s}}_c^{(i)} - \mu^{(i)}}{\| \bar{\mathbf{s}}_c^{(i)} - \mu^{(i)} \|_2 + \epsilon}, \quad \mu^{(i)} = \frac{1}{K_i} \sum_c \bar{\mathbf{s}}_c^{(i)}, \quad (4)$$

and compute the relative similarity matrix $\mathbf{S} \in \mathbb{R}^{K_1 \times K_2}$ as

$$\mathbf{S}_{cc'} = \langle \tilde{\mathbf{s}}_c^{(1)}, \tilde{\mathbf{s}}_{c'}^{(2)} \rangle. \quad (5)$$

Bilateral Margin Anchor Selection. We rank anchor pair candidates by *bilateral margin confidence*, a measure of mutual exclusivity that captures how strongly each cluster prefers its proposed match over all alternatives:

$$m_{\text{row}}(c, c') = \mathbf{S}_{cc'} - \max_{k \in \{1, \dots, K_2\}, k \neq c'} \mathbf{S}_{ck}, \quad (6)$$

$$m_{\text{col}}(c, c') = \mathbf{S}_{cc'} - \max_{k \in \{1, \dots, K_1\}, k \neq c} \mathbf{S}_{kc'}, \quad (7)$$

$$\text{conf}(c, c') = \min(m_{\text{row}}(c, c'), m_{\text{col}}(c, c')). \quad (8)$$

Here, $m_{\text{row}}(c, c')$ measures how much cluster c on $\mathcal{M}^{(1)}$ prefers c' over any other cluster on $\mathcal{M}^{(2)}$, and $m_{\text{col}}(c, c')$ measures the symmetric preference from c' ’s perspective. Taking the minimum enforces that both sides of the pair are mutually exclusive. We greedily select the α highest-confidence pairs subject to a bijectivity constraint: once a cluster is assigned, it is excluded from further selection, yielding an anchor set

$$\mathcal{A} \subset \{1, \dots, K_1\} \times \{1, \dots, K_2\}, \quad |\mathcal{A}| = \alpha, \quad (9)$$

which any distinct $(c_1, c'_1), (c_2, c'_2) \in \mathcal{A}$, $c_1 \neq c_2$ and $c'_1 \neq c'_2$.

Joint Pose-Correspondence Optimization. Initial anchor pairs from semantic similarity alone may be geometrically inconsistent: semantically similar clusters can correspond to spatially incompatible regions when objects differ significantly in geometry. We therefore refine the anchor correspondence by jointly optimizing a rigid alignment $(\mathbf{R}, \mathbf{t})$ between the two objects and a soft cluster correspondence. To factor out the global scale, we first normalize both objects to the unit sphere. We then define a joint score for each candidate pair (c, c') :

$$\text{Score}(c, c'; \mathbf{R}, \mathbf{t}) = \lambda_g \cdot \text{geo}(c, c'; \mathbf{R}, \mathbf{t}) + \lambda_s \cdot \mathbf{S}_{cc'}, \quad (10)$$

where $\text{geo}(c, c'; \mathbf{R}, \mathbf{t})$ measures geometric compatibility between cluster c (after applying $\mathbf{R}, \mathbf{t}$) and cluster c' , computed as a chamfer-based similarity between cluster point clouds:

$$\text{geo}(c, c'; \mathbf{R}, \mathbf{t}) = \exp(-d_{\text{Ch}}(\mathbf{R}\mathcal{P}_c^{(1)} + \mathbf{t}, \mathcal{P}_{c'}^{(2)})/2\sigma^2), \quad (11)$$

where $\mathcal{P}_c^{(i)}$ denotes points from cluster c on mesh $\mathcal{M}^{(i)}$, and d_{Ch} is the symmetric chamfer distance.

The pose is optimized against a soft-assignment objective in which each cluster on $\mathcal{M}^{(1)}$ distributes its correspondence over clusters on $\mathcal{M}^{(2)}$ according to the joint scores:

$$\mathcal{L}(\mathbf{R}, \mathbf{t}) = - \sum_{c=1}^{K_1} \sum_{c'=1}^{K_2} w_{cc'} \text{Score}(c, c'; \mathbf{R}, \mathbf{t}), \quad (12)$$

$$w_{cc'} = \text{softmax}_{c'}(\text{Score}(c, \cdot; \mathbf{R}, \mathbf{t})). \quad (13)$$

The soft weights $w_{cc'}$ act as an implicit correspondence that is co-updated with the pose: the semantic term steers which cluster pairs dominate the geometric alignment gradient, coupling the two even though $\mathbf{S}$ itself is pose-independent. We minimize $\mathcal{L}$ via gradient descent with B initializations, using a cosine schedule such that early iterations weight the assignment toward semantic similarity, pulling the pose to align semantically matched clusters, while later iterations shift weight toward geometric compatibility to refine the alignment. The joint scores of the best initialization $\text{Score}(c, c'; \mathbf{R}^*, \mathbf{t}^*)$ are the anchor confidence scores that are used for final anchor selection via bilateral margin confidence.

C. Semantic Anchored Functional Map

We compute the dense vertex-level correspondence using a functional map, a compact linear operator that encodes how functions defined on one surface transform to another. Rather than matching individual points directly, a functional map $\mathbf{C} \in \mathbb{R}^{k \times k}$ operates in a low-dimensional spectral basis formed by the first k Laplace-Beltrami eigenfunctions of each mesh. This spectral representation acts as a smoothness prior: since low-frequency eigenfunctions capture large-scale surface structure, bias the correspondence toward smooth variation. A dense pointwise map is then recovered from $\mathbf{C}$ by nearest-neighbor search in the induced spectral embedding space. We constrain this functional map using semantic anchors $\mathcal{A}$, ensuring it is grounded in semantically meaningful part structure while remaining spatially smooth across the surface.

Anchor Region Correspondence. For each anchor pair $(c, c') \in \mathcal{A}$, we find vertex correspondences within the anchor regions using the global alignment $(\mathbf{R}^*, \mathbf{t}^*)$ to pre-register the meshes. Within each region, we apply per-anchor normalization, so that each region is centered at its bounding-box center and scaled per-axis by its extents. Vertex correspondences are found by nearest-neighbor search in this normalized space, yielding anchor correspondences $(\mathcal{V}_2^{\text{anc}}, \mathcal{V}_1^{\text{anc}})$.

Functional Map Initialization and Refinement. We fit an initial functional map $\mathbf{C} \in \mathbb{R}^{k \times k}$ from a sparse set of n_{kp} keypoints subsampled per anchor cluster, which avoids over-constraining the spectral basis that collapses the pointwise map into a Voronoi partition:

$$\mathbf{C} = \arg \min_{\mathbf{C}} \left\| \Phi_2[\mathcal{V}_2^{\text{kp}}, :k] \mathbf{C} - \Phi_1[\mathcal{V}_1^{\text{kp}}, :k] \right\|_F^2, \quad (14)$$

where Φ_i denotes the Laplace-Beltrami eigenvector matrix for $\mathcal{M}^{(i)}$. An initial pointwise map is recovered by matching each $\mathcal{M}^{(2)}$ vertex to its nearest neighbor in the spectral embedding space $\Phi_2 \mathbf{C} \approx \Phi_1$. We then refine $\mathbf{C}$ using a geometry-constrained variant of ZoomOut [26], which progressively increases the basis dimension k while alternating between updating the functional map and the correspondence. At each step, we restrict each vertex to search among the k_{nb} spatial neighbors of its current match to prevent large jumps, and re-pin interior anchor correspondences after every update to prevent drift. This yields a correspondence that is semantically grounded within anchor regions and geometrically smooth across the surface.

V. EMPIRICAL EVALUATIONS

We evaluate SemAnCorr on both a manipulation dataset and real-world robotic settings to answer two questions:

- 1) *Can dense correspondence simultaneously preserve semantic consistency and geometric coherence across geometrically diverse object instances?*
- 2) *Does improved correspondence quality translate into more reliable zero-shot manipulation skill transfer?*

Throughout, correspondences are visualized by transferring a smooth color gradient from the source object to the target: smooth transitions indicate geometrically coherent mappings, while fragmented patterns indicate spatial inconsistencies.

A. Dataset and Implementation

We evaluate SemAnCorr on the PartNet-Mobility [1], a large-scale dataset of articulated objects with part-level semantic annotations: each mesh vertex $p \in V$ is associated with a semantic part label l_p . We select seven object categories comprising over 100 objects, covering both rigid and articulated objects. For each category, we evaluate all object pairs and report the mean and standard deviation of each metric.

We select key hyperparameters as follow: $K = 6$ semantic clusters, $\alpha = 3$ semantic anchors, and $k = 30$ Laplace-Beltrami basis functions. These parameters are fixed across all experiments. On an RTX 4090 GPU, the complete SemAnCorr pipeline computes dense correspondence for an object pair in approximately 6s on average, including semantic feature extraction, anchor optimization, and functional map estimation.

B. Evaluation Metrics

1) Semantic Accuracy.

We first evaluate whether a correspondence preserves part-level semantic meaning through *Semantic Accuracy* (sAcc). Given a correspondence $f : V_1 \rightarrow V_2$, each target vertex $p \in V_1$ is assigned the label $l_{f(p)}$ of its corresponding source vertex and compared against its ground-truth label l_p :

$$\text{sAcc} = \frac{1}{|P|} \sum_{p \in P} 1[l_p = l_{f(p)}], \quad (15)$$

where P denotes the target vertices with valid semantic labels.

2) Geometric Coherency.

We evaluate geometric coherence through two complementary properties: continuity and coverage.

Method	Scissors	Pliers	Eyeglasses	Knife	Suitcase	Bottle	Kettle	Average
FM-WKS	58.5 ± 10.7	63.7 ± 16.1	59.1 ± 15.1	34.3 ± 28.6	83.8 ± 25.1	62.5 ± 37.1	79.7 ± 14.4	63.1 ± 15.0
DenseMatcher	71.5 ± 16.7	69.4 ± 17.5	70.7 ± 14.8	63.3 ± 25.5	54.6 ± 28.8	54.9 ± 27.8	71.5 ± 7.0	65.1 ± 7.1
Robo-ABC	72.9 ± 9.1	74.4 ± 10.9	62.3 ± 18.5	51.9 ± 26.9	71.5 ± 14.8	46.9 ± 26.4	62.6 ± 6.8	63.2 ± 9.9
D3Fields	86.2 ± 4.3	88.9 ± 7.0	85.4 ± 7.8	85.8 ± 7.9	83.2 ± 13.3	78.9 ± 7.4	84.1 ± 8.1	84.6 ± 2.9
SemAnCorr (Ours)	88.5 ± 3.0	94.0 ± 2.5	93.5 ± 2.3	90.8 ± 3.8	92.2 ± 5.5	89.4 ± 4.5	86.9 ± 9.9	90.8 ± 2.5

TABLE I: Within-category semantic accuracy across object categories (sAcc ± Std, %).

	Continuity ↑	Coverage ↑	GCS ↑
FM-WKS	0.96 ± 0.01	0.003 ± 0.001	0.007 ± 0.003
DenseMatcher	0.93 ± 0.07	0.01 ± 0.01	0.01 ± 0.01
Robo-ABC	0.77 ± 0.11	0.07 ± 0.06	0.11 ± 0.10
D3Fields	0.61 ± 0.08	0.10 ± 0.07	0.16 ± 0.09
SemAnCorr (Ours)	0.93 ± 0.03	0.25 ± 0.11	0.40 ± 0.12

TABLE II: Geometric Coherence Score across categories.

Continuity (Cont). A geometrically coherent correspondence should preserve local neighborhoods: vertices adjacent on the target mesh should map to nearby points on the source. We measure this as the fraction of target mesh edges whose endpoints remain close after transfer. Let E_1 denote the edge set of $\mathcal{M}_1$ and $\bar{e}_2$ the mean edge length of $\mathcal{M}_2$. An edge $(u, v) \in E_1$ is *consistent* if its transferred endpoints lie within a tolerance of τ source edge lengths of each other (we set $\tau = 2$ in all experiments):

$$\text{Cont} = \frac{1}{|E_1|} \sum_{(u,v) \in E_1} \mathbb{1}[\|f(u) - f(v)\|_2 \leq \tau \bar{e}_2]. \quad (16)$$

Coverage (Cov). A useful correspondence should also preserve the global structure of the object rather than collapsing many vertices onto a small surface region. We therefore measure coverage as the fraction of source vertices that receive at least one correspondence:

$$\text{Cov} = \frac{|\{v' \in V_2 : \exists v \in V_1, f(v) = v'\}|}{|V_2|}. \quad (17)$$

Intuitively, low coverage means large regions of the demonstrated object have no counterpart on the novel object, so skills demonstrated there can’t transfer.


Geometric Coherence Score (GCS). A local interaction frame is, at its core, a set of directions anchored on the object surface, and each property supports one requirement for recovering it from correspondences: coverage ensures the mapped points retain enough spatial extent for a direction to be defined at all, while continuity ensures the defined directions are correct, since local displacement vectors transfer coherently only when neighboring vertices map to neighboring points. Since frame recovery requires both, we combine them using their harmonic mean:

$$\text{GCS} = \frac{2 \cdot \text{Cont} \cdot \text{Cov}}{\text{Cont} + \text{Cov}}. \quad (18)$$


The harmonic mean emphasizes the weaker component, making GCS a single manipulation-oriented measure of geometric correspondence quality used throughout the paper.

C. Baselines

We compare against 4 representative baselines spanning geometry- and semantics-driven correspondence approaches.

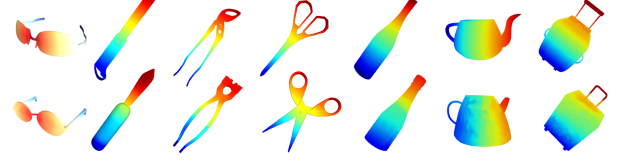

(a) SemAnCorr Inner-Category Correspondence. Top row objects are with source coloring, bottom row objects each vertex takes corresponding point coloring from the source.

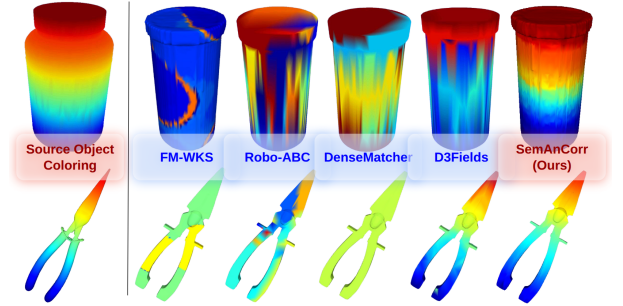

(b) Comparison to Baseline Method Visualization. Source object coloring on the left, corresponded object colorings on the right.

Fig. 3: Inner-Category Correspondence Visualization.

FM-WKS [3] estimates functional map correspondences using Wave Kernel Signature descriptors, operating purely on intrinsic geometric structure without any semantic information, serving as a lower bound on contribution of semantic features.

Robo-ABC [9] establishes pixel-level semantic correspondence in 2D image space using pretrained visual features. We render 8 viewpoints per mesh, take the highest-confidence 2D match, and lift it to 3D. This represents the class of 2D semantic correspondence methods applied to 3D.

D3Fields [14] constructs per-vertex 3D descriptors by lifting DINOv2 features from multi-view renders and performing nearest-neighbor matching in feature space. This baseline isolates the contribution of functional map propagation over nearest-neighbor given the same 3D feature lifting strategy.

DenseMatcher [5] combines SD-DINO features with a learned DiffusionNet refiner and functional maps. We evaluate its ability to generalize on our PartNet-Mobility categories.

D. Inner-Category Generalization

Semantic Accuracy. We evaluate semantic accuracy for each category and report the results in Table I. Correspondences are visualized for example object pairs in Fig. 3a for SemAnCorr, while Fig. 3b shows comparison across all methods. SemAnCorr outperforms all baselines in all 7 categories and achieves the highest average accuracy of 90.8%, a 6.2% improvement over the strongest baseline D3Fields.

Geometric Coherence Score. The geometric quality of correspondences are reported in Table II. FM-WKS achieves high

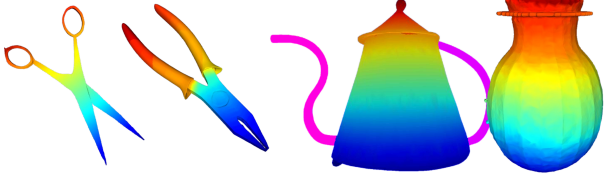


Fig. 4: Cross-Category Correspondence Visualization. On the left, Scissors $\rightarrow$ Pliers; On the right, Kettle $\rightarrow$ Bottle.

	Scissors $\rightarrow$ Pliers	Kettle $\rightarrow$ Bottle
FM-WKS	55.3 $\pm$ 14.7	72.3 $\pm$ 15.4
DenseMatcher	63.5 $\pm$ 18.9	65.2 $\pm$ 13.8
Robo-ABC	70.3 $\pm$ 12.1	52.4 $\pm$ 15.6
D3Fields	87.2 $\pm$ 4.6	83.4 $\pm$ 7.5
SemAnCorr (Ours)	89.7 $\pm$ 2.2	87.8 $\pm$ 4.2

TABLE III: Cross-category semantic accuracy (sAcc $\pm$ Std, %).

Bottle	0.460 ± 0.213	0.404 ± 0.055	0.281 ± 0.031	0.380 ± 0.124	0.274 ± 0.116	0.287 ± 0.092	0.249 ± 0.028	0.264 ± 0.038	0.247 ± 0.029
Kettle	0.400 ± 0.033	0.446 ± 0.152	0.424 ± 0.118	0.335 ± 0.008	0.248 ± 0.017	0.247 ± 0.043	0.245 ± 0.045	0.253 ± 0.033	0.232 ± 0.070
Bucket	0.341 ± 0.055	0.393 ± 0.045	0.617 ± 0.107	0.386 ± 0.046	0.230 ± 0.014	0.223 ± 0.018	0.263 ± 0.148	0.286 ± 0.092	0.302 ± 0.047
Trashcan	0.330 ± 0.083	0.310 ± 0.089	0.353 ± 0.021	0.426 ± 0.158	0.241 ± 0.071	0.243 ± 0.031	0.192 ± 0.012	0.266 ± 0.019	0.262 ± 0.019
Knife	0.301 ± 0.121	0.226 ± 0.095	0.242 ± 0.021	0.224 ± 0.014	0.695 ± 0.205	0.397 ± 0.136	0.375 ± 0.100	0.256 ± 0.026	0.228 ± 0.014
Pliers	0.291 ± 0.107	0.301 ± 0.075	0.268 ± 0.035	0.213 ± 0.009	0.549 ± 0.227	0.593 ± 0.077	0.461 ± 0.099	0.240 ± 0.023	0.240 ± 0.038
Scissors	0.286 ± 0.039	0.257 ± 0.025	0.265 ± 0.035	0.226 ± 0.017	0.484 ± 0.109	0.472 ± 0.038	0.717 ± 0.104	0.228 ± 0.027	0.243 ± 0.033
Microwave	0.267 ± 0.078	0.254 ± 0.097	0.238 ± 0.017	0.228 ± 0.139	0.247 ± 0.036	0.189 ± 0.015	0.240 ± 0.034	0.397 ± 0.018	0.366 ± 0.088
Washing Machine	0.267 ± 0.018	0.237 ± 0.047	0.249 ± 0.017	0.284 ± 0.047	0.274 ± 0.041	0.246 ± 0.034	0.248 ± 0.048	0.379 ± 0.039	0.450 ± 0.089
	Bottle	Kettle	Bucket	Trashcan	Kettle	Pliers	Scissors	Microwave	Washing Machine

Fig. 5: Category-level anchor confidence scores. Within-category pairs (diagonal) score highest, while functionally-related categories score higher than less similar categories.

continuity only by collapsing correspondence onto a small subset of vertices, while D3Fields improves semantic accuracy at the expense of fragmented local mappings. SemAnCorr is the only method that simultaneously achieves high continuity and meaningful surface coverage, resulting in substantially higher GCS, more than twice that of the next best method.

E. Cross-Category Generalization

Many manipulation skills naturally transfer across semantically related object categories. We therefore evaluate whether SemAnCorr generalizes beyond category boundaries, and whether the pipeline is able to provide a lightweight signal of cross-category generalization compatibility.

We first evaluate correspondence on two representative cross-category pairs: *Scissors* $\rightarrow$ *Pliers* and *Kettle* $\rightarrow$ *Bottle*. These pairs share functional semantics despite noticeable geometric differences. As shown in Table III and Fig. 4, SemAnCorr achieves the highest semantic accuracy on both pairs with smooth visualization, demonstrating that semantic anchor selection generalizes beyond category identity.

We further investigate whether the semantic anchor confidence computed (Section IV-B) provides a lightweight signal of compatibility between objects, which may be useful for estimating whether a demonstrated skill is likely to transfer without needing an additional classifier. Since semantic anchor confidence is a novel metric introduced in our method, there is no directly comparable baseline for this analysis.

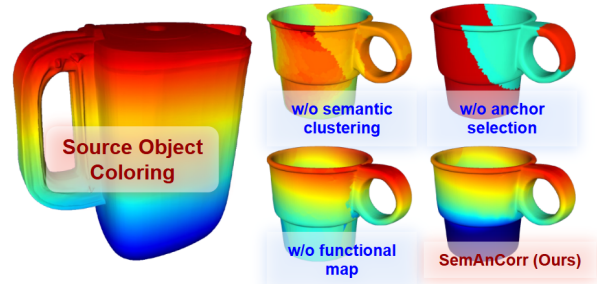


Fig. 6: Ablation visualization, with source object (left) and correspondences for each ablation condition (right).

	sAcc	GCS
SemAnCorr (Ours)	90.8 $\pm$ 2.5	0.40 $\pm$ 0.12
w/o Semantic Clustering	66.0 $\pm$ 12.6	0.05 $\pm$ 0.03
w/o Anchor Selection	39.1 $\pm$ 12.1	0.08 $\pm$ 0.06
w/o Functional Map	72.9 $\pm$ 7.4	0.25 $\pm$ 0.07

TABLE IV: Ablation study on method components.

Fig. 5 shows the average anchor confidence between object categories. The confidence is highest along the diagonal, corresponding to within-category pairs, and remains relatively high among functionally related categories such as containers (bottle, kettle, bucket, trashcan), hand tools (knife, pliers, scissors), and appliances (microwave, washing machine). In contrast, category pairs with less apparent functional or geometric similarity tend to receive lower confidence scores.

These trends suggest that anchor confidence captures a notion of semantic and geometric compatibility rather than category identity alone. While this score is not a direct measure of manipulation success, it may serve as a lightweight prior for deciding generalization compatibility.

F. Ablation Study

We ablate the three principal components of SemAnCorr: semantic clustering, anchor selection, and functional map propagation. The quantitative results are summarized in Table IV, with qualitative examples shown in Fig. 6. Removing semantic clustering substantially degrades geometric coherence, indicating that clustering suppresses noisy lifted features before correspondence estimation. Removing anchor selection causes the largest drop in semantic accuracy, confirming that semantic anchors provide accurate guidance on how correspondence should be established. Finally, removing functional map propagation reduces both semantic and geometric performance. Together, these results show that semantic consistency and geometric coherence arise from complementary components of the proposed pipeline.

G. Real-World Manipulation Skill Transfer

We further deployed SemAnCorr in the real-world to demonstrate its applicability in transferring manipulation skills from one demonstration to another object, and validate whether improved correspondence quality translates directly into real-world manipulation performance. We compare SemAnCorr primarily with D3Fields as it performs closely in terms of semantic accuracy, but exhibits poor geometric coherency in the quantitative analysis. We select five tasks transferring manipulation skill from one object to another:



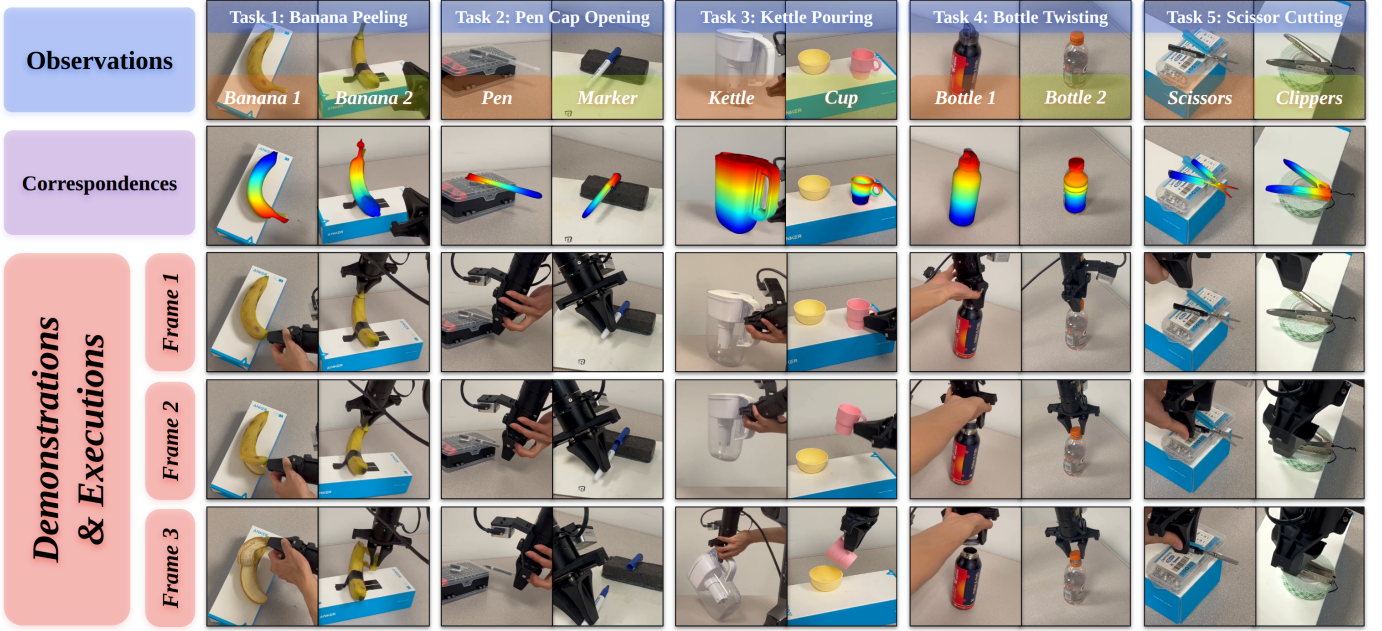


Fig. 7: Real-world manipulation visualization. From left to right: Task 1, 2, 3, 4, and 5. For each task, a manipulation demonstrated on a source object (left) is transferred to a target object (right) using the calculated dense correspondence, visualized in the second row; The remaining rows show key frames of the source demonstration and the transferred execution.

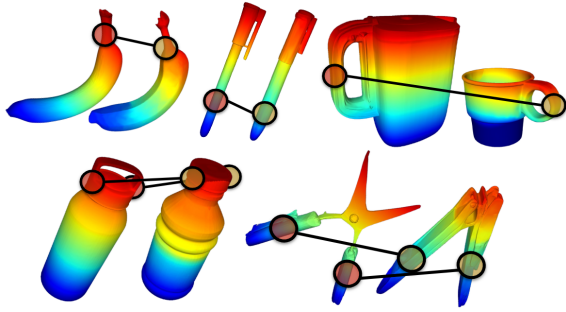

(a) SemAnCorr Real-World Objects Correspondence. From top left to bottom right: Task 1, Task 2, Task 3, Task 4, Task 5.

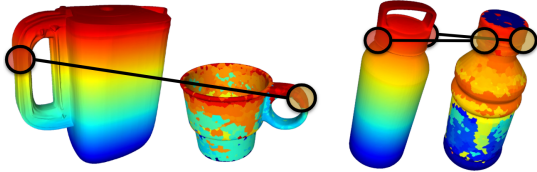

(b) D3Fields failed on Task 3 and 4: spatially incoherent correspondence yields incorrect local frames, causing task failure.

Fig. 8: Correspondence visualizations for real-world objects.

- 1) banana peeling skill to another banana,
- 2) pen opening skill to a marker,
- 3) kettle pouring skill to a toy cup,
- 4) water bottle twisting opening skill to another bottle, and
- 5) scissor cutting skill to a nail clipper.

We obtain workspace observations using a hand-eye calibrated RGB-D camera, and acquire object mesh using SAM3D [27] from the observation and align the reconstructed mesh to the observed depth point cloud. This aligned mesh serves as both the correspondence input and the canonical frame for skill transfer. Correspondences are shown in Fig. 8.

	Task 1	Task 2	Task 3	Task 4	Task 5
D3Fields	7/10	9/10	3/10	1/10	3/10
SemAnCorr (Ours)	8/10	9/10	7/10	7/10	6/10

TABLE V: Real-world task success rate (out of 10 trials).

Skill Representation. Dense surface correspondence enables a natural object-centric encoding of manipulation skills. we adopt a simple and practical one based on contact regions and relative waypoints, which we find sufficient for skill representation. We represent a skill as a sequence of alternating *contact keyframes* and *relative motion segments*. A contact keyframe records the end-effector pose $\mathbf{T}_{\text{eef}} \in SE(3)$ relative to the object frame, and the contact region $\mathcal{R} \subset \mathcal{V}$ (mesh vertices near the gripper). A motion segment records waypoints relative to the preceding contact keyframe pose, making the motion transferable without modification. To acquire the skill, we use kinesthetic teaching: recording end-effector poses and gripper state directly, shown in Fig. 7. This eliminates skill extraction noise as an experimental variable.

Skill Transfer. Given dense correspondence from SemAnCorr, each contact keyframe is transferred by first applying Procrustes alignment to the corresponding contact region on the target, yielding a prior end-effector pose $\mathbf{T}_{\text{prior}}$ that captures the semantically correct approach direction. Rather than executing $\mathbf{T}_{\text{prior}}$ directly, we use it to guide grasp generation: candidate grasps from GPG [28] are sampled within the transferred contact region and ranked by grasp quality and proximity to $\mathbf{T}_{\text{prior}}$ in $SE(3)$. This allows the correspondence to provide semantic and geometric guidance while GPG ensures physical feasibility. Motion segments transfer without modification as they are relative to the executed grasp pose.

Experimental Results. We run each task across 10 trials that varies object poses and viewpoints. We define task success based on whether the task is completed, and report task

success rates across 10 trials in Table V. Robot motion frames are shown in Fig. 7. Both methods perform comparably on Tasks 1 and 2, where interactions are relatively simple and correspondence is easy to establish. On Tasks 3, 4, and 5, interactions become complex and fine-grained correspondence is crucial for success. Although D3Fields frequently identifies the correct semantic part, incoherent correspondences produce incorrect local frames, leading to failed executions (Fig. 8b). SemAnCorr’s remaining failures arise primarily from mesh-to-workspace alignment errors rather than correspondences.

The results confirm that semantic accuracy alone is insufficient for the transfer of manipulation skills. Geometric coherence is equally necessary for skill transfer success. SemAnCorr produces dense correspondence explicitly optimizes for both, making a manipulation-oriented representation that bridges visual demonstrations and executable robot actions.

VI. CONCLUSION AND FUTURE WORK

In this paper, we presented *Semantic Anchored Correspondence (SemAnCorr)*, a framework for constructing dense correspondences that preserve both semantic consistency and local geometric coherence across objects. Through benchmarks and real-world manipulation experiments, we showed that both properties are necessary for reliable skill transfer across geometrically diverse instances: semantic consistency determines where to interact, while geometric coherence determines how. Future work includes extending the correspondence formulation to bimanual and dexterous manipulation, where multiple contact points must remain geometrically consistent.

Beyond zero-shot skill transfer, an implication of SemAnCorr is its potential to bootstrap data for learned manipulation policies. Successful executions could be transferred to previously unseen objects to generate additional demonstrations, which could serve as supervision for fine-tuning manipulation policies, reducing the need for repeated human data collection.

REFERENCES

- [1] F. Xiang, Y. Qin, K. Mo, Y. Xia, H. Zhu, F. Liu, M. Liu, H. Jiang, Y. Yuan, H. Wang, L. Yi, A. X. Chang, L. J. Guibas, and H. Su, “SAPIEN: A simulated part-based interactive environment,” in *The IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020.
- [2] M. Ovsjanikov, M. Ben-Chen, J. Solomon, A. Butscher, and L. Guibas, “Functional maps: a flexible representation of maps between shapes,” vol. 31, no. 4, 2012.
- [3] M. Aubry, U. Schlickewei, and D. Cremers, “The wave kernel signature: A quantum mechanical approach to shape analysis,” *2011 IEEE International Conference on Computer Vision Workshops (ICCV Workshops)*, pp. 1626–1633, 2011.
- [4] N. Donati, A. Sharma, and M. Ovsjanikov, “Deep geometric functional maps: Robust feature learning for shape correspondence,” *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 8589–8598, 2020.
- [5] J. Zhu, Y. Ju, J. Zhang, M. Wang, Z. Yuan, K. Hu, and H. Xu, “Densematcher: Learning 3d semantic correspondence for category-level manipulation from a single demo,” *International Conference on Learning Representations (ICLR) 2025*, 2024.
- [6] P. R. Florence, L. Manuelli, and R. Tedrake, “Dense object nets: Learning dense visual object descriptors by and for robotic manipulation,” in *Conference on Robot Learning*, 2018.
- [7] L. Tang, M. Jia, Q. Wang, C. P. Phoo, and B. Hariharan, “Emergent correspondence from image diffusion,” in *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [8] J. Zhang, C. Herrmann, J. Hur, L. P. Cabrera, V. Jampani, D. Sun, and M. Yang, “A tale of two features: Stable diffusion complements dino for zero-shot semantic correspondence,” *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [9] Y. Ju, K. Hu, G. Zhang, G. Zhang, M. Jiang, and H. Xu, “Robo-abc: Affordance generalization beyond categories via semantic correspondence for robot manipulation,” in *European Conference on Computer Vision*, pp. 222–239, Springer, 2025.
- [10] Y. Kuang, J. Ye, H. Geng, J. Mao, C. Deng, L. J. Guibas, H. Wang, and Y. Wang, “Ram: Retrieval-based affordance transfer for generalizable zero-shot robotic manipulation,” in *Conference on Robot Learning*, 2024.
- [11] Y. Tang, W. Huang, Y. Wang, C. Li, R. Yuan, R. Zhang, J. Wu, and F.-F. Li, “Uad: Unsupervised affordance distillation for generalization in robotic manipulation,” *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 3822–3831, 2025.
- [12] P. Gupta, H. Admoni, and A. V. Bajcsy, “Adapting by analogy: Ood generalization of visuomotor policies via functional correspondence,” *ArXiv*, vol. abs/2506.12678, 2025.
- [13] L. Yen-Chen, P. R. Florence, J. T. Barron, T.-Y. Lin, A. Rodriguez, and P. Isola, “Nerf-supervision: Learning dense object descriptors from neural radiance fields,” *2022 International Conference on Robotics and Automation (ICRA)*, pp. 6496–6503, 2022.
- [14] Y. Wang, M. Zhang, Z. Li, T. Kelestemur, K. Driggs-Campbell, J. Wu, L. Fei-Fei, and Y. Li, “D³fields: Dynamic 3d descriptor fields for zero-shot generalizable rearrangement,” in *8th Annual Conference on Robot Learning*, 2024.
- [15] T. Tian, X. Kang, and Y.-L. Kuo, “O3afford: One-shot 3d object-to-object affordance grounding for generalizable robotic manipulation,” *ArXiv*, vol. abs/2509.06233, 2025.
- [16] K. Mo, L. J. Guibas, M. Mukadam, A. K. Gupta, and S. Tulsiani, “Where2act: From pixels to actions for articulated 3d objects,” *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 6793–6803, 2021.
- [17] S. Deng, X. Xu, C. Wu, K. Chen, and K. Jia, “3d affordancenet: A benchmark for visual object affordance understanding,” *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1778–1787, 2021.
- [18] H. Geng, H. Xu, C. Zhao, C. Xu, L. Yi, S. Huang, and H. Wang, “Gapartnet: Cross-category domain-generalizable object perception and manipulation via generalizable and actionable parts,” *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 7081–7091, 2022.
- [19] Y. Wang, R. Wu, K. Mo, J. Ke, Q. Fan, L. J. Guibas, and H. Dong, “Adaafford: Learning to adapt manipulation affordance for 3d articulated objects via few-shot interactions,” in *European Conference on Computer Vision*, 2021.
- [20] Z. Qin, K. Fang, Y. Zhu, L. Fei-Fei, and S. Savarese, “Keto: Learning keypoint representations for tool manipulation,” *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 7278–7285, 2019.
- [21] D. Turpin, L. Wang, S. Tsogkas, S. J. Dickinson, and A. Garg, “Gift: Generalizable interaction-aware functional tool affordances without labels,” *ArXiv*, vol. abs/2106.14973, 2021.
- [22] H. Chen, C. Zhu, S. Liu, Y. Li, and K. R. Driggs-Campbell, “Tool-as-interface: Learning robot policies from observing human tool use,” in *Conference on Robot Learning (CoRL)*, 2025.
- [23] J. Song, A. K. Tanwani, J. Ichnowski, M. Danielczuk, K. Sanders, J. Chui, J. A. Ojea, and K. Goldberg, “Robust task-based grasping as a service,” *2020 IEEE 16th International Conference on Automation Science and Engineering (CASE)*, pp. 22–28, 2020.
- [24] Shailesh, A. Raj, N. Kumar, P. Shukla, A. Melnik, M. Beetz, and G. C. Nandi, “Grim: Task-oriented grasping with conditioning on generative examples,” *ArXiv*, vol. abs/2506.15607, 2025.
- [25] X. Zhai, B. Mustafa, A. Kolesnikov, and L. Beyer, “Sigmoid loss for language image pre-training,” *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 11941–11952, 2023.
- [26] S. Melzi, J. Ren, E. Rodolà, A. Sharma, P. Wonka, and M. Ovsjanikov, “Zoomout: spectral upsampling for efficient shape correspondence,” vol. 38, no. 6, 2019.
- [27] S. D. Team, X. Chen, F.-J. Chu, P. Gleize, K. J. Liang, A. Sax, H. Tang, W. Wang, M. Guo, T. Hardin, X. Li, A. Lin, J. Liu, Z. Ma, A. Sagar, B. Song, X. Wang, J. Yang, B. Zhang, P. Dollár, G. Gkioxari, M. Feiszli, and J. Malik, “Sam 3d: 3d anything in images,” 2025.
- [28] A. ten Pas, M. Gualtieri, K. Saenko, and R. Platt, “Grasp pose detection in point clouds,” *arXiv preprint arXiv:1706.09911*, 2017.