

RAPTOR+: A Visually Grounded Vision-Language Framework to Improve Clinical Trust and Auditability in Automated Cancer Referral Processing

Sofiat Abioye¹, Ufaq Khan², Shazad Ashraf³, Anusha Jose⁴, Benjamin Wallace⁴, William Poulett⁴, Adam Byfield⁴, Lukman Akanbi¹, and Muhammad Bilal¹

¹ Birmingham City University, Birmingham, England, UK
muhammad.bilal@bcu.ac.uk*

² Mohamed bin Zayed University of Artificial Intelligence (MBZUAI), Abu Dhabi, UAE

³ University Hospitals Birmingham NHS Foundation Trust, Birmingham, England, UK

⁴ NHS England, London, England

Abstract. Urgent suspected colorectal cancer (CRC) referrals create operational bottlenecks because semi-structured clinical documents often require manual review and transcription. The original RAPTOR system used Large Language Models for structured extraction but relied on a separate OCR stage, making it vulnerable to handwriting, layout variation, and loss of visual evidence linkage. We present RAPTOR+, a multimodal extension that uses Vision-Language Models (VLMs) for end-to-end referral understanding. We evaluate fine-tuned VLMs, commercial and open-source zero-shot VLMs, and the original OCR-based pipeline on 223 clinically curated CRC urgent referral forms. We also introduce a grounding-aware evaluation framework that measures both extraction accuracy and evidence localisation. Results show a clear grounding gap in zero-shot models. Gemini 2.5 Flash achieved 92.6% Reading Accuracy but only 1.2% Strict Safety. In contrast, fine-tuned Qwen3-VL-8B achieved 96.1% Reading Accuracy and 60.6% Strict Safety, substantially improving verifiable evidence grounding. These findings show that task-specific fine-tuning is essential for reliable, auditable clinical document understanding. RAPTOR+ enables extracted referral decisions to be linked to visual evidence, supporting safer and more efficient cancer referral triage.

Keywords: Vision Language Models · Fine-Tuning · Generative AI · Referral Pathways · OCR · Clinical NLP · Document Understanding · Image Augmentation.

1 Background

Reducing delays in the urgent diagnostic pathway for suspected cancer is a major health-system priority [1]. In many healthcare systems, key referral information is exchanged between clinicians as semi-structured documents: scanned forms, faxed documents, and handwritten annotations that require manual review and transcription into downstream systems. This creates substantial administrative burden and introduces the risk of omission or transcription error, potentially delaying cancer diagnoses [2].

Urgent suspected colorectal cancer (CRC) referral pathways exemplify these challenges. CRC referrals combine free-text clinical narratives with structured elements such as checkboxes and tables, and frequently include handwritten or low-contrast annotations [3]. Poor scan quality, administrative stamps, strikethroughs, overwritten entries, and heterogeneous templates across referring practices can undermine OCR-first pipelines, which depend on clean text extraction before any downstream information extraction can occur [4,5].

Recent vision-language and document foundation models provide an alternative, producing structured outputs directly from document images using joint representations of text, layout, and visual features. Performance on generic document benchmarks has been strong, but this does not guarantee safety or reliability in real-world clinical deployment contexts [6,7,8].

Two failure modes are particularly problematic in urgent referral processing. *Ungrounded extractions* occur when models generate plausible values not supported by the source document [9]. *Non-verifiable predictions* arise when an extracted value may be correct, but the system cannot indicate where the supporting evidence appears, preventing clinician validation [10]. Both failure modes undermine trust and limit the practical utility of large-scale automated extraction systems in clinical workflows where accountability and auditability are paramount [11,12,13].

We introduce RAPTOR+ (Figure 1), a grounding-aware evaluation framework for end-to-end vision-language understanding of urgent CRC referral forms. It jointly measures structured extraction accuracy and evidence localisation quality. We benchmark representative vision-language models, characterise clinically relevant failure modes, and analyse how model scale and adaptation affect grounding reliability for human-in-the-loop deployment.

The contributions of this work are threefold. First, we propose a grounding-aware evaluation framework for urgent CRC referrals that jointly quantifies structured extraction accuracy and visual evidence localisation. Second, we benchmark representative end-to-end document VLMs and characterise clinically relevant failure modes, including ungrounded extractions and poor evidence localisation quality. Third, we analyse the effects of model scale and task-specific adaptation on grounding reliability and discuss implications for safe deployment in urgent referral triage workflows [14].

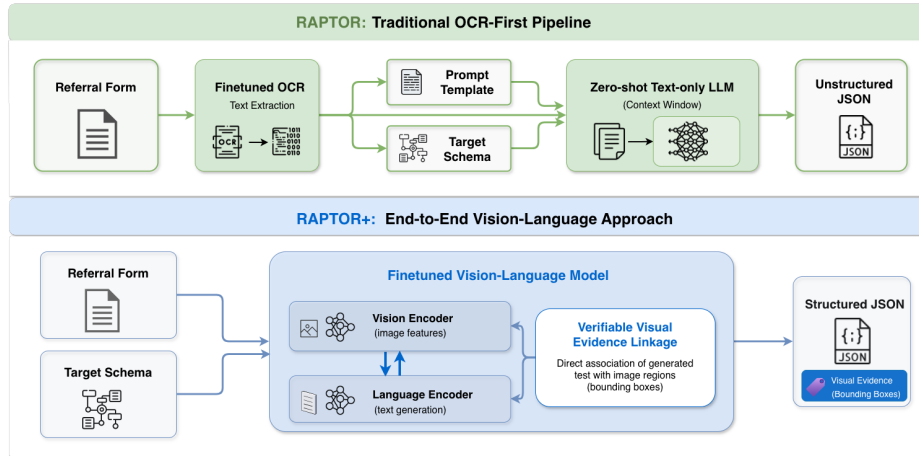


Fig. 1: **Overview of RAPTOR+ vs. RAPTOR.** *Top panel:* RAPTOR follows an OCR-first pipeline: the form is processed via OCR/text extraction and combined with the expected schema as input to a zero-shot text-only LLM, producing JSON outputs without reliable visual evidence linkage. *Bottom panel:* RAPTOR+ performs end-to-end, visually grounded extraction by conditioning a fine-tuned vision-language model on the referral form and the expected schema to produce structured JSON outputs.

2 Methods

2.1 Dataset and Experimental Setup

We conducted experiments on a synthetic, clinically curated dataset of 223 urgent CRC referral documents. The dataset reflects real-world variability, including heterogeneous layout structures, free-text entries, incomplete fields, handwritten annotations, and editorial marks such as strikethroughs and overwritten entries. All referral images were standardised to 1654×2339 pixels, with bounding-box coordinates normalised for cross-model comparison. The dataset was partitioned into 176 training forms and a disjoint held-out test set of 47 forms, with no overlap in document templates or patient scenarios. Ground-truth supervision included structured target values for each clinical field, field-presence logic indicating whether each field should contain a value or remain null, and precise bounding-box annotations identifying the visual evidence supporting each extracted value.

2.2 Models and Training Regimes

We evaluated a diverse set of VLMs spanning commercial API-access systems and open-weight alternatives, to isolate how model variants, scale, and training regime affect structured extraction with geometric evidence (Table 1).

Commercial models evaluated in zero-shot mode included Claude Opus 4.6 and Gemini 2.5 Flash, evaluated in pure inference mode without parameter updates or task-specific training. Open-weight models evaluated in zero-shot mode included the Qwen3-VL variants (2B, 4B, 8B, and 32B parameters), allowing analysis of how scale influences grounding behaviour without task-specific training [15]. All zero-shot models used identical prompting strategies. Open-weight models evaluated after fine-tuning included Qwen3-VL variants (2B, 4B, and 8B parameters), trained on paired document images and structured JSON targets containing field values and bounding-box coordinates for supporting evidence [16,17]. Fine-tuning used standard supervised learning with cross-entropy loss on value prediction and coordinate regression.

All models were prompted with identical task specifications to emit a single JSON object adhering to a fixed schema, with one evidence bounding box per field. Bounding boxes were produced in each model’s native coordinate convention and normalised for evaluation, so performance differences reflected model behaviour rather than prompt engineering.

Table 1: Vision-language models evaluated in this study. Fine-tuned models use the same architecture as their base counterparts, differing only in the training regime.

Model	Source	Params	Regime	Role in Study
<i>Commercial (closed-source)</i>				
Gemini 2.5 Flash	Closed source	N/A	Zero-shot	SOTA commercial baseline
Claude Opus 4.6	Closed source	N/A	Zero-shot	SOTA commercial baseline
<i>Open-weight (zero-shot)</i>				
Qwen3-VL-32B	Open source	32B	Zero-shot	Large-scale open baseline
Qwen3-VL-8B	Open source	8B	Zero-shot	Mid-scale base model
Qwen3-VL-4B	Open source	4B	Zero-shot	Scaling baseline
Qwen3-VL-2B	Open source	2B	Zero-shot	Scaling baseline
<i>Open-weight (fine-tuned)</i>				
Qwen3-VL-8B (FT)	Open source	8B	Fine-tuned	Primary intervention
Qwen3-VL-4B (FT)	Open source	4B	Fine-tuned	Scaling baseline
Qwen3-VL-2B (FT)	Open source	2B	Fine-tuned	Scaling baseline

2.3 System Architecture

The RAPTOR+ architecture has three processing stages (Figure 2). The *input* stage accepts an urgent CRC referral form containing clinical fields such as patient demographics, symptoms, examination findings, and diagnostic test results. The *extraction engine* is a multimodal transformer-based encoder-decoder that processes visual features through a Vision Transformer and aligns them with linguistic tokens via cross-attention. The *output* stage produces grounded

Visual grounding paths within the architecture enable verifiable evidence by tracing extracted values directly back to their source regions on the raw document scan [18]. This end-to-end design removes the decoupled OCR stage of the original RAPTOR system. The model learns joint representations of visual appearance, layout, and semantic content, and the grounded output allows clinicians to verify each extraction against the source document.

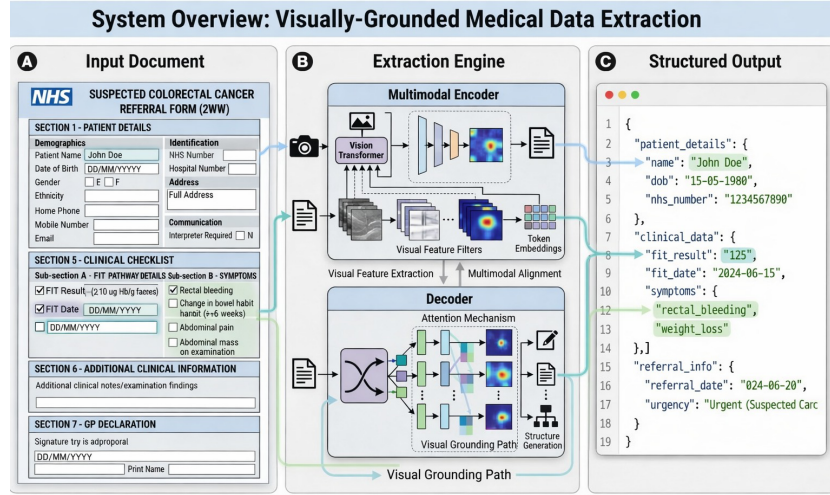


Fig. 2: **System overview of the RAPTOR+ visually grounded medical data extraction pipeline.** The architecture consists of three core stages **(A)** *Input Document*, featuring an urgent CRC referral form with targeted clinical fields; **(B)** *Extraction Engine*, a multimodal transformer-based encoder-decoder that processes visual features via a Vision Transformer and aligns them with linguistic tokens; and **(C)** *Structured Output*, which generates grounded clinical data in JSON format. The *Visual Grounding Paths* (coloured arrows) demonstrate the model’s ability to provide verifiable evidence by tracing extracted values such as patient identifiers, FIT results, and clinical symptoms, directly back to their source bounding boxes on the raw document scan.

2.4 Evaluation Protocol

We evaluated performance at the field level on the held-out test set of 47 forms using a multi-criteria protocol that separates semantic extraction quality from evidence localisation quality.

Value Correctness (Reading Accuracy / NM). For each field, we compared the predicted value to the ground-truth value after domain-aware normalisation resolving case differences, whitespace and punctuation variations, numeric and unit formatting inconsistencies, and common Boolean or empty-value synonyms. The primary reading metric was *Normalised Match* (NM), which canonicalised surface forms to focus evaluation on semantic content rather than formatting artefacts.

Evidence Reliability (Evidence Precision / EP). We quantified the propensity to produce ungrounded evidence by computing Evidence Precision [16], defined as the proportion of predicted bounding boxes that overlapped with any ground-truth evidence region. Low EP indicates frequent hallucinated pointing, where models generate geometrically invalid bounding boxes not corresponding to actual document regions.

Strict Safety (Automated Compliance, IoU ≥ 0.5). We evaluated whether predicted evidence boxes enabled fully automated verification by computing Intersection-over-Union (IoU) between predicted and ground-truth evidence boxes [19]. A prediction was counted as compliant if $\text{IoU} > 0.5$, a conservative criterion penalising shifted, overly tight, or excessively loose bounding boxes. The *Joint* metric requires both correct value extraction and a compliant evidence box simultaneously.

Audit Precision (Human-in-the-Loop Pointing, IoP ≥ 0.5). We captured cases where models indicated the correct region without precisely matching the annotated extent using Intersection-over-Prediction (IoP) [20]. A prediction was considered useful for clinical audit if $\text{IoP} > 0.5$, aligning with clinician review behaviour where a reasonably tight box in the correct region can substantially accelerate verification.

3 Results

3.1 Semantic Value Extraction Performance

Zero-shot and commercial models demonstrated strong semantic extraction capabilities. Claude Opus 4.6 achieved 95.2% reading accuracy, and Qwen3-VL-32B reached 95.3%, the highest among all zero-shot models. Gemini 2.5 Flash achieved 92.6%. These results indicated that large-scale pre-training on diverse document corpora enabled robust handling of heterogeneous templates, mixed free-text and tabular regions, and handwritten annotations characteristic of real-world clinical referral forms.

Fine-tuning improved both semantic extraction accuracy and grounding reliability. Qwen3-VL-8B improved from 88.4% reading accuracy in zero-shot mode to 96.1% after fine-tuning, surpassing all zero-shot models while also gaining substantially in grounding quality. The fine-tuned model learned to align value extraction with accurate evidence bounding boxes, reflecting a fundamental shift in model behaviour induced by task-specific supervision.

The original RAPTOR system, which employed GPT-4o-mini and DeepSeek-R1 with decoupled OCR, achieved the highest semantic accuracy at 94.83%

and 93.72% respectively [5]. However, these systems provided no localisation capability for audit purposes, limiting their utility in safety-critical deployment scenarios requiring human verification.

Table 2 summarises all quantitative results.

Table 2: Quantitative results. Reading accuracy (value match) and grounding metrics. **Strict Safety** requires correct value extraction *and* a compliant evidence box ($\text{IoU} > 0.5$). **Pointing Precision** reports audit-oriented localisation success ($\text{IoP} > 0.5$). ‘—’ denotes models without bounding-box output. Bold = best per column; italics = second best.

Model	Regime	Reading Acc. (Value Match)	Strict Safety (Joint IoU)	Pointing Prec. (Joint IoP)
<i>Commercial (closed-source)</i>				
Gemini 2.5 Flash	Zero-shot	92.6%	1.2%	41.4%
Claude Opus 4.6	Zero-shot	95.2%	0.2%	1.0%
<i>Open-weight (zero-shot)</i>				
Qwen3-VL-32B	Zero-shot	95.3%	8.0%	60.9%
Qwen3-VL-8B	Zero-shot	88.4%	6.2%	37.2%
Qwen3-VL-4B	Zero-shot	87.5%	0.3%	33.3%
Qwen3-VL-2B	Zero-shot	62.3%	0.0%	—
<i>Open-weight (fine-tuned)</i>				
Qwen3-VL-8B (FT)	Fine-tuned	96.1%	60.6%	75.4%
Qwen3-VL-4B (FT)	Fine-tuned	90.1%	25.9%	46.4%
Qwen3-VL-2B (FT)	Fine-tuned	88.3%	21.0%	32.9%

3.2 Evidence Presence and Hallucination Behaviour

Zero-shot models varied considerably in evidence precision. Gemini 2.5 Flash achieved 73.5% EP, while Qwen3-VL-32B reached 80.4%. Claude Opus 4.6, despite its high reading accuracy, achieved only 41.4% EP, indicating that its bounding boxes frequently did not correspond to actual evidence regions. These results show that strong reading accuracy does not guarantee reliable grounding, a critical gap that undermines trust and prevents reliable automated verification (Figure 3).

Claude Opus 4.6 represents a particularly important failure mode: confident mislocalisation. Unlike the smaller open-weight models that simply withheld bounding boxes, Claude Opus produced coordinates for 81.9% of fields, generating the appearance of thorough grounding while achieving only 0.2% Strict Safety and 1.0% Audit Precision. The model was prolific in its pointing yet almost entirely wrong. From a clinical safety perspective this is worse than silence: a clinician auditing extractions against highlighted evidence regions would be directed to incorrect parts of the document on virtually every field, under-

mining rather than supporting verification. High bounding-box coverage paired with near-zero IoU or IoP is therefore a distinct and dangerous failure mode that aggregate reading accuracy metrics cannot detect.

Fine-tuning further improved evidence precision. Qwen3-VL-8B after fine-tuning achieved 88.5% EP, up from 70.1% in zero-shot mode. The fine-tuned model generated bounding boxes more reliably, substantially reducing ungrounded evidence generation. This improvement, combined with gains in reading accuracy, represents a highly favourable outcome for safety-critical applications.

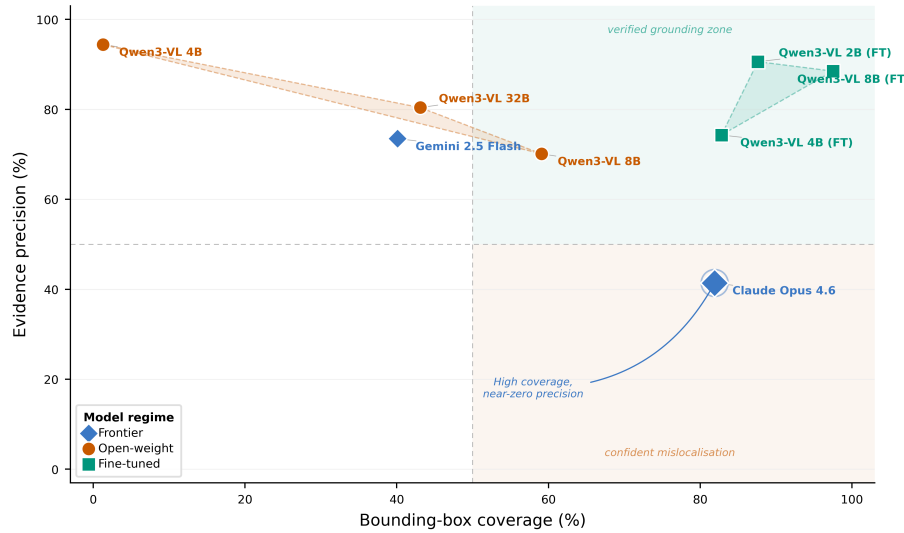


Fig. 3: **Evidence Precision vs. Bounding-Box Coverage.** Each point represents one model; colour and shape denote regime (blue diamond = Frontier; orange circle = Open-weight; green square = Fine-tuned). The dashed lines at 50% mark the high-performance zone. Fine-tuning moves models towards high coverage *and* high precision, bridging the grounding gap.

3.3 Joint Task Success: Value and Grounding

Joint task success, defined as simultaneously extracting the correct value and producing a verifiable evidence box, revealed stark differences between zero-shot and fine-tuned models. Under strict safety criteria requiring $\text{IoU} \geq 0.5$, zero-shot models showed limited joint success despite high reading accuracy. Gemini 2.5 Flash achieved only 1.2% joint success, while Qwen3-VL-32B reached 8.0% and Qwen3-VL-8B 6.2%. These results demonstrate that semantic extraction capability alone is insufficient for safety-critical deployment.

In contrast, Qwen3-VL-8B after fine-tuning reached 60.6% strict joint success, validating task-specific fine-tuning as necessary for geometric guarantees [21].

The spatial precision advantage is visualised in Figure 4. This represents approximately a tenfold improvement over the Qwen3-VL-8B zero-shot baseline, confirming that supervised learning on paired value-evidence examples enabled reliable grounding.

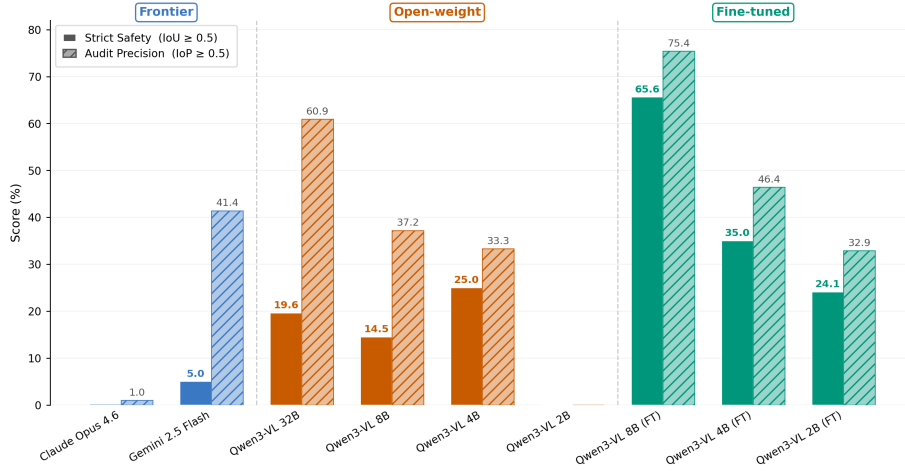


Fig. 4: **Spatial localisation metrics across model tiers.** Paired bars show Strict Safety ($\text{IoU} \geq 0.5$, darker) and Audit Precision ($\text{IoP} \geq 0.5$, lighter) per model, grouped by regime. Fine-tuned models substantially outperform zero-shot and commercial baselines on both metrics.

Under the more permissive audit precision criterion requiring $\text{IoP} > 0.5$, large zero-shot models demonstrated partial recovery [22]. Qwen3-VL-32B achieved 60.9% joint success under IoP , while Gemini 2.5 Flash reached 41.4%. These results indicate that zero-shot models can correctly identify values and point to approximately correct regions for a meaningful proportion of fields, making them potentially effective as audit assistants in human-in-the-loop workflows despite their limitations for fully automated verification.

3.4 Effect of Fine-Tuning on Grounded Understanding

Fine-tuning functioned as a structural switch for open-weight VLMs, converting strong generic reading capability into schema-aligned, evidence-grounded extraction [23]. The base Qwen3-VL-8B model demonstrated strong reading accuracy of 88.4% but limited geometric compliance at 6.2% strict safety. After task-specific supervision, the fine-tuned variant achieved 60.6% strict safety, representing approximately a tenfold gain. This improvement pattern indicates that fine-tuning primarily taught the model where evidence boundaries lie rather than improving text reading capability per se.

Task-specific supervision further improved evidence precision [24]. EP increased from 70.1% for the base model to 88.5% after fine-tuning, suggesting the model learned to produce more precise coordinate predictions aligned with actual evidence regions. Fine-tuning improved both reading accuracy (88.4% $\rightarrow$ 96.1%) and grounding quality simultaneously, showing no trade-off between extraction quality and evidence reliability. In clinical audit settings, a high-recall system with reliable evidence pointers enables rapid verification and maintains trust.

For smaller open-weight models, fine-tuning acted not as a refinement of existing grounding capability but as its activation from scratch. In zero-shot mode, Qwen3-VL-4B produced bounding boxes for only 1.3% of fields, and Qwen3-VL-2B produced none at all, rendering their localisation output effectively absent. The 94.4% evidence precision reported for Qwen3-VL-4B zero-shot is therefore misleading in isolation: it reflects precision on the rare occasions the model fired, not a reliable grounding signal across the form. After fine-tuning, both models entered functional grounding territory, with bounding-box coverage rising to 82.8% and 87.6% respectively. This demonstrates that task-specific supervision unlocked the localisation mechanism rather than merely calibrating it. For sub-8B deployment in resource-constrained clinical settings, fine-tuning is consequently a prerequisite for any grounding capability, not an optional enhancement.

3.5 Trade-off Analysis: Accuracy Versus Auditability

The RAPTOR+ evaluation revealed the cost of neglecting grounding in prior systems. The original RAPTOR system prioritised semantic accuracy, achieving 94.83% reading accuracy but providing no localisation for audit. RAPTOR+ with fine-tuned Qwen3-VL-8B achieved both high semantic accuracy (96.1%) and grounded, verifiable evidence, achieving 60.6% to 75.4% visual auditability depending on the strictness criterion applied.

This result reflects a principled design choice for safety-critical applications [25]. In urgent cancer referral triage, the ability to rapidly verify extraction decisions and trace them to source evidence is essential for maintaining clinician trust and ensuring accountability. A system with slightly lower recall but reliable evidence pointers enables efficient human oversight, whereas a high-accuracy system without grounding capability requires complete manual review, negating automation benefits.

4 Conclusion

RAPTOR+ jointly measures structured extraction accuracy and evidence localisation, revealing failure modes that text-only metrics obscure. Large zero-shot models read clinical documents well but show limited strict grounding: Gemini 2.5 Flash reached 92.6% semantic accuracy yet only 1.2% Strict Safety (Joint IoU). Task-specific fine-tuning closed this gap. The fine-tuned Qwen3-VL-8B achieved 60.6% strict joint success and 88.5% evidence precision, a 50-fold

improvement over the best zero-shot commercial baseline (1.2%). Fine-tuned models frequently output `null` when localisation is uncertain, accepting lower recall in exchange for reliable pointers. In a human-in-the-loop workflow, these abstentions are flagged for clinician review rather than propagating unverified values downstream. Zero-shot models, though currently unsuitable for fully automated verification, retain utility in human-in-the-loop workflows, directing clinician attention to relevant regions for a meaningful proportion of fields. These results support evidence-linked, human-in-the-loop deployment in urgent referral processing. Future work should examine generalisation to other referral types, robustness under real-world distribution shift, and clinician qualitative evaluation of grounding quality in operational workflows.

References

1. Mark L Graber, Bradford D Winters, Roni Matin, Rosann T Cholankeril, Daniel R Murphy, Hardeep Singh, and Andrea Bradford. Interventions to improve timely cancer diagnosis: an integrative review. *Diagnosis*, 12(2):153–162, 2025.
2. Kirstin Roberts, Nicola Cooper, Laura Webster, Ben Sharpless, Thomas Round, Carolynn Gildea, and Brian D Nicholson. Characterising the volume and variation of multiple urgent suspected cancer referrals in england, april 2013–march 2018: a national cohort study. *BMJ open*, 15(4):e097180, 2025.
3. Scott Laing, Sarah Jarman, Jacobi Elliott, Janet Dang, Vala Gylfadottir, Kayla Wierts, and Vineet Nair. Codesigned standardised referral form: simplifying the complexity. *BMJ health & care informatics*, 31(1):e100926, 2024.
4. Yifu Chen, Lucy Hao, Vito Z Zou, Zsuzsanna Hollander, Raymond T Ng, and Kathryn V Isaac. Automated medical chart review for breast cancer outcomes research: a novel natural language processing extraction system. *BMC medical research methodology*, 22(1):136, 2022.
5. Sofiat Abioye, Shazad Ashraf, Junaid Qadir, Adam Byfield, Anusha Jose, William Poulett, Ben Wallace, Adil Butt, Colm Forde, Marcus Mottershead, et al. Raptor: Generative ai for parsing colorectal cancer referrals to streamline faster diagnostic standard pathways. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 495–505. Springer, 2025.
6. Yupan Huang, Tengchao Lv, Lei Cui, Yutong Lu, and Furu Wei. Layoutlmv3: Pre-training for document ai with unified text and image masking. In *Proceedings of the 30th ACM international conference on multimedia*, pages 4083–4091, 2022.
7. Geewook Kim, Teakgyu Hong, Moonbin Yim, JeongYeon Nam, Jinyoung Park, Jinyeong Yim, Wonseok Hwang, Sangdoo Yun, Dongyoon Han, and Seunghyun Park. Ocr-free document understanding transformer. In *European Conference on Computer Vision*, pages 498–517. Springer, 2022.
8. Ufaq Khan, Umair Nawaz, LDMSS Teja, Numaan Saeed, Muhammad Bilal, Yutong Xie, Mohammad Yaqub, and Muhammad Haris Khan. Medobvious: Exposing the medical moravec’s paradox in vlms via clinical triage. *arXiv preprint arXiv:2603.23501*, 2026.
9. Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. Survey of hallucination in natural language generation. *ACM computing surveys*, 55(12):1–38, 2023.

10. Xiuying Chen, Mingzhe Li, Xin Gao, and Xiangliang Zhang. Towards improving faithfulness in abstractive summarization. *Advances in Neural Information Processing Systems*, 35:24516–24528, 2022.
11. Alok Sharma, Artem Lysenko, Shangru Jia, Keith A Boroevich, and Tatsuhiko Tsunoda. Advances in ai and machine learning for predictive medicine. *Journal of Human Genetics*, 69(10):487–497, 2024.
12. Jasmeen Gill et al. Hybrid classification for heart disease prediction using artificial intelligence. In *2021 5th international conference on computing methodologies and communication (ICCMC)*, pages 1779–1785. IEEE, 2021.
13. Waheed Rasheed, Anthonette Chidinma, Kazeem Adamson Mutiu, Olufemi Owolabi, Onome Jennifer Jike, Okiki Olumide, Oluwatosin Oyeladun, Gabriel Ovie, and Obinna Emmanuel Obi-Akwari. Federated learning framework for self-powered iot sensor networks with explainable ai: A novel approach for sustainable and privacy-preserving distributed intelligence. In *Proceedings of the 2025 6th International Conference on Big Data Economy and Information Management*, pages 1420–1427, 2025.
14. Brenda Y Miao, Irene Y Chen, Christopher YK Williams, Jaysón Davidson, Augusto Garcia-Agundez, Shenghuan Sun, Travis Zack, Suchi Saria, Rima Arnaut, Giorgio Quer, et al. The minimum information about clinical artificial intelligence checklist for generative modeling research (mi-claim-gen). *Nature medicine*, 31(5):1394, 2025.
15. Xin Liu, Daniel McDuff, Geza Kovacs, Isaac Galatzer-Levy, Jacob Sunshine, Jiening Zhan, Ming-Zher Poh, Shun Liao, Paolo Di Achille, and Shwetak Patel. Large language models are few-shot health learners. *arXiv preprint arXiv:2305.15525*, 2023.
16. Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
17. Xiao Wu, Ting-Zhu Huang, Liang-Jian Deng, Xiaobing Yu, Yu Zhong, Shangqi Deng, Ufaq Khan, Jianghao Wu, Xiaofeng Liu, Imran Razzak, et al. Selfai: Building a self-training ai system with llm agents. *arXiv preprint arXiv:2512.00403*, 2025.
18. Baptiste Vasey, Myura Nagendran, Bruce Campbell, David A Clifton, Gary S Collins, Spiros Denaxas, Alastair K Denniston, Livia Faes, Bart Geerts, Mudathir Ibrahim, et al. Reporting guideline for the early stage clinical evaluation of decision support systems driven by artificial intelligence: Decide-ai. *bmj*, 377, 2022.
19. Kang Tong and Yiquan Wu. Rethinking pascal-voc and ms-coco dataset for small object detection. *Journal of Visual Communication and Image Representation*, 93:103830, 2023.
20. Chenghao Tong, Xinhao Yang, Qing Huang, and Feiyang Qian. Ngiou loss: Generalized intersection over union loss based on a new bounding box regression. *Applied Sciences*, 12(24):12785, 2022.
21. Miguel Nunes, Joao Bone, Joao C Ferreira, and Luis B Elvas. Health care language models and their fine-tuning for information extraction: scoping review. *JMIR medical informatics*, 12(1):e60164, 2024.
22. Megan E Salwei, Peter Hoonakker, Pascale Carayon, Douglas Wiegmann, Michael Pulia, and Brian W Patterson. Usability of a human factors-based clinical decision support in the emergency department: lessons learned for design and implementation. *Human factors*, 66(3):647–657, 2024.
23. Iryna Hartsock and Ghulam Rasool. Vision-language models for medical report generation and visual question answering: A review. *Frontiers in artificial intelligence*, 7:1430984, 2024.

24. Julia Lust and Alexandru P Condurache. Efficient detection of adversarial, out-of-distribution and other misclassified samples. *Neurocomputing*, 470:335–343, 2022.
25. Balint Gyevnar and Atoosa Kasirzadeh. Ai safety for everyone. *Nature Machine Intelligence*, 7(4):531–542, 2025.