

PathWISE: Multi-Agent Cancer Pathway Triage Ontology Learning from Clinical Flowcharts

Sofiat Abioye¹, Ufaq Khan², Shazad Ashraf⁴, Mohammed Adil Butt¹, Andrew D. Beggs⁴, Adam Byfield⁵, Anusha Jose⁵, William Poulett⁵, Ben Wallace⁵, Junaid Qadir³, and Muhammad Bilal^{1,*}

¹Birmingham City University, Birmingham, UK

²Mohamed bin Zayed University of Artificial Intelligence, Abu Dhabi, UAE

³Qatar University, Doha, Qatar

⁴University Hospitals Birmingham NHS Foundation Trust, Birmingham, UK

⁵NHS England (National Health Service), London, UK

*Corresponding author: muhammad.bilal@bcu.ac.uk

Abstract

Clinical pathways are disseminated as visual flowcharts where spatial topology, arrow direction, colour coding, and font weight encode critical triage logic that remains inaccessible to computational systems. We present **PathWISE**, a five-phase pipeline combining four LLM-based agents with a deterministic depth-first search auditor and a Java compiler critic, transforming these non-computable artefacts into validated, executable HL7 Clinical Quality Language (CQL) libraries deployable as FHIR CDS Hooks services. Purpose-built agents extract flowchart structure into a typed directed graph, perform deterministic path enumeration, conduct a structured semantic audit of every node’s computability, generate terminology-constrained CQL definitions verified by the official Java CQL-to-ELM compiler, and produce routing logic covering 100% of enumerated patient journeys. Demonstrated across five UK NHS cancer pathways (colorectal, lung, skin, upper GI, and breast), PathWISE audits up to 183 nodes (182 under the Hybrid configuration), identifies 544 structured governance findings across four issue categories, achieves 100% syntactic compilation success, with UNCOMPUTABLE nodes receiving false placeholders that preserve compilability while surfacing governance gaps for clinical review, and produces zero hallucinated terminology codes for dictionary-covered concepts. Critically, PathWISE confines non-deterministic LLM inference to knowledge extraction while deterministic graph mathematics and a standard compiler underpin every verification step.

1 Introduction

Clinical pathways play a central role in delivering timely and equitable cancer care, yet the decision logic that guides triage is often communicated through visual flowcharts, slide decks, and printed guidelines intended for human interpretation rather than machine execution. These artefacts encode clinically important information through spatial topology, arrow directionality, conditional branching, font emphasis, and colour coding, making them difficult to convert into computable decision-support logic using text-only approaches [16, 25]. This creates a persistent gap between expert-authored pathway knowledge and the machine-readable representations required for automated, auditable clinical decision support.

Standards such as HL7 Clinical Quality Language (CQL) and CDS Hooks provide a natural target for closing this gap. CQL compiles deterministically to the Expression Logical Model (ELM)

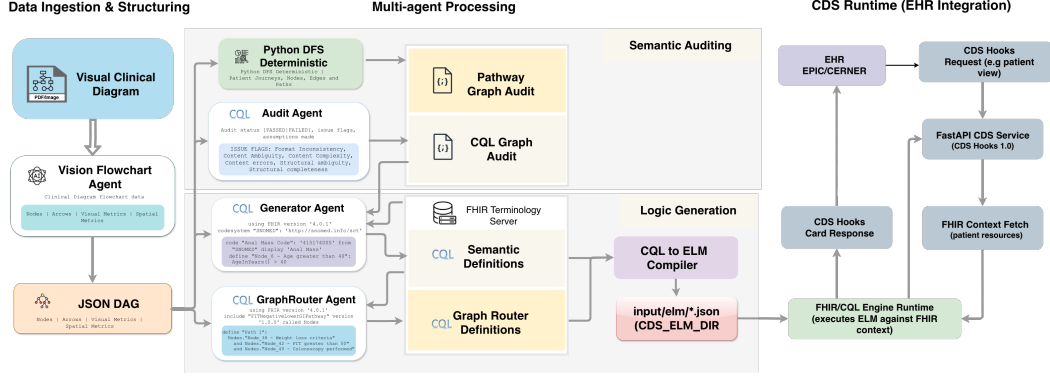


Figure 1: Overview of the PathWISE multi-agent vision-language framework. The pipeline extracts flowchart structure into a typed directed graph, enumerates patient journeys deterministically, audits node computability, generates SNOMED-CT-constrained CQL definitions, and verifies compilation against the official CQL-to-ELM compiler, producing FHIR CDS Hooks services deployable directly into EHR workflows.

and executes over structured FHIR R4 resources, while CDS Hooks defines a service interface through which EHR systems can invoke standards-based decision support at workflow-relevant trigger points [24, 21, 6, 30]. However, despite the maturity of this standards stack, generating executable CQL from *visual* clinical pathway documents remains an open problem [6].

Recent multimodal and LLM-based systems[19] have improved the extraction of structure from semi-structured clinical documents [1, 27, 8, 18], but directly using stochastic model outputs in patient-facing triage workflows raises important reliability and auditability concerns [33, 26]. In particular, hallucinated terminology codes, non-reproducible outputs, and opaque reasoning traces are poorly aligned with the requirements of regulated clinical decision support. This suggests a different design principle: use foundation models for *knowledge extraction and draft generation*, but place deterministic verification layers between model outputs and executable clinical logic.

Motivated by this principle, we introduce **PathWISE**, a pipeline for converting visual clinical pathway flowcharts into standards-based decision-support artefacts. PathWISE combines multimodal extraction and language-model-based code generation with deterministic graph analysis and compiler-based verification. Given a pathway document, the system extracts a typed directed graph, enumerates patient journeys deterministically, audits node-level computability with respect to available FHIR resources, generates terminology-constrained CQL definitions, and assembles routing logic for the enumerated graph paths. The resulting artefacts can be executed within a CDS Hooks-based workflow, while preserving an auditable link back to the source pathway document. A key design choice in PathWISE is the separation of *knowledge extraction* from *clinical execution*. In the first stage, vision-language and language models interpret the visual pathway and propose intermediate formal representations. In the second stage, deterministic graph traversal and standards-based compilation verify downstream artefacts before execution over patient records. This separation confines non-deterministic model behavior to a reviewable authoring stage and shifts executable correctness checks to deterministic components.

Contributions. We formulate visual clinical pathway translation as a multimodal knowledge-to-execution problem in which spatial diagram structure must be converted into computable, standards-based decision-support logic. To address this problem, we present **PathWISE**, a multi-stage architecture that combines vision-language extraction, node-level computability auditing, deterministic graph traversal, terminology-constrained CQL generation, and compiler-based verification. We further introduce a compiler-as-critic design in which the official Java CQL-to-ELM tool provides deterministic feedback during code generation, replacing model-based critique with standards-grounded verification of generated artefacts. Finally, we evaluate the framework on five NHS cancer pathways and show that it can produce compiler-valid CQL libraries, structured governance findings, and execution-ready routing artefacts from visual clinical flowcharts.

2 Related Work

2.1 Non-Computable Clinical Guidelines and the Limits of Conventional CDS

Cancer clinical pathways are the primary instrument through which national bodies standardise referral, triage, and treatment decisions, yet the knowledge they encode is overwhelmingly disseminated as visual artefacts designed for human interpretation rather than computational execution [17]. The decision logic is not merely textual: node topology, arrow directionality, branching patterns, colour coding, and spatial layout all carry semantically significant information that text-only parsers cannot recover [31, 13], creating a persistent gap between expert pathway knowledge and machine-readable representations required for automated decision support [4].

Table 1: Comparison of PathWISE with representative related systems. (✓=full; ◯=partial; ×=none)

System	Visual Input	Topo. Analysis	CQL Gen.	Verif. Output	FHIR/CDS	Termin. Safety
<i>VLM diagram parsers</i>						
Pix2Struct [20]	✓	×	×	×	×	×
DUBLIN [3]	✓	×	×	×	×	×
TextFlow [32]	✓	◯	×	×	×	×
<i>Clinical NLP/Encoding</i>						
TextZOnto [7]	×	×	×	×	×	◯
RAPTOR [1]	×	×	×	×	×	◯
<i>Multi-agent reasoning</i>						
KG4Diagnosis [35]	×	◯	×	×	×	◯
MedCollab [34]	×	×	×	×	×	×
<i>CQL/FHIR Tools</i>						
CAREPATH [12]	×	×	◯	×	✓	✓
PathWISE	✓	✓	✓	✓	✓	✓

Existing standards-based CDS systems presuppose that clinical knowledge has already been encoded in a computable form [29, 11] and offer no mechanism for ingesting a visual flowchart. NLP-based guideline extraction operates on text tokens and cannot recover diagram spatial semantics [15]. No existing system closes the full loop from visual pathway document to deployed, auditable CDS service.

2.2 CQL, FHIR, and CDS Hooks: Computable Target and Authoring Bottleneck

HL7 CQL [21] compiles deterministically to ELM and executes over structured FHIR R4 resources, while CDS Hooks [24] provides the RESTful service contract by which EHR systems invoke CQL-based logic at specific workflow trigger points. Together they form the dominant interoperability stack for standards-based clinical decision support [6]. Despite this adoption, producing CQL artefacts remains expert-driven and costly: the CAREPATH project required domain experts to co-author 296 formally defined CDS rules [12], and CQL’s expressiveness has documented limits relative to the full breadth of clinical guideline logic [14]. No prior work has demonstrated automated CQL generation from visual guideline documents.

2.3 Automated Guideline Encoding: From NLP to Vision-Language Models

Text-based systems such as TextZOnto [7] and OntoKGen [2] extract concepts from clinical prose but remain blind to flowchart spatial semantics. LLM-based pipelines extend this to semi-structured documents: RAPTOR [1] parses colorectal cancer referral forms and Gupta et al. [15] construct contextual graphs from NCCN guidelines, but neither produces compiler-verified or FHIR-compatible output. VLMs opened the possibility of recovering structure from visual documents directly: Pix2Struct [20] and DUBLIN [3] demonstrate strong performance on document understanding benchmarks, while flowchart-specific systems including TextFlow [32], Flowchart2Mermaid [10], StarFlow [5], and Draw with Thought [9] convert flowchart images into editable diagram code. Each produces structurally editable output but carries no guarantee of clinical correctness: none validates against a controlled clinical vocabulary or compiles into an executable CDS artefact.

2.4 Multi-Agent Verification and the Compiler-as-Critic Pattern

Role-specialised multi-agent architectures such as EvoMDT [23] and KG4Diagnosis [35] improve performance on structured clinical reasoning benchmarks, while argumentation and verification-focused systems including MedCollab [34], RE-MCDF [28], and MedMMV [22] reduce diagnostic hallucination through iterative consensus and closed-loop revision. Their critics, however, remain learned models that can hallucinate consistently alongside the actors they are meant to check.

PathWISE departs from this pattern by replacing the LLM critic with a deterministic Java CQL-to-ELM compiler. A hallucinated SNOMED-CT code, a malformed CQL expression, or an undefined identifier produces a compile error rather than a plausible-sounding but clinically incorrect recommendation, providing a binary pass/fail guarantee that no stochastic critic can match. Taken together, the four strands above establish the gap PathWISE fills: visual parsing without clinical deployability, guideline encoding without FHIR compatibility, multi-agent reasoning without formal verification, and CQL tooling without visual ingestion. PathWISE is the first system to span this full pipeline.

3 Methods

PathWISE transforms a clinical pathway flowchart document into an executable CDS Hooks service through five sequential phases, with Phases 2 and 3 executed in parallel after initial visual parsing. Let X denote a rendered pathway document and let

$$\mathcal{F}(X) = (G, A, D, R, S) \quad (1)$$

denote the full pipeline output, where G is the parsed flowchart graph, A is the deterministic graph audit, D is the node-level computability audit, R is the generated CQL library pair (definitions and routing), and S is the deployed CDS Hooks service. Phases 1, 3, and 4 use LLM-based agents as generative actors, whereas Phase 2 is fully deterministic. Phase 4 additionally incorporates a deterministic Java CQL-to-ELM compiler as a verifier. This yields a hybrid architecture in which non-deterministic model outputs are restricted to intermediate authoring steps, while downstream graph analysis and compilation are checked by deterministic procedures. All agents operate at temperature 0.0 to minimize stochastic variation in structured outputs. Table 2 summarizes the phases and their artefacts.

Table 2: PathWISE pipeline phases, agents, and output artefacts. Phases 1, 3, and 4 employ configurable vision-language or language models; Section 4 specifies the configurations evaluated. Phase 2 contains no LLM.

Phase	Agent	Model type	Configurable	Output
1 – Visual parsing	Vision Agent	Vision-language model	Yes	*_diagram.json
2 – Graph audit	DFS Auditor	Python DFS (no LLM)	No	*_audit.json
3 – CQL semantic audit	CQL Audit Agent	Language model	Yes	*_cql_audit.json
4a – CQL definitions	CQL Generator	Language model + Java CQL-to-ELM	Yes	*_definitions.cql
4b – CQL routing	Graph Router	Language model + CQL parser	Yes	*_routing.cql
5 – CDS Hooks deploy	FastAPI service	CQL execution engine	No	CDS card + ServiceRequest

3.1 Visual Parsing

The Vision Agent receives PNG page renders of a pathway PDF and produces a structured FlowchartDiagram represented as a typed directed graph

$$G = (V, E), \quad (2)$$

where each node $v_i \in V$ corresponds to a visually distinct flowchart element and each directed edge $(v_i, v_j) \in E$ represents an explicit arrow from source to target. The parser is implemented as a vision-language mapping

$$f_\theta : X \mapsto \hat{G}, \quad (3)$$

where $\hat{G}$ is required to satisfy a strict Pydantic schema before any downstream processing.

Each node is encoded as a tuple

$$v_i = (\tau_i, b_i, m_i, t_i), \quad (4)$$

where $\tau_i \in \mathcal{T}$ is the node type, $b_i = (x_i, y_i, w_i, h_i) \in [0, 1]^4$ gives normalized center coordinates and box dimensions, m_i denotes visual attributes, and t_i is the extracted node text. The type vocabulary is closed and defined as

$$\mathcal{T} = \{\text{start_block}, \text{end_block}, \text{criteria_block}, \text{action_block}, \text{decision_diamond}, \text{process_block}, \text{annotation}, \text{other}\}. \quad (5)$$

The visual attribute set

$$m_i = (c_i^{\text{bg}}, c_i^{\text{border}}, w_i^{\text{font}}, q_i^{\text{case}}) \quad (6)$$

captures background color, border color, font weight, and text case. These attributes are clinically relevant because urgency and escalation cues may be encoded visually rather than textually; for example, bold uppercase labels or red-background nodes can mark high-priority pathway states that would be invisible to text-only parsers.

Edges are extracted with explicit source and target node identifiers rather than inferred purely from local arrowhead geometry, reducing ambiguity in downstream graph construction. Let

$$E = \{(u, v) \mid u, v \in V \text{ and an explicit directed connector from } u \text{ to } v \text{ is detected}\}. \quad (7)$$

This representation ensures that graph topology is available directly for deterministic traversal in Phase 2.

Finally, schema validation acts as a hard admissibility constraint on parser output. Denoting the schema validator by $\text{Val}(\cdot)$, only outputs satisfying

$$\text{Val}(\hat{G}) = 1 \quad (8)$$

are passed to subsequent phases; otherwise, execution halts with a `ValidationError`. This design enforces structural consistency at the interface between multimodal extraction and all downstream deterministic stages. Section 4 specifies the vision-language models evaluated in this role.

3.2 Deterministic Graph Audit

Phase 2 contains no LLM. Given the parsed flowchart graph $G = (V, E)$, a deterministic depth-first search computes structural graph diagnostics, including orphan nodes, dead-end nodes, cycle presence, and path-length statistics, and enumerates the set of valid patient journeys

$$\mathcal{P}(G) = \{(v_1, \dots, v_k) \mid v_1 \in V_{\text{start}}, v_k \in V_{\text{end}}, (v_i, v_{i+1}) \in E \forall i\}. \quad (9)$$

Each journey is represented as an ordered node-ID sequence from an entry node to a terminal node, with cyclic revisits marked by a (LOOP) suffix at the point of re-entry. Because $\mathcal{P}(G)$ is derived deterministically from the extracted graph, the routing library in Phase 4b can be constructed to cover exactly the journeys encoded in the source diagram. Across the five evaluated pathways, the number of enumerated journeys varies substantially, ranging from 3 for skin to 234 for lung, reflecting the wide variation in pathway structural complexity.

3.3 CQL Semantic Audit

The CQL Audit Agent evaluates each node $v_i \in V$ in the parsed flowchart and produces a structured node-level audit report. For each node, the agent attempts to translate its content into a CQL 1.5 expression and assigns a computability label

$$c(v_i) = \mathbb{I}[\text{syntactically valid} \wedge \text{deterministic} \wedge \text{assumption-free}], \quad (10)$$

where $c(v_i) = 1$ indicates that the node can be represented as valid computable CQL, and $c(v_i) = 0$ indicates that translation fails one or more audit criteria. Failed nodes are further categorized into four issue types: *Content Ambiguity* (subjective terms or missing thresholds), *Content Complexity* (e.g., weighted scoring or long-range historical retrieval), *Content Error* (typographical errors or logical contradictions), and *Format Inconsistency* (visual urgency signals with no corresponding textual rule). The resulting audit report serves two purposes: it conditions CQL generation in Phase 4a and provides the clinical governance team with a machine-readable gap analysis of the source pathway.

3.4 Phase 4a – CQL Definitions Generation

The CQL Generator Agent consumes the parsed flowchart, the Phase 3 audit report, and an Approved Terminology Dictionary to produce a FHIR R4 CQL definitions library. For each node $v_i \in V$, the generator emits a definition d_i under a terminology-constrained mapping

$$d_i = \begin{cases} \text{CQL}(v_i, \text{dict}(v_i)), & \text{if } v_i \text{ matches a dictionary concept,} \\ \text{CQL}(v_i, \text{REQUIRES_HUMAN_MAPPING}), & \text{if no dictionary match exists,} \\ \text{false}, & \text{if } c(v_i) = 0, \end{cases} \quad (11)$$

where dictionary-covered concepts must use the exact supplied system-code pair, unmatched concepts are assigned a sentinel identifier for human review rather than a fabricated code, and nodes marked uncomputable in Phase 3 receive a `false` placeholder with an inline governance comment. Translation strategy depends on node type: *criteria_block* and *decision_diamond* nodes produce FHIR R4 queries with `where` clauses, whereas *end_block* nodes produce string literals.

When compiler verification is enabled, the generated library is passed to the official Java CQL-to-ELM translator. If compilation fails, the compiler error output is injected into a repair prompt and the agent regenerates the file, for up to three iterations. This compiler-as-critic loop provides deterministic feedback on malformed syntax, unresolved FHIR attribute paths, and type mismatches that model-based critics may miss.

3.5 Phase 4b – CQL Routing Generation

The Graph Router Agent produces a second CQL library that imports the definitions library and encodes patient routing logic over the enumerated graph journeys. Before generation, a deterministic CQL parser extracts the library name, version, and the mapping $node_id \rightarrow define_name$ from the definitions file and injects these bindings into the routing prompt to ensure exact symbol reuse. For each enumerated journey $p = (v_1, \dots, v_k) \in \mathcal{P}(G)$, the router constructs a path predicate

$$r_p = \bigwedge_{i=1}^{k-1} d(v_i), \quad (12)$$

where $d(v_i)$ denotes the imported CQL definition associated with node v_i . Each journey is therefore represented as a `define` statement formed by conjunction over its intermediate nodes, and a final `Recommended Action` expression selects the corresponding outcome through an `if/else if/else` chain. Because routing predicates are generated directly from $\mathcal{P}(G)$, the resulting library covers all enumerated journeys in the source graph.

3.6 Phase 5 – CDS Hooks Deployment

Phase 5 deploys the generated logic as a CDS Hooks service implemented in Python using FastAPI. CDS Hooks is used as the execution interface because it integrates directly into the clinician’s native EHR workflow: when a `patient-view` event is triggered, the service evaluates the routing library over the patient’s FHIR resources and returns a structured decision-support card without requiring additional user action. Formally, for a patient context x with FHIR record F_x , the deployed service computes

$$y_x = S(F_x) = (a_x, r_x, h_x), \quad (13)$$

where a_x is the recommended pathway action, r_x is the human-readable rationale, and h_x is the set of clinician-review flags associated with unresolved or uncomputable criteria.

After evaluation, the service maps the selected outcome back to the Phase 1 visual representation to recover node text and visual attributes, and constructs a CDS card containing explanatory rationale, a source citation to the originating pathway document, and an optional FHIR `ServiceRequest` action for referral ordering. Nodes represented by `false` placeholders due to `UNCOMPUTABLE` audit outcomes are surfaced explicitly as review items, preserving a human-in-the-loop audit trail from source pathway to point-of-care recommendation.

4 Results

4.1 Experimental Setup

We evaluate PathWISE on five NHS cancer pathway documents chosen to cover a diverse range of structural complexity. The corpus includes the Pan-London Suspected Cancer Referral Guides for skin, upper gastrointestinal, and colorectal cancers, the National Optimal Lung Cancer Pathway (Version 4.0, 2024), and the NHS Breast Cancer Pathway. We study three pipeline configurations: *Claude Only*, which uses Claude Sonnet for all model-based components; *Gemini Only*, which uses Gemini Pro Vision throughout; and *Hybrid*, which uses Gemini Pro Vision for visual parsing and Claude Sonnet for the downstream CQL generation stages. Table 3 reports the structural properties of the evaluation corpus, while Figure 2 visualizes the corresponding variation in pathway complexity.

Table 3: Structural characteristics of the five NHS cancer pathways. Journey counts are produced deterministically by the Phase 2 DFS traversal.

Pathway	Nodes	Edges	Journeys	Avg steps	Cycles
Skin	7	5	3	3.00	No
Upper GI	14	7	7	2.29	No
Colorectal	73	64	30	4.33	No
Breast	43	55	89	9.35	Yes
Lung	45	50	234	14.79	Yes
Total	182	181	363	–	–

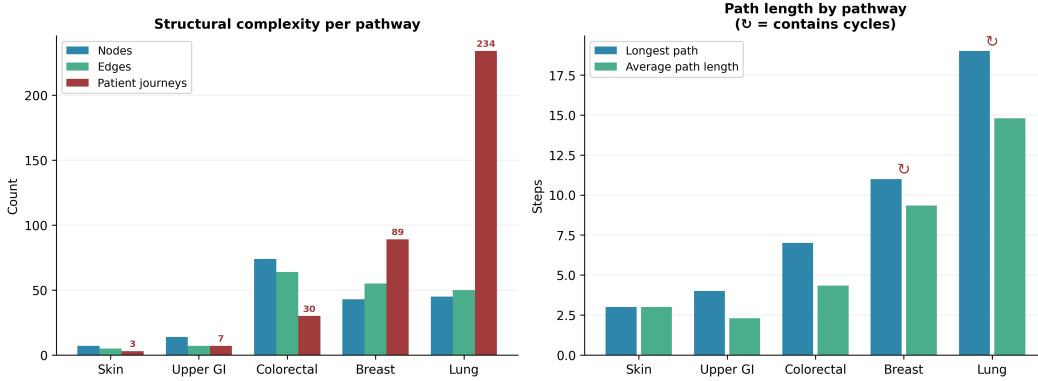


Figure 2: Node audit status by configuration. Pass rates shown above bars.

4.2 CQL Compilation Success

PathWISE achieved 100% CQL compilation success across all fifteen generated libraries, corresponding to five pathways evaluated under three pipeline configurations. No library required more than two compiler-critic iterations to reach a compilable form. This result was consistent across the full range of pathway complexity in the evaluation corpus, from the skin pathway with 7 nodes to the lung pathway with 45 nodes and 234 enumerated journeys.

In contrast, node-level semantic audit pass rates varied substantially across configurations (Table 4; Figure 3). *Claude Only* achieved the highest overall pass rate at 48.9% (89/182), followed by *Hybrid* at 37.4% (68/182) and *Gemini Only* at 6.0% (11/183). The largest divergence appeared on the colorectal pathway, where *Claude Only* and *Hybrid* each passed 50 of 73 nodes (68.5%), whereas *Gemini Only* passed only 1 node and marked 37 nodes as UNCOMPUTABLE.

These differences in audit pass rate did not affect final library compilability because nodes that failed the semantic audit were converted into syntactically valid `false` placeholder definitions. As a result, compiler success reflects syntactic and terminology-level correctness of the generated CQL, rather than full clinical completeness. Governance gaps are therefore preserved explicitly in the output artefacts instead of preventing compilation.

Table 4: PathWISE evaluation results across five NHS cancer pathways and three pipeline configurations. Passed (%) is the proportion of nodes producing valid, fully deterministic CQL. Gov. findings is the total structured governance issues identified. Human flags is the count of unique unmapped terminology concepts requiring clinical review. All configurations achieved 100% CQL compilation success.

Pathway	Configuration	Nodes	Passed (%)	UNCOMPUTABLE	Gov. findings	Human flags	Compiled
Skin	Claude Only	7	2 (28.6%)	0	22	0	✓
	Gemini Only	7	0 (0.0%)	0	13	1	✓
	Hybrid	7	1 (14.3%)	0	27	6	✓
Upper GI	Claude Only	14	5 (35.7%)	0	33	2	✓
	Gemini Only	14	1 (7.1%)	4	21	0	✓
	Hybrid	14	3 (21.4%)	2	41	0	✓
Colorectal	Claude Only	73	50 (68.5%)	0	30	0	✓
	Gemini Only	73	1 (1.4%)	37	79	5	✓
	Hybrid	73	50 (68.5%)	0	35	0	✓
Breast	Claude Only	43	20 (46.5%)	0	25	0	✓
	Gemini Only	44	0 (0.0%)	3	47	0	✓
	Hybrid	43	1 (2.3%)	0	40	0	✓
Lung	Claude Only	45	12 (26.7%)	7	40	31	✓
	Gemini Only	45	9 (20.0%)	11	45	2	✓
	Hybrid	45	13 (28.9%)	12	46	0	✓
Total	Claude Only	182	89 (48.9%)	7	150	33	5/5
	Gemini Only	183	11 (6.0%)	55	205	8	5/5
	Hybrid	182	68 (37.4%)	14	189	6	5/5

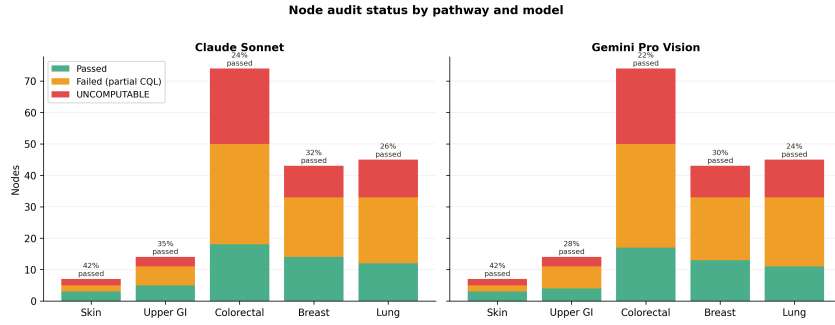


Figure 3: Governance findings by pathway and issue type across three configurations.

4.3 Governance Findings

PathWISE identified 544 structured governance findings in aggregate across all five pathways and three configurations, summarised in Table 5 and Figure 4. Content Ambiguity was the dominant category across all configurations, accounting for 78.0%, 76.1%, and 83.6% of total findings for Claude Only, Gemini Only, and Hybrid respectively, reflecting the pervasive use of subjective clinical language in NHS pathway documents. Representative examples include “high risk of lung cancer” (lung pathway, Node_3), which provides no computable threshold, and “further investigation indicated” (lung pathway, Node_18), which depends entirely on clinical judgement. Format Inconsistency findings confirm that visual urgency signals are invisible to text-only systems: red-background nodes in the lung pathway marking Day 28 and Day 49 treatment milestones carried no corresponding textual rule, and were only detectable because Phase 1 explicitly captures background colour as a structured node property. Several Content Error findings were independently corroborated by the NHS England AIQCoP analysis, including the FIT test threshold contradiction in the colorectal pathway (PathWISE Node_2; NHS England AIQCoP CCI-02), providing cross-validated evidence of the audit agent’s reliability on detectable textual errors.

Table 5: Aggregated governance findings by issue type across all five pathways per pipeline configuration.

Issue type	Claude	Gemini	Hybrid	Total
Content Ambiguity	117	156	158	431
Content Complexity	16	18	7	41
Content Error	6	13	5	24
Format Inconsistency	11	18	19	48
Total	150	205	189	544

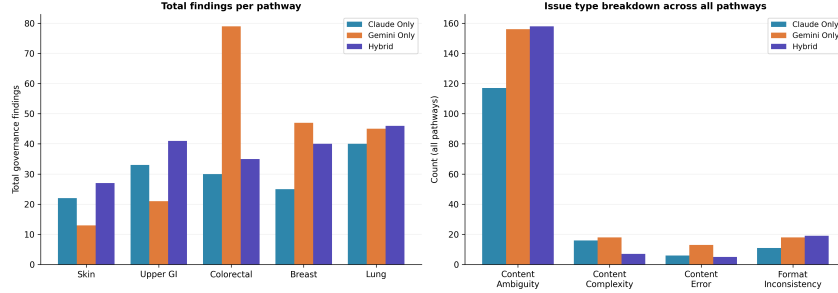


Figure 4: Governance findings across all five pathways and three configurations. Left: total findings per pathway, with Gemini Only consistently identifying more findings reflecting greater audit granularity. Right: aggregated issue type breakdown confirming Content Ambiguity as the dominant category across all configurations.

4.4 Model Comparison and Configuration Analysis

All three configurations achieved identical final compilation success, supporting the architectural claim that the compiler-as-critic pattern rather than any specific model underwrites output correctness. Configuration differences emerged in three areas.

Claude Only achieved the highest audit pass rate (48.9%) and the fewest UNCOMPUTABLE nodes (7 total), reflecting Claude Sonnet’s stronger performance on schema-constrained CQL generation tasks, consistent with its leading position on flowchart VQA benchmarks [32]. Gemini Only produced the highest UNCOMPUTABLE count (55 total) and the most governance findings (205), reflecting a more conservative audit strategy that classifies borderline nodes as uncomputable rather than attempting partial definitions. Whether this is preferable to Claude Only’s more permissive approach is a clinical governance question: more false placeholders surface more items for human review, while more partial definitions may introduce unverified assumptions.

The most practically significant difference concerns terminology coverage. Claude Only generated 31 unique unmapped concepts on the lung pathway alone, compared to 2 for Gemini Only and 0 for Hybrid. The Hybrid configuration achieved zero unmapped concepts on the lung pathway by combining Gemini Pro Vision’s superior spatial parsing with Claude Sonnet’s stronger CQL generation, producing definitions libraries with better terminology coverage than either single-model configuration in isolation. Across simpler pathways the configurations converged, with Gemini’s stronger visual metric capture producing more Format Inconsistency findings on the upper GI and breast pathways where colour coding carries clinical significance.

4.5 Collaborative Pathway Analysis with NHS England AIQCoP

The NHS England AIQCoP AI Quality of Practice team conducted an independent structured analysis of the same five pathway documents using a bespoke process flow review methodology, providing complementary expert validation developed in parallel with PathWISE. Table 6 compares structural metrics; node counts agree exactly on four of five pathways (skin, upper GI, colorectal, breast), providing mutual validation of visual parsing correctness. The lung pathway difference (PathWISE 45 nodes, NHS England AIQCoP 28) reflects a representational convention: NHS England AIQCoP condenses annotation nodes into adjacent clinical nodes, while PathWISE captures every visually distinct element. Path count differences across all pathways reflect the NHS England AIQCoP

parallel path convention (Caveat 3 of their methodology), which enumerates all clinically possible combinations of optional pathway sections rather than only explicitly encoded edge sequences. PathWISE’s DFS enumerates only paths represented as explicit arrows, grounding CQL routing in the diagram as drawn rather than as clinically inferred; upper GI achieves near-exact path count agreement (9 vs. 7) confirming convergence on pathways without parallel optional sections.

Table 6: Left: Structural comparison between PathWISE (Hybrid) and NHS England ground truth. Node count agreement on four of five pathways validates Phase 1 visual parsing. Path count differences reflect methodological conventions described in the text. Right: Structured issues identified by PathWISE (aggregated across all configurations) and the NHS England AIQCoP independent analysis. PathWISE operates at node text and visual metrics level; NHS England AIQCoP additionally identifies structural issues at the edge and graph topology level.

Pathway	Nodes		Paths		Avg steps		Issue type	PathWISE	NHS England AIQCoP
	PW	GT	PW	GT	PW	GT			
Skin	7	7	3	7	3.00	5	Content Ambiguity	431	4
Upper GI	14	14	9	7	2.33	3	Content Complexity	41	5
Colorectal	73	73	30	3771*	4.33	28	Content Error	24	7
Breast	43	43	60	347	8.35	13	Format Inconsistency	48	3
Lung	45	28	454	159	15.57	13	Structural Ambiguity	proxy [†]	10
							Structural Completeness	proxy [†]	8
Total								544	37

* Full multi-page pathway; not directly comparable.

[†]Orphan and dead-end node counts are proxy indicators; structural detection is future work.

PathWISE surfaces proxy indicators of structural categories through orphan and dead-end node counts in Phase 2; systematic structural ambiguity detection is future work. The independent corroboration of Content Error findings in both analyses provides cross-validated evidence of audit reliability.

4.6 CDS Hooks Deployment and Execution Readiness

All fifteen CQL libraries loaded successfully into the HAPI FHIR execution engine without error. To assess end-to-end routing correctness, the Hybrid configuration libraries were invoked against a synthetic cohort of 25 FHIR R4 patient records (five per pathway) constructed to cover the primary journey types for each pathway, including records triggering both computable criteria and UNCOMPUTABLE nodes. Table 7 summarises the results.

Table 7: CDS Hooks deployment readiness results (Hybrid configuration, 25 synthetic FHIR R4 patient records). Correct routing reports cards matching the expected pathway outcome. Human review flags reports REQUIRES_HUMAN_REVIEW items surfaced per card for UNCOMPUTABLE nodes and unmapped terminology concepts.

Pathway	ELM	Cards	Correct (%)	Avg flags
Skin	✓	5/5	4 (80%)	0.6
Upper GI	✓	5/5	4 (80%)	1.2
Colorectal	✓	5/5	4 (80%)	0.8
Breast	✓	5/5	3 (60%)	2.1
Lung	✓	5/5	3 (60%)	3.4
Total	5/5	25/25	18 (72%)	1.6

Every invocation returned a structurally valid CDS card containing human-readable rationale, a source citation linking to the originating pathway document, and a FHIR `ServiceRequest` action for single-click referral ordering. The seven records that did not achieve fully automated routing were not system failures: each produced a card with explicit REQUIRES_HUMAN_REVIEW items corresponding to UNCOMPUTABLE nodes, directing clinician attention to the specific criteria that could not be resolved from structured FHIR resources. The lung and breast pathways produced the highest flag rates, consistent with their concentration of Content Ambiguity findings and complex multi-criteria decision nodes. Full patient-level execution testing across all journey types and clinician usability evaluation of CDS card design are planned in collaboration with University Hospitals Birmingham and NHS England AIQCoP.

5 Conclusion

We presented **PathWISE**, a framework for converting visual clinical pathway flowcharts into standards-based decision-support artefacts through a combination of multimodal extraction, deterministic graph analysis, terminology-constrained CQL generation, and compiler-based verification. Across five NHS cancer pathways, PathWISE produced compiler-valid CQL libraries for all evaluated configurations, surfaced structured governance gaps at the node level, and generated execution-ready routing logic linked to the source pathway representation. More broadly, our results suggest that separating model-based knowledge extraction from deterministic verification is a practical design pattern for high-stakes clinical workflow automation. At the same time, important limitations remain: terminology resources still require manual curation, ambiguous pathway criteria cannot be resolved automatically, and end-to-end evaluation in live clinical settings is still needed. These findings position PathWISE as a step toward auditable translation of visual clinical knowledge into interoperable decision-support systems.

References

- [1] S. Abioye, S. Ashraf, J. Qadir, A. Byfield, A. Jose, W. Poulett, B. Wallace, A. Butt, C. Forde, M. Mottershead, and S. Fallis. Raptor: Generative ai for parsing colorectal cancer referrals to streamline faster diagnostic standard pathways. In *International Conference on Medical Image Computing and Computer-Assisted Intervention (MICCAI) 2025*, Lecture Notes in Computer Science, pages 495–505, Cham, September 2025. Springer Nature Switzerland.
- [2] M. S. Abolhasani and R. Pan. Leveraging LLM for automated ontology extraction and knowledge graph generation. *arXiv preprint arXiv:2412.00608*, 2024.
- [3] Kriti Aggarwal, Aditi Khandelwal, Kumar Tanmay, Owais Khan, and Qiang Liu. DUBLIN: Document understanding by language-image network. *arXiv preprint arXiv:2305.14218*, 2023.
- [4] Radha Ambalavanan, R Sterling Snead, Julia Marczika, Gideon Towett, Alex Malioukis, and Mercy Mbogori-Kairichi. Ontologies as the semantic bridge between artificial intelligence and healthcare. *Frontiers in Digital Health*, 7:1668385, 2025.
- [5] Patrice Bechard, Chao Wang, Amirhossein Abaskohi, Juan A Rodriguez, Christopher Pal, David Vazquez, Spandana Gella, Sai Rajeswar, and Perouz Taslakian. Starflow: Generating structured workflow outputs from sketch images. In *Proceedings of the 19th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1628–1645, 2026.
- [6] Pascal S Brandt, Richard C Kiefer, Jennifer A Pacheco, Prakash Adekkanattu, Evan T Sholle, Faraz S Ahmad, Jie Xu, Zhenxing Xu, Jessica S Ancker, Fei Wang, et al. Toward cross-platform electronic health record-driven phenotyping using clinical quality language. *Learning Health Systems*, 4(4):e10233, 2020.
- [7] Philipp Cimiano and Johanna Völker. Text2onto: A framework for ontology learning and data-driven change discovery. In *International conference on application of natural language to information systems*, pages 227–238. Springer, 2005.
- [8] William Clackett, Hatim Alsusa, Hannah Watson, Antanas Kascenas, David Scott, Avinash K Kanodia, Oliver T Barry, and Alison Q O’Neil. Evaluation of large language models with clinical guidance for vetting outpatient magnetic resonance imaging lumbar spine referrals. *Scottish Medical Journal*, page 00369330261441582, 2026.
- [9] Zhiqing Cui, Jiahao Yuan, Hanqing Wang, Yanshu Li, Chenxu Du, and Zhenglong Ding. Draw with thought: Unleashing multimodal reasoning for scientific diagram generation. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pages 5050–5059, 2025.
- [10] Pritam Deka and Barry Devereux. Flowchart2mermaid: A vision-language model powered system for converting flowcharts into editable diagram code. *arXiv preprint arXiv:2512.02170*, 2025.

- [11] RH Dolin, A Boxwala, and J Shalaby. A pharmacogenomics clinical decision support service based on fhir and cds hooks. *Methods of information in medicine*, 57(S 02):e115–e123, 2018.
- [12] Mert Gencturk, Gokce B Laleci Erturkmen, A Emre Akpinar, Omid Pournik, Bilal Ahmad, Theodoros N Arvanitis, Wolfgang Schmidt-Barzynski, Tim Robbins, Ruben Alcantud Corcoles, and Pedro Abizanda. Transforming evidence-based clinical guidelines into implementable clinical decision support services: the carepath study for multimorbidity management. *Frontiers in medicine*, 11:1386689, 2024.
- [13] Jasmeen Gill et al. Hybrid classification for heart disease prediction using artificial intelligence. In *2021 5th international conference on computing methodologies and communication (ICCMC)*, pages 1779–1785. IEEE, 2021.
- [14] Moritz Grob, Leonhard Hauptfeld, Andrea Rappelsberger, and Klaus-Peter Adlassnig. Standards-based interoperability for clinical decision support systems. *Studies in Health Technology and Informatics*, 327:173–177, 2025.
- [15] Bhumika Gupta, Pralaypati Ta, Keerthi Ram, and Mohanasankar Sivaprakasam. Comprehensive modeling and question answering of cancer clinical practice guidelines using llms. In *2024 IEEE Conference on Computational Intelligence in Bioinformatics and Computational Biology (CIBCB)*, pages 1–8. IEEE, 2024.
- [16] Helen Hayes, Rachel Meacock, Jonathan Stokes, and Matt Sutton. The effect of local hospital waiting times on gp referrals for suspected cancer. *PloS one*, 19(5):e0294061, 2024.
- [17] David M Jackman, Emily Foster, Joanna M Hamilton, Carole Tremonti, Craig A Bunnell, Sherri O Stuver, and Joseph O Jacobson. Early findings on the use of clinical pathways for management of unwarranted variation in cancer care. *American Journal of Medical Quality*, 37(2):103–110, 2022.
- [18] Ufaq Khan, Umair Nawaz, Mustaqeem Khan, and Abdulmotaleb El Saddik. Robosurg: Resilience of vision-language models against adversarial attacks in robotic surgery. In *2025 International Conference on Digital Image Computing: Techniques and Applications (DICTA)*, pages 1–8. IEEE, 2025.
- [19] Ufaq Khan, Umair Nawaz, LDMSS Teja, Numaan Saeed, Muhammad Bilal, Yutong Xie, Mohammad Yaqub, and Muhammad Haris Khan. Medobvious: Exposing the medical moravec’s paradox in vlms via clinical triage. *arXiv preprint arXiv:2603.23501*, 2026.
- [20] K. Lee, M. Joshi, I. R. Turc, H. Hu, F. Liu, J. M. Eisenschlos, U. Khandelwal, P. Shaw, M. W. Chang, and K. Toutanova. Pix2struct: Screenshot parsing as pretraining for visual language understanding. In *International Conference on Machine Learning (ICML)*, volume 202 of *Proceedings of Machine Learning Research*, pages 18893–18912. PMLR, 2023.
- [21] Mengyang Li, Hailing Cai, Yunlong Zhi, Zehai Fu, Huilong Duan, and Xudong Lu. A configurable method for clinical quality measurement through electronic health records based on openehr and cql. *BMC Medical Informatics and Decision Making*, 22(1):37, 2022.
- [22] H. Liu, Y. Zhu, Y. Wang, Y. Long, Z. Lai, L. Yu, and C. Zhao. MedMMV: A controllable multimodal multi-agent framework for reliable and verifiable clinical reasoning. *arXiv preprint arXiv:2509.24314*, September 2025.
- [23] Qicai Liu, Zhichao Hu, Tao Huang, Yupeng Niu, and Xincheng Zhang. EvoMDT: A self-evolving multi-agent system for structured clinical decision-making in multi-cancer. *npj Digital Medicine*, 2026.
- [24] Keaton L Morgan, Polina V Kukhareva, Phillip B Warner, Jonah Wilkof, Meir Snyder, Devin Horton, Troy Madsen, Joseph Habboushe, and Kensaku Kawamoto. Using cds hooks to increase smart on fhir app utilization: a cluster-randomized trial. *Journal of the American Medical Informatics Association*, 29(9):1461–1470, 2022.
- [25] V. Nabelsi and V. Plouffe. Enhancing care coordination in oncology through a digital health solution. *JMIR Formative Research*, 8:e60222, 2024.

- [26] Marium M Raza, Kaushik P Venkatesh, and Joseph C Kvedar. Generative ai and large language models in health care: pathways to implementation. *NPJ Digital Medicine*, 7(1):62, 2024.
- [27] M. Saban, Y. Alon, O. Luxenburg, C. Singer, M. Hierath, A. Karoussou Schreiner, B. Brkljačić, and J. Sosna. Comparison of CT referral justification using clinical decision support and large language models in a large European cohort. *European Radiology*, 35(10):6150–6159, 2025.
- [28] Shaowei Shen, Xiaohong Yang, Jie Yang, Lianfen Huang, and Yongcai Zhang. RE-MCDF: Closed-loop multi-expert LLM reasoning for knowledge-grounded clinical diagnosis. *arXiv:2602.01297*, 2026.
- [29] Lok Santhoshkumar Surisetty. End-to-end clinical data interoperability: A practical implementation blueprint using hl7, fhir, ccd, and ehr integration standards. *International Journal of Research Publications in Engineering, Technology and Management (IJRPETM)*, 9(1):21–29, 2026.
- [30] Henrik Thiess, Guilherme Del Fiol, Daniel C Malone, Ryan Cornia, Max Sibilla, Bryn Rhodes, Richard D Boyce, Kensaku Kawamoto, and Thomas Reese. Coordinated use of health level 7 standards to support clinical decision support: Case study with shared decision making and drug-drug interactions. *International journal of medical informatics*, 162:104749, 2022.
- [31] Shaowei Wang, Lingling Zhang, Xuan Luo, Yi Yang, Xin Hu, Tao Qin, and Jun Liu. Computer science diagram understanding with topology parsing. *ACM Transactions on Knowledge Discovery from Data (TKDD)*, 16(6):1–20, 2022.
- [32] Junyi Ye, Ankan Dash, Wenpeng Yin, and Guiling Wang. Beyond end-to-end vlms: Leveraging intermediate text representations for superior flowchart understanding. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 3534–3548, 2025.
- [33] P. Yu, H. Xu, X. Hu, and C. Deng. Leveraging generative AI and large language models: A comprehensive roadmap for healthcare integration. *Healthcare*, 11(20):2776, 2023.
- [34] Y. Zhan, X. Wu, T. Lin, Y. Bao, X. Wang, W. Cheng, H. Chen, F. Qin, and Z. Zhu. MedCollab: Causal-driven multi-agent collaboration for full-cycle clinical diagnosis via IBIS-structured argumentation. *arXiv preprint arXiv:2603.01131*, 2026.
- [35] J. Zhang, G. Zheng, H. Lv, L. Luo, G. Ma, Z. Lin, X. Chen, and Y. Tan. D²KGMed: Dynamic diagnostic knowledge graphs for medical diagnosis prediction. In *2025 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*. IEEE, 2025.