
AtomicMotion: Learning Human Motion From Different Human Parts

Runzhen Liu¹

csalunaticat@mail.scut.edu.cn

Chuhua Xian¹

chhxian@scut.edu.cn

Fa-Ting Hong²

fhongac@connect.ust.hk

¹School of Computer Science and Engineering
South China University of Technology
Guangzhou, China

²Department of Computer Science and Engineering
The Hong Kong University of Science and Technology
Hong Kong SAR

Abstract

Accurately reconstructing full-body poses from sparse head and hand trajectories is a foundational challenge for immersive AR/VR telepresence. Current methods often struggle with error accumulation and unnatural joint coordination because they treat the human body as a single, undifferentiated entity. This entangled modeling falls short in two complementary aspects: extracting fine-grained "atomic intents" from subtle signal variations, and adhering to the inherent structural topology of human biomechanics. To bridge this gap, we present AtomicMotion, a framework designed to unify localized intent extraction and global structural synthesis through three core innovations. First, to facilitate explicit intent extraction, we introduce a principled body partitioning scheme that decomposes the skeleton into five functional clusters, isolating local motion primitives to prevent signal dilution. Second, to guarantee global structural coherence, we employ a masked full-body pre-conditioning strategy during training, compelling the model to internalize skeletal topology and latent kinematic constraints. Finally, to fuse dynamic intents with static structures seamlessly, we propose Kinematic Attention. By embedding the classical kinematic tree into the attention mechanism, we ensure that the synthesized motions are both responsive to user intent and strictly biomechanically plausible. Extensive evaluations on the AMASS dataset demonstrate that AtomicMotion significantly outperforms existing baselines, yielding higher reconstruction fidelity and superior biomechanical realism.

1 Introduction

Accurately reconstructing full-body motion from sparse wearable sensors is an ill-posed inverse problem that generally requires two key stages: global motion intent extraction and biomechanically grounded structural synthesis. Without accurate intent extraction, sparse control signals are easily diluted, failing to provide localized guidance. Conversely, without explicit structural guidance, synthesized motions are prone to spatial imprecision and anatomical artifacts. Existing methods often struggle by overlooking this dual requirement. Approaches like AvatarPoser [1] and EgoPoser [2] treat the body as an entangled whole, conflating intent extraction with structural synthesis. AvatarJLM [3] models each joint independently, which weakens direct guidance from the head and hands, while its

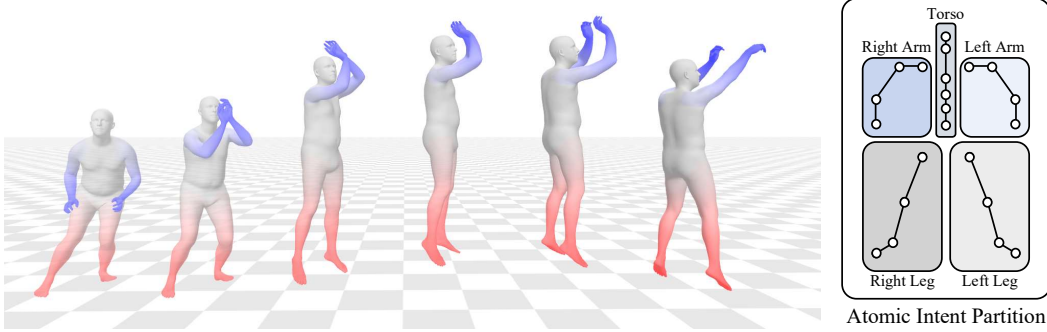


Figure 1: We introduce the Structured Intent Atomization philosophy to conceptualize complex global motion as combinations of parallel atomic intents. For instance, in a basketball jump shot, the overall motion is explicitly disentangled into a synergy of distinct intents: the arms executing the shooting intent and the legs executing the jumping intent. To structurally instantiate this philosophy, we propose the Atomic Intent Partition strategy, dividing the human body into five functional parts.

unconstrained global interactions struggle to preserve physiological consistency. SAGE [4] conditions lower-body predictions on the upper body; although it extracts motion intent reasonably well, it still lacks explicit mechanisms to impose anatomical priors during synthesis.

To overcome the limitations of these entangled paradigms, we revisit the intrinsic nature of human biomechanics. Human motion is rarely a monolithic execution; rather, it is a synergy of localized “atomic intents.” As illustrated in Fig. 1, a basketball jump shot combines an upper-limb shooting intent and a lower-limb jumping intent. In sparse tracking, head and hand trajectories act as high-fidelity proxies for localized intents. Typically, these upper-body signals dictate the primary task intent, whereas the unobserved lower body executes decoupled supporting motions (e.g., locomotion or balancing). However, mapping these signals directly to an entangled full-body representation causes feature dilution, where critical observed cues are obscured by the unobserved global state. To prevent this, atomic intents must be explicitly disentangled prior to synthesis. Yet, translating these intents back into a coherent motion needs explicit structural guidance. As supported by biomechanical literature [5–7], realistic motion is governed by anatomical structures. Consequently, structural synthesis must be explicitly grounded in biological topology, such as the classical kinematic tree, rather than unconstrained learning manifolds. Building upon these observations, we propose **Structured Intent Atomization (SIA)**, a conceptual framework dictating that the human body must be explicitly partitioned into functional anatomical units during sparse reconstruction. Under SIA, any partitioning strategy must satisfy two criteria: isolating regional dynamics to prevent signal dilution, and aligning with the classical kinematic tree topology to preserve physical dependencies. Guided by these principles, we instantiate the **Atomic Intent Partition (AIP)** scheme, which segments the skeleton into five functional clusters (Fig. 1). This partitioning strategy serves as a topological prior widely validated across various motion-centric tasks [8–10]. Notably, while some works separate the head and torso, our AIP unifies them, allowing high-fidelity HMD signals to directly anchor the unobserved torso. Ultimately, by adopting this biologically grounded structure, AIP aligns explicit sparse inputs directly with their respective functional regions, facilitating independent intent decoding without feature dilution while ensuring high biomechanical compliance.

To operationalize the SIA framework and overcome the inherently ill-posed nature of sparse reconstruction, we further propose two core designs. First, reconstructing a full-body pose from sparse signals is an underdetermined inverse problem, where unobserved joints easily suffer from anatomical artifacts. To address this, we introduce **Masked Pose Modeling Guidance (MPMG)**. By utilizing ground-truth complete poses during early training as a structural scaffold, MPMG forces the model to internalize global topological dependencies and latent kinematic constraints. Moreover, this unified input representation ensures seamless scalability for accommodating additional wearable trackers. Second, synthesizing coherent motion requires modeling both localized intents and inter-partition coordination. While purely data-driven spatial attention captures transient joint correlations [3], it frequently ignores invariant physical constraints like joint limits. We resolve this with the **Temporal-Kinematic Block (TK-Block)** featuring a **Kinematic Attention** mechanism. By embedding the classical kinematic tree as a topology-driven stabilizer, we bifurcate attention into a dynamic intent branch and a static structural branch. Regulated by an adaptive gate, this dual-pathway

design ensures synthesized motions are both responsive to sparse signals and strictly compliant with biomechanical reality. To synthesize all the aforementioned designs, we present AtomicMotion, a novel and comprehensive framework for highly precise and natural full-body motion reconstruction from sparse signals. In summary, we make the following contributions in this paper:

- We propose the SIA conceptual framework to simultaneously address localized intent extraction and structural synthesis, instantiated via AIP which divides the skeleton into five functional clusters.
- To operationalize the SIA, we introduce two key designs. MPMG forces the model to learn global skeletal relationships and latent kinematic constraints. TK-Block with a novel Kinematic Attention mechanism ensures biomechanically accurate coordination by explicitly fusing dynamic spatial interactions with static physical priors.
- Extensive experiments on the AMASS [11] dataset demonstrate that AtomicMotion achieves state-of-the-art performance in full-body reconstruction, intent extraction, and motion naturalness.

2 Related Work

Full-Body Pose Estimation from Sparse Inputs. Traditional methods [12–14] employ inverse kinematics (IK) solvers and heuristic rules to calculate the variable joint parameters to produce a desired end-effector location. Many prior works [15–19] focus on reconstructing full-body motion from six inertial measurement units (IMUs). With the rise of VR/AR applications, and considering that common consumer-grade VR/AR devices, such as head-mounted devices (HMDs), only provide motion information for the user’s head and hands, many recent methods [20–22, 1, 3, 23–25, 4, 2, 26] have shifted focus to this sparser setting. CoolMoves [20] first estimates the full-body pose using only tracking signals from the head and hands. LoBSTR [21] predicts lower-body poses from upper-body signals. HMD-Poser [25] supports multiple input configurations, in addition to the standard HMD input. EgoPoser [2] models the cameras’ FoV to simulate realistic hand tracking signal patterns. While existing works primarily map sparse signals by treating the human body as an entangled whole, they overlook the localized intents and inherent structural logic of human motion. To bridge this gap, we propose SIA, a conceptual framework that simultaneously addresses localized intent extraction and structural synthesis. By partitioning the skeleton into five functional clusters, our approach explicitly disentangles full-body dynamics, thereby capturing localized atomic intents while preserving the inherent anatomical topology.

Deep Learning Architectures for Human Pose Estimation Recent research predominantly adopts deep learning approaches. For instance, VAEHMD [22] proposes a method based on variational autoencoders to generate articulated poses of a human skeleton based on noisy streams of head and hand pose. LoBSTR [21] uses GRU-based recurrent architecture to predict the lower-body pose. AvatarPoser [1] utilizes a Transformer [27] encoder to predict full-body poses, complemented by a separate IK module to adjust the arm positions. AvatarJLM [3] employs alternating spatial and temporal transformer blocks to model the correlations of joint-level features. SAGE [4] uses a stratified diffusion model [28] to first predict the upper-body pose, which then serves as a condition for estimating the lower-body pose. While existing methods effectively utilize attention mechanisms, data-driven standard attention alone ignores fixed biomechanical constraints among body parts, resulting in a lack of precision and naturalness in motion modeling. To resolve this issue, we reintroduce the kinematics tree concept from traditional IK methods and propose Kinematic Attention. By explicitly fusing dynamic spatial interactions with static structural priors, this mechanism ensures the biomechanically accurate reconstruction of complex human motions.

3 Proposed Method: AtomicMotion

3.1 Overview

We aim to reconstruct full-body motion $\Theta \in \mathbb{R}^{T \times J \times S}$ from sparse tracking signals $\mathbf{X} \in \mathbb{R}^{T \times N \times C}$ from HMDs and hand controllers. We represent the full-body pose using the first $J = 22$ joints of the SMPL-H model [29], and employ a Forward Kinematics (FK) module to calculate 3D joint positions. Following [1], our basic inputs are 6-DoF head and hand signals, corresponding to a per-joint feature

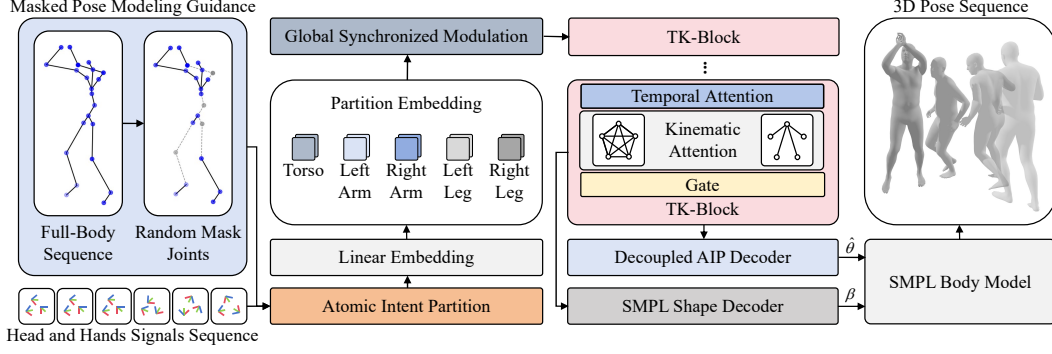


Figure 2: Illustration of our method framework. Masked Pose Modeling Guidance helps the model learn fundamental body structures during early training. Atomic Intent Partition structurally decouples the generation process into five functional parts. Multi-layer TK-Blocks capture motion intents and partition correlations via alternating temporal and Kinematic Attention.

dimension of $C = 3 + 3 + 6 + 6 = 18$ (comprising 3D position, 3D linear velocity, 6D rotation, and 6D angular velocity). We adopt this continuous 6D representation for rotations due to its simplicity and continuity for neural network learning [30]. To support our Masked Pose Modeling Guidance, we expand this input formulation to include all $N = 22$ joints by zero-padding the unobserved ones. The network directly outputs the 6D rotation representations ($S = 6$), which are subsequently converted into 3D axis-angle formats for the FK module. Furthermore, to address the limitation of mean-shape assumptions in prior works [22, 1], we use real shape parameters for inputs and additionally predict the 16-dimensional SMPL shape $\beta \in \mathbb{R}^{T \times 16}$ to accurately capture the user’s true body shape.

3.2 Input Processing

Masked Pose Modeling Guidance. Synthesizing high-fidelity full-body poses from sparse trajectories is fundamentally ill-posed. To mitigate this, we introduce Masked Pose Modeling Guidance (MPMG) during the initial training phase, inspired by masked autoencoders [31, 32]. To prevent simple temporal interpolation, specific joints are consistently masked across the entire temporal window. Crucially, our sparse-to-full task is founded on the premise that head and hand trajectories broadly encapsulate the global motion intent. Consequently, unlike visual masked modeling that learns occlusion-invariant features from randomly masked patches, our approach targets deterministic biomechanical synergies. By strictly preserving head and hand inputs as reliable conditional anchors and masking only the remaining full-body joints, this guidance explicitly strengthens the kinematic coupling between the sparse control signals and the unobserved physical structure. Operating as a denoising autoencoder [33], this forces the model to internalize global skeletal topology without hallucinating unconstrained independent motions.

Formally, to align with this premise, the input construction differs between phases. During inference, the input is exactly the zero-padded sparse tracking signal $\mathbf{X}$ defined previously. During training, the input $\mathbf{X}' \in \mathbb{R}^{T \times J \times C}$ is obtained by applying a mask to the ground-truth full-body sequence $\mathbf{X}_{\text{full}}$. Specifically, we partition the full-body joints into an observable set $\mathcal{O}$ (head and hands) and an unobservable set $\mathcal{U}$ (the remaining joints). The anchor joints are strictly preserved ($m_j = 1, \forall j \in \mathcal{O}$), while a binary mask is randomly applied to the unobserved joints ($m_j \sim \text{Bernoulli}(0.5), \forall j \in \mathcal{U}$). The masked training input $\mathbf{X}'$ is formulated as:

$$\mathbf{X}'(t, j, c) = \mathbf{X}_{\text{full}}(t, j, c) \cdot m_j, \quad \forall t \in \{1, \dots, T\}, c \in \{1, \dots, C\}. \quad (1)$$

Atomic Intent Partition. Building upon the masked representation, we introduce the Atomic Intent Partition (AIP) strategy to explicitly disentangle localized motion primitives. As illustrated in Fig. 1, we decompose $\mathbf{X}_{\text{masked}}$ into five functional clusters: the torso $\mathbf{X}_{\text{Torso}} \in \mathbb{R}^{T \times 6 \times C}$, the upper limbs $\{\mathbf{X}_{\text{Larm}}, \mathbf{X}_{\text{Rarm}}\} \in \mathbb{R}^{T \times 4 \times C}$, and the lower limbs $\{\mathbf{X}_{\text{Lleg}}, \mathbf{X}_{\text{Rleg}}\} \in \mathbb{R}^{T \times 4 \times C}$. This partitioning operation, denoted as $\text{AIP}(\cdot)$, decouples the monolithic full-body representation into functional subgroups to prevent feature dilution between independent motion intents:

$$\{\mathbf{X}_{\text{Torso}}, \mathbf{X}_{\text{Larm}}, \mathbf{X}_{\text{Rarm}}, \mathbf{X}_{\text{Lleg}}, \mathbf{X}_{\text{Rleg}}\} = \text{AIP}(\mathbf{X}'). \quad (2)$$

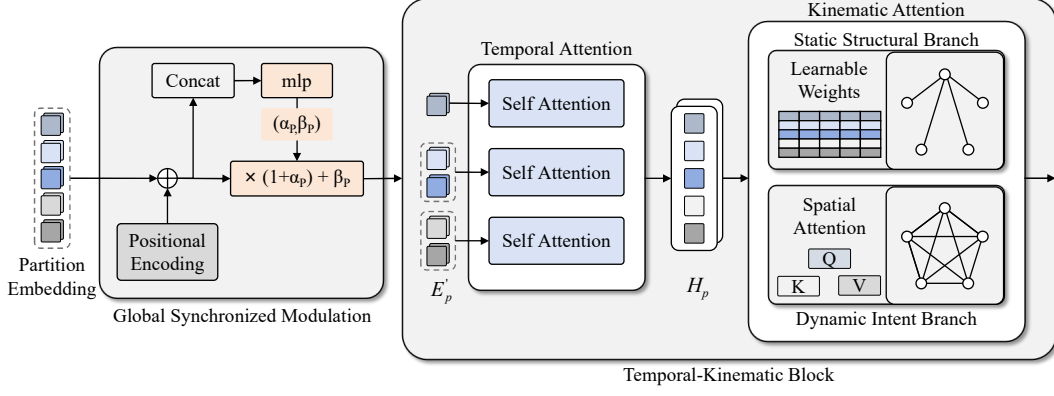


Figure 3: Illustration of Global Synchronized Modulation and Temporal-Kinematic Block.

For clarity in subsequent derivations, these partitions are represented as the set $\{\mathbf{X}_p\}_{p=1}^5$ where the index p identifies the five localized anatomical domains.

3.3 Spatio-Temporal Kinematic Modeling

Global Synchronized Modulation. After partitioning, the signals remain spatially isolated. Furthermore, because unobserved joints are zero-padded during inference, their initial representations are effectively null tokens. As illustrated in Fig. 3, GSM establishes early global awareness to provide an informed prior for these empty regions. Each partition $\mathbf{X}_p$ is first mapped via a linear embedding f_p^{embed} and augmented with positional encodings PE:

$$\mathbf{E}_p = f_p^{embed}(\mathbf{X}_p) + \text{PE}, \quad p \in \{1, \dots, 5\}. \quad (3)$$

Then, these features are concatenated and processed by an MLP (f^{mod}) to generate modulation parameters α_p and β_p . These parameters then dynamically scale and shift the local features:

$$[\alpha_1, \beta_1, \dots, \alpha_5, \beta_5] = f^{mod}(\text{Concat}(\mathbf{E}_1, \dots, \mathbf{E}_5)), \quad (4)$$

$$\mathbf{E}'_p = \mathbf{E}_p \odot (1 + \alpha_p) + \beta_p, \quad p \in \{1, \dots, 5\}, \quad (5)$$

where $\odot$ denotes element-wise multiplication. This modulation ensures that all partitions, regardless of direct sensor guidance, are initialized within a coherent global context.

Next, the modulated features $\mathbf{E}'_p$ are processed by the **Temporal-Kinematic Blocks (TK-Blocks)**, which serve as the primary computational unit for motion synthesis. As illustrated in Fig. 3, the TK-Blocks interleaves temporal intent modeling with spatial kinematic interactions to reconstruct biophysically accurate motions.

Temporal Attention: Intent-driven Symmetric Sharing. Building on the SIA, we assign independent temporal self-attention mechanisms to the five partitions to decode their respective motion primitives. To enhance optimization efficiency and capture the isomorphic temporal patterns inherent in human locomotion, symmetric limb partitions share identical parameters. Let $\mathbf{F}_p^i$ denote the input features for partition p at layer i , where $\mathbf{F}_p^1 = \mathbf{E}'_p$. The temporal attention is defined as:

$$\mathbf{H}_p^i = \text{T-MSA}_{\theta_{\lfloor p/2 \rfloor + 1}}^i(\mathbf{F}_p^i), \quad p \in \{1, \dots, 5\}, \quad (6)$$

where T-MSA identifies the Temporal Multi-Head Self-Attention. Through the index $\lfloor p/2 \rfloor + 1$, the torso ($p = 1$) utilizes unique parameters θ_1 , while the paired arms ($p \in \{2, 3\}$) and legs ($p \in \{4, 5\}$) share parameters θ_2 and θ_3 respectively.

Kinematic Attention: Fusing Dynamic and Static Priors. While data-driven spatial attention can capture transient joint correlations [3, 32], human movement is fundamentally constrained by invariant physiological structures such as joint articulation limits and ligamentous constraints. To explicitly incorporate these structural priors, we propose a dual-branch Kinematic Attention mechanism (Fig. 4).

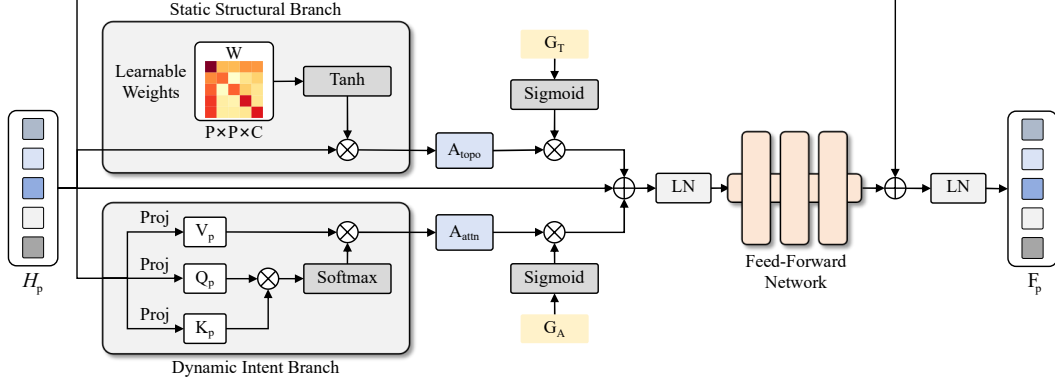


Figure 4: Illustration of dual-branch Kinematic Attention.

(i) *Dynamic Intent Branch*. This branch extracts synergistic correlations during complex movements using Spatial Multi-Head Self-Attention (S-MSA) across the partition dimension:

$$\mathbf{A}_{\text{attn}}^i = \text{S-MSA}([\mathbf{H}_1^i, \dots, \mathbf{H}_5^i]). \quad (7)$$

(ii) *Static Structural Branch*. This branch serves as a structural stabilizer by encoding the physical skeleton topology into a learnable tensor $\mathbf{W}_{\text{topo}}^i \in \mathbb{R}^{P \times P \times E}$, initialized as a star-shaped kinematic tree rooted at the torso. A Tanh activation regulates the influence of these kinematic correlations:

$$\mathbf{A}_{\text{topo}}^i = \text{Tanh}(\mathbf{W}_{\text{topo}}^i) \otimes \mathbf{H}^i, \quad (8)$$

where $\otimes$ denotes graph-based feature aggregation along the partition dimension.

Gated Fusion and Feature Update. To account for varying degrees of freedom across anatomical joints, we employ learnable gating vectors $\mathbf{G}_A^i$ and $\mathbf{G}_T^i$ to regulate the fusion of dynamic and static information. The integrated features are processed through a residual structure followed by Layer Normalization (LN) and a Feed-Forward Network (FFN):

$$\begin{aligned} \mathbf{Z}^i &= \text{LN}(\mathbf{H}^i + \sigma(\mathbf{G}_A^i) \mathbf{A}_{\text{attn}}^i + \sigma(\mathbf{G}_T^i) \mathbf{A}_{\text{topo}}^i), \\ \mathbf{F}_p^{i+1} &= \text{LN}(\mathbf{Z}^i + \text{FFN}(\mathbf{Z}^i)). \end{aligned} \quad (9)$$

This architecture ensures that the synthesized motion is simultaneously responsive to transient intents and compliant with biomechanical reality. By stacking multiple TK-Blocks, the network progressively refines the spatio-temporal dependencies required for high-fidelity reconstruction.

3.4 SMPL Pose and Shape Estimation

Decoupled AIP Decoder. We introduce the Decoupled AIP Decoder to map the backbone features into final pose parameters. While previous methods [1, 2, 25] typically rely on centralized architectures that suffer from feature entanglement and gradient interference, our approach preserves semantic clarity by assigning a dedicated MLP head to each of the five partitions. Consistent with our temporal attention design, we share decoder weights for paired limbs. Given the output features $\mathbf{F}^L = \{\mathbf{f}_p^L\}_{p=1}^5$ from the final TK-Block, the decoding is formulated as:

$$\hat{\mathbf{Y}}_p = D_{\phi_{\lfloor p/2 \rfloor + 1}}(\mathbf{f}_p^L), \quad p \in \{1, 2, 3, 4, 5\}, \quad (10)$$

where D_ϕ denotes the decoding head parameterized by ϕ . The final pose $\hat{\mathbf{Y}}$ is obtained by concatenating all local predictions. As the SMPL model input, 6D $\hat{\mathbf{Y}}$ are then converted into 3D axis-angle representations, denoted as $\hat{\theta}$.

SMPL Shape Estimation. We employ a centralized SMPL Shape Decoder to predict the shape parameters β , which are global PCA coefficients representing full-body proportions. Specifically, the output tokens from all five partitions $\mathbf{F}^L$ are concatenated and processed through a unified MLP. The resulting shape β and pose $\hat{\theta}$ serve as inputs to the SMPL model to derive final joint positions. This architecture implicitly optimizes the shape parameters via the joint position loss to avoid the overfitting risks of direct β supervision. Because the SMPL space conflates skeletal proportions with unobservable soft tissues, this implicit optimization ensures robust learning while enhancing the network’s understanding of overall human morphology.

Table 1: Quantitative comparison with state-of-the-art on AMASS in the standard mode.

Methods	AMASS-P1				AMASS-P2			
	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓
SAGE	2.49	3.18	20.78	6.46	4.72	5.92	33.29	8.16
EgoPoser	2.90	3.80	24.26	14.89	4.84	6.26	33.96	12.29
HMD-Poser	2.29	3.15	17.47	6.43	4.93	6.06	31.21	7.30
RPM	3.25	4.08	19.21	4.21	5.15	6.56	27.16	1.55
AtomicMotion-40	2.20	3.00	<u>16.08</u>	6.63	<u>4.67</u>	<u>5.50</u>	30.25	7.61
AtomicMotion-80	<u>2.27</u>	<u>3.04</u>	14.53	<u>5.68</u>	4.66	5.08	27.16	<u>6.53</u>

3.5 Loss Function

We apply the root orientation loss $\mathcal{L}_{ori}$, local pose loss $\mathcal{L}_{rot}$, and joint position loss $\mathcal{L}_{pos}$ to ensure accurate spatial reconstruction. To guarantee temporal smoothness and physical plausibility, we apply the velocity loss $\mathcal{L}_{vel}$ and acceleration loss $\mathcal{L}_{acc}$. These losses are computed using the L1 norm between the predictions and the ground truth. Furthermore, we use two losses to optimize the body shape parameters β . First, an L2 regularization loss $\mathcal{L}_{reg}$ is applied to constrain the parameter magnitudes, ensuring that shape components with no impact on the body structure default to zero. Second, following the real-time sliding-window design of HMD-Poser [25], the shape parameter β_t is predicted dynamically per frame. To suppress unnatural temporal fluctuations, $\mathcal{L}_{consist}$ uses the L1 norm to align each β_t with the mean shape $\bar{\beta}$ of the time window T :

$$\mathcal{L}_{consist} = \frac{1}{T} \sum_{t=1}^T \|\beta_t - \bar{\beta}\|_1. \quad (11)$$

4 Experiments

In this section, we first introduce the implementation details of our experiments. Then, we compare our approach with state-of-the-art methods and conduct ablation studies on the public AMASS [11] dataset. Finally, we conduct further analysis and discussion of our method through additional experiments.

4.1 Experimental Setup

Implementation details. To comprehensively evaluate our method, we adopt two input window size settings: $t = 40$, following HMD-Poser [25], and $t = 80$, following EgoPoser [2]. For both settings, we employ a sliding window strategy during inference, processing head and hand signals across the entire window to predict the full-body pose for the current frame. Furthermore, we simulate a hand tracking mode from EgoPoser [2].

Metrics. Similarly to previous works [1, 25, 4], we use the MPJRE (Mean Per Joint Rotation Error, in degrees), the MPJPE (Mean Per Joint Position Error, in cm), and the MPJVE (Mean Per Joint Velocity Error, in cm/s). To measure the smoothness of the motion, we compute the Jitter ($10^2 m/s^3$) as in [34].

Datasets. Following common practice [23, 1, 25, 24], we evaluate our method on the AMASS [11] dataset using two standard protocols (Protocol 1 and Protocol 2). Detailed dataset splits are provided in the Appendix.

4.2 Comparison

We compare our method with SAGE [4], EgoPoser [2], HMD-Poser [25], and RPM [24] on AMASS-P1 and AMASS-P2. Our approach is evaluated using two window size settings, 40 and 80, denoted as AtomicMotion-40 and AtomicMotion-80. Furthermore, we conduct comparisons in the hand tracking mode with EgoPoser [2] and RPM [24], both of which also incorporate hand tracking configurations. The results are shown in Table 1 and Table 2, which demonstrate that AtomicMotion outperforms existing methods across reconstruction metrics with both window size settings in the

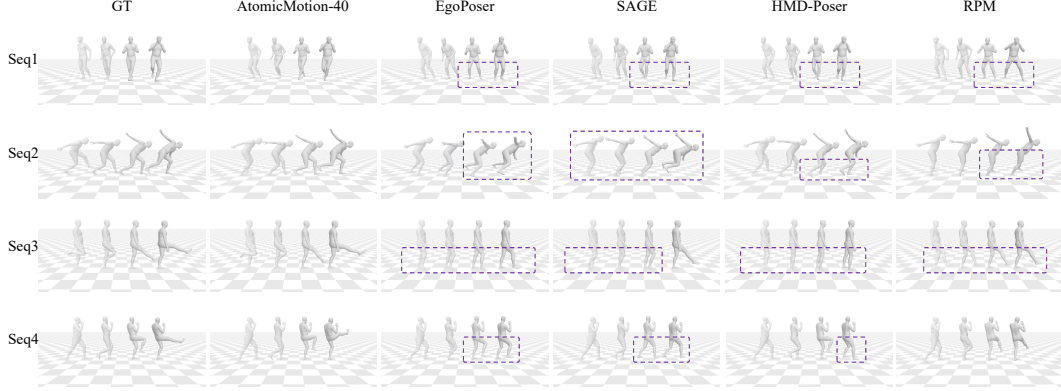


Figure 5: Visual comparisons on the AMASS-P1 in the standard mode.

Table 2: Quantitative comparison with state-of-the-art on AMASS in the hand tracking mode.

Methods	AMASS-P1				AMASS-P2			
	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓
EgoPoser	4.75	6.14	33.36	17.28	6.40	<u>9.36</u>	51.76	27.02
RPM	4.53	6.50	26.10	4.40	7.60	11.84	38.93	1.72
AtomicMotion-40	<u>3.29</u>	<u>4.44</u>	<u>26.08</u>	12.38	7.07	9.49	52.90	19.90
AtomicMotion-80	3.28	4.39	22.34	<u>9.73</u>	<u>6.54</u>	8.56	<u>45.04</u>	<u>14.97</u>

standard mode (where hands are continuously visible) and hand tracking mode. Visual comparisons between AtomicMotion and other methods in both modes are shown in Fig. 5 and Fig. 6, where lighter to darker colors indicate the temporal progression of the motion sequence. We provide enlarged visual comparisons in Appendix. D. For comprehensive dynamic comparisons, please refer to our supplementary videos.

4.3 Ablation Studies

To evaluate the effectiveness of each component, we perform ablation experiments on AMASS-P1. The results are shown in Table 3 and visual comparisons are shown in Fig. 7. We also provide enlarged visual comparisons in Appendix. D.

Masked Pose Modeling Guidance. Removing MPMG (Row 1) significantly increases MPJRE and MPJPE. Reconstructing masked poses effectively forces the network to learn global skeletal structures and inherent kinematic constraints.

Global Synchronized Modulation. Removing GSM (Row 2) degrades spatial accuracy. Although motion smoothness slightly improves without it, this reflects a natural trade-off where fine-tuning for spatial precision introduces minor temporal fluctuations. Overall, GSM remains essential for establishing early global awareness.

Decoupled AIP Decoder. Replacing our decoupled decoder with a centralized head (Row 5) severely degrades motion smoothness (MPJVE and Jitter). Centralized decoding entangles gradients and causes partition interference. Our decoupled architecture explicitly prevents this, ensuring correct temporal guidance without forcing a compromise between spatial and temporal accuracy.

Dual-branch Kinematic Attention. Removing the intent branch (Row 3) increases spatial errors but minimizes Jitter, indicating that purely data-driven attention is sensitive to per-frame fluctuations. Crucially, removing the structural branch (Row 4) worsens all four metrics. This confirms that explicitly fusing anatomical priors is essential to break the spatial-temporal trade-off, achieving both high accuracy and biomechanical smoothness.

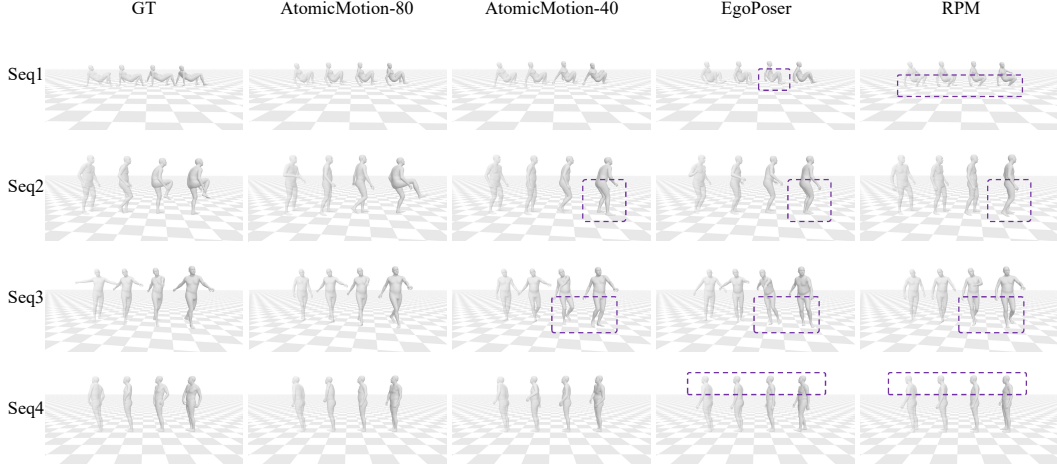


Figure 6: Visual comparisons on the AMASS-P1 in the hand tracking mode.

Table 3: Ablation results on the AMASS-P1.

Configurations	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓
w/o MPMG	2.307	3.103	14.745	5.687
w/o GSM	2.283	3.051	14.401	5.520
w/o Intent Branch	2.292	3.083	14.593	5.492
w/o Structural Branch	2.267	3.052	14.711	5.834
w/o Decoupled Decoder	2.259	3.036	15.056	6.055
Ours	<u>2.265</u>	<u>3.040</u>	<u>14.531</u>	5.676

Table 4: Scalability Experiments on the AMASS-P1.

Configurations	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓
HMD	2.27	3.04	14.53	5.68
HMD+1sensor	1.82	1.83	9.57	5.04
HMD+2sensors	1.55	1.18	5.86	3.63
HMD+3sensors	1.24	0.96	4.03	3.54

4.4 Scalability

Since our input tokens strictly correspond to full-body joints, the masking mechanism naturally supports the scalable integration of additional wearable sensors. Following HMD-Poser [25], we evaluate extended configurations: +1 (pelvis), +2 (both legs), and +3 (pelvis and both legs) sensors. As shown in Table 4, increasing the sensor count substantially improves prediction accuracy, validating the robust scalability of AtomicMotion.

5 Conclusion and Limitations

We propose AtomicMotion, a novel framework for full-body motion reconstruction from sparse tracking. Driven by our Structured Intent Atomization (SIA) philosophy, it conceptualizes complex movements as a synergy of localized atomic intents while preserving anatomical topology. Guided by SIA, our method achieves significantly more accurate and realistic motions on the AMASS dataset, alongside remarkable scalability. A current limitation is inference speed. While achieving 110 FPS on an NVIDIA A100 GPU comfortably supports real-time processing for standard 60 FPS data, it cannot yet handle high-frequency 120 FPS inputs in real time. Nevertheless, we believe the SIA philosophy provides a clear new perspective to inspire future intent-aware and physically plausible motion generation systems.

References

- [1] Jiayi Jiang, Paul Strel, Huajian Qiu, Andreas Fender, Larissa Laich, Patrick Snape, and Christian Holz. Avatarposer: Articulated full-body pose tracking from sparse motion sensing. In *ECCV*, 2022.
- [2] Jiayi Jiang, Paul Strel, Manuel Meier, and Christian Holz. Egoposer: Robust real-time egocentric pose estimation from sparse and intermittent observations everywhere. In *ECCV*, 2024.
- [3] Xiaozheng Zheng, Zhuo Su, Chao Wen, Zhou Xue, and Xiaojie Jin. Realistic full-body tracking from sparse observations via joint-level modeling. In *ICCV*, 2023.

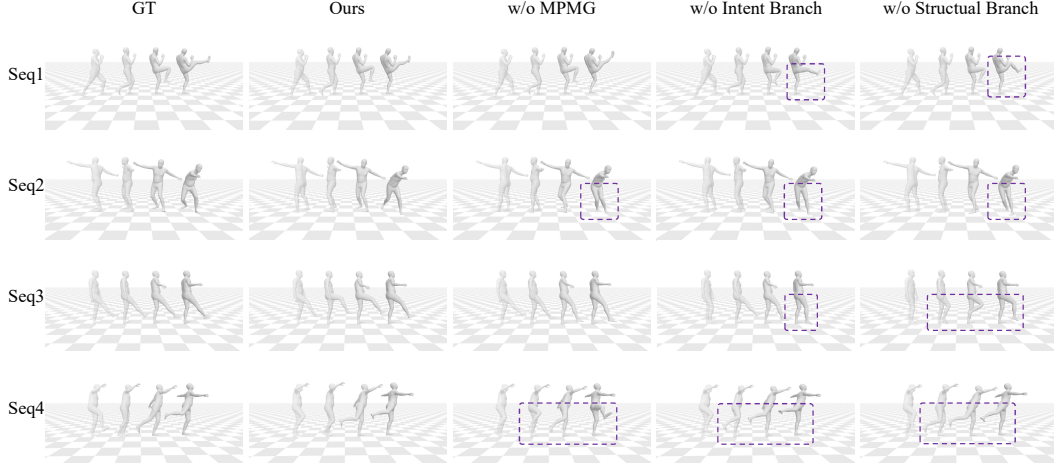


Figure 7: Visual comparison of ablation studies on the AMASS-P1.

- [4] Han Feng, Wenchao Ma, Quankai Gao, Xianwei Zheng, Nan Xue, and Huijuan Xu. Stratified avatar generation from sparse observations. In *CVPR*, 2024.
- [5] David A Winter. *Biomechanics and motor control of human movement*. John wiley & sons, 2009.
- [6] Roger M Enoka. *Neuromechanics of human movement*. Human kinetics, 2008.
- [7] Vladimir M Zatsiorsky. *Kinetics of human motion*. Human kinetics, 2002.
- [8] Yong Du, Wei Wang, and Liang Wang. Hierarchical recurrent neural network for skeleton based action recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1110–1118, 2015.
- [9] Linjiang Huang, Yan Huang, Wanli Ouyang, and Liang Wang. Part-level graph convolutional network for skeleton-based action recognition. In *AAAI*, 2020.
- [10] Maosen Li, Siheng Chen, Zijing Zhang, Lingxi Xie, Qi Tian, and Ya Zhang. Skeleton-parted graph scattering networks for 3d human motion prediction. In *ECCV*, 2022.
- [11] Naureen Mahmood, Nima Ghorbani, Nikolaus F Troje, Gerard Pons-Moll, and Michael J Black. Amass: Archive of motion capture as surface shapes. In *ICCV*, 2019.
- [12] Andrew Goldenberg, Beno Benhabib, and Robert Fenton. A complete generalized solution to the inverse kinematics of robots. *IEEE Journal on Robotics and Automation*, 2003.
- [13] *RootMotion Final IK*, 2018. URL <https://assetstore.unity.com/packages/tools/animation/final-ik-14290>.
- [14] Mathias Parger, Joerg H Mueller, Dieter Schmalstieg, and Markus Steinberger. Human upper-body inverse kinematics for increased embodiment in consumer-grade virtual reality. In *Proceedings of the 24th ACM symposium on virtual reality software and technology*, 2018.
- [15] Yinghao Huang, Manuel Kaufmann, Emre Aksan, Michael J Black, Otmar Hilliges, and Gerard Pons-Moll. Deep inertial poser: Learning to reconstruct human pose from sparse inertial measurements in real time. *TOG*, 2018.
- [16] Yifeng Jiang, Yuting Ye, Deepak Gopinath, Jungdam Won, Alexander W Winkler, and C Karen Liu. Transformer inertial poser: Real-time human motion reconstruction from sparse imus with simultaneous terrain generation. In *SIGGRAPH Asia*, 2022.
- [17] Timo Von Marcard, Bodo Rosenhahn, Michael J Black, and Gerard Pons-Moll. Sparse inertial poser: Automatic 3d human pose estimation from sparse imus. In *Computer graphics forum*. Wiley Online Library, 2017.
- [18] Xinyu Yi, Yuxiao Zhou, and Feng Xu. Transpose: Real-time 3d human translation and pose estimation with six inertial sensors. *TOG*, 2021.

- [19] Xinyu Yi, Yuxiao Zhou, Marc Habermann, Soshi Shimada, Vladislav Golyanik, Christian Theobalt, and Feng Xu. Physical inertial poser (pip): Physics-aware real-time human motion tracking from sparse inertial sensors. In *CVPR*, 2022.
- [20] Karan Ahuja, Eyal Ofek, Mar Gonzalez-Franco, Christian Holz, and Andrew D Wilson. Coolmoves: User motion accentuation in virtual reality. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 2021.
- [21] Dongseok Yang, Doyeon Kim, and Sung-Hee Lee. Lobstr: Real-time lower-body pose prediction from sparse upper-body tracking signals. In *Computer Graphics Forum*, 2021.
- [22] Andrea Dittadi, Sebastian Dziadzio, Darren Cosker, Ben Lundell, Thomas J Cashman, and Jamie Shotton. Full-body motion from a single head-mounted device: Generating smpl poses from partial observations. In *ICCV*, 2021.
- [23] Sadegh Aliakbarian, Pashmina Cameron, Federica Bogo, Andrew Fitzgibbon, and Thomas J Cashman. Flag: Flow-based 3d avatar generation from sparse observations. In *CVPR*, 2022.
- [24] German Barquero, Nadine Bertsch, Manojkumar Marramreddy, Carlos Chacón, Filippo Arcadu, Ferran Rigual, Nicky Sijia He, Cristina Palmero, Sergio Escalera, Yuting Ye, et al. From sparse signal to smooth motion: Real-time motion generation with rolling prediction models. In *CVPR*, 2025.
- [25] Peng Dai, Yang Zhang, Tao Liu, Zhen Fan, Tianyuan Du, Zhuo Su, Xiaozheng Zheng, and Zeming Li. Hmd-poser: On-device real-time human motion tracking from scalable sparse observations. In *CVPR*, 2024.
- [26] Alexander Winkler, Jungdam Won, and Yuting Ye. Questsim: Human motion tracking from sparse sensors with simulated avatars. In *SIGGRAPH Asia*, 2022.
- [27] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *NeurIPS*, 2017.
- [28] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *NeurIPS*, 2020.
- [29] Matthew Loper, Naureen Mahmood, Javier Romero, Gerard Pons-Moll, and Michael J Black. Smpl: A skinned multi-person linear model. In *Seminal Graphics Papers: Pushing the Boundaries, Volume 2*, pages 851–866. 2023.
- [30] Yi Zhou, Connelly Barnes, Jingwan Lu, Jimei Yang, and Hao Li. On the continuity of rotation representations in neural networks. In *CVPR*, 2019.
- [31] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *NeurIPS*, 2022.
- [32] Wentao Zhu, Xiaoxuan Ma, Zhaoyang Liu, Libin Liu, Wayne Wu, and Yizhou Wang. Motionbert: A unified perspective on learning human motion representations. In *ICCV*, 2023.
- [33] Pascal Vincent, Hugo Larochelle, Yoshua Bengio, and Pierre-Antoine Manzagol. Extracting and composing robust features with denoising autoencoders. In *ICML*, 2008.
- [34] Yuming Du, Robin Kips, Albert Pumarola, Sebastian Starke, Ali Thabet, and Artsiom Sanakoyeu. Avatars grow legs: Generating smooth human motion from sparse tracking inputs with diffusion model. In *CVPR*, 2023.
- [35] Carnegie Mellon University. CMU MoCap Dataset. URL <http://mocap.cs.cmu.edu>.
- [36] Nikolaus F Troje. Decomposing biological motion: A framework for analysis and synthesis of human gait patterns. *Journal of vision*, 2(5):2–2, 2002.
- [37] M Müller, T Röder, M Clausen, B Eberhardt, B Krüger, and A Weber. Documentation mocap database hdm05. universität bonn; bonn. Technical report, Germany: 2007. Technical Report CG-2007-2.[Google Scholar], 2007.
- [38] Advanced Computing Center for the Arts and Design. ACCAD MoCap Dataset. URL <https://accad.osu.edu/research/motion-lab/mocap-system-and-data>.
- [39] Saeed Ghorbani, Kimia Mahdavian, Anne Thaler, Konrad Kording, Douglas James Cook, Gunnar Blohm, and Nikolaus F. Troje. MoVi: A large multipurpose motion and video dataset. *arXiv preprint arXiv:2003.01888*, 2020.

- [40] Christian Mandery, Ömer Terlemez, Martin Do, Nikolaus Vahrenkamp, and Tamim Asfour. The KIT whole-body human motion database. In *ICAR*, 2015.
- [41] Christian Mandery, Ömer Terlemez, Martin Do, Nikolaus Vahrenkamp, and Tamim Asfour. Unifying representations and large-scale whole-body motion databases for studying human motion. *IEEE Transactions on Robotics*, 32(4):796–809, 2016.
- [42] Franziska Krebs, Andre Meixner, Isabel Patzer, and Tamim Asfour. The KIT bimanual manipulation dataset. In *IEEE/RAS International Conference on Humanoid Robots (Humanoids)*, 2021.
- [43] Eyes JAPAN Co. Ltd. Eyes Japan MoCap Dataset. URL <http://mocapdata.com>.
- [44] Matthew M. Loper, Naureen Mahmood, and Michael J. Black. MoSh: Motion and shape capture from sparse markers. *TOG*, 2014.
- [45] Ijaz Akhter and Michael J. Black. Pose-conditioned joint angle limits for 3D human pose reconstruction. In *CVPR*, 2015.
- [46] Simon Fraser University and National University of Singapore. SFU Motion Capture Database. URL <http://mocap.cs.sfu.ca/>.
- [47] Matt Trumble, Andrew Gilbert, Charles Malleson, Adrian Hilton, and John Collomosse. Total Capture: 3d human pose estimation fusing video and inertial sensors. In *BMVC*, 2017.
- [48] Leonid Sigal, Alexandru O Balan, and Michael J Black. Humaneva: Synchronized video and motion capture dataset and baseline algorithm for evaluation of articulated human motion. *International journal of computer vision*, 87(1):4–27, 2010.

Appendices

A Implementation Details

The model stacks 6 TK-Blocks with an embedding dimension of 256 and 8 attention heads. We use the AdamW optimizer with a batch size of 256. Due to the high computational cost of Forward Kinematics (FK), $\mathcal{L}_{rot}$ is computed across all frames, while $\mathcal{L}_{pos}$, $\mathcal{L}_{vel}$, and $\mathcal{L}_{acc}$ are only calculated on 30 frames processed by FK. Following EgoPoser, we apply spatial and temporal normalization to the inputs. Spatial normalization converts horizontal positions to be relative to the head while preserving global vertical positions. Temporal normalization computes the positional deltas of all frames relative to the first frame and concatenates them to the input features. For Masked Pose Modeling Guidance, training initially uses 80% masked full-body data and 20% sparse inputs. The proportion of masked data linearly decays to zero over 50,000 steps, simultaneously shifting the model to train exclusively on sparse head and hand inputs thereafter. Furthermore, we simulate a hand tracking mode from EgoPoser [2], where hands are tracked by a headset and may move out of the camera field of view. The angle of the available field of view is set to 120°.

We evaluate our method on the AMASS dataset [11] using two protocols. Protocol 1 utilizes the CMU [35], BMLr [36], and HDM05 [37] subsets, randomly split into 90 percent training and 10 percent testing data. Protocol 2 adopts a more extensive setting, employing twelve subsets [38, 39, 36, 35, 40–43, 37, 44–47] for training while using HumanEva [48] and Transition [11] for evaluation.

To embed kinematic priors, we specifically initialize the Kinematic Attention module. In the static structural branch, the diagonal elements of $\mathbf{W}_{topo}$ are set to 1 and off-diagonal elements to 0, preserving the initial partition features $\mathbf{H}_p$. To form the torso-rooted star topology, connection weights from the torso to the limbs are initialized to 0.1. During gated fusion, $\mathbf{G}_A$ and $\mathbf{G}_T$ are initialized to 2.0 and -2.0, respectively. After the sigmoid activation σ , this lowers the initial weight of $\mathbf{A}_{topo}$, preventing early graph aggregation $\otimes$ from disrupting the features.

B Curriculum Masking Strategy

In the main text, we introduce a curriculum masked pose modeling guidance strategy. Training initially uses 80% masked full-body data and 20% sparse inputs. The masking proportion linearly decays to zero over 50,000 steps, eventually shifting the model to train exclusively on sparse head and hand inputs. To validate this design, we evaluated a continuous masking baseline, which consistently uses masked full-body data throughout training with head and hands always unmasked.

Table A: Ablation Study on Curriculum Masking Strategy.

Strategy	Configurations	MPJRE ↓	MPJPE ↓	MPJVE ↓	Jitter ↓
Decaying Masking (Ours)	HMD	2.27	3.04	14.53	5.68
	HMD+1sensor	1.82	1.83	9.57	5.04
	HMD+2sensors	1.55	1.18	5.86	3.63
	HMD+3sensors	1.24	0.96	4.03	3.54
Continuous Masking	HMD	2.26	2.97	15.37	6.24
	HMD+1sensor	2.09	2.49	13.22	5.79
	HMD+2sensors	1.76	1.60	8.25	4.11
	HMD+3sensors	1.60	1.51	7.58	4.15

Comparisons in Table A present the evaluation results. Under the HMD configuration, the continuous masking baseline achieves slightly better spatial rotation and position errors (MPJRE of 2.26 and MPJPE of 2.97) because it constantly memorizes diverse spatial joint correlations. However, this degrades the naturalness and smoothness of the generated motion, resulting in higher velocity and jitter errors (15.37 and 6.24) compared to our decaying strategy (14.53 and 5.68). Since natural human movement relies on coherent temporal dynamics, forcing the network to divide its capacity to handle arbitrary joint combinations hinders its ability to deeply optimize the temporal naturalness required for strictly sparse scenarios. This limitation is further evidenced when introducing additional tracking sensors, as shown in rows 2 to 4 for each strategy in the table. The specialized models trained with our decaying strategy comprehensively outperform the continuous masking model in both structural accuracy and kinematic smoothness metrics. By progressively decaying the mask, our method effectively leverages dense data as early-stage physical priors while ultimately focusing the network’s capacity on the specific target task.

Despite a slight drop in peak specialized performance, the continuous masking strategy offers exceptional practical flexibility. Having been exposed to diverse masking combinations during training, it naturally serves

as a unified model supporting scalable sensor inputs. This allows users to dynamically add or remove sensors during inference without retraining specific models.

C Analysis of Kinematic Attention

The effectiveness of our proposed kinematic attention has been demonstrated through ablation studies. Next, we visualize its internal features to analyze the underlying mechanisms.

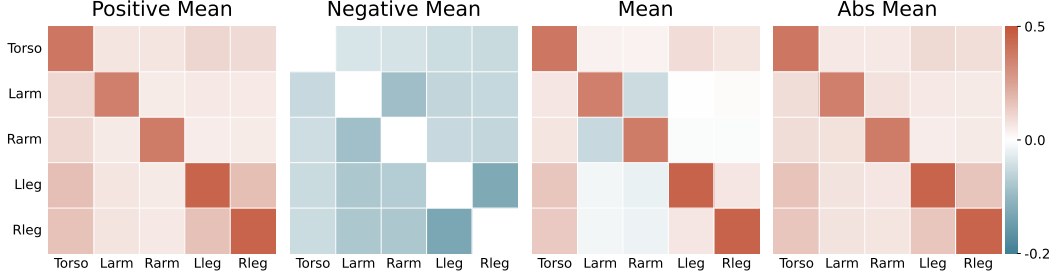


Figure A: Visualization of the learned weights in the Kinematic Attention. We extract the topology tensors from the static structural branches across all TK-Blocks, apply the Tanh activation, and compute the positive mean, negative mean, overall mean, and absolute mean along the feature dimension.

C.1 Learned Kinematic Topology

To analyze the internal mechanisms, we extracted the learnable topology tensors $\mathbf{W}_{\text{topo}}$ from the static structural branches across all TK-Blocks. After applying the Tanh activation and averaging them across all blocks, we calculated the positive mean, negative mean, overall mean, and absolute mean along the feature dimension.

As shown in Fig. A, the positive mean heatmap shows the strongest intensity on the diagonal and positive connections between the torso and limbs, indicating the model preserves the physical coordination prior. Additionally, the positive mean map shows a strong positive correlation between the left and right legs. The negative mean heatmap displays clear negative regions between the left and right arms, as well as the left and right legs. This indicates the network captures both coordinative and alternating motion patterns in symmetric limbs. The mean heatmap shows the net topological network after positive and negative effects offset each other. The overall mean between the arms is negative, while the mean between the legs is positive. Combined with the absolute mean heatmap, it is evident that the actual feature interaction intensity between the legs is very high. This coexistence of strong positive and negative correlations reflects the complexity of lower limb movements: the legs require both strong synchronization to maintain balance and alternating motions for stepping.

C.2 Layer-wise Dual-branch Feature Evolution

We extracted the tensors of the backbone feature $\mathbf{H}$, the dynamic attention feature $\sigma(\mathbf{G}_A)\mathbf{A}_{\text{attn}}$, and the static topology feature $\sigma(\mathbf{G}_T)\mathbf{A}_{\text{topo}}$ before gated fusion in each layer. We calculated their L2 norm along the feature dimension as the feature magnitude and plotted the changes across network layers for individual body parts and the overall body.

As shown in Fig. B, the Overall subplot illustrates the general trend of feature magnitudes. The backbone feature $\mathbf{H}$ consistently has the highest magnitude, forming the foundation of network information transfer. The magnitudes of both the static topology feature and the dynamic attention feature increase significantly with network depth, indicating that the network relies more heavily on these two attention mechanisms in deeper layers to extract complex motion features. Overall, the static topology feature is consistently stronger than the dynamic attention feature and grows much faster in deep layers, demonstrating that human movement highly depends on static physical topological structures.

Specifically for different body parts, the dynamic and static features of the torso are similar in shallow layers, but its static topology feature surges in Layers 5 and 6, far exceeding the dynamic attention feature. This aligns with the physical nature of the torso as the root node of the kinematic tree, where movements are strictly constrained by anatomical structures. The static topology feature of the legs consistently maintains dominance, even matching the backbone feature H at Layer 6, reflecting the severe reliance of the lower limbs on physical rules for maintaining balance and gait. In contrast, the arms possess the highest degree of kinematic freedom. Their dynamic attention and static topology features remain close in magnitude across most layers, with the static feature only slightly exceeding the dynamic one in the final layer. This suggests that for highly flexible

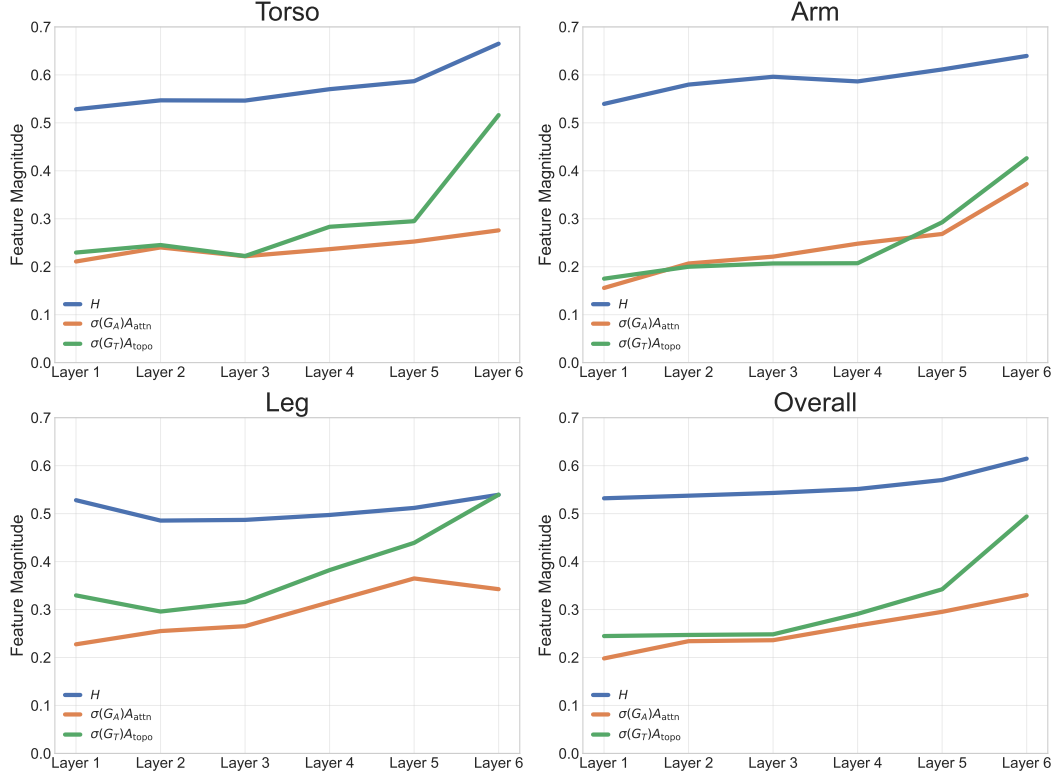


Figure B: Layer-wise dual-branch feature magnitude evolution for different body parts and the overall body. The magnitudes are calculated as the L2 norm along the feature dimension for the backbone feature H , the dynamic attention feature $\sigma(G_A)A_{\text{attn}}$, and the static topology feature $\sigma(G_T)A_{\text{topo}}$ before gated fusion in each layer.

upper limbs, the network must balance transient motion intents and biomechanical limits to achieve high-fidelity motion reconstruction.

D Visual Comparisons

In this section, we provide enlarged visual comparisons.

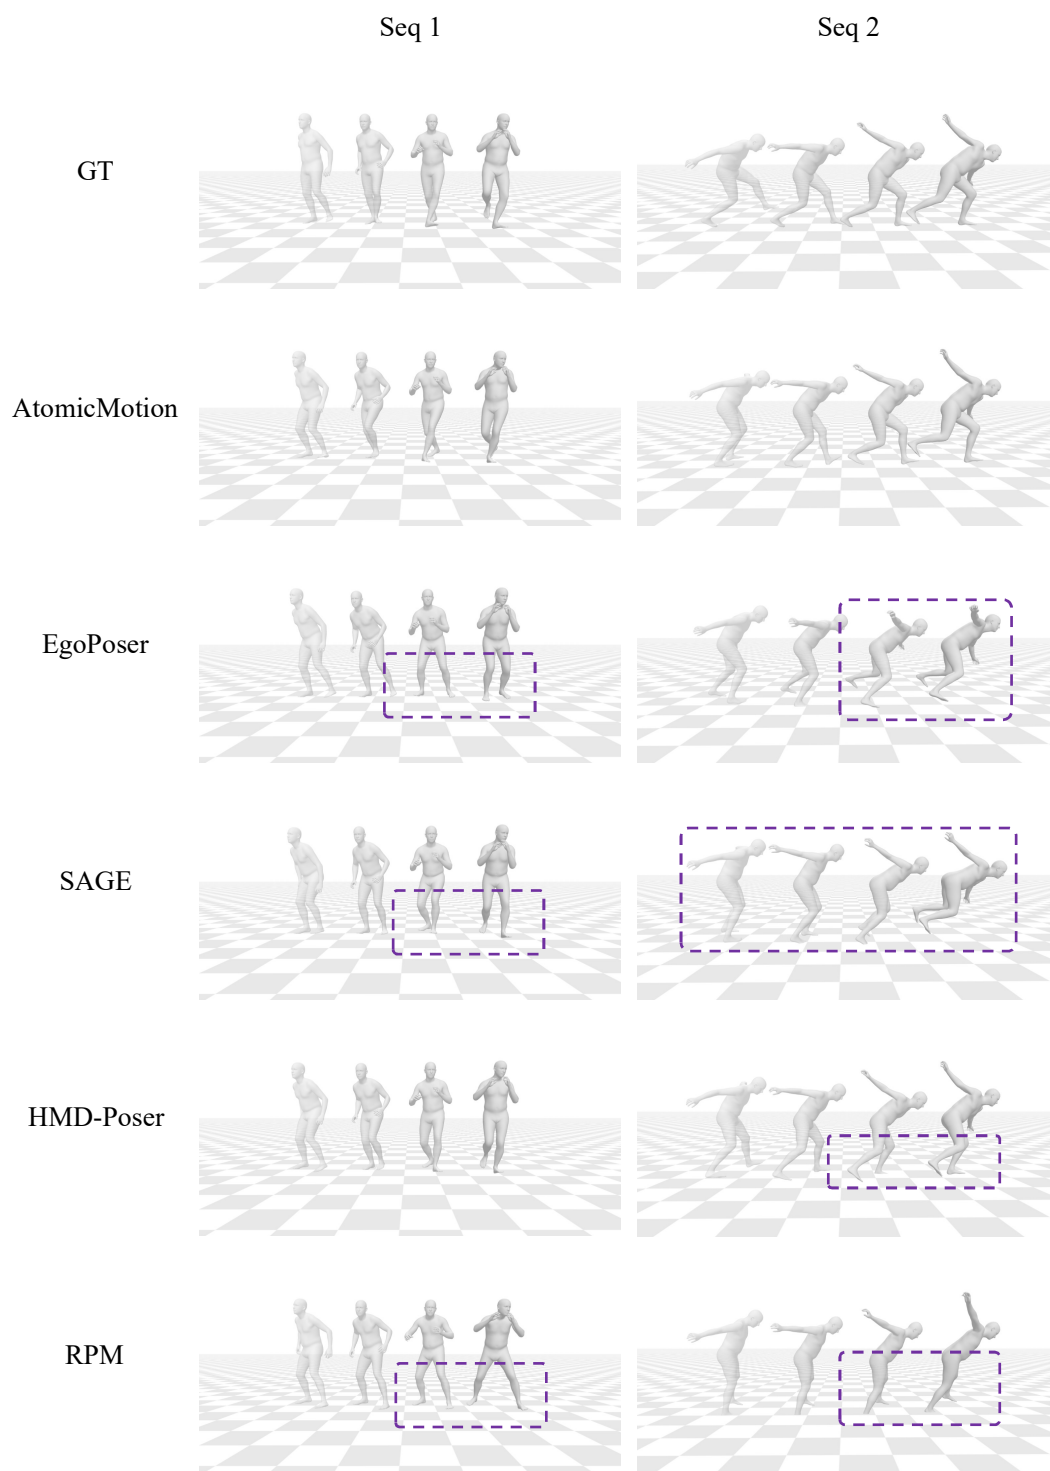


Figure C: Visual comparisons in the standard mode of sequence 1 and sequence 2.

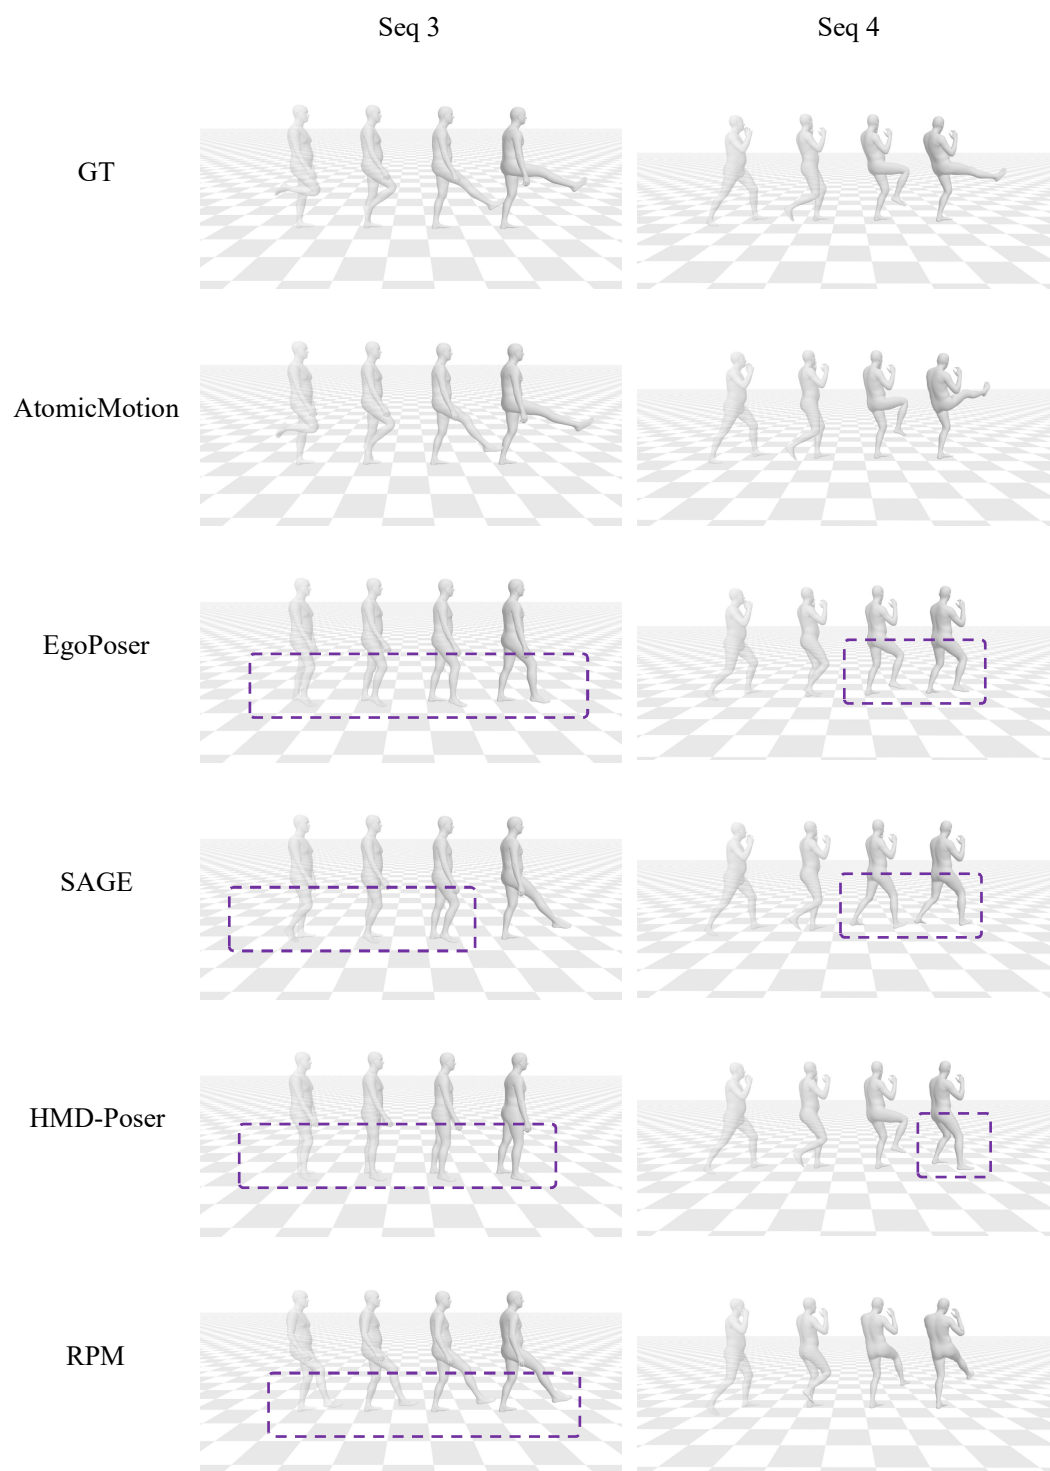


Figure D: Visual comparisons in the standard mode of sequence 3 and sequence 4.

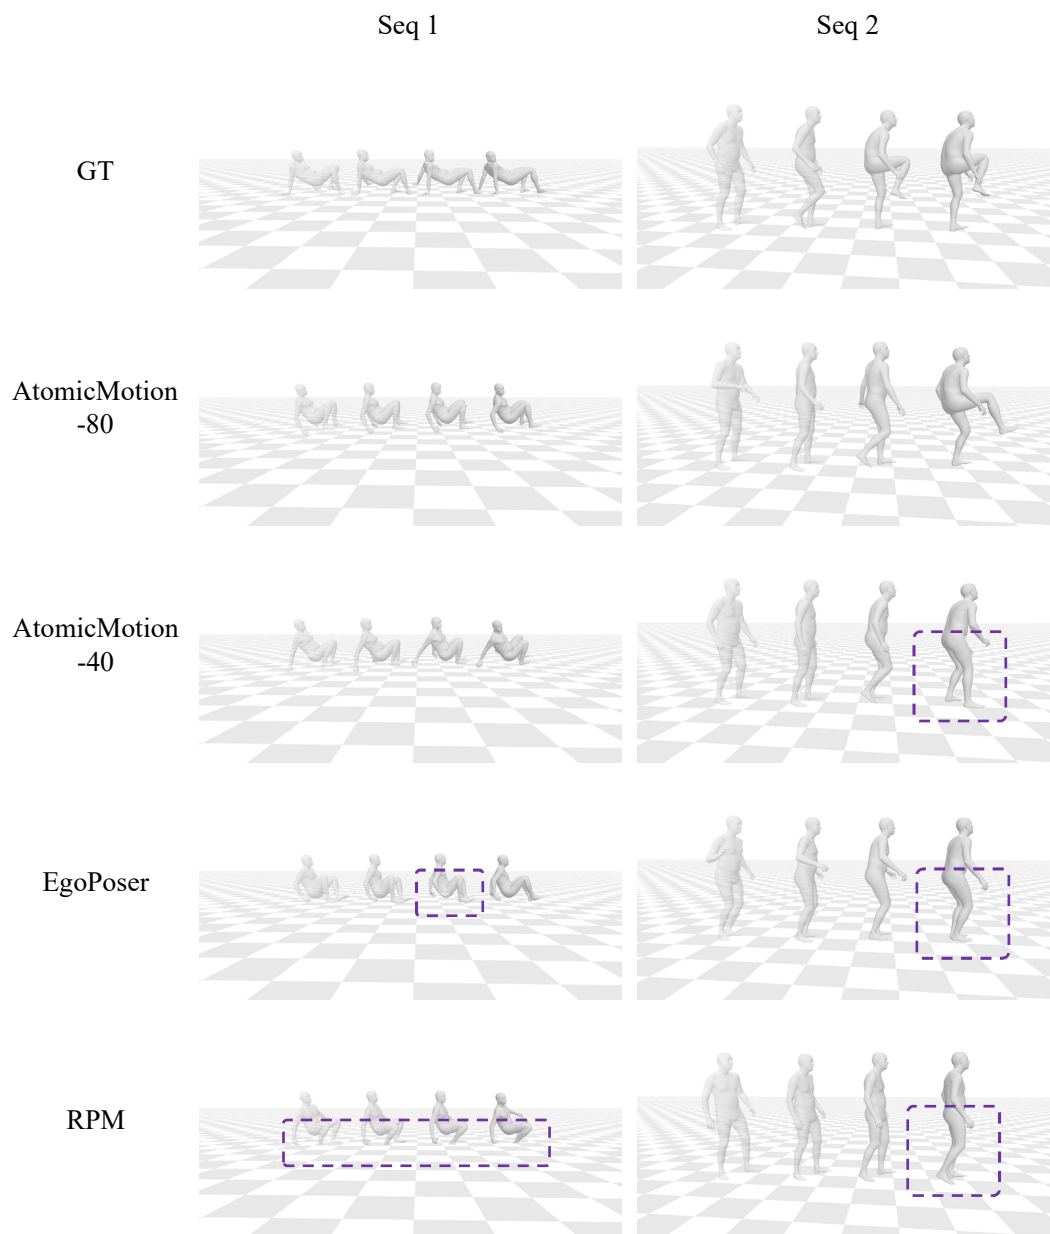


Figure E: Visual comparisons in the hand tracking mode of sequence 1 and sequence 2.

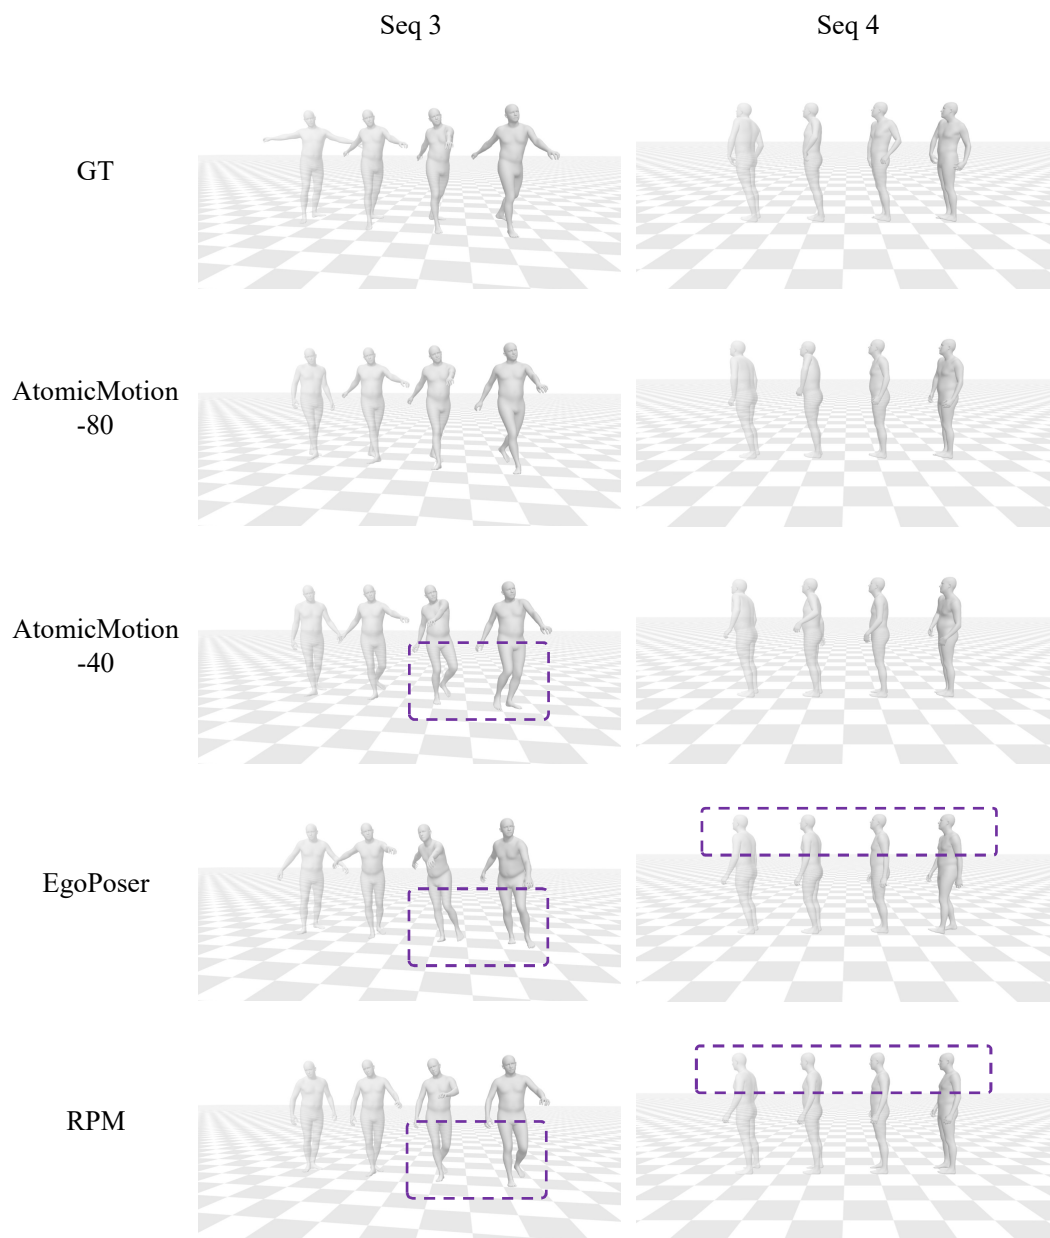


Figure F: Visual comparisons in the hand tracking mode of sequence 3 and sequence 4.

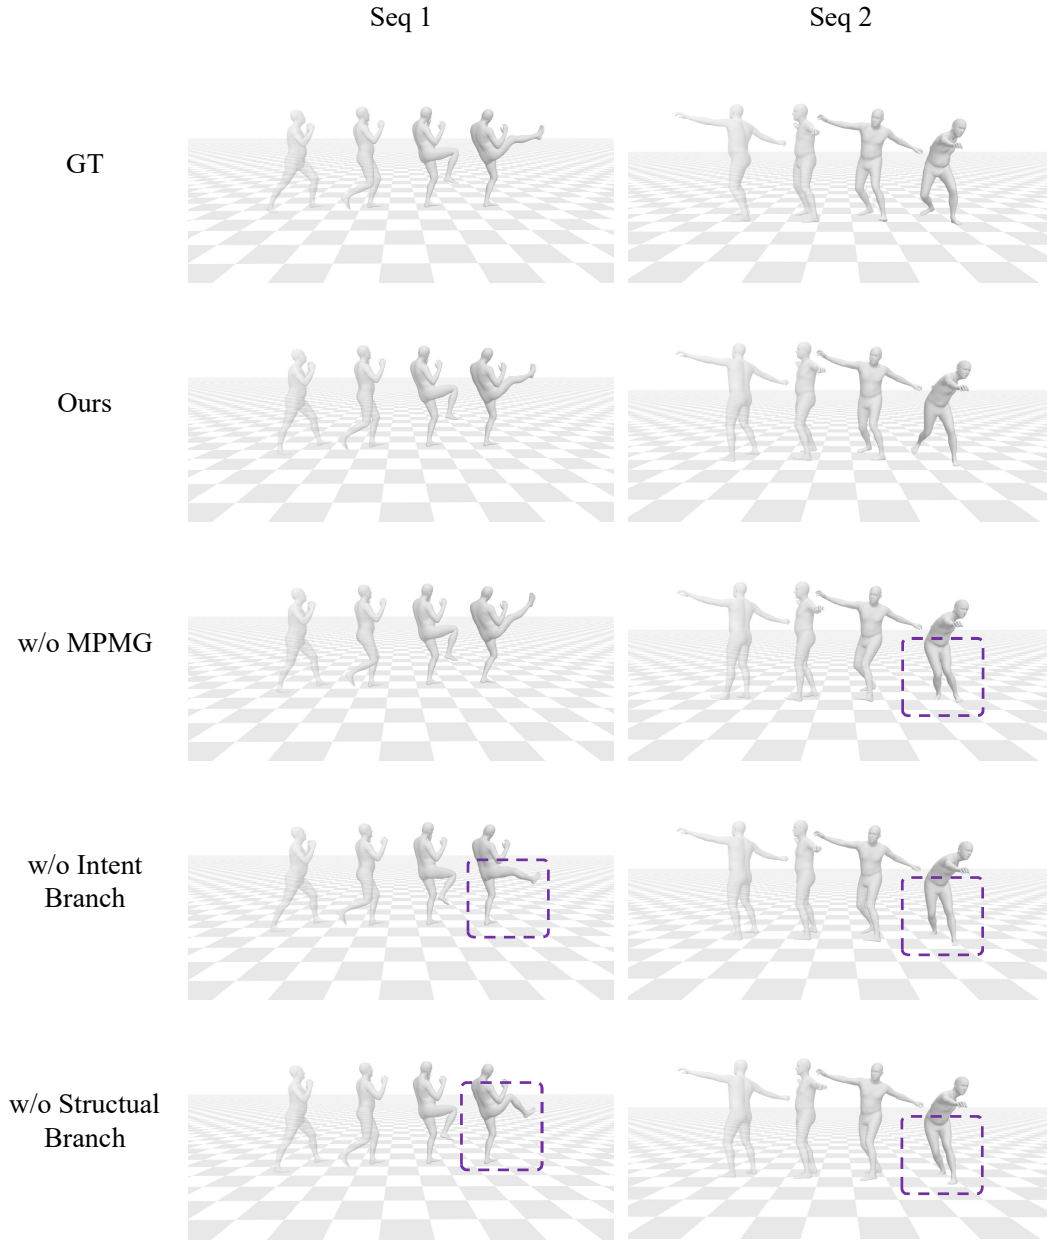


Figure G: Visual comparison of ablation studies of sequence 1 and sequence 2.

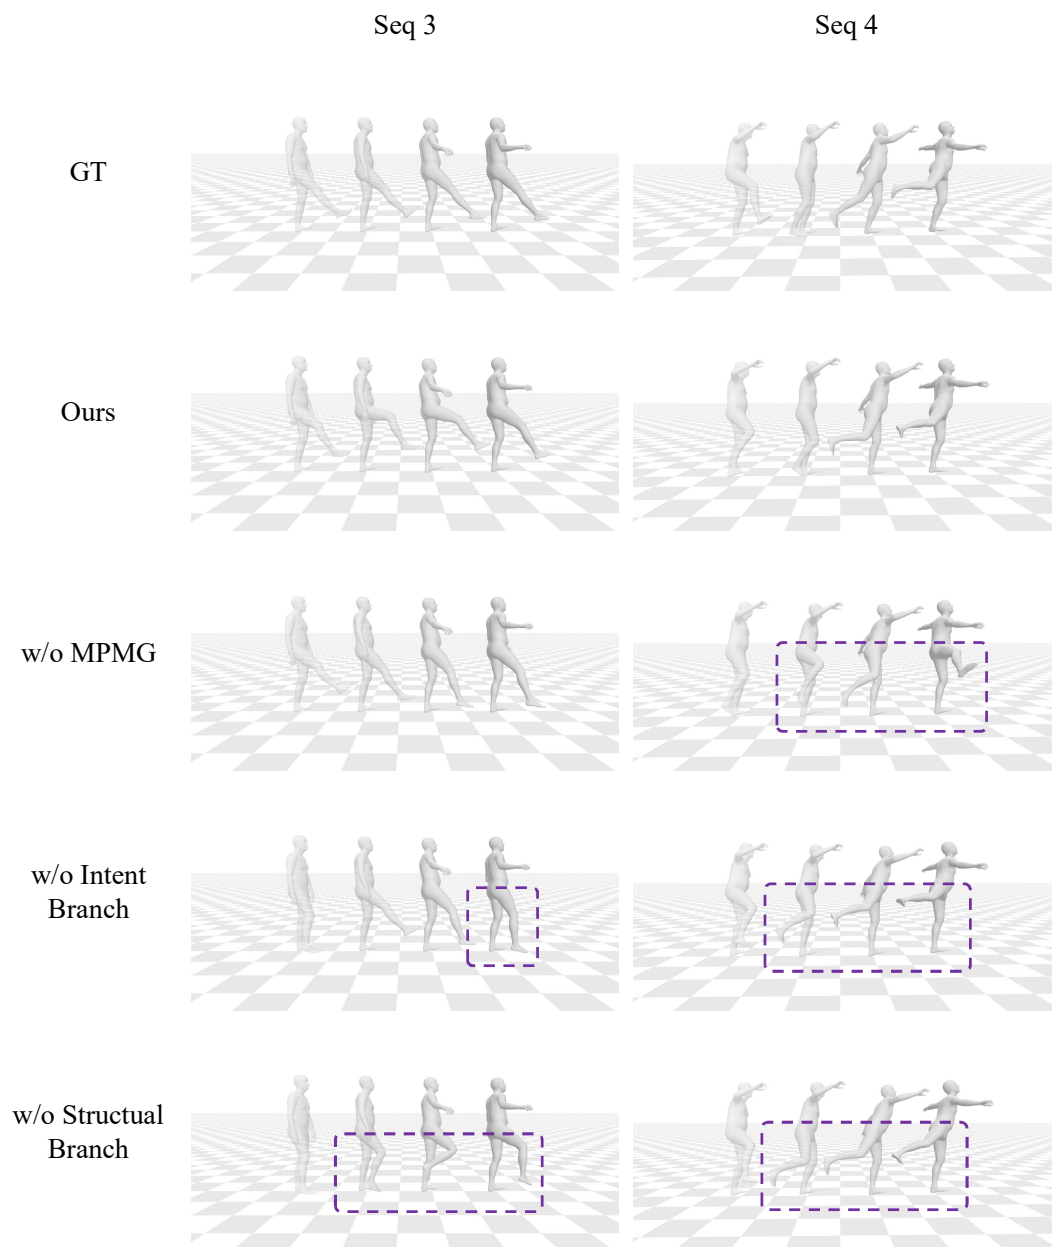


Figure H: Visual comparison of ablation studies of sequence 3 and sequence 4.