

Swift Sampling : Selecting Temporal Surprises via Taylor Series

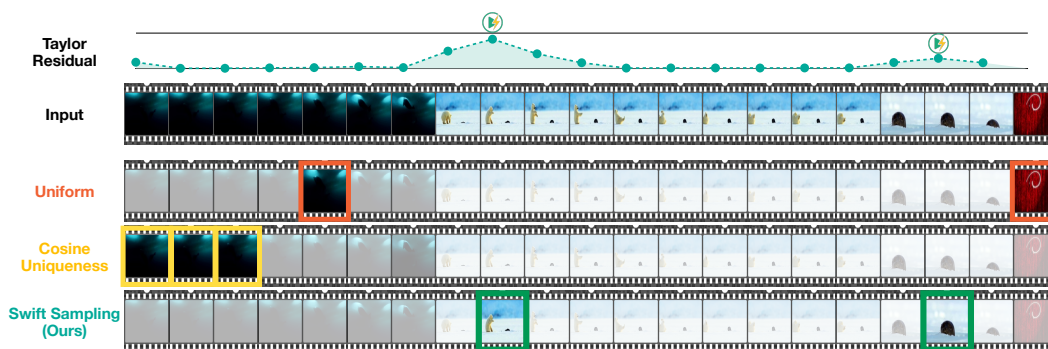
Dahye Kim¹Bhuvan Sachdeva^{2*}Karan Uppal^{2*}Naman Gupta^{2*}Vineeth N. Balasubramanian²Deepti Ghadiyaram¹¹Boston University²Microsoft Research India

Figure 1: **Swift Sampling efficiently identifies temporal surprises in videos** by measuring how much a frame deviates from the trajectory predicted by its preceding context. Using a Taylor expansion of visual features, we select frames with the largest residuals within their temporal neighborhood as keyframes. *Top*: Temporal surprise captured using Taylor residual over time. *Bottom*: input frames and frames selected by Uniform sampling (orange), Cosine Uniqueness [1] (yellow), and our method (green). Swift Sampling captures the video’s most informative frames with $30\times$ less overhead than Cosine Uniqueness, while delivering a $+12.5\%$ improvement on VQA tasks on long videos with tight frame budgets.

Abstract

While most frames in long-form video are redundant, the critical information resides in *temporal surprises*: moments where the actual visual features deviate from their predicted evolution. Inspired by the human brain’s predictive coding, we introduce **Swift Sampling**, an elegant, training-free frame selection algorithm that automatically identifies high-information moments in a video. Specifically, we model a video as a differentiable trajectory in the visual latent space and compute the velocity and acceleration of its features. Then, we apply Taylor expansion to project the expected path of subsequent frames. Frames that diverge sharply from this predicted manifold are identified as temporally surprising frames and selected for sampling. Unlike prior training-free methods that rely on auxiliary networks or video-specific hyperparameter tuning, Swift Sampling is incredibly lightweight, adding only $0.02\times$ additional computational cost over baseline making it $30\times$ cheaper overhead than leading baselines. Across three long-video question answering benchmarks and 10 different downstream tasks, Swift Sampling outperforms uniform sampling and prior query-agnostic baselines. It is especially powerful for long videos with limited frame budgets improving accuracy by up to $+12.5$ points.

*Equal contribution.

1 Introduction

How does the human brain process the simple sight of a polar bear walking through the snow? Rather than exhaustively processing the continuous visual stream, our visual system is known to operate and revise as a predictive engine: it *anticipates* future states and revises its internal model by calculating the residual errors between its prediction and reality [2, 3]. As a result, our visual system’s computational budget is not wasted on the predictable trajectory of the bear, but is instead reserved for *temporal surprises*, such as the sudden appearance of a seal. This biological principle inspired seminal video compression [4] algorithms and motivates the present work.

Long-form video is dominated by temporal redundancy: frames evolve slowly and predictably for extended stretches, punctuated by sparse but informative transitions. Yet, most Video Large Language Models (VLMs) still rely on *uniform sampling* to reduce a video to a fixed frame budget [5, 6, 7], not considering temporal structure and treating redundant frames identically to pivotal ones. Alternative approaches, such as using optical flow [8] and pairwise frame-similarity methods [1, 9], partially address this, but have their own limitations. First, they require a separate, often external, vision encoder to extract per-frame representations [8, 10, 11, 12, 13, 14, 15], nearly doubling the inference cost. Second, they require careful, video-specific hyperparameter tuning to define what constitutes a “significant” change. The computational overhead negates the efficiency gains they offer, and hyperparameter sensitivity can adversely affect downstream task performance.

Our method is based on a simple observation: long-form video consists of vast, highly predictable intervals interjected with sparse temporal surprises. We ask: can we leverage the biologically elegant predictive coding principle to identify these temporal surprises, where a frame’s content diverges from its expected path, without auxiliary models or manual tuning? To this end, we propose **Swift Sampling**, a framework that treats the visual latent features of adjacent video frames as points lying on a *locally smooth trajectory* (Fig. 2). This makes it amenable to apply a polynomial approximation via Taylor series using higher order derivatives. Given the feature vectors of the N frames preceding the current frame t , we construct a Taylor predictor that captures velocity (first order), acceleration (second order), and jerk (third order) of the feature trajectory. The **Taylor residual** – the ℓ_2 distance between the predicted and the observed feature – serves as a principled, per-frame informativeness score. A small residual indicates a predictable, redundant frame (e.g., a bear’s rhythmic walk), while a large residual signals a *temporal surprise*, i.e., a moment of genuinely new information (e.g., the sudden emergence of seal out of ice). For a given frame budget K , we select the K local maxima of the residual sequence, prioritizing the most surprising frame within each local temporal context (Fig. 1). The sampling rate scales naturally with the video complexity making our approach hyperparameter-light. Crucially, we compute these residuals directly from the *intermediate representations of the VLM’s vision encoder* that must be computed anyway during the forward pass.

Our results highlight that the “temporal surprise” detection based on Taylor expansion is robust enough to serve as a drop-in replacement for expensive previous methods, bridging the gap between low-level temporal motion and high-level LLM reasoning. Below, we summarize our contributions:

- We propose **Swift Sampling**, a training-free frame selection algorithm that operationalizes predictive coding by scoring frames via their Taylor series residual in the VLM’s latent space, with no auxiliary model or any video-specific tuning making it hyperparameter-light and efficient.
- Swift Sampling achieves **state-of-the-art performance** over uniform sampling and several prior training-free methods across different VLM backbones on video question answering, token compression, and over ten other reasoning tasks across diverse video lengths.
- We provide a **systematic analysis** of the design choices of Swift Sampling, yielding critical insights into the relationship between latent temporal dynamics and frame selection.

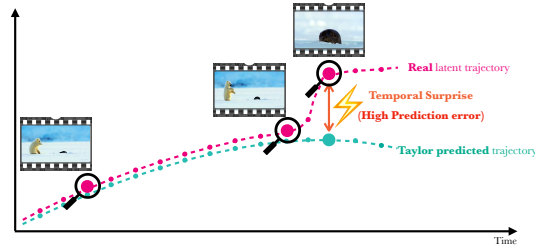


Figure 2: Each frame is represented on the *latent feature trajectory*, where we apply Taylor expansion over preceding frames to *predict the next frame* feature. The residual between the prediction and the actual feature measures how much the trajectory deviates from a smooth continuation. Frames with large residuals correspond to *temporal surprises*, e.g., seal suddenly emerging from the ice, which Swift Sampling effectively captures.

2 Related Work

Video large language models and long video understanding. Video large language models have achieved impressive results on short-form video understanding [5, 6, 16, 17, 18, 19, 20, 21, 22, 23], but processing long videos remains challenging due to the large number of input frames. To better handle long-form inputs, prior works improve temporal modeling [5, 17, 19], multimodal fusion [7, 16, 18, 21], and multi-scale encoding [6, 20, 22, 23, 24, 25]; others explicitly target long videos through context-length extension [25, 26, 27], temporal token compression [21, 28, 29], or KV-cache sparsification [30]. Despite these advances, most approaches still rely on uniform sampling to reduce raw videos to a fixed number of frames, overlooking redundancy among sampled frames. We focus on this preprocessing stage, selecting non-redundant frames to make better use of the limited frame budget, which is orthogonal and complementary to these model-level improvements.

Frame selection for long video understanding. Frame selection methods for long-video understanding have been actively explored along two directions: training-based and training-free approaches. Training-based methods learn to select frames through end-to-end optimization with downstream task losses [31, 32], frame-candidate ranking [33], pseudo-label supervision from vision-language models [34], reinforcement or self-learning [35, 36, 37, 38], and supervised keyframe annotations [39, 40]. Although effective, these methods often require additional training or adaptation for each VLM [32, 33, 34], which is expensive and limits practical deployment. To avoid this limitation, training-free frame selection methods have been preferred. Query-aware methods have been heavily explored [41, 42, 43, 44, 45, 46, 47, 48, 49], which select frames based on text-visual similarity with the language query. Query-agnostic methods [50] select frames solely from visual features without access to the query. However, both categories typically require encoding all candidate frames with a separate vision encoder to compute frame-level representations, which can nearly double inference cost. By contrast, Swift Sampling avoids the need for an auxiliary model by leveraging the VLM’s own vision encoder, thereby incurring negligible computational overhead.

Tokenization-based approaches such as ElasticTok [51], EVATok [52], AdapTok [53], and InfoTok [54], dynamically adjust the number of tokens according to video content complexity. Similarly, methods such as ToMe [55] and PruneVid [56] focus on efficiency by merging spatially or temporally redundant tokens. In contrast, Swift Sampling first identifies the most informative frames to retain prior to tokenization. By filtering redundant frames at the input level, Swift Sampling offers a complementary layer of efficiency that can be combined with token-level compression strategies.

Taylor series for video understanding. The Taylor series approximates a function at a given point using its derivatives, decomposing local behavior into zeroth-order (value), first-order (velocity), second-order (acceleration), and higher-order terms. This predictive structure has been used in video understanding and generation. Taylor Video [57] sums higher-order Taylor residuals into a dedicated motion representation that replaces or complements RGB frames as input to action classifiers; ViDiDi [58] uses temporal derivatives as additional views for self-supervised video representation learning. More recently, TaylorSeer [59] and SCOPE [60] use Taylor prediction to estimate future features across diffusion denoising steps, skipping recomputation when the prediction is reliable. These works use Taylor terms primarily to construct new representations or accelerate generation. In contrast, we use the magnitude of the Taylor residual as a frame-level informativeness score: frames whose features deviate strongly from their predicted trajectory are treated as informative and selected as keyframes. While Taylor expansions have been used before, we are not aware of any prior works that use them as a training-free, query-agnostic frame selector for very long videos.

3 Swift Sampling: Our Approach

Given a video with T frames and a target budget of $K \leq T$, our objective is to select the K most informative frames for a downstream video model. To achieve this, we propose Swift Sampling, a selection strategy grounded in the Taylor series expansion of latent visual features. Sec. 3.1 introduces the Taylor predictor for latent feature sequences, and Sec. 3.2 formalizes the Taylor residual as a principled informativeness score and presents the full selection algorithm.

3.1 Background: Taylor Series Expansion for Sequence Prediction

Let x be a smooth scalar-valued function of time, let t_0 denote the current timestep and let $x^{(n)}(t_0)$ denote the n -th derivative of x at t_0 . The Taylor series predicts x at a future time $t_0 + \Delta t$ from higher order derivatives of x , defined as follows:

$$x(t_0 + \Delta t) = \sum_{n=0}^{\infty} \frac{\Delta t^n}{n!} x^{(n)}(t_0) = x(t_0) + \Delta t \cdot x^{(1)}(t_0) + \frac{\Delta t^2}{2!} x^{(2)}(t_0) + \dots \quad (1)$$

In practice, x is observed only at discrete timesteps, so derivatives must be approximated by *backward finite differences* [61]. The first-order derivative is approximated as the difference between the two most recent samples,

$$x^{(1)}(t_0) \approx \frac{x(t_0) - x(t_0 - \Delta t)}{\Delta t}, \quad (2)$$

and the second-order derivative as the difference of two consecutive first-order differences,

$$x^{(2)}(t_0) \approx \frac{x^{(1)}(t_0) - x^{(1)}(t_0 - \Delta t)}{\Delta t} = \frac{x(t_0) - 2x(t_0 - \Delta t) + x(t_0 - 2\Delta t)}{\Delta t^2}. \quad (3)$$

In general, the n -th order approximation is a linear combination of current and n preceding frames (thus $n + 1$ total frames). This is derived by applying the difference operator n times to the sequence $x(t_0), x(t_0 - \Delta t), \dots, x(t_0 - n\Delta t)$, with weights determined by binomial coefficients.

$$x^{(n)}(t_0) \approx \frac{1}{\Delta t^n} \sum_{k=0}^n (-1)^k \binom{n}{k} x(t_0 - k \Delta t). \quad (4)$$

Substituting these estimates into Eq. (1) yields a *closed-form linear combination of preceding samples*, enabling efficient prediction of $x(t_0 + \Delta t)$ directly from observations.

3.2 Taylor Residual as an Informativeness Signal

Using the Taylor residual. Let $f_t \in \mathbb{R}^d$ denote the visual feature vector extracted from the video frame at time t and let $f_{t-1}^{(n)}$ denote the n -th order derivative of the visual feature trajectory at time $t - 1$. A natural criterion for frame informativeness under a fixed budget is *temporal surprise*: frame (feature) f_t is informative if its content is not predictable from the preceding context $f_1, \dots, f_{t-1}$. Predictive coding theory formalizes this intuition by equating informativeness with prediction error, *i.e.*, the discrepancy between the observed signal and the best prediction derived from prior context [2].

For a latent feature trajectory that evolves smoothly in time, the natural local predictor is the Taylor expansion $\hat{f}_t = f_{t-1} + f'_{t-1} \Delta t + \frac{1}{2} f''_{t-1} (\Delta t)^2 + \dots$, which extrapolates the trajectory under the assumption of locally polynomial dynamics.

As noted in Eq. 4, the n -th order derivative can be approximated using backward finite-differences from the sequence of preceding features, *i.e.*, $\{f_{t-1}, \dots, f_{t-1-n}\}$. Assuming uniform temporal spacing ($\Delta t = 1$) and truncating Eq. (1) at order N , following prior works [61, 62, 63, 59], we define the Taylor predictor of f_t based on its $N + 1$ predecessors as:

$$\hat{f}_t^{(N)} = f_{t-1} + f_{t-1}^{(1)} + \frac{1}{2!} f_{t-1}^{(2)} + \dots + \frac{1}{N!} f_{t-1}^{(N)} \quad (5)$$

Now, temporal surprise or Taylor residual at frame t is the magnitude of the prediction error:

$$r_t = \left\| f_t - \hat{f}_t^{(N)} \right\|_2. \quad (6)$$

While the Taylor predictor captures the trajectory's local kinematic structure such as velocity, acceleration, jerk, etc., r_t isolates the *surprise*, the component of f_t not explained by smooth extrapolation. Concretely, frames with a large residual r_t deviate sharply from the predicted trajectory, indicating high information content relative to their temporal context. Conversely, frames with a small r_t closely adhere to the predicted path and are considered redundant. Consequently, the Taylor residual sequence $\{r_t\}$ provides a principled, per-frame informativeness signal across the candidate pool.

Information-theoretic motivation: From a statistical perspective, under an isotropic Gaussian model for innovation (novel information) $f_t = \hat{f}_t^{(N)} + \epsilon_t$, $\epsilon_t \sim \mathcal{N}(\mathbf{0}, \sigma^2 I)$, following [64, Ch. 8,



Figure 3: **Qualitative comparison of frame selection** on a sample video from VideoMME dataset, given a budget of 8 frames out of 128. The correct answer (a seal at the breathing hole) requires temporal coverage of multiple events. Uniform sampling is redundant, capturing the polar bear while missing the seal entirely. Cosine Uniqueness [1] favors visual outliers like title cards and underwater shots that are task irrelevant and fail to provide relevant information. By contrast, Swift Sampling captures the temporal surprise of the seal’s appearance thus providing critical evidence for correct reasoning.

Thm 8.4.1], the Shannon self-information (surprise) of frame (feature) f_t given its context can be written as:

$$-\log p(f_t | f_1, \dots, f_{t-1}) = \frac{1}{2\sigma^2} r_t^2 + \text{const}, \quad (7)$$

which is monotonically increasing in the Taylor-residual magnitude r_t . While this Gaussian model is an idealization (we do not claim that the vision encoder’s projections are Gaussian), it motivates our use of Taylor residual as a tractable surrogate for informativeness. We note that this interpretation is consistent with classical filtering formulations, where larger innovations induce larger posterior corrections (e.g., [65]).

Local Maxima Selection: A key subtlety is that r_t is computed relative to its predecessors, so its absolute scale depends on the local dynamics of the trajectory: a slow, uniform scene yields consistently low residuals, while a fast-moving segment produces uniformly high values. Consequently, selecting the global top- K residuals would concentrate all keyframes within a few high-motion bursts, leaving subtler but critical events entirely unrepresented. We therefore select the *local maxima* of $\{r_t\}$, identifying the most surprising frame within each local temporal context, regardless of absolute magnitude. Formally, let $M < T$ denote the number of detected local maxima, which vary with the video content. Formally, we define the set of local maxima $\mathcal{P} = \{p_1, \dots, p_M\}$, indexed in increasing temporal order as: $\mathcal{P} = \{i : r_i > r_{i-1} \text{ and } r_i > r_{i+1}\}$. From this candidate set $\mathcal{P}$, we select the K elements with the largest residuals to serve as the final frames. In cases where the video is highly static ($M < K$), the remaining $K - M$ slots are filled using the highest-residual frames from the pool of non-maxima, $\{1, \dots, T\} \setminus \mathcal{P}$. We demonstrate in Sec. 4 that this hierarchical selection strategy prioritizes the most significant surprises relative to their immediate context.

4 Experiments

4.1 Experimental Settings

Benchmarks. We evaluate on three well-known long video benchmarks: Video-MME [70], MLVU [71], and LongVideoBench (LVB) [72]. Each benchmark focuses specifically on Visual Question Answering (VQA) as the primary downstream reasoning task. To measure how frame selection quality scales with video duration, we report accuracy across various temporal subsets, ranging from short clips to videos exceeding 30 minutes.

Baselines. We compare Swift Sampling against

- **training-based** supervised methods [33, 34, 39] designed specifically for frame selection,
- **training-free** query-aware methods (marked as ✗ in Table 1), that utilize the input question to identify relevant frames during inference [41],
- **training-free** query-agnostic methods (marked as ✓ in Table 1) that select frames based purely on video content, including MaxInfo [50] and the following baselines: 1) **Cosine Uniqueness** [1], which selects the top- K most unique frames based on inter-frame cosine similarity; 2) **Frame Difference**, which selects the top- K frames with the largest adjacent-frame feature differences; 3) **I-Frame** and 4) **P-Frame**, which select the top- K frames ranked by I-frame or P-frame packet sizes from the video codec, respectively; 5) **Optical**

Table 1: **VQA accuracy across different video durations** on Video-MME, LongVideoBench (LVB), and MLVU benchmark. The **Query-agnostic** column indicates if the method selects frames without using the query (✓: query-agnostic, ✗: query-aware). The **FLOPs** column reports inference cost *relative* to uniform sampling on the same backbone ($1.00\times$ = no overhead beyond the base VLMs forward pass). Within each (backbone, query-type) block: **bold** = best, underline = second best.

Method	Size FLOPs	Query- agnostic	# Frames	Video-MME				LVB				MLVU			
				Short	Medium	Long	Overall	≥10m	≥20m	≥30m	Overall	≥10m	≥15m	≥30m	Overall
Pretrained VLLM w/ Uniform Sampling:															
VideoChat2 [17]	7B	✓	32	36.7	31.7	28.6	32.3	22.4	19.6	15.7	22.6	46.1	41.6	43.8	50.6
VideoLLaMA3 [66]	7B	✓	32	77.2	61.7	53.4	64.1	49.1	51.1	52.8	58.0	56.5	53.7	45.8	57.2
LongVA [27]	7B	✓	32	63.2	50.7	45.0	53.0	46.5	46.7	46.3	52.6	56.5	50.3	54.2	57.4
Qwen2.5-VL [67]	7B	✓	32	72.6	61.2	50.2	61.3	50.9	54.3	59.3	58.8	59.6	49.0	54.2	60.3
InternVL3 [68]	8B	✓	32	75.3	64.4	54.3	64.7	48.9	50.0	49.1	58.9	68.9	61.1	64.6	70.1
Training-based Frame Selection:															
Frame-Voyager [33]	7B	✗	8/32	67.3	56.3	48.9	57.5	-	-	-	-	-	-	-	65.6
Hu et al. [34]	8.5B	✗	128/32	69.6	54.1	51.9	58.7	-	-	-	-	-	-	-	-
GenS [39]	7B	✗	54/32	-	-	-	-	-	-	-	58.7	-	-	-	64.8
Training-free Frame Selection:															
<i>LLaVA-OneVision</i> [7]															
+ Uniform	1.00×	✓	128→32	69.9	56.4	48.8	58.3	45.2	47.5	48.1	55.3	61.4	54.4	50.0	64.7
+ Cosine Uniqueness [1]	1.60×	✓	128→32	65.3	54.7	47.0	55.7	47.0	47.1	46.3	52.5	63.6	61.1	47.9	65.4
+ Swift Sampling (Ours)	1.02×	✗	128→32	71.0	56.9	49.2	59.0	51.6	54.3	50.9	57.9	62.2	58.2	54.2	65.6
+ AKS [41]	1.53×	✗	128→32	66.7	56.4	48.8	57.3	54.8	52.7	52.7	58.0	65.7	59.1	56.2	68.6
+ AKS [41]	2.06×	✗	256→32	62.0	52.8	48.4	54.4	54.9	55.1	49.1	58.7	65.0	61.1	56.2	69.4
+ AKS+Swift Sampling (128→96)	1.43×	✗	128→32	67.4	56.1	48.7	57.4	54.1	52.1	52.1	58.6	64.8	57.7	50.0	69.4
+ AKS+Swift Sampling (256→128)	1.59×	✗	256→32	67.0	54.7	47.8	56.5	54.0	52.5	52.5	58.9	64.6	59.1	50.0	69.9
<i>LLaVA-Video</i> [5]															
+ Uniform	1.00×	✓	128→32	74.0	59.0	51.3	61.4	50.7	53.3	54.6	56.8	56.7	54.4	50.0	64.2
+ Cosine Uniqueness [1]	1.60×	✓	128→32	69.2	54.4	50.1	57.9	50.7	52.5	54.6	56.5	61.2	57.0	50.0	66.5
+ Swift Sampling (Ours)	1.02×	✗	128→32	74.9	59.1	51.6	61.9	52.1	56.2	57.4	58.6	60.0	55.0	52.1	67.2

Table 2: **Comparison with additional query-agnostic baselines on LLaVA-OneVision**. All methods select $K=32$ frames from a pool of 128 candidates. **FLOPs** report inference cost relative to uniform sampling. **Bold**: best, underline: second best.

Method	FLOPs	# Frames	Video-MME				LVB				MLVU			
			Short	Medium	Long	Overall	≥10m	≥20m	≥30m	Overall	≥10m	≥15m	≥30m	Overall
Uniform	1.00×	128→32	69.9	56.4	48.8	58.3	45.2	47.5	48.1	55.3	61.4	54.4	50.0	64.7
Cosine Uniqueness [1]	1.60×	128→32	65.3	54.7	47.0	55.7	47.0	47.1	46.3	52.5	63.6	61.1	47.9	65.4
Frame difference	1.00×	128→32	67.4	53.3	48.3	56.4	46.3	49.3	51.9	53.5	58.5	53.7	45.8	64.6
Iframe	1.00×	128→32	67.4	54.9	48.7	57.0	<u>52.0</u>	49.8	49.8	57.1	60.6	54.4	<u>52.1</u>	63.8
Pframe	1.00×	128→32	66.9	55.1	48.2	56.7	51.9	49.1	49.1	56.5	60.8	54.4	50.0	64.1
Optical Flow [8]	1.07×	128→32	68.6	53.0	48.0	56.5	52.4	50.7	50.7	56.9	60.0	56.4	<u>52.1</u>	62.9
DySeg (adapted) [69]	1.79×	128→32	69.6	53.7	48.4	57.2	46.0	48.2	51.9	52.9	49.6	47.7	48.3	63.1
MaxInfo [50]	1.79×	128→32	71.1	57.2	48.8	58.9	51.4	<u>50.8</u>	50.0	<u>57.8</u>	63.0	59.1	51.1	66.5
Swift Sampling (Ours)	1.02×	128→32	<u>71.0</u>	<u>56.9</u>	49.2	59.0	51.6	54.3	<u>50.9</u>	57.9	<u>62.2</u>	<u>58.2</u>	54.2	<u>65.6</u>

Flow Based, which uses the pretrained optical flow estimator RAFT [8] to pick top-K frames with the highest mean flow magnitude 6) **DySeg** [69], originally proposed for segment grouping, which we adapt for frame selection. Details in the appendix.

Implementation details. We use two representative VLM backbones for our experiments: LLaVA-OneVision [7] and LLaVA-Video [5]. Given a video, we uniformly sample 128 candidate frames and select $K = 32$ frames for downstream tasks. We extract frame representations from the key projections of the vision encoder’s first transformer layer ($\ell = 0$) to compute the Taylor residuals. The spatial tokens are mean-pooled to obtain the per-frame feature f_t used in Eq. 6. Throughout all experiments, we fix the Taylor expansion order to $N = 3$. For all baselines, we strictly adhere to their publicly available implementations. More details in Appendix.

4.2 Main Results

Results are summarized in Tables 1 and 2. Swift Sampling brings consistent gains over uniform sampling across all two backbones, with particularly strong improvements on long-duration videos. Using *LLaVA-OneVision* as a backbone, on the LVB dataset, the overall accuracy improves from 55.3 to 57.9 (+2.6); on MLVU dataset, the overall jumps from 64.7 to 65.6 (+0.9). The gains are more pronounced on longer videos: +6.8 points on LVB videos longer than 20 minutes (47.5 → 54.3), +6.4 points on LVB videos longer than 10 minutes (45.2 → 51.6), and +4.2 points on MLVU videos longer than 30 minutes (50.0 → 54.2). On *LLaVA-Video*, we observe similar trends: MLVU overall improves from 64.2 to 67.2 (+3.0), and LVB videos longer than 20 minutes from 53.3 to 56.2 (+2.9). As shown in Fig. 3, these improvements stem from our method’s ability to capture pivotal “surprise” events that standard baselines overlook.

On a broader comparison with query-agnostic baselines (✓ in Table 1 and the entirety of Table 2), our method remains highly competitive while operating at a negligible $1.02\times$ inference cost. This efficiency stems from reusing the target Video LLM’s existing vision encoder – specifically the first few layers – to compute frame representations. This adds only $0.02\times$ to the total inference cost compared to the vanilla model. By contrast, existing **training-free** methods [1, 41, 69, 50] require



Figure 4: **Qualitative comparison of frame selection** on a sample video from the Video-MME dataset, given a budget to select 8 frames out of 128. Answering the question requires identifying the temporal order of several visually similar but semantically distinct painting events: establishing the background, drawing the water-lily pads, adding flowers, and increasing texture. **Uniform sampling** captures the background and water-lily pads **but misses the frames showing the addition of flowers and texture**, leading to an incorrect answer. **Cosine Uniqueness** [1] over-selects **visually salient but task-irrelevant frames**, such as title cards and end screens, which is especially harmful under a limited frame budget. **Swift Sampling** focuses on temporally informative changes in the painting progression, **captures key intermediate stages** and enables correct temporal reasoning.

encoding all candidate frames through a separate, often external vision encoder [13, 14, 37, 73], increasing inference cost to approximately $1.8\times$.

Notice that the advantage of Swift Sampling is most pronounced in the long-video regime: on LVB videos longer than 20 minutes, we outperform the strongest baseline (MaxInfo at 50.8) by **+3.5** points (54.3); on MLVU videos longer than 30 minutes, we outperform the strongest baselines (Iframe and Optical Flow, both at 52.1) by **+2.1** points (54.2).

Combining with AKS. Swift Sampling is a plug-and-play framework that can be combined with other query-aware (✓) frame selection methods such as AKS [41], that score candidate frames against the posed question. In this context, Swift Sampling serves as a high-speed pre-filter, narrowing the candidate pool before more computationally expensive query-based scoring takes place. As shown in Table 1, pre-filtering from 128 to 96 candidates (*AKS+Swift Sampling*) reduces the selection cost of AKS from $1.53\times$ to $1.43\times$. Crucially, this efficiency does not come at the expense of performance; rather, it improves overall accuracy across all three benchmarks, including gains of $+0.8$ points on MLVU and $+0.6$ points on LVB. Additionally, by initiating the process with a larger pool of 256 frames and pre-filtering to 128, we outperform the standard AKS ($256 \rightarrow 32$) by $+2.1\%$ on Video-MME and $+0.5\%$ on MLVU. Remarkably, this performance boost is achieved while simultaneously reducing the inference costs from $2.06\times$ to $1.59\times$. In summary, Swift Sampling is a robust, architecture-agnostic technique that selects pivotal frames for long-form video processing.

In the following sections, we show the utility of Swift Sampling in diverse video understanding tasks.

4.3 Application: Token Compression

Token compression seeks to reduce visual token counts while preserving core video content. We integrate Swift Sampling into UniComp [1], the current state-of-the-art in this domain, by replacing its default uniform frame selection (indicated as *+Swift Sampling (Ours)*, $128 \rightarrow 32$ in Table 3). Our intuition is that providing UniComp with more informative initial frames will yield superior results within the same frame budget. As shown in Table 3, Swift Sampling consistently boosts UniComp’s accuracy across all retention ratios r , achieving a peak gain of $+1.6$ points on MLVU ($r = 0.15$). These results demonstrate that Swift Sampling offers a *drop-in improvement* for token compression pipelines.

Table 3: **Swift Sampling for token compression** All methods produce 32 frames as input to the video LLM. UniComp uses 32 uniformly sampled frames. Replacing uniform sampling with Taylor selection (shown as *+Swift Sampling*) ($128 \rightarrow 32$ candidates) consistently improves the overall accuracy of UniComp [1] across all retain ratios r . **Bold**: best within block.

Method	# Tokens	All	$\geq 10m$	$\geq 15m$	$\geq 30m$
Vanilla 32f	6272	64.7	61.4	54.4	50.0
UniComp ($r = 0.25$)	1568	64.2	60.0	53.7	56.2
<i>+Swift Sampling (Ours)</i>		65.1	60.6	55.7	58.3
UniComp ($r = 0.20$)	1254	64.5	61.0	53.0	56.2
<i>+Swift Sampling (Ours)</i>		65.3	60.4	55.0	58.3
UniComp ($r = 0.15$)	941	64.4	59.8	57.0	62.5
<i>+Swift Sampling (Ours)</i>		66.0	61.8	57.7	56.2
UniComp ($r = 0.10$)	627	62.1	59.6	57.0	64.6
<i>+Swift Sampling (Ours)</i>		64.5	60.8	56.4	62.5

4.4 Application: Video Captioning

Video captioning requires interpreting a sequence of selected frames and generating a coherent natural language description. We evaluate Swift Sampling on LLaVA-OneVision [7] on the TempCompass benchmark [74] on the task of caption generation, where improved frame selection is expected to yield more informative captions. For evaluation, we follow the original protocol: we prompt GPT-4o (2024-11-20) [75] with the generated caption and ask it to answer a corresponding multiple-choice question. A correct answer indicates a correct caption, and vice versa. As shown in Table 4, Swift Sampling improves captioning performance across nearly all categories, but struggles on attribute change.

Table 4: **Swift Sampling for Video Captioning** improves accuracy across most categories in TempCompass [74].

Category	Uniform	Swift Sampling
Action	40.29	41.26 (+0.97)
Attribute Change	38.52	34.44 (−4.08)
Direction	34.76	36.43 (+1.66)
Order	36.99	38.78 (+1.79)
Speed	12.37	13.14 (+0.77)

4.5 Applications: Other Downstream tasks in Video-MME

We analyze performance by task-category on Video-MME to isolate Swift Sampling’s core strengths. As seen from Table 5, Swift Sampling excels in reasoning-intensive tasks: Spatial Reasoning (+5.4%), Action Reasoning (+3.9%), Temporal Reasoning (+2.8%), and Action Recognition (+2.2%). We believe selecting frames that most distinctively capture the motion benefits these high-level tasks. By contrast, performance regresses in tasks requiring global temporal continuity, such as Temporal Perception (−3.6%) and Counting (−2.2%) (qualitative examples in Appendix). We conjecture that these categories may demand uniform temporal coverage because even low-surprise regions of the video may carry task-relevant information, a requirement less suited to selective, surprise-based sampling.

Table 5: **Per-task accuracy on Video-MME**

Task Category	Uniform	Swift Sampling
Action Reasoning	53.7	57.5 (+3.9)
Action Recognition	55.0	57.2 (+2.2)
Attribute Perception	74.8	71.2 (−3.6)
Counting Problem	37.7	35.4 (−2.2)
Information Synopsis	73.4	74.3 (+0.9)
OCR Problems	61.9	60.4 (−1.4)
Object Reasoning	55.1	55.1 (+0.0)
Object Recognition	65.8	66.1 (+0.3)
Spatial Perception	59.3	63.0 (+3.7)
Spatial Reasoning	78.6	83.9 (+5.4)
Temporal Perception	63.6	60.0 (−3.6)
Temporal Reasoning	40.7	43.5 (+2.8)

5 Analysis of Swift Sampling

Below, we present a thorough analysis of our method on LLaVA-OneVision [7].

Choice of feature pooling. We study how the spatial granularity of feature aggregation affects frame selection quality. LLaVA-OneVision [7] uses SigLIP [13] as its vision encoder, which produces a 14×14 token grid per frame. We first aggregate the per-frame token grid into an $S \times S$ patch grid. Taylor residuals are computed for each grid’s mean feature, then averaged to produce a single frame-level score. We sweep $S \in \{1, 2, 4, 7, 14\}$, ranging from global mean pooling ($S = 1$, a single region summarizing all 196 tokens) to no aggregation ($S = 14$, each region containing exactly one token). As shown in Table 6, global mean pooling ($S = 1$) achieves the best overall performance. We hypothesize that finer grids (e.g., $S = 14$) dilute the temporal signal presumably because the local residuals could be dominated by texture noise and camera jitter. By contrast, the frame-level mean captures coherent scene-level transitions more relevant to frame selection. Given its superior robustness $S = 1$ is our default aggregation strategy.

Table 6: **Effect of spatial aggregation.** Patch grid for region-level pooling before computing the Taylor residual on MLVU. Global mean pooling provides the best balance across benchmarks. **Bold:** best.

Patch grid	Regions	MLVU	Video-MME	LVB
Global mean (Ours)	1	65.6	59.0	57.9
2×2	4	64.7	57.7	56.6
4×4	16	65.8	58.3	57.1
7×7	49	65.0	58.7	57.4
14×14 (all tokens)	196	64.1	58.3	57.8

Table 8: Analyses on Taylor expansion order and frame budget.

(a) **Effect of Taylor expansion order** N on VQA accuracy across Video-MME, LongVideoBench (LVB), and MLVU. $N = 3$ provides the best overall balance across benchmarks.

Order	Video-MME	LVB	MLVU
$N = 1$	58.1	56.7	64.6
$N = 2$	58.7	56.6	64.9
$N = 3$	59.0	57.9	65.6
$N = 4$	58.0	57.2	65.7
$N = 6$	58.1	57.1	66.0
$N = 8$	58.3	57.4	65.9

(b) **Impact of frame budget (K) on MLVU VQA accuracy.** We compare uniform sampling and Cosine Uniqueness [1] against Swift Sampling. Results are reported for the full MLVU dataset and specific long-video subsets ($\geq 10m$, $\geq 15m$, $\geq 30m$). Gains over uniform sampling are indicated in the parentheses.

K	Frame Selection Method	All	$\geq 10m$	$\geq 15m$	$\geq 30m$
32	Uniform	64.7	61.4	54.4	50.0
	Cosine Uniqueness	65.4 (+0.7)	63.6 (+2.2)	61.1 (+6.7)	47.9 (-2.1)
	Swift Sampling (Ours)	65.6 (+0.9)	62.2 (+0.8)	58.2 (+3.8)	54.2 (+4.2)
16	Uniform	61.6	58.9	52.3	47.9
	Cosine Uniqueness	61.4 (-0.2)	57.9 (-1.0)	56.4 (+4.1)	47.9 (+0.0)
	Swift Sampling (Ours)	63.9 (+2.3)	60.0 (+1.1)	53.0 (+0.7)	50.0 (+2.1)
8	Uniform	58.6	57.9	49.0	50.0
	Cosine Uniqueness	58.7 (+0.1)	56.9 (-1.0)	55.7 (+6.7)	54.2 (+4.2)
	Swift Sampling (Ours)	60.3 (+1.7)	59.1 (+1.2)	53.0 (+4.0)	54.2 (+4.2)
4	Uniform	54.4	53.3	51.7	45.8
	Cosine Uniqueness	55.5 (+1.1)	54.9 (+1.6)	49.7 (-2.0)	54.2 (+8.4)
	Swift Sampling (Ours)	56.7 (+2.3)	55.3 (+2.0)	55.0 (+3.3)	58.3 (+12.5)
2	Uniform	51.8	50.8	49.0	43.8
	Cosine Uniqueness	52.5 (+0.7)	53.7 (+2.9)	53.0 (+4.0)	54.2 (+10.4)
	Swift Sampling (Ours)	54.0 (+2.2)	53.9 (+3.1)	51.7 (+2.7)	54.2 (+10.4)

Choice of Feature Layer and Type. We study which layers and feature types yield the most predictable temporal dynamics, and thus, the most informative Taylor residuals for frame selection. We compare *key* features from the self-attention projection W_k against *hidden* features (encoder block outputs). As shown in Table 7, mean-pooled key features in the earliest layers of the vision encoder produce the lowest average residuals. We hypothesize that this is because early-layer features provide stable, low-level scene representations that evolve smoothly, making them highly predictable yet sensitive to sudden ‘surprises.’ Deeper layers, though offer marginal gains, often prioritize holistic semantics over the motion dynamics required for precise temporal prediction. Thus, we use $\ell = 0$ as our default choice. We present a detailed visualization of all layers in Appendix.

Effect of Taylor Expansion Order. We investigate how the Taylor expansion order N (as defined in Section 4.1) affects frame selection quality. As shown in Table 8a, VQA accuracy improves sharply from $N = 1$ to $N = 3$ across all three benchmarks, after which performance saturates. While Video-MME and LVB show no significant gains, MLVU exhibits marginal improvements at $N = 6$. This suggests that low-order terms effectively capture the majority of predictable local dynamics and higher-order derivatives provide diminishing returns for identifying temporal surprises. Thus, we adopt $N = 3$ as the default, striking a balance between efficiency and predictive accuracy.

Effect of Frame Budget. We evaluate the impact of the frame budget K on VQA performance. From Table 8b, Swift Sampling consistently outperforms uniform sampling across all frame budgets, with significant gains on longer videos and under highly constrained budgets. For videos exceeding 30 minutes, Swift Sampling improves over uniform sampling by **+12.5** points at $K = 4$ and **+10.4** points at $K = 2$. Thus, as the frame budget tightens, identifying temporal surprises becomes critical for model reasoning and Swift Sampling offers a computationally efficient solution for it.

6 Conclusion and Future Work

We presented **Swift Sampling**, a training-free framework for long-video understanding that identifies keyframes via Taylor residuals. By reusing only the early layers of a VLM’s vision encoder, our method adds a negligible $0.02\times$ overhead – $30\times$ less overhead than prior baselines. Swift Sampling’s lightweight design and consistent top-performance over prior training-free baselines makes it a seamless drop-in for pipelines like token compression and captioning.

Currently, Swift Sampling is query-agnostic to prioritize efficiency. This may occasionally lead it to select visually surprising but semantically irrelevant frames, such as shot transitions. Future work will explore adapting the Taylor signal to be task-sensitive. Extending the framework to audio and spatio-temporal modalities to achieve a more holistic, context-aware understanding of video is another fruitful future direction.

Table 7: **Effect of Feature Layer** $\ell = 0$ yields the optimal trade-off between VQA accuracy and computational cost.

Key layer	MLVU	Video-MME	LVB	FLOPs
$\ell = 0$	65.6	59.0	57.9	$1.02\times$ ✖
$\ell = 1$	64.3	59.1	56.3	$1.05\times$
$\ell = 2$	65.8	58.4	57.1	$1.07\times$
$\ell = 3$	65.5	59.1	57.7	$1.09\times$

References

- [1] Chao Yuan, Shimin Chen, Minliang Lin, Limeng Qiao, Guanglu Wan, and Lin Ma. Uni-comp: Rethinking video compression through informational uniqueness. *arXiv preprint arXiv:2512.03575*, 2025.
- [2] Rajesh PN Rao and Dana H Ballard. Predictive coding in the visual cortex: a functional interpretation of some extra-classical receptive-field effects. *Nature neuroscience*, 2(1):79–87, 1999.
- [3] Karl Friston. The free-energy principle: a unified brain theory? *Nature reviews neuroscience*, 11(2):127–138, 2010.
- [4] Cassius C Cutler. Differential quantization of communication signals, July 29 1952. US Patent 2,605,361.
- [5] Yuanhan Zhang, Jinming Wu, Wei Li, Bo Li, Zejun Ma, Ziwei Liu, and Chunyuan Li. Llava-video: Video instruction tuning with synthetic data. *arXiv preprint arXiv:2410.02713*, 2024.
- [6] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [7] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan Zhang, Yanwei Li, Ziwei Liu, et al. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*, 2024.
- [8] Zachary Teed and Jia Deng. Raft: Recurrent all-pairs field transforms for optical flow. In *ECCV*, 2020.
- [9] Pyscenedetect. <https://www.scenedetect.com/>.
- [10] Oriane Siméoni, Huy V Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seungeun Yi, Michaël Ramamonjisoa, et al. Dinov3. *arXiv preprint arXiv:2508.10104*, 2025.
- [11] Haoifei Xu, Jing Zhang, Jianfei Cai, Hamid Rezatofighi, and Dacheng Tao. Gmflow: Learning optical flow via global matching. In *CVPR*, 2022.
- [12] Zhaoyang Huang, Xiaoyu Shi, Chao Zhang, Qiang Wang, Ka Chun Cheung, Hongwei Qin, Jifeng Dai, and Hongsheng Li. Flowformer: A transformer architecture for optical flow. In *ECCV*, 2022.
- [13] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *ICCV*, 2023.
- [14] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *ICML*, 2022.
- [15] Beichen Zhang, Pan Zhang, Xiaoyi Dong, Yuhang Zang, and Jiaqi Wang. Long-clip: Unlocking the long-text capability of clip. In *ECCV*, 2024.
- [16] Bin Lin, Yang Ye, Bin Zhu, Jiaxi Cui, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection. 2024.
- [17] KunChang Li, Yanan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding. *Science China Information Sciences*, 68(10):200102, 2025.
- [18] Peng Jin, Ryuichi Takanobu, Wancai Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. In *CVPR*, 2024.
- [19] Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, et al. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms. *arXiv preprint arXiv:2406.07476*, 2024.

- [20] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Lllavanext: Improved reasoning, ocr, and world knowledge, 2024.
- [21] Jiajun Fei, Dian Li, Zhidong Deng, Zekun Wang, Gang Liu, and Hui Wang. Video-ccam: Enhancing video-language understanding with causal cross-attention masks for short and long videos. *arXiv preprint arXiv:2408.14023*, 2024.
- [22] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024.
- [23] Zhe Chen, Weiyun Wang, Yue Cao, Yangzhou Liu, Zhangwei Gao, Erfei Cui, Jinguo Zhu, Shenglong Ye, Hao Tian, Zhaoyang Liu, et al. Expanding performance boundaries of open-source multimodal models with model, data, and test-time scaling. *arXiv preprint arXiv:2412.05271*, 2024.
- [24] Mingze Xu, Mingfei Gao, Shiyu Li, Jiasen Lu, Zhe Gan, Zhengfeng Lai, Meng Cao, Kai Kang, Yinfei Yang, and Afshin Dehghan. Slowfast-llava-1.5: A family of token-efficient video large language models for long-form video understanding. *arXiv preprint arXiv:2503.18943*, 2025.
- [25] Kwai Keye Team, Biao Yang, Bin Wen, Changyi Liu, Chenglong Chu, Chengru Song, Chongling Rao, Chuan Yi, Da Li, Dunju Zang, et al. Kwai keye-vl technical report. *arXiv preprint arXiv:2507.01949*, 2025.
- [26] Yukang Chen, Fuzhao Xue, Dacheng Li, Qinghao Hu, Ligeng Zhu, Xiuyu Li, Yunhao Fang, Haotian Tang, Shang Yang, Zhijian Liu, et al. Longvila: Scaling long-context visual language models for long videos. *arXiv preprint arXiv:2408.10188*, 2024.
- [27] Peiyuan Zhang, Kaichen Zhang, Bo Li, Guangtao Zeng, Jingkang Yang, Yuanhan Zhang, Ziyue Wang, Haoran Tan, Chunyuan Li, and Ziwei Liu. Long context transfer from language to vision. *arXiv preprint arXiv:2406.16852*, 2024.
- [28] Xiaoqian Shen, Yunyang Xiong, Changsheng Zhao, Lemeng Wu, Jun Chen, Chenchen Zhu, Zechun Liu, Fanyi Xiao, Balakrishnan Varadarajan, Florian Bordes, et al. Longvu: Spatiotemporal adaptive compression for long video-language understanding. *arXiv preprint arXiv:2410.17434*, 2024.
- [29] Chuanqi Cheng, Jian Guan, Wei Wu, and Rui Yan. Scaling video-language models to 10k frames via hierarchical differential distillation. *arXiv preprint arXiv:2504.02438*, 2025.
- [30] Yan Shu, Zheng Liu, Peitian Zhang, Minghao Qin, Junjie Zhou, Zhengyang Liang, Tiejun Huang, and Bo Zhao. Video-xl: Extra-long vision language model for hour-scale video understanding. In *CVPR*, 2025.
- [31] Shyamal Buch, Cristóbal Eyzaguirre, Adrien Gaidon, Jiajun Wu, Li Fei-Fei, and Juan Carlos Niebles. Revisiting the "video" in video-language understanding. In *CVPR*, 2022.
- [32] Shyamal Buch, Arsha Nagrai, Anurag Arnab, and Cordelia Schmid. Flexible frame selection for efficient video reasoning. In *CVPR*, 2025.
- [33] Sicheng Yu, Chengkai Jin, Huanyu Wang, Zhenghao Chen, Sheng Jin, Zhongrong Zuo, Xiaolei Xu, Zhenbang Sun, Bingni Zhang, Jiawei Wu, et al. Frame-voyager: Learning to query frames for video large language models. *arXiv preprint arXiv:2410.03226*, 2024.
- [34] Kai Hu, Feng Gao, Xiaohan Nie, Peng Zhou, Son Tran, Tal Neiman, Lingyun Wang, Mubarak Shah, Raffay Hamid, Bing Yin, et al. M-llm based video frame selection for efficient video understanding. In *CVPR*, 2025.
- [35] Ziqiang Xu, Qi Dai, Tian Xie, Yifan Yang, Kai Qiu, DongDong Chen, Zuxuan Wu, and Chong Luo. Viarl: Adaptive temporal grounding via visual iterated amplification reinforcement learning. *arXiv preprint arXiv:2505.15447*, 2025.
- [36] Hosu Lee, Junho Kim, Hyunjun Kim, and Yong Man Ro. Refocus: Reinforcement-guided frame optimization for contextual understanding. *arXiv preprint arXiv:2506.01274*, 2025.

- [37] Shoubin Yu, Jaemin Cho, Prateek Yadav, and Mohit Bansal. Self-chained image-language model for video localization and question answering. *NeurIPS*, 2023.
- [38] Shusheng Yang, Jihan Yang, Pinzhi Huang, Ellis L Brown II, Zihao Yang, Yue Yu, Shengbang Tong, Zihan Zheng, Yifan Xu, Muhan Wang, et al. Cambrian-s: Towards spatial supersensing in video. In *The Fourteenth International Conference on Learning Representations*, 2025.
- [39] Linli Yao, Haoning Wu, Kun Ouyang, Yuanxing Zhang, Caiming Xiong, Bei Chen, Xu Sun, and Junnan Li. Generative frame sampler for long video understanding. In *Findings of the Association for Computational Linguistics: ACL 2025*, 2025.
- [40] Sara Ghazanfari, Francesco Croce, Nicolas Flammarion, Prashanth Krishnamurthy, Farshad Khorrani, and Siddharth Garg. Chain-of-frames: Advancing video understanding in multimodal llms via frame-aware reasoning. *arXiv preprint arXiv:2506.00318*, 2025.
- [41] Xi Tang, Jihao Qiu, Lingxi Xie, Yunjie Tian, Jianbin Jiao, and Qixiang Ye. Adaptive keyframe sampling for long video understanding. In *CVPR*, 2025.
- [42] Guangyu Sun, Archit Singhal, Burak Uzkent, Mubarak Shah, Chen Chen, and Garin Kessler. From frames to clips: Training-free adaptive key clip selection for long-form video understanding. *arXiv preprint arXiv:2510.02262*, 2025.
- [43] Shaojie Zhang, Jiahui Yang, Jianqin Yin, Zhenbo Luo, and Jian Luan. Q-frame: Query-aware frame selection and multi-resolution adaptation for video-llms. In *ICCV*, 2025.
- [44] Hui Sun, Shiyin Lu, Huanyu Wang, Qing-Guo Chen, Zhao Xu, Weihua Luo, Kaifu Zhang, and Ming Li. Mdp3: A training-free approach for list-wise frame selection in video-llms. In *ICCV*, 2025.
- [45] Anurag Arnab, Ahmet Iscen, Mathilde Caron, Alireza Fathi, and Cordelia Schmid. Temporal chain of thought: Long-video understanding by thinking in frames. *arXiv preprint arXiv:2507.02001*, 2025.
- [46] Jian Hu, Zixu Cheng, Chenyang Si, Wei Li, and Shaogang Gong. Cos: Chain-of-shot prompting for long video understanding. *arXiv preprint arXiv:2502.06428*, 2025.
- [47] Zirui Zhu, Hailun Xu, Yang Luo, Yong Liu, Kanchan Sarkar, Zhenheng Yang, and Yang You. Focus: Efficient keyframe selection for long video understanding. *arXiv preprint arXiv:2510.27280*, 2025.
- [48] Shuming Liu, Chen Zhao, Tianqi Xu, and Bernard Ghanem. Bolt: Boost large vision-language model without training for long-form video understanding. In *CVPR*, 2025.
- [49] Xian Zhang, Zexi Wu, Zinuo Li, Hongming Xu, Luqi Gong, Farid Boussaid, Naoufel Werghi, and Mohammed Bennamoun. Adard-key: Adaptive relevance-diversity keyframe sampling for long-form video understanding. *arXiv preprint arXiv:2510.02778*, 2025.
- [50] Pengyi Li, Irina Abdullaeva, Alexander Gambashidze, Andrey Kuznetsov, and Ivan Oseledets. Maxinfo: A training-free key-frame selection method using maximum volume for enhanced video understanding. In *WACV*, 2026.
- [51] Wilson Yan, Volodymyr Mnih, Aleksandra Faust, Matei Zaharia, Pieter Abbeel, and Hao Liu. Elastictok: Adaptive tokenization for image and video. *arXiv preprint arXiv:2410.08368*, 2024.
- [52] Tianwei Xiong, Jun Hao Liew, Zilong Huang, Zhijie Lin, Jiashi Feng, and Xihui Liu. Evatok: Adaptive length video tokenization for efficient visual autoregressive generation. *arXiv preprint arXiv:2603.12267*, 2026.
- [53] Yan Li, Changyao Tian, Renqiu Xia, Ning Liao, Weiwei Guo, Junchi Yan, Hongsheng Li, Jifeng Dai, Hao Li, and Xue Yang. Learning adaptive and temporally causal video tokenization in a 1d latent space, 2025.
- [54] Haotian Ye, Qiyuan He, Jiaqi Han, Puheng Li, Jiaojiao Fan, Zekun Hao, Fitsum Reda, Yogesh Balaji, Huayu Chen, Sheng Liu, et al. Infotok: Adaptive discrete video tokenizer via information-theoretic compression. *arXiv preprint arXiv:2512.16975*, 2025.

- [55] Daniel Bolya, Cheng-Yang Fu, Xiaoliang Dai, Peizhao Zhang, Christoph Feichtenhofer, and Judy Hoffman. Token merging: Your vit but faster. *arXiv preprint arXiv:2210.09461*, 2022.
- [56] Xiaohu Huang, Hao Zhou, and Kai Han. Prunevid: Visual token pruning for efficient video large language models. In *Findings of the Association for Computational Linguistics: ACL 2025*, 2025.
- [57] Lei Wang, Xiuyuan Yuan, Tom Gedeon, and Liang Zheng. Taylor videos for action recognition. *arXiv preprint arXiv:2402.03019*, 2024.
- [58] Siyi Chen, Minkyu Choi, Zesen Zhao, Kuan Han, Qing Qu, and Zhongming Liu. Unfolding videos dynamics via taylor expansion. *arXiv preprint arXiv:2409.02371*, 2024.
- [59] Jiacheng Liu, Chang Zou, Yuanhuiyi Lyu, Junjie Chen, and Linfeng Zhang. From reusing to forecasting: Accelerating diffusion models with taylorseers. In *ICCV*, 2025.
- [60] Hanshuai Cui, Zhiqing Tang, Zhi Yao, Fanshuai Meng, Weijia Jia, and Wei Zhao. Not all frames deserve full computation: Accelerating autoregressive video generation via selective computation and predictive extrapolation. *arXiv preprint arXiv:2604.02979*, 2026.
- [61] Randall J LeVeque. *Finite difference methods for ordinary and partial differential equations: steady-state and time-dependent problems*. SIAM, 2007.
- [62] Approximate taylor methods for odes. *Computers & Fluids*, 159:156–166, 2017.
- [63] Saber Pourheydari, Emad Bahrami, Mohsen Fayyaz, Gianpiero Francesca, Mehdi Noroozi, and Juergen Gall. Taylorswiftnet: Taylor driven temporal modeling for swift future frame prediction. *arXiv preprint arXiv:2110.14392*, 2021.
- [64] Thomas M. Cover and Joy A. Thomas. *Elements of Information Theory*. Wiley-Interscience, Hoboken, NJ, 2nd edition, 2006.
- [65] Christopher M. Bishop. *Pattern Recognition and Machine Learning*. Springer, New York, 2006.
- [66] Boqiang Zhang, Kehan Li, Zesen Cheng, Zhiqiang Hu, Yuqian Yuan, Guanzheng Chen, Sicong Leng, Yuming Jiang, Hang Zhang, Xin Li, et al. Videollama 3: Frontier multimodal foundation models for image and video understanding. *arXiv preprint arXiv:2501.13106*, 2025.
- [67] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- [68] Jinguo Zhu, Weiyun Wang, Zhe Chen, Zhaoyang Liu, Shenglong Ye, Lixin Gu, Hao Tian, Yuchen Duan, Weijie Su, Jie Shao, et al. Internvl3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv preprint arXiv:2504.10479*, 2025.
- [69] Leqi Shen, Guoqiang Gong, Tao He, Yifeng Zhang, Pengzhang Liu, Sicheng Zhao, and Guiguang Ding. Fastvid: Dynamic density pruning for fast video large language models. *arXiv preprint arXiv:2503.11187*, 2025.
- [70] Chaoyou Fu, Yuhang Dai, Yongdong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. In *CVPR*, 2025.
- [71] Junjie Zhou, Yan Shu, Bo Zhao, Boya Wu, Zhengyang Liang, Shitao Xiao, Minghao Qin, Xi Yang, Yongping Xiong, Bo Zhang, et al. Mlvu: Benchmarking multi-task long video understanding. In *CVPR*, 2025.
- [72] Haoning Wu, Dongxu Li, Bei Chen, and Junnan Li. Longvideobench: A benchmark for long-context interleaved video-language understanding. *NeurIPS*, 2024.

- [73] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, 2021.
- [74] Yuanxin Liu, Shicheng Li, Yi Liu, Yuxiang Wang, Shuhuai Ren, Lei Li, Sishuo Chen, Xu Sun, and Lu Hou. Tempcompass: Do video llms really understand videos? In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 8731–8772, 2024.
- [75] Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.