

HINT: Human-Intent Inception for Long-Horizon Robot Manipulation

Mingyu Mei¹, Haojie Xu¹, Shihao Jin¹, Zibo Dai¹, Qihao Cheng¹, Zhengrui Lv¹,
Hongjie Fang², Shirun Tang³, Guang Chen^{1,4}, Xinyue Zhao¹, Huiliang Shen¹, Zaixing He^{1,†}
¹Zhejiang University ²Shanghai Jiao Tong University ³Noematrix ⁴EndlessAI

[†]Corresponding author

mingyumei@zju.edu.cn, zaixinghe@zju.edu.cn

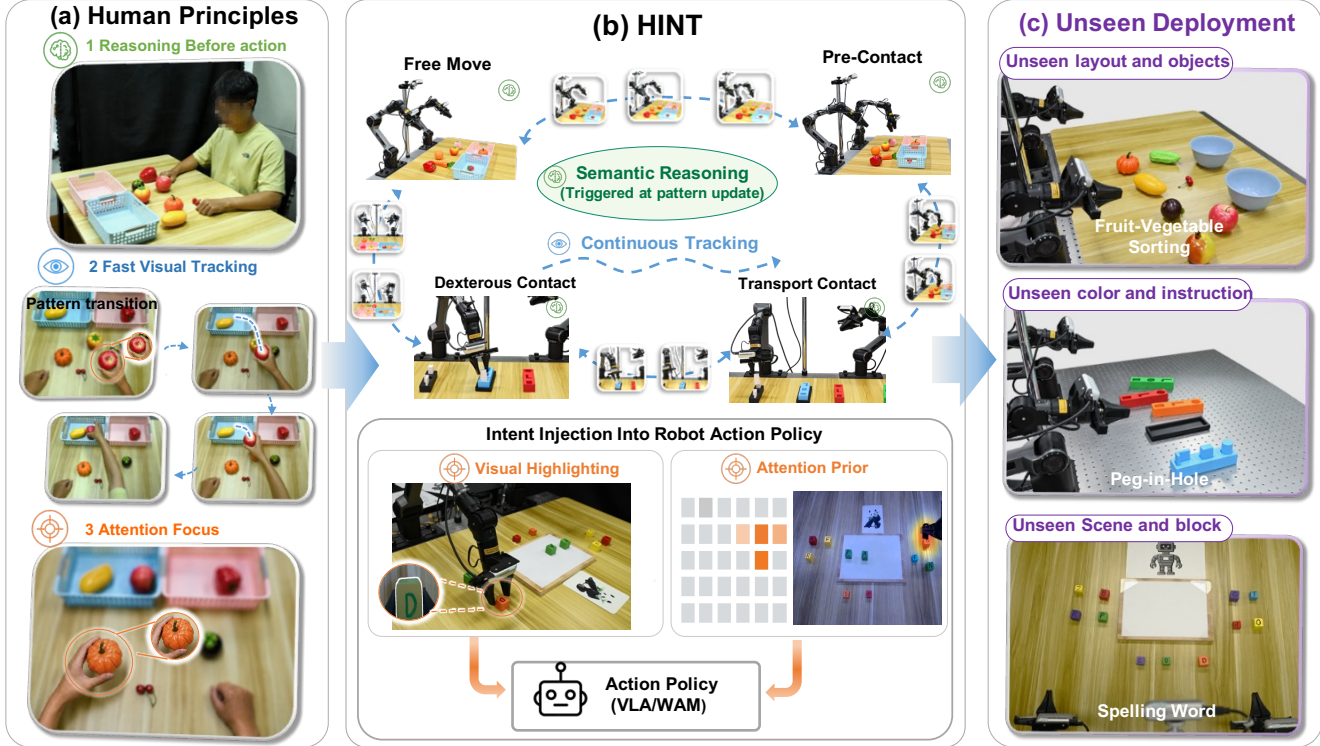


Fig. 1. Motivation and overview of **HINT** (Human-INTent INception). (a) Human manipulation strategies that inspire HINT: humans identify the intended target before acting, track it throughout motion, and maintain target-focused attention during interaction. (b) HINT translates these strategies into semantic reasoning at manipulation-pattern transitions, continuous target tracking between transitions, and spatial-intent injection into the action policy via visual highlighting and an attention prior. (c) HINT is evaluated under unseen semantic-compositional variations in objects, layouts, colors, and instructions.

Abstract—Humans can perform complex manipulations given a simple intent through an overall instruction, while continuously adapting to evolving visual observations. However, current vision-language action (VLA) models and other action policies struggle to realize this high-level intelligent behavior under dense, evolving visual inputs and sparse language guidance. Visual correlations can then dominate semantic intent, leading actions to follow visual shortcuts rather than human goals. We present HINT (Human-INTent INception), an agentic framework inspired by the human manipulation principles: semantic intent changes sparsely at manipulation-pattern transitions, whereas continuous control primarily depends on the evolving object-hand relationship. HINT invokes semantic reasoning only at pattern transitions to resolve the current subtask and target, then maintains this commitment through multi-view grounding and visual tracking. We explore two visual interfaces-image-space semantic highlighting and attention-prior injection-to communicate the tracked intent to the action policy without introducing additional trainable

parameters into the foundation action model. Experiments across three long-horizon tasks and out-of-distribution variants show that HINT substantially improves intent understanding, task progress, and end-to-end success across two foundation policies while preserving low-latency control. Project website: <https://robot-hint.github.io/>.

I. INTRODUCTION

A simple little thought that changes everything...

Christopher Nolan, *Inception*

Recent advances in imitation learning [1]–[4], Vision-Language-Action (VLA) models [5]–[7], and World Action Models [8], [9] have substantially improved generalization and closed-loop control in robotic manipulation. Combined with DAgger and reinforcement learning [10]–[12], these models achieve strong performance within constrained task distributions. However, end-to-end foundation models face

an inherent tension between semantic understanding and action control: adapting representations to robot dynamics will weaken pretrained semantic capabilities, while static language instructions and evolving visual observations encourage visual shortcuts and intent drift. This limitation is amplified in long-horizon manipulation, thereby introducing a fundamental challenge: how to seamlessly couple sparse semantic reasoning with continuous visuomotor feedback to enable robust execution without incurring prohibitive inference latency.

Prior work has integrated semantic reasoning into VLA models from several complementary perspectives. Some methods enhance action-relevant perception through additional VLM reasoning or selectively alternate between reasoning and acting to reduce inference cost [13], [14]. Others inject spatial guidance through masks, points, boxes, or trajectories [15]–[18], or adapt visual observations to improve task-relevant visibility [19], [20]. However, these methods remain limited in supporting continuous semantic understanding over long-horizon tasks. Consequently, action policies learn semantic variations from demonstrations rather than reason through a general semantic capability, leading to high data demands and limited generalization to unseen task compositions.

Human manipulation is not uniformly semantic over time. High-level goals remain stable, whereas low-level movements are continuously corrected through sensorimotor feedback [21]–[23]. Visual attention is likewise directed toward objects relevant to the current or upcoming action [24], [25]. As illustrated in Fig. 1(a), humans identify the intended target before acting, track how the hand and objects move within a manipulation pattern, and maintain attention on the target-hand interaction. These observations suggest a simple temporal principle: semantic reasoning is mainly needed when the manipulation pattern changes; within a pattern, execution primarily requires maintaining where the target is relative to the hand. Human intent therefore changes sparsely, but its visual realization must remain continuous.

Motivated by this principle, we propose **HINT (Human-INTent INcepTion)**, an agentic framework that turns sparse language intent into continuous, target-specific visual guidance. HINT closes the semantic control loop in three steps. First, *Pattern-Aware Perception Scheduling* detects the current manipulation pattern, selects the informative camera views, and determines when semantic reasoning is required. Second, *The Semantic Commitment and Visual Tracking* resolves the current subtask and target at pattern transitions, then continuously tracks that target until the next transition. Third, *View-Routed Semantic Intent Injection* communicates the tracked target to the action policy through image-level visual highlighting and token-level attention bias. This decomposition separates *what* to act on from *how* to act: HINT maintains human intent, while the pretrained action policy retains responsibility for motor execution. The complete system is summarized in Fig. 2. Our contributions are threefold:

- **We propose HINT, a framework that translates high-level intent into long-horizon robot manipulation**

by converting sparse language instructions into dense, continuous semantic visual cues across multiple views.

- **We introduce pattern-aware semantic perception scheduling**, which uses manipulation-pattern transitions to trigger semantic reasoning and multi-view routing. By coupling sparse intent updates with continuous visuomotor control, this mechanism invokes semantic perception only at task-relevant transitions, reducing latency while maintaining responsive execution.
- **We introduce a parameter-free semantic interface** that continuously communicates semantic intent to foundation action policies through complementary image-level highlighting and attention-level guidance, without adding trainable parameters to the action backbone.

Across three tasks and both ID and semantic-compositional OOD settings, HINT consistently improves two foundation action policies while retaining low-latency control. Averaged over the six task–setting pairs, it increases Intention Score (IS), Subtask Success Rate (Sub. SR), and Full-Task Success Rate (Full SR) by **32.9/29.0/18.6** percentage points on Wall-OSS-0.5 [26], respectively and by **50.2/41.1/41.4** points on $\pi_{0.5}$ [7].

II. RELATED WORK

A. Long-Horizon Manipulation and Interaction Patterns

Long-horizon manipulation combines high-level task organization with reliable execution across multiple interactions. Prior work predicts semantic subtasks [7], alternates reasoning and control [14], [27], updates latent plans at low frequency [28], composes object-centric policies [15], or uses visual trajectories, affordances, and progress estimates to organize execution [17], [29]. VLABench evaluates such capabilities through multi-stage tasks requiring commonsense and implicit-intent reasoning [30]. These approaches largely decide which subtask, skill, or policy should execute next, while perception often remains unchanged within a subtask.

Long-VLA and BFA both rely on predefined manipulation phases to adaptively prioritize global and wrist-view information [19], [31]. See Selectively, Act Adaptively similarly exploits interaction structure to route wrist observations and action experts for bimanual manipulation [32], whereas other stage-aware methods regulate progress estimation, reactive transitions, or force control [33]–[35].

For long-horizon manipulation, prior methods often rely on task-specific subtasks or predefined stages, limiting reuse across interaction structures. In contrast, HINT uses a shared four-pattern vocabulary that is independent of task identity and jointly determines when semantic reasoning is invoked and which views or sensors should be prioritized. In our experiments, a single Pattern Router is trained jointly on all three task datasets, providing a unified schedule for reasoning and perception throughout execution.

B. Reasoning for Robotic Manipulation

Generalist vision-language-action (VLA) policies inherit broad semantic priors from vision-language pretraining, en-

abling multi-task robot control [5]–[7], [36]–[38]. Long-horizon manipulation, however, exposes a structural mismatch: language specifies abstract intent, whereas control requires that intent to remain spatially grounded as the scene evolves. Existing methods bridge this gap through intermediate representations, ranging from language subtasks, grounded plans, and motion primitives to visual traces, hierarchical spatial decisions, and latent visual plans [28], [38]–[44]. These representations improve semantic-action alignment, but richer reasoning paths can substantially increase inference cost, as illustrated by multi-expert architectures such as UAM [13].

To reduce reasoning overhead, OneTwoVLA adaptively switches between action and reasoning modes, reasoning only upon errors or subtask completion [14]. Other existing work uses execution memory and visual foresight [45], [46], or compact latent reasoning [47]–[51]. Feedback-aware systems additionally revise plans based on execution outcomes, motion feasibility, or failures [52], [53].

HINT builds on this insight: semantic intent changes sparsely, whereas its visual realization changes continuously. Manipulation-pattern transitions determine when to jointly resolve the current subtask and localize its target from the routed views; tracking then maintains the commitment through continuous scene evolution. HINT therefore preserves persistent intent without repeatedly reinterpreting language, aligning semantic reasoning with execution dynamics while reducing redundant inference and latency.

C. Visual Grounding for Manipulation

Implicit grounding improves task-relevant visual representations without altering policy observations. ReconVLA reconstructs manipulation-relevant gaze regions as an auxiliary objective [54]. Other representative approaches enhance perception through 3D alignment, affordance modeling, hierarchical grounding, and history-conditioned attention [38], [43], [44], [55]–[58]. These methods strengthen visual features, but typically retain a fixed perception throughout execution.

Explicit grounding, by contrast, communicates semantic intent directly through the visual input. VP-VLA overlays planner-generated points and boxes on policy observations [16], while LiLo-VLA suppresses irrelevant content through object-centric masks [15]. Other methods provide visual trajectories [17], jointly predict actions and future masks [59], or ground manipulation through keypoints, candidate renderings, motion traces, and projected end-effector cues [60]–[63]. Pixel-level prompts [18], active viewpoint selection [20], and reasoning-derived visual aids [64]–[66] provide further forms of spatial guidance.

In contrast, HINT does not learn an additional grounding pathway; it makes the resolved intent explicit to the action policy. Highlighting externalizes the intended target, while the attention prior keeps policy focus on the object during action generation. These intent-injection interfaces introduce no additional trainable parameters into the foundation action

policy, enabling the same semantic interface to be applied across different policy backbones.

III. METHOD

A. Which and When: Pattern-Aware Perception Scheduling

Human manipulation naturally shifts perceptual attention across interaction stages. Before contact, vision primarily guides target localization and alignment. Once contact is established, force and tactile feedback become critical for interaction and fine control. Inspired by this stage-dependent multisensory behavior, we introduce pattern-aware perception scheduling, which uses the current manipulation pattern to determine **which view or modality to prioritize**, enabling the scheduler to adaptively emphasize the most informative perception sources. The pattern further determines **when semantic perception should be updated**, providing the temporal schedule for the subsequent perception module.

Manipulation Pattern. We categorize general manipulation behaviors into four manipulation patterns: free move, pre-contact, transport contact, and dexterous contact. The four manipulation patterns define a shared, task-agnostic interface for perception control and cover both pick-and-place and contact-rich manipulation in our evaluated tasks. Each pattern induces a distinct perceptual demand, with different perception sources emphasized accordingly:

- **Free move:** The robot moves in free space to approach the target. The **global view** captures scene-level context for coarse target localization and motion planning.
- **Pre-contact:** The robot approaches the target and prepares to grasp or contact. The **wrist views** offer local geometric cues for precise alignment.
- **Transport contact:** The robot maintains contact with the object and transports it toward a target region. The **global view** provides spatial information about the robot, manipulated object, and goal region.
- **Dexterous contact:** The robot performs contact-rich manipulation through sustained interaction. **Wrist views** provide local visual cues, while **force/tactile** feedback captures contact dynamics for fine control.

Pattern Router. To infer the manipulation pattern online, we introduce the **Pattern Router** (Fig. 3), a lightweight multimodal network conditioned on multi-view visual observations $\mathcal{I}_t = \{I_t^g, I_t^l, I_t^r\}$, proprioceptive state s_t^p , and joint torques τ_t . The multi-view images are encoded by a shared ResNet-18 backbone [67] with view-specific adapters, while the temporal dynamics of proprioception and torques are modeled by separate GRU branches [68]. A gated fusion mechanism adaptively reweights and integrates these features, and the resulting representation is decoded to jointly predict the manipulation pattern $\hat{P}_t$ and the normalized within-pattern progress $\hat{\phi}_t \in [0, 1]$.

Crucially, the inferred pattern $\hat{P}_t$ and pattern progress $\hat{\phi}_t \in [0, 1]$ determine the prioritized camera view $\mathcal{V}_k \subseteq \{v^g, v^l, v^r\}$ and pattern transition t_k for downstream perception. The network is jointly optimized via:

$$\mathcal{L}_{\text{router}} = \mathcal{L}_{\text{CE}}(P_t, \hat{P}_t) + 0.5 * \text{MSE}(\phi_t, \hat{\phi}_t), \quad (1)$$

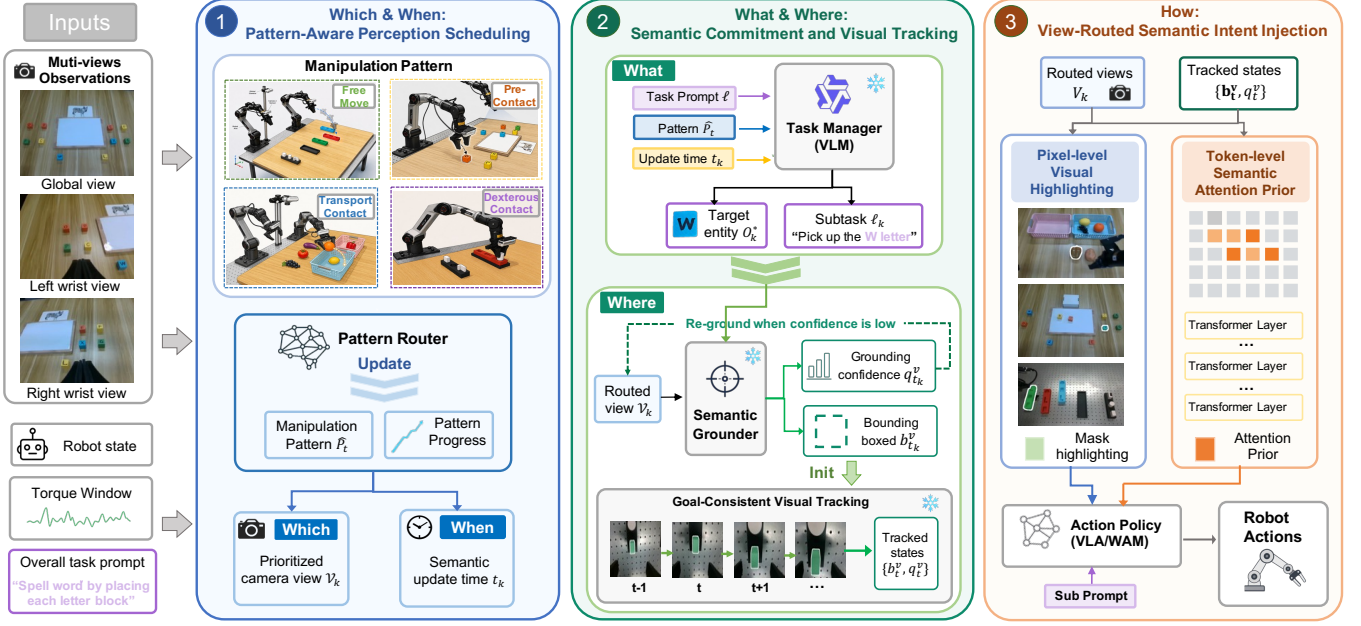


Fig. 2. System overview of HINT. HINT consists of three parts: (1) The pattern router estimates the current manipulation pattern and its progress to select the prioritized camera views V_k and the semantic update time t_k . (2) At an update, the task manager resolves the active subtask and target entity, the semantic grounder localizes the target in the routed views, and goal-consistent tracking maintains the target state between updates; (3) The intent is injected into the action policy through pixel-level highlighting and a token-level semantic attention bias to generate robot actions.

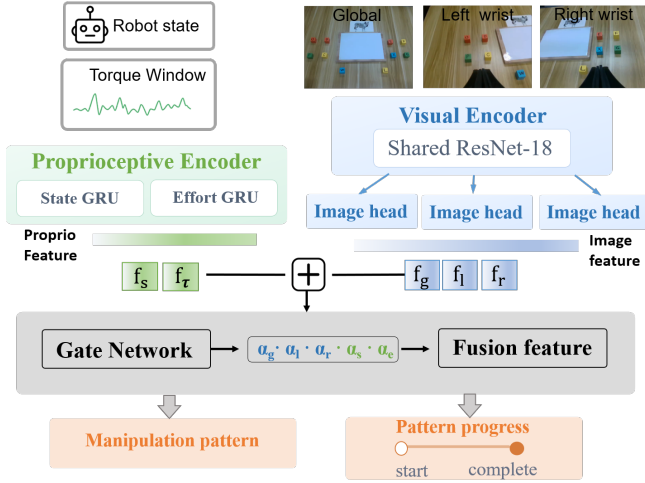


Fig. 3. Architecture of the manipulation-pattern router.

where P_t, ϕ_t denote the ground-truth manipulation patterns and progress, respectively. We train the Pattern Router jointly on the pattern annotations from all three evaluated tasks.

B. What and Where: Semantic Commitment and Visual Tracking

High-level semantic intent changes sparsely, whereas low-level visual attention evolves continuously during manipulation. Humans first determine **what** to act on by identifying the task-relevant target and its intended role; once this semantic commitment is established, perception primarily tracks **where** the target is relative to the hand and surrounding scene. Following this perception process, we

decompose semantic perception into two perception modes: **Pattern-Triggered Semantic Reasoning**, which establishes or updates the semantic commitment when the manipulation context changes, and **Goal-Consistent Visual Tracking**, which continuously maintains the spatial realization of the committed target during execution. This design preserves goal-relevant visual attention with minimal overhead, avoiding redundant reasoning at each inference step.

a) **Pattern-Triggered Semantic Reasoning**: Pattern-Triggered Semantic Reasoning uses the *Task Manager* to resolve the current semantic target from the high-level task instruction. The resulting *semantic commitment* is then localized in the routed camera views by the Semantic Grounder.

Task Manager. Let $\mathcal{T}$ denote the Task Manager and ℓ denote the overall task instruction provided by the human, such as “Classify fruits and vegetables into the blue and red baskets, respectively.” At reset, the Task Manager first interprets the overall instruction and scene to establish an ordered subtask plan, which specifies the intended execution sequence. Thereafter, at each pattern transition t_k , the VLM-based Task Manager (Qwen3-VL [69]) updates the active subtask according to this plan and the current execution context, generating a pattern-conditioned instruction ℓ_k (e.g., “pick up the apple”) together with an active target entity o_k^* (e.g., “orange, carrot, or blue basket”), which collectively define the current subtask and identify the physical elements relevant to its execution. This output is formulated as:

$$(\ell_k, o_k^*) = \mathcal{T}(\ell, \hat{P}_{t_k}, \mathcal{C}_k). \quad (2)$$

The generation is conditioned on the overall instruction ℓ , manipulation pattern $\hat{P}_{t_k}$, and execution context $\mathcal{C}_k$. The

execution context $\mathcal{C}_k$ is initialized from the reset-time subtask plan and subsequently updated with completed subtasks and the active subtask index. It therefore provides the Task Manager with the accumulated task progress for resolving the next subtask and target entity. The resulting ℓ_k and o_k^* specify **what** to execute and **what** to interact with, providing the Semantic Grounder with an unambiguous query for determining **where** the target appears in visual space.

Semantic Grounder. Given the resolved subtask ℓ_k and target entity o_k^* , the Semantic Grounder $\mathcal{G}$ determines its image-space location in each routed camera view. For $v \in \mathcal{V}_k$, the model predicts:

$$(\mathbf{b}_{t_k}^v, q_{t_k}^v) = \mathcal{G}(I_{t_k}^v, \ell_k, o_k^*), \quad v \in \mathcal{V}_k, \quad (3)$$

where $\mathbf{b}_{t_k}^v = [x_{\min}, y_{\min}, x_{\max}, y_{\max}]^\top$ is the bounding box of o_k^* in view v , and $q_{t_k}^v \in [0, 1]$ denotes its grounding confidence. Specifically, $\mathcal{G}$ leverages visual-language reasoning and open-vocabulary detection to robustly localize o_k^* , effectively disambiguating it from semantic distractors in cluttered scenes.

Equation (3) determines **where** the Task Manager-specified entity resides in the routed visual space. Within each manipulation pattern, the semantic commitment (ℓ_t, o_t^*) is maintained as (ℓ_k, o_k^*) for $t_k \leq t < t_{k+1}$, until the next pattern transition at t_{k+1} . The corresponding bounding boxes $\mathbf{b}_{t_k}^v$ provide the initial target localization for the subsequent visual tracking.

b) Goal-Consistent Visual Tracking: Once the semantic commitment (ℓ_k, o_k^*) is established, visual tracking maintains its spatial realization as the target location changes with robot motion, object displacement, and occlusion. Rather than repeatedly invoking semantic reasoning, the tracker propagates the grounded target over time, while low-confidence predictions trigger re-grounding to preserve alignment with the committed goal.

Specifically, we initialize the visual tracker SAM2 [70] using the grounding result $\mathbf{b}_{t_k}^v$. During execution, each tracker updates the target state as

$$(\mathbf{b}_t^v, q_t^v) = \mathcal{F}_v(I_t^v, \mathbf{b}_{t-1}^v), \quad v \in \mathcal{V}_k, \quad (4)$$

where q_t^v denotes the tracking confidence. When q_t^v falls below a predefined threshold, the Semantic Grounder is re-invoked with the same committed target o_k^* to re-establish its location and reinitialize the tracker. This enables each routed view to continuously follow the intended entity while correcting tracking drift without altering its semantic identity.

C. How: View-Routed Semantic Intent Injection

We introduce View-Routed Semantic Intent Injection, a visual interface for communicating task-level semantic intent to the action policy without adding trainable parameters to the foundation action model. The key principle is to decouple semantic reasoning from action generation: the high-level perception module determines what is behaviorally relevant and where it appears, while the action policy retains responsibility for deciding how to act.

Within a manipulation pattern $t_k \leq t < t_{k+1}$, the routed views $\mathcal{V}_k$, semantic commitment (ℓ_k, o_k^*) , and tracked states $\{\mathbf{b}_t^v, q_t^v\}_{v \in \mathcal{V}_k}$ define a view-conditioned spatial prior. We realize this principle through two complementary interfaces: pixel-level **Visual Semantic Highlighting** and token-level **Semantic Attention Bias**.

a) Pixel-level Visual Semantic Highlighting: Although Eq. (4) represents the tracked state by $\mathbf{b}_t^v$, SAM2 internally produces a dense mask $\mathbf{S}_t^v \in \{0, 1\}^{H_v \times W_v}$ for the committed target o_k^* , whose tight enclosing box is $\mathbf{b}_t^v$. We retain this object geometry and highlight the mask only in routed views:

$$\tilde{I}_t^v = \begin{cases} (1 - \lambda \mathbf{S}_t^v) \odot I_t^v + \lambda \mathbf{S}_t^v \odot \mathbf{c}, & v \in \mathcal{V}_k, \\ I_t^v, & v \notin \mathcal{V}_k, \end{cases} \quad (5)$$

where $\mathbf{c}$ is the rendering color and $\lambda = 0.32$ the opacity; a thin contour delineates the target boundary. This translucent cue increases salience without obscuring target appearance or scene context. For the pixel-level interface alone, the policy operates on $\tilde{\mathcal{I}}_t = \{\tilde{I}_t^g, \tilde{I}_t^l, \tilde{I}_t^r\}$:

$$\mathbf{a}_t = \pi_\theta(\tilde{\mathcal{I}}_t, \mathbf{s}_t^p, \ell_k). \quad (6)$$

Beyond indicating *where* to act, the shared overlay partially normalizes target appearance cues such as color into a consistent visual signature, providing the action policy with a target-centric feature that is easier to learn while preserving the underlying object appearance. Because this representation is realized entirely through image-space modification, semantic highlighting remains architecture-agnostic and requires no access to the policy internals.

b) View-Routed Token-Level Attention Prior: For the attention-based interface, we keep the input images unchanged and convert the tracked target mask into a patch-level prior aligned with the policy’s visual tokens. Let $\tilde{\mathbf{S}}_t^v = \mathcal{R}_v(\mathbf{S}_t^v) \in [0, 1]^{H_\pi \times W_\pi}$ denote the mask in view v resized to the policy input resolution. For visual patch j with image-space support $\Omega_{v,j}$, its target relevance is

$$w_{t,j}^v = \begin{cases} \frac{1}{|\Omega_{v,j}|} \sum_{(x,y) \in \Omega_{v,j}} \tilde{\mathbf{S}}_t^v(x,y), & v \in \mathcal{V}_k, q_t^v \geq \tau_{\text{trk}}, \\ 0, & \text{otherwise,} \end{cases} \quad (7)$$

where τ_{trk} is the tracking-confidence threshold used for semantic re-grounding.

The resulting prior $\mathbf{w}_t^v = [w_{t,1}^v, \dots, w_{t,N_v}^v]^\top$ preserves target geometry through fractional patch coverage while assigning zero relevance to non-routed views. With a 224×224 input and 14×14 -pixel patch size, each view yields a 16×16 grid ($N_v = 256$). We inject this spatial prior at **two complementary levels**: visual self-attention to shape target-aware representations, and action-to-vision attention to direct action queries toward target-relevant evidence.

Visual Encoder Injection. Let $\mathcal{L}_{\text{vis}} \subseteq \{1, \dots, D_{\text{vis}}\}$ denote the selected injection layers, with

$$g_r^{\text{vis}} = \mathbf{1}[r \in \mathcal{L}_{\text{vis}}]. \quad (8)$$

Rather than treating Transformer depth uniformly, we concentrate injection in the intermediate layers and retain only sparse injections elsewhere. This reflects the hierarchical role of depth: early layers preserve local visual evidence, intermediate layers increasingly integrate task-relevant semantics, while excessive intervention across all layers can unnecessarily disturb the pretrained representation hierarchy [71]–[73].

For visual layer r , attention head h , query patch i , and key patch j , the original pre-softmax attention logit is

$$Z_{r,h}^{\text{vis},v}(i,j) = \frac{\mathbf{Q}_{r,h}^{\text{vis},v}(i)\mathbf{K}_{r,h}^{\text{vis},v}(j)^\top}{\sqrt{d_h^{\text{vis}}}} + \mathcal{M}_r^{\text{vis},v}(i,j). \quad (9)$$

We add the spatial prior along the key dimension:

$$\begin{aligned} B_r^{\text{vis},v}(i,j) &= g_r^{\text{vis}} w_{t,j}^v, \\ \tilde{A}_{r,h}^{\text{vis},v}(i,:) &= \text{softmax}\left(Z_{r,h}^{\text{vis},v}(i,:) + B_r^{\text{vis},v}(i,:)\right). \end{aligned} \quad (10)$$

The head-shared bias encourages the model to focus more on target-related patches while retaining information from the surrounding scene.

Action Decoder Injection. The view-specific priors are aligned with the policy transformer’s complete key sequence:

$$\mathbf{w}_t = \text{Concat}\left(\mathbf{w}_t^{v^g}, \mathbf{w}_t^{v^l}, \mathbf{w}_t^{v^r}, \mathbf{0}_{N_{\text{nv}}}\right) \in [0,1]^{N_K}, \quad (11)$$

where non-visual positions and visual tokens from non-routed views receive zero bias.

For policy-transformer layer m and attention head h , let

$$Z_{m,h}(i,j) = \frac{\mathbf{Q}_{m,h}(i)\mathbf{K}_{m,h}(j)^\top}{\sqrt{d_h}} + \mathcal{M}_m(i,j) \quad (12)$$

denote the original pre-softmax attention logit. Let $\mathcal{Q}_{\text{act}}$ denote action-query positions and $\mathcal{L}_{\text{inj}}$ the selected injection layers, following the same middle-concentrated, sparse-outside schedule. With $g_m = \mathbf{1}[m \in \mathcal{L}_{\text{inj}}]$, we define

$$B_m(i,j) = \begin{cases} g_m w_{t,j}, & i \in \mathcal{Q}_{\text{act}}, \\ 0, & \text{otherwise}, \end{cases} \quad (13)$$

$$\tilde{A}_{m,h}(i,:) = \text{softmax}(Z_{m,h}(i,:) + B_m(i,:)).$$

Because $\mathbf{w}_t$ is nonzero only on target-relevant visual keys, the intervention selectively strengthens action-to-target attention while preserving the policy’s original visual-language interactions. Combining both intent-injection interfaces, the complete HINT policy is

$$\mathbf{a}_t = \pi_\theta\left(\tilde{\mathcal{L}}_t, \mathbf{s}_t^p, \ell_k; \{\mathbf{B}_r^{\text{vis},v}\}_{r,v}, \{\mathbf{B}_m\}_m\right). \quad (14)$$

IV. EXPERIMENTS

We organize the evaluation around four questions while retaining a conventional setup-results-ablation structure: **(Q1)** Can **HINT** effectively convey task semantics while preserving accurate action control? **(Q2)** Does **HINT** improve semantic-compositional generalization under out-of-distribution conditions while the required motor primitives remain familiar? **(Q3)** Can a shared manipulation-pattern

representation support subtask switching and reliable on-line routing across the evaluated tasks? **(Q4)** Does pattern-triggered multi-view reasoning improve efficiency without sacrificing task performance?

A. Setup

Platform. The robotic platform consists of two AgileX PiPER arms configured as a dual-arm manipulation system. Three Intel RealSense D435 RGB-D cameras provide one global view of the workspace and two wrist-mounted views attached to the left and right arms, respectively.

Tasks. As shown in Fig. 4, we evaluate three language-conditioned tasks: *fruit-vegetable sorting*, *word spelling*, and *peg-in-hole insertion*. Each task requires the robot to interpret a high-level instruction, resolve a sequence of task-dependent semantic targets, and execute multiple manipulation patterns. The first two tasks emphasize repeated semantic target changes and object transport, whereas peg-in-hole insertion additionally includes the *dexterous contact* pattern and thus tests contact-rich execution after semantic target selection.

Data Collection and Annotation. We collect demonstrations through arm-to-arm teleoperation at 30 Hz, recording multi-view images, robot actions, proprioceptive states, and joint torques. According to task complexity and precision requirements, we collect 50 demonstrations for fruit-vegetable sorting, 80 for word spelling, and 150 for peg-in-hole insertion.

Baselines. We evaluate HINT on two large-scale action-pretrained foundation policies, $\pi_{0.5}$ [7] and Wall-OSS-0.5 [26], to assess HINT as a plug-and-play semantic interface for strong pretrained action models. For each backbone, the base and HINT variants use the same demonstrations, optimization protocol, and action-backbone initialization, while HINT introduces no additional trainable parameters into the foundation action backbone. This backbone-matched setup isolates the contribution of the HINT from differences in training data or underlying action capability.

Representative long-horizon and grounding methods, such as OneTwoVLA [14] and VP-VLA [16], differ substantially in action-model pretraining, architecture, and training paradigm, making direct quantitative comparisons less controlled for this purpose. We therefore provide their policy rollouts and qualitative failure analysis in the Multimedia Attachment video `baseline_failure_analysis.mp4` as complementary references under our task settings. Our primary quantitative evaluation mainly addresses whether HINT can consistently improve semantic alignment and long-horizon execution when applied to the same large-scale pretrained action backbone.

Metrics. Building on VLABench [30], we report Intention Score (IS), Subtask Success Rate (Sub. SR), and Full-Task Success Rate (Full SR). IS is the proportion of correct semantic decisions $\text{IS} = n_{\text{correct}}/N$, whereas Sub. SR is the fraction of required subtasks completed successfully, $\text{Sub.SR} = m_{\text{done}}/M$. Full SR is the percentage of trials in which the entire task is completed. Because a single local failure can reduce Full SR, particularly in long-horizon and



Fig. 4. Evaluation tasks and their decomposition into manipulation patterns. Fruit-vegetable sorting (top left) and word spelling (top right) require a sequence of pick-and-place subtasks, each comprising free move, pre-contact, and transport contact. Peg-in-hole insertion (bottom) further includes dexterous contact for contact-rich placement and insertion. S_i denotes the i th semantic subtask; colored outlines and timelines indicate the manipulation pattern active during each execution segment.

TABLE I

PERFORMANCE ON THE THREE IN-DISTRIBUTION LONG-HORIZON MANIPULATION TASKS. IS IS THE PERCENTAGE OF CORRECT SEMANTIC DECISIONS AND TARGET SELECTIONS; SUB. SR IS THE PERCENTAGE OF REQUIRED SUBTASKS COMPLETED; AND FULL SR IS THE PERCENTAGE OF TRIALS IN WHICH THE COMPLETE TASK IS SUCCESSFUL.

Method	Fruit-Vegetable Sorting			Word Spelling			Peg-in-Hole Insertion		
	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$
Wall-OSS-0.5 [26]	53.1%	53.1%	0.0%	44.7%	36.2%	13.3%	65.0%	25.0%	5.0%
$\pi_{0.5}$ [7]	52.2%	52.2%	10.0%	44.7%	42.6%	13.3%	35.0%	27.5%	5.0%
Wall-OSS-0.5 + HINT	85.8%	85.8%	40.0%	83.0%	80.9%	40.0%	86.7 %	47.5 %	10.0%
$\pi_{0.5}$ + HINT	91.2%	91.2%	60.0%	97.9%	95.7%	86.7%	100.0%	67.5%	40.0%

contact-rich tasks, we interpret it together with the IS and Sub. SR metrics.

Evaluation Protocol. All experiments are conducted on a workstation with two NVIDIA RTX 3090 GPUs under identical workspace configurations and predefined randomized test settings. We conduct 20 trials for fruit-vegetable sorting and peg-in-hole insertion and 15 trials for word spelling. Each out-of-distribution (OOD) variant and ablation is evaluated over 10 trials. Full SR is a deliberately strict end-to-end metric: a trial is counted as successful only if every required subtask is completed without failure. For word spelling and peg-in-hole insertion, we assign task-specific partial credit of 0.5; exact criteria are given in the supplement.

B. Results

HINT turns high-level instruction into executable intent (Q1). Table I reveals a fundamental mismatch between the semantic capacity of foundation policies and their operationalization in long-horizon manipulation. Whether given high-level instructions or fine-grained subtask prompts,

baselines struggle to determine *what* to manipulate. For example, in word spelling, they often rely on incidental visual correlations like block color rather than instructed letter identities. Similarly, target selection in peg-in-hole insertion remains inconsistent. Pretrained VLMs provide broad semantic priors, but adapting their representations to robot dynamics can weaken the structure that supports semantic generalization. This indicates an interface bottleneck rather than a lack of manipulation primitives: **preserving both pretrained semantics and effective control within a single policy is difficult.**

HINT addresses this bottleneck by making semantic target information spatially explicit to the action policy without introducing additional trainable parameters into the foundation action model. It improves the Intention Score (IS), raising it for Wall-OSS-0.5 and $\pi_{0.5}$ by up to 34.9 and 45.9 percentage points in sorting and spelling, and boosting $\pi_{0.5}$'s IS from 35.0% to 100.0% in peg-in-hole insertion. The consistent gains across policies and tasks indicate that the effect is not specific to a single action backbone. Instead, continuous semantic intent injection provides an interface

TABLE II

SEMANTIC-COMPOSITIONAL OOD EVALUATION ON THREE MANIPULATION TASKS. EACH METHOD IS EVALUATED OVER 10 TRIALS PER TASK; THE REQUIRED MOTOR PRIMITIVES REMAIN FAMILIAR WHILE OBJECTS, ATTRIBUTES, LAYOUTS, GOALS, OR INSTRUCTIONS CHANGE.

Method	Fruit-Vegetable Sorting OOD			Word Spelling OOD			Peg-in-Hole Insertion OOD		
	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$
Wall-OSS-0.5 [26]	47.8%	37.0%	0.0%	36.4%	31.8%	0.0%	50.0%	25.0%	10.0%
$\pi_{0.5}$ [7]	56.5%	52.2%	0.0%	40.9%	36.4%	0.0%	26.7%	20.0%	0.0%
Wall-OSS-0.5 + HINT	73.9%	65.2%	20.0%	81.8 %	72.7%	20.0%	83.3 %	30.0 %	10.0%
$\pi_{0.5}$ + HINT	82.6%	80.4%	30.0%	95.5%	87.5%	30.0%	90.0%	55.0%	30.0%

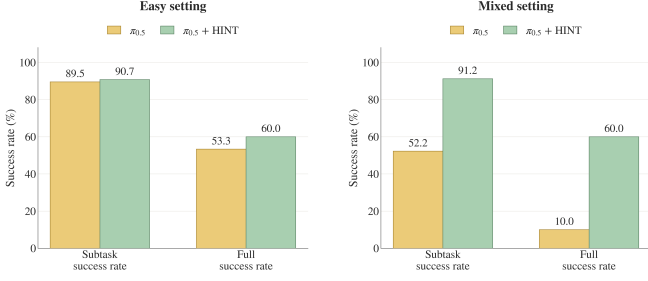


Fig. 5. Effect of visual shortcuts on fruit-vegetable sorting. In the easy setting (left), fruits always map to the blue basket and vegetables to the red basket; in the mixed setting (right), the instruction specifies a variable category-to-basket mapping.

between semantic target grounding and low-level motor execution.

The close alignment between IS and Subtask Success Rate (Sub. SR) supports this. With HINT, $\pi_{0.5}$ achieves Sub. SRs of 91.2% and 95.7% in sorting and spelling, nearly matching their IS values (91.2% and 97.9%). This correspondence indicates that once the correct semantic target is established, the policy can usually execute it without degrading its motor competence. Peg-in-hole insertion presents a different regime: HINT raises IS to 100.0%, while Sub. SR and Full SR reach 67.5% and 40.0%, respectively. The remaining gap is primarily action-side: insertion requires higher geometric precision and contact correction than the base policy can reliably provide.

The easy-mixed contrast exposes visual shortcuts in VLA policies (Q1). To distinguish language-conditioning failure from insufficient manipulation capability, we compare two sorting settings with identical scenes. The easy setting maintains a fixed category-to-color mapping while randomizing container positions, whereas the mixed setting changes this mapping according to the instruction. As shown in Fig. 5, the base $\pi_{0.5}$ achieves 89.5% Sub. SR in the easy setting, confirming that the pretrained policy already possesses strong visual matching and precise action-generation capabilities. However, its performance drops to 52.2% in the mixed setting, close to binary guessing. The policy therefore knows *where* and *how* to act, but fails to use language reliably to determine *which* target is intended. **This reveals a visual shortcut: when vision and language conflict, the visually learned correspondence dominates action generation,** consistent with the language-conditioning

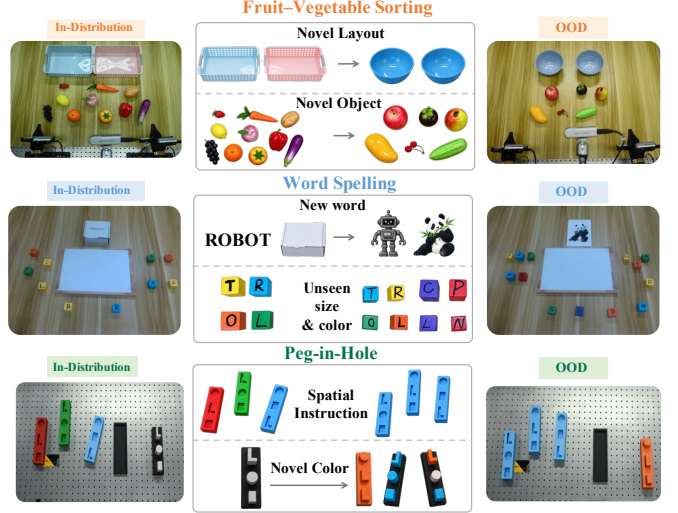


Fig. 6. Three task out-of-distribution (OOD) test configurations. We evaluate generalization across unseen objects, goal representations, visual attributes, spatial layouts, and semantic instructions.

degradation observed in prior VLA studies [74].

HINT performs similarly to the base policy in the “Easy” setting but improves Sub. SR by 38.5 percentage points in the “Mixed” setting. This selectivity is more informative than the aggregate gain: HINT adds little when vision alone determines the action, yet restores performance when intent must override a misleading visual association. Unlike approaches that address language degradation through large-scale pretraining or vision-language co-training [74], **HINT introduces an agentic intent injection framework on top of standard action-model training.** By expressing intent through the visual channel already used by the action policy, it improves intent-action alignment without adding trainable modules to the foundation action model.

HINT aligns familiar manipulation primitives with unseen semantic compositions (Q2). We evaluate compositional out-of-distribution tasks in which the semantic configuration changes while the required manipulation primitives remain familiar. As summarized in Fig. 6, word spelling introduces unseen letters, colors, and layouts; sorting replaces the training categories and containers with novel objects and target plates; and insertion requires unseen peg-base combinations or spatial relations such as left, right, above, and below. These shifts alter *what* the policy should act on,

allowing us to test whether HINT can bind familiar actions to previously unseen intent without requiring new low-level manipulation capabilities.

The corresponding results in Table II show that, across the three OOD tasks, HINT raises the mean IS of $\pi_{0.5}$ from 41.4% to 89.4% and the mean Sub. SR from 36.2% to 74.3%, while achieving a 30.0% Full SR on each task compared with 0.0% for the base $\pi_{0.5}$. The improvements on Wall-OSS-0.5 further indicate that the semantic benefit is not specific to one action backbone. **HINT better leverages this pretrained semantic generalization** and exposes it to the action policy, binding novel categories, attributes, goal objects, and relations to familiar manipulation primitives. Full-task success requires all subtasks to succeed in the correct order (e.g., the full letter sequence in spelling). Peg insertion is further limited by the precision required for contact-rich control: HINT improves instruction-conditioned object grounding, but does not target fine-grained contact execution.

Manipulation patterns drive online routing (Q3). We evaluate the manipulation-pattern-router of action execution using a single Pattern Router jointly trained on demonstrations from all three tasks. Figure 7 summarizes both pattern prediction and subtask-switch reliability. In Figure 7(a), the mean Pattern Success Rate decreases by only 3.6 percentage points from ID to OOD conditions (94.7% to 91.1%), despite substantial changes in object identity, appearance, and semantic relations, indicating that the shared representation primarily captures interaction phase rather than task-specific visual content. Figure 7(b) further shows 95-100% Switch SR, with 251 of 260 transitions correctly activating the next semantic target. Peg-in-hole insertion yields lower Pattern SR (90.6% ID and 86.1% OOD) due to unstable, force-sensitive contact near phase boundaries, yet still achieves 100% switching, suggesting that local pattern ambiguity does not propagate into semantic transition errors. Together, these results establish manipulation patterns as a reliable event interface between continuous execution and discrete reasoning, determining *which view* to inspect, *when* to update semantic grounding or switch subtasks, while leaving *how* the selected action is executed to the action policy.

Pattern-triggered reasoning aligns computation with semantic change (Q4). Table III decomposes the latency of semantic reasoning and continuous tracking. Grounding DINO [75] handles direct object grounding, whereas Qwen3 resolves fine-grained attributes, spatial relations, and compositional semantics. Qwen reasoning frame requires 630 ms, $3.4\times$ the latency of the base policy, reflecting the capability-latency trade-off also observed in multi-expert VLAs such as UAM [13]. HINT avoids placing this cost on every frame. The 14-ms pattern router invokes semantic reasoning only at pattern transitions, while SAM2 maintains the selected target between them. Consequently, tracking reduces frame latency by 61.6% relative to Qwen reasoning and, after excluding policy inference, reduces auxiliary overhead from 445 ms to 57 ms. HINT therefore preserves full semantic reasoning while making its invocation sparse. The low-latency schedule

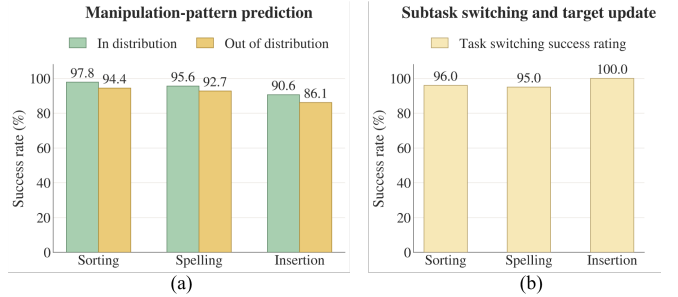


Fig. 7. Reliability of manipulation-pattern-based online routing. (a) Manipulation-pattern prediction success rate under ID and OOD conditions, evaluated over 180 trials for each task-condition pair. (b) Subtask-switch success rate aggregated over ID and OOD conditions and evaluated over 100, 100, and 60 transitions for sorting, spelling, and insertion, respectively. A switch is successful only if the transition is detected and the correct next semantic target is activated.

TABLE III
INFERENCE TIME FOR EACH MODULE

Module / Frame	Inference time ↓
Base Policy ($\pi_{0.5}$)	185 ms
Pattern Router	14 ms
Visual Tracker (SAM2)	43 ms
Object-level Grounder (Grounding DINO)	227 ms
Fine-grained Semantic Grounder (Qwen)	431 ms
Reasoning Frame (DINO / Qwen)	426 / 630 ms
Tracking Frame	242 ms

is also compatible with asynchronous executors such as RTC and DTW [76], [77]. Pattern-triggered multi-view reasoning reduces repeated semantic inference, supporting smoother closed-loop execution with less trajectory interruption.

C. Ablation Study

Dual-path semantic injection improves deployment robustness (Q1,Q2). We ablate the two injection pathways on OOD word spelling. The attention-only variant removes input highlighting, whereas the highlighting-only variant removes the internal attention prior. All variants use the same $\pi_{0.5}$ training protocol, add no trainable parameters for semantic injection, and are evaluated over 10 trials.

The single-path variants expose complementary failure modes. Highlighting suppresses appearance-specific variation and provides unseen targets with a stable external referent, strengthening semantic commitment but occasionally resulting in incorrect picks, misplaced blocks, or overturned blocks. Attention injection biases the action expert toward target-relevant patches, allowing the attention computation to associate the object with the corresponding action. However, because this guidance remains implicit, it is less reliable when multiple visually similar OOD letters are present, often resulting in missed grasps. HINT therefore combines an explicit, invariant representation of *what* to manipulate with an internal focus on *how* that target relates to action, jointly preserving long-horizon intent and control fidelity.

As summarized in Table IV, the complete design combines an appearance-invariant external referent with an internal target-focused prior, increasing IS to 95.5%, Sub. SR to

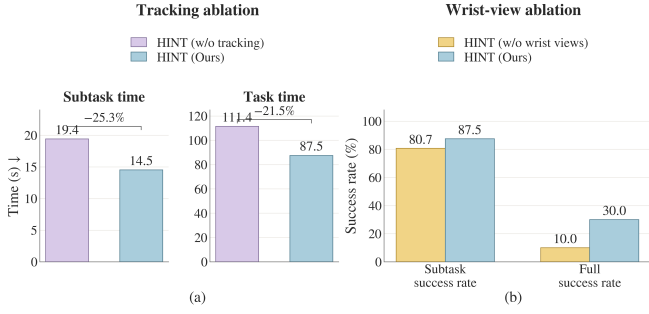


Fig. 8. Independent ablations of continuous tracking and wrist-view perception on OOD word spelling. Tracking reduces completion time, while wrist views improve subtask and full-task success rates.

TABLE IV

ABLATION OF THE TWO SEMANTIC-GUIDANCE PATHWAYS ON OOD WORD SPELLING. ALL VARIANTS USE $\pi_{0.5}$ AS THE BASE POLICY.

Method	IS $\uparrow$	Sub. SR $\uparrow$	Full SR $\uparrow$
$\pi_{0.5}$ [7]	40.9%	36.4%	0.0%
HINT (w/o Highlighting)	59.1%	58.0%	10.0%
HINT (w/o Attention)	88.6%	73.9%	10.0%
HINT (Ours)	95.5%	87.5%	30.0%

87.5%, and Full SR to 30.0%, higher than either single-path variant. The ablation therefore answers Q1 and Q2 jointly: highlighting stabilizes intent under unseen visual semantics, while attention preserves the spatial evidence needed for accurate control. Their combination conveys OOD intent without sacrificing the action policy’s control fidelity.

Tracking and wrist views improve efficiency and reliability (Q4). We evaluate OOD word spelling, where dense layouts and changing targets challenge both local visibility and temporal consistency. We separately ablate continuous tracking and wrist-view perception. Without tracking, the target is re-grounded through semantic reasoning every two frames; without wrist views, perception relies only on the global camera. All other components remain unchanged, and the pattern router is used only for subtask switching.

As shown in Fig. 8, continuous tracking reduces subtask and full-task completion times by 25.3% and 21.5%, respectively, by preserving target correspondence instead of repeatedly reconstructing it through semantic inference. Separately, wrist views increase subtask success from 80.7% to 87.5% and full-task success from 10.0% to 30.0%, showing local wrist observations are important for maintaining reliable intent alignment. Together, these results highlight two complementary principles: **visual persistence improves efficiency, while viewpoint diversity improves robustness.**

V. CONCLUSION

This work studies how to align robot action policies with human intent while preserving control efficiency and low inference latency. In VLA and related models, language provides a sparse conditioning signal, while visual observations continuously drive action generation. As a result, changes in language are often overlooked, and actions follow

learned visual shortcuts rather than human intent. HINT converts sparse language instructions into continuous, target-specific visual guidance. At manipulation-pattern transitions, semantic reasoning determines what the robot should act on; between transitions, visual tracking maintains where the target is relative to the robot. We explore two visual intent interfaces that provide this guidance across different foundation action models, keeping human intent aligned with action throughout execution. Experiments across three long-horizon tasks show that existing policies can rely on visual shortcuts, whereas visual intent injection substantially improves target selection, task progress, and success under both in-distribution and semantic-compositional out-of-distribution configurations.

VI. LIMITATIONS AND FUTURE WORK

The Boundary of Semantic Generalization. The generalization of HINT partly inherits the semantic priors of the underlying VLM, whose coverage may become less reliable under novel concepts or ambiguous observations. Such semantic uncertainty can propagate to subtask inference and target grounding. Future work may explore uncertainty-aware reasoning and online semantic verification to further extend HINT toward open-world manipulation.

Scaling the Shared Pattern Router. Our current Pattern Router is a single lightweight model trained jointly on demonstrations from all three evaluated tasks, and it exhibits reliable prediction across their ID and semantic OOD conditions. We have not yet evaluated whether the same network capacity remains sufficient when the pattern representation is pretrained over a substantially larger and more heterogeneous task collection. Large-scale pattern pretraining may require richer representations or increased router capacity.

Additional Data Preparation. HINT requires manual pattern annotations to train the lightweight Pattern Router. In addition, standard action-policy training uses an auxiliary preprocessing pipeline to generate highlighted observations and attention-prior maps. Future work could reduce the reliance on manual pattern labels and simplify this preprocessing pipeline.

REFERENCES

- [1] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” *The International Journal of Robotics Research*, vol. 44, no. 10-11, pp. 1684–1704, 2025.
- [2] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning fine-grained bimanual manipulation with low-cost hardware,” in *Proceedings of Robotics: Science and Systems*, (Daegu, Republic of Korea), July 2023.
- [3] Y. Ze, G. Zhang, K. Zhang, C. Hu, M. Wang, and H. Xu, “3D Diffusion Policy: Generalizable visuomotor policy learning via simple 3D representations,” in *Proceedings of Robotics: Science and Systems*, (Delft, Netherlands), July 2024.
- [4] C. Wang, H. Fang, H.-S. Fang, and C. Lu, “RISE: 3D perception makes real-world robot imitation simple and effective,” in *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 2870–2877, 2024.

- [5] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. P. Foster, P. R. Sanketi, Q. Vuong, T. Kollar, B. Burchfiel, R. Tedrake, D. Sadigh, S. Levine, P. Liang, and C. Finn, "OpenVLA: An open-source vision-language-action model," in *Proceedings of the 8th Conference on Robot Learning*, vol. 270 of *Proceedings of Machine Learning Research*, pp. 2679–2713, PMLR, 2025.
- [6] K. Black, N. Brown, D. Driess, A. Esmail, M. R. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, S. Jakubczak, T. Jones, L. Ke, S. Levine, A. Li-Bell, M. Mothukuri, S. Nair, K. Pertsch, L. X. Shi, L. Smith, J. Tanner, Q. Vuong, A. Walling, H. Wang, and U. Zhilinsky, " π_0 : A vision-language-action flow model for general robot control," in *Proceedings of Robotics: Science and Systems*, 2025.
- [7] K. Black, N. Brown, J. Darphinian, K. Dhabalia, D. Driess, A. Esmail, M. R. Equi, C. Finn, N. Fusai, M. Y. Galliker, D. Ghosh, L. Groom, K. Hausman, B. Ichter, S. Jakubczak, T. Jones, L. Ke, D. LeBlanc, S. Levine, A. Li-Bell, M. Mothukuri, S. Nair, K. Pertsch, A. Z. Ren, L. X. Shi, L. Smith, J. T. Springenberg, K. Stachowicz, J. Tanner, Q. Vuong, H. Walke, A. Walling, H. Wang, L. Yu, and U. Zhilinsky, " $\pi_{0.5}$: A vision-language-action model with open-world generalization," in *Proceedings of the 9th Conference on Robot Learning*, vol. 305 of *Proceedings of Machine Learning Research*, pp. 17–40, PMLR, 2025.
- [8] S. Ye, Y. Ge, K. Zheng, S. Gao, S. Yu, G. Kurian, S. Indupuru, Y. L. Tan, C. Zhu, J. Xiang, A. Malik, K. Lee, W. Liang, N. Ranawaka, J. Gu, Y. Xu, G. Wang, F. Hu, A. Narayan, J. Bjorck, J. Wang, G. Kim, D. Niu, R. Zheng, Y. Xie, J. Wu, Q. Wang, R. Julian, D. Xu, Y. Du, Y. Chebotar, S. Reed, J. Kautz, Y. Zhu, L. J. Fan, and J. Jang, "World action models are zero-shot policies," 2026.
- [9] M. J. Kim, Y. Gao, T.-Y. Lin, Y.-C. Lin, Y. Ge, G. Lam, P. Liang, S. Song, M.-Y. Liu, C. Finn, and J. Gu, "Cosmos Policy: Fine-tuning video models for visuomotor control and planning," in *The Fourteenth International Conference on Learning Representations*, 2026.
- [10] M. Kelly, C. Sidrane, K. Driggs-Campbell, and M. J. Kochenderfer, "Hg-dagger: Interactive imitation learning with human experts," in *2019 International Conference on Robotics and Automation (ICRA)*, pp. 8077–8083, IEEE, 2019.
- [11] C. Xu, J. T. Springenberg, M. Equi, A. Amin, A. Esmail, S. Levine, and L. Ke, "RL Token: Bootstrapping online RL with vision-language-action models," *arXiv preprint arXiv:2604.23073*, 2026.
- [12] K. Lei, H. Li, D. Yu, Z. Wei, L. Guo, Z. Jiang, Z. Wang, S. Liang, and H. Xu, "Performant robotic manipulation with real-world reinforcement learning," *Science Robotics*, vol. 11, p. ead6267, jul 2026.
- [13] J. Zhang, Y. Luo, Y. Hu, X. Chen, Y. Guo, Z. Liu, H. Xu, T. Lan, and J. Chen, "UAM: A dual-stream perspective on forgetting in VLA training," *arXiv preprint arXiv:2605.15735*, 2026.
- [14] F. Lin, R. Nai, Y. Hu, J. You, J. Zhao, and Y. Gao, "OneTwoVLA: A unified vision-language-action model with adaptive reasoning," in *International Conference on Learning Representations*, 2026.
- [15] Y. Yang, S. Cheng, Y. Fang, H. Bharadhwaj, M. Ding, G. Bertasius, and D. Szafrir, "LiLo-VLA: Compositional long-horizon manipulation via linked object-centric policies," *arXiv preprint arXiv:2602.21531*, 2026.
- [16] Z. Wang, Y. Chen, Y. Liu, J. Ye, P. Chen, C. Lu, S. Liu, and J. Jia, "VP-VLA: Visual prompting as an interface for vision-language-action models," *arXiv preprint arXiv:2603.22003*, 2026.
- [17] I. Liu, A.-C. Cheng, R. Yan, G. Chen, R.-Z. Qiu, X. Zou, S. Yi, H. Yin, X. Wang, and S. Liu, "Long-horizon manipulation via trace-conditioned VLA planning," *arXiv preprint arXiv:2604.21924*, 2026.
- [18] W. Liang, G. Sun, Y. He, J. Dong, S. Dai, I. Laptev, S. Khan, and Y. Cong, "PixelVLA: Advancing pixel-level understanding in vision-language-action model," in *International Conference on Learning Representations*, 2026.
- [19] Y. Fan, P. Ding, S. Bai, X. Tong, Y. Zhu, H. Lu, F. Dai, W. Zhao, Y. Liu, S. Huang, *et al.*, "Long-VLA: Unleashing long-horizon capability of vision language action model for robot manipulation," in *Proceedings of the 9th Conference on Robot Learning*, vol. 305 of *Proceedings of Machine Learning Research*, pp. 2018–2037, PMLR, 2025.
- [20] Z. Liu, Y. Gu, Y. Wang, X. Xue, and Y. Fu, "ActiveVLA: Injecting active perception into vision-language-action models for precise 3d robotic manipulation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [21] S. Uithol, I. van Rooij, H. Bekkering, and P. Haselager, "Hierarchies in action and motor control," *Journal of Cognitive Neuroscience*, vol. 24, no. 5, pp. 1077–1086, 2012.
- [22] M. Desmurget and S. Grafton, "Forward modeling allows feedback control for fast reaching movements," *Trends in Cognitive Sciences*, vol. 4, no. 11, pp. 423–431, 2000.
- [23] E. Todorov and M. I. Jordan, "Optimal feedback control as a theory of motor coordination," *Nature Neuroscience*, vol. 5, no. 11, pp. 1226–1235, 2002.
- [24] M. F. Land and M. Hayhoe, "In what ways do eye movements contribute to everyday activities?," *Vision Research*, vol. 41, no. 25–26, pp. 3559–3565, 2001.
- [25] M. Hayhoe and D. Ballard, "Eye movements in natural behavior," *Trends in Cognitive Sciences*, vol. 9, no. 4, pp. 188–194, 2005.
- [26] R. Yu, P. Zhang, S. Liu, B. Liu, M. Kang, S. Li, L. Shi, E. Ma, P. Yang, C. Pan, J. Chen, D. Liu, R. Sun, M. Guo, B. Zhang, H. Zhou, Z. Xu, V. Chen, H. Huang, J. Wang, D. Kuzi, A. Zhai, H. Su, R. Gan, L. Liang, H. Wang, and Q. Wang, "Wall-oss-0.5 technical report," 2026.
- [27] L. X. Shi, B. Ichter, M. R. Equi, L. Ke, K. Pertsch, Q. Vuong, J. Tanner, A. Walling, H. Wang, N. Fusai, A. Li-Bell, D. Driess, L. Groom, S. Levine, and C. Finn, "Hi robot: Open-ended instruction following with hierarchical vision-language-action models," in *Proceedings of the 42nd International Conference on Machine Learning*, vol. 267 of *Proceedings of Machine Learning Research*, pp. 54919–54933, PMLR, 2025.
- [28] C.-P. Huang, Y.-H. Wu, M.-H. Chen, Y.-C. F. Wang, and F.-E. Yang, "ThinkAct: Vision-language-action reasoning via reinforced visual latent planning," in *Advances in Neural Information Processing Systems*, vol. 38, 2025.
- [29] Y. Liu, J. Zhu, Y. Mo, G. Li, X. Cao, J. Jin, Y. Shen, Z. Li, T. Yu, W. Yuan, F. Ding, and I. Lourtentzou, "PALM: Progress-aware policy learning via affordance reasoning for long-horizon robotic manipulation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [30] S. Zhang, Z. Xu, P. Liu, X. Yu, Y. Li, Q. Gao, Z. Fei, Z. Yin, Z. Wu, Y.-G. Jiang, and X. Qiu, "VLABench: A large-scale benchmark for language-conditioned robotics manipulation with long-horizon reasoning tasks," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 11142–11152, 2025.
- [31] Z. Lan, W. Mao, H. Li, L. Wang, T. Wang, H. Fan, and O. Yoshie, "Bfa: Best-feature-aware fusion for multi-view fine-grained manipulation," *IEEE Robotics and Automation Letters*, vol. 10, no. 9, pp. 8930–8937, 2025.
- [32] Y.-J. Choi, Y.-C. Son, and S.-C. Lim, "See selectively, act adaptively: Dual-level structural decomposition for bimanual robot manipulation," *arXiv preprint arXiv:2606.13279*, 2026.
- [33] R. Feng, D. Hu, W. Ma, and X. Li, "Play to the score: Stage-guided dynamic multi-sensory fusion for robotic manipulation," in *Proceedings of the 8th Conference on Robot Learning*, vol. 270 of *Proceedings of Machine Learning Research*, pp. 340–363, PMLR, 2025.
- [34] Z. He, H. Fang, J. Chen, H.-S. Fang, and C. Lu, "FoAR: Force-aware reactive policy for contact-rich robotic manipulation," *IEEE Robotics and Automation Letters*, vol. 10, no. 6, pp. 5625–5632, 2025.
- [35] Y. Li, Zhaxizhuoma, H. Jiang, J. Xia, H. Zhang, J. Du, Y. Zhou, J. Zeng, C. Hao, J. Ren, *et al.*, "ForceVLA2: Unleashing hybrid force-position control with force awareness for contact-rich manipulation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [36] Octo Model Team, D. Ghosh, H. Walke, K. Pertsch, K. Black, O. Mees, S. Dasari, J. Hejna, T. Kreiman, C. Xu, *et al.*, "Octo: An open-source generalist robot policy," in *Proceedings of Robotics: Science and Systems*, 2024.
- [37] Gemini Robotics Team, A. Abdolmaleki, S. Abeyruwan, J. Ainslie, J.-B. Alayrac, M. Gonzalez Arenas, A. Balakrishna, *et al.*, "Gemini robotics 1.5: Pushing the frontier of generalist robots with advanced embodied reasoning, thinking, and motion transfer," *arXiv preprint arXiv:2510.03342*, 2025.
- [38] Z. Zhou, Y. Zhu, M. Zhu, J. Wen, N. Liu, Z. Xu, W. Meng, Y. Peng, C. Shen, F. Feng, and Y. Xu, "ChatVLA: Unified multimodal understanding and robot control with vision-language-action model," in *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 5377–5395, Association for Computational Linguistics, 2025.

- [39] S. Belkhal, T. Ding, T. Xiao, P. Sermanet, Q. Vuong, J. Tompson, Y. Chebotar, D. Dwibedi, and D. Sadigh, "RT-H: Action hierarchies using language," in *Proceedings of Robotics: Science and Systems*, 2024.
- [40] M. Zawalski, W. Chen, K. Pertsch, O. Mees, C. Finn, and S. Levine, "Robotic control via embodied chain-of-thought reasoning," in *Proceedings of the 8th Conference on Robot Learning*, vol. 270 of *Proceedings of Machine Learning Research*, pp. 3157–3181, PMLR, 2025.
- [41] Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn, A. Handa, M.-Y. Liu, D.-A. Xiang, G. Wetzstein, and T.-Y. Lin, "CoT-VLA: Visual chain-of-thought reasoning for vision-language-action models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 1702–1713, 2025.
- [42] Y. Li, Y. Deng, J. Zhang, J. Jang, M. Memmel, R. Yu, C. R. Garrett, F. Ramos, D. Fox, A. Li, A. Gupta, and A. Goyal, "HAMSTER: Hierarchical action models for open-world robot manipulation," in *International Conference on Learning Representations*, 2025.
- [43] Y. Chen, Y. Ge, H. Zhou, M. Ding, Y. Ge, and X. Liu, "DIAL: Decoupling intent and action via latent world modeling for end-to-end VLA," *arXiv preprint arXiv:2603.29844*, 2026.
- [44] T. Yang, G. Chen, Y. Chen, Z. Liang, Y. Liu, Z. Chen, C. Xu, H. Liang, J. Pang, Y. Mu, and P. Luo, "HiVLA: A visual-grounded-centric hierarchical embodied manipulation system," *arXiv preprint arXiv:2604.14125*, 2026.
- [45] Q. Shou, F. Zhu, S. Chen, P. Yan, Z. Yan, Y. Miao, X. Pang, Z. Hong, R. Shi, H. Huang, J. Zhang, and S. Guo, "HALO: A unified vision-language-action model for embodied multimodal chain-of-thought reasoning," *arXiv preprint arXiv:2602.21157*, 2026.
- [46] M. Koo, D. Choi, T. Kim, K. Lee, C. Kim, Y. Seo, and J. Shin, "HAMLET: Switch your vision-language-action model into a history-aware policy," in *International Conference on Learning Representations*, 2026.
- [47] L. Zhong, Y. Liu, Y. Wei, Z. Xiong, M. Yao, S. Liu, and G. Ren, "ACoT-VLA: Action chain-of-thought for vision-language-action models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [48] C.-P. Huang, Y. Man, Z. Yu, M.-H. Chen, J. Kautz, Y.-C. F. Wang, and F.-E. Yang, "Fast-ThinkAct: Efficient vision-language-action reasoning via verbalizable latent planning," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [49] X. Li, Y.-L. Li, Y. Wang, and S. Wang, "TRM-VLA: Temporal-aware chain-of-thought reasoning and memorization for vision-language-action models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [50] S. Bai, J. Lyu, W. Zhou, Z. Li, D. Wang, L. Xing, X. Zhao, P. Wang, Z. Wang, C. Chi, B. Chen, and S. Zhang, "Latent reasoning VLA: Latent thinking and prediction for vision-language-action models," *arXiv preprint arXiv:2602.01166*, 2026.
- [51] Y.-H. Wu, T. Matsushima, and K. Ota, "Continuous reasoning for vision-language-action," *arXiv preprint arXiv:2606.00229*, 2026.
- [52] R. Shah, A. Yu, Y. Zhu, Y. Zhu, and R. Martín-Martín, "BUMBLE: Unifying reasoning and acting with vision-language models for building-wide mobile manipulation," in *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 9131–9139, IEEE, 2025.
- [53] S. Wang, M. Han, Z. Jiao, Z. Zhang, Y. N. Wu, S.-C. Zhu, and H. Liu, "LLM³: Large language model-based task and motion planning with motion failure reasoning," in *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 12086–12092, IEEE, 2024.
- [54] W. Song, Z. Zhou, H. Zhao, J. Chen, P. Ding, H. Yan, Y. Huang, F. Tang, D. Wang, and H. Li, "ReconVLA: Reconstructive vision-language-action model as effective robot perceiver," *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 40, no. 22, pp. 18549–18557, 2026.
- [55] F. Li, W. Song, H. Zhao, J. Wang, P. Ding, D. Wang, L. Zeng, and H. Li, "Spatial forcing: Implicit spatial representation alignment for vision-language-action model," in *International Conference on Learning Representations*, 2026.
- [56] H. Huang, F. Liu, L. Fu, T. Wu, M. Mukadam, J. Malik, K. Goldberg, and P. Abbeel, "OTTER: A vision-language-action model with text-aware visual feature extraction," in *Proceedings of the 42nd International Conference on Machine Learning*, vol. 267 of *Proceedings of Machine Learning Research*, pp. 25566–25580, PMLR, 2025.
- [57] Q. Yu, J. You, Y. Wang, J. Liang, B. Ping, Y. Tian, Y. Chen, M. Cai, Z. Gong, R. Wu, *et al.*, "AffordanceVLA: A vision-language-action model empowering action generation through affordance-aware understanding," *arXiv preprint arXiv:2606.06155*, 2026.
- [58] L. Xiao, J. Li, J. Gao, F. Ye, Y. Jin, J. Qian, J. Zhang, Y. Wu, and X. Yu, "AVA-VLA: Improving vision-language-action models with active visual attention," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [59] H. Yu, H. Lin, J. Zhang, W. Zhang, C. Gu, H. Li, and P. Tan, "MaskWAM: Unifying mask prompting and prediction for world-action models," *arXiv preprint arXiv:2606.13515*, 2026.
- [60] K. Fang, F. Liu, P. Abbeel, and S. Levine, "MOKA: Open-world robotic manipulation through mark-based visual prompting," in *Proceedings of Robotics: Science and Systems*, 2024.
- [61] S. Nasiriany, F. Xia, W. Yu, T. Xiao, J. Liang, I. Dasgupta, A. Xie, D. Driess, A. Wahid, Z. Xu, Q. Vuong, T. Zhang, T.-W. E. Lee, K.-H. Lee, P. Xu, S. Kirmani, Y. Zhu, A. Zeng, K. Hausman, N. Heess, C. Finn, S. Levine, and B. Ichter, "PIVOT: Iterative visual prompting elicits actionable knowledge for VLMs," in *Proceedings of the 41st International Conference on Machine Learning*, vol. 235 of *Proceedings of Machine Learning Research*, pp. 37321–37341, PMLR, 2024.
- [62] R. Zheng, Y. Liang, S. Huang, J. Gao, H. Daumé III, A. Kolobov, F. Huang, and J. Yang, "TraceVLA: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies," in *International Conference on Learning Representations*, 2025.
- [63] Y. Dai, J. Lee, Y. Zhang, Z. Ma, J. Yang, A. Zadeh, C. Li, N. Fazeli, and J. Chai, "AimBot: A simple auxiliary visual cue to enhance spatial awareness of visuomotor policies," in *Proceedings of the 9th Conference on Robot Learning*, vol. 305 of *Proceedings of Machine Learning Research*, pp. 2409–2429, PMLR, 2025.
- [64] H. Yu, J. Zhao, Y. Liu, K. Li, C. Ma, D. Zhang, Y. Hu, G. Chen, J. Xie, J. Guo, *et al.*, "Point what you mean: Visually grounded instruction policy," *arXiv preprint arXiv:2512.18933*, 2025.
- [65] Y. Yuan, H. Cui, Y. Chen, Z. Dong, F. Ni, L. Kou, J. Liu, P. Li, Y. Zheng, and J. Hao, "From seeing to doing: Bridging reasoning and decision for robotic manipulation," in *International Conference on Learning Representations*, 2026.
- [66] Y. Zhao, X. Deng, Y. Cao, Y. Chen, X. He, S. You, S. Yang, L. Fan, F. Wang, and X. Su, "Localizing, structuring, and rendering: Bridging 3d and 2d vision-language-action models for robotic manipulation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026.
- [67] K. He, X. Zhang, S. Ren, and J. Sun, "Deep residual learning for image recognition," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778, 2016.
- [68] K. Cho, B. Van Merriënboer, Ç. Gulçehre, D. Bahdanau, F. Bougares, H. Schwenk, and Y. Bengio, "Learning phrase representations using rnn encoder-decoder for statistical machine translation," in *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pp. 1724–1734, 2014.
- [69] S. Bai, Y. Cai, R. Chen, K. Chen, X. Chen, Z. Cheng, L. Deng, W. Ding, C. Gao, C. Ge, *et al.*, "Qwen3-vl technical report," *arXiv preprint arXiv:2511.21631*, 2025.
- [70] N. Ravi, V. Gabeur, Y.-T. Hu, R. Hu, C. Ryal, T. Ma, H. Khedr, R. Rädle, C. Rolland, L. Gustafson, E. Mintun, J. Pan, K. V. Alwala, N. Carion, C.-Y. Wu, R. Girshick, P. Dollár, and C. Feichtenhofer, "SAM 2: Segment anything in images and videos," in *International Conference on Learning Representations*, 2025.
- [71] M. A. Lepori, A. R. Tartaglioni, W. K. Vong, T. Serre, B. M. Lake, and E. Pavlick, "Beyond the doors of perception: Vision transformers represent relations between objects," in *Advances in Neural Information Processing Systems*, vol. 37, 2024.
- [72] S. Yoo, E. Kim, D. Jung, J. Lee, and S. Yoon, "Improving visual prompt tuning for self-supervised vision transformers," in *Proceedings of the 40th International Conference on Machine Learning*, vol. 202 of *Proceedings of Machine Learning Research*, pp. 40075–40092, 2023.
- [73] Z. Xie, Z. Han, X. Wei, S. Sun, Y. Li, and J. Zhao, "S²-vla: State-space guided vision-language-action models for long-horizon manipulation," 2026.
- [74] H. Yuan, Z. Liang, A. Chen, *et al.*, "Qwen-robotmanip technical report: Alignment unlocks scale for robotic manipulation foundation models," *arXiv preprint arXiv:2606.17846*, 2026.
- [75] S. Liu, Z. Zeng, T. Ren, F. Li, H. Zhang, J. Yang, Q. Jiang, C. Li, J. Yang, H. Su, J. Zhu, and L. Zhang, "Grounding DINO: Marrying

- DINO with grounded pre-training for open-set object detection,” in *Computer Vision–ECCV 2024*, vol. 15105 of *Lecture Notes in Computer Science*, pp. 38–55, Springer, 2024.
- [76] K. Black, M. Galliker, and S. Levine, “Real-time execution of action chunking flow policies,” *Advances in Neural Information Processing Systems*, vol. 38, pp. 33383–33407, 2026.
 - [77] H. Fang, S. Tang, M. Mei, H. Qin, Z. He, J. Chen, Y. Feng, C. Wang, W. Liu, Z. He, *et al.*, “Force policy: Learning hybrid force-position control policy under interaction frame for contact-rich manipulation,” *arXiv preprint arXiv:2602.22088*, 2026.
 - [78] I. Loshchilov and F. Hutter, “Decoupled weight decay regularization,” in *International Conference on Learning Representations*, 2019.
 - [79] I. Loshchilov and F. Hutter, “SGDR: Stochastic gradient descent with warm restarts,” in *International Conference on Learning Representations*, 2017.
 - [80] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, “ImageNet: A large-scale hierarchical image database,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 248–255, 2009.

SUPPLEMENTARY MATERIALS FOR HINT

SUPP. I. IMPLEMENTATION DETAILS

A. Semantic-Interface Preparation

The base-policy and HINT variants share demonstrations, optimization, and action-backbone initialization; only the policy-facing semantic interface changes. For HINT, training observations are rendered offline from ground-truth pattern and target annotations. Deployment applies the same rendering and patch-prior construction to masks produced by online grounding and tracking. This train-test symmetry is essential: the overlay and attention prior are part of the policy input, not auxiliary supervision, and introduce no trainable parameters into the foundation action backbone.

The input resolution is 224×224 for $\pi_{0.5}$ and 448×448 for Wall-OSS-0.5. Highlighting uses RGB (0, 220, 120) with opacity 0.32, a white contour, and a 3-pixel contour width. Fractional target coverage is computed on a 16×16 patch grid for $\pi_{0.5}$ and a 32×32 grid for Wall-OSS-0.5. Figure S2 shows the resulting policy inputs; Table S1 records the backbone-specific fine-tuning settings. Both backbones use AdamW [78] with cosine decay [79];

TABLE S1
ACTION-POLICY FINE-TUNING HYPERPARAMETERS.

Hyperparameter	$\pi_{0.5}$	Wall-OSS-0.5
Initialization	pi05_base	Wall-OSS-0.5
Input / patch grid	$224^2 / 16^2$	$448^2 / 32^2$
Optimizer	AdamW	AdamW, $\beta = (.9, .95)$
Weight decay / ϵ	– / –	$10^{-8} / 10^{-8}$
Learning rate	$2 \times 10^{-5} \rightarrow 2 \times 10^{-7}$	$5 \times 10^{-5} \rightarrow 10^{-6}$
Warm-up / schedule	5k / cosine (50k)	1k / cosine (200k)
Gradient clip	1.0	1.0
EMA	0.999	–
Steps (sort / spell / peg)	50k / 80k / 80k	50k / 80k / 80k
Global batch	32	32 (4×2 GPUs $\times 4$ accum.)
Sharding / precision	FSDP / –	FSDP / bfloat16

B. Pattern Router

To complement the architectural overview in the main paper, the Router consumes the current frame from all three cameras together with a 12-frame (0.4 s) history of proprioception and joint effort. RGB inputs are bilinearly resized to 120×160 , antialiased, mapped to $[-1, 1]$, and ImageNet-normalized in the backbone. No stochastic image augmentation is used. Each view has a residual two-layer convolutional adapter, followed by a shared ImageNet-pretrained ResNet-18 [67], [80]. The stem and layers 1–2 are frozen; layers 3–4 are fine-tuned. Each view is projected to 128 dimensions. Proprioception and effort are embedded independently to 64 dimensions and encoded by separate one-layer, 128-D GRUs [68]. Softmax-gated fusion maps the five streams to a single 128-D representation.

The output comprises six view-resolved pattern logits and four sigmoid progress heads, one for each pattern family. Data are split by episode rather than by frame, preventing near-duplicate temporal observations from crossing the train-validation boundary. Frames are sampled uniformly without

pattern-frequency rebalancing. Table S2 gives the remaining settings.

TABLE S2
PATTERN ROUTER TRAINING HYPERPARAMETERS.

Hyperparameter	Value
Train / validation	90% / 10% episodes
Seed	0
Optimizer / weight decay	AdamW / 5×10^{-4}
Learning rate	$5 \times 10^{-5} \rightarrow 3 \times 10^{-7}$ (cosine)
Warm-up / epochs	5 / 50
Batch size	64
Label smoothing / grad. clip	0.05 / 5.0
Input history	RGB $\times 1$; state/effort $\times 12$
Loss	weighted CE + 0.5 weighted MSE

At inference, a proposed transition into or out of *free move* is accepted when the current-pattern progress exceeds 0.7 and the candidate-pattern progress is below 0.3. A candidate that persists for five frames overrides this gate, preventing local boundary noise from indefinitely delaying a valid event. Transitions among contact-side patterns are not progress-gated. This temporal filter affects only perception scheduling and semantic subtask switching; action generation remains closed-loop at every policy step.

SUPP. II. MANIPULATION-PATTERN DEFINITION AND ANNOTATION

A. Operational Definition

Figure S1 instantiates the four interaction patterns in the two-stage peg-in-hole task. Unlike a distance-threshold decomposition, the annotation is anchored to observable interaction events—final approach, stable grasp or contact, transport, release, and sustained fixture contact. The same criteria therefore apply across objects, layouts, and task stages.

Free move. The gripper holds no task object and the arm moves without sustained task contact. The segment ends at the final target-directed approach. The global view is routed because scene-level target and goal geometry dominates local contact geometry.

Pre-contact. The arm is in its final approach, with the gripper aligned to grasp or establish contact. The active wrist view is routed for local geometry. The segment ends at stable grasp or sustained contact; an incidental one-frame touch does not define a boundary.

Transport contact. A stable grasp couples the object to the gripper during motion toward its goal. The global view is routed to preserve the object-goal relationship. The segment ends at release or at the onset of contact-rich destination alignment.

Dexterous contact. The object remains in sustained contact with the fixture, and completion requires local, force-informed correction. The active wrist view and recent joint-effort history are therefore most informative. In Fig. S1, this pattern covers final base seating in Stage I and force-sensitive peg insertion in Stage II.

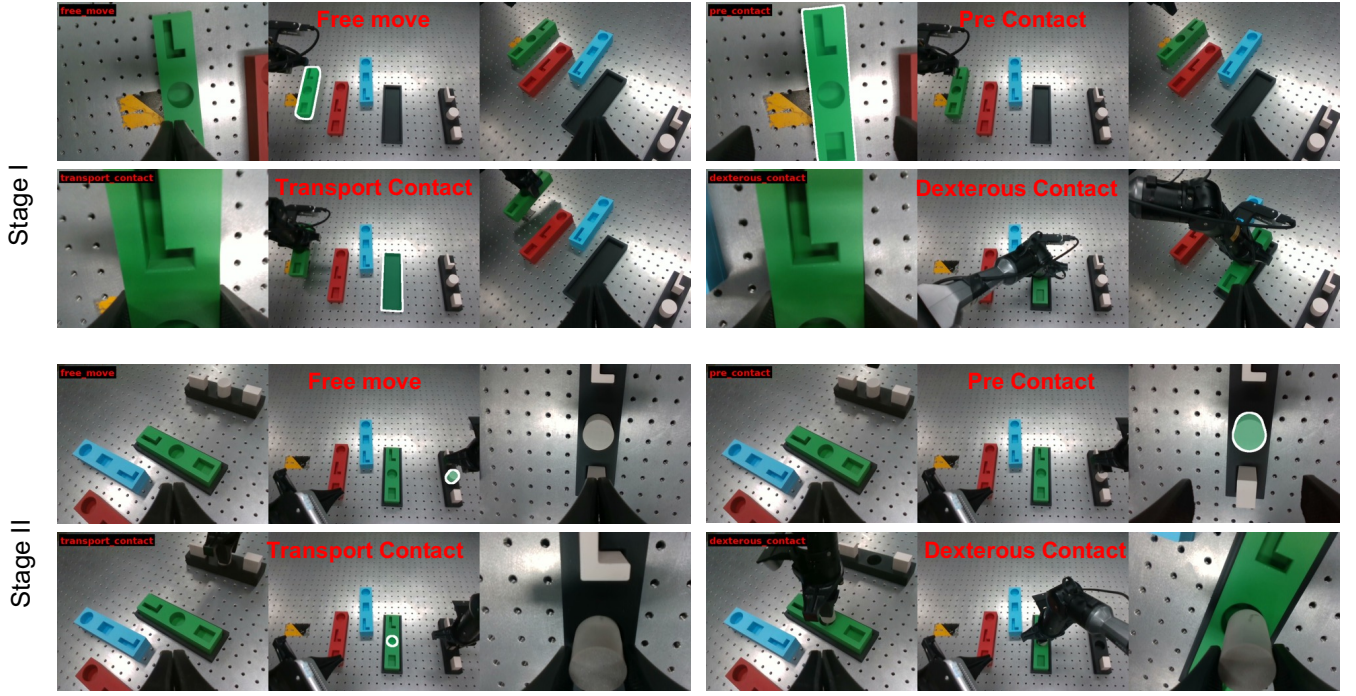


Fig. S1. Manipulation-pattern transitions in the two-stage peg-in-hole task. Stage I inserts the selected color or position base, and Stage II inserts the corresponding shape peg. Each pattern is illustrated with synchronized multi-view observations; the outlined region denotes the active semantic target.

For routing, *pre-contact* and *dexterous contact* require local wrist-view observations and are therefore resolved by the active wrist (left or right) on our bimanual platform, which has one wrist camera per arm. In contrast, *free move* and *transport contact* share the global route. Thus, the four task-independent manipulation-pattern families are expanded into six view-resolved routing labels: two global classes and four wrist-resolved classes. This expansion is specific to the multi-wrist observation setting; on a single-arm platform with a single wrist camera, the same four pattern families would correspond directly to four routing labels. Progress prediction remains defined at the pattern-family level, with one progress head for each of the four manipulation patterns.

B. Boundary and Progress Annotation

Annotators assign boundaries on synchronized multi-view video with proprioception and joint effort available as supporting evidence. A contiguous run with a constant six-class label defines one segment. For a segment spanning frames $s, \dots, e$, the normalized progress target is generated, rather than annotated independently, as

$$\phi_t = \frac{t - s}{\max(e - s, 1)}, \quad s \leq t \leq e. \quad (\text{S1})$$

Hence, the first and last frames have progress 0 and 1 for segments longer than one frame; a one-frame segment is assigned 0. Progress is recomputed after any boundary correction, so no independent progress annotation is required.

SUPP. III. SEMANTIC COMMITMENT, GROUNDING, AND TRACKING

This section gives the operational realization of the main paper’s “what-and-where” decomposition. The Task Manager establishes a discrete semantic commitment at manipulation-pattern events; the Semantic Grander localizes that commitment in the routed view; and visual tracking preserves its image-space identity between events. Semantic identity is therefore updated sparsely, while spatial state remains closed-loop.

A. Task Manager and Execution Context

The Task Manager converts a high-level instruction into sparse semantic commitments synchronized with manipulation-pattern transitions. At reset, Qwen3-VL-8B-Instruct [69], optionally supported by open-vocabulary detection, interprets the instruction and scene as an ordered plan

$$\mathcal{P} = [\sigma_r]_{r=1}^K, \quad (\text{S2})$$

where σ_r denotes the entities, goals, and relations associated with subtask r . At the k th pattern event, the execution context is

$$\mathcal{C}_k = (\mathcal{P}, \mathcal{H}_k, r_k), \quad (\text{S3})$$

where $\mathcal{H}_k$ records completed subtasks and r_k indexes the active subtask. The Task Manager then resolves

$$(\ell_k, o_k^*) = \mathcal{T}(\ell, \hat{P}_{t_k}, \mathcal{C}_k), \quad (\text{S4})$$

yielding the current instruction ℓ_k and semantic target o_k^* .

The manipulation pattern determines the role of the target: free move and pre-contact generally refer to the object

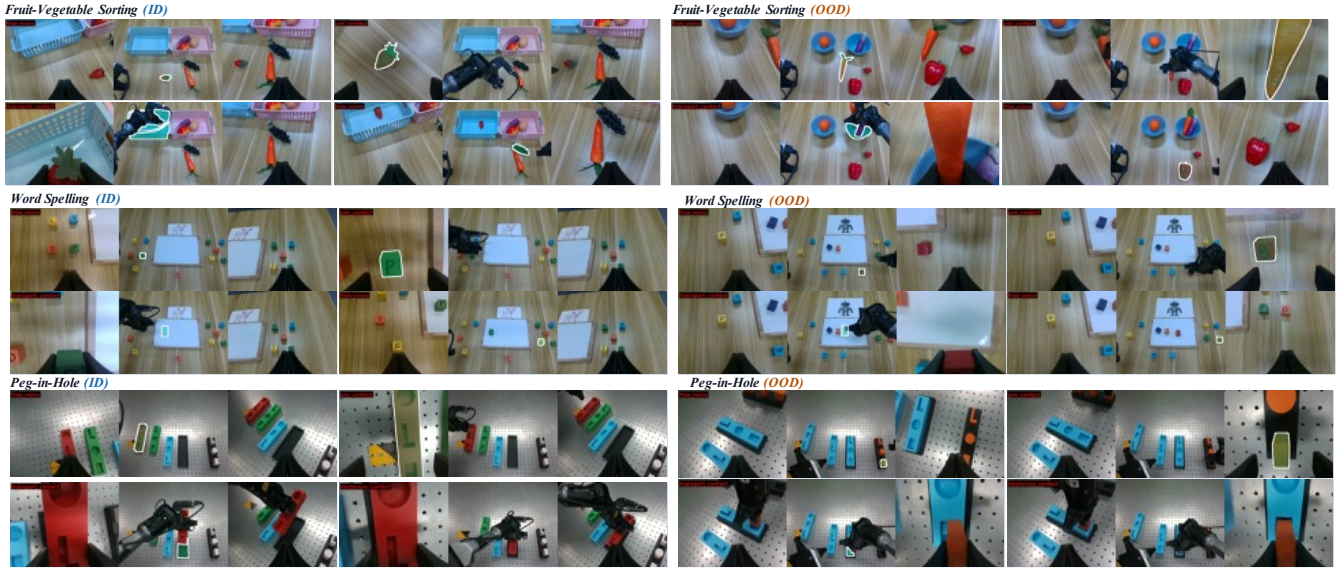


Fig. S2. Grounding and policy-facing highlighting for sorting, spelling, and peg-in-hole insertion under ID and OOD variations. Each overlay identifies the entity selected by the Task Manager in the view routed by the current manipulation pattern.

being acquired, whereas transport and dexterous contact shift attention toward its goal or interaction region. This object-goal binding is preserved within the subtask and updated only after the corresponding pattern cycle is completed. The resulting event-driven commitment prevents transient perceptual changes from repeatedly redefining task intent. In the reported tasks, it supports category-receptacle binding in sorting, ordered letter selection in spelling, and block-to-slot followed by peg-to-hole execution in insertion.

The following representative outputs document how the semantic plan is instantiated in the reported experiments.

```
Sorting object:
{"label": "<short lowercase object name>",
 "category": "fruit|vegetable"}

Spelling target:
<one lowercase English word>

Peg-in-hole plan:
{"selected_block_color": "<color>",
 "selected_block_holes_top_to_bottom": ["<shape>", ...],
 "selected_peg_color": "<color>",
 "selected_peg_shape": "1 shaped|circular|rectangular",
 "instruction": "<canonical two-step instruction>"}
```

At each grounding event, the active entity is expressed as a concise target phrase. Direct templates are used for unambiguous entities, while Qwen resolves more complex attributes or relations. The routed image and target phrase are then supplied to the grounding model using the following prompt:

```
Locate exactly one visible object or region described as:
'<TARGET_PHRASE>'. Match the description as closely as
possible.
If partially visible or occluded, return a tight box
around the best
matching individual target. Do not box its container,
holder, or a
group of similar objects. Output JSON in the form
[{"bbox_2d": [x1,y1,x2,y2]}], using coordinates normalized
to
0--1000. Output [] when no matching target is visible.
```

B. Semantic grounder

Grounding DINO (Swin-T) [75] is used for efficient object-level inventory when category semantics are direct; Qwen is used when fine-grained attributes, spatial relations, or compositional disambiguation are required. In the reported configuration, DINO initializes the sorting and spelling inventories at reset, whereas Qwen parses the peg scene and performs all transition-triggered phrase grounding. Thus the DINO and Qwen latency rows in the main paper characterize two available grounding regimes; they are not both invoked at every transition. Previously resolved boxes and fixed geometric regions are reused when their semantic identity remains valid.

TABLE S3
GROUNDING AND TRACKING SETTINGS IN THE REPORTED
EXPERIMENTS. BOX AND TEXT THRESHOLDS APPLY TO THE
RESET-TIME DINO DETECTOR; “TOKENS” IS THE MAXIMUM QWEN
COORDINATE-OUTPUT BUDGET.

Item	Sorting	Spelling	Peg insertion
Reset parser / detector	DINO	DINO	Qwen
Transition grounder	Qwen	Qwen	Qwen
Qwen box tokens	16	16	64
DINO box/text threshold	0.22/0.18	0.25/0.20	n/a
SAM2.1 checkpoint	Hiera-S	Hiera-S	Hiera-S
Tracker memory window	24	24	24

C. Goal-Consistent Tracking and Re-grounding

Each camera maintains an independent state for the official memory-based video propagation interface of SAM2.1 Hiera-S [70]. A grounding box initializes a dense target mask, which is then propagated with a 24-frame memory window. Only views selected by the current manipulation

pattern are updated; other memories are retained until those cameras are routed again. This implements the main paper’s distinction between a fixed semantic commitment and its time-varying spatial realization.

When tracking confidence falls below $\tau_{\text{trk}} = 0.5$, the same committed target phrase is sent back to the Semantic Grounder and the returned box reinitializes that camera’s memory. A target-phrase change always starts a new tracker state. A pattern transition also reinitializes tracking when it changes the routed view or the active entity; otherwise the existing commitment is preserved. Consequently, re-grounding repairs spatial drift without silently changing semantic identity.

SUPP. IV. EXPERIMENT DETAILS

The supplementary analysis follows the four questions in the main paper. It adds trial-level OOD layouts and score accounting for Q1–Q2, clarifies the routing and latency accounting used for Q3–Q4, and decomposes the remaining errors without restating the headline comparisons.

A. Metrics, Results, and Statistical Reporting

We evaluate performance at three complementary levels. Let $y_i \in \{0, 1\}$ indicate whether the i th semantic decision selects the correct target, $s_j \in \{0, 0.5, 1\}$ denote the credited outcome of the j th required subtask, and $z_r \in \{0, 1\}$ indicate whether trial r is completed successfully. The three metrics are

$$\text{IS} = \frac{1}{N_{\text{IS}}} \sum_{i=1}^{N_{\text{IS}}} y_i, \quad (\text{S5})$$

$$\text{Sub. SR} = \frac{1}{N_{\text{sub}}} \sum_{j=1}^{N_{\text{sub}}} s_j, \quad (\text{S6})$$

$$\text{Full SR} = \frac{1}{N_{\text{trial}}} \sum_{r=1}^{N_{\text{trial}}} z_r. \quad (\text{S7})$$

IS measures whether the correct semantic entity is selected, Sub. SR measures the execution outcome of each required manipulation, and Full SR requires the entire ordered task to be completed without failure.

Partial credit is used only for Sub. SR. Sorting subtasks are scored binary. In spelling, selecting the correct letter but placing it face-down or at an incorrect sequence position receives 0.5. In peg insertion, transferring the correct block with an incorrect final orientation receives 0.5. IS remains binary, and any partially completed subtask causes the corresponding trial to fail under Full SR. Figure S3 illustrates these scoring criteria.

Table S4 reports both the total number of evaluated opportunities and the corresponding success rate. The ID/OOD evaluations contain 113/46 sorting subtasks, 47/44 spelling subtasks, and 40/20 peg-insertion subtasks, respectively; the exact realized denominator for each method is shown in the table. Peg insertion contains more semantic decisions than manipulation subtasks because object, fixture, and insertion-target selection are evaluated separately by IS.

TABLE S4
EVENT-LEVEL SEMANTIC AND SUBTASK RESULTS. EACH ENTRY REPORTS CREDITED SUCCESSES OVER THE TOTAL NUMBER OF OPPORTUNITIES, FOLLOWED BY THE CORRESPONDING SUCCESS RATE IN PARENTHESES. HALF-INTEGER CREDITS OCCUR ONLY IN SUB. SR. “WALL” DENOTES WALL-OSS-0.5.

Method	Metric	Sorting	Spelling	Peg insertion
<i>In-distribution</i>				
Wall	IS	60/113 (53.1%)	21/47 (44.7%)	39/60 (65.0%)
	Sub. SR	60/113 (53.1%)	17/47 (36.2%)	10/40 (25.0%)
$\pi_{0.5}$	IS	59/113 (52.2%)	21/47 (44.7%)	21/60 (35.0%)
	Sub. SR	59/113 (52.2%)	20/47 (42.6%)	11/40 (27.5%)
Wall+HINT	IS	97/113 (85.8%)	39/47 (83.0%)	52/60 (86.7%)
	Sub. SR	97/113 (85.8%)	38/47 (80.9%)	19/40 (47.5%)
$\pi_{0.5}$ +HINT	IS	103/113 (91.2%)	46/47 (97.9%)	60/60 (100.0%)
	Sub. SR	103/113 (91.2%)	45/47 (95.7%)	27/40 (67.5%)
<i>Out-of-distribution</i>				
Wall	IS	22/46 (47.8%)	16/44 (36.4%)	15/30 (50.0%)
	Sub. SR	17/46 (37.0%)	14/44 (31.8%)	5/20 (25.0%)
$\pi_{0.5}$	IS	26/46 (56.5%)	18/44 (40.9%)	8/30 (26.7%)
	Sub. SR	24/46 (52.2%)	16/44 (36.4%)	4/20 (20.0%)
Wall+HINT	IS	34/46 (73.9%)	36/44 (81.8%)	25/30 (83.3%)
	Sub. SR	30/46 (65.2%)	32/44 (72.7%)	6/20 (30.0%)
$\pi_{0.5}$ +HINT	IS	38/46 (82.6%)	42/44 (95.5%)	27/30 (90.0%)
	Sub. SR	37/46 (80.4%)	38.5/44 (87.5%)	11/20 (55.0%)

Across both backbones and evaluation splits, HINT consistently improves IS and Sub. SR. For $\pi_{0.5}$ +HINT, the close alignment between IS and Sub. SR in sorting and spelling indicates that correct semantic commitments are reliably translated into executable actions. Peg insertion presents a different regime: high ID/OOD IS (100.0%/90.0%) but lower Sub. SR (67.5%/55.0%) identifies geometric precision and contact-sensitive control, rather than semantic binding, as the remaining bottleneck.

Table S5 reports trial-level Full SR with two-sided 95% Wilson confidence intervals. The ID evaluation contains 20 sorting trials, 15 spelling trials, and 20 peg-insertion trials; each OOD condition contains 10 trials. Wilson intervals are used because they remain well-defined at observed rates of 0% and 100%, unlike standard Wald intervals.

TABLE S5
FULL-TASK SUCCESS RATE WITH TWO-SIDED 95% CONFIDENCE INTERVALS. ENTRIES ARE REPORTED AS PERCENTAGE [lower, upper] USING WILSON SCORE INTERVALS. “WALL” DENOTES WALL-OSS-0.5.

Method	Sorting	Spelling	Peg insertion
<i>In-distribution</i>			
Wall	0.0 [0.0, 16.1]	13.3 [3.7, 37.9]	5.0 [0.9, 23.6]
$\pi_{0.5}$	10.0 [2.8, 30.1]	13.3 [3.7, 37.9]	5.0 [0.9, 23.6]
Wall+HINT	40.0 [21.9, 61.3]	40.0 [19.8, 64.3]	10.0 [2.8, 30.1]
$\pi_{0.5}$ +HINT	60.0 [38.7, 78.1]	86.7 [62.1, 96.3]	40.0 [21.9, 61.3]
<i>Out-of-distribution</i>			
Wall	0.0 [0.0, 27.8]	0.0 [0.0, 27.8]	10.0 [1.8, 40.4]
$\pi_{0.5}$	0.0 [0.0, 27.8]	0.0 [0.0, 27.8]	0.0 [0.0, 27.8]
Wall+HINT	20.0 [5.7, 51.0]	20.0 [5.7, 51.0]	10.0 [1.8, 40.4]
$\pi_{0.5}$ +HINT	30.0 [10.8, 60.3]	30.0 [10.8, 60.3]	30.0 [10.8, 60.3]

The confidence intervals reflect the limited number of full-task trials and should therefore be interpreted as uncertainty

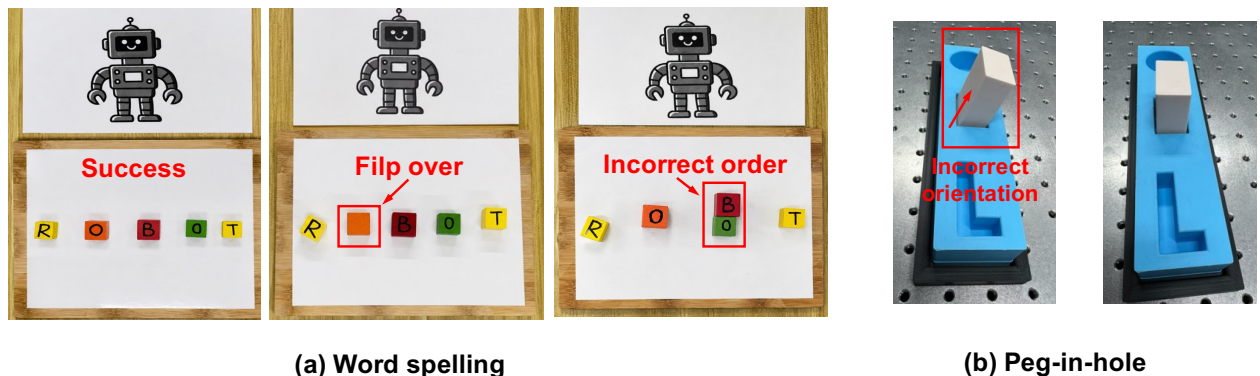


Fig. S3. Subtask-level scoring criteria. A correctly placed spelling block or correctly aligned peg block receives a score of 1.0. A face-down letter, an incorrect letter position, or a correctly transferred peg block with incorrect final orientation receives 0.5. All partial outcomes receive zero credit under Full SR.

ranges rather than precise pairwise rankings. In particular, the OOD estimates have wider intervals because each condition contains only 10 trials. Nevertheless, the consistent event-level improvements across tasks, splits, and action backbones provide denser evidence that HINT improves semantic target selection and subtask execution, while the Full SR results demonstrate that these local gains translate into complete long-horizon task success.

B. Semantic-Compositional OOD Variations

We organize the OOD evaluation along four primary axes of semantic variation:

- **Entity and Category Variation.** Sorting introduces previously unseen produce categories, while spelling changes the target letters and landmark concepts. Peg insertion varies the candidate blocks and pegs presented in the scene. These settings test whether the system can identify task-relevant entities beyond the specific semantic instances observed during training.
- **Visual-Attribute and Goal Variation.** The evaluation changes object colors, goal appearances, and attribute combinations. Sorting replaces familiar receptacles with visually distinct goals; spelling introduces new letter colors and visual configurations; and peg insertion uses novel color-shape compositions. These variations require the system to resolve target identity without relying on fixed appearance correspondences.
- **Spatial and Relational Variation.** Object arrangements, distractor layouts, and candidate ordering are varied across scenes. Peg insertion further introduces relational descriptions such as *left*, *right*, *above*, and *below*. The intended target must therefore be determined from its relation to other scene elements rather than from a memorized location.
- **Instruction-Conditioned Composition.** The instruction changes how entities, attributes, and goals should be composed. Examples include altered category-goal assignments in sorting, unseen target words and letter sequences in spelling, and new block-slot and peg-hole bindings in insertion. This axis evaluates whether

familiar semantic elements can be recombined into previously unseen task specifications.

Figure S4 presents the complete deployed ID and OOD layouts. The montages show how these variation axes are instantiated and combined within each task.

C. Routing and Latency Accounting

The two routing measures in the main paper answer different parts of Q3. Pattern prediction evaluates the shared interaction-state representation, whereas Switch SR evaluates the downstream event interface: a switch is correct only when a detected transition activates the intended next semantic target. The reported 251/260 successful switches decompose as 96/100 for sorting, 95/100 for spelling, and 60/60 for insertion. The high switch rate despite lower pattern reliability near insertion boundaries is consistent with the progress gate in Sec. Supp. I: stable semantic events need not require every boundary-adjacent frame to be classified correctly.

For Q4, the aggregate frame times in the main paper are the sums of the modules on the corresponding execution path. With the reported component times, a DINO reasoning frame is $185 + 14 + 227 = 426$ ms, a Qwen reasoning frame is $185 + 14 + 431 = 630$ ms, and a tracking frame is $185 + 14 + 43 = 242$ ms. Excluding the 185-ms action policy, the auxiliary cost is therefore 241/445 ms for a DINO/Qwen reasoning event and 57 ms for a tracking step. This accounting makes the source of the reported efficiency gain explicit: HINT reduces the frequency of semantic reasoning rather than weakening the reasoning model or opening the action loop.

D. Semantic-Interface Ablation

The OOD spelling ablation uses the same 44 semantic/subtask opportunities and 10 trials for every variant. Attention-only (without highlighting) obtains IS 26/44, Sub. SR 25.5/44, and Full SR 1/10; highlighting-only (without the attention prior) obtains 39/44, 32.5/44, and 1/10; the combined interface obtains 42/44, 38.5/44, and 3/10. These counts complement the main-paper percentages and show that the combined gain is present in both binary target


Fruit-Vegetable Sorting (ID)



Fruit-Vegetable Sorting (OOD)




Word Spelling (ID)

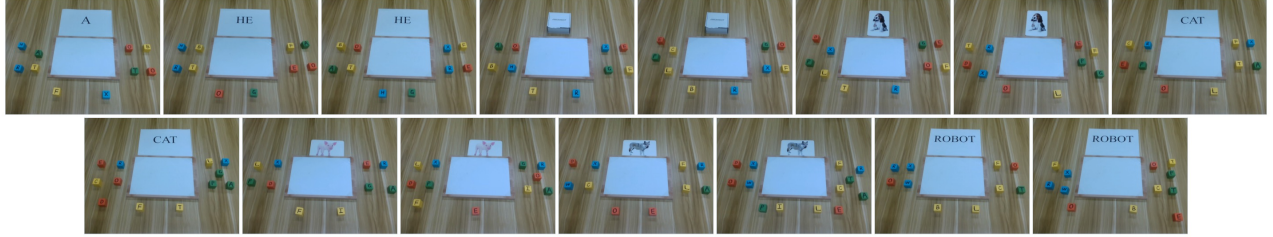

Word Spelling (OOD)



Peg-in-Hole (ID)

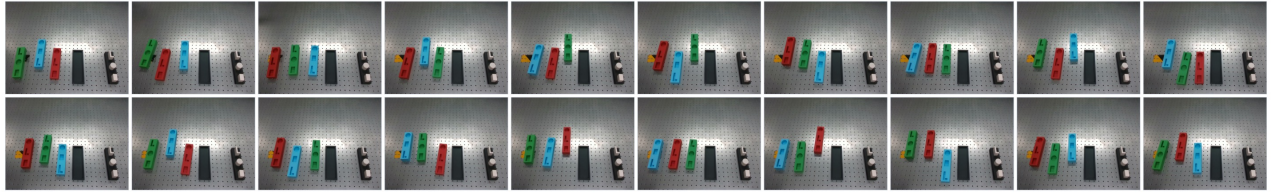

Peg-in-Hole (OOD)




Fig. S4. Complete deployed ID and OOD layouts for sorting (top), spelling (middle), and peg-in-hole insertion (bottom), illustrating variations in entity identity, visual attributes, spatial relations, and instruction-conditioned semantic composition.

selection and credited execution, not only in the strict full-task endpoint.

E. Failure Analysis

Each unsuccessful trial is assigned to its earliest irreversible error, avoiding the repeated attribution of one upstream mistake to multiple downstream stages. *Reason* denotes incorrect subtask inference or target grounding; *Pick* denotes failure to acquire the correct object; *Place* covers transport, ordering, release, or orientation errors; and *Contact* denotes force-sensitive alignment or insertion failure. These categories are mutually exclusive.

Baseline failures. The baselines fail primarily because semantic knowledge is not reliably translated into target-conditioned action. This is most evident in sorting: the base $\pi_{0.5}$ achieves 89.5% Sub. SR when the familiar visual mapping remains valid, but drops to 52.2% when the instruction

changes the category-goal assignment. The policy retains the required grasp-and-transport capability, yet defaults to learned visual correspondences when they conflict with language. The low OOD IS values and zero Full SR of the base $\pi_{0.5}$ across all three tasks reflect the same failure at longer horizons: an early target-selection error invalidates the remaining action sequence. Peg insertion additionally exposes an action-side limitation, as correct target selection does not guarantee the precision and contact correction required for successful insertion.

Failures with HINT. HINT externalizes the selected target as a persistent spatial referent and therefore removes many upstream binding failures. The remaining errors are summarized in Table S6.

The residual failure distribution reveals task-dependent bottlenecks. Sorting failures remain entirely semantic, par-

ticularly under OOD conditions, indicating that unseen categories or ambiguous category-goal mappings can still exceed the Task Manager or grounder’s open-world reasoning capacity. Spelling exhibits a mixed regime: HINT largely resolves the intended letter sequence, but dense distractors and fine-grained letter appearances can still produce grounding, grasping, or placement errors. In peg insertion, reasoning is never the first cause; 11 of 12 ID failures and all seven OOD failures occur during placement or contact-rich insertion. Here HINT selects the correct target, but the unchanged action backbone remains limited by geometric precision and force-sensitive correction.

TABLE S6

FIRST-CAUSE TRIAL OUTCOMES FOR $\pi_{0.5}$ +HINT. CATEGORIES ARE MUTUALLY EXCLUSIVE AND SUM TO THE NUMBER OF TRIALS. “PLACE” INCLUDES TRANSPORT AND PLACEMENT ERRORS BEFORE CONTACT-RICH INSERTION; “–” INDICATES THAT THE CONTACT CATEGORY IS NOT APPLICABLE.

Split	Task	Success	Reason	Pick	Place	Contact
ID	Sorting	12/20	8	0	0	–
	Spelling	13/15	1	1	0	–
	Peg insertion	8/20	0	1	4	7
OOD	Sorting	3/10	7	0	0	–
	Spelling	3/10	2	2	3	–
	Peg insertion	3/10	0	0	4	3

This migration of failures is more informative than a uniform reduction in error counts. HINT primarily addresses the semantic interface between reasoning and action; once this bottleneck is removed, the dominant errors shift toward the next weakest component. Residual reasoning errors therefore define the limit of open-world semantic interpretation, whereas placement and contact errors expose the control ceiling of the underlying action policy.