



FluxFlow: Conservative Flow-Matching for Astronomical Image Super-Resolution

Shuhong Liu^{1,2,✉}, Xining Ge^{2,✉}, Ziteng Cui^{1,2}, Liuzhuozheng Li¹
Gengjia Chang², Jun Liu², Ziyang Gu¹, Dong Li², Xuangeng Chu^{1,2}
Lin Gu³, Tatsuya Harada^{1,4}

¹The University of Tokyo ²I2WM ³Tohoku University ⁴RIKEN AIP

Abstract

Ground-to-space astronomical super-resolution requires recovering space-quality images from ground-based observations that are simultaneously limited by pixel sampling resolution and atmospheric seeing, which imposes a stochastic, spatially varying PSF that cannot be resolved through upsampling alone. Existing methods rely on synthetic training pairs that fail to capture real atmospheric statistics and are prone to either over-smoothed reconstructions or hallucination sources with no physical counterpart in the observed sky. We propose FluxFlow, a conservative pixel-space flow-matching framework that incorporates observation uncertainty and source-region importance weights during training, and a training-free Wiener-regularized test-time correction to suppress hallucination sources while preserving recovered detail. We further construct the DESI-HST Dataset, the large-scale real-world benchmark comprising 19,500 real co-registered ground-to-space image pairs with real atmospheric PSF variation. Experiments demonstrate that FluxFlow consistently outperforms existing baseline methods in both photometric and scientific accuracy. **Data and source code will be publicly available.**

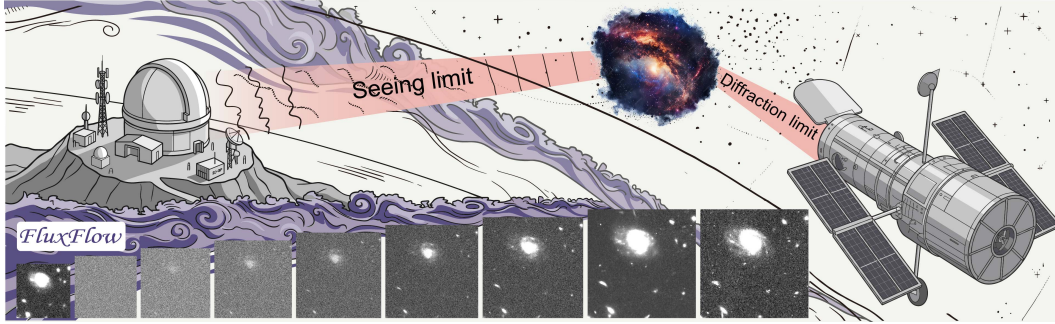


Figure 1: FluxFlow reconstructs HST-quality high-resolution images from seeing-limited low-resolution ground-based telescope observations.

1 Introduction

Image super-resolution (SR) has made substantial advances on natural images [Liang et al. \[2021\]](#), [Zamir et al. \[2022\]](#), [Lipman et al. \[2022\]](#), [Chen et al. \[2025b\]](#), [Ren et al. \[2026\]](#), where the degradation model is dominated by limited sampling density on the image plane. In astronomical imaging, however, effective resolution is jointly governed by pixel sampling and angular resolution, where the latter is determined by the optical point spread function (PSF) and further degraded by atmospheric turbulence [Sirianni et al. \[2005\]](#), [Dey et al. \[2019\]](#). Consequently, super-resolution that merely upsamples a PSF-blurred observation cannot recover the underlying finer physical structure.

✉ These authors contribute equally to this work. ✉ Corresponding author.

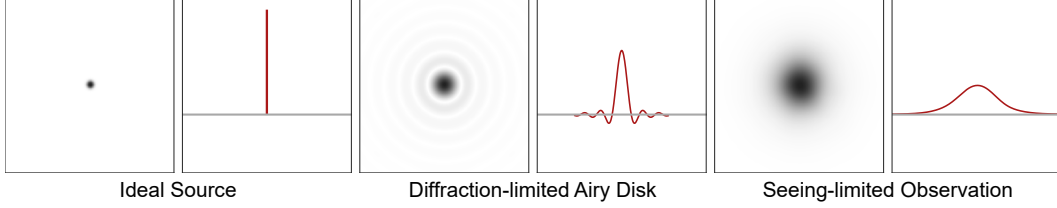


Figure 2: Illustration of point source degradation from ideal (left) to diffraction-limited (center) to seeing-limited (right), with 2D intensity images and 1D cross-sectional profiles.

This distinction is especially important in ground-to-space image super-resolution. As illustrated in Figure 2, Ground-based observations are typically seeing-limited, where atmospheric turbulence broadens the PSF and imposes an angular-resolution floor that often dominates over the detector sampling scale. In contrast, space-based telescopes such as the Hubble Space Telescope (HST) are free from atmospheric seeing and can approach the diffraction limit of their optics, yielding substantially sharper images. However, its small field of view and heavily oversubscribed observing time restrict such image quality to a small fraction of the sky, creating a persistent gap between wide-field ground-based surveys and high-resolution space-based observations.

Bridging this gap would enable high-resolution analysis over survey scales that are inaccessible to space telescopes alone. Wide-field surveys such as DESI [Dey et al. \[2019\]](#) image hundreds of millions of galaxies across thousands of square degrees, yet their seeing-limited image quality restricts measurements that depend on resolved structure, including weak-lensing shear estimation [Mandelbaum et al. \[2015\]](#), galaxy morphology [Conselice \[2014\]](#), and accurate PSF-aware photometry. A reliable mapping from ground-based observations to space-quality images would extend the reach of such analyses without requiring comparable space-based coverage.

Despite this potential, existing astronomical SR methods [Miao et al. \[2024\]](#), [Shan et al. \[2025\]](#), [Wu et al. \[2025\]](#), [Zhang et al. \[2026\]](#) are typically trained on synthetically degraded image pairs that do not fully reproduce the statistics of real observations, including atmospheric PSF variation, instrument-specific noise [Liu et al. \[2026b\]](#), and spatially correlated artifacts introduced by frame co-addition [Bertin \[2010\]](#), [Gonzaga et al. \[2012\]](#). This mismatch leads to a substantial domain gap when models are applied to genuine cross-instrument data. Regression-based methods further tend to produce overly smooth reconstructions that suppress fine morphological structure, while generative models, although better at recovering perceptual detail [Saharia et al. \[2022b\]](#), [Wang et al. \[2024\]](#), can introduce compact hallucination sources that can directly bias downstream scientific products, including source catalogs [Bertin and Arnouts \[1996\]](#), flux measurements [Conselice \[2014\]](#), photometric redshifts [Salvato et al. \[2019\]](#), and lensing analyses [Bernstein and Jarvis \[2002\]](#).

To address these challenges, we introduce FluxFlow, a flow-matching framework for ground-to-space astronomical super-resolution. Our method improves physical fidelity at both training and inference time. During training, it uses spatial reliability and source-importance maps to focus learning on scientifically focused regions while suppressing unstable gradients from artifacts. During inference, it enforces measurement consistency with the observed low-resolution image by back-projecting residuals through a Wiener-regularized inverse of the forward operator. Together, these designs suppress the generation of hallucination sources while preserving the fine structure. To overcome the scarcity of real observational data for ground-to-space SR, we further construct the DESI–HST Dataset, the large-scale astronomical SR dataset comprising real-world co-registered ground-to-space image pairs with authentic atmospheric PSF variation and observation uncertainty maps.

Our contributions are summarized as follows:

- We propose FluxFlow, a conservative pixel-space flow-matching framework with a physically informed training objective and a training-free Wiener-regularized inference-time correction that suppresses hallucination sources while preserving restored detail.
- We construct the DESI–HST Dataset, a real paired ground-to-space super-resolution benchmark containing 19,500 paired images at $\times 2$ and $\times 4$ scales, with real atmospheric PSF variation and per-pixel uncertainty weight maps.
- Experiments on our curated dataset demonstrate that FluxFlow achieves superior photometric fidelity and scientific accuracy over both recent regression-based and generative approaches.

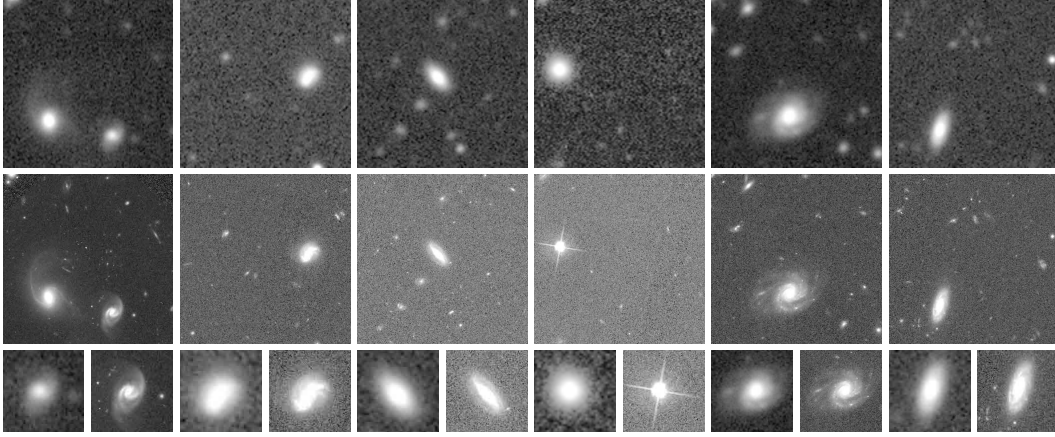


Figure 3: Paired examples from our DESI-HST dataset. Top: DESI cutouts at 128×128 pixels; Bottom: HST observations at 512×512 pixels. All pairs are pixel-aligned. The DESI images are visibly blurred due to coarser angular resolution and atmospheric turbulence.

2 Related Work

2.1 Regression-Based Image Restoration

Deep learning has driven substantial progress in single-image super-resolution and image restoration. CNN backbones such as MPRNet [Zamir et al. \[2021\]](#) and NAFNet [Chen et al. \[2022\]](#), Transformer variants including SwinIR [Liang et al. \[2021\]](#), Restormer [Zamir et al. \[2022\]](#), HAT [Chen et al. \[2023a, 2025b\]](#), SRFormer [Zhou et al. \[2023b\]](#), DAT [Chen et al. \[2023b\]](#), and HiT-SR [Zhang et al. \[2024a\]](#), and state-space models such as MambaIR [Guo et al. \[2024\]](#) and MaIR [Li et al. \[2025a\]](#) have steadily raised restoration quality through larger receptive fields and richer feature interaction. A parallel line pursues all-in-one and condition-aware restoration via degradation-adaptive [Liang et al. \[2022\]](#), prompt-based [Potlapalli et al. \[2023\]](#), [Wang et al. \[2023\]](#), [Conde et al. \[2024\]](#), and scale-adaptive [He et al. \[2025\]](#) designs, alongside efficiency-oriented work on quantization [Qin et al. \[2023\]](#), Fourier shifting [Zhou \[2024\]](#), and computational rebalancing [Yu et al. \[2024\]](#). In astronomy, supervised pipelines address noise calibration [Liu et al. \[2026b\]](#), X-ray data [Sweere et al. \[2022\]](#), galaxies [Miao et al. \[2024\]](#), star fields [Wu et al. \[2025\]](#), and cross-survey enhancement [Luo et al. \[2025\]](#), [Li et al. \[2022\]](#). All these methods yield a deterministic output from the degraded input and cannot capture the ambiguity of severely ill-posed one-to-many inverse problems.

2.2 Diffusion Models for Conditional Generation

Diffusion models [Song et al. \[2020\]](#) serve as generative priors for restoration, with classifier [Dhariwal and Nichol \[2021\]](#), classifier-free [Ho and Salimans \[2022\]](#), latent [Rombach et al. \[2022\]](#), and cascaded [Ho et al. \[2022\]](#) variants enabling controllable synthesis [Zheng et al. \[2023b\]](#). Restoration is cast as iterative refinement [Saharia et al. \[2022b,a\]](#), posterior sampling with measurement operators [Chung et al. \[2022\]](#), [Song et al. \[2023\]](#), or spatially conditioned generation [Zhang et al. \[2023\]](#), and is accelerated or constrained through residual shifting [Yue et al. \[2023\]](#), single-step generation [Wang et al. \[2024\]](#), [Wu et al. \[2024\]](#), [Li et al. \[2025b\]](#), [Dong et al. \[2025\]](#), consistency distillation [He et al. \[2024\]](#), [Gong and Ma \[2024\]](#), diffusion inversion [Yue et al. \[2025\]](#), faithfulness constraints [Matsunaga et al. \[2022\]](#), [Zhang et al. \[2025\]](#), [Chen et al. \[2025a\]](#), [Polowczyk et al. \[2026\]](#), and Schrödinger or Brownian bridge transport [Liu et al. \[2023\]](#), [Li et al. \[2023\]](#), [Zhou et al. \[2023a\]](#). In astronomy, diffusion-based SR [Ruan et al. \[2025\]](#), [Guo et al. \[2026\]](#) targets gravitational lensing [Reddy et al. \[2024\]](#), solar imaging [Song et al. \[2024\]](#), galaxy reconstruction [Shan et al. \[2025\]](#), intensity interferometry [Rai et al. \[2025\]](#), and cross-survey generation [Zhang et al. \[2026\]](#).

3 DESI-HST Cross-Survey Dataset

Instruments and Data Collection. Unlike previous astronomical SR datasets that either synthesize LR images via degradation kernels [Wu et al. \[2025\]](#) or pair two ground-based surveys [Miao et al.](#)

[2024], Luo et al. [2025], our dataset comprises genuinely observed ground-to-space image pairs from two independent instruments whose resolution gap is dominated by atmospheric turbulence. The LR images are drawn from the DESI Legacy Imaging Surveys Dey et al. [2019], a ground-based program providing i -band imaging ($\sim 7600\text{--}8730\text{ \AA}$) at $0.262''/\text{pixel}$, which offers the closest spectral match to the HR targets. The HR images are obtained from HST ACS/WFC in the F814W filter ($\sim 7000\text{--}9500\text{ \AA}$), delivering diffraction-limited imaging at $0.03''/\text{pixel}$ after drizzle stacking Gonzaga et al. [2012]. Details are provided in Appendix A.

Our dataset is collected from three extragalactic deep fields with overlapping HST and DESI coverage: COSMOS, GOODS-S, and UDS. Image pairs are spatially aligned using World Coordinate System metadata, with DESI coadds retained at native resolution to preserve their noise properties and PSF. The corresponding HST images are reprojected and flux-conservingly downsampled to produce aligned HR targets at $\times 2$ and $\times 4$ scale factors (HR at 256×256 and 512×512). The resulting LR–HR pairs are cropped into patches and split into 17,800 training and 1,700 test pairs per scale. Visualizations are shown in Figure 3 and alignment procedures are detailed in Appendix B.

Atmospheric Turbulence. Beyond pixel scale, the resolution gap between DESI and HST is dominated by atmospheric turbulence. Ground-based DESI observations are seeing-limited, with stochastic refractive-index fluctuations imposing a time-varying, spatially extended PSF of roughly $1.0''\text{--}1.3''$ FWHM in the DESI Imaging Surveys Dey et al. [2019]. HST operates above the atmosphere and is diffraction-limited, reaching a PSF FWHM of $\sim 0.09''$ Sirianni et al. [2005]. The resulting $11\text{--}14\times$ ratio makes DESI-to-HST super-resolution substantially harder than previous datasets relying on pixel-scale downsampling alone.

Table 1: Comparison of astronomical SR datasets. **G** and **S** denote ground- and space-based imaging.

Dataset	Size	Real	Flux	SR-Type
Miao et al. [2024]	2,000	✓	×	G → G
Shan et al. [2025]	9,383	✓	×	G → G
Song et al. [2024]	1,597	✓	×	S → G
Reddy et al. [2024] ¹	2,880	✓	×	G → S
Luo et al. [2025]	17,000	✓	×	G → G
Li et al. [2022]	14,604	✓	×	G → G
Wu et al. [2025]	54,738	✓	✓	S → S
Zhang et al. [2026]	120,000	×	✓	S → G
Ours	19,500	✓	✓	G → S

4 Preliminaries of Flow-Matching

Flow Matching Lipman et al. [2022] learns a continuous-time normalizing flow that transports samples from a source distribution p_0 to a target distribution p_1 via an ordinary differential equation (ODE):

$$\frac{d\mathbf{x}_t}{dt} = v_\theta(\mathbf{x}_t, t), \quad t \in [0, 1], \quad (1)$$

where v_θ is a time-dependent velocity field parameterized by a neural network. Given an initial sample $\mathbf{x}_0 \sim p_0$, integrating Equation (1) from $t=0$ to $t=1$ yields a sample $\mathbf{x}_1 \sim p_1$.

The central idea of Flow Matching is to define a conditional probability path $p_t(\mathbf{x} \mid \mathbf{x}_0, \mathbf{x}_1)$ that interpolates between the source and target distributions, together with its generating conditional velocity field $u_t(\mathbf{x} \mid \mathbf{x}_0, \mathbf{x}_1)$. We adopt the optimal-transport (OT) conditional path:

$$p_t(\mathbf{x} \mid \mathbf{x}_0, \mathbf{x}_1) = \mathcal{N}(\mathbf{x} \mid t\mathbf{x}_1 + (1-t)\mathbf{x}_0, \sigma_{\min}^2 \mathbf{I}), \quad (2)$$

where $\sigma_{\min}$ is a small constant. The conditional velocity field that generates this path takes the form:

$$u_t(\mathbf{x} \mid \mathbf{x}_0, \mathbf{x}_1) = \mathbf{x}_1 - \mathbf{x}_0. \quad (3)$$

The network v_θ is trained by minimizing the Conditional Flow Matching (CFM) objective Lipman et al. [2022], Tong et al. [2023]:

$$\mathcal{L}_{\text{CFM}} = \mathbb{E}_{t \sim \mathcal{U}[0,1], \mathbf{x}_0 \sim p_0, \mathbf{x}_1 \sim p_1} \|v_\theta(\mathbf{x}_t, t) - u_t(\mathbf{x}_t \mid \mathbf{x}_0, \mathbf{x}_1)\|^2, \quad (4)$$

where $\mathbf{x}_t = t\mathbf{x}_1 + (1-t)\mathbf{x}_0$ is the linearly interpolated sample. The CFM loss regresses against the conditional velocity u_t rather than the intractable marginal velocity field, yet provably yields the same gradient in expectation Lipman et al. [2022].

At inference, samples are generated by solving Equation (1) with a numerical ODE solver, i.e., Euler or Heun Karras et al. [2022], using N discretization steps from $t=0$ to $t=1$.

¹Diffense Reddy et al. [2024]’s dataset was presented in the sRGB domain and not publicly available.

5 FluxFlow

Pixel-Domain Flow Matching. Modern generative models for natural images typically operate in the latent space of a VAE [Rombach et al. \[2022\]](#), which is ill-suited to scientific imaging. Astronomical frames are single-band and span a high dynamic range, whereas standard VAEs are trained on three-channel 8 bit photographs and cannot be transferred off-the-shelf. Retraining a tokenizer on astronomical data is also unappealing, since the compression itself degrades high-frequency structure of the targets and corrupts flux measurements. Motivated by recent studies on pixel-space diffusion that achieve high-resolution generation without a latent tokenizer [Hoogeboom et al. \[2023, 2025\]](#), [Li and He \[2025\]](#), we learn the velocity field v_θ directly on pixel inputs.

5.1 Physically-Informed Velocity Learning

While the conditional flow-matching objective in Equation (4) encourages perceptual realism, it does not guarantee that the generated images are physically consistent. Two quantities drive most downstream analysis. The integrated flux of a source encodes its luminosity and underpins stellar-mass and star-formation-rate estimates [Conselice \[2014\]](#), and the PSF shape determines apparent size for weak lensing and morphological classification [Bernstein and Jarvis \[2002\]](#), [Mandelbaum et al. \[2015\]](#). We enforce both through spatially varying weights in the velocity objective that separately encode data reliability and scientific importance.

Inverse-Variance Weighting. The drizzled HST mosaic is accompanied by a per-pixel weight map (WHT) $\mathbf{W} \in \mathbb{R}^{H_{\text{hr}} \times W_{\text{hr}}}$ encoding the inverse variance at each pixel. It reflects spatially varying exposure depth from the dither pattern together with statistical noise and residual instrumental artifacts such as chip gaps and cosmic-ray trails, as shown in Figure 4. Pixels affected by these signatures receive lower weight. We compress the dynamic range with a square-root transform $\widetilde{\mathbf{W}} = \sqrt{\mathbf{W}}$ to suppress dominance by a few pixels.

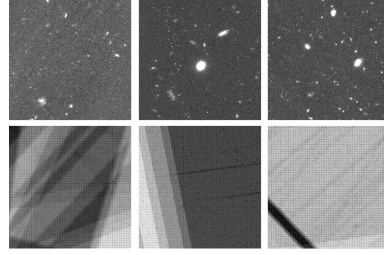


Figure 4: Visualization of HST science images (top) and WHT weight maps (bottom), showing structures from the drizzle stacking and local artifacts such as cosmic rays.

Source-Region Weighting. The inverse-variance map addresses data quality. Orthogonally, we introduce a scientific importance weight that flags which pixels matter most for analysis. Given a binary source mask $\mathbf{M}$ obtained from SExtractor [Bertin and Arnouts \[1996\]](#) run on the HST ground truth, we construct $\mathbf{S} = 1 + \mathbf{M}$, which doubles the loss weight on source pixels relative to the background. We weight all pixels within a source uniformly because morphological and PSF-shape information resides primarily in the faint outer profile, which an intensity-dependent scheme would suppress.

Overall Objective. Multiplying the two maps yields a single spatially varying weight that encodes both reliability and importance, and is applied as a per-image normalized objective:

$$\mathcal{L}_{\text{WFM}} = \mathbb{E}_{t, \mathbf{x}_0, \mathbf{x}_1} \left[\frac{\sum_p (\widetilde{\mathbf{W}} \odot \mathbf{S})_p \|v_\theta(\mathbf{x}_t, t, \mathbf{c}) - u_t\|_p^2}{\sum_p (\widetilde{\mathbf{W}} \odot \mathbf{S})_p} \right], \quad (5)$$

where $\mathbf{c}$ denotes the conditioning upsampled DESI observation specified in Appendix D, $\odot$ is element-wise multiplication, p indexes spatial pixel locations, and the denominator $\sum_p (\widetilde{\mathbf{W}} \odot \mathbf{S})_p$ is recomputed per training pair so that each pair contributes a gradient signal of comparable magnitude irrespective of the absolute scale of $\widetilde{\mathbf{W}} \odot \mathbf{S}$. In OT-CFM the velocity target $u_t = \mathbf{x}_1 - \mathbf{x}_0$ is independent of t and the interpolant $\mathbf{x}_t = (1 - t)\mathbf{x}_0 + t\mathbf{x}_1$ is a pixelwise convex combination, so the mask $\mathbf{M}$ computed on $\mathbf{x}_1$ remains spatially aligned with source content at every t .

5.2 Measurement-Consistent Flow Sampling

The physics-informed weights improve velocity-field fidelity on source regions but leave the background unregulated. Unlike regression-based models [Dong et al. \[2015\]](#), [Lim et al. \[2017\]](#) that converge to the conditional mean, generative samplers can produce hallucinated sources with no

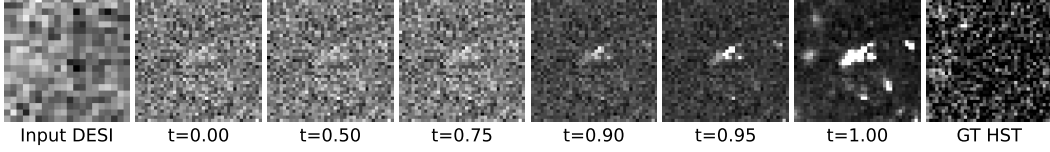


Figure 5: Sampling trajectory of a representative hallucination source across ODE integration steps. The spurious structure is already latent in the initial noise and progressively sharpened by the flow into a compact source-like morphology.

counterpart in y . We analyze their formation and propose a training-free, inference-time correction that enforces consistency with the observation.

Hallucination Sources. We track hallucinations along the full ODE trajectory. As shown in Figure 5, a hallucination is already present in the initial noise as a local intensity fluctuation, which the velocity field sharpens at late steps into a compact source-like morphology with surrounding ring artifacts. Figure 6 plots the mean brightness within a 2-pixel radius of 50 hallucination centroids as a function of t , nearly converging at $t=1$ that consistently exceed the HST ground truth. This behavior resists standard remedies such as classifier-free guidance [Ho and Salimans \[2022\]](#) and dense guidance [Zheng et al. \[2023a\]](#), [Zhang et al. \[2023\]](#). The low SNR of ground-based observations makes hallucinations nearly indistinguishable from faint real sources in intermediate states $\mathbf{x}_t$ ², and once a hallucination forms, the velocity field self-reinforces it at every subsequent step.

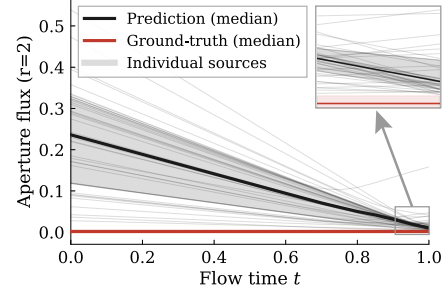


Figure 6: Aperture flux (sum) evolution of bright hallucinated sources along the ODE sampling trajectory. It starts from large-variance noise and converges to brightness levels exceeding the HST (red) at $t=1$.

Physical Forward-Model Consistency. Inspired by diffusion posterior sampling for inverse problems [Chung et al. \[2022\]](#), [Song et al. \[2023\]](#), we exploit the known physical forward model of the imaging system to enforce measurement consistency at every step of the flow-matching ODE. The DESI observation y is related to the latent high-resolution image x by a degradation operator A consisting of convolution with the point spread function followed by spatial downsampling:

$$y = A(x) + n, \quad A = D_s \circ H_{\text{PSF}}, \quad (6)$$

where H_{PSF} denotes convolution with a constant Gaussian PSF kernel h of width σ_{PSF} , D_s is $s \times$ area downsampling, and n is observation noise. Re-projecting the prediction $\hat{x}$ through A therefore exposes hallucinated sources as non-zero residuals against y . Concretely, at a discrete integration step i with current state $x^{(i)}$, we first compute a candidate update $\tilde{x}^{(i+1)}$ using the velocity field:

$$\tilde{x}^{(i+1)} = x^{(i)} + v_\theta(x^{(i)}, t_i, c) \Delta t, \quad (7)$$

and then measure the discrepancy between the candidate and the observation in the low-resolution pixel space:

$$r^{(i)} = A(\tilde{x}^{(i+1)}) - y. \quad (8)$$

This residual is then projected back to the high-resolution image via the adjoint operator $A^\top$ and used to produce the corrected state $x^{(i+1)}$ as:

$$x^{(i+1)} = \tilde{x}^{(i+1)} - \eta_i A^\top(r^{(i)}), \quad (9)$$

where η_i is a step-size schedule. Here, $D_s^\top(y)[p, q] = \frac{1}{s^2} y[\lfloor p/s \rfloor, \lfloor q/s \rfloor]$ is the strict inner-product adjoint of $s \times s$ area downsampling, and $H_{\text{PSF}}^\top = H_{\text{PSF}}$ because the Gaussian PSF is centrosymmetric. Both convolutions are realized as circular convolutions via FFT. However, naively

²We trained a U-Net to predict source masks from x_t on the DESI-HST dataset, obtaining an mIoU of only 11.3%.

applying Equation (9) in ODE sampling would accumulate PSF-scale smoothing across integration steps. This is because the adjoint $\mathbf{A}^\top = \mathbf{H}_{\text{PSF}}^\top \circ \mathbf{D}_s^\top$ contains the same PSF convolution as the forward operator $\mathbf{A}$, so every correction step convolves the residual with the PSF kernel before adding it back to $\mathbf{x}^{(i+1)}$. Over N integration steps, the smoothing accumulates and systematically widens the effective PSF of the reconstructed sources. An example toy model is provided in Appendix E.

Wiener-Deconvolved Correction. To preserve the resolution of the high-resolution estimate while still enforcing measurement consistency, we instead back-project the residual through a Wiener-regularized approximate adjoint of the rank-deficient $\mathbf{A}$, replacing the PSF adjoint in $\mathbf{A}^\top$ with a frequency-dependent reweighting. The correction signal is computed in the frequency domain using the 2D DFT $\mathcal{F}$ on the HR grid with circular boundary conditions, consistent with the FFT-based realization of $\mathbf{H}_{\text{PSF}}$ above, and $\mathbf{k}$ indexes its discrete frequencies. Given the PSF transfer function $H(\mathbf{k}) = \mathcal{F}[h]$, we define the Wiener correction kernel:

$$W(\mathbf{k}) = \frac{H^*(\mathbf{k})}{|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1}}, \quad (10)$$

where H^* is the complex conjugate and λ_{SNR} is a regularization parameter controlling the aggressiveness of the deconvolution. When $\lambda_{\text{SNR}} \rightarrow \infty$ the filter approaches the exact inverse H^{-1} ; when $\lambda_{\text{SNR}} \rightarrow 0$ it vanishes in magnitude but stays proportional to the matched filter $H^*(\mathbf{k})$ of Equation (9). The Wiener-corrected update then takes the form:

$$\mathbf{x}^{(i+1)} = \tilde{\mathbf{x}}^{(i+1)} - \eta_i \mathcal{F}^{-1} \left(W(\mathbf{k}) \cdot \mathcal{F}[\mathbf{D}_s^\top \mathbf{r}^{(i)}] \right), \quad (11)$$

where W is defined on the HR grid and acts on the HR-lifted residual $\mathbf{D}_s^\top \mathbf{r}^{(i)}$ through the same transfer function $H(\mathbf{k})$. With these strict adjoints, Equation (9) becomes the exact gradient step on $\frac{1}{2} \|\mathbf{A}(\mathbf{x}) - \mathbf{y}\|^2$, and Equation (11) replaces $\mathbf{H}_{\text{PSF}}^\top$ in this step with the Wiener kernel W . This prevents the cumulative PSF widening of repeated adjoint projections while retaining the hallucination-suppression property. Structures in $\tilde{\mathbf{x}}^{(i+1)}$ that are inconsistent with $\mathbf{y}$ still produce a non-zero residual in Equation (8) and are therefore penalized. The step size η_i follows a linear decay schedule $\eta_i = \eta_0(1 - i/N)$, applying stronger corrections at early steps when the trajectory is far from convergence and relaxing the constraint at late steps to allow the flow to refine fine details. The full inference procedure is summarized in Algorithm 1.

Algorithm 1 MC-FS: Measurement-Consistent Flow Sampling

Require: $v_\theta, \mathbf{y}, h, N, \eta_0, \text{SNR}$

- 1: $\mathbf{x}^{(0)} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$
 - 2: Precompute $W(\mathbf{k})$ via Equation (10)
 - 3: **for** $i = 0, \dots, N-1$ **do**
 - 4: $t_i \leftarrow i/N, \Delta t \leftarrow 1/N$
 - 5: $\tilde{\mathbf{x}}^{(i+1)} \leftarrow \mathbf{x}^{(i)} + v_\theta(\mathbf{x}^{(i)}, t_i, \mathbf{c}) \Delta t$
 - 6: $\mathbf{r}^{(i)} \leftarrow \mathbf{A}(\tilde{\mathbf{x}}^{(i+1)}) - \mathbf{y}$
 - 7: $\eta_i \leftarrow \eta_0(1 - i/N)$
 - 8: $\mathbf{x}^{(i+1)} \leftarrow \tilde{\mathbf{x}}^{(i+1)} - \eta_i \mathcal{F}^{-1}(W \cdot \mathcal{F}[\mathbf{D}_s^\top \mathbf{r}^{(i)}])$
 - 9: **end for**
 - 10: **return** $\mathbf{x}^{(N)}$
-

6 Experiment

Implementation Details. We train our OT-CFM using the UNet backbone outlined in Appendix D. Optimization uses AdamW (lr = 1e-4, weight decay = 1e-4) for 300 epochs at batch size 32, with linear warm-up and cosine decay, and an EMA weights decay of 0.9999. In inference, we sample 20 Euler steps with MC-FS correction. Each $\hat{x}$ is forward-projected through a Gaussian PSF ($\sigma_{\text{PSF}} = 2$ for both $\times 2$ and $\times 4$) and area-downsampling, and the residual against the DESI observation is Wiener-deconvolved ($\lambda_{\text{SNR}} = 50$) and subtracted with $\eta_0 = 0.5$. The detailed model architecture of our flow model is provided in Appendix D. All methods are trained on a single A100-80G GPU.

Baseline Methods. We compare our method against conventional Bicubic upsampling, recent regression-based approaches, including SwinIR Liang et al. [2021], HAT Chen et al. [2025b], and FISR Wu et al. [2025], as well as generative approaches, including cGAN Rai et al. [2025], GD-Net Shan et al. [2025], and AS-Bridge Zhang et al. [2026].

Evaluation Metric. We adopt PSNR and SSIM to evaluate photometric fidelity. To assess scientific accuracy, we extract source ellipsoid masks from the HST GT using SExtractor and compute the averaged Flux-L1 error, which measures the absolute flux deviation within source regions. Additional experiments on AstroSR Miao et al. [2024] and STAR Wu et al. [2025] are provided in Appendix F.

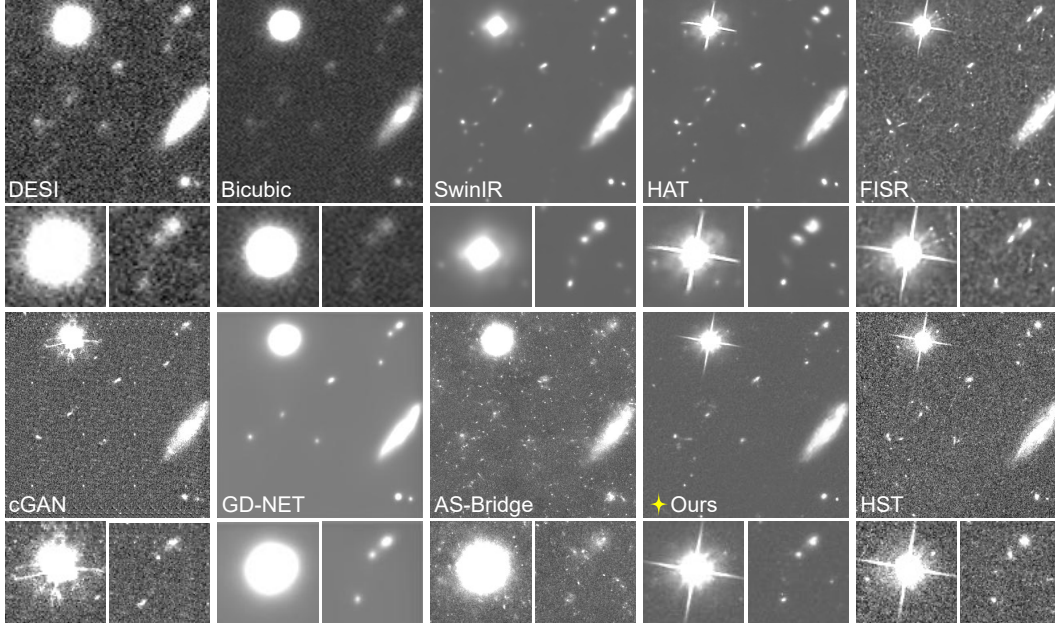


Figure 7: Qualitative comparison of baseline methods and FluxFlow on $\times 2$ super-resolution.

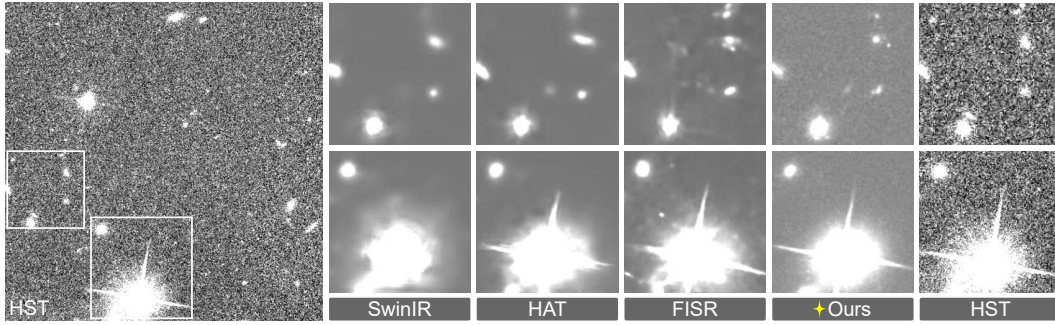


Figure 8: Qualitative comparison of baseline methods and FluxFlow on $\times 4$ super-resolution.

Table 2: Quantitative comparison at $\times 2$ and $\times 4$ on our DESI–HST super-resolution dataset.

Scale	Metric	Bicubic	SwinIR	HAT	FISR	cGAN	GD-Net	AS-Bridge	Ours
$\times 2$	PSNR $\uparrow$	26.69	31.22	31.31	30.93	28.88	28.82	28.38	31.23
	SSIM $\uparrow$	0.594	0.702	0.711	0.704	0.579	0.692	0.626	0.714
	Flux-L1 $\downarrow$	11.251	4.136	3.695	3.526	4.502	3.639	5.151	2.959
$\times 4$	PSNR $\uparrow$	22.74	29.15	29.21	29.02	26.48	24.64	24.72	29.14
	SSIM $\uparrow$	0.415	0.569	0.570	0.568	0.477	0.496	0.514	0.570
	Flux-L1 $\downarrow$	18.08	4.939	4.168	4.082	5.479	4.599	6.542	3.755

6.1 Quantitative and Qualitative Evaluation

Table 2 shows quantitative results at $\times 2$ and $\times 4$ on our DESI–HST dataset. FluxFlow obtains PSNR competitive with regression baselines, within 0.1 dB of the highest value at both scales, while achieving the best SSIM and Flux-L1 among all compared methods. For astronomical restoration, structural similarity and flux consistency are more informative indicators of reconstruction quality than pixel-level PSNR, as downstream scientific analysis depends directly on source morphology and integrated flux rather than on pixel-wise intensity agreement. Regression-based methods optimize a pixel reconstruction objective that favors mean predictions and suppresses high-frequency content, which inflates PSNR at the expense of the structural and photometric properties on which subsequent measurements rely. Figure 7 presents qualitative comparisons at $\times 2$. Regression-based methods tend to oversmooth high-frequency structures, whereas FluxFlow recovers fine details including the diffraction spikes around bright stars and the sharp cores of point sources. Generative methods produce sharper textures but often introduce unreliable detail, whereas our model preserves the

shape and orientation of extended galaxies and suppresses hallucinated sources in low signal-to-noise regions. FluxFlow thus produces reconstructions that combine perceptual sharpness with morphological and photometric fidelity, as required for scientific use of astronomical imagery.

7 Ablation Study




Figure 9: WHT weighting ablation. Defects (cosmic rays, drizzle gaps) in red boxes.

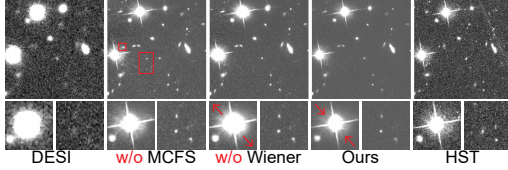


Figure 10: MC-FS and Wiener-deconvolved correction ablation. Hallucinations in red boxes.

Table 3: Ablation on photometry and detection metrics. *WHT* denotes inverse-variance weighting, *Src* denotes source-weighted loss, and MC-FS and Wiener correction are described in section 5.2.

Ablation	Photometry			Detection		
	PSNR $\uparrow$	SSIM $\uparrow$	FluxL1 $\downarrow$	Prec $\uparrow$	Rec $\uparrow$	F1 $\uparrow$
w/ VAE	28.90	0.593	5.075	0.859	0.211	0.3402
w/ Bridge	30.77	0.663	3.206	0.702	0.393	0.5019
w/o WHT	30.17	0.685	2.814	0.688	0.483	0.5272
w/o Src	31.16	0.711	3.098	0.729	0.464	0.5382
w/o MCFS	30.78	0.698	3.025	0.602	0.553	0.5256
w/o Wiener	30.79	0.699	3.031	0.708	0.448	0.5066
Ours	31.23	0.714	2.959	0.738	0.458	0.5412

Inverse-Variance and Source-Region Weighting. Figure 9 visualizes a region containing a cosmic-ray trail and a drizzle chip-gap in the HST ground truth. Without the WHT term defined in Equation (5), the velocity field treats these defects as valid targets and reproduces them in the reconstruction. The WHT-weighted variant suppresses their gradients and yields a clean output, and Table 3 reports the corresponding drops in PSNR, F1, and precision. The marginally lower Flux-L1 of w/o WHT is an acceptable trade-off, since it arises from fitting drizzle artifacts that overlap with source apertures. The w/o source-weight variant similarly degrades, as a uniform loss is dominated by background pixels and cannot preferentially preserve the faint outer galaxy profiles that carry morphological and PSF-shape information. The two weights are complementary, with WHT filtering data quality and source-weight emphasizing scientifically informative regions.

Measurement-Consistent Sampling. We ablate MC-FS and the Wiener-regularization separately to isolate their roles. Without MC-FS, the sampler produces compact hallucination sources shown in Figure 10, and Table 3 reports the highest recall together with a precision collapse, as these spurious peaks inflate false positives and pull F1 below the full model. The w/o Wiener variant replaces the Wiener correction of Equation (11) with the raw adjoint of Equation (9) and visibly broadens the reconstructed PSF via the cumulative smoothing of Appendix E.2. The broadened response smears source flux beyond the target apertures into the background, and Table 3 reports a uniform photometric degradation across PSNR, SSIM, and Flux-L1. Our full model attains the strongest photometric scores together with the best detection F1, confirming that both inference-time components are necessary. Additional ablation studies on latent-space and bridge-based OT-CFM, hyperparameters, and visualizations of detection-outcome are provided in Appendix G and Appendix I.

8 Conclusion

We present FluxFlow, a conservative flow-matching framework for ground-to-space astronomical super-resolution. The training objective weights the velocity loss by per-pixel inverse variance and source-region importance, and the measurement-consistent sampling enforces physical consistency through a Wiener-regularized back-projection. We further curate the DESI-HST dataset, a real paired benchmark with authentic atmospheric PSF variation. Experiments show that FluxFlow delivers superior photometric and scientific accuracy over existing baselines.

Limitation. Hallucinations are suppressed rather than eliminated, and scientific accuracy still falls short of what precision astronomical measurements demand. Future work will extend FluxFlow to multi-band joint reconstruction and uncertainty-calibrated sampling to improve the SNR.



Hubble Space Telescope (HST)



Dark Energy Spectroscopic Instrument (DESI)

Figure 11: The two instruments behind our data. Left: the Hubble Space Telescope (HST), the space-based source of our high-resolution targets (credit: NASA). Right: the Mayall 4-meter telescope at Kitt Peak National Observatory, which hosts the Dark Energy Spectroscopic Instrument (DESI) and provides the ground-based low-resolution inputs (credit: KPNO/NOIRLab/NSF/AURA/T. Slovinský).

A Survey Data and Instrument Characteristics

To fully appreciate the complexity of mapping the ground-based low-resolution (LR) observations to the space-based high-resolution (HR) targets, it is necessary to detail the disparate instrument characteristics (see Figure 11) and image co-addition pipelines of the DESI Legacy Imaging Surveys and the Hubble Space Telescope (HST), whose overlapping observational footprints are shown in Figure 12.

A.1 DESI Legacy Surveys: Ground-Based Seeing and Co-addition

The LR images from the DESI Legacy Imaging Surveys are fundamentally limited by atmospheric turbulence, which blurs the astronomical signal into a seeing-limited Point Spread Function (PSF). The i -band data ($\sim 7600\text{--}8730\text{ \AA}$) utilized in our benchmark, which offers the closest spectral match to the HR targets, is primarily acquired by the Dark Energy Camera (DECam), a 570-megapixel wide-field imager mounted at the prime focus of the Victor M. Blanco 4-meter telescope at the Cerro Tololo Inter-American Observatory (CTIO).

Despite the substantial light-gathering power of the 4-meter primary mirror, ground-based observations are subject to atmospheric degradation. With DECam's native pixel scale of $0.262''/\text{pixel}$, the typical seeing Full Width at Half Maximum (FWHM) for these observations ranges from $1.0''$ to $1.3''$. The final LR images provided in our benchmark are co-added mosaics. The data processing pipeline maps multiple individual dithered exposures onto a common predefined sky footprint (often referred to as "bricks"). This co-addition process includes sky-background subtraction, astrometric calibration, and standard inverse-variance weighting. While this improves the signal-to-noise ratio (SNR) and depth, the resulting images still inherently suffer from the spatially varying PSF blur and elevated sky background noise intrinsic to ground-based optical astronomy.

A.2 HST ACS/WFC: Space-Based Optics and Astrodrizzle

In contrast, the HR targets are obtained by the Hubble Space Telescope (HST), which orbits at an altitude of approximately 540 km. Operating entirely above the Earth's atmosphere, HST's 2.4-meter primary mirror delivers a highly stable, diffraction-limited PSF that is entirely immune to atmospheric seeing. The Advanced Camera for Surveys Wide Field Channel (ACS/WFC) in the F814W filter

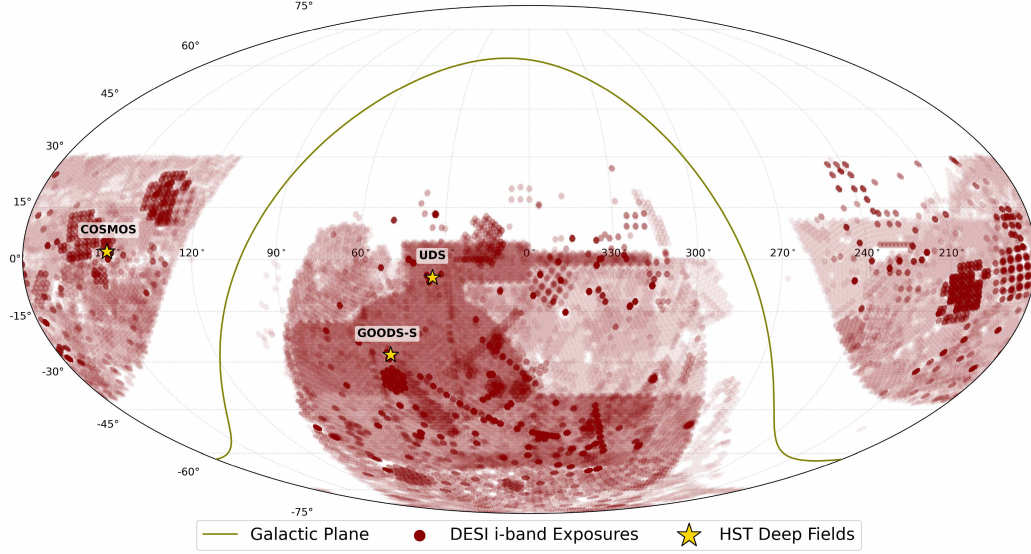


Figure 12: The footprint of the Legacy Surveys (DR10) i-band observations (dark red) overlaid with the locations of three equatorial and southern HST deep fields: COSMOS, UDS, and GOODS-S (gold stars). The olive green curve indicates the Galactic plane.

($\sim 7000\text{--}9500\text{ \AA}$) serves as the primary instrument for our HR data. It consists of two 2048×4096 pixel charge-coupled devices (CCDs) separated by a physical chip gap, delivering a native pixel scale of approximately $0.05''/\text{pixel}$.

As introduced in the main text, raw HST exposures inherently suffer from this detector undersampling and transient cosmic-ray events. To mitigate these issues and achieve the final $0.03''/\text{pixel}$ grid, the HST pipeline employs the Astrodrizzle algorithm, which combines multiple sub-pixel dithered exposures. Instead of a simple direct co-addition, the algorithm geometrically shrinks the footprint of the input pixels (controlled by the *pixfrac* parameter) and "drizzles" their flux onto a finer output grid. This sub-pixel interlacing effectively recovers high-frequency spatial structures that approach the optical diffraction limit of the 2.4-meter aperture, successfully bridging the gap between the native $0.05''$ detector resolution and the final $0.03''$ product.

A.3 Inverse-Variance Weight Maps for HST Observations

Concurrently, the generation of the HST inverse-variance weight maps (*wht*) is mathematically deterministic and crucial for our benchmark. Fundamentally, the value of each pixel in these maps represents the inverse variance ($1/\sigma^2$) of the measured flux. This variance (σ^2) is not an arbitrary metric but is rigorously derived from the intrinsic hardware characteristics of the ACS/WFC CCDs and the physics of photon counting. Specifically, the pipeline calculates the total noise per pixel by modeling the detector's read noise (electronic noise generated during signal readout), dark current (thermal electron accumulation), and the Poisson noise originating from the sky background.

During the Astrodrizzle process, as multiple dithered exposures are mapped onto the final output grid, these individual pixel variances are mathematically propagated. Because the final HR mosaic is constructed from these frames with varying overlap footprints, the effective signal-to-noise ratio (SNR) is intrinsically non-uniform across the field of view.

The weight maps strictly quantify this variance pixel-by-pixel. They assign zero or minimal weights to regions that are heavily affected by ACS/WFC detector chip gaps, saturated pixels, or masked cosmic-ray trails. In the context of our super-resolution benchmark, providing these weight maps ensures that subsequent computational analyses, specifically the loss calculation in deep learning models, are strictly guided by valid physical signals. Models are therefore penalized only for failing to reconstruct genuine astronomical structures, rather than for hallucinating interpolated instrumental artifacts.

B Precision WCS-Based Image Registration

To learn reliable cross-device mappings, eliminating translational, rotational, and geometric distortions between the ground-based and space-based platforms is a prerequisite. We achieve absolute spatial anchoring by utilizing the World Coordinate System (WCS) metadata embedded within the Flexible Image Transport System (FITS) headers of both instruments.

The WCS framework provides a rigorous non-linear mathematical transformation mapping 2D detector coordinates (x, y) to absolute celestial coordinates (Right Ascension α and Declination δ in the J2000 epoch), while properly accounting for telescope-specific focal plane distortions. Because our objective is to map DESI observations to higher-resolution HST counterparts at exact scaling factors ($\times 2$ and $\times 4$), we establish a common celestial reference grid anchored directly to the DESI footprint.

We establish the native DESI pixel grid as the absolute spatial reference, retaining the DESI coadds at native resolution to preserve their noise properties and PSF. Based on this anchor, we define a corresponding high-resolution grid that precisely inherits the DESI tangent plane center and orientation, with its pixel scale divided by the targeted super-resolution factor. The HST exposures are then mathematically reprojected and flux-conservingly downsampled onto this customized grid via their native WCS metadata, achieving exact pixel-level alignment.

Finally, the resulting perfectly aligned LR–HR pairs are cropped into spatially corresponding patches to produce the final dataset elements, yielding HR targets structured at 256×256 and 512×512 resolutions for the $\times 2$ and $\times 4$ scales, respectively. This strict astrometric registration eliminates spurious spatial shifts, compelling the neural network to learn genuine morphological transformations rather than compensating for coordinate misalignments.

C Additional Related Works

MC-FS draws on a line of research that injects measurement-consistency corrections into the sampling trajectories of generative models for inverse problems. We clarify its relationship to the most relevant prior approaches.

C.1 Diffusion Posterior Sampling

Diffusion Posterior Sampling (DPS) [Chung et al. \[2022\]](#) approximates the posterior score by adding to each reverse diffusion step a gradient of the log-likelihood evaluated at the Tweedie estimate $\hat{\mathbf{x}}_0(\mathbf{x}_t)$ using:

$$\mathbf{x}_{t-1} \leftarrow \mathbf{x}_{t-1}^{\text{prior}} - \zeta \nabla_{\mathbf{x}_t} \|\mathbf{y} - \mathbf{A}(\hat{\mathbf{x}}_0(\mathbf{x}_t))\|^2. \quad (12)$$

The gradient propagates through the denoiser via automatic differentiation, so DPS effectively composes the Jacobian of the score network with $\mathbf{A}^\top$. Pseudoinverse-Guided Diffusion Models (IIGDM) [Song et al. \[2023\]](#) replace $\mathbf{A}^\top$ with the Moore–Penrose pseudoinverse $\mathbf{A}^+$ to obtain a more accurate posterior approximation, again applied to the Tweedie estimate.

MC-FS departs from this template in three respects. First, the residual is computed at the current flow state $\tilde{\mathbf{x}}^{(i+1)}$ rather than at a Tweedie estimate [Chung et al. \[2022\]](#), which is natural in the OT-CFM formulation [Lipman et al. \[2022\]](#), [Tong et al. \[2023\]](#) where the interpolant is already a convex combination of source and target. We treat this choice as a deliberate early-trajectory data-injection heuristic rather than as an approximate posterior gradient, since MC-FS performs constrained sampling toward $\mathcal{C}(\mathbf{y})$ instead of approximating $\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t | \mathbf{y})$. Under the OT-CFM linear interpolant $\mathbf{x}_t = (1 - t) \mathbf{x}_0 + t \mathbf{x}_1$ and a linear forward operator, the projected interpolant satisfies $\mathbf{A}(\tilde{\mathbf{x}}^{(i+1)}) \approx t \mathbf{y} + (1 - t) \mathbf{A}(\mathbf{x}_0)$, and penalizing the residual $\mathbf{A}(\tilde{\mathbf{x}}^{(i+1)}) - \mathbf{y}$ at small t therefore pulls the trajectory toward $\mathcal{C}(\mathbf{y})$ rather than along an unconstrained generative direction. We view this as exactly the regularization needed for hallucination suppression. Trajectory components inconsistent with $\mathbf{y}$ are damped from the very first step, before the velocity field can sharpen them into spurious structures. Replacing $\tilde{\mathbf{x}}^{(i+1)}$ with a Tweedie-style one-step estimate would require an additional clean-image predictor and would, by construction, weaken the corrective signal at small t where the prior is most uncertain. Second, the back-projection is performed via a Wiener-regularized inverse rather than via $\mathbf{A}^\top$ or $\mathbf{A}^+$, avoiding the cumulative PSF widening analyzed in [Section E.3](#).

Table 4: Comparison of MC-FS with diffusion-based posterior sampling methods. In the Residual point column, $\hat{\mathbf{x}}_0(\mathbf{x}_t)$ is the Tweedie estimate of the clean image obtained by one-step denoising the noisy diffusion state $\mathbf{x}_t$, whereas $\tilde{\mathbf{x}}^{(i+1)}$ is the current OT-CFM interpolant, a convex combination of source and target rather than a noisy state, and is used directly without a denoising step.

Method	Generative backbone	Residual point	Back-projection	Autograd through network
DPS Chung et al. [2022]	Diffusion	$\hat{\mathbf{x}}_0(\mathbf{x}_t)$	$\mathbf{A}^\top$ via Jacobian	Required
IIGDM Song et al. [2023]	Diffusion	$\hat{\mathbf{x}}_0(\mathbf{x}_t)$	Pseudoinverse $\mathbf{A}^+$	Required
MC-FS (ours)	Flow matching	$\tilde{\mathbf{x}}^{(i+1)}$	Wiener-regularized inverse	Not required

Third, no automatic differentiation through the velocity network is required, which makes each correction step substantially cheaper and decouples the correction from the network architecture. Table 4 summarizes these differences.

C.2 Plug-and-Play Frameworks For Inverse Problems

From a broader perspective, MC-FS fits naturally into the plug-and-play (PnP) framework for inverse problems [Venkatakrishnan et al. \[2013\]](#), [Romano et al. \[2017\]](#), [Zhang et al. \[2021\]](#), [Hurault et al. \[2022\]](#), [Kamilov et al. \[2023\]](#), [Zhu et al. \[2023\]](#). PnP methods alternate between a denoising step that enforces image plausibility and a data-fidelity step that enforces consistency with the measurement model. In MC-FS, the velocity update of Equation (7) plays the role of the prior step, with the prior implicitly encoded in the learned velocity field v_θ , while the Wiener correction of Equation (11) plays the role of the data-fidelity step, implementing a regularized proximal operator for $\mathcal{D}(\mathbf{x}) = \frac{1}{2}\|\mathbf{A}(\mathbf{x}) - \mathbf{y}\|^2$. MC-FS can thus be viewed as a flow-matching instantiation of PnP in which the denoising prior is replaced by a continuous-time generative trajectory and the data-fidelity proximal step is implemented via Wiener deconvolution rather than the more common conjugate-gradient or ADMM updates.

This connection clarifies why MC-FS does not constitute posterior sampling in the strict Bayesian sense. Whereas DPS and IIGDM are derived as approximations to $\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t | \mathbf{y})$, MC-FS performs a constrained sampling procedure that alternates between unconstrained generative dynamics and a hard projection toward the measurement-consistency set $\mathcal{C}(\mathbf{y})$. The two viewpoints are complementary: posterior sampling provides probabilistic guarantees under a well-specified likelihood, while constrained sampling provides direct control over physical consistency without requiring explicit likelihood modeling.

C.3 Flow-Matching for Inverse Problems

A growing body of work studies flow matching directly in pixel space with various weighting and parameterization choices [Chen et al. \[2025c\]](#), [Gagneux et al. \[2026\]](#), and develops flow-matching solvers and priors specifically tailored to linear inverse problems [Pourya et al. \[2025\]](#), [Zhang et al. \[2024b\]](#). WienerFlow [Zeng et al. \[2025\]](#) introduces Wiener-adaptive flow matching in the related setting of low-light image enhancement and is closest in spirit to MC-FS, although our derivation targets the rank-deficient ground-to-space super-resolution operator and explicitly couples Wiener regularization to the per-step adjoint correction. Related work also studies time conditioning across disjoint noisy data manifolds in diffusion models [Li et al. \[2026\]](#). In astronomy, score-based generative priors have been applied to multi-band source separation [Sampson et al. \[2024\]](#) and broader astrophysical applications [Ting \[2025\]](#); FluxFlow complements these by focusing on the photometrically conservative ground-to-space mapping under realistic atmospheric PSFs.

C.4 Broader sRGB-Domain Restoration

In the 2D image domain, recent work spans data-centric denoising [Chang et al. \[2026a\]](#), training-free ensembling [Chang et al. \[2026b\]](#), and adverse-condition image enhancement [Ge et al. \[2026b\]](#). In remote sensing, infrared image super-resolution has been explored [Ge et al. \[2026a\]](#). In 3D, related efforts cover neural field rendering with media interaction [Liu et al. \[2025d\]](#), structural-prior multi-view reconstruction [Liu et al. \[2025c\]](#), scene reconstruction under adverse weather [Liu et al. \[2025b\]](#),

and physically-degraded multi-view benchmarks Liu et al. [2025a, 2026a]. These pipelines operate on three-channel or multi-view RGB inputs rather than calibrated single-band photometry.

D Implementation Details

Source Label on Ground-truth. Ground-truth instance labels are produced by running SEP Bertin and Arnouts [1996], Barbary [2016] on each HST cutout, using the accompanying weight map to construct a validity mask in which pixels with non-positive weight are excluded from both the background statistics and the detection step. We estimate the local sky on a 32×32 mesh with no additional median filtering, subtract the resulting background plane from the science image, and obtain a per-pixel noise standard deviation from the same background model. Sources are then extracted by thresholding the background-subtracted image at $2\times$ the local RMS and retaining connected components of at least 5 pixels. SEP returns a segmentation map together with a structured catalog. We store the segmentation map as a 32-bit integer array in which the value 0 denotes background and each positive integer is a unique source identifier starting from one. The catalog records the centroid coordinates, the Kron ellipse parameters of semi-major axis, semi-minor axis, and position angle, the pixel count of each source, and the SEP extraction flag. Source identifiers in the catalog are aligned by construction with the labels of the segmentation map, so that selecting all pixels with a given label directly recovers the spatial support of the corresponding catalog entry. This labelling defines the reference set used by the detection metric in the main text and by the per-source flux comparison reported in the supplementary tables.

Flux-L1 Metric. Using the segmentation map and Kron-ellipse parameters produced above, we form an elliptical aperture mask M_k for each of the K ground-truth sources and integrate the aperture flux on both the prediction and the HR ground-truth with the SEP sum estimator. The per-image error is the absolute deviation of integrated flux per source, summed over all K ground-truth sources, and aggregating across the test set then yields the macro-averaged Flux-L1 reported in Table 2:

$$\text{Flux-L1} = \sum_{k=1}^K \left| \sum_{p \in M_k} \hat{x}_p - \sum_{p \in M_k} x_p^* \right|, \quad (13)$$

where $\hat{x}$ denotes the prediction and x^* the HR ground-truth.

Source Detection on Prediction. To quantify hallucination in the predicted images, we run the same detection pipeline independently on the prediction and on the HR ground-truth, match the two catalogues, and report the per-image macro-averaged precision, recall, and F1 in the detection columns of Table 3. We assess source recovery through a three-stage pipeline that compares each prediction against a ground-truth label mask. For every predicted high-resolution image, we first replace invalid pixels with zeros and estimate a local sky background with SEP on a 64×64 grid. After subtracting this background plane we extract sources using a detection threshold of $2\times$ the local background RMS, requiring at least 5 connected pixels per candidate. Deblending operates over 32 contour levels with a flux-contrast threshold of 0.02, splitting overlapping blobs whose sub-peaks rise above this fraction of the parent flux. The reported sub-pixel centroids of the surviving detections form the predicted catalogue. On the ground-truth side, the integer label mask assigns each positive value to one source. We discard labels covering fewer than 10 pixels to suppress fragmentary annotations, and the geometric centroid of every remaining label is computed as the unweighted mean of its pixel coordinates, with no flux weighting applied.

Predicted and ground-truth centroids are then aligned through greedy nearest-first one-to-one matching. We build the pairwise squared-distance matrix between the two sets, retain only candidate pairs whose separation falls within a small tolerance of 10 pixels, and sort the survivors by ascending distance. Walking through this sorted list, the first pair whose prediction and ground-truth are both still unclaimed is registered as a true positive, after which both endpoints are marked used so that any later pair reusing either of them is skipped. Predictions left without a partner contribute false positives, and unmatched ground-truth sources contribute false negatives. We compute precision, recall, and F1 per image and aggregate over all test samples by averaging the per-image scores, giving every image equal weight regardless of how many sources it contains and preventing dense scenes from masking failures on sparse ones.

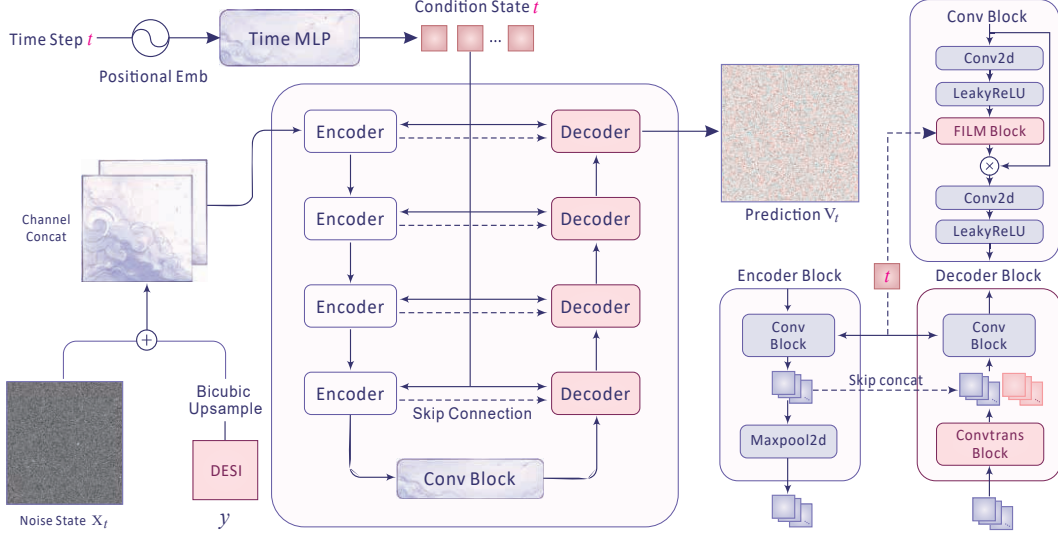


Figure 13: Architecture of the FluxFlow velocity network v_θ . A conditional U-Net takes the channel-wise concatenation of the noisy state $\mathbf{x}_t$ and the bicubic-upsampled DESI observation $\mathbf{y}$, and predicts the OT-CFM velocity v_θ on the HR grid; time conditioning enters every Conv Block via FiLM modulation.

Table 5: End-to-end training time on a single NVIDIA A100-80GB GPU at $\times 2$ and $\times 4$ scales.

Method	SwinIR	HAT	FISR	cGAN	GD-Net	AS-Bridge	Ours
$\times 2$	94h	552h	94h	8h	5h	144h	16h
$\times 4$	98h	549h	176h	16h	184h	360h	47h

Model Architecture. The velocity network v_θ is a conditional U-Net operating directly in pixel space, illustrated in Figure 13. The DESI observation $\mathbf{y}$ is first lifted to the HR grid via bicubic upsampling and concatenated channel-wise with the noisy state $\mathbf{x}_t$ to form the network input. The encoder is a stack of *Encoder Blocks*, each applying a Conv Block followed by 2×2 max-pooling that halves the spatial resolution and doubles the channel count from `base_dim=48`; a bottleneck Conv Block sits at the lowest resolution. The symmetric decoder mirrors this pyramid with *Decoder Blocks* that upsample via a transposed-convolution layer (*ConvTrans Block*) and fuse skip connections from the matching encoder level, producing the OT-CFM velocity prediction v_θ on the HR grid. Each Conv Block is a Conv2d–LeakyReLU–FiLM–Conv2d–LeakyReLU stack in which the FiLM layer Perez et al. [2018] applies a feature-wise affine modulation conditioned on the time-conditioning state τ , so that the time signal is injected at every resolution. The time step $t \in [0, 1]$ is mapped to τ by a sinusoidal positional embedding followed by a two-layer MLP with output dimension 256. The two scale settings ($\times 2$ and $\times 4$) share this architecture exactly and differ only in the spatial resolution of $\mathbf{x}_t$ and the upsampled condition.

Pixel Normalization. The DESI and HST cutouts have a wide intrinsic dynamic range in their native flux units (nanomaggies). Before training, we compute global intensity clip thresholds at the 0.01% tail percentiles of all pixels in the training split to suppress extreme values caused by cosmic rays and hot pixels Liu et al. [2026b], which would otherwise dominate the normalization range. One threshold pair is computed for the LR set and another for the HR set, both estimated once on the training split and frozen across all experiments. The clipped pixels are then linearly min–max rescaled to $[0, 1]$ using the global per-modality flux extrema. Both training and inference operate in this normalized domain, and PSNR/SSIM are reported in the same domain so that the maximal value is exactly 1 and the metrics are directly comparable across methods. For the Flux-L1 metric, we denormalize the predictions back to nanomaggies before computing the per-source aperture flux deviation defined in Equation (13), so that the reported flux errors carry their original physical units.

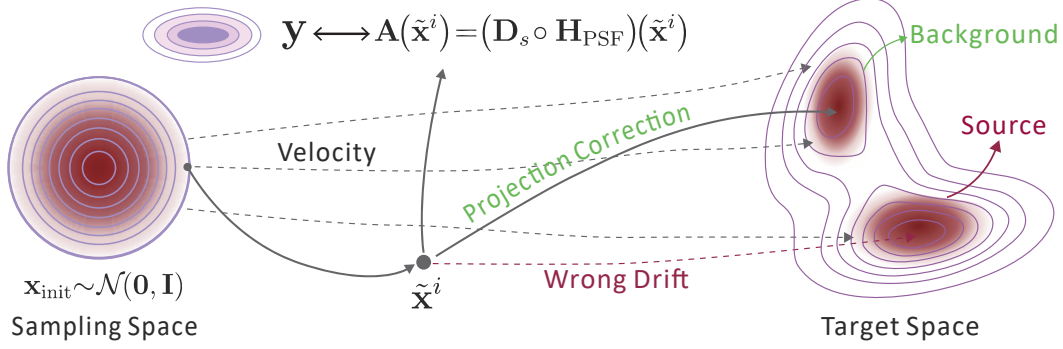


Figure 14: Conceptual illustration of MC-FS. The flow transports $\mathbf{x}_{\text{init}} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ toward the target space, but the learned velocity may drift the candidate $\tilde{\mathbf{x}}^i$ toward a hallucinated source (red). MC-FS compares $\mathbf{y}$ with $\mathbf{A}(\tilde{\mathbf{x}}^i)$ (Section 5.2) to expose this inconsistency and induce a projection correction (green) that pulls the trajectory back toward modes consistent with the observation.

Forward-Model PSF Calibration. The Gaussian PSF width $\sigma_{\text{PSF}} = 2$ used in the MC-FS forward operator defined in Equation (6) is calibrated directly on the paired DESI–HST training set. For each training pair we forward-project the HST high-resolution image through a candidate Gaussian-blur followed by $s \times s$ area-downsampling, and compute the validity-masked mean-squared error against the corresponding DESI observation. Sweeping σ on a fine grid and taking the value that minimizes this error averaged across the training set yields the data-driven optimum $\sigma^* = 1.92$. We round this to the integer value $\sigma_{\text{PSF}} = 2$ used throughout inference. The resulting kernel is also consistent with the median DECam i -band seeing reported in Appendix A.

Training Details. We train the velocity network v_θ of Figure 13 with the OT-CFM objective. For each sample we draw $x_0 \sim \mathcal{N}(0, I)$ and $t \sim \mathcal{U}(0, 1)$, form the linear interpolant $x_t = (1-t)x_0 + tx_1$ with target velocity $u_t = x_1 - x_0$, and regress $v_\theta(x_t, t, c)$ against u_t under the spatially-weighted MSE defined in Equation (5). On top of the optimizer setting reported in the main text, we apply gradient-norm clipping at 1.0 and a 1000-step linear warm-up before cosine decay to zero, and run training in fp32. The EMA model is evaluated every 20 epochs by Euler-sampling 20 steps from pure Gaussian noise, reporting MSE/PSNR in the normalized HST domain together with total-flux error in the original flux units.

Training Time. We report the end-to-end training time of FluxFlow and all baselines in Table 5, measured on a single NVIDIA A100-80GB GPU under an identical schedule budget. FluxFlow trains in 16h at $\times 2$ scale and 47h at $\times 4$ scale, substantially faster than the Transformer regression baseline HAT which needs over 540 hours and the bridge-based generative baseline AS-Bridge which needs 144 to 360 hours, while matching the photometric and detection metrics reported in Tables 2 and 3.

E Analysis of Measurement-Consistent Flow Sampling

This section provides the theoretical justification for the measurement-consistent flow sampling (MC-FS) scheme of Section 5.2, illustrated conceptually in Figure 14, explaining why a forward-model correction is required, how the Wiener kernel is derived, and why it outperforms the naive adjoint. Section E.1 formulates the consistency set $\mathcal{C}(\mathbf{y})$ induced by the rank-deficient forward operator $\mathbf{A}$ and identifies hallucination as trajectories that exit it. Section E.2 derives the Wiener correction kernel $W(\mathbf{k})$ from the MMSE principle and exhibits its inverse-filter and matched-filter limits. Section E.3 carries out a frequency-domain analysis showing that naive adjoint back-projection contracts high-frequency modes at a rate $\propto |H(\mathbf{k})|^2$, producing cumulative PSF-scale smoothing across integration steps. Section E.4 closes the argument with a closed-form Gaussian-PSF toy model in which the Wiener correction simultaneously fixes both the slow high-frequency convergence and the noise-amplification pathology of the adjoint.

E.1 Forward-Model Consistency for Ill-Posed Image Super-Resolution

Astronomical super-resolution is a severely ill-posed inverse problem. Given the forward model:

$$\mathbf{y} = \mathbf{A}(\mathbf{x}) + \mathbf{n}, \quad \mathbf{A} = \mathbf{D}_s \circ \mathbf{H}_{\text{PSF}}, \quad (14)$$

the operator $\mathbf{A}$ is rank-deficient: spatial downsampling $\mathbf{D}_s$ collapses an $H_{\text{hr}} \times W_{\text{hr}}$ image into an $H_{\text{lr}} \times W_{\text{lr}}$ observation, discarding $(s^2 - 1)/s^2$ of the spatial degrees of freedom, while PSF convolution $\mathbf{H}_{\text{PSF}}$ further attenuates high-frequency content. Consequently, the set of high-resolution images $\mathbf{x}$ consistent with a given DESI observation $\mathbf{y}$ forms a high-dimensional affine subspace:

$$\mathcal{C}(\mathbf{y}) = \{\mathbf{x} \in \mathbb{R}^{H_{\text{hr}} \times W_{\text{hr}}} : \|\mathbf{A}(\mathbf{x}) - \mathbf{y}\|^2 \leq \epsilon\}, \quad (15)$$

where ϵ accounts for the noise level $\|\mathbf{n}\|^2$. The role of the flow matching prior v_θ is to select, from this enormous consistency set, samples that also lie on the data manifold of plausible HST-quality images.

Hallucination sources arise precisely when the learned prior steers samples outside $\mathcal{C}(\mathbf{y})$. Because v_θ is trained on a finite paired dataset and the conditioning signal $\mathbf{c}$ from a single DESI cutout is itself low-information, the velocity field can confidently sharpen a noise fluctuation into a source-like morphology that has no preimage under $\mathbf{A}$ in $\mathbf{y}$. Such a structure is, by definition, inconsistent with the physical observation and therefore unphysical regardless of how realistic it appears.

Forward-model consistency correction directly addresses this failure mode by projecting the trajectory back toward $\mathcal{C}(\mathbf{y})$ at every integration step. Concretely, each ODE update is followed by a gradient step on the data-fidelity term:

$$\mathcal{D}(\mathbf{x}) = \frac{1}{2} \|\mathbf{A}(\mathbf{x}) - \mathbf{y}\|^2, \quad (16)$$

whose gradient evaluates to $\nabla_{\mathbf{x}} \mathcal{D}(\mathbf{x}) = \mathbf{A}^\top (\mathbf{A}(\mathbf{x}) - \mathbf{y})$. Any structure in the current estimate $\tilde{\mathbf{x}}^{(i+1)}$ without a counterpart in $\mathbf{y}$ produces a non-zero forward residual $\mathbf{r}^{(i)} = \mathbf{A}(\tilde{\mathbf{x}}^{(i+1)}) - \mathbf{y}$, which is in turn used to attenuate the offending structure. Real sources, by contrast, contribute negligibly to $\mathbf{r}^{(i)}$ and are preserved. The correction is thus selective by construction, penalizing inconsistency with $\mathbf{y}$ rather than source-like content per se.

E.2 Derivation of the Wiener Correction Kernel

We derive the Wiener correction kernel $W(\mathbf{k})$ of Equation (10) from the minimum mean-square error (MMSE) principle. Consider the deconvolution sub-problem at integration step i . Given an upsampled residual $\mathbf{r}_\uparrow^{(i)} = \mathbf{D}_s^\top(\mathbf{r}^{(i)})$ on the high-resolution grid, we seek a high-resolution correction signal $\boldsymbol{\rho}^{(i)}$ such that $\mathbf{H}_{\text{PSF}}(\boldsymbol{\rho}^{(i)}) \approx \mathbf{r}_\uparrow^{(i)}$ in the presence of measurement noise. This order of operations matches the strict-adjoint update in Equation (11), with $H(\mathbf{k})$ and the residual it acts on both defined on the HR grid.

Working in the Fourier domain, let $H(\mathbf{k}) = \mathcal{F}[h]$ denote the optical transfer function of the PSF kernel h , and assume the correction signal admits a wide-sense stationary spectral representation with power spectral density $\Phi_\rho(\mathbf{k})$, while the noise has power σ_n^2 . The Wiener filter is the linear estimator $\boldsymbol{\rho}^{(i)} = w * \mathbf{r}_\uparrow^{(i)}$ that minimizes the mean-square error:

$$\text{MSE}(w) = \mathbb{E} \left[\|\boldsymbol{\rho}^{(i)} - w * \mathbf{r}_\uparrow^{(i)}\|^2 \right]. \quad (17)$$

Setting the variation $\partial \text{MSE} / \partial w = 0$ and solving in the Fourier domain [Wiener \[1949\]](#) yields the optimal filter:

$$W(\mathbf{k}) = \frac{H^*(\mathbf{k}) \Phi_\rho(\mathbf{k})}{|H(\mathbf{k})|^2 \Phi_\rho(\mathbf{k}) + \sigma_n^2} = \frac{H^*(\mathbf{k})}{|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1}(\mathbf{k})}, \quad (18)$$

where $\lambda_{\text{SNR}}(\mathbf{k}) = \Phi_\rho(\mathbf{k}) / \sigma_n^2$ is the frequency-dependent signal-to-noise ratio. In practice we replace $\lambda_{\text{SNR}}(\mathbf{k})$ by a single global constant $\lambda_{\text{SNR}} = 50$, recovering the form in Equation (10). This simplification avoids estimating the full power spectrum of the residual and treats the regularization parameter as a tunable hyperparameter.

Limiting Behaviors. Two extreme regimes provide intuition. As $\lambda_{\text{SNR}} \rightarrow \infty$, the noise term vanishes and Equation (18) reduces to the exact inverse filter:

$$W(\mathbf{k}) \rightarrow \frac{H^*(\mathbf{k})}{|H(\mathbf{k})|^2} = \frac{1}{H(\mathbf{k})}, \quad (19)$$

This regime maximally amplifies high frequencies but is unstable wherever $H(\mathbf{k}) \approx 0$. Conversely, as $\lambda_{\text{SNR}} \rightarrow 0$, the regularization dominates the denominator and the filter magnitude vanishes

$$W(\mathbf{k}) \rightarrow \lambda_{\text{SNR}} H^*(\mathbf{k}) \rightarrow 0, \quad (20)$$

whose frequency-response shape remains proportional to the matched filter $H^*(\mathbf{k})$, equivalent up to scaling to the adjoint $\mathbf{H}_{\text{PSF}}^\top$ of Equation (9). The Wiener kernel thus interpolates continuously between the two extremes, and λ_{SNR} controls how aggressively the deconvolution restores high-frequency content suppressed by the PSF.

E.3 Spectral Analysis of Adjoint Backprojection

The qualitative claim in Section 5.2 that naive adjoint back-projection accumulates PSF-scale smoothing across integration steps admits a precise frequency-domain characterization. For clarity we ignore the downsampling operator $\mathbf{D}_s$ in this analysis and focus on the PSF component $\mathbf{H}_{\text{PSF}}$, which is responsible for the resolution loss. The downsampling step contributes additional aliasing but does not alter the qualitative conclusion.

Consider a single Fourier mode at spatial frequency $\mathbf{k}$. After the velocity update of Equation (7), the candidate state has Fourier amplitude $\tilde{X}^{(i+1)}(\mathbf{k})$. The adjoint correction of Equation (9) can be written in the Fourier domain as:

$$X^{(i+1)}(\mathbf{k}) = \tilde{X}^{(i+1)}(\mathbf{k}) - \eta_i |H(\mathbf{k})|^2 \tilde{X}^{(i+1)}(\mathbf{k}) + \eta_i H^*(\mathbf{k}) Y(\mathbf{k}), \quad (21)$$

since $\mathbf{A}^\top \mathbf{A}$ acts in the Fourier domain as multiplication by $|H(\mathbf{k})|^2$. Restricting attention to the homogeneous part gives the per-step transfer function:

$$G_i(\mathbf{k}) = 1 - \eta_i |H(\mathbf{k})|^2, \quad (22)$$

and after N integration steps, the cumulative attenuation factor on mode $\mathbf{k}$ is:

$$G_{\text{total}}(\mathbf{k}) = \prod_{i=0}^{N-1} (1 - \eta_i |H(\mathbf{k})|^2). \quad (23)$$

We identify two regimes. In the PSF passband, $|H(\mathbf{k})|^2$ is appreciable and $1 - \eta_i |H(\mathbf{k})|^2 < 1$. Iteration drives the homogeneous component of $X^{(i)}(\mathbf{k})$ toward zero, and the recovered amplitude converges to the unregularized inverse filter $H^*(\mathbf{k})Y(\mathbf{k})/|H(\mathbf{k})|^2$. In the transition band of the Gaussian PSF, this filter amplifies noise as $|H(\mathbf{k})|^{-2}$ and produces PSF-scale ringing around recovered sources. Outside the passband, $|H(\mathbf{k})| \rightarrow 0$ makes both the homogeneous attenuation and the inhomogeneous correction vanish. The adjoint correction is then essentially the identity and contributes neither suppression nor restoration. The asymptotic noise amplification in the PSF transition band is a $N \rightarrow \infty$ pathology and primarily produces high-frequency ringing rather than spatial broadening. The dominant failure mode at the practical finite N used in our pipeline is instead the slow per-mode convergence of high spatial frequencies, which acts as an effective low-pass filter and manifests as cumulative PSF widening across the N integration steps, as analyzed in detail in Section E.4.

The Wiener-corrected update of Equation (11) avoids this collapse. Substituting $W(\mathbf{k})$ into the correction term replaces the multiplier $H^*(\mathbf{k})$ with $H^*(\mathbf{k})/(|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1})$, which is uniformly bounded by $\frac{1}{2}\lambda_{\text{SNR}}^{1/2}$. The Wiener kernel still tracks the inverse filter $1/H(\mathbf{k})$ deep within the passband, but stays finite in the transition band and eliminates the noise-amplification mechanism above. The cumulative transfer function across N steps remains stable at high frequencies, preserving the resolution gain provided by the flow.

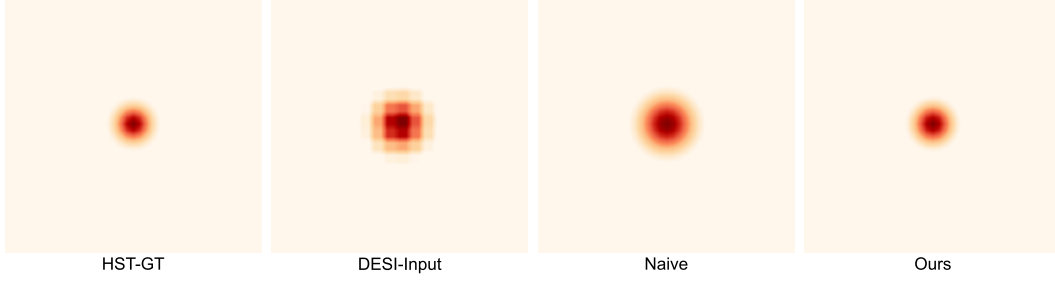


Figure 15: Toy reconstruction at $\sigma_n = 0$ with $N = 20$ Euler steps. The four panels show, from left to right, the HST-quality truth, the DESI observation, the naive adjoint back-projection, and the Wiener-corrected update. The naive recovery has fitted width $\sigma_{\text{fit}} \approx 2.75$, visibly broadened relative to the truth despite the observation being noise-free. The Wiener-corrected update at the same N has $\sigma_{\text{fit}} \approx 2.03$, restored to the truth.

E.4 Closed-Form Toy Model

The qualitative argument above identifies two distinct failure modes of unregularized adjoint back-projection. The first is *slow per-mode convergence* of high spatial frequencies, since the Gaussian PSF makes the per-step contraction rate $\eta|H(\mathbf{k})|^2$ exponentially small at high $|\mathbf{k}|$. The second is *noise amplification* of the unregularized inverse filter at the iteration fixed point. These two failure modes operate on different timescales. The first dominates at finite iteration count N , while the second is a $N \rightarrow \infty$ pathology. Because our sampling pipeline runs for a finite N , the first is the dominant cause of the apparent PSF widening reported in our ablation. We make this concrete with a tractable closed-form limit, and show that the Wiener kernel acts as a frequency-dependent preconditioner that directly remedies the finite- N failure mode by accelerating per-mode convergence in the passband. It does not change the asymptotic fixed point of the iteration, since the Wiener kernel is strictly positive over the passband and any fixed point of $X^{(i+1)} = X^{(i)} - \eta W(\mathbf{k})(H(\mathbf{k})X^{(i)} - Y(\mathbf{k}))$ still satisfies $X^{(\infty)}(\mathbf{k}) = Y(\mathbf{k})/H(\mathbf{k})$, but instead allows the iteration to be safely truncated at finite N before the noise-amplification pathology of the second mode becomes operationally relevant.

Setup. We take the PSF to be a normalized 2D Gaussian of width σ_h , the ground-truth PSF used to generate the simulated observation in the following toy analysis, so that

$$h(\mathbf{r}) = \frac{1}{2\pi\sigma_h^2} \exp\left(-\frac{|\mathbf{r}|^2}{2\sigma_h^2}\right), \quad H(\mathbf{k}) = \exp\left(-\frac{1}{2}\sigma_h^2|\mathbf{k}|^2\right). \quad (24)$$


We probe the recovery operator with a single point source $x_{\text{src}}(\mathbf{r}) = \Psi \delta(\mathbf{r})$ of amplitude Ψ , which acts as a clean impulse and isolates the recovery dynamics from any source structure. The observation noise is spatially white with power σ_n^2 , so the forward observation in the Fourier domain becomes:

$$Y(\mathbf{k}) = H(\mathbf{k})\Psi + \Gamma(\mathbf{k}), \quad \langle \Gamma(\mathbf{k}) \overline{\Gamma(\mathbf{k}')} \rangle = \sigma_n^2 \delta(\mathbf{k} - \mathbf{k}'). \quad (25)$$

We restrict the analysis to the band $|\mathbf{k}| \leq k_{\text{max}}$ supported by the LR observation. For $s \times s$ area downsampling we have $k_{\text{max}} \approx \pi/s$ in HR frequency units. In contrast to a fixed-point analysis, our pipeline iterates Equation (9) for a finite number $N = 20$ of Euler steps, with constant step size η adopted purely as an analytical simplification for the closed-form toy-model derivation that follows. The actual sampling pipeline of Algorithm 1 uses the linear-decay schedule $\eta_i = \eta_0(1 - i/N)$ described in Section 5.2, and the qualitative conclusions of this section are unchanged under that schedule. The closed-form analysis below is therefore parametric in N .

Per-mode Closed Form for Finite N . The adjoint update of Equation (9) acts independently on each Fourier mode. Writing the per-mode recursion $X^{(i+1)}(\mathbf{k}) = (1 - \eta|H(\mathbf{k})|^2)X^{(i)}(\mathbf{k}) + \eta H^*(\mathbf{k})Y(\mathbf{k})$ with $X^{(0)} = 0$ and summing the resulting geometric series yields the per-mode closed form:

$$X_{\text{naive}}^{(N)}(\mathbf{k}) = g_N^{\text{naive}}(\mathbf{k}) \left[\Psi + \frac{\Gamma(\mathbf{k})}{H(\mathbf{k})} \right], \quad g_N^{\text{naive}}(\mathbf{k}) \equiv 1 - (1 - \eta|H(\mathbf{k})|^2)^N. \quad (26)$$

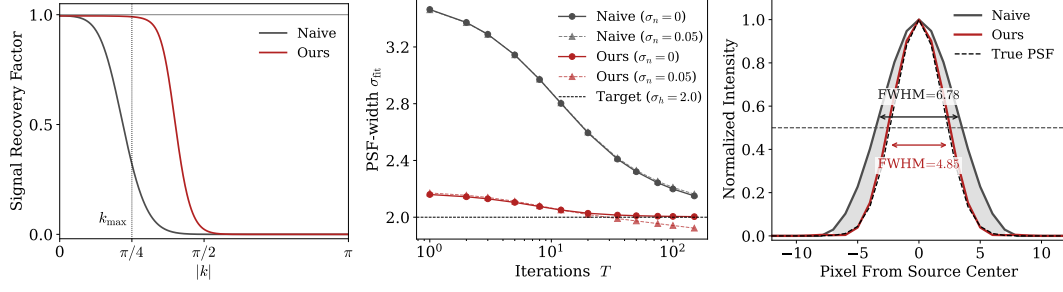

(a) Per-mode signal recovery $g_N(\mathbf{k})$ at $N = 20$. Naive drops sharply within the LR band $|\mathbf{k}| \leq k_{\max}$, re-covering only $\sim 40\%$ at the band edge, whereas ours persists. (b) Fitted σ_{fit} vs. iteration N at $\sigma_n = 0$ and $\sigma_n = 0.05$. The two noise levels overlap, showing that the widening is a low-pass effect rather than noise amplification. (c) 1D radial profile cuts at $N = 20$. Naive is visibly broader than the true PSF, with FWHM enlarged from 4.71 to 6.78 HR pixels, while Wiener has FWHM ≈ 4.85 .

Figure 16: Numerical verification of the closed-form analysis at the same parameters as Figure 15. Panels (a)–(c) directly visualize Equations (26), (27) and (29).

The factor $g_N^{\text{naive}}(\mathbf{k})$ is the per-mode signal-recovery factor, gating both the signal term Ψ and the noise term Γ/H , and approaches unity only as $N \rightarrow \infty$. Per step, mode $\mathbf{k}$ contracts toward its fixed point at rate $\eta|H(\mathbf{k})|^2$, which is exponentially small at high $|\mathbf{k}|$ for a Gaussian PSF. For our setting $\sigma_h = 2$ and $k_{\max} = \pi/4$, $|H(k_{\max})|^2 = \exp(-\sigma_h^2 k_{\max}^2) = \exp(-\pi^2/4) \approx 0.085$, more than an order of magnitude below the deep-passband value $|H(\mathbf{0})|^2 = 1$, so the per-step contraction at the band edge is correspondingly slow. At any practical finite N the band edge therefore remains underconverged with $g_N^{\text{naive}}(k_{\max})$ bounded well below unity, while the deep passband saturates at $g_N^{\text{naive}} \approx 1$ within a few iterations.

Apparent PSF Widening at Finite N . Equation (26) attenuates both signal and noise by the same factor g_N^{naive} . The deterministic signal term is therefore a low-passed version of the true delta whenever $g_N^{\text{naive}} < 1$ at the band edge. Fitting a Gaussian profile to the recovered impulse returns a width:

$$\sigma_{\text{fit}}^{\text{naive}} > \sigma_{\infty} \quad \text{for any finite } N, \quad (27)$$

where σ_{∞} denotes the band-limited resolution floor set by $k_{\max}$, i.e. the spatial width of the inverse Fourier transform of the indicator of $|\mathbf{k}| \leq k_{\max}$ (a 2D sinc-like profile), which is independent of the forward blur σ_h . As $N \rightarrow \infty$, $g_N^{\text{naive}}(\mathbf{k}) \rightarrow 1$ within the LR-supported band and $\sigma_{\text{fit}} \rightarrow \sigma_{\infty}$ rather than to σ_h . The apparent numerical agreement with $\sigma_h \approx 2$ in Figure 16b reflects the specific choice of σ_h and $k_{\max}$ used in this toy setup, not a genuine convergence to the optical blur scale. Figure 15 shows the qualitative outcome, with the naive recovery visibly broader than the truth even at the noise-free condition of $\sigma_n = 0$.

Wiener Correction. Substituting the Wiener kernel $W(\mathbf{k}) = H^*(\mathbf{k})/(|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1})$ for $H^*(\mathbf{k})$ in the correction replaces the per-mode contraction rate $\eta|H(\mathbf{k})|^2$ with

$$\eta \frac{|H(\mathbf{k})|^2}{|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1}}. \quad (28)$$

Within the LR-supported band, $|H(\mathbf{k})|^2 \gg \lambda_{\text{SNR}}^{-1}$ at our default $\lambda_{\text{SNR}} = 50$, so this ratio is close to unity rather than to $|H(\mathbf{k})|^2$. The per-step contraction rate is therefore approximately η uniformly across the band, an order of magnitude faster than the naive update at the band edge. The corresponding signal-recovery factor

$$g_N^{\text{Wiener}}(\mathbf{k}) = 1 - \left(1 - \eta \frac{|H(\mathbf{k})|^2}{|H(\mathbf{k})|^2 + \lambda_{\text{SNR}}^{-1}}\right)^N \quad (29)$$

saturates to unity across the entire band $|\mathbf{k}| \leq k_{\max}$ within a small N (Figure 16a). The Wiener-corrected reconstruction is therefore essentially band-converged at modest N , and Equation (27) no longer applies. Figure 16b shows $\sigma_{\text{fit}}^{\text{Wiener}} \rightarrow \sigma_h$ within a few iterations, while the corresponding 1D profile cut (Figure 16c) tracks the true PSF within line width.

Table 6: Quantitative comparison at $\times 2$ and $\times 4$ on STAR dataset Wu et al. [2025].

Scale	Metric	Bicubic	EDSR	SRGAN	RCAN	SwinIR	HAT	FISR	Ours
$\times 2$	PSNR $\uparrow$	28.71	33.50	32.25	33.89	34.05	34.38	34.40	34.66
	SSIM $\uparrow$	0.6945	0.7729	0.7501	0.7808	0.7812	0.7836	0.7859	0.7918
	Flux-L1 $\downarrow$	125.4	48.78	51.35	43.44	42.41	41.27	41.05	41.84
$\times 4$	PSNR $\uparrow$	26.21	30.73	30.33	32.13	32.24	32.67	32.51	32.44
	SSIM $\uparrow$	0.5993	0.6549	0.6522	0.6838	0.6881	0.6936	0.6891	0.6867
	Flux-L1 $\downarrow$	239.2	67.47	74.72	60.52	55.35	48.49	50.94	57.20

Table 7: Quantitative comparison at $\times 2$ on AstroSR dataset Miao et al. [2024].

Scale	Metric	Bicubic	EDSR	SRGAN	RCAN	ENLCA	SwinIR	HAT	FISR	Ours
$\times 2$	PSNR $\uparrow$	17.75	23.71	23.46	23.72	23.70	23.74	23.81	23.84	23.87
	SSIM $\uparrow$	0.171	0.350	0.348	0.351	0.350	0.352	0.352	0.354	0.352
	Flux-L1 $\downarrow$	1916	213.6	165.9	226.3	216.1	223.1	193.3	192.5	198.7

Fixed-point Noise Amplification. For completeness, we record the $N \rightarrow \infty$ behaviour. In that limit, Equation (26) collapses to $X^{(\infty)}(\mathbf{k}) = \Psi + \Gamma(\mathbf{k})/H(\mathbf{k})$, whose noise spectrum $\Phi_{\text{rec}}(\mathbf{k}) = \sigma_n^2 \exp(\sigma_h^2 |\mathbf{k}|^2)$ diverges exponentially at high $|\mathbf{k}|$. Bandlimiting and integrating with the continuous angular-frequency Parseval factor $1/(2\pi)^2$ yields the closed-form per-pixel variance:

$$\sigma_{\text{rec}}^2 = \frac{\sigma_n^2}{4\pi \sigma_h^2} (\exp(\sigma_h^2 k_{\text{max}}^2) - 1), \quad (30)$$

which evaluates to roughly $0.21 \sigma_n^2$ at the DESI-HST setting ($\sigma_h = 2$, $k_{\text{max}} = \pi/4$). While modest in absolute terms, this corresponds to a substantial amplification of the noise power that lives within the narrow LR-supported band $|\mathbf{k}| \leq k_{\text{max}}$, and the prefactor $\exp(\sigma_h^2 k_{\text{max}}^2) - 1$ grows exponentially as k_{max} approaches the Nyquist limit, so this term remains a real concern for any iteration run to convergence. The practical N used in our pipeline keeps the recovery short of this fixed point. In our regime the dominant pathology is therefore the finite- N low-pass effect of Equation (27) rather than the asymptotic noise amplification of Equation (30).

F Additional Quantitative Results

We further evaluate FluxFlow on two existing astronomical super-resolution benchmarks. The AstroSR dataset Miao et al. [2024] pairs galaxy cutouts across two different ground-based optical surveys, drawing low-resolution images from the Sloan Digital Sky Survey (SDSS) York et al. [2000] and high-resolution targets from the Subaru Hyper Suprime-Cam survey (HSC) Aihara et al. [2018], and is distributed as three-channel RGB composites rather than flux-calibrated single-band photometry. The STAR dataset Wu et al. [2025] consists of space-based HST star-field cutouts in the F814W band Sirianni et al. [2005], whose low-resolution counterparts are produced by synthetic downsampling of the same HST images. Neither benchmark exposes the severe atmospheric PSF broadening that characterizes genuine ground-to-space observation pairs, as also summarized in Table 1, nor a calibrated atmospheric PSF kernel for the LR to HR transformation, so the LR to HR gap is much milder than the seeing-limited regime our full pipeline targets. We therefore set the PSF kernel h in the forward model of Equation (6) to the identity $\mathbf{H}_{\text{PSF}} = \mathbf{I}$ for these experiments, so that the inference-time MC-FS correction reduces to a residual back-projection through the area-downsampling adjoint $\mathbf{D}_s^\top$ alone and no Wiener deconvolution is applied. In addition, neither benchmark provides per-pixel inverse-variance weight maps or co-registered HR catalogs from which to derive source masks, so we omit both the inverse-variance term $\widetilde{\mathbf{W}}$ and the source-importance term $\mathbf{S}$ from the WFM objective in Equation (5), recovering the unweighted CFM loss of Equation (4). All other architectural and optimization choices follow Section 6.

The Flux-L1 metric in this section is defined consistently with Table 2 in the main text. We deliberately report the Flux-L1, defined as Equation (13), rather than the per-source averaged Flux Error (FE) defined in STAR Wu et al. [2025] for two reasons. First, our DESI to HST mapping operates in

calibrated nanomaggie units whose per-pixel values are extremely small. The sum-based formulation therefore preserves a meaningful range and remains consistent with the definition adopted in Table 2, while dividing by the number of recovered sources would compress the metric into a numerically uninformative regime. Second, individual sources span a very wide range of extent, brightness, and morphology, from compact point-like profiles to extended galaxies. Under such heterogeneity, a per-source mean weights a faint compact detection and a bright extended structure equally and obscures where the photometric error actually concentrates. Aggregating the residual as a sum over all pixels instead reflects the cumulative photometric fidelity of the field as a whole.

We further note an important difference in the evaluation protocol. The STAR benchmark Wu et al. [2025] adopts a per-image min-max normalization that depends on the ground-truth extrema of each test image, which is not reproducible at inference time when the ground truth is unavailable. To keep the evaluation usable in a deployment setting and consistent with the rest of the paper, we instead adopt the same global normalization protocol used for our DESI-HST experiments described in Appendix D, namely a 0.01% tail clip followed by global min-max rescaling fitted on the training split, and we report PSNR and SSIM in the normalized domain and Flux-L1 in the denormalized native units. For the AstroSR benchmark Miao et al. [2024], the data are distributed as 8-bit RGB composites with consistent scaling across SDSS and HSC, so no further normalization is required and we evaluate directly on the released values.

The comparison is summarized in Tables 6 and 7. We note that the FluxFlow numbers reported here were obtained without the inverse-variance term $\tilde{W}$, the source-importance term S , and the Wiener-deconvolved measurement consistency, since the required ingredients are not available on these benchmarks. On the STAR dataset Wu et al. [2025] at $\times 2$, this ablated FluxFlow attains the highest PSNR and SSIM together with a top-tier Flux-L1, and at $\times 4$ it remains competitive with the strongest regression baselines. On the AstroSR dataset Miao et al. [2024] at $\times 2$, the same configuration achieves the highest PSNR and a competitive SSIM. We note that the AstroSR dataset Miao et al. [2024] is distributed as RGB composites without absolute flux calibration, so total brightness is no longer conserved across the SDSS to HSC mapping, and the Flux-L1 column on this benchmark therefore carries limited physical meaning and is reported only for completeness. As expected, the margins over regression baselines are markedly smaller than on DESI-HST in Table 2, since neither dataset exposes super-resolution under atmospheric aberration, so the dominant degradation mode that our Wiener-corrected MC-FS sampler is designed to address is absent, and the residual improvement mainly reflects the contribution of the pixel-space flow-matching strategy.

G Additional Ablation Study

This section presents additional ablations beyond the main study of Table 3. We first examine two alternatives to pixel-space OT-CFM, a latent-space flow-matching variant in a frozen SD-VAE sdv [2022] feature space and a conditional-bridge variant that replaces the Gaussian source with a noisy bicubic-upsampled DESI input. We then sweep the three inference-time hyperparameters of MC-FS, the forward Gaussian PSF width σ_{PSF} , the Wiener regularization λ_{SNR} , and the correction step size η_0 . We close with detection-overlay visualisations on six DESI-HST patches showing how MC-FS suppresses spurious sources relative to naive OT-CFM sampling.

Latent Space Flow-Matching. Many recent image generative models operate in the latent space of a pretrained VAE Diederik and Max [2019], which compresses input images and turns the diffusion process into a much lower-dimensional regression problem Rombach et al. [2022]. We test whether the same recipe transfers to astronomical super-resolution using SD-VAE sdv [2022]. The pixel-normalization protocol of Section D maps every cutout to $[0, 1]$ before encoding, so the SD-VAE sees inputs in its native operating range. The w/ VAE row of Table 3 reports the result. All photometric and detection metrics degrade substantially relative to pixel-space FluxFlow, with detection F1 collapsing primarily through a sharp drop in recall, indicating that compact sources are systematically washed out by the encoder rather than misplaced. We attribute this collapse to the VAE bottleneck smoothing out the compact, high-contrast point sources that dominate the HST signal. Figure 17 shows the visual signature. The latent-space variant blurs faint compact sources and oversmooths galaxy profiles, recovering only the low-frequency structure that survives the VAE bottleneck, while pixel-space FluxFlow recovers morphology and resolved structure that closely match the HST target. We therefore retain pixel-space training in the main model. For reproducibility, the variant encodes the bicubically

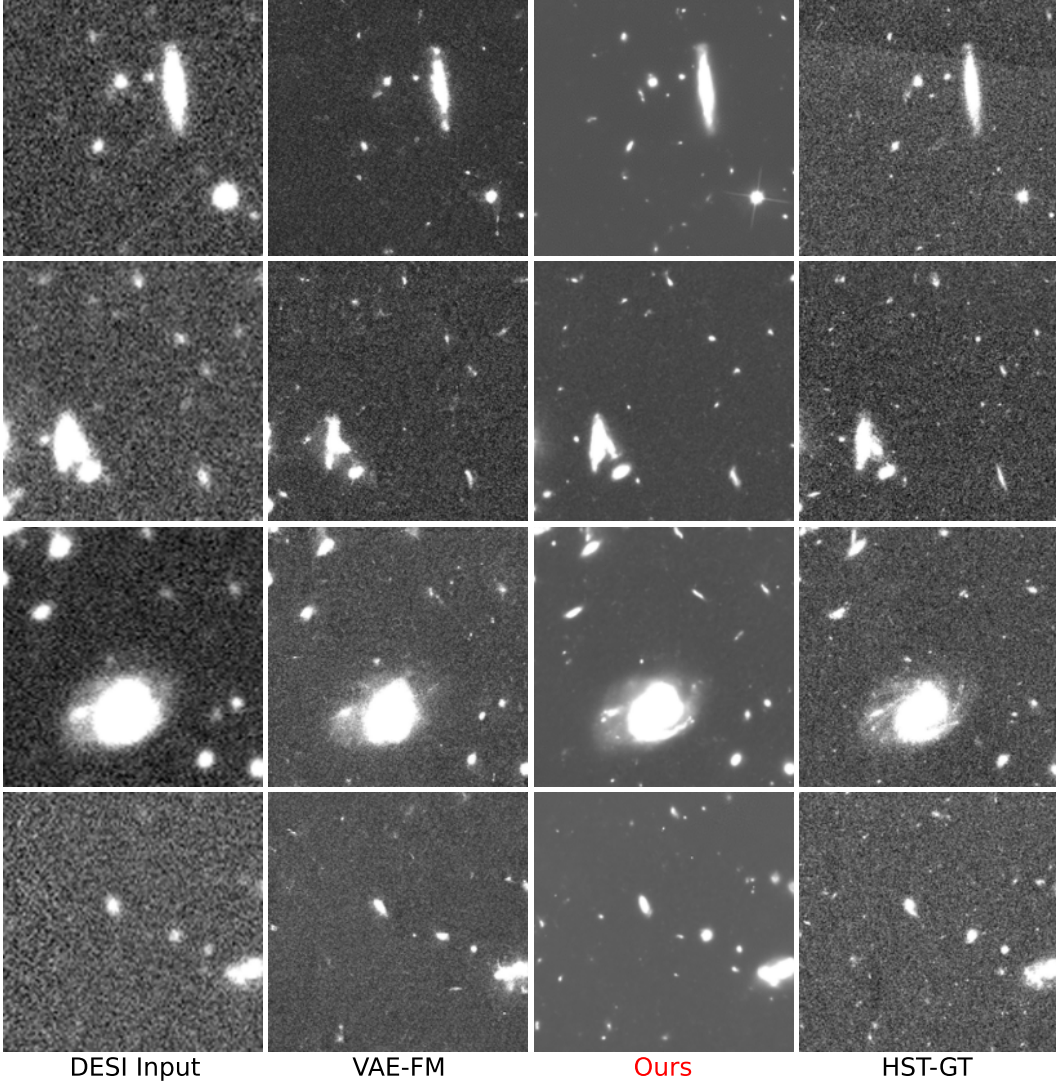


Figure 17: Qualitative comparison of the latent-space flow-matching ablation. Four representative DESI–HST test patches are shown from left to right as the DESI input, the latent-space FM variant operating on SD-VAE features, FluxFlow operating directly in pixel space, and the HST ground truth. The VAE-FM blurs faint compact sources and oversmooths the galaxy profiles, while pixel-space FluxFlow recovers source morphology and resolved structure that closely match the HST target.

upsampled DESI input and the HST target with the frozen SD-VAE encoder into latent codes z_x and z_y , then trains a conditional U-Net along the OT-CFM interpolant $z_t = (1 - t)z_0 + tz_y$ from a Gaussian prior $z_0 \sim \mathcal{N}(0, I)$, decoding back to pixel space at inference and averaging the three channels into a single-channel HR estimate. The latent U-Net uses 8 input and 4 output channels with `base_dim` = 64 and `time_dim` = 256, trained with AdamW for 300 epochs at batch size 88, learning rate 10^{-4} , weight decay 10^{-4} , 1000 warmup steps, gradient clipping at 1.0, and no EMA.

Conditional-Bridge Flow-Matching. The Gaussian source distribution of OT-CFM places the inference-time trajectory at pure noise, forcing the velocity network to recover the entire HR signal across certain Euler steps. A natural alternative is to start from a coarse condition-aligned image and refine the residual. We test this by replacing the Gaussian source with a noisy bicubic upsample of the DESI observation, $\mathbf{x}_0 = \text{BicubicUp}(\mathbf{y}) + \epsilon$ with $\epsilon \sim \mathcal{N}(\mathbf{0}, 0.4^2 \mathbf{I})$, where the noise scale 0.4 was tuned on a small validation grid. The *w/ Bridge* row of Table 3 is intermediate. All photometric and detection metrics degrade modestly relative to the pixel-space OT-CFM model, with smaller

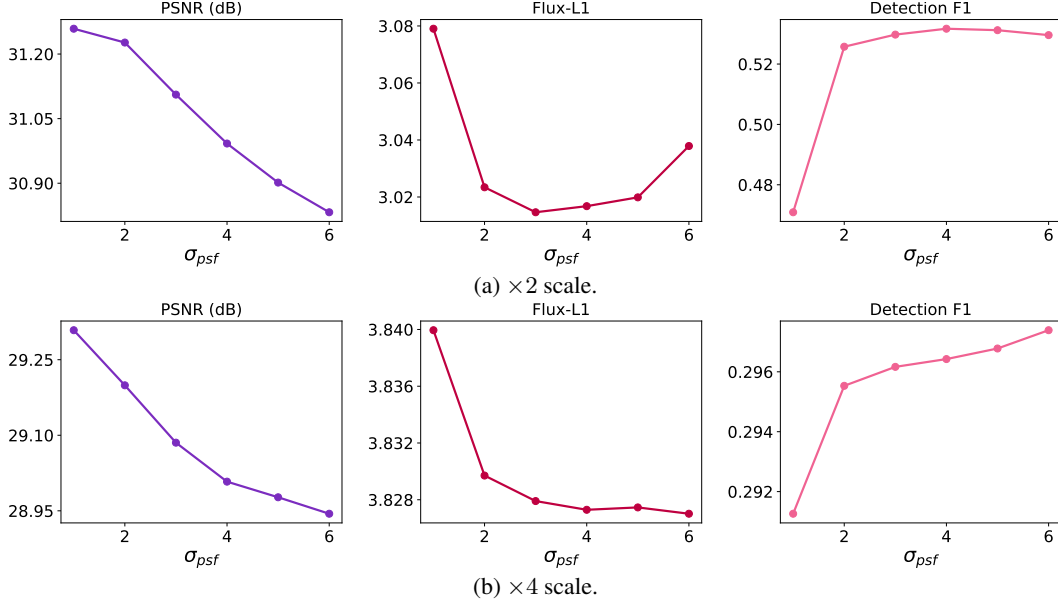


Figure 18: Effect of the forward PSF width σ_{PSF} used inside MC-FS at $\times 2$ (top) and $\times 4$ (bottom). PSNR decreases monotonically with σ_{PSF} , while Flux-L1 and Detection F1 form broad plateaus over an intermediate range. We set $\sigma_{\text{PSF}} = 2$ HR pixels at both scales in our experiments.

gaps than the latent-space variant but consistent in direction across PSNR, Flux-L1, and detection F1. The interpretation is that the bridge starting point indeed helps the velocity field locally but couples the prior too tightly to the bicubic mean, suppressing the high-frequency content that pixel-space OT-CFM recovers under MC-FS guidance from a noise prior. We therefore retain the Gaussian source in the main model.

Effect of Forward PSF Kernel σ_{PSF} . The forward operator $\mathbf{A} = \mathbf{D}_s \circ \mathbf{H}_{\text{PSF}}$ used inside MC-FS approximates the DESI seeing-limited PSF by a single isotropic Gaussian of width σ_{PSF} , which controls how aggressively the Wiener correction back-projects the LR residual onto the HR grid. Figure 18 sweeps σ_{PSF} from 1 to 6 HR pixels at both scales while the rest of the pipeline is held fixed. PSNR decreases monotonically with σ_{PSF} at both scales because a wider forward model relaxes the high-frequency agreement with the DESI observation. Flux-L1 and Detection F1 follow a different trade. At $\times 2$, Flux-L1 reaches its minimum near $\sigma_{\text{PSF}} \in [3, 5]$ and Detection F1 plateaus across $\sigma_{\text{PSF}} \in [2, 5]$, dropping only at the very narrow setting $\sigma_{\text{PSF}} = 1$ where over-aggressive deconvolution destroys faint sources, and falling off again at $\sigma_{\text{PSF}} = 6$ where the residual is under-corrected. The $\times 4$ trend is qualitatively similar but flatter, with all three metrics close to their stable bands across $\sigma_{\text{PSF}} \geq 2$. Our default $\sigma_{\text{PSF}} = 2$ at both scales preserves the high-PSNR end while staying inside the Flux-L1 and F1 plateaus, which we found gave the most consistent reconstructions across patches with widely varying DESI seeing.

Effect of Wiener Regularization λ_{SNR} . The constant λ_{SNR} in the Wiener kernel of Equation (10) sets the strength of the noise term in the denominator and therefore interpolates between the matched filter $H^*(\mathbf{k})$ at small λ_{SNR} and the unregularized inverse filter $1/H(\mathbf{k})$ at large λ_{SNR} . Figure 19 sweeps λ_{SNR} from 10 to 100 at $\times 2$ with all other settings fixed. The three metrics are essentially flat across the entire range, with PSNR remaining near 31.21 dB, Flux-L1 near 3.025, and Detection F1 near 0.525. This flatness directly confirms the spectral analysis of Sections E.2 and E.3: within the LR-supported band the optical transfer function satisfies $|H(\mathbf{k})|^2 \gg \lambda_{\text{SNR}}^{-1}$ already at $\lambda_{\text{SNR}} = 10$ for our Gaussian forward model, so further increasing λ_{SNR} has only a marginal effect on the per-step contraction rate and leaves the converged reconstruction essentially unchanged. Our default $\lambda_{\text{SNR}} = 50$ sits well inside this stable plateau, and the result is robust to mis-specification of λ_{SNR} by an order of magnitude in either direction.

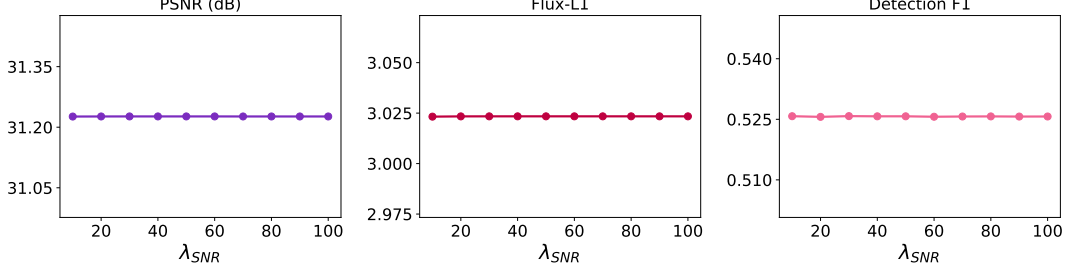


Figure 19: Effect of the Wiener regularization λ_{SNR} at $\times 2$. Sweeping λ_{SNR} from 10 to 100 leaves PSNR, Flux-L1, and Detection F1 essentially unchanged, in agreement with the spectral analysis of Sections E.2 and E.3. Our default $\lambda_{\text{SNR}} = 50$ is the value used throughout Table 2.

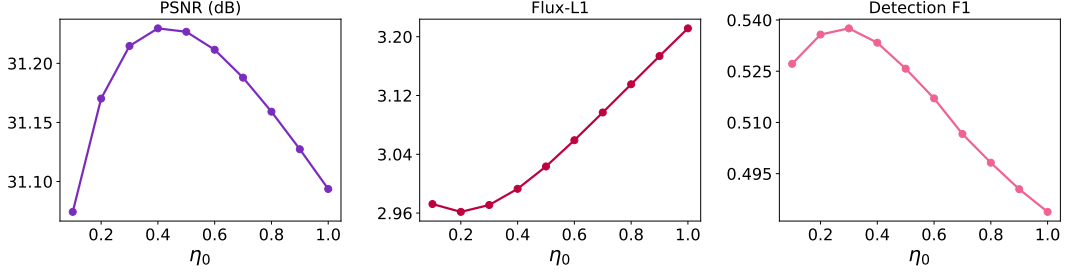


Figure 20: Effect of the base Wiener correction step size η_0 at $\times 2$, with the per-step decay $\eta_i = \eta_0(1 - i/N)$ otherwise unchanged. PSNR is concave with a peak near $\eta_0 \approx 0.4$, Flux-L1 grows monotonically, and Detection F1 peaks near $\eta_0 \approx 0.3$ before falling. Our default $\eta_0 = 0.5$ is the value used throughout Table 2 and sits just to the right of the joint optimum, biasing toward a slightly more conservative correction.

Effect of Wiener Correction Step Size η_0 . The base step size η_0 controls how aggressively each MC-FS iteration projects the candidate state toward the consistency set $\mathcal{C}(\mathbf{y})$, with the schedule $\eta_i = \eta_0(1 - i/N)$ tapering the correction to zero at the final step. Figure 20 sweeps η_0 from 0.1 to 1.0 at $\times 2$ with all other settings fixed. PSNR is concave, peaking at $\eta_0 = 0.4$ with 31.230 dB and degrading to 31.094 and 31.094 dB at $\eta_0 = 0.1$ and $\eta_0 = 1.0$. Too small a step under-corrects the residual and leaves hallucinated structure in place; too large a step over-shoots into a non-physical region of $\mathcal{C}(\mathbf{y})$ and injects artificial flux. Flux-L1 confirms this over-shoot, rising from 2.962 at $\eta_0 = 0.2$ to 3.211 at $\eta_0 = 1.0$. Detection F1 peaks at $\eta_0 = 0.3$ (0.538) and falls steadily for $\eta_0 \geq 0.5$ as over-correction begins to suppress real low-SNR sources alongside hallucinations. Our default $\eta_0 = 0.5$ sits just to the right of the joint optimum, trading a small amount of F1 for a more conservative correction that empirically reduces variance with widely varying seeing.

Visualization of Source Detection. Figures 21 and 22 visualize how MC-FS suppresses hallucination sources across several representative DESI–HST test images. Each example uses four columns showing the DESI input, naive OT-CFM sampling without MC-FS, our MC-FS sampling, and the HST ground-truth, with the top row giving the reconstruction and the bottom row overlaying the SExtractor catalogue measured on the same image. Cyan circles mark ground-truth sources, green circles mark true-positive detections, and red dots mark spurious detections without a counterpart in the ground truth. The naive column is densely populated with red dots in low-SNR background regions and around the wings of bright stars, the regimes in which the velocity field most readily sharpens noise into compact source-like morphology with no preimage in the DESI observation. The MC-FS column eliminates most of these red dots while preserving the green true-positive population, recovering precision without collapsing recall. The suppression is most pronounced on the saturated-star examples in Figure 21, where strong diffraction spikes induce many spurious sources under naive sampling but are correctly recognized as instrumental structure once the residual against the DESI observation is enforced. Figure 22 shows the same pattern on a bright extended galaxy and a faint background field, where naive sampling fragments the extended profile and hallucinates compact

peaks in the surrounding noise. These visualizations are the per-image counterpart of the precision and F1 gains of the full model over the *w/o MCFS* ablation in Table 3.

H Downstream Scientific Application

We complement the field-aggregated metrics in Table 2 with a per-source evaluation that converts each reconstruction into the quantities that actually enter downstream catalog products. The relevant quantities are AB magnitudes for photometric calibration, a luminosity-proxy stellar mass for galaxy population statistics, and second-moment ellipticities for weak-lensing shape catalogs. Sources are read from a precomputed SEP Bertin and Arnouts [1996], Barbary [2016] segmentation map of the HST ground truth, with labels of fewer than 10 pixels discarded. Every reconstruction is measured under the same segmentation footprint $\mathcal{R}_i$ as the ground truth, so each prediction inherits a strictly one-to-one source correspondence with the GT and detector-side variability does not enter the comparison.

Local Background Subtraction. Before any per-source measurement, we subtract a local background mesh from both the ground truth and each reconstruction. The mesh is computed with SEP’s Background routine on a 32×32 pixel grid with mesh-size parameters $\text{bw} = \text{bh} = 32$ and mesh-filtering parameters $\text{fw} = \text{fh} = 1$ that disable additional smoothing. The per-pixel weight map $\mathbf{W}$ acts as a validity mask in which pixels at $\mathbf{W}_p = 0$ are excluded from both the background fit and the subsequent measurement. The HST ground truth has already had its background removed during SEP preprocessing, but the residual background bias of each reconstruction is method-dependent and systematic, negative for bicubic upsampling and positive for several generative baselines, and would otherwise translate into a global flux offset that pushes a non-trivial fraction of $\hat{F}_i$ negative and out of the magnitude domain. All formulas below operate on the background-subtracted image.

Bright-Source Protocol. For the scientific tasks considered here the relevant population is the bright, resolved end where photometric, structural, and shear estimates are stable rather than dominated by sub-detection-limit fluctuations. We therefore retain only sources whose ground-truth integrated flux satisfies

$$F_i^{\text{GT}} = \sum_{p \in \mathcal{R}_i} x_p^{\text{GT}} \geq F_{\text{thr}}, \quad (31)$$

on the background-subtracted GT, with $\mathcal{R}_i$ the SEP segmentation footprint of source i . We use the same threshold $F_{\text{thr}} = 0.5 \text{ nMgy}$ at both $\times 2$ and $\times 4$. Because the integrated flux of a fixed physical source is conserved across the two scales by construction of the dataset, the same threshold selects the same physical population, yielding $N_{\text{src}} = 7437$ matched bright sources at both scales. All metrics below are reported as both the mean and the median across this set, the median being the relevant robust statistic for catalog products in which a small number of saturated or hallucinated cores would otherwise dominate the mean.

Magnitude Error. For each source the integrated flux on the reconstruction is $\hat{F}_i = \sum_{p \in \mathcal{R}_i} \hat{x}_p$, measured on the background-subtracted image and the same footprint as F_i^{GT} . The AB-style magnitude is computed with a calibrated zero point $Z_p = 25$,

$$m_i = -2.5 \log_{10}(F_i) + Z_p, \quad (32)$$

and the per-source magnitude residual is

$$\Delta m_i = |\hat{m}_i - m_i^{\text{GT}}| = 2.5 |\log_{10} \hat{F}_i - \log_{10} F_i^{\text{GT}}|, \quad (33)$$

evaluated only on sources with both $\hat{F}_i > 0$ and $F_i^{\text{GT}} > 0$. This is the standard photometric residual used for source-catalog calibration and for color-magnitude diagrams. The logarithmic scaling makes Δm sensitive to multiplicative photometric bias, so a method that systematically biases integrated flux high or low is penalized regardless of the absolute scale.

Stellar-Mass Error. A bright resolved source contributes to galaxy stellar-mass functions and SFR-mass diagrams Conselice [2014] primarily through its luminosity. We adopt a single-band luminosity-proxy stellar mass with a fiducial mass-to-light ratio Θ_* held common across reconstructions and ground truth,

$$\hat{M}_{*,i} = \Theta_* \cdot \hat{F}_i, \quad \Theta_* = 3, \quad (34)$$

Table 8: Per-source downstream-task accuracy at $\times 2$ on the matched bright-source set. Magnitude and shear are dimensionless, while the stellar-mass MAE is reported in Θ_* -scaled nanomaggies as defined in Equation (34). Best, second, and third are shaded with ■, ■, ■.

Method	$\Delta m \downarrow$		Mass MAE $\downarrow$		$\Delta \gamma \downarrow$	
	mean	median	mean	median	mean	median
Bicubic Keys [1981]	0.758	0.637	7.767	1.537	0.148	0.122
SwinIR Liang et al. [2021]	0.649	0.300	8.197	0.762	0.149	0.116
HAT Chen et al. [2025b]	0.542	0.192	7.962	0.524	0.151	0.112
FISR Wu et al. [2025]	0.561	0.230	8.014	0.608	0.165	0.133
cGAN Rai et al. [2025]	0.548	0.215	7.996	0.586	0.159	0.131
GD-Net Shan et al. [2025]	0.664	0.393	7.659	1.025	0.166	0.131
Ours	0.516	0.187	7.632	0.508	0.161	0.126

Table 9: Per-source downstream-task accuracy at $\times 4$ on the same matched bright-source set as Table 8. Stellar-mass MAE is in Θ_* -scaled nanomaggies.

Method	$\Delta m \downarrow$		Mass MAE $\downarrow$		$\Delta \gamma \downarrow$	
	mean	median	mean	median	mean	median
Bicubic Keys [1981]	1.067	0.863	16.90	3.648	0.144	0.115
SwinIR Liang et al. [2021]	0.969	0.461	16.51	2.43	0.118	0.090
HAT Chen et al. [2025b]	0.886	0.397	16.19	2.207	0.108	0.081
FISR Wu et al. [2025]	0.876	0.417	16.25	2.246	0.124	0.097
cGAN Rai et al. [2025]	0.902	0.460	16.42	2.440	0.135	0.109
GD-Net Shan et al. [2025]	1.509	1.308	17.58	4.630	0.170	0.139
Ours	0.851	0.389	16.07	2.131	0.117	0.091

on the same nanomaggie-scale flux as Equation (32). The mean absolute error is

$$\text{Mass MAE} = \frac{1}{N_{\text{src}}} \sum_{i=1}^{N_{\text{src}}} |\hat{M}_{*,i} - M_{*,i}^{\text{GT}}|, \quad (35)$$

reported in the same unit as $\Theta_* \cdot F$, namely Θ_* -scaled nanomaggies. Unlike Δm , the linear form weights bright sources more heavily than faint ones, exposing methods that smear or hallucinate the high-luminosity end of the population, the regime that dominates galaxy stellar-mass-function inference.

Weak-Lensing Shear Error. Cosmic-shear analyses depend on the recovered shape of background galaxies [Bernstein and Jarvis \[2002\]](#), [Mandelbaum et al. \[2015\]](#). For each source we compute flux-weighted second-order brightness moments on the background-subtracted reconstruction, with positivity-clipped weights to prevent residual negative-noise pixels from biasing the centroid,

$$\omega_p = \max(\hat{x}_p, 0), \quad \bar{p}_{a,i} = \frac{\sum_{p \in \mathcal{R}_i} \omega_p p_a}{\sum_{p \in \mathcal{R}_i} \omega_p}, \quad a \in \{x, y\}. \quad (36)$$

The second-moment tensor is then

$$Q_{ab,i} = \frac{\sum_{p \in \mathcal{R}_i} \omega_p (p_a - \bar{p}_{a,i})(p_b - \bar{p}_{b,i})}{\sum_{p \in \mathcal{R}_i} \omega_p}, \quad a, b \in \{x, y\}, \quad (37)$$

falling back to a uniform weight whenever $\sum_p \omega_p = 0$. The two ellipticity components [Bernstein and Jarvis \[2002\]](#) are

$$\hat{e}_{1,i} = \frac{Q_{xx,i} - Q_{yy,i}}{Q_{xx,i} + Q_{yy,i}}, \quad \hat{e}_{2,i} = \frac{2 Q_{xy,i}}{Q_{xx,i} + Q_{yy,i}}, \quad (38)$$

and the per-source shear error is the magnitude of the residual ellipticity vector

$$\Delta \gamma_i = \sqrt{(\hat{e}_{1,i} - e_{1,i}^{\text{GT}})^2 + (\hat{e}_{2,i} - e_{2,i}^{\text{GT}})^2}, \quad (39)$$

where $e_{a,i}^{\text{GT}}$ is the same statistic measured on the HST ground truth. The median of $\{\Delta \gamma_i\}$ is the relevant statistic for cosmic-shear pipelines, where bulk biases on the bright end propagate directly

into the inferred lensing power spectrum. Measuring the moments on the GT segmentation footprint, rather than re-running source detection on the reconstruction, isolates the per-source shape error from the orthogonal failure mode of catalog-level miscentering.

Discussion. At both $\times 2$ and $\times 4$, FluxFlow obtains the best mean and the best median on four of the six metrics, dominating the magnitude error and the luminosity-proxy stellar-mass MAE on the same matched bright-source set. The remaining shear advantage belongs to HAT, SwinIR, and bicubic upsampling, whose conservative mean-image behaviour preserves elliptical shapes through smoothing rather than recovering high-frequency structure. FluxFlow nevertheless places second on shear mean at $\times 4$ at 0.117 against the HAT best of 0.108 and third on shear median at 0.091 against the HAT best of 0.081, and the corresponding $\times 2$ gap is similarly small at roughly 8% of the best value. The systematic magnitude-error and stellar-mass advantages indicate that the inverse-variance and source-region weighting of Equation (5) together with the Wiener-corrected MC-FS sampling translate directly into the per-source flux fidelity that downstream catalog products require, while costing only a small amount of shape bias relative to the smoothest regression baselines.

I Additional Visualization

We provide additional qualitative comparisons against all evaluated baselines on the DESI–HST test set. Figures 23 and 24 present $\times 2$ super-resolution results, the former on a bright central star with an extended companion and the latter on a saturated star surrounded by closely packed compact sources. Figures 25 and 26 extend the comparison to $\times 4$, covering a faint background-galaxy field with a saturated upper-left source and a binary-star field with resolved diffraction spikes. Across all four cases, FluxFlow recovers diffraction patterns, faint background structures, and source morphology that regression baselines oversmooth and that generative baselines either speckle or oversharpen, consistent with the trends reported in Table 2.

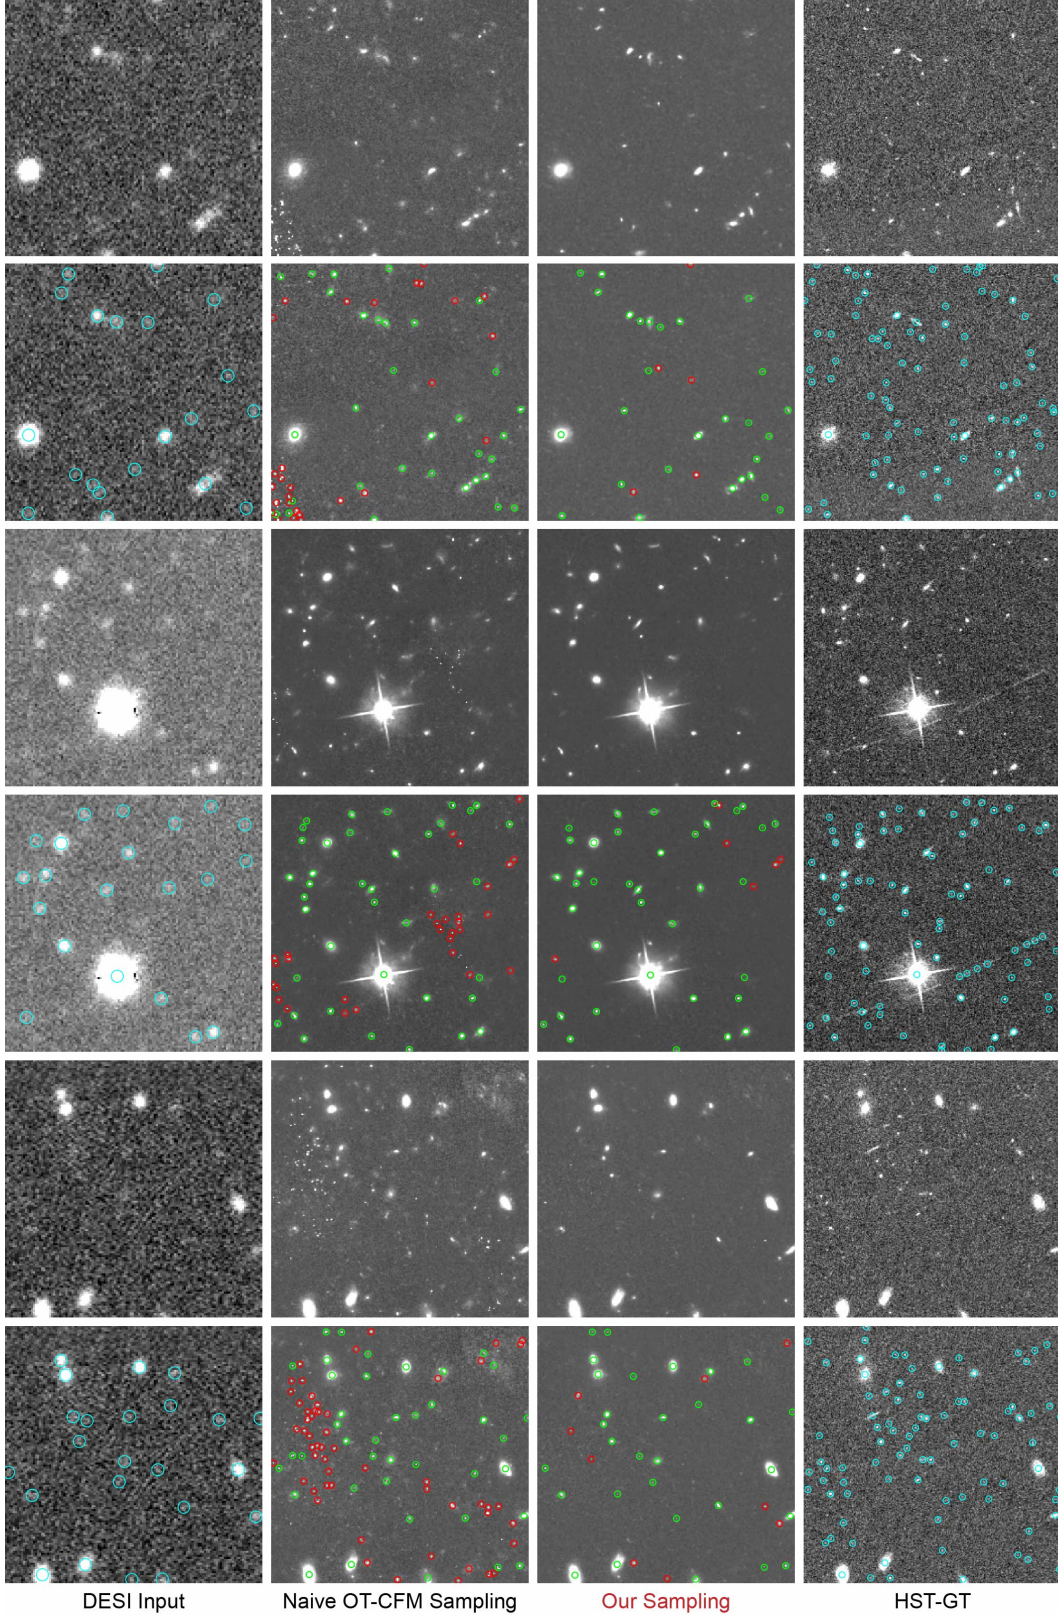


Figure 21: MC-FS hallucination suppression on three DESI-HST examples. Columns show the DESI input, naive OT-CFM, MC-FS, and HST ground truth. The second row overlays SExtractor detections, with **Cyan** for ground-truth sources, **Green** for true positives, and **Red** for false positives.

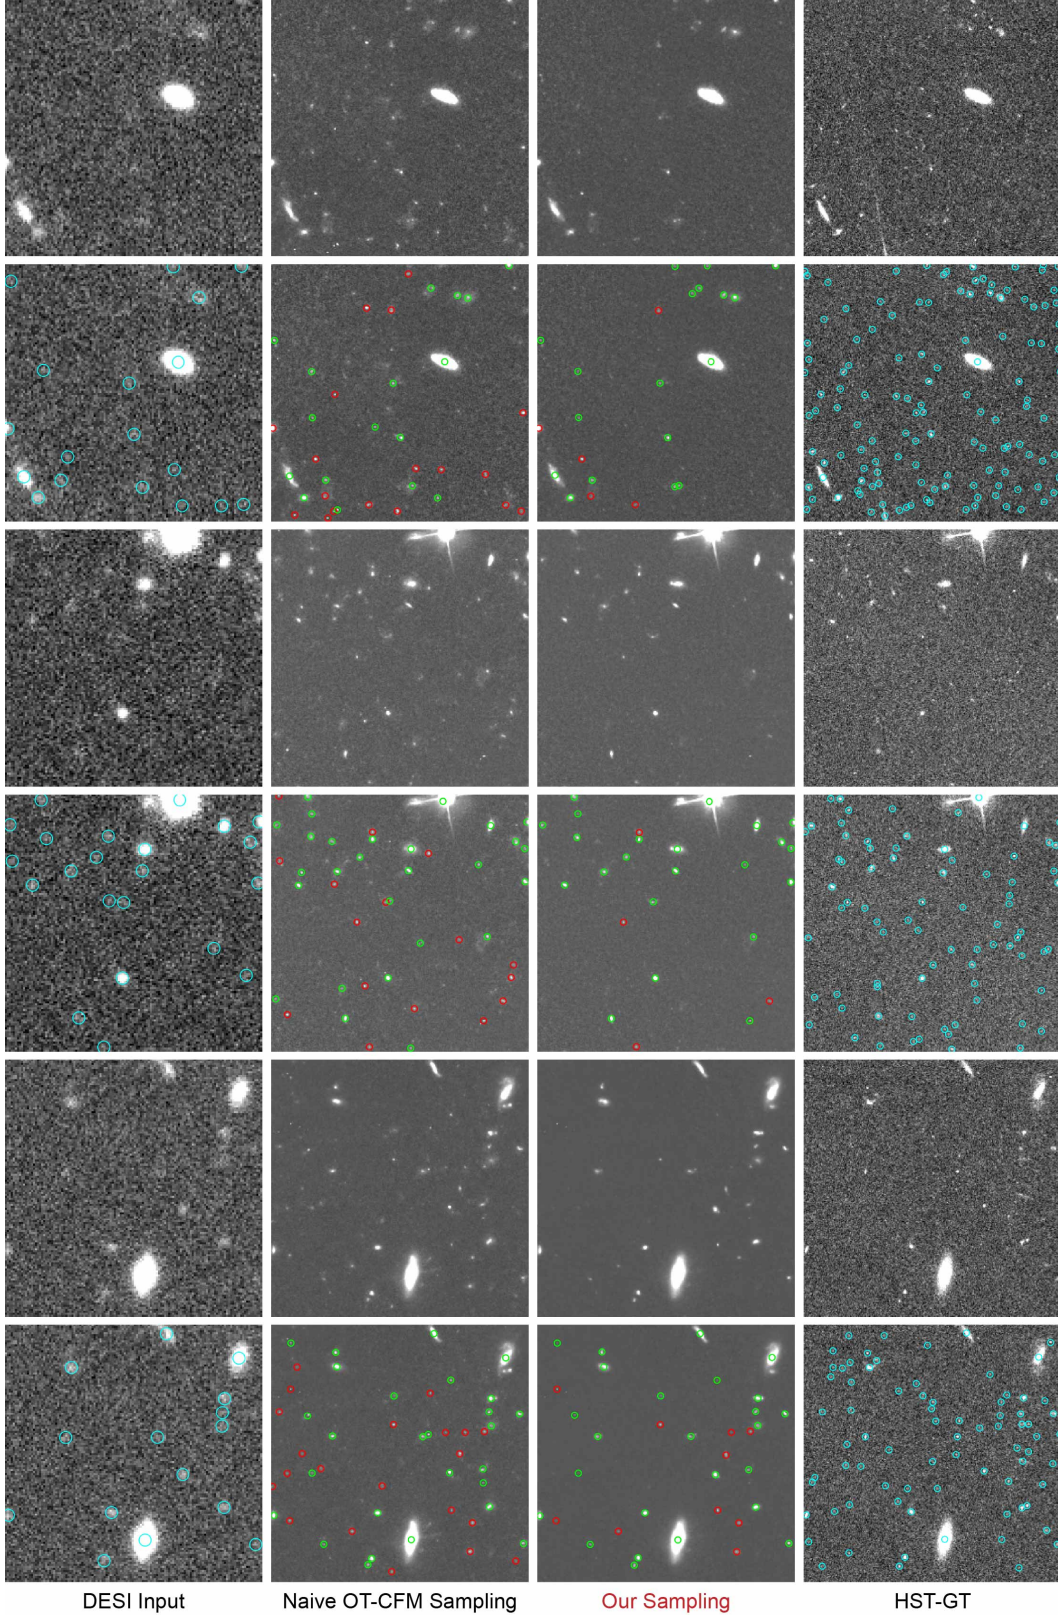


Figure 22: Additional MC-FS detection comparisons under the protocol of Figure 21, covering a faint background field, a saturated bright star with diffraction spikes, and a moderately crowded region. **Cyan** for ground-truth sources, **Green** for true positives, and **Red** for false positives.

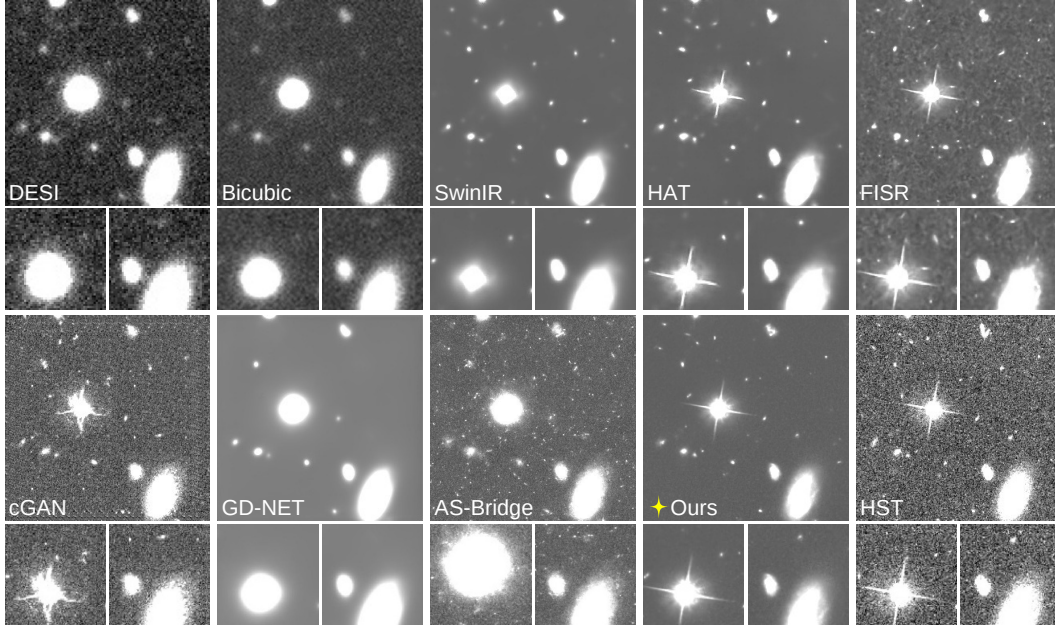


Figure 23: Qualitative DESI–HST $\times 2$ comparison of all evaluated methods, with two zoom-in panels per method. FluxFlow recovers the diffraction spikes of the central star and the morphology of the extended source while avoiding the speckled background of AS-Bridge.

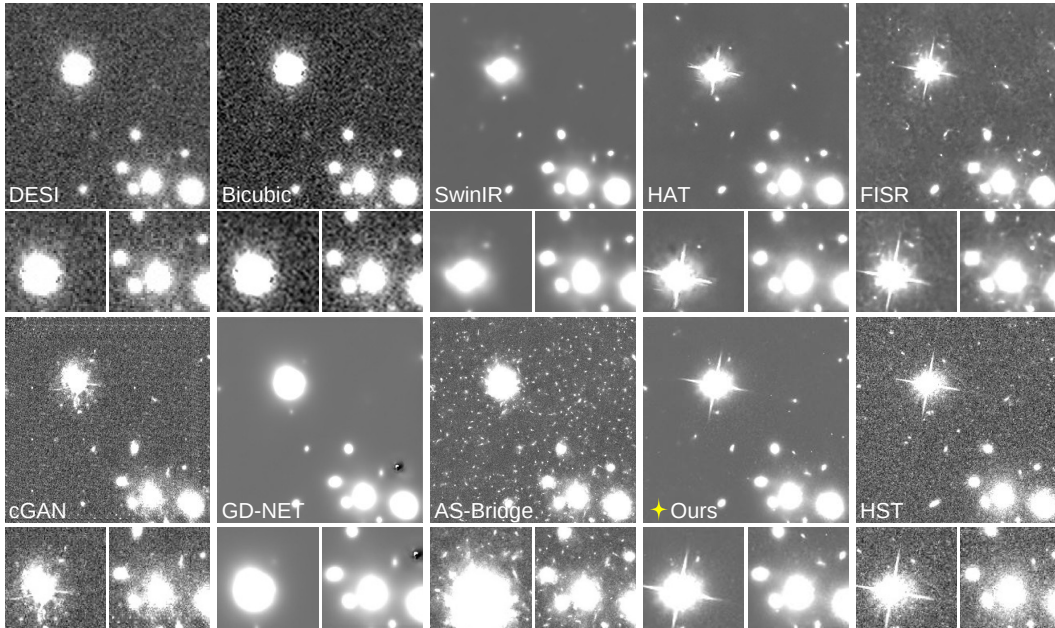


Figure 24: Additional DESI–HST $\times 2$ comparison, on a bright central star surrounded by closely packed compact sources. FluxFlow reproduces the spike pattern and resolves the neighboring sources without the merging or smearing seen in the baselines.

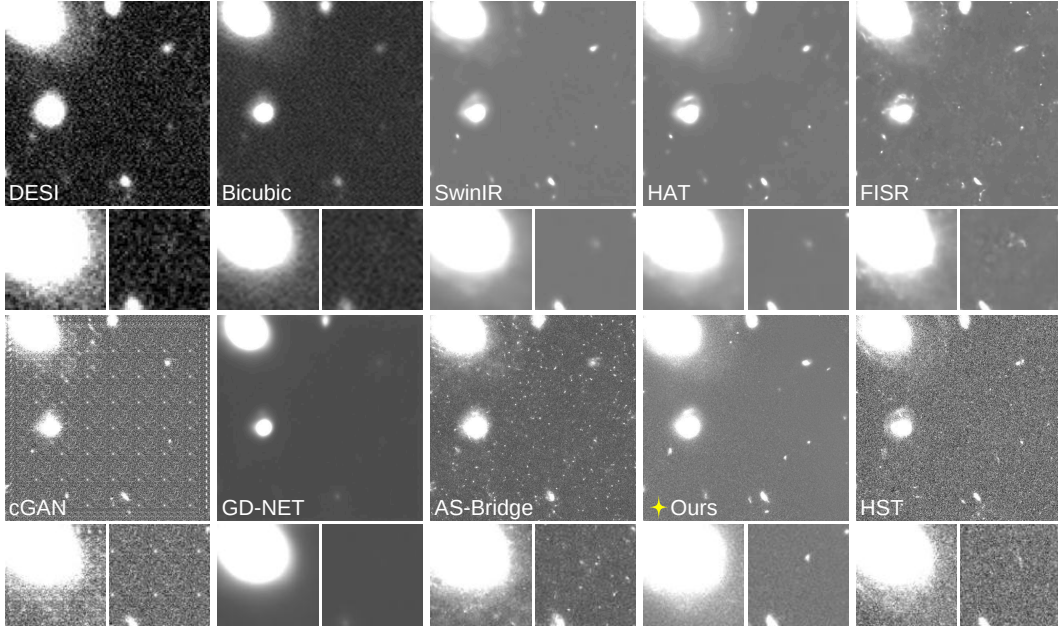


Figure 25: DESI–HST $\times 4$ comparison on a field with a saturated source on the upper-left corner and several low-SNR background galaxies. FluxFlow preserves faint background galaxies that Bicubic and GD-Net erase while reconstructing the saturated halo more cleanly than the speckled output of AS-Bridge.

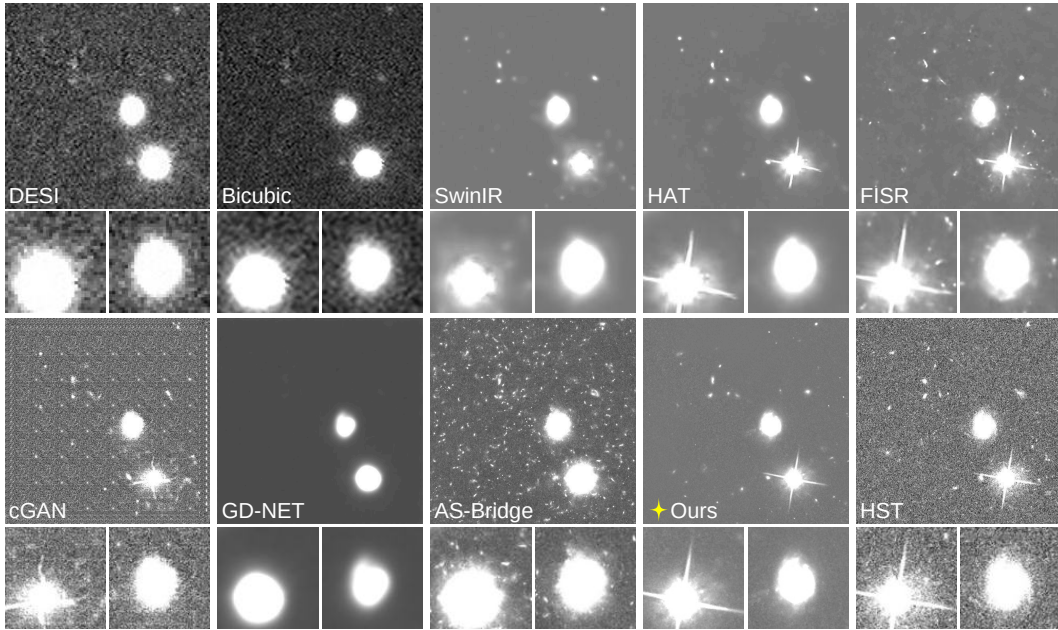


Figure 26: DESI–HST $\times 4$ comparison on a binary-star field. FluxFlow reproduces the four-pointed diffraction pattern on the lower companion together with surrounding faint sources, whereas regression baselines suppress the spike pattern and the generative baselines either oversmooth or oversharpen the background.

References

- sd-vae-ft-mse. <https://huggingface.co/stabilityai/sd-vae-ft-mse>, 2022.
- Hiroaki Aihara, Nobuo Arimoto, Robert Armstrong, Stéphane Arnouts, Neta A Bahcall, Steven Bickerton, James Bosch, Kevin Bundy, Peter L Capak, James HH Chan, et al. The hyper supprime-cam ssp survey: overview and survey design. *Publications of the Astronomical Society of Japan*, 70(SP1):S4, 2018.
- Kyle Barbary. Sep: Source extractor as a library. *Journal of Open Source Software*, 1(6):58, 2016.
- GM Bernstein and M Jarvis. Shapes and shears, stars and smears: optimal measurements for weak lensing. *The Astronomical Journal*, 123(2):583–618, 2002.
- Emmanuel Bertin. Swarp: resampling and co-adding fits images together. *Astrophysics Source Code Library*, pages ascl–1010, 2010.
- Emmanuel Bertin and Stephane Arnouts. Sextractor: Software for source extraction. *Astronomy and Astrophysics Supplement Series*, 117(2):393–404, 1996.
- Gengjia Chang, Xining Ge, Weijun Yuan, Zhan Li, Qiurong Song, Luen Zhu, and Shuhong Liu. Beyond model design: Data-centric training and self-ensemble for gaussian color image denoising. *arXiv preprint arXiv:2604.11468*, 2026a.
- Gengjia Chang, Xining Ge, Weijun Yuan, Zhan Li, Qiurong Song, Luen Zhu, and Shuhong Liu. Training-free model ensemble for single-image super-resolution via strong-branch compensation. *arXiv preprint arXiv:2604.11564*, 2026b.
- Junyang Chen, Jinshan Pan, and Jiangxin Dong. Faithdiff: Unleashing diffusion priors for faithful image super-resolution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 28188–28197, 2025a.
- Liangyu Chen, Xiaojie Chu, Xiangyu Zhang, and Jian Sun. Simple baselines for image restoration. In *European Conference on Computer Vision*, pages 17–33. Springer, 2022.
- Xiangyu Chen, Xintao Wang, Jiantao Zhou, Yu Qiao, and Chao Dong. Activating more pixels in image super-resolution transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22367–22377, 2023a.
- Xiangyu Chen, Xintao Wang, Wenlong Zhang, Xiangtao Kong, Yu Qiao, Jiantao Zhou, and Chao Dong. Hat: Hybrid attention transformer for image restoration. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2025b.
- Yubin Chen, Chengyue Gong, Weihang Guo, Xiaoyu Li, Zhenmei Shi, and Zhao Song. Provably efficient high-order flow matching in pixel space, 2025c. URL <https://openreview.net/forum?id=wbIYlFCPPq>.
- Zheng Chen, Yulun Zhang, Jinjin Gu, Linghe Kong, Xiaokang Yang, and Fisher Yu. Dual aggregation transformer for image super-resolution. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 12312–12321, 2023b.
- Hyungjin Chung, Jeongsol Kim, Michael T Mccann, Marc L Klasky, and Jong Chul Ye. Diffusion posterior sampling for general noisy inverse problems. *arXiv preprint arXiv:2209.14687*, 2022.
- Marcos V Conde, Gregor Geigle, and Radu Timofte. Instructir: High-quality image restoration following human instructions. In *European Conference on Computer Vision*, pages 1–21. Springer, 2024.
- Christopher J Conselice. The evolution of galaxy structure over cosmic time. *Annual Review of Astronomy and Astrophysics*, 52(1):291–337, 2014.
- Arjun Dey, David J Schlegel, Dustin Lang, Robert Blum, Kaylan Burleigh, Xiaohui Fan, Joseph R Findlay, Doug Finkbeiner, David Herrera, Stéphanie Juneau, et al. Overview of the desi legacy imaging surveys. *The Astronomical Journal*, 157(5):168, 2019.

- Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. *Advances in Neural Information Processing Systems*, 34:8780–8794, 2021.
- P Kingma Diederik and Welling Max. An introduction to variational autoencoders. *Foundations and Trends® in Machine Learning*, 12(4):307–392, 2019.
- Chao Dong, Chen Change Loy, Kaiming He, and Xiaoou Tang. Image super-resolution using deep convolutional networks. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 38(2): 295–307, 2015.
- Linwei Dong, Qingnan Fan, Yihong Guo, Zhonghao Wang, Qi Zhang, Jinwei Chen, Yawei Luo, and Changqing Zou. Tsd-sr: One-step diffusion with target score distillation for real-world image super-resolution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 23174–23184, 2025.
- Anne Gagneux, Ségolène Martin, Rémi Gribonval, and Mathurin Massias. Training flow matching: The role of weighting and parameterization. *arXiv preprint arXiv:2603.06454*, 2026.
- Xining Ge, Gengjia Chang, Weijun Yuan, Zhan Li, Zhanglu Chen, Boyang Yao, Yihang Chen, Yifan Deng, and Shuhong Liu. Dual-branch remote sensing infrared image super-resolution. *arXiv preprint arXiv:2604.10112*, 2026a.
- Xining Ge, Weijun Yuan, Gengjia Chang, Xuyang Li, and Shuhong Liu. Clip-guided data augmentation for night-time image dehazing. *arXiv preprint arXiv:2604.05500*, 2026b.
- Xiaoxuan Gong and Jie Ma. Ir-cm: The fast and general-purpose image restoration method based on consistency model. *Advances in Neural Information Processing Systems*, 37:75559–75584, 2024.
- S Gonzaga, W Hack, A Fruchter, and J e Mack. The drizzlepac handbook. *The DrizzlePac Handbook*, 2012.
- Hang Guo, Jinmin Li, Tao Dai, Zhihao Ouyang, Xudong Ren, and Shu-Tao Xia. Mambair: A simple baseline for image restoration with state-space model. In *European Conference on Computer Vision*, pages 222–241. Springer, 2024.
- Yuduo Guo, Peixin Weng, Hao Zhang, Chen Zhu, Jun Zhang, Jiamin Wu, and Qionghai Dai. Computational imaging towards next-generation optical observational astronomy. *Photonics Insights*, 5(1):R04–R04, 2026.
- Guande He, Kaiwen Zheng, Jianfei Chen, Fan Bao, and Jun Zhu. Consistency diffusion bridge models. *Advances in Neural Information Processing Systems*, 37:23516–23548, 2024.
- Xuyi He, Yuhui Quan, Ruotao Xu, and Hui Ji. A universal scale-adaptive deformable transformer for image restoration across diverse artifacts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12731–12741, 2025.
- Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- Jonathan Ho, Chitwan Saharia, William Chan, David J Fleet, Mohammad Norouzi, and Tim Salimans. Cascaded diffusion models for high fidelity image generation. *Journal of Machine Learning Research*, 23(47):1–33, 2022.
- Emiel Hooeboom, Jonathan Heek, and Tim Salimans. simple diffusion: End-to-end diffusion for high resolution images. In *International Conference on Machine Learning*, pages 13213–13232. PMLR, 2023.
- Emiel Hooeboom, Thomas Mensink, Jonathan Heek, Kay Lamerigts, Ruiqi Gao, and Tim Salimans. Simpler diffusion: 1.5 fid on imagenet512 with pixel-space diffusion. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 18062–18071, 2025.
- Samuel Hurault, Arthur Leclaire, and Nicolas Papadakis. Proximal denoiser for convergent plug-and-play optimization with nonconvex regularization. In *International Conference on Machine Learning*, pages 9483–9505. PMLR, 2022.

- Ulugbek S Kamilov, Charles A Bouman, Gregory T Buzzard, and Brendt Wohlberg. Plug-and-play methods for integrating physical and learned models in computational imaging: Theory, algorithms, and applications. *IEEE Signal Processing Magazine*, 40(1):85–97, 2023.
- Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. Elucidating the design space of diffusion-based generative models. *Advances in Neural Information Processing Systems*, 35:26565–26577, 2022.
- Robert Keys. Cubic convolution interpolation for digital image processing. *IEEE transactions on acoustics, speech, and signal processing*, 29(6):1153–1160, 1981.
- Bo Li, Kaitao Xue, Bin Liu, and Yu-Kun Lai. Bbdm: Image-to-image translation with brownian bridge diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1952–1961, 2023.
- Boyun Li, Haiyu Zhao, Wenxin Wang, Peng Hu, Yuanbiao Gou, and Xi Peng. Mair: A locality-and continuity-preserving mamba for image restoration. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7491–7501, 2025a.
- Jianze Li, Jiezhong Cao, Yong Guo, Wenbo Li, and Yulun Zhang. One diffusion step to real-world super-resolution via flow trajectory distillation. *arXiv preprint arXiv:2502.01993*, 2025b.
- Liuzhuozheng Li, Zhiyuan Zhan, Shuhong Liu, Dengyang Jiang, Zanyi Wang, Guang Dai, Jingdong Wang, and Mengmeng Wang. Exploring time conditioning in diffusion generative models from disjoint noisy data manifolds. *arXiv preprint arXiv:2604.25289*, 2026.
- Tianhong Li and Kaiming He. Back to basics: Let denoising generative models denoise. *arXiv preprint arXiv:2511.13720*, 2025.
- Wanjuan Li, Zhe Liu, and Hongtao Deng. A self-attention based srgan for super-resolution of astronomical image. In *2022 IEEE 8th International Conference on Computer and Communications*, pages 1977–1981. IEEE, 2022.
- Jie Liang, Hui Zeng, and Lei Zhang. Efficient and degradation-adaptive network for real-world image super-resolution. In *European Conference on Computer Vision*, pages 574–591. Springer, 2022.
- Jingyun Liang, Jiezhong Cao, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte. Swinir: Image restoration using swin transformer. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1833–1844, 2021.
- Bee Lim, Sanghyun Son, Heewon Kim, Seungjun Nah, and Kyoung Mu Lee. Enhanced deep residual networks for single image super-resolution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, pages 136–144, 2017.
- Yaron Lipman, Ricky TQ Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow matching for generative modeling. *arXiv preprint arXiv:2210.02747*, 2022.
- Guan-Hong Liu, Arash Vahdat, De-An Huang, Evangelos A Theodorou, Weili Nie, and Anima Anandkumar. I²SB: Image-to-image Schrödinger bridge. *arXiv preprint arXiv:2302.05872*, 2023.
- Shuhong Liu, Chenyu Bao, Ziteng Cui, Yun Liu, Xuangeng Chu, Lin Gu, Marcos V Conde, Ryo Umagami, Tomohiro Hashimoto, Zijian Hu, et al. Realx3d: A physically-degraded 3d benchmark for multi-view visual restoration and reconstruction. *arXiv preprint arXiv:2512.23437*, 2025a.
- Shuhong Liu, Xiang Chen, Hongming Chen, Quanfeng Xu, and Mingrui Li. Deraings: Gaussian splatting for enhanced scene reconstruction in rainy environments. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 5558–5566, 2025b.
- Shuhong Liu, Tianchen Deng, Heng Zhou, Liuzhuozheng Li, Hongyu Wang, Danwei Wang, and Mingrui Li. Mg-slam: Structure gaussian splatting slam with manhattan world hypothesis. *IEEE Transactions on Automation Science and Engineering*, 2025c.
- Shuhong Liu, Lin Gu, Ziteng Cui, Xuangeng Chu, and Tatsuya Harada. I2-nerf: Learning neural radiance fields under physically-grounded media interactions. *arXiv preprint arXiv:2510.22161*, 2025d.

- Shuhong Liu, Chenyu Bao, Ziteng Cui, Xuangeng Chu, Bin Ren, Lin Gu, Xiang Chen, Mingrui Li, Long Ma, Marcos V Conde, et al. Ntire 2026 3d restoration and reconstruction in real-world adverse conditions: Realx3d challenge results. *arXiv preprint arXiv:2604.04135*, 2026a.
- Shuhong Liu, Xining Ge, Ziyang Gu, Quanfeng Xu, Lin Gu, Ziteng Cui, Xuangeng Chu, Jun Liu, Dong Li, and Tatsuya Harada. Denoising the deep sky: physics-based ccd noise formation for astronomical imaging. *arXiv preprint arXiv:2601.23276*, 2026b.
- Zhijian Luo, Shaohua Zhang, Jianzhen Chen, Zhu Chen, Liping Fu, Hubing Xiao, Wei Du, and Chenggang Shu. Cross-survey image transformation: Enhancing sdss and decals images to near-hsc quality for advanced astronomical analysis. *The Astrophysical Journal Supplement Series*, 277(1): 22, 2025.
- Rachel Mandelbaum, Barnaby Rowe, Robert Armstrong, Deborah Bard, Emmanuel Bertin, James Bosch, Dominique Boutigny, Frederic Courbin, William A Dawson, Annamaria Donnarumma, et al. Great3 results–i. systematic errors in shear estimation and the impact of real galaxy morphology. *Monthly Notices of the Royal Astronomical Society*, 450(3):2963–3007, 2015.
- Naoki Matsunaga, Masato Ishii, Akio Hayakawa, Kenji Suzuki, and Takuya Narihira. Fine-grained image editing by pixel-wise guidance using diffusion models. *arXiv preprint arXiv:2212.02024*, 2022.
- Jiawei Miao, Liangping Tu, Bin Jiang, Xiangru Li, and Bo Qiu. Astrosr: A data set of galaxy images for astronomical superresolution research. *The Astrophysical Journal Supplement Series*, 274(1):7, 2024.
- Ethan Perez, Florian Strub, Harm De Vries, Vincent Dumoulin, and Aaron Courville. Film: Visual reasoning with a general conditioning layer. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018.
- Alicja Polowczyk, Agnieszka Polowczyk, Piotr Borycki, Joanna Waczyńska, Jacek Tabor, and Przemysław Spurek. Diamond: Directed inference for artifact mitigation in flow matching models. *arXiv preprint arXiv:2602.00883*, 2026.
- Vaishnav Potlapalli, Syed Waqas Zamir, Salman H Khan, and Fahad Shahbaz Khan. Promptir: Prompting for all-in-one image restoration. *Advances in Neural Information Processing Systems*, 36:71275–71293, 2023.
- Mehrsa Pourya, Bassam El Rawas, and Michael Unser. Flower: A flow-matching solver for inverse problems. *arXiv preprint arXiv:2509.26287*, 2025.
- Haotong Qin, Yulun Zhang, Yifu Ding, Xianglong Liu, Martin Danelljan, Fisher Yu, et al. Quantsr: accurate low-bit quantization for efficient image super-resolution. *Advances in Neural Information Processing Systems*, 36:56838–56848, 2023.
- Km Nitu Rai, Yuri van der Burg, Soumen Basak, Prasenjit Saha, and Subrata Sarangi. Generative ai for image reconstruction in intensity interferometry: a first attempt. *arXiv preprint arXiv:2508.03398*, 2025.
- Pranath Reddy, Michael W Toomey, Hanna Parul, and Sergei Gleyzer. Diffense: a conditional diffusion model for super-resolution of gravitational lensing data. *Machine Learning: Science and Technology*, 5(3):035076, 2024.
- Bin Ren, Hang Guo, Yan Shu, Jiaqi Ma, Ziteng Cui, Shuhong Liu, Guofeng Mei, Lei Sun, Zongwei Wu, Fahad Shahbaz Khan, Salman Khan, Radu Timofte, Yawei Li, et al. The eleventh NTIRE 2026 efficient super-resolution challenge report. In *Proceedings of the Computer Vision and Pattern Recognition Conference Workshops*, 2026.
- Yaniv Romano, Michael Elad, and Peyman Milanfar. The little engine that could: Regularization by denoising (red). *SIAM journal on imaging sciences*, 10(4):1804–1844, 2017.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695, 2022.

- Hengxin Ruan, Qiufan Lin, Shupe Chen, Yang Wang, and Wei Zhang. Investigation on deep learning-based galaxy image translation models. *Astronomy & Astrophysics*, 701:A82, 2025.
- Chitwan Saharia, William Chan, Huiwen Chang, Chris Lee, Jonathan Ho, Tim Salimans, David Fleet, and Mohammad Norouzi. Palette: Image-to-image diffusion models. In *ACM SIGGRAPH 2022 Conference Proceedings*, pages 1–10, 2022a.
- Chitwan Saharia, Jonathan Ho, William Chan, Tim Salimans, David J Fleet, and Mohammad Norouzi. Image super-resolution via iterative refinement. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(4):4713–4726, 2022b.
- Mara Salvato, Olivier Ilbert, and Ben Hoyle. The many flavours of photometric redshifts. *Nature Astronomy*, 3(3):212–222, 2019.
- Matt L Sampson, Peter Melchior, Charlotte Ward, and Sufia Birmingham. Score-matching neural networks for improved multi-band source separation. *Astronomy and Computing*, 49:100875, 2024.
- Qianqian Shan, Cuixiang Liu, Bo Qiu, Li Luo, Fuji Ren, Zhiren Pan, and Yicong Chen. Galaxy image super-resolution reconstruction using diffusion network. *Engineering Applications of Artificial Intelligence*, 142:109836, 2025.
- M Sirianni, MJ Jee, N Benítez, JP Blakeslee, AR Martel, Gerhardt Meurer, M Clampin, G De Marchi, HC Ford, R Gilliland, et al. The photometric performance and calibration of the hubble space telescope advanced camera for surveys. *Publications of the Astronomical Society of the Pacific*, 117(836):1049–1112, 2005.
- Jiaming Song, Arash Vahdat, Morteza Mardani, and Jan Kautz. Pseudoinverse-guided diffusion models for inverse problems. In *International Conference on Learning Representations*, 2023.
- Wei Song, Ying Ma, Haoying Sun, Xiaobing Zhao, and Ganghua Lin. Improving the spatial resolution of solar images using super-resolution diffusion generative adversarial networks. *Astronomy & Astrophysics*, 686:A272, 2024.
- Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020.
- Sam F Sweere, Ivan Valtchanov, Maggie Lieu, Antonia Vojtekova, Eva Verdugo, Maria Santos-Lleo, Florian Pacaud, Alexia Briassouli, and Daniel Cámpora Pérez. Deep learning-based super-resolution and de-noising for xmm-newton images. *Monthly Notices of the Royal Astronomical Society*, 517(3):4054–4069, 2022.
- Yuan-Sen Ting. Deep learning in astrophysics. *Annual Review of Astronomy and Astrophysics*, 64, 2025.
- Alexander Tong, Kilian Fatras, Nikolay Malkin, Guillaume Hugué, Yanlei Zhang, Jarrid Rector-Brooks, Guy Wolf, and Yoshua Bengio. Improving and generalizing flow-based generative models with minibatch optimal transport. *arXiv preprint arXiv:2302.00482*, 2023.
- Singanallur V Venkatakrishnan, Charles A Bouman, and Brendt Wohlberg. Plug-and-play priors for model based reconstruction. In *2013 IEEE global conference on signal and information processing*, pages 945–948. IEEE, 2013.
- Cong Wang, Jinshan Pan, Wei Wang, Jiangxin Dong, Mengzhu Wang, Yakun Ju, and Junyang Chen. Promptrestorer: A prompting image restoration method with degradation perception. *Advances in Neural Information Processing Systems*, 36:8898–8912, 2023.
- Yufei Wang, Wenhan Yang, Xinyuan Chen, Yaohui Wang, Lanqing Guo, Lap-Pui Chau, Ziwei Liu, Yu Qiao, Alex C Kot, and Bihan Wen. Sinsr: diffusion-based image super-resolution in a single step. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 25796–25805, 2024.

- Norbert Wiener. *Extrapolation, interpolation, and smoothing of stationary time series: with engineering applications*. The MIT press, 1949.
- Kuo-Cheng Wu, Guohang Zhuang, Jinyang Huang, Xiang Zhang, Wanli Ouyang, and Yan Lu. Star: A benchmark for astronomical star fields super-resolution. *arXiv preprint arXiv:2507.16385*, 2025.
- Rongyuan Wu, Lingchen Sun, Zhiyuan Ma, and Lei Zhang. One-step effective diffusion network for real-world image super-resolution. *Advances in Neural Information Processing Systems*, 37: 92529–92553, 2024.
- Donald G York, Jennifer Adelman, John E Anderson, Jr, Scott F Anderson, James Annis, Neta A Bahcall, JA Bakken, Robert Barkhouser, Steven Bastian, Eileen Berman, et al. The sloan digital sky survey: Technical summary. *The Astronomical Journal*, 120(3):1579–1587, 2000.
- Wei Yu, Bowen Yang, Qinglin Liu, Jianing Li, Shengping Zhang, and Xiangyang Ji. Rethinking imbalance in image super-resolution for efficient inference. *Advances in Neural Information Processing Systems*, 37:6860–6883, 2024.
- Zongsheng Yue, Jianyi Wang, and Chen Change Loy. Resshift: Efficient diffusion model for image super-resolution by residual shifting. *Advances in Neural Information Processing Systems*, 36: 13294–13307, 2023.
- Zongsheng Yue, Kang Liao, and Chen Change Loy. Arbitrary-steps image super-resolution via diffusion inversion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 23153–23163, 2025.
- Syed Waqas Zamir, Aditya Arora, Salman Khan, Munawar Hayat, Fahad Shahbaz Khan, Ming-Hsuan Yang, and Ling Shao. Multi-stage progressive image restoration. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14821–14831, 2021.
- Syed Waqas Zamir, Aditya Arora, Salman Khan, Munawar Hayat, Fahad Shahbaz Khan, and Ming-Hsuan Yang. Restormer: Efficient transformer for high-resolution image restoration. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5728–5739, 2022.
- Xiangrui Zeng, Lingyu Zhu, Shiqi Wang, and Sam Kwong. Wienerflow: Wiener-adaptive flow matching for perception and fidelity trade-off in low-light image enhancement, 2025. URL <https://openreview.net/forum?id=TwvnG6mobR>.
- Dichang Zhang, Yixuan Shao, Simon Birrer, and Dimitris Samaras. As-bridge: A bidirectional generative framework bridging next-generation astronomical surveys. *arXiv preprint arXiv:2603.11928*, 2026.
- Kai Zhang, Yawei Li, Wangmeng Zuo, Lei Zhang, Luc Van Gool, and Radu Timofte. Plug-and-play image restoration with deep denoiser prior. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(10):6360–6376, 2021.
- Leheng Zhang, Weiyi You, Kexuan Shi, and Shuhang Gu. Uncertainty-guided perturbation for image super-resolution diffusion model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 17980–17989, 2025.
- Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- Xiang Zhang, Yulun Zhang, and Fisher Yu. Hit-sr: Hierarchical transformer for efficient image super-resolution. In *European Conference on Computer Vision*, pages 483–500. Springer, 2024a.
- Yasi Zhang, Peiyu Yu, Yaxuan Zhu, Yingshan Chang, Feng Gao, Ying N Wu, and Oscar Leong. Flow priors for linear inverse problems via iterative corrupted trajectory matching. *Advances in Neural Information Processing Systems*, 37:57389–57417, 2024b.
- Guangcong Zheng, Xianpan Zhou, Xuwei Li, Zhongang Qi, Ying Shan, and Xi Li. Layoutdiffusion: Controllable diffusion model for layout-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22490–22499, 2023a.

- Qinqing Zheng, Matt Le, Neta Shaul, Yaron Lipman, Aditya Grover, and Ricky TQ Chen. Guided flows for generative modeling and decision making. *arXiv preprint arXiv:2311.13443*, 2023b.
- Linqi Zhou, Aaron Lou, Samar Khanna, and Stefano Ermon. Denoising diffusion bridge models. *arXiv preprint arXiv:2309.16948*, 2023a.
- Man Zhou. Improving the learning capability of small-size image restoration network by deep fourier shifting. In *Advances in Neural Information Processing Systems*, 2024.
- Yupeng Zhou, Zhen Li, Chun-Le Guo, Song Bai, Ming-Ming Cheng, and Qibin Hou. Srformer: Permuted self-attention for single image super-resolution. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 12780–12791, 2023b.
- Yuanzhi Zhu, Kai Zhang, Jingyun Liang, Jiezhang Cao, Bihan Wen, Radu Timofte, and Luc Van Gool. Denoising diffusion models for plug-and-play image restoration. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1219–1229, 2023.