

Harness In-Context Operator Learning with Chain of Operators

Minghui Yang^{1,2} Ling Guo¹ Liu Yang^{2*}

¹Department of Mathematics, Shanghai Normal University, Shanghai, China

²Department of Mathematics, National University of Singapore, Singapore

Abstract

Neural operators approximate mappings between function spaces, but often generalize poorly to other operators and usually require fine-tuning or retraining. In-Context Operator Networks (ICON) addresses this issue by prompting the model with numerical context so that the model learns specific operators from prompts and adapt to different operators without fine-tuning. However, ICON may still fail to generalize to out-of-distribution (OOD) operator tasks. Inspired by the success of harness engineering of Large Language models (LLMs), we introduce Chain of Operators (CHOP), a framework that harness a frozen ICON to OOD operator tasks without updating its parameters. Specifically, CHOP constructs a chain of operators consisting of explicit elementary transformations and the frozen ICON. Experiments on a scalar conservation law and a mean-field control problem show that CHOP reduces relative inference error over direct ICON evaluation, while each operator in the chain remains interpretable and in closed form. A chain constructed on one PDE family further generalizes to a different family, indicating shared mechanisms across harness systems.

1 Introduction

The simulation and control of complex physical systems are often governed by families of solution operators,

$$\{S_\varphi : \mathcal{X}_\varphi \rightarrow \mathcal{Y}_\varphi\}_{\varphi \in \Phi},$$

where $\mathcal{X}_\varphi$ and $\mathcal{Y}_\varphi$ denote the input and output function spaces for the instance φ , and φ encodes critical physical information such as flux functions, coefficient fields, or boundary conditions. Varying φ may change the governing equation, the admissible function spaces and the structural constraints satisfied by the solution.

Classical numerical methods approximate S_φ by discretizing the governing equations and solving the resulting finite-dimensional problem for each PDE instance. By contrast, operator learning methods seek to construct a surrogate for the solution operator S_φ itself, which, once trained, yields the solution for any new input through a single forward evaluation [1, 2, 3]. Deep operator networks (DeepONets [4]) and Fourier neural operators (FNOs [5]) are two representative architectures in operator learning, and have been shown to achieve high accuracy for operator families sufficiently close to the training distribution [6]. Subsequent developments have further incorporated physics-informed objectives, complex dynamics and irregular geometries, as well as alternative operator architectures [7, 8, 9, 10, 11, 12]. For fixed trained weights, however, the model represents merely a single mapping between function spaces, as its parameters are specialized to one particular input-output relation. Consequently, when confronted with a new target operator or system, the model

*Corresponding author. Email: yangliu@nus.edu.sg

may generalize poorly and often requires retraining. This out-of-distribution (OOD) sensitivity is not unique to a particular architecture. Existing remedies for neural operators often incorporate physics-informed constraints or sparse observations to improve reliable extrapolation [13], while transfer learning has been used to adapt PDE operators under conditional shift [14].

Such repeated retraining imposes a severe computational burden, particularly when the physical domain or control parameters vary across tasks. To address this limitation, recent work has shifted toward multi-operator learning [15, 16]. By jointly pretraining on large-scale datasets across PDE systems, these approaches seek a shared latent space across governing equations, within which common physical structure can be represented [17, 18, 19]. However, building a unified multiphysics operator model remains challenging, since it requires multiscale training data and incurs a high pretraining cost. When the target operator lies outside the training distribution, these models may still require additional pretraining or fine-tuning to adapt to the new operator [19, 20, 21, 22]. To reduce the need for additional data collection and fine-tuning, some recent works incorporate explicit PDE information to improve few-shot or zero-shot generalization across multiple physical systems [23, 24, 25, 26]. Such approaches rely on prior knowledge of the underlying PDE, which is often unavailable when a model is deployed in a new environment.

To move toward zero-shot generalization across PDE systems without such prior knowledge, recent work in scientific computing has turned to in-context learning. The In-Context Operator Network (ICON [27, 28]) infers the target operator from a few prompted input-output function pairs at inference time and can be retargeted across different PDE systems without updating its weights. In-context learning has also been combined with data-efficient pretraining [17], generative neural operators for parametric PDEs [29, 30], probabilistic generative formulations for uncertainty quantification [31], and graph models for air quality prediction [32]. The paradigm has also been extended to financial execution [33] and measure-valued optimal transport [34], while theoretical work analyzes robustness [35] and task diversity [36]. Although in-context learning can identify the target operator from prompted examples, distribution shift persists. A new PDE changes the induced solution operator, often through shifts in coefficients, boundary data, smoothness, oscillation scale or value range. Such shifts can degrade the frozen model’s predictions. Within the ICON line of work, affine rescaling has been used to align shifted PDE instances with the training scale [37]. The efficacy of this simple alignment indicates that OOD failure is not inherently a limitation of the model itself. This phenomenon may instead arise from a mismatch between the prompt and the regime in which the model has learned to identify operators. A natural alternative to updating the parameters is therefore to reformulate the prompt and output variables, thereby rendering the induced operator easier for the frozen model to infer.

Most neural operator adaptation methods handle such shifts by fine-tuning the model or by introducing additional neural modules. These strategies can be effective, but they add black-box components and are often computationally expensive. To address this limitation, we propose **Chain of Operators** (CHOP), a framework for out-of-distribution operator adaptation without updating the pretrained model. Instead of relying on direct prediction by the frozen model, CHOP composes the target operator within a chain of operators, thereby leveraging the multi-operator in-context capability of ICON. This chain is a composition of elementary operators and calls to the frozen ICON model, where each operator in the chain performs an explicit step, such as rescaling values, changing coordinates, applying a symmetry, etc. By reformulating the input and output spaces for ICON model through this chain, the originally challenging out-of-distribution problem is mapped back into an in-distribution regime. Consequently, identifying and predicting the induced operator becomes a task well within the inherent capabilities of the frozen ICON model. Because all operations outside the frozen ICON are implemented as explicit, closed-form code, the entire adaptation process remains fully interpretable. Furthermore, this mechanism conceptually mirrors the “Chain of Thought”

reasoning in Large Language Models: it systematically decomposes a complex, intractable problem into a sequence of simpler, manageable sub-tasks.

The remainder of this paper is organized as follows. Section 2 reviews ICON and formulates the operator-adaptation problem. Section 3 presents CHOP, including the prompt-side and prediction-side operator construction and the agentic evolutionary search used to discover operator chains. Section 4 evaluates CHOP on a scalar conservation law and a mean-field control problem, including cross-PDE transfer. Section 5 concludes.

2 Preliminaries

2.1 In-Context Operator Network

As described in Section 1, let

$$\{S_\varphi : \mathcal{X}_\varphi \rightarrow \mathcal{Y}_\varphi\}_{\varphi \in \Phi}$$

denote the family of solution operators induced by a parametrized PDE class.

In-Context Operator Networks were introduced for operator learning from data prompts of paired input and output functions [27] and later extended to multimodal prompts with text descriptions [38]. The input prompt contains D context pairs

$$\mathcal{C} = \{(x_i, y_i)\}_{i=1}^D, \quad y_i = S_\varphi(x_i),$$

and a query input $x^* \in \mathcal{X}_\varphi$. The context pairs are examples of the target mapping S_φ , and the desired query output is $S_\varphi(x^*)$. To build the prompt, each input x_i , each output y_i and the query x^* are sampled on finite sets of spatial or spatiotemporal locations. The sampled locations and values are encoded as tokens and passed to a transformer attention architecture. At inference time, the context tokens represent examples of the target mapping, while the query tokens specify the input whose output is unknown. With fixed parameters θ , ICON attends jointly to $\mathcal{C}$ and x^* and defines the inference map

$$\hat{y}^* = \text{ICON}_\theta(\mathcal{C}, x^*) \approx S_\varphi(x^*), \quad (1)$$

in which adaptation to S_φ is performed implicitly through attention over $\mathcal{C}$, without any gradient update. Because θ is fixed across operators, substituting different contexts can condition the same parameters on different operators, provided that the prompt representation remains compatible.

2.2 Problem Setting

Given a pretrained ICON model with frozen parameters θ , let $\mathcal{D}_{\text{op}}$ denote its pretraining operator distribution. At inference time, only the prompt $(\mathcal{C}, x^*)$ and ICON_θ are available. Let $\mathcal{X}$ and $\mathcal{Y}$ denote the input and output function spaces of the prompt. We denote by $T : \mathcal{X} \rightarrow \mathcal{Y}$ the target operator expressed by the prompt. The context labels satisfy $y_i = T(x_i)$ for each context pair, while the unknown query label is $y^* = T(x^*)$. We consider the case where T may lie outside $\text{supp}(\mathcal{D}_{\text{op}})$.

Raw ICON inference applies $\text{ICON}_\theta(\mathcal{C}, x^*)$ directly to this operator identification problem. For out-of-distribution operators, this direct formulation may present the pretrained model with an operator far from $\text{supp}(\mathcal{D}_{\text{op}})$, where its predictions can be unreliable even when the context examples are correct. We therefore formulate inference as operator reformulation through prompts. The objective is to apply explicit and interpretable mathematical operations to the prompt, thereby obtaining an induced operator problem closer to the regime in which ICON_θ is reliable. The reformulation uses only the input data in the prompt $(\mathcal{C}, x^*)$: the query label y^* is unavailable and θ is not updated. After ICON makes a prediction for the induced problem, the result is mapped back

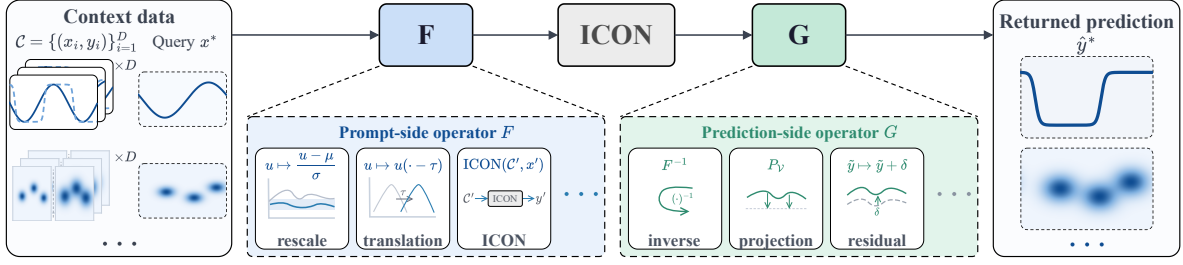


Figure 1: **Chain of Operators (CHOP)**. A frozen in-context operator network (ICON) is wrapped by a discovered prompt-side operator $F = F_m \circ \dots \circ F_1$ and prediction-side operator $G = G_r \circ \dots \circ G_1$, forming the chain $F \rightarrow \text{ICON} \rightarrow G$. Given an in-context prompt of demonstration pairs $\mathcal{C} = \{(x_i, y_i)\}_{i=1}^D$ and a query x^* , F rewrites the prompt toward the regime where the frozen ICON model is reliable, ICON predicts, and G returns the result to the original output space $\hat{y}^*$.

to the original variables to approximate $T(x^*)$. Section 3 formalizes this operator reformulation through prompts as the Chain of Operators framework.

3 Chain of Operators (CHOP)

CHOP handles new tasks by wrapping a frozen ICON model with a chain of operators. The object is not a single preprocessing or correction step, but an executable sequence of operators that rewrite the prompt, run ICON inference on the induced problem, and then return or correct the prediction. Figure 1 gives an overview of the CHOP pipeline.

3.1 Executable operator chain

Let $P^{(0)} = (\mathcal{C}, x^*)$ be the input data. The prompt-side chain consists of operators $F_1, \dots, F_m$.

$$P^{(j)} = F_j(P^{(j-1)}), \quad P^{(j)} = (\mathcal{C}^{(j)}, x^{(j)}), \quad j = 1, \dots, m. \quad (2)$$

Each F_j maps the previous prompt to the next prompt. It may normalize values, change coordinates, apply a symmetry action, transform context pairs, or call the frozen ICON on a subproblem formed from $P^{(j-1)}$.

After the last prompt-side operator, ICON is applied to the terminal induced prompt, which may correspond to an induced operator different from the original target operator.

$$\tilde{y}^{(0)} = \text{ICON}(\mathcal{C}^{(m)}, x^{(m)}). \quad (3)$$

The prediction is then passed through a possibly different number of prediction-side operators $G_1, \dots, G_r$. Each G_k acts on the previous prediction and may use the prompt states produced by the prompt-side chain.

$$\tilde{y}^{(k)} = G_k(\tilde{y}^{(k-1)}, P^{(0)}, \dots, P^{(m)}), \quad k = 1, \dots, r, \quad (4)$$

Thus, the full inference path is

$$(\mathcal{C}, x^*) = P^{(0)} \xrightarrow{F_1} P^{(1)} \xrightarrow{F_2} \dots \xrightarrow{F_m} P^{(m)} \xrightarrow{\text{ICON}} \tilde{y}^{(0)} \xrightarrow{G_1} \tilde{y}^{(1)} \xrightarrow{G_2} \dots \xrightarrow{G_r} \tilde{y}^{(r)} = \hat{y}^*. \quad (5)$$

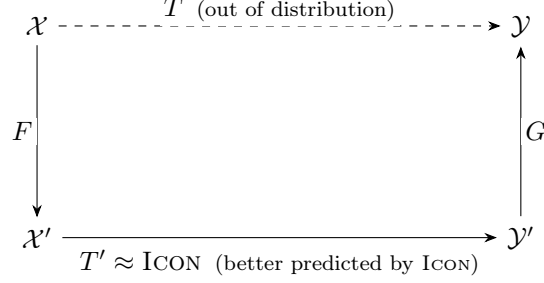


Figure 2: Induced-operator route of CHOP. Raw ICON attempts to infer T directly from the original prompt. CHOP instead maps the prompt to an induced operator T' , predicts in the induced space, and returns the result through G .

This expression shows the full CHOP operator chain. Some prediction-side operators may reverse prompt-side transformations, such as coordinate changes or value rescaling, but they are not restricted to simple inverses. They can also enforce physical constraints or correct errors estimated from the prompt data.

3.2 Prompt-side and prediction-side operators

More generally, we write the operator chain as a composition of a prompt-side operator and a prediction-side operator.

$$F = F_m \circ \dots \circ F_1, \quad G = G_r \circ \dots \circ G_1, \quad (6)$$

Here F collects the m prompt-side operators and G collects the r prediction-side operators. The two compositions need not have the same length or be inverse to each other. This composition can be summarized by the compact representation

$$\mathcal{X} \xrightarrow{F} \mathcal{X}' \xrightarrow{\text{ICON} \approx T'} \mathcal{Y}' \xrightarrow{G} \mathcal{Y}. \quad (7)$$

In this representation, ICON approximates the induced operator T' between the transformed input and output spaces, and G returns the prediction to the original output space. Figure 2 contrasts this transformed path with direct ICON inference. Raw ICON attempts to infer T directly from the original prompt, whereas CHOP performs ICON inference in the induced space defined by T' .

If the prompt-side operators are reversible and the prediction-side chain applies the corresponding inverse return maps, the induced operator is related to the original target by

$$T = G \circ T' \circ F, \quad T' = G^{-1} \circ T \circ F^{-1}. \quad (8)$$

This identity is a useful design principle for exact transformations such as changes of coordinates, value normalizations or symmetry actions. However, exact reversibility is not the defining assumption of CHOP. The executable chains used in practice may include projections that are not invertible, consistency corrections or residual transfer steps.

$$G(T'(F(x))) \approx T(x), \quad \text{ICON predicts } T' \text{ more accurately than } T, \quad (9)$$

This relaxed condition covers both exact structural transformations and approximate corrective operators within the same framework.

For a prompt $(\mathcal{C}, x^*)$, F returns the terminal induced prompt.

$$F(\mathcal{C}, x^*) = P', \quad G(\hat{y}', P^{(0)}, \dots, P^{(m)}) = \hat{y}^*, \quad (10)$$

with

$$P' = (\mathcal{C}', x^{*'}), \quad \hat{y}' = \text{ICON}(\mathcal{C}', x^{*'}). \quad (11)$$

Here $P' = (\mathcal{C}', x^{*'})$ is the induced prompt, with $\mathcal{C}' = \{(x'_i, y'_i)\}_{i=1}^{n'}$ denoting its transformed context data. Auxiliary variables used by an operator in the chain, such as normalization constants, coordinate shifts, interpolation grids or fitted residual coefficients, are computed from the prompt states available at that step. Each F_j and G_k may use only the prompt $(\mathcal{C}, x^*)$, the frozen ICON model, and prompt states or intermediate predictions produced by the chain. They do not access the unknown target value y^* , the explicit parameter φ or a symbolic description of T . Transformed prompt data are obtained only from the input data, structural symmetries or auxiliary ICON calls, and are kept consistent with the induced operator passed to ICON.

Designing an effective chain by hand requires combined mathematical and physical insight into the target operator, and the choices of transformations and output corrections are usually settled only through many trial experiments. We therefore discover chains through Evolutionary Ensemble of Agents (EvE), an agent-based evolutionary framework [39], in which LLM-based agents iteratively propose and improve candidate operator chains based on evaluation scores.

4 Experiments

We conduct numerical experiments on a scalar conservation law (Section 4.1) and a mean-field control problem (Section 4.2), evaluating each across a variety of out-of-distribution operator instances. These two physical settings are designed to exercise the two primary inference modes of the ICON: autoregressive multi-step rollout for tracking the long-term evolution of the conservation law, and single-shot operator queries for the varied configurations of the MFC problem. In Section 4.3, we test the robustness of the operator chains by applying them to a different PDE class without re-running the evolutionary search. Crucially, the underlying ICON models are pretrained and remain frozen throughout our study.

4.1 Scalar conservation law

We consider the scalar conservation law

$$\partial_t u + \partial_x f(u) = 0, \quad x \in [0, 1], \quad (12)$$

with periodic boundary conditions. For a flux f and time step $\Delta t > 0$, we denote the time- Δt solution operator by $S_{f, \Delta t} : u(\cdot, t) \mapsto u(\cdot, t + \Delta t)$. In each prompt, the context pairs are sampled from $S_{f, \Delta t}$, and ICON predicts the next-time function for the query input.

Following [37], the frozen 1D ICON model is pretrained on (12) with the flux restricted to the cubic family

$$f(u) = au^3 + bu^2 + cu, \quad (a, b, c) \in [-1, 1]^3, \quad (13)$$

The training dataset contains trajectories with coefficients (a, b, c) sampled uniformly from $[-1, 1]^3$. The time step is fixed at $\Delta t = 0.1$, initial conditions are drawn from a periodic Gaussian random field of length scale $\ell = 1$, and ground-truth solutions are obtained by solving the PDE with a third-order WENO scheme [40]. The in-distribution operator family is therefore $\{S_{au^3+bu^2+cu, 0.1}\}_{(a,b,c) \in [-1,1]^3}$.

To evaluate out-of-distribution generalization, we evaluate on three flux functions outside the cubic family (13): (i) a smooth periodic flux $f(u) = \sin(u) - \cos(u)$, (ii) a saturating monotone flux $f(u) = \tanh(u)$, and (iii) the Buckley–Leverett flux $f(u) = u^2/(u^2 + (1 - u)^2)$, a standard model of two-phase displacement in porous media. Evolution uses 100 trajectories from the first flux function, $f(u) = \sin(u) - \cos(u)$, with single-step prediction as the fitness signal. The other two flux functions are excluded from the evolution data. Throughout the case study we compare CHOP against *Raw ICON*, the unmodified ICON model with identity F and G , used as the baseline. Each prompt contains five context pairs and one query input. The five pairs record the one-step transition history of a single trajectory, $(u(\cdot, t_k), u(\cdot, t_k + \Delta t))$ for $k = 0, \dots, 4$. The query input is the last state in this history, and the model predicts its next state. During autoregressive rollout, the transition history remains fixed, while the query input is replaced by the previous prediction at each step.

Evolution returns the following fixed chain,

$$\mathcal{B}_{\text{conv}} : F_{\text{shift}} \rightarrow F_{\text{scale}} \rightarrow \text{ICON} \rightarrow G_{\text{unscale}} \rightarrow G_{\text{unshift}} \rightarrow G_{\text{mass}}. \quad (14)$$

The chain combines reversible shift and scaling transformations with a final projection step. F_{shift} aligns the prompt by an integer cyclic translation. The shift s is estimated from the most recent context pair by minimizing the difference between mean-centered input and output. F_{scale} parameterizes the affine transformation $u = \sigma v + \mu$, where μ and σ denote the mean and standard deviation respectively of the prompt values pooled across the context pairs and the query input. G_{unscale} and G_{unshift} are the exact inverses of F_{scale} and F_{shift} applied in reverse to the ICON output. G_{mass} is the orthogonal L^2 projection onto the affine subspace of fields whose spatial mean matches that of the query input, enforcing exact mass conservation under the periodic boundary conditions. The chain has no learned parameters or tuned hyperparameters. Its shifts, value scales, and conserved mean are computed directly from the prompt data. Algorithm 1 summarizes this deterministic inference procedure.

The evolved procedure includes an in-context cross-validation step that compares the chain with Raw ICON for each query. For each held-out context pair $(x_h, y_h) \in \mathcal{C}$, $G \circ \text{ICON} \circ F$ and Raw ICON are run on the remaining $D - 1$ context pairs with x_h in the query slot, producing a prediction $\hat{y}_h$. By averaging these held-out prediction errors over all D context pairs, we obtain an in-context cross-validation (CV) error for both methods, denoted as $\text{MSE}_{\text{cv}}(\text{chain})$ and $\text{MSE}_{\text{cv}}(\text{ICON})$. Because this CV procedure relies exclusively on the prompt, it provides an observable proxy to select the more reliable predictor for the actual query without accessing the hidden test label. The query x^* is then evaluated with the candidate that has the lower cross-validation error:

$$\hat{y}^* = \begin{cases} (G \circ \text{ICON} \circ F)(\mathcal{C}, x^*) & \text{if } \text{MSE}_{\text{cv}}(\text{chain}) < \text{MSE}_{\text{cv}}(\text{ICON}), \\ \text{ICON}(\mathcal{C}, x^*) & \text{otherwise.} \end{cases} \quad (15)$$

For each flux function, we generate 500 test trajectories from the corresponding operator, which lies outside the cubic training distribution (13). For ground truth y and prediction $\hat{y}$, we measure error by the relative L^2 norm

$$\text{Rel-}L^2(\hat{y}, y) = \frac{\|y - \hat{y}\|_2}{\|y\|_2}. \quad (16)$$

Single-step accuracy is reported in Table 1. CHOP reduces relative L^2 error by 35–52% across the three flux functions, and the fixed chain (14) transfers across all three test fluxes despite none being a member of the cubic training family (13). The reduction reported in Table 1 is the relative

Algorithm 1 Chain of Operators in Conservation-law.

Require: Context pairs $\mathcal{C} = \{(x_i, y_i)\}_{i=1}^D$, query x^* , frozen ICON.

Let N be the number of spatial grid points.

Let $\langle u \rangle_x$ denote the mean of u over the spatial grid.

Let $\text{shift}(u, r)$ denote cyclic translation of u by r grid points.

// F_{shift} : Align all contexts and query to a shared spatial frame via translation symmetry

- 1: Center the last context pair: $\bar{x}_D = x_D - \langle x_D \rangle_x$ and $\bar{y}_D = y_D - \langle y_D \rangle_x$.
- 2: Estimate the one-step shift from the last context pair:

$$s \leftarrow \arg \min_{\substack{r \in \mathbb{Z} \\ |r| \leq \lfloor N/4 \rfloor}} \|\text{shift}(\bar{x}_D, r) - \bar{y}_D\|_2^2.$$

- 3: Define the shifted prompt $\mathcal{C}_s = \{(x_i^s, y_i^s)\}_{i=1}^D$ and shifted query x_s^* by

$$x_i^s = \text{shift}(x_i, -(i-1)s), \quad y_i^s = \text{shift}(y_i, -is), \quad x_s^* = \text{shift}(x^*, -Ds).$$

// F_{scale} : Apply affine value gauge

- 4: Compute the pooled mean μ and standard deviation σ of $\{x_i^s, y_i^s, x_s^*\}$.
- 5: Normalize the shifted prompt with $F_{\text{scale}}(u) = (u - \mu)/\sigma$ to obtain $(\mathcal{C}_v, x_v^*)$.

// ICON : Predict in the induced space

- 6: Predict from the shifted and normalized prompt: $\hat{v} \leftarrow \text{ICON}(\mathcal{C}_v, x_v^*)$.

// G_{unscale} : Apply inverse value normalization

- 7: $\hat{u}_s \leftarrow G_{\text{unscale}}(\hat{v}) = \sigma \hat{v} + \mu$.

// G_{unshift} : Return the prediction to the original spatial frame

- 8: $\hat{u} \leftarrow G_{\text{unshift}}(\hat{u}_s) = \text{shift}(\hat{u}_s, (D+1)s)$.

// G_{mass} : Enforce exact mass conservation via L_2 projection

- 9: $\hat{y}^* \leftarrow \hat{u} + \langle x^* \rangle_x - \langle \hat{u} \rangle_x$.

- 10: **return** $\hat{y}^*$
-

Table 1: Single-step relative L^2 error on three out-of-distribution flux functions. Reduction reports the mean relative decrease from Raw ICON to CHOP across queries.

Flux function	Raw ICON	CHOP	Reduction
$\sin - \cos$	0.0451	0.0222	51.99%
$\tanh$	0.0475	0.0313	38.11%
Buckley–Leverett	0.1418	0.0951	34.59%

improvement in $\text{Rel-}L^2$ for each query,

$$r = \frac{\text{Rel-}L^2(\hat{y}_{\text{raw}}, y) - \text{Rel-}L^2(\hat{y}_{\text{chop}}, y)}{\text{Rel-}L^2(\hat{y}_{\text{raw}}, y)}, \quad (17)$$

averaged over the 500 queries for each flux function.

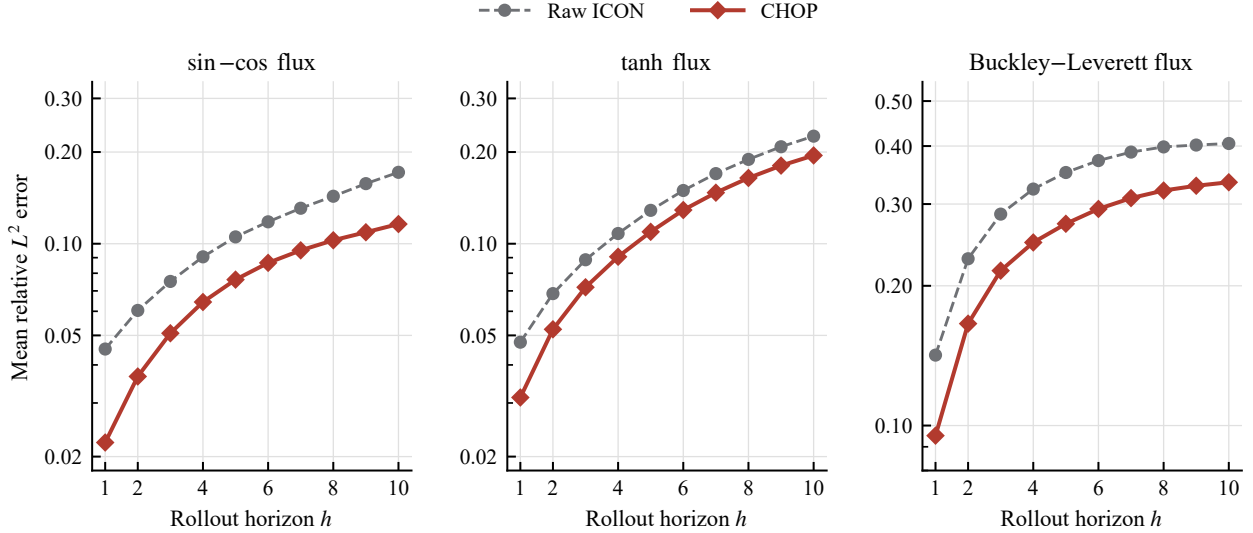


Figure 3: Ten-step autoregressive rollout error on three out-of-distribution flux functions.

Figure 3 evaluates long-horizon rollout stability by reporting the mean relative L^2 error for rollout steps $h = 1, \dots, 10$. CHOP stays strictly below Raw ICON at every horizon, maintaining a 15–27% relative reduction at $h = 10$. The mass projection G_{mass} removes any drift in $\int u dx$ that would otherwise compound across rollout steps.

The chain exploits two structural priors of the conservation law. Translation symmetry is encoded by F_{shift} and mass conservation by G_{mass} . The remaining pair $F_{\text{scale}}/G_{\text{unscale}}$ provides a reversible value normalization. These steps do not use the specific form of the flux function. The closed-form chain transfers across three out-of-distribution flux functions and retains its error reductions across ten rollout steps.

4.2 Mean-field control

We consider the mean-field control problem

$$\inf_{\rho, m} \int_0^1 \int_0^1 \frac{c m^2(t, x)}{2 \rho(t, x)} dx dt + \int_0^1 g(x) \rho(1, x) dx, \quad (18)$$

subject to the Fokker–Planck equation

$$\partial_t \rho(t, x) + \partial_x m(t, x) = \mu \partial_{xx} \rho(t, x), \quad \rho(0, x) = \rho_0(x), \quad (19)$$

with periodic boundary conditions, $c = 20$, and $\mu = 0.02$. Let $\mathcal{M}$ denote the MFC solution operator, which maps the varying input function to the controlled density field. In the g -parameter family, a sampled terminal cost $g(x)$ defines the operator $\mathcal{M}_g : \rho_0 \mapsto \rho$, and the initial density $\rho_0(x)$ varies

across context pairs. In the ρ -parameter family, a sampled initial density $\rho_0(x)$ defines the operator $\mathcal{M}_{\rho_0} : g \mapsto \rho$, and the terminal cost $g(x)$ varies across context pairs.

Following [27], the frozen ICON model is pretrained on the five operator configurations of Table 2, with the function defining the operator drawn from a Gaussian process with an RBF kernel of length scale $\ell = 1$. The in-distribution operator family therefore consists of MFC operators in these five configurations whose defining functions are sampled at the training length scale.

Table 2: Five MFC operator configurations. The label (a, b) denotes the input–output dimensionality: $(1, 1)$ is 1D-to-1D, $(1, 2)$ is 1D-to-2D and $(2, 2)$ is 2D-to-2D. $\rho_0 = \rho(0, x)$ denotes the initial density, $\rho_T = \rho(T, x)$ the terminal density at $T = 1$, and $\rho_{[s, T]}$ the full spacetime field over $[s, T] \times [0, 1]$.

Family	Operator	Input condition	Prediction target
g -param	$(1, 1)$	$\rho_0(x)$	$\rho_T(x)$
g -param	$(1, 2)$	$\rho_0(x)$	$\rho_{[T/2, T]}(t, x)$
g -param	$(2, 2)$	$\rho_{[0, T/2]}(t, x)$	$\rho_{[T/2, T]}(t, x)$
ρ -param	$(1, 1)$	$g(x)$	$\rho_T(x)$
ρ -param	$(1, 2)$	$g(x)$	$\rho_{[T/2, T]}(t, x)$

At test time, we use smaller RBF length scales, $\ell \in \{0.5, 0.3, 0.1\}$, instead of the training value $\ell = 1$. Smaller ℓ produces less smooth and more oscillatory functions, yielding more strongly out-of-distribution operator tasks. The five configurations of Table 2 together with the three test length scales yield 15 OOD operator tasks.

The chain is evolved on a single task: the g -parameter operator $(2, 2)$ at $\ell = 0.5$. All remaining 14 tasks are excluded during evolution and used only for evaluation. Across all tasks, the baseline is *Raw ICON*, the same frozen ICON model with identity F and G . Each prompt contains five context pairs and one query input.

Evolution returns the following fixed chain,

$$\mathcal{B}_{\text{MFC}} : F_{\text{value}} \rightarrow \text{ICON} \rightarrow G_{\text{value}} \rightarrow G_{\text{res}}. \quad (20)$$

F_{value} and G_{value} provide a reversible value normalization. For each query, the normalization computes a center μ and scale σ from the prompt data, consisting of the context pairs and the query input. For prompts containing non-negative density fields, the normalization sets $\mu = 0$ and uses the root-mean-square value of the prompt data as σ , preserving density positivity under rescaling. For prompts containing cost values, the normalization instead uses the prompt mean and standard deviation. The same (μ, σ) is then applied to the context inputs, context targets, and query input, with G_{value} applying the exact inverse to the ICON output. The final block, G_{res} , builds residual corrections by predicting each context pair after omitting that pair from the context, transfers these residuals to the query using weights based on input similarity, and scales the transferred correction by a scalar $\hat{\alpha}$ fitted by cross-validation on the context pairs. Algorithms 2 and 3 give the implementation details.

The same in-context cross-validation step is used for MFC, comparing the full chain with Raw ICON for each query. For each held-out context pair, both predictors are evaluated using the remaining $D - 1$ context pairs, and the query x^* is evaluated by the predictor with the smaller cross-validation error as in equation (15).

For each of the 15 OOD operator tasks, we evaluate 100 queries. Table 3 reports the mean error over the 100 queries for each task, together with the reduction defined in equation (17). On the nine

Algorithm 2 Chain of Operators in Mean-field Control.

Require: Context pairs $\mathcal{C} = \{(x_i, y_i)\}_{i=1}^D$, query x^* , frozen ICON.

//F_{value}: Apply reversible affine value gauge

- 1: Compute the normalization center μ and scale σ from the prompt values $\{x_i, y_i, x^*\}$.
- 2: Normalize the prompt values:

$$x'_i = \frac{x_i - \mu}{\sigma}, \quad y'_i = \frac{y_i - \mu}{\sigma}, \quad x^{*'} = \frac{x^* - \mu}{\sigma}.$$

//ICON: Predict in the induced space

- 3: Predict with the frozen ICON on the normalized prompt:

$$\hat{y}' \leftarrow \text{ICON}(\mathcal{C}', x^{*'}),$$

where $\mathcal{C}' = \{(x'_i, y'_i)\}_{i=1}^D$.

//G_{value}: Apply inverse value gauge

- 4: $\hat{y}_0 \leftarrow G_{\text{value}}(\hat{y}') = \sigma \hat{y}' + \mu$.

//G_{res}: Apply residual transfer correction

- 5: Apply the residual correction G_{res} in Algorithm 3:

$$\hat{y}^* \leftarrow G_{\text{res}}(\hat{y}_0, \mathcal{C}, x^*, \mathcal{B}_0),$$

where $\mathcal{B}_0$ denotes the base chain $F_{\text{value}} \rightarrow \text{ICON} \rightarrow G_{\text{value}}$.

- 6: **return** $\hat{y}^*$
-

Algorithm 3 Residual correction operator G_{res} in the MFC chain.

Require: Base-chain output $\hat{y}_0$, context pairs $\mathcal{C} = \{(x_i, y_i)\}_{i=1}^D$, query x^* , base chain $\mathcal{B}_0$.

// Build the residual bank from context pairs via leave-one-out

Let $\Pi_{h \rightarrow *}$ map the residual from context pair h to the query output grid.

- 1: **for** $h = 1, \dots, D$ **do**
- 2: Set $\mathcal{C}_{-h} = \mathcal{C} \setminus \{(x_h, y_h)\}$.
- 3: Predict the held-out output and residual:

$$P_h \leftarrow \mathcal{B}_0(\mathcal{C}_{-h}, x_h), \quad R_h \leftarrow y_h - P_h.$$

- 4: **end for**

// Transfer context residuals to the query based on input similarity

- 5: Compute input-similarity weights w_h^* between each x_h and the query x^* .
- 6: Map the context residuals to the query output grid and combine them as an estimated query residual:

$$\Delta^* \leftarrow \sum_{h=1}^D w_h^* \Pi_{h \rightarrow *}(R_h).$$

// Fit the residual scaling factor via visible cross-validation

- 7: For each context pair h , estimate its residual R_h from the residuals of the other context pairs using the same rule; denote this estimate by Δ_h .
 - 8: Choose a scalar $\hat{\alpha} \in [0, 1]$ by comparing the estimates Δ_h with the known residuals R_h .
 - 9: **return** $\hat{y}_0 + \hat{\alpha} \Delta^*$
-

Table 3: Mean rel- L^2 error on the 15 OOD MFC operator tasks. The dagger marks the evolution task.

Operator task	ℓ	Raw ICON	CHOP	Reduction
g -param operator (1, 1)	0.5	0.0281	0.0157	19.33%
	0.3	0.2379	0.0364	83.72%
	0.1	0.7627	0.1082	85.92%
g -param operator (1, 2)	0.5	0.1097	0.0280	74.87%
	0.3	0.1542	0.0334	79.00%
	0.1	0.3219	0.0536	83.64%
g -param operator (2, 2)	0.5 [†]	0.0314	0.0060	78.83%
	0.3	0.1074	0.0156	85.42%
	0.1	0.3095	0.0447	85.82%
ρ -param operator (1, 1)	0.5	0.0046	0.0046	0.00%
	0.3	0.0046	0.0046	0.00%
	0.1	0.0040	0.0040	0.00%
ρ -param operator (1, 2)	0.5	0.0795	0.0809	-1.11%
	0.3	0.0747	0.0754	-0.50%
	0.1	0.0700	0.0700	0.00%

g -parameter tasks, CHOP reduces rel- L^2 error by 19–86% averaged over queries. At the harder length scales $\ell \in \{0.3, 0.1\}$ the reductions rise to 78–86%. On the six ρ -parameter tasks the chain does not improve over Raw ICON. Four of these tasks are identical to Raw ICON under the cross-validation fallback, and the remaining two show small average regressions of 1.11% and 0.50%. Figure 4 plots the error for all five MFC operators with different ℓ . Figure 5 shows one-dimensional g -parameter predictions, and Figure 6 shows spacetime predictions for both g -parameter and ρ -parameter tasks. Additional MFC predictions and residual-transfer examples are provided in Appendix A.1.

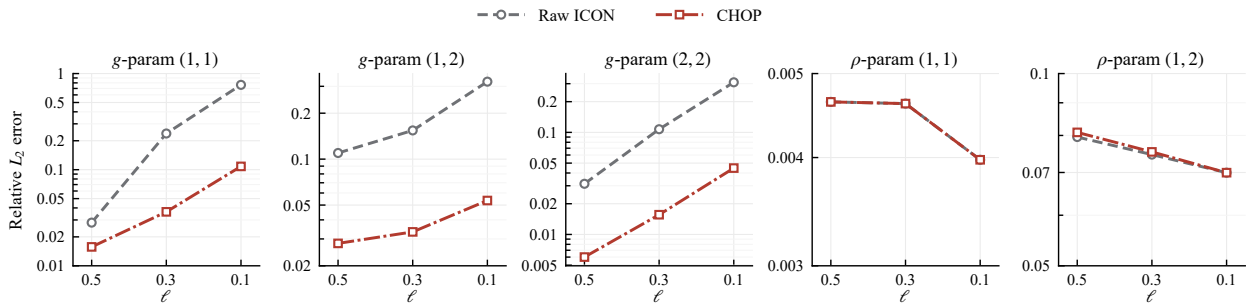


Figure 4: Relative L^2 error across input length scales $\ell \in \{0.5, 0.3, 0.1\}$ for the five MFC operators.

Although the full chain does not improve the ρ -parameter tasks, this does not imply that all operators in the chain fail on this family.

This pattern comes from the value normalization. F_{value} applies the same rescaling to the condition and the target in each context pair. For the g -parameter tasks, this is compatible with the operator structure because both sides of the pair are density fields. For the ρ -parameter tasks, however, the condition is a cost function $g(x)$ whereas the target is a density field $\rho(t, x)$. A shared

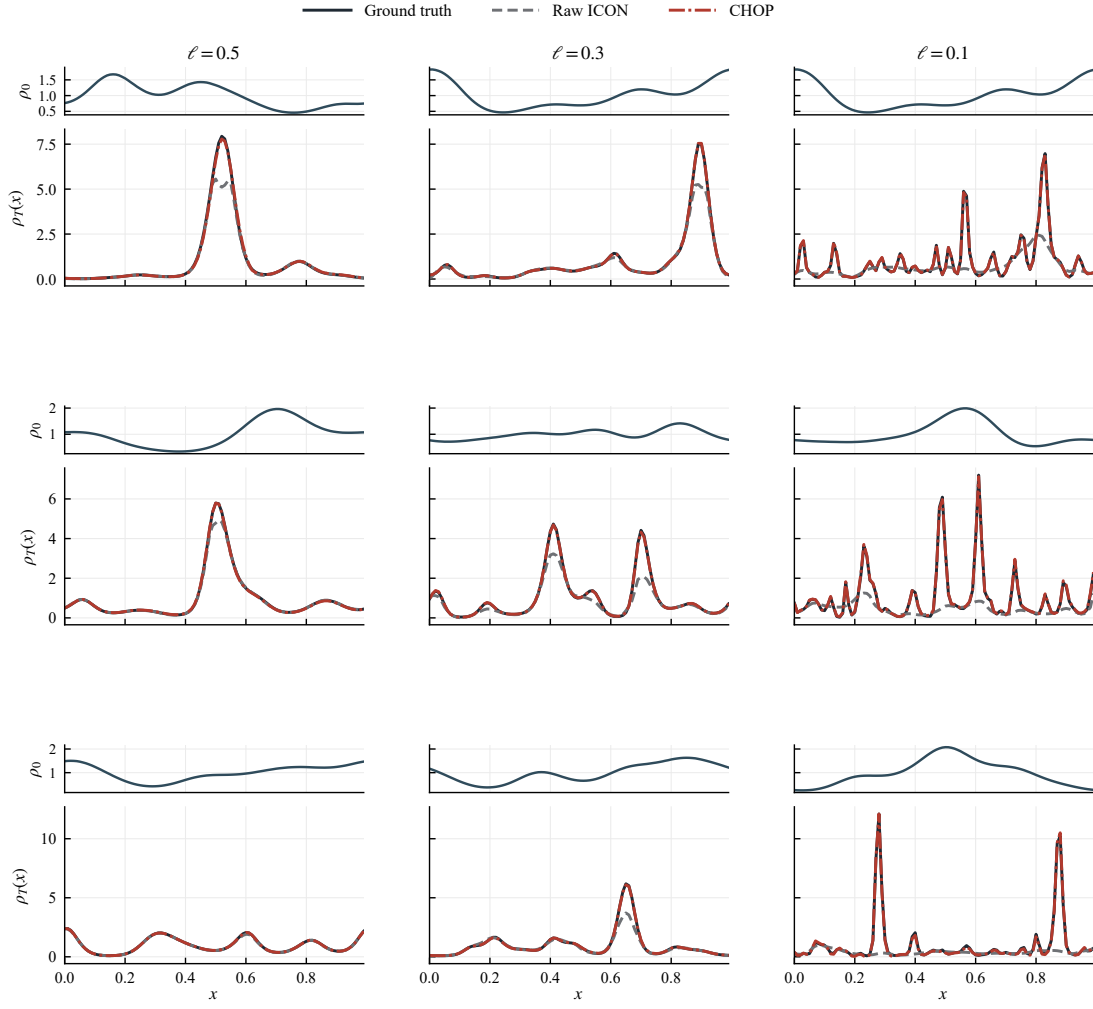


Figure 5: g -parameter operator $(1,1)$ across input length scales $\ell \in \{0.5, 0.3, 0.1\}$.

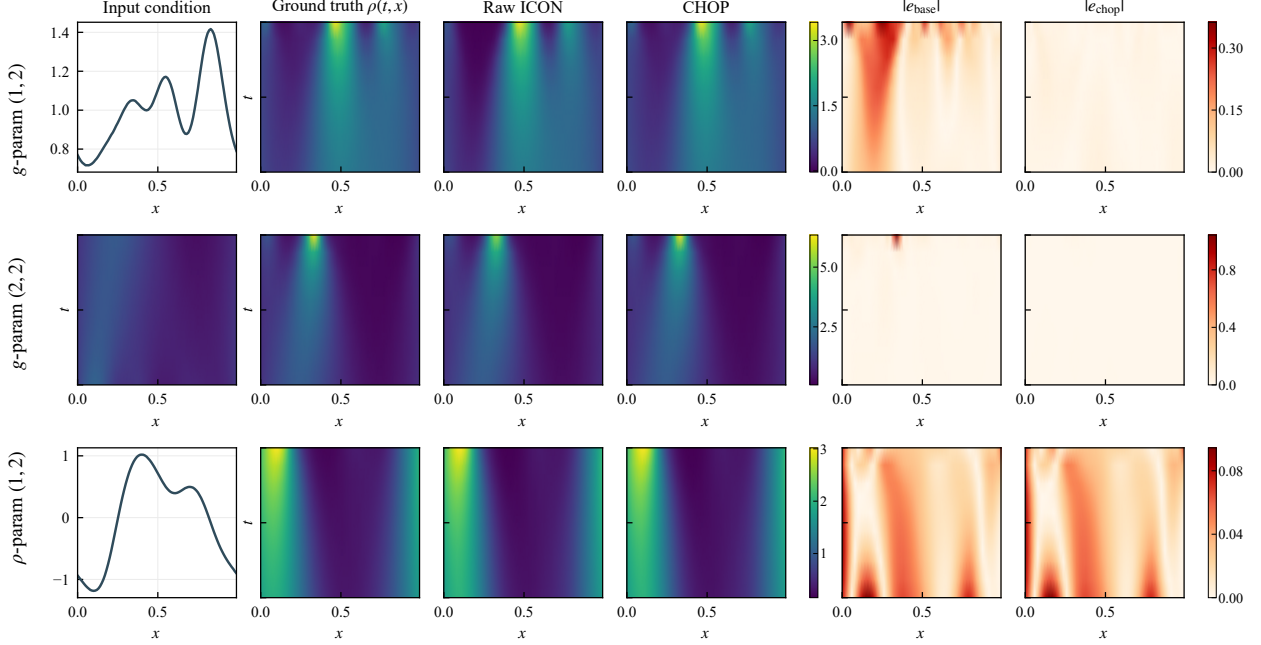


Figure 6: MFC spacetime prediction results at input length scale $\ell = 0.5$.

rescaling of both fields is therefore not consistent with the map from g to ρ . When this happens, the cross-validation step uses Raw ICON instead of the full chain.

To identify which part of the chain causes this behavior, we run an ablation on the ρ -parameter tasks. We remove F_{value} and its inverse G_{value} , and evaluate the reduced composition $\text{ICON} \rightarrow G_{\text{res}}$ (Table 4). With this reduced composition, G_{res} improves the ρ -parameter operator (1,2) task by

Table 4: Residual transfer operator applied alone to the ρ -parameter tasks.

Task	ℓ	Raw ICON	G_{res} only	Reduction
ρ -param operator (1,1)	0.5	0.0046	0.0046	1.92%
	0.3	0.0046	0.0045	2.71%
	0.1	0.0040	0.0038	4.80%
ρ -param operator (1,2)	0.5	0.0795	0.0439	42.35%
	0.3	0.0747	0.0433	37.06%
	0.1	0.0700	0.0417	37.93%

37–42% across the three length scales, even though it was evolved only on g -parameter operator (2,2) data. For operator (1,1), Raw ICON is already highly accurate, with $\text{rel-}L^2$ error at the 10^{-3} level, and G_{res} reduces the error by only 2–5%. Figure 7 visualizes this transfer on operator (1,2). Thus, although G_{res} was evolved on a g -parameter task, its residual correction also transfers to ρ -parameter tasks.

4.3 Transfer of operator chains

We next evaluate cross-PDE transfer by applying an operator chain evolved on one PDE class to another without rerunning evolution. We use the chain evolved on the MFC problem for this

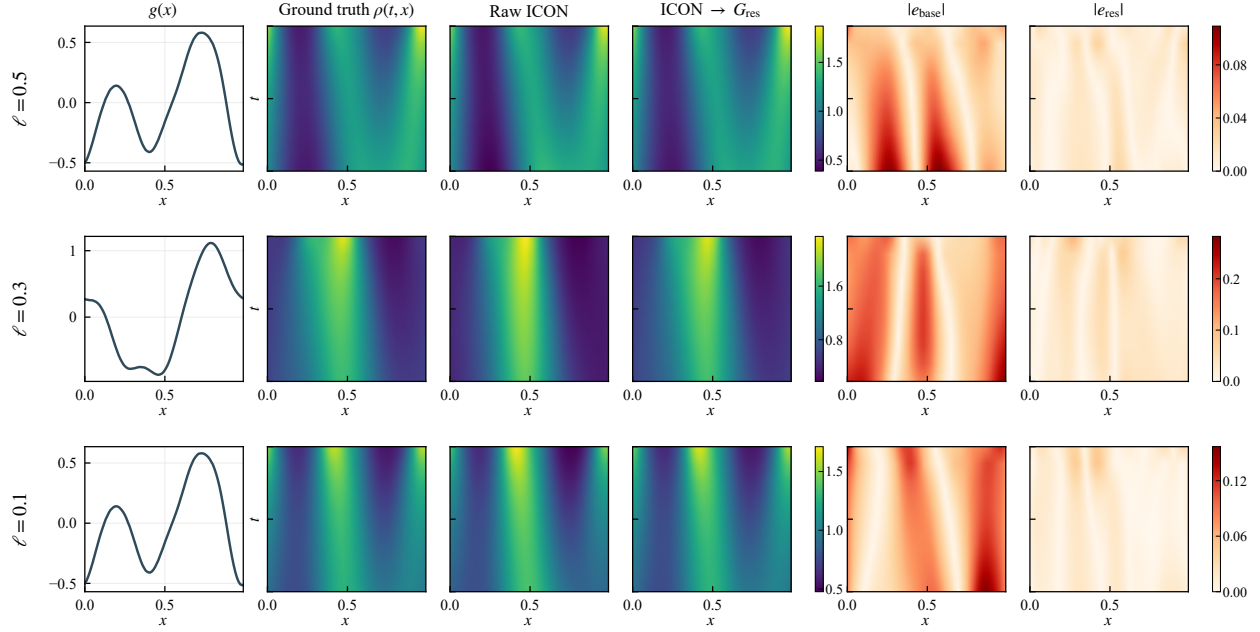


Figure 7: Residual transfer on the ρ -parameter operator (1,2) across input length scales $\ell \in \{0.5, 0.3, 0.1\}$.

test. The MFC experiment includes two parameter families, five operator configurations, and both one-dimensional and spacetime targets. In contrast, the conservation-law chain in equation (14) contains translation alignment and mass projection, both closely matched to the conservation-law structure.

Accordingly, the MFC chain in equation (20), $F_{\text{value}} \rightarrow \text{ICON} \rightarrow G_{\text{value}} \rightarrow G_{\text{res}}$ with the cross-validation fallback, is applied unchanged to the three conservation-law flux functions of Section 4.1. In this experiment it replaces the conservation-law chain (14). We report the mean relative L^2 error, the mean relative decrease from Raw ICON to the transferred chain across queries, and the win rate over Raw ICON. The conservation-law chain is included only as a reference. The transferred MFC

Table 5: MFC chain transfer to the conservation-law test fluxes. Errors are mean rel- L^2 over 500 queries for each flux. Reduction is the mean relative error decrease from Raw ICON, and win rate is the percentage of queries improved over Raw ICON.

Flux function	Raw ICON	MFC chain	Reduction	Win rate	Consv. chain
sin – cos	0.0451	0.0374	19.23%	89.80%	0.0222
tanh	0.0475	0.0382	21.24%	91.00%	0.0313
Buckley–Leverett	0.1418	0.1138	23.54%	88.60%	0.0951

chain reduces Raw ICON error by 19.2–23.5% on all three conservation-law fluxes, with 89–91% of queries improved. The corresponding ten-step rollout curves are shown in Appendix A.2. It does not match the chain discovered for the conservation-law problem, whose errors are lower on each flux function, but the positive reductions show that operator chains can generalize to other problems.

5 Conclusion

This work introduced Chain of Operators (CHOP), a framework for adapting frozen In-Context Operator Network (ICON) models to out-of-distribution operator tasks without retraining. The central idea is to surround the frozen ICON model with closed-form prompt-side and prediction-side operators, forming the composition $F \rightarrow \text{ICON} \rightarrow G$. The agentic evolutionary search then selects a chain of these transformations, making the adaptation explicit and interpretable.

The experiments on conservation-law and mean-field control problems indicate that this formulation can improve prediction outside the training operator distribution while retaining a clear connection to the underlying PDE structure. They also show that the discovered transformations play different roles, with some acting as reusable corrections across problem settings and others encoding structure specific to a PDE class.

By adapting a frozen ICON backbone through an explicit, interpretable chain of operators, CHOP provides a foundation for agentic scientific computing. A natural extension is to build an operator agent around ICON that automates the many stages of this adaptation. We leave this to future research.

Acknowledgements

We acknowledge NUS IT’s Research Computing group for providing computational support. Liu Yang acknowledges support from the National Research Foundation, Singapore, under the NRF fellowship (Project No. NRF-NRFF17-2025-0006). Ling Guo acknowledges support from the NSF of China (No. 92270115 and 12071301). Minghui Yang acknowledges the support provided by the China Scholarship Council (CSC No. 202508310118). The authors also thank Dr. Boai Sun, Mr. Yingjie Xu, and Mr. Zongmin Yu for their helpful discussions and insightful suggestions.

References

- [1] Nikola Kovachki, Zongyi Li, Burigede Liu, Kamyar Azizzadenesheli, Kaushik Bhattacharya, Andrew Stuart, and Anima Anandkumar. Neural operator: Learning maps between function spaces with applications to PDEs. *Journal of Machine Learning Research*, 24(89):1–97, 2023.
- [2] Somdatta Goswami, Aniruddha Bora, Yue Yu, and George Em Karniadakis. Physics-informed deep neural operator networks. In *Machine learning in modeling and simulation: methods and applications*, pages 219–254. Springer, 2023.
- [3] George Em Karniadakis, Ioannis G Kevrekidis, Lu Lu, Paris Perdikaris, Sifan Wang, and Liu Yang. Physics-informed machine learning. *Nature Reviews Physics*, 3(6):422–440, 2021.
- [4] Lu Lu, Pengzhan Jin, Guofei Pang, Zhongqiang Zhang, and George Em Karniadakis. Learning nonlinear operators via deepnet based on the universal approximation theorem of operators. *Nature machine intelligence*, 3(3):218–229, 2021.
- [5] Zongyi Li, Nikola Kovachki, Kamyar Azizzadenesheli, Burigede Liu, Kaushik Bhattacharya, Andrew Stuart, and Anima Anandkumar. Fourier neural operator for parametric partial differential equations. In *International Conference on Learning Representations*, 2021.
- [6] Lu Lu, Xuhui Meng, Shengze Cai, Zhiping Mao, Somdatta Goswami, Zhongqiang Zhang, and George Em Karniadakis. A comprehensive and fair comparison of two neural operators

- (with practical extensions) based on fair data. *Computer Methods in Applied Mechanics and Engineering*, 393:114778, 2022.
- [7] Zongyi Li, Hongkai Zheng, Nikola Kovachki, David Jin, Haoxuan Chen, Burigede Liu, Kamyar Azizzadenesheli, and Anima Anandkumar. Physics-informed neural operator for learning partial differential equations. *ACM/IMS Journal of Data Science*, 1(3):1–27, 2024.
 - [8] Zongyi Li, Daniel Zhengyu Huang, Burigede Liu, and Anima Anandkumar. Fourier neural operator with learned deformations for pdes on general geometries. *Journal of Machine Learning Research*, 24(388):1–26, 2023.
 - [9] Sifan Wang, Hanwen Wang, and Paris Perdikaris. Learning the solution operator of parametric partial differential equations with physics-informed deeponets. *Science advances*, 7(40):eabi8605, 2021.
 - [10] Katiana Kontolati, Somdatta Goswami, George Em Karniadakis, and Michael D Shields. Learning nonlinear operators in latent spaces for real-time predictions of complex dynamics in physical systems. *Nature Communications*, 15(1):5101, 2024.
 - [11] Bogdan Raonic, Roberto Molinaro, Tobias Rohner, Siddhartha Mishra, and Emmanuel de Bezenac. Convolutional neural operators. In *ICLR 2023 workshop on physics for machine learning*, 2023.
 - [12] Tapas Tripura and Souvik Chakraborty. Wavelet neural operator for solving parametric partial differential equations in computational mechanics problems. *Computer Methods in Applied Mechanics and Engineering*, 404:115783, 2023.
 - [13] Min Zhu, Handi Zhang, Anran Jiao, George Em Karniadakis, and Lu Lu. Reliable extrapolation of deep neural operators informed by physics or sparse observations. *Computer Methods in Applied Mechanics and Engineering*, 412:116064, 2023.
 - [14] Somdatta Goswami, Katiana Kontolati, Michael D Shields, and George Em Karniadakis. Deep transfer operator learning for partial differential equations under conditional shift. *Nature Machine Intelligence*, 4(12):1155–1164, 2022.
 - [15] Zecheng Zhang. Modno: Multi-operator learning with distributed neural operators. *Computer Methods in Applied Mechanics and Engineering*, 431:117229, 2024.
 - [16] Jingmin Sun, Zecheng Zhang, and Hayden Schaeffer. Lemon: Learning to learn multi-operator networks. *arXiv preprint arXiv:2408.16168*, 2024.
 - [17] Wuyang Chen, Jialin Song, Pu Ren, Shashank Subramanian, Dmitriy Morozov, and Michael W Mahoney. Data-efficient operator learning via unsupervised pretraining and in-context learning. *Advances in Neural Information Processing Systems*, 37:6213–6245, 2024.
 - [18] Maximilian Herde, Bogdan Raonić, Tobias Rohner, Roger Käppeli, Roberto Molinaro, Emmanuel De Bezenac, and Siddhartha Mishra. Poseidon: Efficient foundation models for pdes. *Advances in Neural Information Processing Systems*, 37:72525–72624, 2024.
 - [19] Zecheng Zhang, Christian Moya, Lu Lu, Guang Lin, and Hayden Schaeffer. Deeponet as a multi-operator extrapolation model: Distributed pretraining with physics-informed fine-tuning. *Journal of Computational Physics*, page 114537, 2026.

- [20] Ning Ding, Yujia Qin, Guang Yang, Fuchao Wei, Zonghan Yang, Yusheng Su, Shengding Hu, Yulin Chen, Chi-Min Chan, Weize Chen, et al. Parameter-efficient fine-tuning of large-scale pre-trained language models. *Nature machine intelligence*, 5(3):220–235, 2023.
- [21] Zhiqiang Hu, Lei Wang, Yihuai Lan, Wanyu Xu, Ee-Peng Lim, Lidong Bing, Xing Xu, Soujanya Poria, and Roy Lee. Llm-adapters: An adapter family for parameter-efficient fine-tuning of large language models. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pages 5254–5276, 2023.
- [22] Shashank Subramanian, Peter Harrington, Kurt Keutzer, Wahid Bhimji, Dmitriy Morozov, Michael W Mahoney, and Amir Gholami. Towards foundation models for scientific machine learning: Characterizing scaling and transfer behavior. *Advances in Neural Information Processing Systems*, 36:71242–71262, 2023.
- [23] Zhanhong Ye, Xiang Huang, Leheng Chen, Hongsheng Liu, Zidong Wang, and Bin Dong. PDEformer: Towards a foundation model for one-dimensional partial differential equations. *arXiv preprint arXiv:2402.12652*, 2024.
- [24] Zhongkai Hao, Chang Su, Songming Liu, Julius Berner, Chengyang Ying, Hang Su, Anima Anandkumar, Jian Song, and Jun Zhu. DPOT: Auto-regressive denoising operator transformer for large-scale pde pre-training. *arXiv preprint arXiv:2403.03542*, 2024.
- [25] Ashiqur Rahman, Robert J George, Mogab Elleithy, Daniel Leibovici, Zongyi Li, Boris Bonev, Colin White, Julius Berner, Raymond A Yeh, Jean Kossaifi, et al. Pretraining codomain attention neural operators for solving multiphysics pdes. *Advances in Neural Information Processing Systems*, 37:104035–104064, 2024.
- [26] Yuxuan Liu, Jingmin Sun, Xinjie He, Griffin Pinney, Zecheng Zhang, and Hayden Schaeffer. Prose-fd: A multimodal pde foundation model for learning multiple operators for forecasting fluid dynamics. *arXiv preprint arXiv:2409.09811*, 2024.
- [27] Liu Yang, Siting Liu, Tingwei Meng, and Stanley J Osher. In-context operator learning with data prompts for differential equation problems. *Proceedings of the National Academy of Sciences*, 120(39):e2310142120, 2023.
- [28] Yadi Cao, Yuxuan Liu, Liu Yang, Rose Yu, Hayden Schaeffer, and Stanley Osher. VICON: Vision in-context operator networks for multi-physics fluid dynamics prediction. *arXiv preprint arXiv:2411.16063*, 2024.
- [29] Louis Serrano, Armand Kassaï Koupaï, Thomas X Wang, Pierre Erbacher, and Patrick Gallinari. Zebra: In-context generative pretraining for solving parametric pdes. *arXiv preprint arXiv:2410.03437*, 2024.
- [30] Armand Kassaï Koupaï, Lise Le Boudec, Louis Serrano, and Patrick Gallinari. Enma: Tokenwise autoregression for continuous neural pde operators. *Advances in Neural Information Processing Systems*, 38:127341–127409, 2026.
- [31] Benjamin J Zhang, Siting Liu, Stanley J Osher, and Markos A Katsoulakis. Probabilistic operator learning: generative modeling and uncertainty quantification for foundation models of differential equations. *arXiv preprint arXiv:2509.05186*, 2025.
- [32] Chenghan Wu, Zongmin Yu, Boai Sun, and Liu Yang. Graph in-context operator networks for generalizable spatiotemporal prediction. *arXiv preprint arXiv:2603.12725*, 2026.

- [33] Tingwei Meng, Moritz Voss, Nils Detering, Giulio Farolfi, Stanley Osher, and Georg Menz. Solving optimal execution problems via in-context operator networks. *arXiv preprint arXiv:2501.15106*, 2025.
- [34] Frank Cole, Dixi Wang, Yineng Chen, Yulong Lu, and Rongjie Lai. In-context operator learning on the space of probability measures. *arXiv preprint arXiv:2601.09979*, 2026.
- [35] Jerry Weihong Liu, N Benjamin Erichson, Kush Bhatia, Michael W Mahoney, and Christopher Re. Does in-context operator learning generalize to domain-shifted settings? In *The symbiosis of deep learning and differential equations III*, 2023.
- [36] Frank Cole, Yulong Lu, Wuzhe Xu, and Tianhao Zhang. In-context learning of linear systems: Generalization theory and applications to operator learning. *arXiv preprint arXiv:2409.12293*, 2024.
- [37] Liu Yang and Stanley J Osher. PDE generalization of in-context operator networks: A study on 1d scalar nonlinear conservation laws. *Journal of Computational Physics*, 519:113379, 2024.
- [38] Liu Yang, Siting Liu, and Stanley J Osher. Fine-tune language models as multi-modal differential equation solvers. *Neural Networks*, 188:107455, 2025.
- [39] Zongmin Yu and Liu Yang. Evolutionary ensemble of agents. *arXiv preprint arXiv:2605.09018*, 2026.
- [40] Guang-Shan Jiang and Chi-Wang Shu. Efficient implementation of weighted eno schemes. *Journal of computational physics*, 126(1):202–228, 1996.

A Supplementary numerical details

A.1 Additional MFC examples at harder smoothness levels

Figures 8 and 9 provide additional MFC predictions at the harder length scales $\ell \in \{0.3, 0.1\}$. Figures 10 and 11 supplement the residual-transfer diagnostic in Figure 7. They show additional ρ -parameter transfer results at the same length scales, using the reduced composition $\text{ICON} \rightarrow G_{\text{res}}$ without the value normalization.

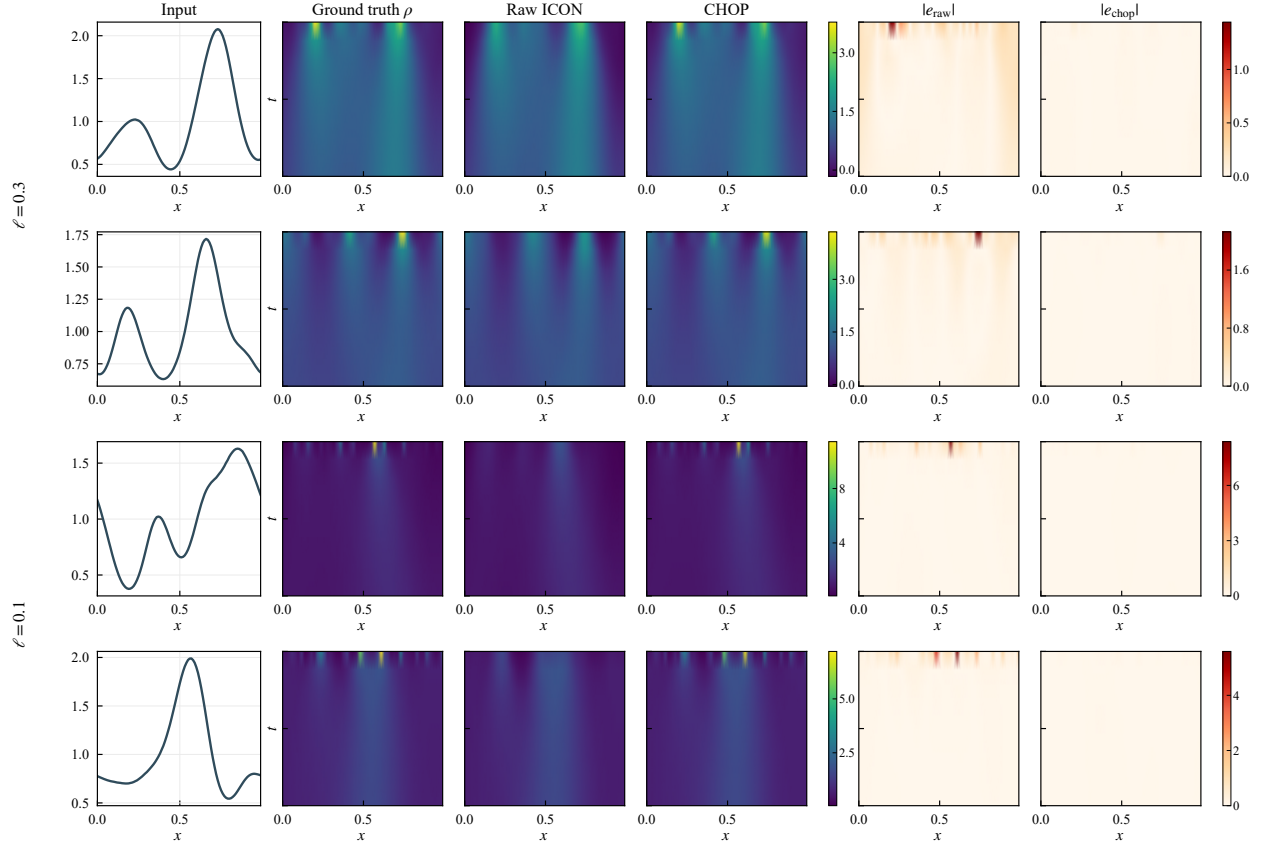


Figure 8: Additional spacetime MFC predictions for the g -parameter operator $(1, 2)$, $\rho_0(x) \mapsto \rho_{[T/2, T]}(t, x)$. Each length scale is illustrated with two examples.

A.2 Cross-task rollout transfer

Figure 12 reports the multi-step rollout version of the cross-PDE transfer test in Section 4.3.

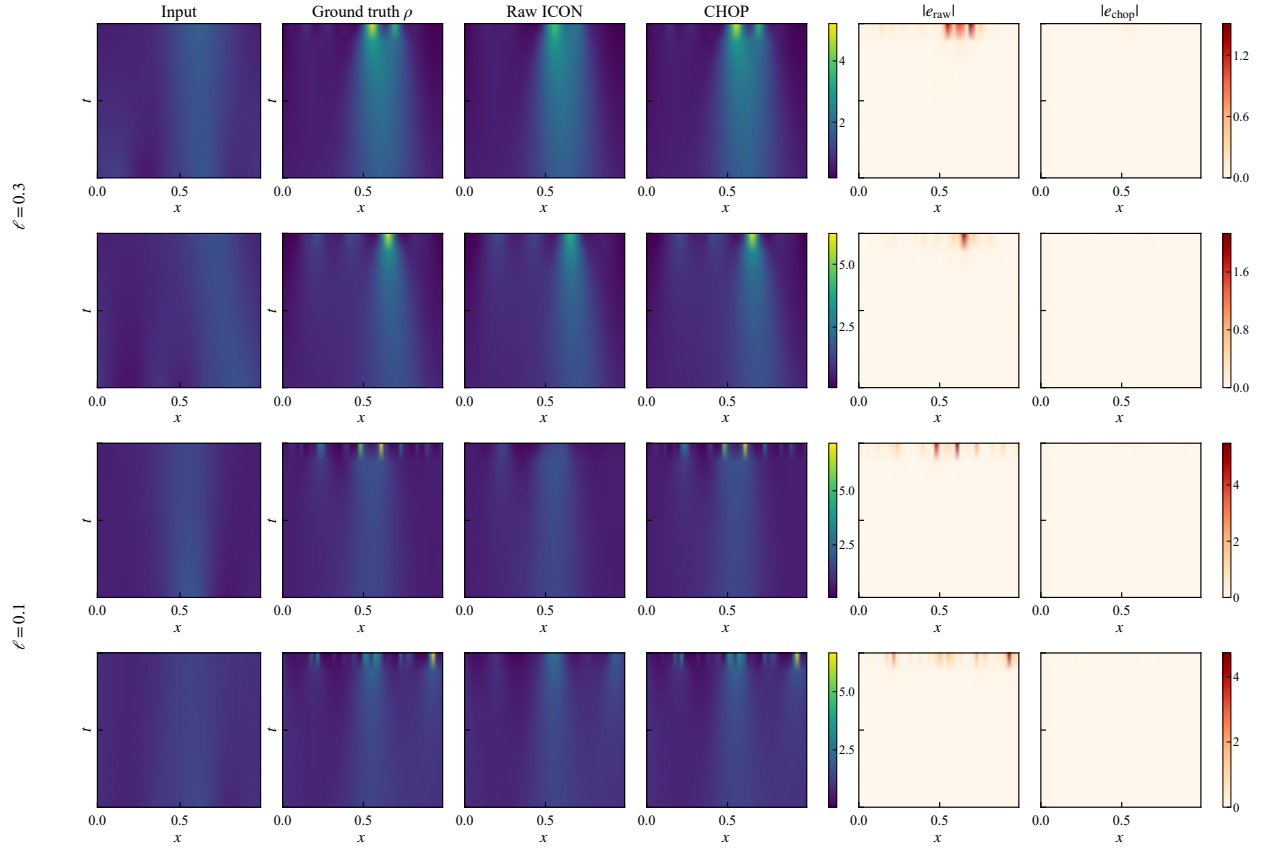


Figure 9: Additional spacetime MFC predictions for the g -parameter operator $(2, 2)$, $\rho_{[0, T/2]}(t, x) \mapsto \rho_{[T/2, T]}(t, x)$. Each length scale is illustrated with two examples.

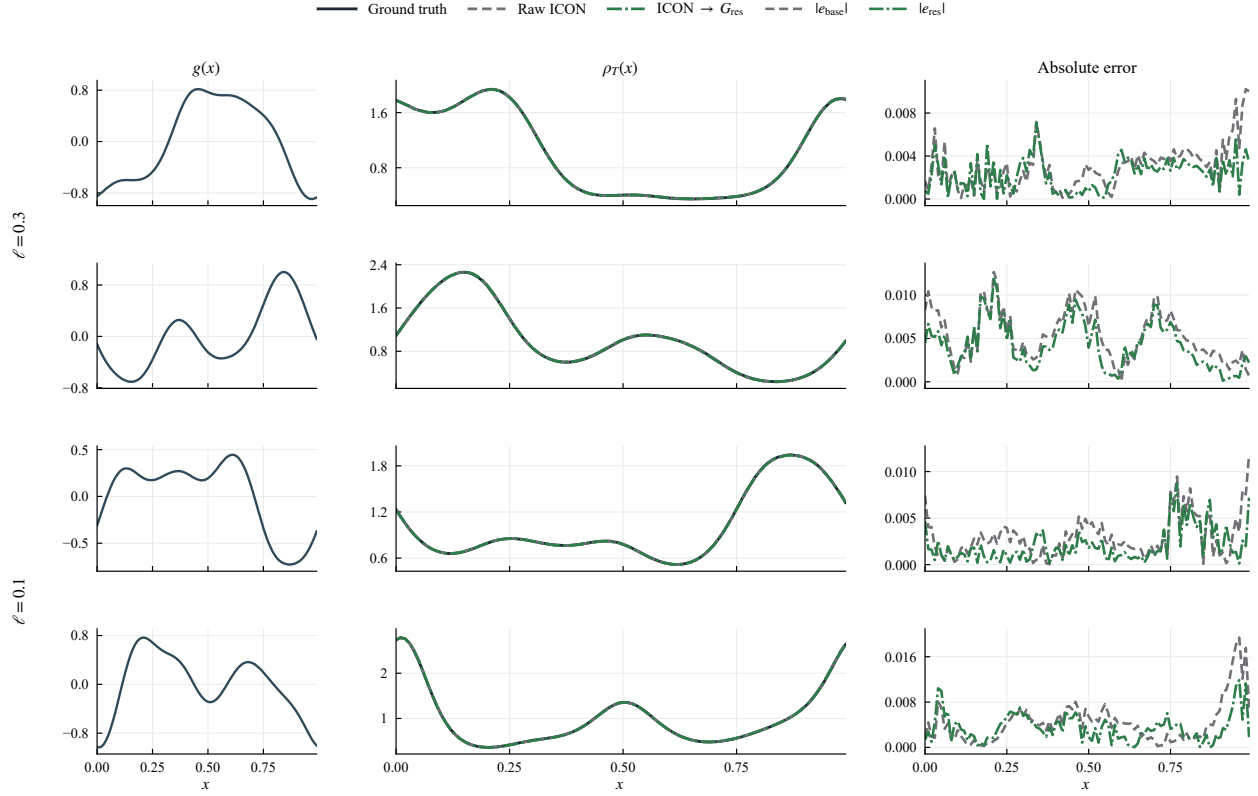


Figure 10: Additional residual-transfer predictions for the ρ -parameter operator $(1, 1)$, $g(x) \mapsto \rho_T(x)$. The reduced chain $\text{ICON} \rightarrow G_{\text{res}}$ is evaluated at $\ell = 0.3$ and $\ell = 0.1$, with two examples for each length scale.

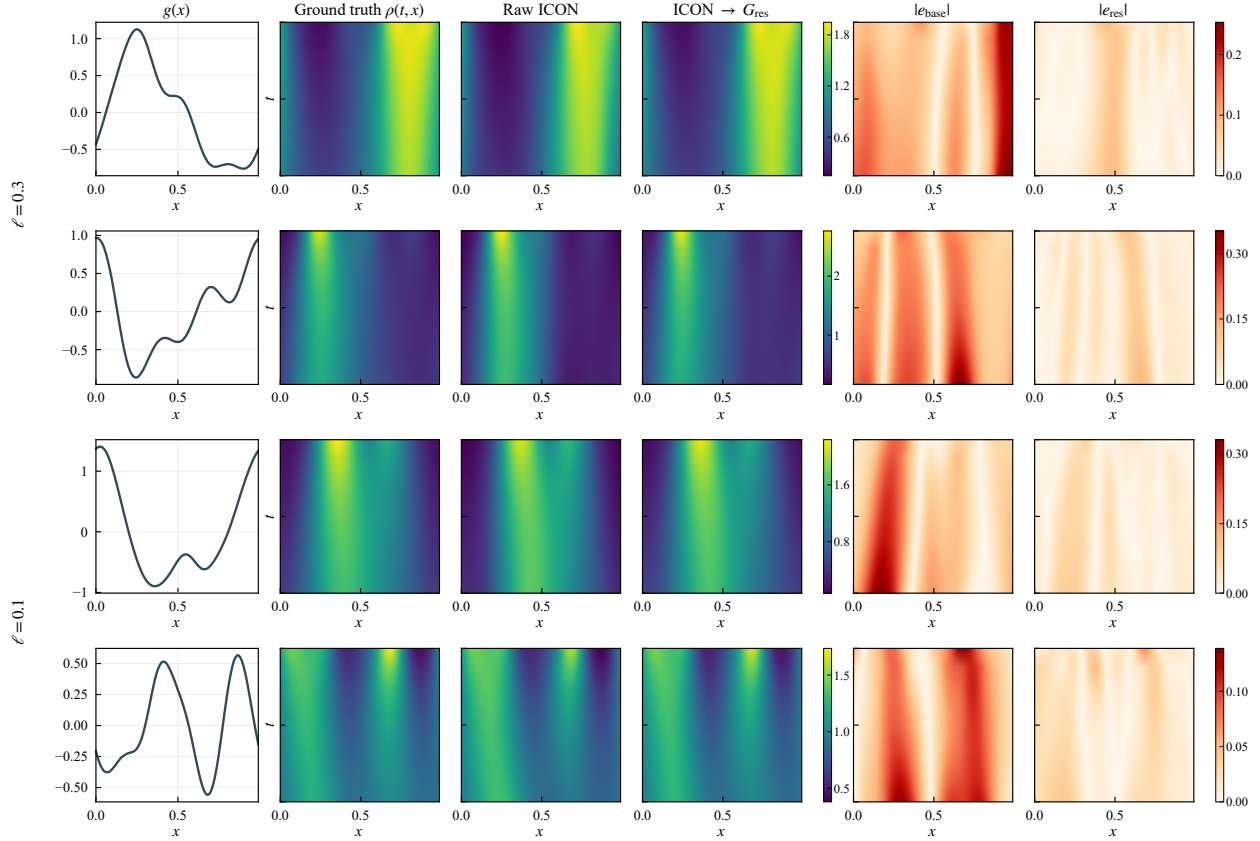


Figure 11: Additional residual-transfer predictions for the ρ -parameter operator $(1, 2)$, $g(x) \mapsto \rho_{[T/2, T]}(t, x)$. The reduced chain $\text{ICON} \rightarrow G_{\text{res}}$ is evaluated at $\ell = 0.3$ and $\ell = 0.1$, with two examples for each length scale.

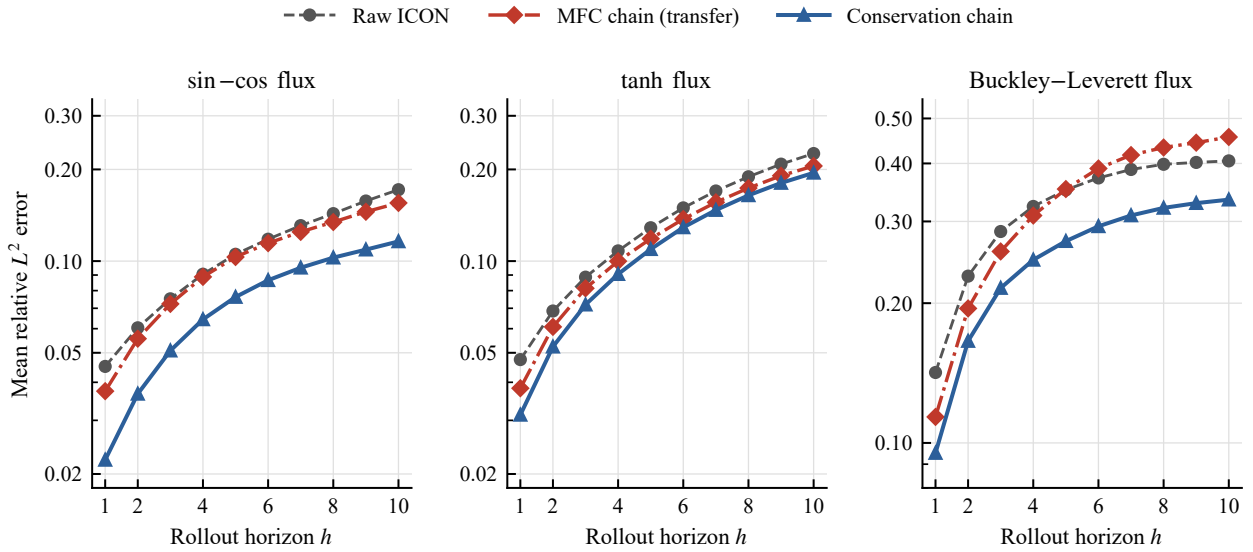


Figure 12: Ten-step autoregressive rollout for the MFC chain transferred to the conservation-law.