

GIFT: Guided Intermediate Feature Training via Action-Oriented Structural Supervision for Robotic Manipulation

Yupeng Zheng^{1,2*}, Xiang Li^{3*}, Songen Gu^{4*}, Yuhang Zheng^{5*}, Shuai Tian^{1,2}, Weize Li⁵,
Linbo Wang^{1,2}, Chaoyue Li^{1,2}, Qichao Zhang^{1,2†}, Haoran Li^{1,2†}, Zhongpu Xia¹,
Ya-Qin Zhang³, Shuicheng Yan⁵, Dongbin Zhao^{1,2†}

¹Institute of Automation, Chinese Academy of Sciences, ²University of Chinese Academy of Sciences,

³Tsinghua University, ⁴Fudan University, ⁵National University of Singapore

*Equal contribution. †Corresponding authors.

Abstract—Vision-language pre-training and predictive world modeling provide robot policies with rich semantic and dynamic visual features, but their native action and visual-prediction objectives may omit critical physical and task structure while retaining control-irrelevant visual redundancy, leading to suboptimal performance. We call this mismatch between visual richness and control utility the action-sufficiency gap. We investigate whether this gap can be bridged by guiding intermediate features to preserve three recurring types of control-relevant structure in robotic manipulation: geometry governing motion feasibility, affordance encoding instruction-relevant entities and object-centric end-effector configurations, and goals grounding instructions in task-relevant action regions. To this end, we present GIFT (Guided Intermediate Feature Training), an architecture-flexible framework for learning intermediate features that translates these structures into training-time constraints through geometry alignment, affordance prediction, and goal-region reconstruction. We instantiate GIFT in a semantics-centered Vision-Language-Action (VLA) policy, a direct-action World-Action Model (WAM), and an inverse-dynamics WAM, and compare injection and no-injection designs while retaining each model’s action formulation. Under zero-shot transfer to LIBERO-Plus, GIFT-VLA, GIFT-WAM-Fast, and GIFT-WAM-IDM outperform StarVLA-OFT, Fast-WAM, and Fast-WAM-IDM by 4.6, 12.6, and 5.2 percentage points, reaching 79.6%, 72.6%, and 87.8%, respectively, across seven distribution shifts. On RoboCasa, the three GIFT variants reach 61.4%, 83.6%, and 82.3%, outperforming their counterparts by 12.6, 9.0, and 8.4 points, respectively. Together, these results establish learning functionally structured intermediate features as a reusable principle across model-specific action formulations, with especially large gains on articulated-object tasks and high-precision real-world manipulation under unseen visual and spatial perturbations. Ablation studies further show that the no-injection variants perform better, indicating that GIFT internalizes task-relevant structure into intermediate features without relying on auxiliary conditioning. Project page: <https://openphoenix-team.github.io/GIFT-pages>.

Index Terms—Vision-Language-Action Models, World-Action Models, Robotic Manipulation, Representation Learning

1 INTRODUCTION

GENERAL-PURPOSE robot policies must connect semantic task understanding with precise physical control. Vision-Language-Action (VLA) policies transfer vision-language knowledge to action prediction [1]–[3], while World-Action Models (WAMs) couple control with predictive visual dynamics [4]–[6]. Both pursue reusable language-conditioned manipulation, yet matched baselines remain suboptimal under viewpoint, layout, language, appearance, and robot-initialization shifts (Fig. 1), revealing a mismatch between visual richness and control utility.

Despite this progress, neither end-to-end action supervision nor visual prediction guarantees that intermediate features retain the information most useful for robot control. In VLAs, action-only supervision can reward shortcuts based on background textures or camera artifacts and does not explicitly preserve metric relations, object-centric interaction configurations, or instruction-conditioned targets [7].

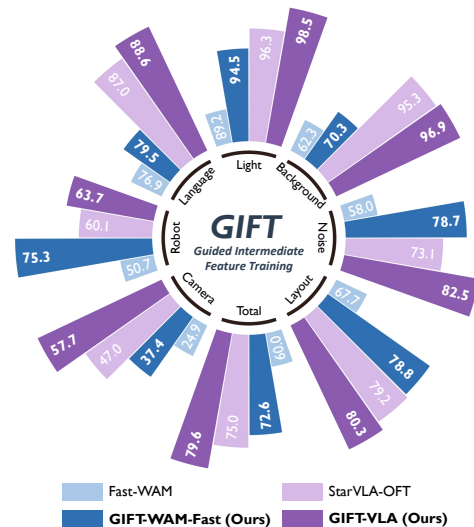


Fig. 1: **GIFT improves zero-shot robustness.** GIFT-VLA and GIFT-WAM-Fast consistently outperform StarVLA-OFT and Fast-WAM under seven LIBERO-Plus shifts and on average.

In WAMs, RGB latents optimized for pixel reconstruction emphasize appearance; even visually plausible forecasts may retain task-irrelevant detail while omitting the 3D and object-semantic structure needed for interaction [8], [9]. We call this mismatch between visual richness and control utility the *action-sufficiency gap*. Recent methods address parts of this gap through auxiliary supervision. Geometry-oriented approaches inject explicit 3D representations or align intermediate features with geometric teachers [10]–[12], while object- and goal-oriented methods introduce affordance reasoning or reconstruct instruction-relevant regions [13], [14]. DreamVLA predicts dynamic, spatial, and semantic knowledge [15]; Flex- π jointly supervises RGB, 3D pointmaps, and object-level semantics [9]; GuidedVLA assigns object, skill, and geometry factors to specialized decoder heads [7]; and World Guidance compresses future observations into an action-conditioning space [8]. Although these methods validate specific guidance signals, their studies are generally confined to selected factors and a particular policy family, attention layout, or predictive interface. It therefore remains unclear whether a common principle for guiding intermediate features can preserve complementary physical and task structures across diverse policy architectures, and whether structuring these features alone can improve control without injecting auxiliary predictions into the action head.

To investigate this question, our core insight is to develop an architecture-flexible, unified principle for guiding intermediate features to preserve control-relevant structures that recur in robotic manipulation. Specifically, we organize the guidance around three complementary types of information: *geometry* governing motion feasibility, *affordance* encoding instruction-relevant entities and object-centric end-effector configurations, and *goals* grounding instructions in task-relevant action regions. Building on this insight, we propose **GIFT** (Guided Intermediate Feature Training), an architecture-flexible framework that translates these structures into training constraints on intermediate visual features through geometry alignment, affordance prediction, and goal-region reconstruction. The key is not to prescribe a shared action-reasoning interface, but to specify what control-relevant information intermediate features should retain across policies.

To test whether this principle for guiding intermediate features transfers across action formulations, we instantiate GIFT in three policy configurations: a semantics-centered VLA with direct action prediction, a fast-mode WAM with direct action diffusion, and an inverse-dynamics WAM that derives actions from predicted future trajectories. All three configurations share the same geometry–affordance–goal supervision while retaining their model-specific action formulations. We further compare injection and no-injection designs in all three configurations to separate the effect of learning intermediate features from that of supplying auxiliary predictions as additional action conditions.

Across LIBERO and RoboCasa, all GIFT configurations preserve competitive in-distribution performance, while LIBERO-Plus evaluates robustness under distribution shifts. Under zero-shot transfer to LIBERO-Plus [16], all three instantiations outperform their matched baselines across seven distribution shifts; on RoboCasa [17], the gains are especially pronounced for the WAM variants on articulated-

object tasks. Real-robot evaluations further demonstrate robustness under unseen visual and spatial perturbations. Single-guidance ablations first establish the complementary effects of geometry, affordance, and goal supervision; injection ablations then show that the no-injection variants perform better; and attention visualizations further reveal more consistent focus on task-relevant objects and interaction regions. Together, these results indicate that GIFT internalizes task-relevant structure into intermediate visual features without relying on auxiliary predictions as additional action conditions.

Our main contributions are:

- We identify an action-sufficiency gap shared by VLAs and WAMs and address it by structuring intermediate features through complementary geometry, affordance, and goal supervision.
- We instantiate the same objectives as GIFT-VLA, GIFT-WAM-Fast, and GIFT-WAM-IDM, using direct prediction, direct action diffusion, and future-conditioned inverse dynamics, respectively, while keeping action generation model-specific.
- Extensive simulation and real-robot evaluations demonstrate consistent gains over matched baselines, with pronounced advantages in zero-shot transfer, articulated-object interaction, and high-precision manipulation.

2 RELATED WORK

2.1 Vision-Language-Action Policies and Structured Guidance

Vision-Language-Action (VLA) policies couple pretrained visual-language representations with robot actions, extending beyond vision-only controllers [18], [19]. Early systems transferred web knowledge to actions [1] and trained foundation policies on large robot datasets [2]. Recent models improve continuous control via flow matching and action chunking [3], [20], [21], alongside work on cross-embodiment data [22], [23] and efficient policies [24], [25]. However, action-only objectives do not specify which spatial, interaction, and task evidence intermediate features must preserve [7].

Structured VLA learning addresses this gap with task-relevant guidance. SpatialVLA [10], GeoVLA [11], and BridgeVLA [26] introduce 3D-aware positional or projected representations, Multi-view-VLA [27] aggregates geometry-guided latent views, and Spatial Forcing [12] aligns visual features with a geometric teacher. RoboPoint [28] grounds spatial affordances, and CoA-VLA [13] combines goal-related object selection with grasp and collision-avoidance cues. CoT-VLA [29] externalizes visual reasoning traces, whereas ReconVLA [14] reconstructs gaze regions to emphasize instruction-relevant targets. DreamVLA [15] forecasts compact dynamic, spatial, and semantic knowledge. GuidedVLA [7] assigns grounding, skill recognition, and geometry perception to specialized decoder heads.

2.2 World-Action Models and Predictive Representation Learning

World-Action Models (WAMs) augment action prediction by modeling scene evolution under intervention [30]. They

connect instructions and actions through future observations or latent states using joint video-action learning [31], [32], autoregressive world-action prediction [33], or pretrained video generators [4], [34]. Joint prediction supplies dynamic supervision and video priors; FastWAM [5] improves features through video co-training without inference-time frame generation. Nevertheless, future RGB latents optimized for pixel reconstruction can over-represent appearance while omitting the geometry, object semantics, and task structure needed for action [8], [9]. Latent-action models compress future motion for video-scale pretraining [35]–[37]. Yet coarse latent actions may lack detail for precise control [8].

Recent WAMs therefore introduce task-aware prediction targets and conditioning spaces. GAM [38] grounds temporal prediction and action decoding in geometric foundation features. GeoSem-WAM [39] jointly predicts future RGB, geometry, and semantic representations; and Flex- π [9] jointly denoises RGB, 3D pointmaps, and object-level semantics in a shared latent space. Object-centric methods provide another form of structure: MaskWAM [40] uses target-object masks as prompts and prediction targets, SG-WAM generates text-grounded object and spatial foresight [41], and OA-WAM represents robots and objects as instruction-addressable slots [42]. World Guidance [8] compresses future observations into action-conditioning targets, while DIAL [43] predicts latent visual foresight as an intent bottleneck.

2.3 Distinction between GIFT and Prior Work

GIFT differs from prior work in how structured knowledge is organized and applied. **Decoder specialization.** Guided-VLA [7] assigns grounding, geometry perception, and skill recognition to specialized VLA decoder heads. GIFT instead supervises intermediate visual features shared with the action pathway, without fixing head functions or decoder architecture. **Future-prediction interfaces.** DreamVLA [15] forecasts dynamic, spatial, and semantic knowledge, World Guidance [8] learns a compact future-observation condition space, and DIAL [43] uses visual foresight as an inverse-dynamics intent bottleneck. GIFT treats geometry, affordance, and goal as training constraints on intermediate features; its default no-injection form excludes auxiliary predictions from the action generator. This separation attributes improvements to representation shaping rather than extra inference-time conditions, while allowing the same objectives to guide policies with different action inputs. **Concurrent affordance-centric preprints.** AffordanceVLA [44] predicts Which2Act, Where2Act, and How2Act cues through specialized experts, while AffordVLA [45] aligns VLA features with an affordance teacher. These concurrent efforts likewise demonstrate the value of shaping intermediate features for control. GIFT generalizes this idea beyond affordance-specific VLA designs: geometry–affordance–goal jointly encode motion feasibility, interaction selection, and instruction-conditioned relevance across a semantics-centered VLA, a direct-action WAM, and an inverse-dynamics WAM, while preserving their action formulations.

Our preliminary PokeVLA [46] combined geometry alignment and goal-region supervision in a compact VLA.

GIFT adds object-centric affordance supervision, unifies all three signals as a principle for training intermediate features, and validates it across the three policy formulations above. Matched backbones, a same-head VLA control, and injection/no-injection variants isolate representation supervision from action-head changes and auxiliary conditioning. Thus, GIFT contributes an architecture-flexible principle with cross-formulation evidence rather than an architecture-specific auxiliary interface.

3 METHODOLOGY

3.1 Problem Formulation and Overview

Consider a robot manipulation sample containing multi-view observations $O_t = \{I_t^v\}_{v=1}^V$, a language instruction l , the current proprioceptive state s_t , and a future action chunk $A_t = (a_t, a_{t+1}, \dots, a_{t+H-1}) \in \mathbb{R}^{H \times d_a}$. Here, t is the current time step, $v \in \{1, \dots, V\}$ indexes the camera view, V is the number of views, H is the action horizon, and d_a is the action dimension. Let C_t collect the policy’s native action conditions, including (l, s_t) and, for the inverse-dynamics model, its future-video context. A policy predicts $\hat{A}_t \in \mathbb{R}^{H \times d_a}$ from its intermediate features Z_t as

$$\hat{A}_t = \mathcal{A}_\phi(Z_t, C_t), \quad Z_t = \mathcal{E}_\theta(O_t, l, s_t). \quad (1)$$

Here, θ and ϕ denote the learnable parameters of the encoder $\mathcal{E}_\theta$ and the action generator $\mathcal{A}_\phi$, respectively. ψ_{geo} , ψ_{aff} , and ψ_{goal} denote the learnable parameters of the three auxiliary decoders (their subscripts are suppressed on $\mathcal{D}$ for readability); the VGGT teacher is frozen. $\mathcal{E}_\theta$ can be a vision–language backbone or the video branch of a world–action model, and $\mathcal{A}_\phi$ can be a direct regression head, a diffusion action expert, or an inverse-dynamics module. Despite their rich visual knowledge, these backbones do not necessarily produce control-oriented intermediate features. As illustrated in Fig. 2, GIFT addresses this gap with complementary *geometry*, *affordance*, and *goal* supervision. These signals respectively capture motion feasibility, instruction-relevant object–end-effector relations, and instruction-conditioned task-relevant regions. Let r denote a selected backbone layer and $Z_t^{(r)} = \{z_{t,i}^{(r)}\}_{i=1}^{N_r} \in \mathbb{R}^{N_r \times d_r}$ denote its visual-token subset, where i indexes the N_r spatial tokens after flattening the view and patch dimensions and d_r is the token width. We use shallow features ($r = 6$) for geometry guidance and semantically richer final-layer features ($r = -1$) for affordance and goal segmentation. Lightweight prediction heads $\mathcal{D}_{\text{geo}}$, $\mathcal{D}_{\text{aff}}$, and $\mathcal{D}_{\text{goal}}$ are trained to predict the corresponding structured targets from these selected current-frame features. The default GIFT formulation is the *no-injection* design:

$$\hat{A}_t = \mathcal{A}_\phi(Z_t, C_t), \quad C_t = C_t^{\text{native}}, \quad (2)$$

where C_t^{native} denotes the policy’s original action conditions; the auxiliary geometry, affordance, and goal predictions $\hat{G}_t$, $\hat{U}_t$, and $\hat{M}_t$ are excluded from the action inputs and shape the shared intermediate features only through their backpropagated losses. This separation lets the same objectives supervise heterogeneous policy families while keeping action generation model-specific.

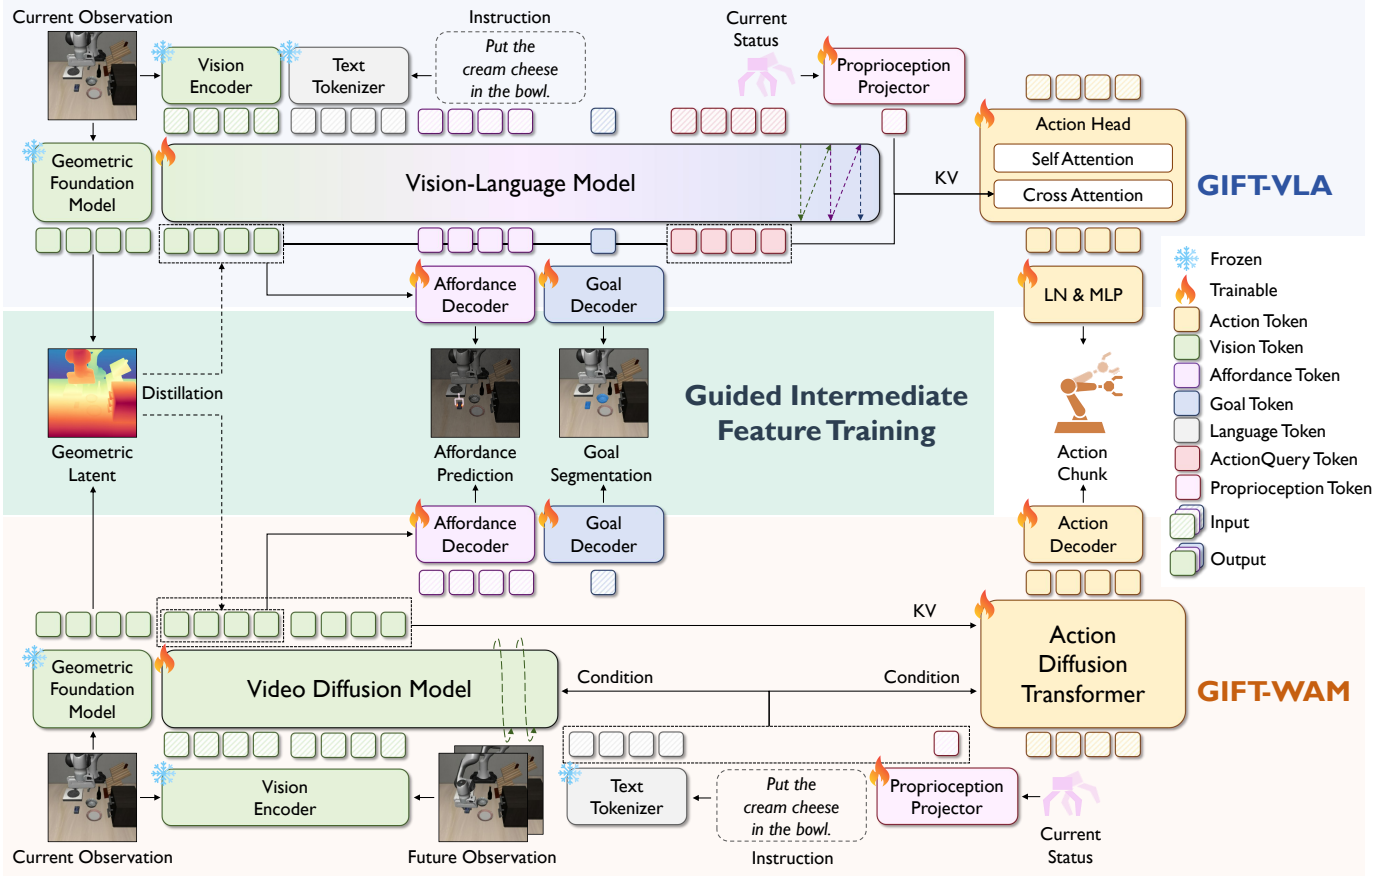


Fig. 2: **Overview of GIFT.** Given the observation, instruction and robot state, GIFT attaches three training objectives to the intermediate visual tokens of a policy: geometry alignment with a frozen geometric foundation model, object-centric affordance prediction, and instruction-conditioned goal-region prediction. The default no-injection design does not route auxiliary predictions into the action pathway; the auxiliary objectives shape the shared intermediate features only through their training gradients. We instantiate the same principle in a VLA (top) and two WAM action formulations (bottom).

3.2 Structured Intermediate Guidance

3.2.1 Geometry Guidance

Geometry determines whether a candidate motion is physically feasible, but RGB reconstruction and action supervision alone need not preserve the spatial structure encoded by a geometric model. We therefore use a frozen VGGT geometric foundation model [47] as a training-time teacher. For the same set of input views, the teacher produces patch features $G_t = \{g_{t,i}\}_{i=1}^{N_g}$, where $g_{t,i} \in \mathbb{R}^{d_g}$, d_g is the VGGT feature width, i indexes the view-patch locations flattened across all views, and N_g is their total number after resampling. We spatially resample the teacher grid to establish a one-to-one correspondence with the selected student-token grid, so that $N_g = N_r$. Because directly regressing features from two heterogeneous backbones can be sensitive to their different feature scales, we decompose each teacher feature into its direction and magnitude. A layer-normalized two-layer MLP and a scalar scale head predict these two components from each student token:

$$(\hat{g}_{t,i}, \hat{\rho}_{t,i}) = \mathcal{D}_{\text{geo}}(z_{t,i}^{(r)}), \quad i = 1, \dots, N_g. \quad (3)$$

Here, $\hat{g}_{t,i} \in \mathbb{R}^{d_g}$ is the projected student feature and $\hat{\rho}_{t,i} \in \mathbb{R}$ is its predicted log-scale; we collect the former as $\hat{G}_t =$

$\{\hat{g}_{t,i}\}_{i=1}^{N_g}$. Define the unit directions and compressed teacher magnitude as

$$d_{t,i} = \frac{g_{t,i}}{\max(\|g_{t,i}\|_2, \epsilon)}, \quad \hat{d}_{t,i} = \frac{\hat{g}_{t,i}}{\max(\|\hat{g}_{t,i}\|_2, \epsilon)}, \\ \rho_{t,i} = \log(1 + \|g_{t,i}\|_2), \quad (4)$$

where $d_{t,i}, \hat{d}_{t,i} \in \mathbb{R}^{d_g}$, $\rho_{t,i} \in \mathbb{R}$, and $\epsilon > 0$ ensures numerical stability. The angular alignment loss is

$$\mathcal{L}_{\text{ang}} = \frac{1}{N_g} \sum_{i=1}^{N_g} (1 - \hat{d}_{t,i}^\top d_{t,i}), \quad (5)$$

and the scale alignment loss is

$$\mathcal{L}_{\text{scale}} = \frac{1}{N_g} \sum_{i=1}^{N_g} (\hat{\rho}_{t,i} - \rho_{t,i})^2. \quad (6)$$

The former is invariant to feature norm and aligns the orientation of the student prediction with the VGGT feature, whereas the latter retains the magnitude information discarded by cosine alignment. Their weighted sum gives the geometry objective

$$\mathcal{L}_{\text{geo}} = \lambda_{\text{ang}} \mathcal{L}_{\text{ang}} + \lambda_{\text{scale}} \mathcal{L}_{\text{scale}}, \quad (7)$$

where we set the corresponding loss weights to $\lambda_{\text{ang}} = 0.2$ and $\lambda_{\text{scale}} = 0.05$ in all experiments. Together, the two predictions define the scale-reconstructed feature

$$\tilde{g}_{t,i} = \hat{d}_{t,i} (\exp(\hat{\rho}_{t,i}) - 1). \quad (8)$$

We examine the teacher compatibility of $\tilde{g}_{t,i}$ through the depth-based diagnostic in Sec. 4.4. Unlike approaches that introduce depth or point clouds as a new inference modality, the geometric teacher is used only to construct the training target. The aligned visual tokens remain in the policy’s original representation space and incur no teacher-model cost at deployment.

3.2.2 Affordance Guidance

Geometry alone describes what occupies the scene, but not how the robot can interact with it. Inspired by HumanEgo’s object-centric representation of hand-object interactions [48], we define interaction affordance as an instruction-conditioned, structured object-end-effector relation: entity roles identify instruction-relevant objects, while object-centric end-effector poses and end-effector closure states describe the current interaction configuration. This representation directly encodes what to interact with and how.

Specifically, we identify all objects referred to by the language instruction and choose the first object interacted with in the demonstration as the anchor a . For entity slot $k \in \{1, \dots, K\}$, we define the 20-D interaction target

$$u_{t,k} = [c_{t,k}, \xi_{t,k}^{k|a}, \xi_{t,k}^{e(k)|k}, f_{t,k}] \in \mathbb{R}^{20}. \quad (9)$$

Here, $c_{t,k} \in \mathbb{R}$ is a scalar role ID distinguishing padding, the left or right end effector, the anchor object, and other instruction-relevant objects. Each pose $\xi = [p, r] \in \mathbb{R}^9$ comprises a 3-D translation p and a continuous 6-D rotation representation r . $\xi_{t,k}^{k|a}$ gives entity k in the anchor frame, while $\xi_{t,k}^{e(k)|k}$ gives its associated end effector $e(k)$ in the entity frame. For bimanual tasks, the language instruction explicitly assigns the manipulation performed by the left and right arms. We accordingly associate each instruction-relevant object with its designated arm and express the pose of that arm’s end effector in the object coordinate frame. In the real-robot experiments, we set $K = 4$ for the single-arm xArm7 Tasks 1–2 and $K = 5$ for the dual-arm ARX X5 Tasks 3–4. All allocated slots are valid and supervised, so no padding or slot-validity masking is used. In the bimanual test-tube task, the five slots correspond to the two end effectors and three instruction-relevant objects. For an object slot, $f_{t,k} = -1$ denotes a non-applicable closure state. For an end-effector slot, $\xi_{t,k}^{k|a}$ records its pose in the anchor frame, $\xi_{t,k}^{e(k)|k}$ is the identity pose, and $f_{t,k}$ records its closure state. We use a binary open/closed value for a parallel gripper and the closure state derived from the distance between the thumb and index fingertips for a dexterous hand. For datasets with variable entity counts, we define a slot-validity mask $q_{t,k} \in \{0, 1\}$; unused slots are zero-padded and excluded by $q_{t,k}$. We assume each sample contains at least one valid slot, so $\sum_k q_{t,k} > 0$. The affordance targets supervise only the intermediate features; they are neither policy inputs nor required at inference. An

affordance decoder summarizes the shared visual tokens with K learned queries and regresses the 20-D interaction targets:

$$\hat{U}_t = \mathcal{D}_{\text{aff}}(Z_t^{(r)}). \quad (10)$$

$$U_t = \{u_{t,k}\}_{k=1}^K, \quad (11)$$

$$\hat{U}_t = \{\hat{u}_{t,k} \in \mathbb{R}^{20}\}_{k=1}^K.$$

Let $Q_t = \sum_{k=1}^K q_{t,k}$ and define the element-averaged Smooth L1 distance with $\beta = 1$ as

$$\text{SL1}(\hat{u}, u) = \frac{1}{20} \sum_{j=1}^{20} \rho(\hat{u}_j - u_j), \quad (12)$$

$$\rho(d) = \begin{cases} \frac{1}{2}d^2, & |d| < 1, \\ |d| - \frac{1}{2}, & \text{otherwise.} \end{cases}$$

The affordance objective is

$$\mathcal{L}_{\text{aff}} = \frac{1}{Q_t} \sum_{k=1}^K q_{t,k} \text{SL1}(\hat{u}_{t,k}, u_{t,k}). \quad (13)$$

The anchor-relative and object-centric parameterization explicitly couples instruction-relevant entities with the end-effector poses required to interact with them while reducing dependence on the global camera frame.

3.2.3 Goal Guidance

Affordance describes the structured interaction configurations of instruction-relevant entities but does not provide dense image-space localization. Goal guidance supplies this complementary spatial grounding by identifying task-relevant action regions. For every input view, we construct a binary target mask from the instruction-relevant manipulated object or region and collect the masks as $M_t = \{M_t^v\}_{v=1}^V$, where $M_t^v \in \{0, 1\}^{h_m \times w_m}$ and (h_m, w_m) is the decoder-grid resolution. Importantly, M_t is the sole goal target and supervises only *where* the intended interaction should occur.

Because $Z_t^{(r)}$ is conditioned on the instruction, a goal decoder can predict an instruction-specific low-resolution mask $\hat{M}_t = \mathcal{D}_{\text{goal}}(Z_t^{(r)}, l) = \{\hat{M}_t^v\}_{v=1}^V$, with $\hat{M}_t^v \in [0, 1]^{h_m \times w_m}$. We use binary cross entropy and soft Dice loss:

$$\mathcal{L}_{\text{goal}} = \lambda_{\text{bce}} \text{BCE}(\hat{M}_t, M_t) + \lambda_{\text{dice}} (1 - \text{Dice}(\hat{M}_t, M_t)), \quad (14)$$

where both terms are averaged over views and pixels, and Dice is defined as

$$\text{Dice}(\hat{M}, M) = \frac{2\langle \hat{M}, M \rangle + \epsilon}{\|\hat{M}\|_1 + \|M\|_1 + \epsilon}. \quad (15)$$

Here, $\lambda_{\text{bce}}, \lambda_{\text{dice}} \geq 0$ are loss weights. The target mask is downsampled to match the decoder grid before computing the loss. Together, affordance and goal separate two complementary questions: how the instruction-relevant entities should be interacted with and where the intended interaction occurs in the image.

3.3 Instantiation Across Policy Paradigms

The three objectives above act on intermediate visual tokens and therefore do not assume a particular action parameterization. We instantiate GIFT on three policies with deliberately different action-generation mechanisms.

3.3.1 GIFT-VLA: Semantics-Centered Direct Action Policy

GIFT-VLA builds on the StarVLA-OFT formulation [49] with a Qwen3-VL backbone. Multi-view images and the instruction are processed by the VLM, while proprioception is projected as an additional action condition. We append one goal token, K affordance tokens, and N_q action-query tokens to the multimodal sequence, where $N_q = H$, so that each predicted action step has one query. Geometry guidance is applied directly to the selected shallow-layer visual tokens. Each affordance-token feature is decoded by a layer-normalized MLP into the 20-D interaction target in Eq. (9). The goal-token feature cross-attends to current visual tokens and is matched against projected visual features to produce $\hat{M}_t$. To support the optional injection analysis in Sec. 3.4, we replace the original MLP regression head with a layer-aligned BridgeAttention action head. This modification is not required by the GIFT objectives; it provides an interface for exposing auxiliary features to the action generator in the injection variant and is evaluated separately with the same head but without guidance. As shown in Fig. 2(top), the head draws on layer-aligned VLM hidden states and action-query features through separate cross-attention streams.

The action head maintains N_q learned action latents and refines them through successive bridge blocks, with projected proprioception appended to the conditioning stream. After the final block, the latents are mapped to a continuous action chunk and trained by direct ℓ_1 regression:

$$\mathcal{L}_{\text{VLA}} = \frac{1}{Hd_a} \sum_{h=0}^{H-1} \|\hat{a}_{t+h} - a_{t+h}\|_1. \quad (16)$$

In the no-injection model, affordance and goal tokens are explicitly masked from the action head’s raw-token cross-attention. Consequently, the action head cannot consume their predictions directly, and any improvement must arise from the shared VLM features shaped by Eqs. (7)–(14).

3.3.2 GIFT-WAM-Fast: Direct Action from World-Model Features

GIFT-WAM-Fast follows Fast-WAM [5], which couples a pretrained video diffusion transformer with an action diffusion transformer in a Mixture-of-Transformers architecture. During training, the video expert denoises future visual latents while the action expert denoises an action chunk. The fast-mode attention pattern allows action tokens to attend to the current-frame video tokens, but not the noisy future-video tokens. Video prediction nevertheless trains the shared video expert to encode scene dynamics. At inference, current-frame video features are computed once and cached for iterative action denoising, so the model retains its native direct-action behavior without generating a future video.

We attach all three GIFT objectives to the current-frame portion of the video stream. Geometry guidance projects the selected shallow-layer video tokens to the VGGT space. At the final layer, a learned-query affordance decoder pools K interaction features, while a goal decoder maps spatial first-frame tokens to the instruction-conditioned target mask. The native fast-mode training objective remains unchanged: for modality $x \in \{\text{vid}, \text{act}\}$, let

$$\mathcal{L}_{\text{FM}}^x = \mathbb{E}_{\tau, x_\tau, \chi_x} \left[\|\mathcal{F}^x(x_\tau, \tau; \chi_x) - u_\tau^x\|_2^2 \right], \quad (17)$$

where $\tau \in [0, 1]$ is the flow time, x_τ is the corresponding noisy video or action variable, χ_x denotes its native conditioning context, $\mathcal{F}^x$ is the predicted vector field, and u_τ^x is the target conditional flow. The Fast objective is

$$\mathcal{L}_{\text{Fast}} = \lambda_v \mathcal{L}_{\text{FM}}^{\text{vid}} + \lambda_a \mathcal{L}_{\text{FM}}^{\text{act}}, \quad (18)$$

where $\lambda_v, \lambda_a \geq 0$ weight the video and action flow-matching objectives.

3.3.3 GIFT-WAM-IDM: Future-Conditioned Inverse Dynamics

The inverse-dynamics variant retains the same video and action experts but changes the information available to action generation. During training, a noisy branch learns the future-video objective, while a separate teacher-forcing branch provides a clean or corrupted future-video trajectory to the action expert. The action tokens attend to this conditional video branch and learn the inverse mapping from the predicted transition to the demonstrated action. At inference, the model first denoises a future visual trajectory and then freezes its video features as key-value context for action denoising. This preserves the native imagine-then-act mechanism of the IDM baseline.

GIFT supervises the current-frame tokens at the same respective layers as in the fast-mode model; neither the auxiliary targets nor the auxiliary heads replace the future-conditioned action pathway. Its native objective is again the sum of video and action flow-matching losses, but the action term is conditioned on the future-video branch:

$$\mathcal{L}_{\text{IDM}} = \lambda_v \mathcal{L}_{\text{FM}}^{\text{vid}} + \lambda_a \mathcal{L}_{\text{FM}}^{\text{act|vid}}. \quad (19)$$

Here, $\mathcal{L}_{\text{FM}}^{\text{act|vid}}$ is Eq. (17) with $x = \text{act}$ and χ_x additionally containing the teacher-forced future-video features during training. Comparing GIFT-WAM-Fast and GIFT-WAM-IDM therefore tests whether the same representation principle transfers between direct action diffusion and future-conditioned inverse dynamics.

3.4 Optional Auxiliary-Feature Injection

The no-injection formulation is the main design of our GIFT because it most directly tests whether structured intermediate supervision alone produces control-oriented intermediate features without routing auxiliary predictions into the action-generation interface. For completeness, we also implement the injection variant in all three policy families, as shown in Fig. 3. Let F_t^{aff} and F_t^{goal} denote the hidden features used by the affordance and goal decoders before their final prediction layers. Injection augments the model-specific action condition C_t as

$$\tilde{C}_t = \left[C_t; \mathcal{P}_{\text{aff}}(F_t^{\text{aff}}); \mathcal{P}_{\text{goal}}(F_t^{\text{goal}}) \right], \quad \hat{A}_t = \mathcal{A}_\phi(Z_t, \tilde{C}_t), \quad (20)$$

where $[\cdot]$ denotes concatenation along the context-token dimension, and the separate projectors $\mathcal{P}_{\text{aff}}$ and $\mathcal{P}_{\text{goal}}$ map their potentially different input widths to the action-conditioning width. For GIFT-VLA, layer-aligned affordance and goal token features are supplied to the condition cross-attention of each BridgeAttention block. For both

WAM variants, learned-query features from the current-frame video tokens are projected and appended to the action expert’s context sequence.

The injection route is active during both training and inference. At deployment, however, all injected features are predicted internally from the current observation and instruction; no ground-truth auxiliary labels or frozen teacher models are available to the policy. Geometry is not introduced as an additional conditioning signal, since geometric supervision is applied directly to the visual tokens already consumed through each policy’s native visual pathway. This alignment absorbs geometric information into the native visual stream, allowing the frozen geometry teacher to be discarded at inference and avoiding additional geometry tokens or decoding overhead. In contrast, affordance and goal describe object-level interaction configurations and task relevance; their decoder features form compact, semantically organized tokens that can be appended as optional action conditions. This design separates the effect of explicitly routing auxiliary tokens from the representation gains induced by structured intermediate supervision itself.

3.5 Overall Training Objective

For any of the three policy instantiations, the complete objective is

$$\mathcal{L}_{\text{GIFT}} = \mathcal{L}_{\text{native}} + \lambda_{\text{geo}}\mathcal{L}_{\text{geo}} + \lambda_{\text{aff}}\mathcal{L}_{\text{aff}} + \lambda_{\text{goal}}\mathcal{L}_{\text{goal}}, \quad (21)$$

where $\mathcal{L}_{\text{native}}$ is selected from Eqs. (16), (18), and (19). The nonnegative scalars λ_{geo} , λ_{aff} , and λ_{goal} control the three auxiliary objectives, and training optimizes the applicable native parameters (θ, ϕ) together with $(\psi_{\text{geo}}, \psi_{\text{aff}}, \psi_{\text{goal}})$. Both injection settings use the same structured targets and overall objective; they differ only in whether the internally predicted affordance and goal features are exposed to the action generator. In the default no-injection model, the geometry teacher and auxiliary prediction heads do not need to be executed during deployment, and the model-specific action generator receives no auxiliary context.

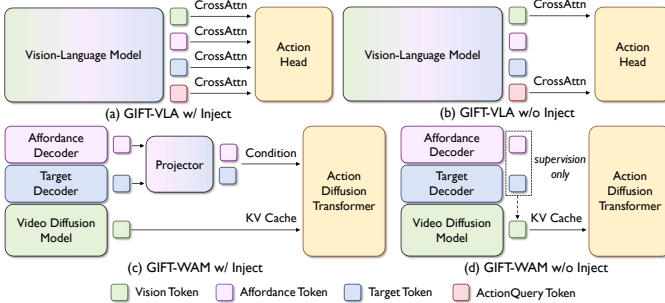


Fig. 3: **Injection and no-injection variants.** With injection, model-predicted affordance and goal features are routed to the model-specific action head during both training and inference. Without injection, the same predictions provide auxiliary supervision only. Geometry remains an alignment-only objective because its scene-level structure is absorbed directly by the visual tokens already entering the model-specific action pathway, whereas the object-level affordance and goal features provide compact auxiliary conditions.

4 SIMULATION EVALUATION

4.1 Evaluation Protocol

We evaluate GIFT on three simulation benchmarks that expose complementary aspects of manipulation performance.

LIBERO [50] spans four suites, Spatial, Object, Goal, and Long, which respectively emphasize spatial relations, object-centric knowledge, goal interpretation, and long-horizon composition. Each suite contains ten language-conditioned manipulation tasks, performed by a Franka Emika Panda manipulator. Following prior work, we execute 50 rollouts per task and report both suite-wise and overall success rates.

LIBERO-Plus [16] expands LIBERO into seven perturbation distributions defined by shifts in camera view-point, robot initialization, language instruction, lighting, background texture, sensor noise, and object layout. We evaluate every perturbed instance once and use the full benchmark evaluation set for both the main comparison and the ablations. All models are trained solely on the original LIBERO training trajectories and receive no fine-tuning on the augmented LIBERO-Plus training data.

RoboCasa [17] GR1 tabletop benchmark complements LIBERO with a different robot embodiment, featuring a Fourier GR1 humanoid robot equipped with two 7-DoF arms, two 6-DoF Fourier dexterous hands, and a 3-DoF waist. It also provides a visually and dynamically distinct household-manipulation setting, enabling us to further assess the effectiveness of GIFT. The suite contains 24 tasks with 1,000 demonstrations per task: 18 pick-and-place tasks rearrange objects between supports or receptacles, whereas six articulated-object tasks additionally require interaction with an articulated fixture such as a cabinet or a microwave. We report success over 50 rollouts per task, together with averages for the two task groups and all tasks.

The GIFT objectives do not change the action-generation interface or provide auxiliary predictions as action inputs in the default no-injection setting. The two WAM comparisons therefore use the same backbone and native action-generation mechanism as their matched baselines and differ only in the Geometry-Affordance-Goal supervision. For GIFT-VLA, BridgeAttention is introduced solely to support the optional injection study. Table 7 provides a same-head, no-guidance control, separating its 0.7-point architectural effect from the 3.9-point gain due to structured supervision. The three comparisons are GIFT-VLA versus StarVLA-OFT, GIFT-WAM-Fast versus Fast-WAM, and GIFT-WAM-IDM versus Fast-WAM-IDM. Table 1 measures standard in-distribution control, Table 2 measures zero-shot transfer robustness to challenging environmental perturbations, and Table 3 further evaluates performance in a distinct simulation environment and robot embodiment. We report policy success rate (%) throughout.

4.2 Implementation Details

GIFT is applied during benchmark-specific post-training without an additional pre-training stage. For GIFT-VLA, we follow the StarVLA-OFT implementation with a Qwen3-VL-4B-Instruct backbone. LIBERO and LIBERO-Plus use base and wrist RGB observations, whereas RoboCasa uses the egocentric view; all images are resized to 224×224 . GIFT-VLA predicts 32-step action chunks on all three benchmarks.

We train on 32 GPUs with a per-GPU batch size of 8 (global batch size 256) for 60,000 optimizer steps. AdamW uses $\beta = (0.9, 0.95)$ and gradient accumulation of 1. On LIBERO, the base, VLM-interface, and action/auxiliary learning rates are 2.5×10^{-5} , 1×10^{-5} , and 1×10^{-6} , with 1,500 warm-up steps and cosine decay to 1×10^{-6} . On RoboCasa, the corresponding rates are 3×10^{-5} , 1×10^{-5} , and 1×10^{-4} , with 5,000 warm-up steps and cosine decay to 5×10^{-7} .

TABLE 1: Quantitative comparison on LIBERO [50]. Best and second-best results are shown in **bold** and underline, respectively.

Method	Param. (B)	Task Suite				Total
		Spatial	Object	Goal	Long	
OpenVLA [2]	7	84.7	88.4	79.2	53.7	76.5
OpenVLA-OFT [21]	7	97.6	98.4	97.9	94.5	97.1
CoT-VLA [29]	7	87.5	91.6	87.6	69.0	81.1
UniVLA [51]	7	96.5	96.8	95.6	92.0	95.2
WorldVLA [33]	7	87.6	85.2	75.1	54.1	74.8
Spatial Forcing [12]	7	99.4	99.6	98.8	96.0	98.5
Multi-view-VLA [27]	4	98.8	99.8	99.0	96.6	98.6
4D-VLA [52]	4	88.9	95.2	90.9	79.1	88.6
SpatialVLA [10]	4	88.2	95.2	90.9	79.1	88.6
StarVLA-OFT [49]	4	97.8	98.6	96.2	93.8	96.6
StarVLA- α [53]	4	99.0	99.8	98.5	94.1	98.8
π_0 [3]	3	96.8	98.8	95.8	85.2	94.2
π_0 -FAST [24]	3	96.4	96.8	88.6	60.2	85.5
ACoT-VLA [54]	3	98.6	99.0	99.4	97.0	98.5
SmolVLA [55]	2	93.0	94.0	91.0	<u>77.0</u>	88.8
GR00T N1 [25]	2	94.4	97.6	93.0	90.6	93.9
VLA-Adapter [56]	1	99.6	99.6	98.2	96.4	98.5
DreamVLA [15]	0.5	97.5	94.0	89.5	89.5	92.6
Fast-WAM [5]	6	98.2	100.0	97.0	95.2	97.6
Fast-WAM-IDM [5]	6	98.8	97.8	97.8	97.6	98.0
Cosmos Policy [4]	2	98.1	100.0	98.2	97.6	98.5
GIFT-VLA	4	99.0	99.2	98.4	94.8	97.9
GIFT-WAM-Fast	6	97.8	99.6	98.6	94.8	97.7
GIFT-WAM-IDM	6	99.0	100.0	98.6	96.4	98.5

For GIFT-WAM, the Fast and IDM variants retain their original action-generation objectives and pathways: the former directly denoises actions from current-frame world-

model features, whereas the latter conditions inverse dynamics on a predicted future trajectory. Empirically, we use 2 denoising steps at inference: the Fast variant applies them only to the action chunk, whereas the IDM variant first uses 2 steps to denoise the future video and then 2 steps to denoise the action. Both predict 32-step action chunks and use AdamW with $\beta = (0.9, 0.95)$, a learning rate of 1×10^{-4} , weight decay of 1×10^{-2} , a cosine schedule with 5% warm-up, and gradient accumulation of 1. On LIBERO, both variants use two 224×224 RGB views, 64 GPUs, a per-GPU batch size of 8, and 50 training epochs; On RoboCasa, they use one 224×224 egocentric view, 64 GPUs, a per-GPU batch size of 16, and train for at most 60,000 optimizer steps. Following the corresponding baseline protocols, both VLA- and WAM-based policies use receding-horizon execution, replanning every 10 control steps on LIBERO and LIBERO-Plus and every 12 control steps on RoboCasa. Structured targets and the frozen geometry teacher are used only for training. At inference, no labels or teacher models are required; injection variants route only the policy’s internally predicted affordance and goal features to the action head.

Action spaces and ground-truth actions. LIBERO uses a 7-D relative end-effector action $a_t = [\Delta p_t, \Delta \omega_t, g_t]$, comprising a 3-D Cartesian displacement, a 3-D axis-angle rotation increment in radians, and a scalar gripper command. RoboCasa executes a 29-D joint target comprising 7 joints for each arm, 6 for each hand, and 3 for the waist: $a_t^{\text{ctrl}} = [q_t^{L,a}, q_t^{R,a}, q_t^{L,h}, q_t^{R,h}, q_t^w] \in \mathbb{R}^{7+7+6+6+3}$. Following its pose-augmented data protocol, we use $\tilde{a}_t = [a_t^{\text{ctrl}}, p_t^L, r_{6D,t}^L, p_t^R, r_{6D,t}^R] \in \mathbb{R}^{47}$ as the training target, where each appended next-step end-effector pose contains a 3-D position and the first two columns of its rotation matrix. These pose channels provide additional supervision, while

TABLE 2: Quantitative comparison on LIBERO-Plus [16] in a zero-shot transfer setting. All methods are trained only on the standard LIBERO dataset without fine-tuning on the LIBERO-Plus dataset.

Method	Param. (B)	Perturbation Type							Total
		Camera	Robot	Language	Light	Background	Noise	Layout	
OpenVLA [2]	7	0.8	3.5	23.0	8.1	34.8	15.2	28.5	15.6
OpenVLA-OFT [21]	7	56.4	31.9	79.5	88.7	93.3	75.8	74.2	69.6
UniVLA [51]	7	1.8	46.2	69.6	69.0	81.0	21.2	31.9	42.9
WorldVLA [33]	7	0.1	27.9	41.6	43.7	17.1	10.9	38.0	25.0
RIPT-VLA [57]	7	55.2	31.2	77.6	88.4	91.6	73.5	74.2	68.4
Spatial Forcing [12]	7	20.1	13.4	40.9	29.1	33.4	25.7	39.3	29.1
Multi-view-VLA [27]	4	89.6	60.1	86.9	98.0	95.7	97.2	78.2	85.7
StarVLA-OFT [49]	4	47.0	60.1	87.0	96.3	95.3	73.1	79.2	75.0
StarVLA- α [53]	4	48.7	63.4	86.8	95.8	94.6	75.0	80.2	77.8
ABot-M0 [58]	4	60.4	67.9	86.4	96.2	91.6	86.4	82.6	80.5
NORA [59]	3	2.2	37.0	65.1	45.7	58.6	12.8	62.1	39.0
π_0 [3]	3	13.8	6.0	58.8	85.0	81.4	79.0	68.8	53.6
π_0 -FAST [24]	3	65.1	21.6	61.0	73.2	73.2	74.4	68.8	61.6
GuidedVLA [7]	3	73.7	51.4	62.6	94.6	89.0	85.2	79.9	75.4
ACoT-VLA [54]	3	72.6	82.6	87.5	97.7	<u>96.5</u>	87.8	88.1	<u>86.6</u>
VLA-JEPA [60]	2	63.3	67.1	85.4	95.6	<u>93.6</u>	66.3	85.1	79.5
VLA-Adapter [56]	1	36.2	37.9	74.6	70.6	76.1	58.0	69.7	59.1
Fast-WAM [5]	6	24.9	50.7	76.9	89.2	62.3	58.0	67.7	60.0
Fast-WAM-IDM [5]	6	65.4	<u>86.0</u>	89.5	96.3	74.4	87.6	80.7	82.6
ABot-M0.5 [61]	6	70.5	87.4	88.6	94.0	89.7	75.5	85.2	83.4
ImageWAM [62]	4	80.8	50.3	91.4	98.1	85.5	93.8	80.5	83.1
Being-H0.7 [63]	3	-	-	-	-	-	-	-	82.1
Cosmos Policy [4]	2	75.8	63.3	81.7	96.5	88.9	92.7	82.2	82.2
GAM [38]	1.4	<u>83.1</u>	70.0	84.8	97.2	94.3	<u>95.3</u>	79.1	85.5
GIFT-VLA	4	57.7	63.7	88.6	<u>98.5</u>	96.9	82.5	80.3	79.6
GIFT-WAM-Fast	6	37.4	75.3	79.5	<u>94.5</u>	70.3	78.7	78.8	72.6
GIFT-WAM-IDM	6	78.7	80.5	<u>90.2</u>	99.0	89.2	97.2	83.3	87.8

TABLE 3: Quantitative comparison on RoboCasa [17].

Method	Param. (B)	Art.	P&P	Avg.
TwinBrainVLA [64]	8	56.7	53.9	54.6
RLDX-1 [65]	8	-	-	58.7
StarVLA-OFT [49]	4	43.7	50.4	48.8
StarVLA- α [53]	4	49.0	55.4	53.8
ABot-M0 [58]	4	61.7	57.1	58.3
GR00T N1.6 [55]	3	24.2	55.4	47.6
DIAL [43]	3	74.3	68.9	70.2
Fast-WAM [5]	6	62.0	78.8	74.6
Fast-WAM-IDM [5]	6	59.7	78.7	73.9
Being-H0.7 [63]	3	-	-	49.2
DiT4DiT [6]	2	50.3	50.9	50.8
LDA-1B [66]	1.6	56.3	55.1	55.4
GIFT-VLA	4	60.0	61.9	61.4
GIFT-WAM-Fast	6	<u>83.3</u>	83.7	83.6
GIFT-WAM-IDM	6	84.3	<u>81.7</u>	<u>82.3</u>

only a_t^{ctrl} is executed. Executable targets are taken from successful expert demonstrations, the RoboCasa pose channels are recovered through replay, and padded tail steps are masked from the action loss.

Loss weights. Across policy variants and benchmarks, we set $\lambda_{\text{ang}} = 0.2$, $\lambda_{\text{scale}} = 0.05$, $\lambda_{\text{bce}} = \lambda_{\text{dice}} = 0.2$, $\lambda_v = \lambda_a = 1.0$, and $(\lambda_{\text{geo}}, \lambda_{\text{aff}}, \lambda_{\text{goal}}) = (1.0, 0.5, 1.0)$. For single-guidance ablations, we set the weight of each removed objective to zero and leave all remaining weights unchanged.

Simulation structured-target construction. For both LIBERO and RoboCasa, we replay expert actions in simulation and retain only successful trajectories. We extract final-layer patch features from a frozen VGGT teacher and resample them to the policy’s visual-token grid as geometry-alignment targets. Goal targets are obtained by matching instruction-associated object IDs to simulator instance segmentations, taking the union for multiple target objects. Affordance targets are generated from privileged simulator-provided end-effector and object poses according to Eq. (9). We use the language instruction to identify all task-relevant objects and take the first object interacted with along the expert trajectory as the anchor. In the simulation experiments, we allocate $K = 4$ slots for the active end effector(s) and instruction-relevant objects. Parallel-gripper states are encoded as binary closure values, whereas dexterous-hand states encode closure from the distance between the thumb and index fingertips. Invalid slots are zero-padded and excluded from both attention and supervision.

4.3 Comparison with State-of-the-Art Methods

Performance on LIBERO. Table 1 first examines whether the proposed intermediate supervision preserves the native control capability of each policy on the LIBERO benchmark. GIFT-VLA achieves 97.9% overall, improving its StarVLA-OFT counterpart by 1.3 points. GIFT-WAM-Fast and GIFT-WAM-IDM reach 97.7% and 98.5%, exceeding their corresponding Fast-WAM and Fast-WAM-IDM baselines by 0.1 and 0.5 points, respectively. These modest margins reflect the near-saturated performance of the matched baselines on standard LIBERO, which leaves limited headroom; GIFT’s advantages become more pronounced under distribution

shifts and fine-grained interaction. Among all entries, GIFT-WAM-IDM ties the second-best overall result and attains 100.0% on Object, matching the best score in that suite. These results show that imposing structured intermediate objectives does not compromise in-distribution control across the VLA, fast-mode WAM, or inverse-dynamics WAM formulations.

Zero-shot robustness on LIBERO-Plus. We evaluate zero-shot transfer by training all models only on the original LIBERO trajectories and directly testing them on LIBERO-Plus without adaptation. LIBERO-Plus provides a more diagnostic comparison by exposing every policy to the same seven controlled distribution shifts. As shown in Table 2, GIFT-WAM-IDM achieves the best overall success rate of 87.8%, surpassing ACoT-VLA by 1.2 points and GAM by 2.3 points. GIFT-VLA reaches 79.6%, exceeding several competitive VLA methods such as StarVLA- α and GuidedVLA. Relative to StarVLA-OFT, Fast-WAM, and Fast-WAM-IDM, GIFT-VLA, GIFT-WAM-Fast, and GIFT-WAM-IDM improve the overall success rate by 4.6, 12.6, and 5.2 points, respectively. GIFT-WAM-IDM also records the best results under lighting and sensor-noise perturbations, while GIFT-VLA obtains the highest score under background changes. Although the leading method varies across perturbation types, the paired gains across all three policy paradigms show that the same representation basis improves robustness without prescribing a particular action decoder.

Performance on RoboCasa. RoboCasa benchmark complements LIBERO with a different robot embodiment, visual domain, and interaction dynamics. As shown in Table 3, GIFT-WAM-Fast achieves the best average success rate of 83.6%, improving Fast-WAM by 9.0 points and exceeding DIAL by 13.4 points. GIFT-WAM-IDM reaches 82.3%, an 8.4-point gain over Fast-WAM-IDM. The two variants also set the best group-wise results: GIFT-WAM-IDM obtains 84.3% on articulated interaction, while GIFT-WAM-Fast reaches 83.7% on pick-and-place. GIFT-VLA achieves 61.4%, improving StarVLA-OFT by 12.6 points and outperforming TwinBrainVLA, RLDX-1, StarVLA- α , and ABot-M0, while DIAL remains the strongest VLA entry at 70.2%. On articulated tasks, GIFT-WAM-Fast outperforms Fast-WAM by 21.3 points, and GIFT-WAM-IDM outperforms Fast-WAM-IDM by 24.6 points, showing that structured geometry and affordance cues remain useful under richer contact dynamics and a different embodiment rather than only in the LIBERO domain.

4.4 Ablation Study and In-depth Analysis

In this section, we organize the ablation and qualitative analysis around five questions that connect the performance gains to the representations learned by GIFT and examine their limitations.

Q1: How does each guidance signal contribute to robustness? Table 4 isolates geometry, affordance, and goal guidance under the same LIBERO-Plus protocol. For every GIFT configuration, each individual signal improves the overall success rate over its named baseline: StarVLA-OFT for GIFT-VLA, Fast-WAM for GIFT-WAM-Fast, and Fast-WAM-IDM for GIFT-WAM-IDM. For GIFT-VLA, the gains from geometry, affordance, and goal are 2.1, 4.0, and 4.1

TABLE 4: Ablation on geometry, affordance, and goal guidance.

Geometry	Affordance	Goal	Perturbation Type						Total	
			Camera	Robot	Language	Light	Background	Noise		Layout
GIFT-VLA										
✓	✓	✓	47.0	60.1	87.0	96.3	95.3	73.1	79.2	75.0
			57.4	63.4	87.5	96.9	96.8	83.0	81.1	77.1
			56.2	63.9	87.9	97.0	97.7	80.8	80.5	79.0
✓	✓	✓	58.4	62.3	87.1	97.8	96.9	81.6	80.5	79.1
			57.7	63.7	88.6	98.5	96.9	82.5	80.3	79.6
GIFT-WAM-Fast										
✓	✓	✓	24.9	50.7	76.9	89.2	62.3	58.0	67.7	60.0
			38.6	70.8	74.4	93.2	65.2	77.6	77.8	70.4
			35.3	72.6	74.7	93.2	72.5	77.5	75.2	70.5
✓	✓	✓	45.2	73.9	73.3	92.4	71.0	76.6	75.6	71.7
			37.4	75.3	79.5	94.5	70.3	78.7	78.8	72.6
GIFT-WAM-IDM										
✓	✓	✓	65.4	86.0	89.5	96.3	74.4	87.6	80.7	82.6
			69.8	86.8	90.3	97.9	78.2	90.4	81.7	84.8
			68.4	91.0	91.0	96.9	79.2	89.9	83.0	85.4
✓	✓	✓	72.3	84.7	92.8	98.4	86.5	92.7	84.0	86.9
			78.7	80.5	90.2	99.0	89.2	97.2	83.3	87.8

TABLE 5: Ablation on the effectiveness of injecting auxiliary predictions into the action head.

Method	LIBERO-Plus		RoboCasa	
	w/ Inject	w/o Inject	w/ Inject	w/o Inject
GIFT-VLA	76.7	79.6	58.6	61.4
GIFT-WAM-Fast	72.3	72.6	83.4	83.6
GIFT-WAM-IDM	87.6	87.8	82.0	82.3

points; for GIFT-WAM-Fast, they are 10.4, 10.5, and 11.7 points; and for GIFT-WAM-IDM, they are 2.2, 2.8, and 4.3 points. The per-perturbation results further reveal distinct emphases. Geometry guidance consistently helps camera-viewpoint changes, with gains of 10.4, 13.7, and 4.4 points for GIFT-VLA, GIFT-WAM-Fast, and GIFT-WAM-IDM, respectively. Preserving surfaces, object extent, and spatial relations therefore reduces dependence on viewpoint-specific appearance and supports motion feasibility across camera shifts. Affordance guidance produces large and consistent gains under robot-initialization shifts, improving success by 3.8, 21.9, and 5.0 points for GIFT-VLA, GIFT-WAM-Fast, and GIFT-WAM-IDM, respectively. This pattern suggests that capturing instruction-relevant entity roles and object-centric interaction configurations helps the policy adapt to unfamiliar robot starting configurations. Goal guidance provides particularly strong improvements under camera, background, and sensor-noise perturbations: the respective gains are 11.4/1.6/8.5 points for GIFT-VLA, 20.3/8.7/18.6 points for GIFT-WAM-Fast, and 6.9/12.1/5.1 points for GIFT-WAM-IDM. These gains indicate that grounding instructions in task-relevant action regions helps preserve task relevance despite changes in viewpoint, background, and sensor observations. Combining all three signals yields the best overall success rate for every configuration: 79.6% for GIFT-VLA, 72.6% for GIFT-WAM-Fast, and 87.8% for GIFT-WAM-IDM, corresponding to gains of 4.6, 12.6, and 5.2 points over StarVLA-OFT, Fast-WAM, and Fast-WAM-IDM,

respectively. Together, their consistent advantage across all three ablation groups shows that these complementary signals form a more complete control-oriented representation across policy paradigms.

Q2: Must auxiliary predictions be injected into the action head? Table 5 compares explicit injection with using the auxiliary objectives only to supervise intermediate features. Removing injection improves GIFT-VLA from 76.7% to 79.6% on LIBERO-Plus and from 58.6% to 61.4% on RoboCasa. The same trend holds for both WAM variants, although the differences are smaller: 0.3/0.2 points for GIFT-WAM-Fast and 0.2/0.3 points for GIFT-WAM-IDM on LIBERO-Plus/RoboCasa. These results show that the observed gains do not require an additional inference pathway that feeds auxiliary predictions to the action head. Supervising the intermediate tokens is sufficient; the auxiliary predictions need not be consumed by the model-specific action generators.

Q3: What information is encoded by the supervised intermediate tokens? Figure 4 provides a representation-level diagnosis complementary to the quantitative ablation, examining whether the supervised intermediate features retain the physical and task structures required for action generation. For the geometry visualization, we first reconstruct each student feature $\hat{g}_{t,i}$ using Eq. (8) and substitute it for the final-layer VGGT feature supplied to the frozen depth head; the earlier multi-scale features required by that head remain image-derived VGGT features. This hybrid decoding is used only as a diagnostic of compatibility with the teacher’s geometric representation: depth is neither a training target nor an input to the action generator. Across the VLA and WAM examples, geometry preserves coherent scene layout and object extent despite substantial camera viewpoint and background change; affordance predictions remain anchored to the target objects and recover plausible end-effector configurations; and goal masks consistently isolate instruction-relevant objects and destination regions. Rather than merely enriching visual features, the three

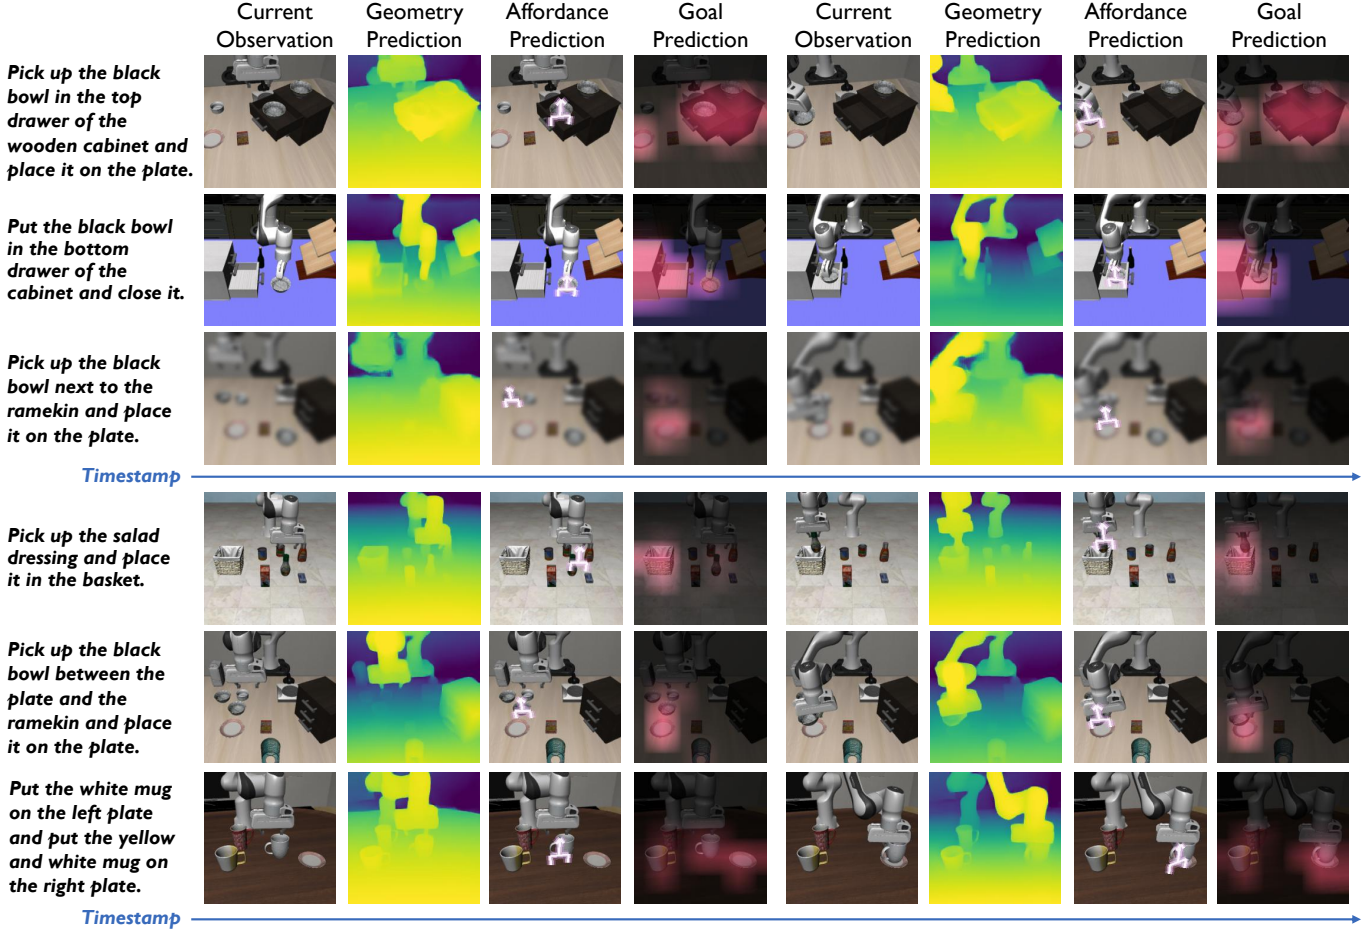


Fig. 4: Visualization of the structured intermediate guidance. Examples from GIFT-VLA (top) and GIFT-WAM-IDM (bottom) show observations together with geometry, affordance, and goal predictions.

signals organize intermediate features around motion feasibility, structured interactions, and task relevance. Together with the factor-specific gains in Table 4, these visualizations support the view that geometry, affordance, and goal form a complementary control-oriented representation basis shared by semantics-centered and predictive policies.

Q4: How does structured intermediate supervision guide the action-generation process? Figures 5 and 6 visualize the attention from action representations to visual features in matched baseline and GIFT rollouts. On LIBERO-Plus, GIFT maintains stronger and more consistent emphasis on the manipulated object, target receptacle, and contact-relevant regions under unseen perturbations as actions unfold, whereas the corresponding baselines attend more diffusely or shift toward task-irrelevant scene regions. On RoboCasa, the same pattern extends to a distinct humanoid embodiment and household environment: GIFT connects action generation to task-relevant regions throughout the rollout. Together with the paired gains in Tables 2 and 3, these examples indicate that structured intermediate supervision helps the action-generation process draw consistently on manipulation-relevant visual evidence across both environmental perturbations and changes in embodiment.

Q5: When can structured intermediate guidance fail? Figure 7 shows that guidance becomes unreliable when an intermediate prediction no longer preserves the corre-

sponding task-relevant structure. Under severe sensor noise, geometry may fail to recover a plausible scene structure, leading to incorrect depth judgments during action generation. It may also miss subtle depth variations on the surfaces of small manipulated objects, weakening the spatial cues needed for precise grasping. Affordance failures arise when a task-relevant object is misidentified and the predicted grasping pose is instead associated with a distractor; this ambiguity becomes more pronounced under large view-point changes. In the upper example, for the instruction “Put the yellow and white mug in the microwave and close it”, the intermediate features encode the white mug rather than the intended yellow-and-white mug. In the lower example, the grasping pose of the cream cheese is recovered, but the object is assigned to the other-object category, as indicated by the different colors in the figure. Both errors can redirect action generation toward the wrong object or interaction role. Goal guidance can likewise fail under challenging background shifts or when a scene contains many unseen objects. In these out-of-distribution cases, the predicted mask may extend beyond task-relevant regions to cover background areas or unseen objects, thereby interfering with correct task execution. These cases show that structured supervision does not eliminate perceptual ambiguity: its effectiveness depends on whether the intermediate tokens

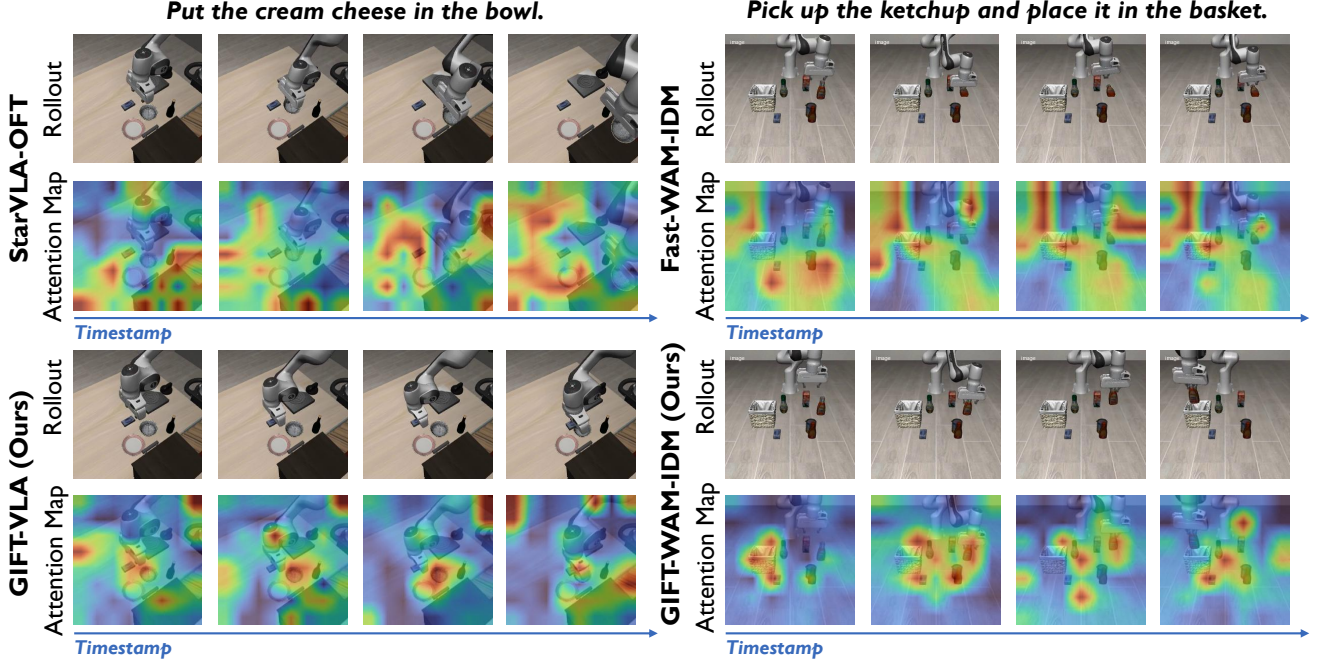


Fig. 5: **Visualization of action-to-vision attention maps on LIBERO-Plus.** Across the VLA and WAM-IDM examples, GIFT focuses more consistently on manipulated objects and interaction-relevant regions compared with matched baselines.

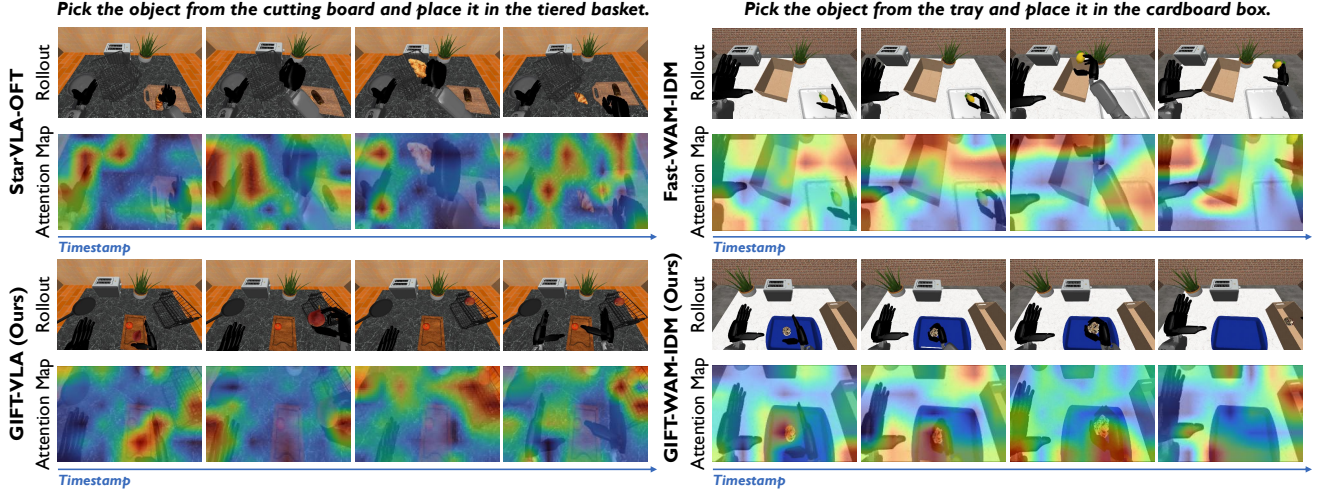


Fig. 6: **Visualization of action-to-vision attention maps on RoboCasa.** Under RoboCasa’s distinct humanoid embodiment and household scenes, GIFT still more consistently concentrates attention on task-relevant regions than matched baselines.

preserve accurate scene structure, interaction roles, and task relevance under the encountered distribution shift.

4.5 Design Choices

Denosing steps. Table 6 examines the effect of the number of inference-time denosing steps on both GIFT-WAM-IDM and GIFT-WAM-Fast on LIBERO-Plus. For GIFT-WAM-Fast, each setting specifies the number of action-denosing steps; for GIFT-WAM-IDM, it specifies the number of steps used separately for future-video and action denosing. Across 2, 5, 10, and 15 steps, GIFT-WAM-IDM varies only from 87.6% to 87.8%, while GIFT-WAM-Fast varies from 72.3% to 72.6%. Two steps attain the best result for GIFT-WAM-IDM and tie the best result for GIFT-WAM-Fast, indicating that

both variants can recover effective predictions with a short denosing trajectory. We therefore use two denosing steps to reduce inference cost without sacrificing task performance.

Action head. Table 7 isolates the effect of the GIFT-VLA action-head design on LIBERO-Plus. The first row retains the original StarVLA-OFT formulation, which maps the action-query features to actions through an MLP and achieves 75.0%. Replacing the MLP with cross-attention slightly improves the success rate to 75.4%. Allowing the action latents to additionally attend to visual features, which corresponds to the no-injection architecture in Fig. 3(b) without structured intermediate guidance, further raises the result to 75.7%. This 0.7-point total gain is modest compared with the 79.6% achieved by full GIFT-VLA in Table 4:

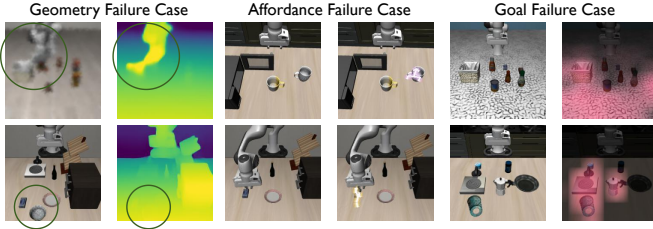


Fig. 7: **Failure cases of structured intermediate guidance.** Geometry can degrade under sensor noise or subtle depth variations; affordance may confuse task-relevant and distractor objects; and goal prediction may include task-irrelevant regions under out-of-distribution visual changes. Colors in the affordance predictions distinguish anchor and other objects.

TABLE 6: Effect of inference-time denoising steps on GIFT-WAM.

Denoising Steps	2	5	10	15
GIFT-WAM-IDM	87.8	87.6	87.7	87.6
GIFT-WAM-Fast	72.6	72.5	72.6	72.3

TABLE 7: Action-head design choices for GIFT-VLA on LIBERO-Plus, comparing an MLP with BridgeAttention and evaluating whether the action head uses action-query features alone or jointly attends to visual features.

Feature		Bridge	SR (%)
ActionQuery	Vision		
✓		MLP	75.0
✓		Attention	75.4
✓	✓	Attention	75.7

structured intermediate guidance contributes an additional 3.9 points over the no-guidance action-head variant. These results indicate that the main performance improvement comes from structured intermediate supervision rather than the action-head change. We adopt the cross-attention design solely to provide a controlled interface for testing optional auxiliary-feature injection; it is not required by GIFT supervision.

5 REAL-WORLD EXPERIMENTS

5.1 Experimental Setup

5.1.1 Hardware Setup

To evaluate our method in real-world scenarios, we construct the two robotic manipulation systems shown in Fig. 8. Figure 8(a) shows a UFACTORY xArm7 arm observed by two Intel RealSense D435 cameras: one provides a third-person view and the other is mounted on the wrist, mirroring the camera configuration used in LIBERO. Figure 8(b) shows an ARX X5 dual-arm platform equipped with three Intel RealSense D405 cameras, including one head-mounted camera and one wrist-mounted camera for each arm. Both systems use parallel grippers as their end effectors.

5.1.2 Data Collection

As illustrated in Figs. 9 and 10, our real-world benchmark comprises four tasks spanning the two robotic platforms. On the xArm7 platform, **Task 1 (color-conditioned placement)** requires placing a specified object into the basket of the instructed color, evaluating semantic understanding, while **Task 2 (layer-conditioned placement)** requires placing a specified object on the instructed tier of a display rack, evaluating spatial reasoning. On the ARX X5 platform, **Task 3 (articulated-object manipulation)** requires placing a Rubik’s cube inside a cabinet and closing its door, while **Task 4 (bimanual test-tube insertion)** requires inserting test tubes into a rack in both upright and inverted orientations. The latter two tasks evaluate articulated-object interaction and precise bimanual manipulation, respectively. We collect 100 human demonstrations per task through teleoperation, yielding 400 trajectories in total.

During collection, the demonstrator wears green gloves. To reduce the train–test discrepancy caused by human hands appearing in the recorded observations, we randomly apply video inpainting to remove the gloves from half of the collected data and train on a mixture of the inpainted and original gloved demonstrations.

5.1.3 Data Annotation

We construct real-world object masks and poses through a human-verified annotation pipeline. Given a text prompt for each task-relevant object, Grounding DINO [67] first localizes the object, and SAM2 [68] produces its initial mask. An annotator verifies and, when necessary, corrects this mask before SAM2 propagates it throughout the complete episode. We then manually inspect the propagated masks and correct any tracking errors. Finally, following HumanEgo’s use of object-pose annotations [48], we construct a per-frame 6-DoF pose label for each object. Specifically, we combine each verified mask with the synchronized RGB-D observation: masked depth determines the object position, while Orient Anything V2 [69] estimates its orientation. We annotate every task-relevant object mentioned in the language instruction and select the first object interacted with in each demonstration as the anchor. Together with the poses and closure states of both end effectors on the ARX platform, these annotations provide temporally consistent targets for goal and affordance supervision. For bimanual tasks, the instruction specifies the operation assigned to each arm. Each object is therefore paired with its designated left or right arm, and its interaction field records the corresponding end-effector pose in the object frame. We set $K = 4$ for the single-arm xArm7 Tasks 1–2 and $K = 5$ for the dual-arm ARX X5 Tasks 3–4. All allocated slots are supervised without padding or slot masking. In the bimanual test-tube task, the five slots correspond to the two end effectors and three instruction-relevant objects.

5.1.4 Implementation Details

We evaluate GIFT-VLA and GIFT-WAM-IDM against their matched baselines, StarVLA-OFT and Fast-WAM-IDM, respectively. The GIFT model and baseline use the same training configuration within each policy family. Models for the single-arm and dual-arm platforms are trained separately. All models are trained on the collected real-world

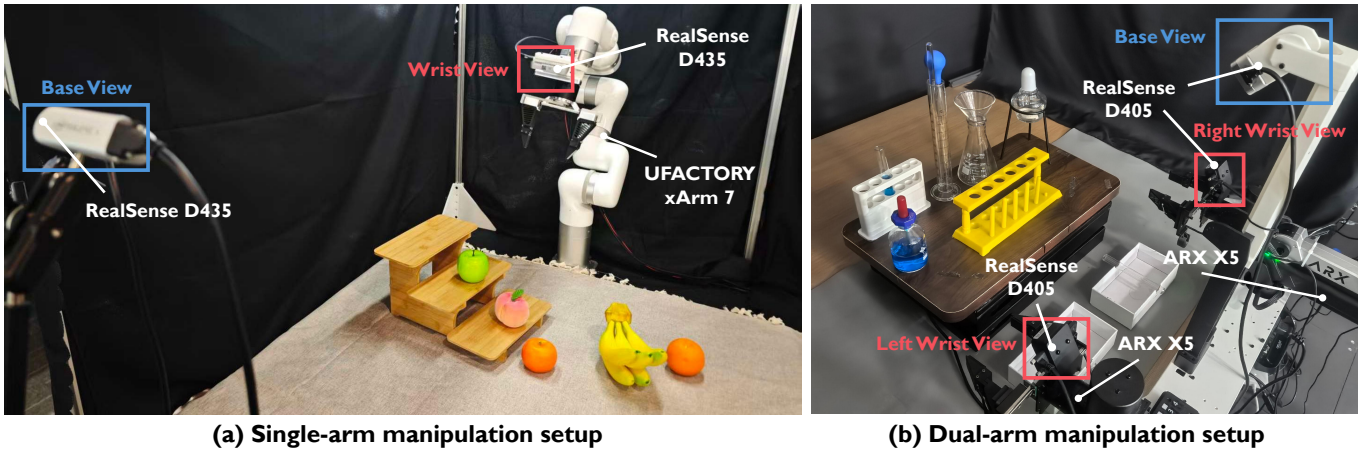


Fig. 8: **Real-world robotic platforms.** (a) Single-arm UFACTORY xArm7 setup observed by third-person and wrist-mounted Intel RealSense D435 cameras. (b) Dual-arm ARX X5 setup observed by one head-mounted and two wrist-mounted Intel RealSense D405 cameras. Both systems use parallel grippers.

TABLE 8: Real-world task performance under the original settings.

Method	Task 1	Task 2	Task 3	Task 4	Avg. (%)
StarVLA-OFT [49]	6/10	2/10	5/10	1/10	35.0
GIFT-VLA	7/10	5/10	7/10	4/10	57.5
Fast-WAM-IDM [5]	7/10	4/10	8/10	2/10	52.5
GIFT-WAM-IDM	9/10	8/10	10/10	8/10	87.5

TABLE 9: Real-world robustness under progressively stronger perturbations. For Task 2, Level 1 changes the illumination and Level 2 additionally replaces the tabletop background; for Task 4, Level 1 replaces the background objects and Level 2 additionally rotates the task-relevant objects by approximately 15° – 20° .

Method	Task 2		Task 4	
	Level 1	Level 2	Level 1	Level 2
StarVLA-OFT [49]	1/10	1/10	0/10	0/10
GIFT-VLA	3/10	3/10	4/10	1/10
Fast-WAM-IDM [5]	3/10	2/10	1/10	0/10
GIFT-WAM-IDM	7/10	7/10	8/10	5/10

demonstrations for 50,000 iterations using 64 Zhenwu 810E PPUs, each with 96 GB of device memory. The per-device batch size is 4 for WAM-based models and 2 for VLA-based models. In all real-world experiments, actions are represented as relative joint commands for both training and execution. Both VLA- and WAM-based policies predict 32-step action chunks and replan every 32 control steps.

5.2 Task Setting

We evaluate all four tasks under their original settings using 10 trials per task and method. To further assess robustness to distribution shifts, we perturb one representative task on each platform: Task 2 (layer-conditioned placement) on the single-arm xArm7 and Task 4 (bimanual test-tube insertion) on the dual-arm ARX X5. Following the perturbation categories in LIBERO-Plus [16], we introduce changes in lighting, background appearance, background objects, and

task-relevant object poses, which also represent common sources of variation in real-world deployment. Rather than applying synthetic photometric transformations with preset brightness or contrast ranges, Task 2 Level 1 introduces a rotating colored lamp positioned above the robot arm so that its illumination covers the entire tabletop. The lamp produces time-varying colored illumination, and Level 2 additionally replaces the original tabletop background with a tablecloth of a different color. For Task 4, Level 1 replaces all background objects with novel objects, while Level 2 further rotates both the target test tubes and the test-tube rack by approximately 15° – 20° relative to their training configurations. None of these lighting, background-object, tablecloth, or task-relevant pose conditions appears in the training data. Each perturbation level is evaluated over 10 trials per method. As visualized in Figs. 9 and 10, these evaluations test whether the structured intermediate features learned by GIFT remain reliable under substantial visual and spatial variations.

5.3 Results

Quantitative results. Table 8 compares the four methods under the original task settings. GIFT improves both policy families consistently across all four tasks: GIFT-VLA raises the overall success rate from 35.0% for StarVLA-OFT to 57.5%, while GIFT-WAM-IDM improves Fast-WAM-IDM from 52.5% to 87.5%. The gains span color-conditioned placement, layer-conditioned placement, articulated-object manipulation, and bimanual test-tube insertion. In particular, GIFT-WAM-IDM achieves 8/10 on Task 4 compared with 2/10 for Fast-WAM-IDM, consistent with the benefit of explicitly supervising interaction roles and object-centric end-effector configurations for precise bimanual interaction.

Table 9 further evaluates robustness under unseen appearance and spatial perturbations. Aggregated over the four perturbation conditions, GIFT-VLA and GIFT-WAM-IDM achieve success rates of 27.5% and 67.5%, substantially exceeding StarVLA-OFT at 5.0% and Fast-WAM-IDM at 15.0%, respectively. On Task 2, GIFT-WAM-IDM maintains 7/10 success under both perturbation levels. On the more

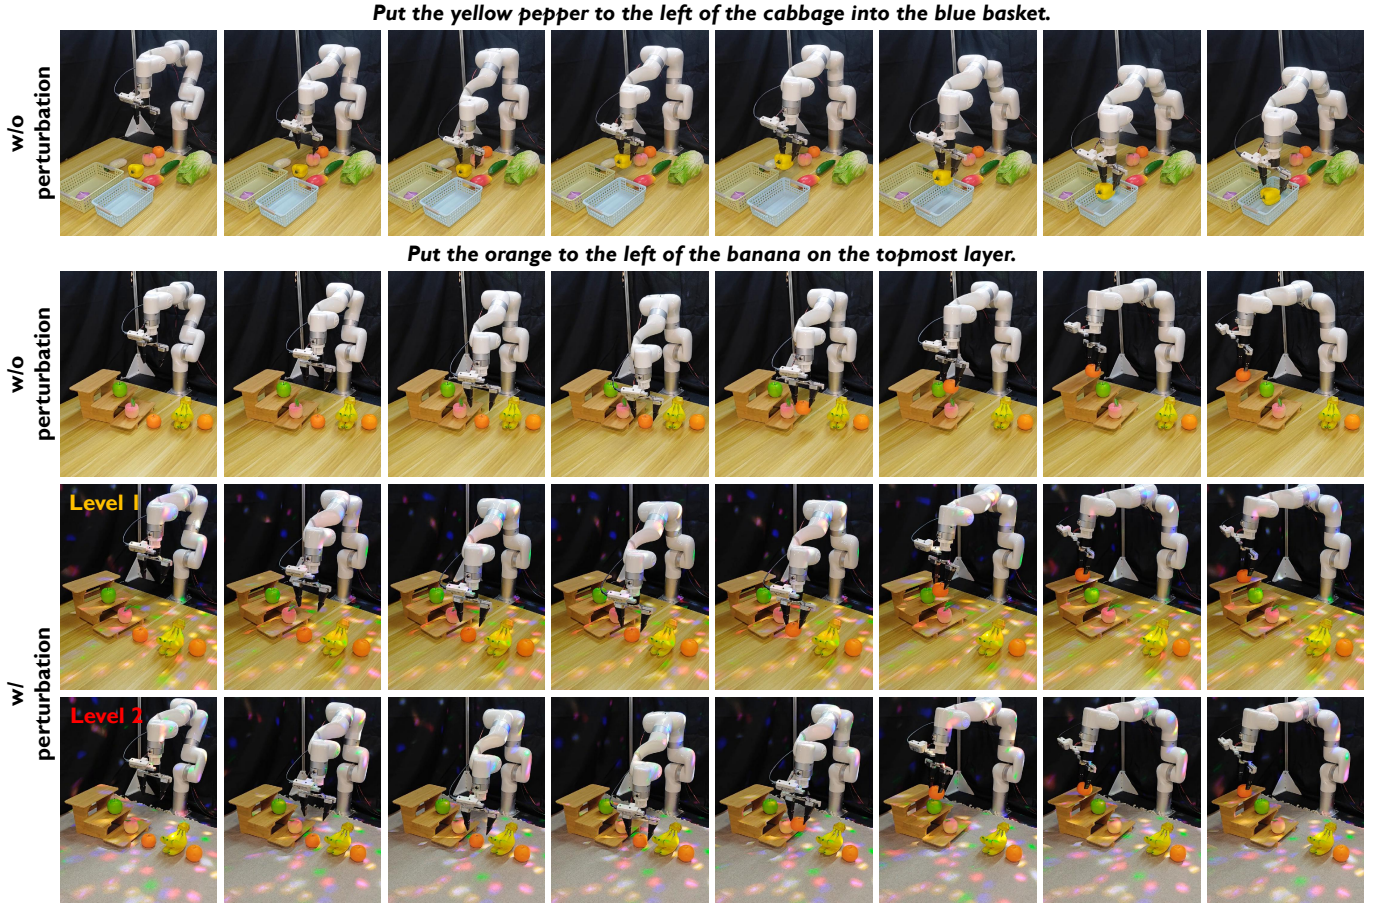


Fig. 9: Visualization of real-world manipulation rollouts on the single-arm platform. For robustness evaluation, Level 1 introduces a rotating colored lamp, while Level 2 additionally replaces the tabletop background with a tablecloth of a different color.



Fig. 10: Visualization of real-world manipulation rollouts on the dual-arm platform. Level 1 replaces all background objects with novel objects, while Level 2 additionally rotates the target test tubes and rack by approximately 15° – 20° relative to their training configurations.

challenging Task 4, it achieves 8/10 under Level 1 and 5/10 under Level 2. These results show that joint supervision of geometry, affordance, and goals reduces reliance on background and layout shortcuts, yielding control-oriented intermediate features across both VLA and WAM policies without requiring auxiliary predictions as action inputs. The larger margins over the matched baselines in the real-world experiments than in simulation are concentrated on Tasks 2 and 4, both of which impose tight control tolerances. Task 2 requires accurately localizing the instructed rack tier and placing the object within a narrow valid region, whereas Task 4 demands high-precision bimanual insertion in both upright and inverted orientations. These requirements become more stringent under perturbations, where success depends on robust estimates of spatial relations and interaction poses. Explicit geometry and affordance supervision therefore provide a larger advantage in these precision-sensitive settings, helping explain the enlarged real-world margins. Overall, these results highlight the particular value of structured guidance for precision-sensitive manipulation under substantial perturbations.

Qualitative results. Under unperturbed conditions, GIFT reliably executes the tasks on both real-world platforms, as shown in Figs. 9 and 10. On the single-arm xArm7, it completes **Task 1** by placing the pepper into the blue basket and **Task 2** by placing the orange on the topmost tier. On the dual-arm ARX X5, it completes **Task 3** by placing the Rubik’s cube inside the cabinet and closing its door. In **Task 4**, it performs fine-grained bimanual coordination to grasp and accurately insert separate test tubes into the rack in upright and inverted orientations. More importantly, GIFT retains higher robustness than its matched baselines as previously unseen perturbations become progressively stronger, with the advantage being most pronounced for GIFT-WAM-IDM. For the layer-placement task, we first change the lighting conditions and then compound this appearance shift by also changing the background. For the test-tube insertion task, we first rearrange background objects and then further change the poses of task-relevant objects. The successful GIFT rollouts shown here preserve the required target selection, spatial relations, and precise control under these compound appearance and spatial shifts. Together with the quantitative results in Table 9, these examples show that GIFT, particularly GIFT-WAM-IDM, generalizes more reliably than its matched baselines beyond the unperturbed collection conditions.

6 CONCLUSION

We presented GIFT, an architecture-flexible framework that turns complementary physical and task structures into explicit supervision for the intermediate features of robot policies. The GIFT objectives do not require modifying the model-specific action-generation interface or supplying auxiliary predictions as action inputs; instead, geometry, affordance, and goal objectives teach features what information to preserve: scene structure for feasible motion, object-centric interaction configurations for manipulation, and instruction-relevant regions for task completion. We instantiated the same principle in a semantics-centered VLA, a fast-mode WAM, and an inverse-dynamics WAM, covering

distinct backbones and action formulations. On LIBERO and RoboCasa, GIFT maintained competitive in-distribution control, with especially large gains on articulated-object interaction. Under zero-shot transfer to LIBERO-Plus, it consistently improved robustness across distribution shifts, including changes in robot initialization. Guidance ablations confirmed that all three signals are complementary, while injection ablations showed that explicitly feeding auxiliary predictions to the action head is unnecessary: shaping the shared intermediate features alone is sufficient and can perform better. Real-robot experiments on single- and dual-arm platforms further demonstrated robustness to lighting, background, layout, and object-pose changes. These findings position structured intermediate supervision as a reusable interface between general-purpose visual knowledge and robot control. Future work will explore additional forms of guidance for intermediate features, scale up training, and further improve the reliability of guidance signals under severe perceptual distribution shifts.

REFERENCES

- [1] B. Zitkovich, T. Yu, S. Xu, P. Xu, T. Xiao, F. Xia, J. Wu, P. Wohlhart, S. Welker, A. Wahid *et al.*, “Rt-2: Vision-language-action models transfer web knowledge to robotic control,” in *Conference on Robot Learning*, 2023, pp. 2165–2183.
- [2] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. P. Foster, P. R. Sanketi, Q. Vuong *et al.*, “Openvla: An open-source vision-language-action model,” in *Conference on Robot Learning*, 2024, pp. 2679–2713.
- [3] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter *et al.*, “ π_0 : A vision-language-action flow model for general robot control,” in *Robotics: Science and Systems*, 2025.
- [4] M. J. Kim, Y. Gao, T.-Y. Lin, Y.-C. Lin, Y. Ge, G. Lam, P. Liang, S. Song, M.-Y. Liu, C. Finn, and J. Gu, “Cosmos policy: Fine-tuning video models for visuomotor control and planning,” in *International Conference on Learning Representations*, 2026.
- [5] T. Yuan, Z. Dong, Y. Liu, and H. Zhao, “Fast-wam: Do world action models need test-time future imagination?” *arXiv preprint arXiv:2603.16666*, 2026.
- [6] T. Ma, J. Zheng, Z. Wang, C. Jiang, A. Cui, J. Liang, and S. Yang, “Dit4dit: Jointly modeling video dynamics and actions for generalizable robot control,” *arXiv preprint arXiv:2603.10448*, 2026.
- [7] X. Jia, B. Yang, Z. Ge, X. Nie, Y. Zhou, C. Fan, Y. Li, Y. Chai, C. Jing, Z. Liang *et al.*, “Guidedvla: Specifying task-relevant factors via plug-and-play action attention specialization,” in *Robotics: Science and Systems*, 2026.
- [8] Y. Su, S. Chen, H. Shi, M. Liu, Z. Zhang, N. Huang, W. Zhong, Z. Zhu, Y. Liu, and X. Liu, “World guidance: World modeling in condition space for action generation,” in *International Conference on Machine Learning*, 2026.
- [9] G. Yan, J. Liu, Y. Fan, L. Cai, M. Liao, J. Zhang, and D. Fox, “Flex- π : A multi-stream world-action model with compute flexibility,” *arXiv preprint arXiv:2608.10860*, 2026.
- [10] D. Qu, H. Song, Q. Chen, Y. Yao, X. Ye, Y. Ding, Z. Wang, J. Gu, B. Zhao, D. Wang *et al.*, “Spatialvla: Exploring spatial representations for visual-language-action model,” in *Robotics: Science and Systems*, 2025.
- [11] L. Sun, B. Xie, Y. Liu, H. Shi, T. Wang, and J. Cao, “Geovla: Empowering 3d representations in vision-language-action models,” *arXiv preprint arXiv:2508.09071*, 2025.
- [12] F. Li, W. Song, H. Zhao, J. Wang, P. Ding, D. Wang, L. Zeng, and H. Li, “Spatial forcing: Implicit spatial representation alignment for vision-language-action model,” *arXiv preprint arXiv:2510.12276*, 2025.
- [13] J. Li, Y. Zhu, Z. Tang, J. Wen, M. Zhu, X. Liu, C. Li, R. Cheng, Y. Peng, Y. Peng *et al.*, “Coa-vla: Improving vision-language-action models via visual-textual chain-of-affordance,” in *IEEE/CVF International Conference on Computer Vision*. IEEE, 2025, pp. 9759–9769.

- [14] W. Song, Z. Zhou, H. Zhao, J. Chen, P. Ding, H. Yan, Y. Huang, F. Tang, D. Wang, and H. Li, "Reconvla: Reconstructive vision-language-action model as effective robot perceiver," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2026.
- [15] W. Zhang, H. Liu, Z. Qi, Y. Wang, X. Yu, J. Zhang, R. Dong, J. He, H. Wang, Z. Zhang *et al.*, "Dreamvla: A vision-language-action model dreamed with comprehensive world knowledge," in *Advances in Neural Information Processing Systems*, 2025.
- [16] S. Fei, S. Wang, J. Shi, Z. Dai, J. Cai, P. Qian, L. Ji, X. He, S. Zhang, Z. Fei *et al.*, "Libero-plus: In-depth robustness analysis of vision-language-action models," *arXiv preprint arXiv:2510.13626*, 2025.
- [17] S. Nasiriany, A. Maddukuri, L. Zhang, A. Parikh, A. Lo, A. Joshi, A. Mandlekar, and Y. Zhu, "Robocasa: Large-scale simulation of everyday tasks for generalist robots," in *Robotics: Science and Systems*, 2024.
- [18] T. Zhao, V. Kumar, S. Levine, and C. Finn, "Learning fine-grained bimanual manipulation with low-cost hardware," in *Robotics: Science and Systems*, 2023.
- [19] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, "Diffusion policy: Visuomotor policy learning via action diffusion," *The International Journal of Robotics Research*, vol. 44, no. 10-11, pp. 1684–1704, 2025.
- [20] K. Black, N. Brown, J. Darpinian, K. Dhabalia, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai *et al.*, " $\pi_{0.5}$: a vision-language-action model with open-world generalization," in *Conference on Robot Learning*, 2025.
- [21] M. J. Kim, C. Finn, and P. Liang, "Fine-tuning vision-language-action models: Optimizing speed and success," in *Robotics: Science and Systems*, 2025.
- [22] A. O'Neill, A. Rehman, A. Maddukuri, A. Gupta, A. Padalkar, A. Lee, A. Pooley, A. Gupta, A. Mandlekar, A. Jain *et al.*, "Open x-embodiment: Robotic learning datasets and rt-x models: Open x-embodiment collaboration 0," in *IEEE International Conference on Robotics and Automation*, 2024, pp. 6892–6903.
- [23] X. Li, M. Liu, H. Zhang, C. Yu, J. Xu, H. Wu, C. Cheang, Y. Jing, W. Zhang, H. Liu *et al.*, "Vision-language foundation models as effective robot imitators," in *International Conference on Learning Representations*, 2024.
- [24] K. Pertsch, K. Stachowicz, B. Ichter, D. Driess, S. Nair, Q. Vuong, O. Mees, C. Finn, and S. Levine, "Fast: Efficient action tokenization for vision-language-action models," in *Robotics: Science and Systems*, 2025.
- [25] M. Shukor, D. Aubakirova, F. Capuano, P. Kooijmans, S. Palma, A. Zouitine, M. Aractingi, C. Pascal, M. Russi, A. Marafioti *et al.*, "Smolvla: A vision-language-action model for affordable and efficient robotics," *arXiv preprint arXiv:2506.01844*, 2025.
- [26] P. Li, Y. Chen, H. Wu, X. Ma, X. Wu, Y. Huang, L. Wang, T. Kong, and T. Tan, "Bridgevla: Input-output alignment for efficient 3d manipulation learning with vision-language models," in *Advances in Neural Information Processing Systems*, 2025.
- [27] J. Xiao, D. Li, Y. Yang, S. Zeng, T. Lin, X. Chang, F. Xiong, M. Xu, X. Wei, Z. Ma, Q. Zhang, and W.-S. Zheng, "Learning action manifold with multi-view latent priors for robotic manipulation," *arXiv preprint arXiv:2605.11832*, 2026.
- [28] W. Yuan, J. Duan, V. Blukis, W. Pumacay, R. Krishna, A. Murali, A. Mousavian, and D. Fox, "Robopoint: A vision-language model for spatial affordance prediction in robotics," in *Conference on Robot Learning*. PMLR, 2025, pp. 4005–4020.
- [29] Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn *et al.*, "Cot-vla: Visual chain-of-thought reasoning for vision-language-action models," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 1702–1713.
- [30] S. Wang, J. Shi, Z. Fu, X. He, F. Liu, C. Yang, Y. Zhou, Z. Fei, J. Gong, J. Fu *et al.*, "World action models: The next frontier in embodied ai," *arXiv preprint arXiv:2605.12090*, 2026.
- [31] C. Zhu, R. Yu, S. Feng, B. Burchfiel, P. Shah, and A. Gupta, "Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets," in *Robotics: Science and Systems*, 2025.
- [32] J. Liang, P. Tokmakov, R. Liu, S. Sudhakar, P. Shah, R. Ambrus, and C. Vondrick, "Video generators are robot policies," *arXiv preprint arXiv:2508.00795*, 2025.
- [33] J. Cen, C. Yu, H. Yuan, Y. Jiang, S. Huang, J. Guo, X. Li, Y. Song, H. Luo, F. Wang *et al.*, "Worldvla: Towards autoregressive action world model," *arXiv preprint arXiv:2506.21539*, 2025.
- [34] Y. Liao, P. Zhou, S. Huang, D. Yang, S. Chen, Y. Jiang, Y. Hu, J. Cai, S. Liu, J. Luo *et al.*, "Genie envisioner: A unified world foundation platform for robotic manipulation," *arXiv preprint arXiv:2508.05635*, 2025.
- [35] S. Ye, J. Jang, B. Jeon, S. J. Joo, J. Yang, B. Peng, A. Mandlekar, R. Tan, Y.-W. Chao, B. Y. Lin *et al.*, "Latent action pretraining from videos," in *International Conference on Learning Representations*, 2025.
- [36] S. Routray, H. Pan, U. Jain, S. Bahl, and D. Pathak, "Vipra: Video prediction for robot actions," in *International Conference on Learning Representations*, 2026.
- [37] A. Liang, P. Czempin, M. Hong, Y. Zhou, E. Biyik, and S. Tu, "Clam: Continuous latent action models for robot learning from unlabeled demonstrations," *arXiv preprint arXiv:2505.04999*, 2025.
- [38] J. Han, S. Jeon, J. Jung, R. Zurbrügge, H. An, T. Portela, M. Hutter, M. Pollefeys, S. Kim, and S. Hong, "Geometric action model for robot policy learning," *arXiv preprint arXiv:2606.17046*, 2026.
- [39] F. Ma, D. Peng, W. Yue, J. Cao, B. Wang, Q. Zhang, and J. Ma, "Geosem-wam: Geometry-and semantic-aware world action models," *arXiv preprint arXiv:2606.03188*, 2026.
- [40] H. Yu, H. Lin, J. Zhang, W. Zhang, C. Gu, H. Li, and P. Tan, "Maskwam: Unifying mask prompting and prediction for world-action models," *arXiv preprint arXiv:2606.13515*, 2026.
- [41] J. He, J. Li, Z. Zhong, H. Yan, R. Li, Y. Zheng, J. Zhu, T. Zhang, Y. Du, W. Chen *et al.*, "Sg-wam: Text-grounded and spatial-aware semantic guidance for world-action models," *arXiv preprint arXiv:2608.08839*, 2026.
- [42] Y. Liu, P. Sun, S. Li, Y. Xie, L. Zhang, X. Chao, S. Dong, F. Chen, X.-P. Zhang, and W. Ding, "Oa-wam: Object-addressable world action model for robust robot manipulation," *arXiv preprint arXiv:2605.06481*, 2026.
- [43] Y. Chen, Y. Ge, H. Zhou, M. Ding, Y. Ge, and X. Liu, "Dial: Decoupling intent and action via latent world modeling for end-to-end vla," *arXiv preprint arXiv:2603.29844*, 2026.
- [44] Q. Yu, J. You, Y. Wang, J. Liang, B. Ping, Y. Tian, Y. Chen, M. Cai, Z. Gong, R. Wu, Y. Li, J. Liang, and Y. Chen, "Affordancevla: A vision-language-action model empowering action generation through affordance-aware understanding," *arXiv preprint arXiv:2606.06155*, 2026.
- [45] W. Kong, Z. Su, W. Yu, and H. Dong, "Affordvla: Injecting affordance representations into vision-language-action models via implicit feature alignment," *arXiv preprint arXiv:2605.17517*, 2026.
- [46] Y. Zheng, X. Li, S. Gu, Y. Zheng, S. Tian, W. Li, L. Wang, S. Fei, P. Li, Y. Gao, Z. Xing, Y. Chen, Q. Zhang, H. Li, and W. Ding, "Pokevla: Empowering pocket-sized vision-language-action model with comprehensive world knowledge guidance," *arXiv preprint arXiv:2604.20834*, 2026.
- [47] J. Wang, M. Chen, N. Karaev, A. Vedaldi, C. Rupprecht, and D. Novotny, "Vggt: Visual geometry grounded transformer," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 5294–5306.
- [48] Z. Wang, B. He, K. Yu, S. Lee, R. Gao, F. Huang, and Y. Aloimonos, "Humanego: Zero-shot robot learning from minutes of human egocentric videos," *arXiv preprint arXiv:2605.24934*, 2026.
- [49] StarVLA Community, "Starvla: A lego-like codebase for vision-language-action model developing," *arXiv preprint arXiv:2604.05014*, 2026.
- [50] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone, "Libero: Benchmarking knowledge transfer for lifelong robot learning," in *Advances in Neural Information Processing Systems*, 2023.
- [51] Q. Bu, Y. Yang, J. Cai, S. Gao, G. Ren, M. Yao, P. Luo, and H. Li, "Univla: Learning to act anywhere with task-centric latent actions," in *Robotics: Science and Systems*, 2025.
- [52] J. Zhang, Y. Chen, Y. Xu, Z. Huang, Y. Zhou, Y.-J. Yuan, X. Cai, G. Huang, X. Quan, H. Xu *et al.*, "4d-vla: Spatiotemporal vision-language-action pretraining with cross-scene calibration," in *Advances in Neural Information Processing Systems*, 2025.
- [53] J. Ye, N. Gao, S. Yang, J. Zheng, Z. Wang, Y. Chen, P. Chen, Y. Chen, S. Liu, and J. Jia, "Starvla- α : Reducing complexity in vision-language-action systems," in *European Conference on Computer Vision*, 2026.
- [54] L. Zhong, Y. Liu, Y. Wei, Z. Xiong, S. Liu, and G. Ren, "ACoT-VLA: Action chain-of-thought for vision-language-action models," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026, pp. 8152–8162.
- [55] J. Bjorck, F. Castañeda, N. Cherniadev, X. Da, R. Ding, L. Fan, Y. Fang, D. Fox, F. Hu, S. Huang *et al.*, "Gr00t n1: An open

- foundation model for generalist humanoid robots," *arXiv preprint arXiv:2503.14734*, 2025.
- [56] Y. Wang, P. Ding, L. Li, C. Cui, Z. Ge, X. Tong, W. Song, H. Zhao, W. Zhao, P. Hou *et al.*, "VLA-Adapter: An effective paradigm for tiny-scale vision-language-action model," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 40, no. 22, 2026, pp. 18 638–18 646.
 - [57] S. Tan, K. Dou, Y. Zhao, and P. Krähenbühl, "Interactive post-training for vision-language-action models," *arXiv preprint arXiv:2505.17016*, 2025.
 - [58] Y. Yang, S. Zeng, T. Lin, X. Chang, D. Qi, J. Xiao, H. Liu, R. Chen, Y. Chen, D. Huo *et al.*, "Abot-m0: Vla foundation model for robotic manipulation with action manifold learning," *arXiv preprint arXiv:2602.11236*, 2026.
 - [59] C.-Y. Hung, Q. Sun, P. Hong, A. Zadeh, C. Li, U. Tan, N. Majumder, S. Poria *et al.*, "Nora: A small open-sourced generalist vision language action model for embodied tasks," *arXiv preprint arXiv:2504.19854*, 2025.
 - [60] J. Sun, W. Zhang, Z. Qi, S. Ren, Z. Liu, H. Zhu, G. Sun, X. Jin, and Z. Chen, "VLA-JEPA: Enhancing vision-language-action model with latent world model," in *European Conference on Computer Vision*, 2026.
 - [61] R. Chen, Y. Yang, Z. Tang, D. Huo, T. Lin, H. Wu, H. Liu, Y. Chen, L. Zheng, B. Yuan *et al.*, "Abot-m0. 5: Unified mobility-and-manipulation world action model," *arXiv preprint arXiv:2607.00678*, 2026.
 - [62] Y. Zhang, W. Zhang, Z. Qi, H. Zhang, H. Lin, J. Zhang, Y. Mu, X. Yang, W. Zeng, and X. Jin, "Imagewam: Do world action models really need video generation, or just image editing?" *arXiv preprint arXiv:2606.19531*, 2026.
 - [63] H. Luo, W. Zhang, Y. Feng, S. Zheng, H. Xu, C. Xu, Z. Xi, Y. Fu, and Z. Lu, "Being-h0.7: A latent world-action model from egocentric videos," *arXiv preprint arXiv:2605.00078*, 2026.
 - [64] B. Yu, S. Lian, X. Lin, Y. Wei, Z. Shen, C. Wu, Y. Miao, X. Wang, B. Wang, C. Huang *et al.*, "Twinbrainvla: Unleashing the potential of generalist vlms for embodied tasks via asymmetric mixture-of-transformers," *arXiv preprint arXiv:2601.14133*, 2026.
 - [65] D. Kim, H. Jang, M. Koo, S. Jang, T. Kim, B. Kim, B. Yoon, C. Jang, D. Choi, D. Han *et al.*, "Rldx-1 technical report," *arXiv preprint arXiv:2605.03269*, 2026.
 - [66] J. Lyu, K. Liu, X. Zhang, H. Liao, Y. Feng, W. Zhu, T. Shen, J. Chen, J. Zhang, Y. Dong *et al.*, "Lda-1b: Scaling latent dynamics action model via universal embodied data ingestion," in *Robotics: Science and Systems*, 2026.
 - [67] S. Liu, Z. Zeng, T. Ren, F. Li, H. Zhang, J. Yang, Q. Jiang, C. Li, J. Yang, H. Su, J. Zhu, and L. Zhang, "Grounding DINO: Marrying DINO with grounded pre-training for open-set object detection," in *European Conference on Computer Vision*, 2024.
 - [68] N. Ravi, V. Gabeur, Y.-T. Hu, R. Hu, C. Ryali, T. Ma, H. Khedr, R. Rädle, C. Rolland, L. Gustafson, E. Mintun, J. Pan, K. V. Alwala, N. Carion, C.-Y. Wu, R. Girshick, P. Dollár, and C. Feichtenhofer, "Sam 2: Segment anything in images and videos," in *International Conference on Learning Representations*, 2025.
 - [69] Z. Wang, Z. Zhang, J. Xu, J. Wang, T. Pang, C. Du, H. Zhao, and Z. Zhao, "Orient anything v2: Unifying orientation and rotation understanding," in *Advances in Neural Information Processing Systems*, 2025.