

CrossView Suite: Harnessing Cross-view Spatial Intelligence of MLLMs with Dataset, Model and Benchmark

Wei Wang
Zhejiang University
China

Wenqiao Zhang*
Zhejiang University
China

Yuqian Yuan
Zhejiang University
China

Siliang Tang
Zhejiang University
China

Yueting Zhuang
Zhejiang University
China

Tianwei Lin
Zhejiang University
China

Jun Xiao
Zhejiang University
China

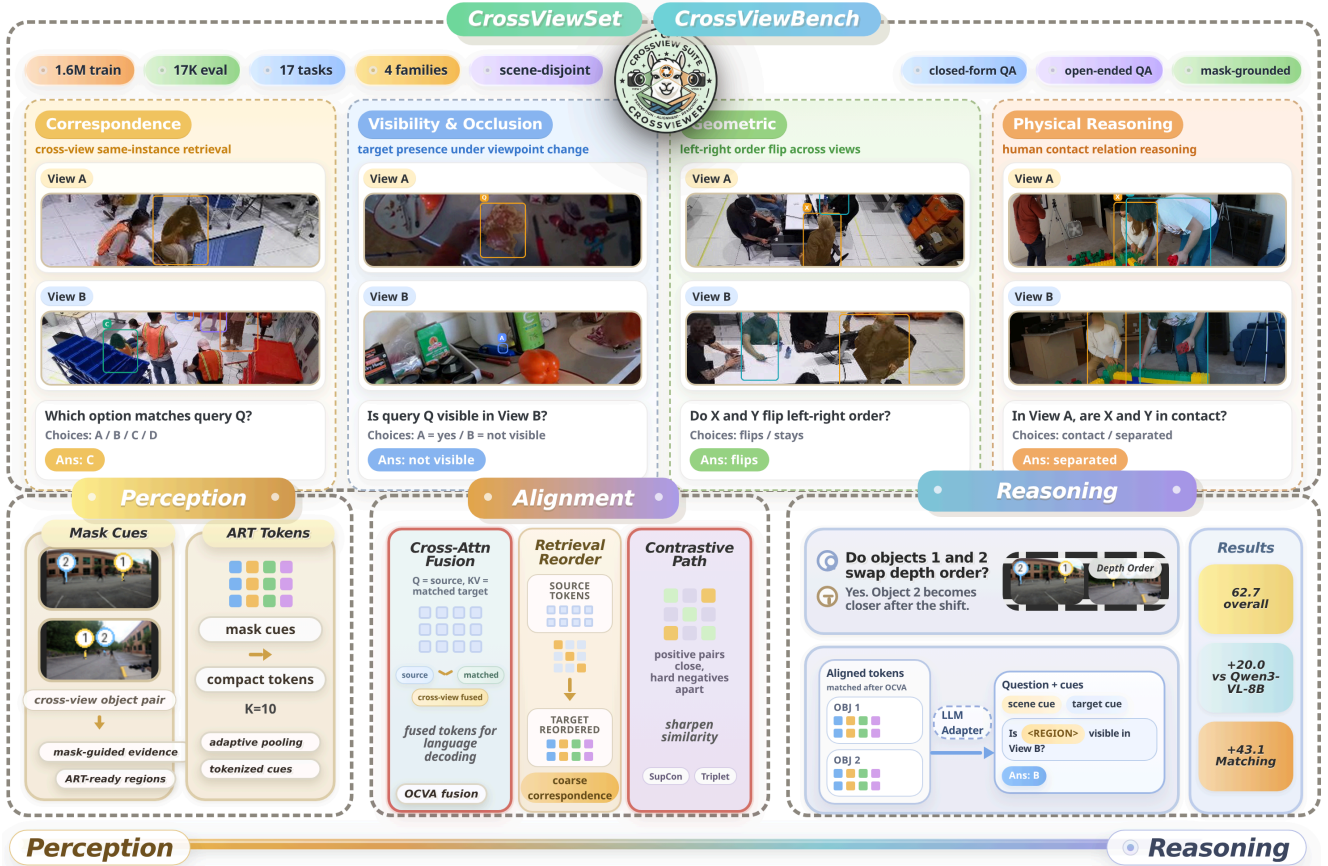


Figure 1: Overview of CrossViewer. CrossViewer presents a unified framework for cross-view spatial intelligence in MLLMs, integrating data, benchmark, and model. CrossViewSet is a large-scale mask-grounded instruction dataset (1.6M samples, 17 tasks), and CrossViewBench is a scene-disjoint benchmark for systematic evaluation. The model follows a progressive Perception–Alignment–Reasoning paradigm, enabling explicit cross-view object alignment and region-guided reasoning.

Abstract

Spatial intelligence requires multimodal large language models (MLLMs) to move beyond single-view perception and reason consistently about objects, visibility, geometry, and interactions across multiple viewpoints. However, progress in cross-view reasoning remains limited by three major gaps: the scarcity of large-scale well-annotated training data, the lack of comprehensive benchmarks for systematic evaluation, and the absence of explicit alignment mechanisms that establish object-level consistency across views. To address these gaps, we thoroughly develop **CrossView Suite** across three coordinated components: **CrossViewSet**, **CrossViewBench**, and **CrossViewer**. Firstly, we introduce a multi-agent data engine to meticulously curate a large-scale, high-quality cross-view instruction dataset, termed **CrossViewSet**, covering 17 fine-grained task types with 1.6M samples. Second, we meticulously create a scene-disjoint **CrossViewBench** to comprehensively assess the cross-view spatial understanding capability of an MLLM, evaluating it across various aspects. Finally, we propose **CrossViewer**, a progressive three-stage framework for cross-view spatial reasoning in MLLMs, following a *Perception* $\rightarrow$ *Alignment* $\rightarrow$ *Reasoning* paradigm. Our method equips an adaptive spatial region tokenizer to capture fine-grained object representations, and then aligns the multi-view objects explicitly, and thus fuses aligned features for boosting the cross-view inference capacity for MLLMs. Extensive experiments and analyses show that large-scale training data, systematic evaluation, and explicit cross-view alignment are all critical for advancing MLLMs from single-view perception toward real-world spatial intelligence. The project page is available at <https://github.com/Thinkirin/Crossview-Suite>.

Keywords

spatial intelligence, cross-view alignment, multimodal large language models, multi-view reasoning, multi-view benchmark

1 Introduction

Multimodal large language models (MLLMs) have achieved remarkable progress in single-view visual understanding, with representative systems such as Flamingo [1], BLIP-2 [22], LLaVA [25], InternVL [6], and Qwen3-VL [3] demonstrating strong performance on captioning and general visual question answering. Building on these advances, recent research has begun to extend MLLMs toward richer spatial and 3D reasoning capabilities [5, 7, 9, 15, 48], which are essential for enabling real-world interaction.

However, real-world environments are inherently dynamic and multi-perspective: agents must continuously perceive scenes from changing viewpoints rather than relying on a single static image. This shift from static perception to dynamic, multi-view understanding introduces new challenges that cannot be addressed by simply scaling single-view capabilities. A model must identify the same physical object across viewpoint changes and use that aligned representation to support downstream reasoning about visibility, geometry, and interactions. In real multi-camera settings, judgments such as cross-view correspondence, occlusion, layout change, and physical contact all depend on stable object-level consistency across views. This capability is fundamental for embodied AI, multi-agent

collaboration, robotics, and video analytics, but remains under-developed in current MLLMs. We attribute this limitation to the following key challenges.

First, The Lack Of Large-Scale Mask-Grounded Cross-View Supervision. Existing public resources such as Ego-Exo4D [11], EgoHumans [17], MessyTable [4] and MMPTrack [13] provide synchronized views, identities, or 3D annotations, but they are not organized as large-scale mask-grounded instruction-tuning data for MLLMs. In particular, they do not simultaneously provide reliable and high-quality instance masks for precise object localization and effective background-noise suppression, unified region references, and object-grounded cross-view QA supervision at scale. As a result, while these datasets offer valuable perceptual signals and useful visual cues, they cannot directly provide scalable supervision for teaching MLLMs explicit object-level reasoning across views.

Second, The Lack Of A Unified, Multi-Dimensional Benchmark. Existing benchmarks, including MMVM, All-Angles Bench, and MV-ScanQA [27, 36, 51], reveal failures in correspondence, viewpoint-sensitive reasoning, and multi-view scene understanding. Yet each covers only part of the problem, with limited task breadth, scale, or alignment with real-world mask-grounded multi-camera reasoning. The field therefore still lacks a unified benchmark that jointly and systematically evaluates the core capabilities required for multi-view spatial intelligence.

Third, The Lack Of An Object-Centric MLLM Framework For Cross-View Reasoning. Existing region-aware MLLMs can ground objects within one image, but they do not establish cross-view identity consistency [26, 28]. Non-MLLM cross-view methods such as IDMR [24], Wang *et al.* [35], VICI [47], and ObjectRelator [10] have made strong progress on cross-view association. However, these methods are not designed as general-purpose reasoning systems and therefore cannot support the open-ended, object-centric, multi-task reasoning tasks. Current frontier and recent multi-image MLLMs [3, 6, 16, 21, 34] can process multiple images, yet they still rely largely on implicit fusion inside the language model instead of an explicit object-level cross-view alignment stage. As a result, they struggle to form stable cross-view object correspondences and capture fine-grained relations among objects across viewpoints.

To address these challenges, we introduce **CrossView Suite**, a unified framework comprising CrossViewSet, CrossViewBench, and CrossViewer, which together provide an integrated solution for training, evaluation, and deployment.

On the set side, we introduce a **multi-agent data engine** to curate **CrossViewSet**, a large-scale cross-view instruction dataset containing 1.6M samples from four public multi-view sources. It spans 17 fine-grained task types covering correspondence, visibility and occlusion, geometric reasoning, and physical reasoning. For sources lacking pixel-level annotations, we generate instance masks and systematically convert raw multi-view observations, object associations, and geometric cues into a unified, object-grounded QA supervision format tailored for MLLMs.

On the evaluation side, we build **CrossViewBench**, a comprehensive benchmark with 17,000 questions across the same 17 task types. It evaluates four capability groups: (i) cross-view correspondence, (ii) visibility and occlusion, (iii) geometric relations, and (iv) physical reasoning. The benchmark is scene-disjoint from training,

^{*}Corresponding author.

uses a combination of predominantly closed-form QA and complementary open-ended QA for analysis.

On the model side, we propose **CrossViewer**, a progressive three-stage framework for cross-view spatial reasoning in MLLMs. Its design follows three stages: **Perception**, **Alignment**, and **Reasoning**. In the Perception stage, the Adaptive Region Tokenizer (ART) converts each mask-grounded object into compact tokens via adaptive crop-and-scale processing. In the Alignment stage, a retrieval module establishes coarse cross-view correspondences, while the Object-Centric Cross-View Aligner (OCVA) integrates cross-attention fusion with contrastive learning to produce consistent object representations across views. In the Reasoning stage, an LLM adapter injects the aligned region tokens at `<REGION>` positions together with key scene cues, enabling answer generation grounded in explicit object-level evidence.

This unified setup enables end-to-end investigation of explicit cross-view alignment. CrossViewer reaches **62.7%** overall accuracy on CrossViewBench, outperforming Qwen3-VL-8B by **20.0%**, and reaches 49.5% accuracy on valid MMVMBench cases. These results highlight the importance of scalable training data, scene-disjoint evaluation, and explicit cross-view alignment for advancing MLLMs toward multi-view spatial intelligence. Our main contributions are summarized as follows:

- **We build CrossViewSet**, a 1.6M-sample cross-view instruction dataset with mask grounding and object-level QA supervision across 17 tasks.
- **We introduce CrossViewBench**, a comprehensive benchmark with 17K questions covering correspondence, occlusion, geometry, and physical reasoning in multi-view settings.
- **We propose CrossViewer**, a progressive three-stage framework for cross-view spatial reasoning that enables object-level reasoning across multiple views through explicit alignment.

2 Related Work

2.1 Multimodal Large Language Models

MLLMs have evolved from early adapter-style systems such as Flamingo [1] and BLIP-2 [22] to instruction-tuned models including InstructBLIP [8], LLaVA [25], Qwen-VL [2], and recent successors such as LLaVA-NeXT [21], Qwen2-VL [34], InternVL [6], and Qwen3-VL [3]. These models improve perception, multi-image input, and open-ended reasoning, but still rely mainly on implicit fusion rather than explicit object-level cross-view alignment. Recent specialized and modular MLLMs further explore domain adaptation and dynamic expert tuning, as exemplified by medical VLM adaptation and dynamic visual-language expert routing [23, 43].

Related efforts extend MLLMs toward spatial and 3D reasoning, including SpatialVLM [5], SpatialRGPT [7], MM-Spatial [9], MLLM-for3D [15], and Video-3D LLM [49]. However, these methods emphasize geometry and 3D scene understanding more than synchronized instance-level alignment across views. Empirical studies such as Eyes Wide Shut [33], MMVM [51], and All-Angles Bench [36] further expose weak cross-view consistency, motivating the explicit alignment design in CrossViewer.

2.2 Fine-Grained Visual Understanding

Promptable segmentation models such as SAM [19], SAM 2 [29], and LISA [20] provide strong mask generation and language-guided segmentation. Region-aware MLLMs such as Ferret [37], Osprey [39], GLaMM [28], RegionGPT [12], and AnyRef [14] extend instruction tuning to arbitrary regions and fine-grained visual references. Recent object-centric and video referring systems further broaden this direction toward spatio-temporal grounding, segmentation, editing, and generation [40, 42, 50]. PixelRefer [41] is especially related because it compresses mask regions into compact tokens, yet these methods remain fundamentally single-view. CrossViewer extends this mask-grounded setting to explicit cross-view correspondence and multi-view spatial reasoning.

2.3 Cross-View Alignment and Correspondence

Classical methods such as SuperGlue [30], LoFTR [31], and diffusion-based correspondence analysis [32] focus on low-level point or patch matching. More semantic vision-language work such as MMVM [51], IDMR [24], VICI [47], and ObjectRelator [10] studies paired-image correspondence, retrieval, localization, or ego/exo relations, but still targets narrower matching or reasoning settings rather than combining large-scale mask-grounded training, explicit object-token alignment, and unified multi-task QA evaluation.

2.4 Multi-View Datasets and Benchmarks

Representative multi-view resources include Ego-Exo4D, EgoHumans, MessyTable, and MMPTrack [4, 11, 13, 17]. Benchmark resources such as MMVM, All-Angles Bench, and MV-ScanQA [27, 36, 51] evaluate narrower slices of cross-view reasoning (Table 1). Ego-centric object benchmarks such as EOC-Bench [38] also highlight the importance of identifying, recalling, and forecasting objects in dynamic first-person scenes. These resources provide synchronized views, identities, or 3D signals, but not a large-scale mask-grounded MLLM corpus with unified QA. By contrast, CrossViewSet and CrossViewBench couple large-scale training and scene-disjoint evaluation under the same taxonomy.

3 CrossViewSet and CrossViewBench

In this section, we introduce CrossViewSet, a large-scale dataset designed to equip models with cross-view reasoning capability, and CrossViewBench, a comprehensive benchmark for systematic evaluation and fair comparison.

3.1 Source Data Collection

Our dataset and benchmark integrate four established multi-view resources: Ego-Exo4D [11] for synchronized ego/exo activity videos, EgoHumans [17] for dynamic multi-person scenes, MMPTrack [13] for surveillance-style multi-camera association, and MessyTable [4] for cluttered tabletop instance association. Together, they cover human activities, multi-person interaction, surveillance, and tabletop-object scenarios across mixed ego/exo viewpoints, static and environments, and both human-centered and object-centered targets.

Table 1: Comparison of representative multi-view resources for MLLMs. MV denotes multi-view input, Corr. denotes explicit cross-view correspondence supervision, and Scene-disj. denotes a scene-disjoint train/eval split. In the Role column, D and B indicate dataset and benchmark, respectively. The symbol $\circ$ denotes partial support.

Resource	Type	MV	Mask	Corr.	3D/Geo.	QA	Role	Scene-disj.	Scale	Tasks
Ego-Exo4D Dataset [11]	Raw dataset + training dataset	✓	✓	✓	✓	$\circ$	D	–	5,035 takes / 1,286 h	N/A
Ego-Exo4D Benchmark [11]	Benchmark	✓	✓	✓	✓	–	B	–	3,082 / 842 / 1,121 takes	8
EgoHumans Dataset [17]	Raw dataset	✓	$\circ$	✓	✓	–	D	✓	125K ego RGB / 410K instances	N/A
EgoHumans Benchmark [17]	Benchmark	✓	$\circ$	✓	✓	–	B	✓	77,260 / 47,740 images	4
MessyTable [4]	Raw dataset + benchmark	✓	–	✓	✓	–	D B	–	5,579 scenes / 50,211 images	1
MMPTrack [13]	Raw dataset + benchmark	✓	–	✓	–	–	D B	–	261 / 153 / 162 min ($\sim$ 2.98M GT)	2
MMVM SFT Dataset [51]	Training dataset	✓	✓	✓	–	✓	D	–	220K QA samples	N/A
MMVM Benchmark [51]	Benchmark	✓	✓	✓	–	✓	B	–	1,510 examples	1
All-Angles Bench [36]	Benchmark	✓	–	✓	–	✓	B	–	2,132 examples	6
MV-ScanQA [27]	Benchmark	✓	–	✓	✓	✓	B	✓	10K examples	1
CrossViewSet (ours)	Training dataset	✓	✓	✓	✓	✓	D	✓	1.643M samples	17
CrossViewBench (ours)	Benchmark	✓	✓	✓	✓	✓	B	✓	17K questions	17

3.2 Question Taxonomy

We introduce a hierarchical taxonomy to systematically characterize cross-view spatial reasoning capabilities. The taxonomy comprises 17 fine-grained task types (Q1–Q17), organized into four categories, as summarized in Table 2.

Correspondence (Q1–Q5) focuses on identifying and matching the same physical instance across different viewpoints. **Visibility & Occlusion** (Q6–Q8) evaluates cross-view presence and reasoning about occlusions and occluders. **Geometric** (Q9–Q16) encompasses tasks such as nearest-neighbor retrieval, scale estimation, completeness assessment, arrangement inversion, and displacement reasoning. Finally, **Physical Reasoning** (Q17) examines whether visual overlap implies physical contact. All questions are formulated as multiple-choice (four options) or binary where appropriate. Multiple-choice items include distractors where needed.

Although CrossViewBench primarily adopts closed-form QA for stable and objective large-scale evaluation, it also includes a small amount of open-ended questions for supplementary analysis. These samples remove answer options while preserving the same mask grounding, allowing us to test cross-view reasoning beyond predefined choices without changing the main evaluation protocol.

3.3 Automatic Generation Pipeline

We formulate the construction of CrossViewSet and CrossViewBench as a tool-augmented multi-agent engine built on public multi-view sources and their original annotations. A coordinator agent calls tools and sub-agents for perception completion, cross-view association, question generation, open-ended rewriting, quality control, and final human verification. This design is also motivated by prior data-centric learning pipelines that combine pseudo labeling, active annotation, partial-label learning, and uncertainty-aware transfer to reduce annotation cost while controlling label noise [44–46].

The pipeline has five stages: (1) the coordinator agent calls tools such as SAM 2 [29] to recover missing masks from boxes or key-points and filter low-confidence outputs; (2) it derives geometric supervision and structured cross-view cues from 3D coordinates and camera extrinsics; (3) it instantiates rule-based QA templates,

Table 2: Question taxonomy of CrossViewSet and CrossViewBench.

ID	Task	Set	Bench
Correspondence		632K	5K
Q1	Single-object cross-view retrieval	99K	1K
Q2	Two-candidate retrieval	107K	1K
Q3	One-of-three identification	191K	1K
Q4	Multi-object group matching	119K	1K
Q5	Binary instance verification	116K	1K
Visibility & Occlusion		260K	3K
Q6	Cross-view visibility detection	116K	1K
Q7	Exclusive-presence identification	119K	1K
Q8	Occluder source localization	25K	1K
Geometric		743K	8K
Q9	Cross-view nearest-neighbour retrieval	36K	1K
Q10	Scale change detection	109K	1K
Q11	Single-view completeness comparison	22K	1K
Q12	Cross-view completeness comparison	100K	1K
Q13	Left-right arrangement flip detection	121K	1K
Q14	Cross-view displacement comparison	117K	1K
Q15	Depth-relation consistency	116K	1K
Q16	Relative scale-growth comparison	122K	1K
Physical Reasoning		8K	1K
Q17	Visual overlap vs. physical contact	8K	1K
Total		1,643K	17K

yielding over **8M** candidates before filtering; (4) for the supplementary open-ended setting, it first calls a rewriting sub-agent to convert selected closed-form samples into grounded short-answer questions, and then a verification sub-agent to remove ambiguous or low-quality cases; and (5) after automatic generation, filtering, rewriting, and consistency checks, the pipeline retains about **1.6M** training samples and **17,000** evaluation questions, followed by human re-inspection on the evaluation set and a stratified training subset. In this reviewed portion, **98.2%** of training samples and **96.8%** of evaluation samples are kept directly, while the remainder are corrected or removed.

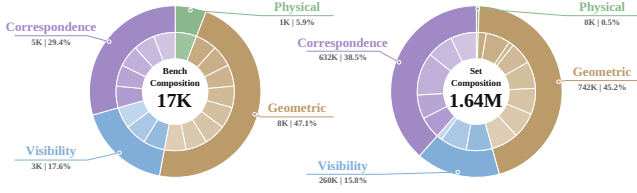


Figure 2: Source and task composition of CrossViewSet and CrossViewBench.

3.4 Data Characteristics

CrossViewSet and CrossViewBench provide a large-scale, scene-disjoint testbed for cross-view spatial reasoning with **1.6M** training samples, **17,000** evaluation questions, and **17** task types. All samples are region-grounded and carry consistent cross-view identities, enabling supervision of object correspondence and relations.

4 Method

4.1 Problem Formulation

Given N images $\mathcal{I} = \{I^{(n)}\}_{n=1}^N$ with associated mask sets $\mathcal{M}^{(n)} = \{m_1^{(n)}, \dots, m_{K_n}^{(n)}\}$, where $I^{(n)} \in \mathbb{R}^{H \times W \times 3}$ and $m_i^{(n)} \in \{0, 1\}^{H_0 \times W_0}$, the model learns

$$P(a | \mathcal{I}, \mathcal{M}, q; \Theta), \quad (1)$$

for a question q , where a is the text answer and Θ denotes trainable parameters.

Unlike single-view VQA, the model must establish correspondences across viewpoints. Let $C \subseteq \{(i, n, j, n') : n \neq n'\}$ denote the ground-truth cross-view correspondence set, where (i, n, j, n') indicates that object i in view n and object j in view n' refer to the same physical entity; the goal is to *align* co-referent objects in feature space and *reason* over the aligned representations to answer the question.

4.2 Model Overview

As shown in Fig. 3, CrossViewer follows three conceptual stages: Perception, Alignment and Reasoning. In the perception stage, a frozen Qwen3-VL-8B vision encoder extracts per-view feature maps $\mathbf{F}^{(n)} \in \mathbb{R}^{H_o \times W_o \times D_o}$, and Adaptive Region Tokenizer (ART) converts each mask-grounded object into up to K compact tokens $\mathbf{T}_i^{(n)} \in \mathbb{R}^{K \times D_o}$. A retrieval module then computes coarse cross-view correspondences and reorders the target-view tokens into $\tilde{\mathbf{T}}^{(b)}$. In the alignment stage, Object-Centric Cross-View Aligner (OCVA) explicitly fuses each source object with its matched target counterpart while producing contrastive embeddings. Finally, in the reasoning stage, an LLM adapter projects aligned visual features into the language space and injects them at `<REGION>` positions together with global and target-object cues for answer generation.

4.3 1st Stage: Fine-Grained Perception

Adaptive Region Tokenizer. Objects can vary substantially in scale and visible extent across viewpoints, making fixed-resolution region pooling inefficient and unstable for cross-view matching. We therefore propose an Adaptive Region Tokenizer (ART) to convert

each mask-grounded object into a compact token sequence. Given feature map $\mathbf{F}^{(n)}$ and mask m , let $\mathcal{B} = (t, l, b, r)$ be the tight bounding box of the mask with $2p$ padding, where p is the patch size. To retain roughly K informative tokens after pooling, we compute a scale factor from the mask area $|m| = \sum_{x,y} m_{x,y}$:

$$s = \left\lceil \sqrt{\frac{K \cdot p^2}{|m|}} \right\rceil, \quad h_r = \left\lceil \frac{(b-t) \cdot s}{P} \right\rceil \cdot P, \quad w_r = \left\lceil \frac{(r-l) \cdot s}{P} \right\rceil \cdot P, \quad (2)$$

where $P = 14$ is the patch size and $K = 10$ is the target token count. The crop is bilinearly resized to $(h_r/P) \times (w_r/P)$ patch tokens so that small objects are upsampled to maintain token density while large objects are only mildly downsampled to control cost.

We then add learnable absolute position embeddings, retain only masked tokens, run lightweight k-means, and project the resulting centroids with a shared two-layer MLP to obtain $\mathbf{T}_i^{(n)}$. Object token sequences are padded to a uniform length with token-validity masks. This crop-first design reduces background interference while preserving efficient batched multi-view processing.

Cross-View Object Retrieval. Exhaustively interacting every object across views would introduce many irrelevant pairs. Before feature fusion, the model must therefore determine which object in view b corresponds to object i in view a . We masked-mean-pool the valid (non-padding) ART tokens of each object, where $\mathcal{V}_i^{(a)}$ denotes the valid token positions of object i , and project them through a shared contrastive head $g(\cdot)$:

$$\bar{\mathbf{t}}_i^{(a)} = \frac{1}{|\mathcal{V}_i^{(a)}|} \sum_{k \in \mathcal{V}_i^{(a)}} \mathbf{T}_{i,k}^{(a)}, \quad \mathbf{z}_i^{(a)} = \frac{g(\bar{\mathbf{t}}_i^{(a)})}{\|g(\bar{\mathbf{t}}_i^{(a)})\|_2}, \quad S_{ij} = \mathbf{z}_i^{(a)\top} \mathbf{z}_j^{(b)}, \quad (3)$$

where $\mathbf{z}_i^{(a)} \in \mathbb{S}^{d_c-1}$, $\mathbf{S} = [S_{ij}]$, and $g(\cdot)$ is shared with OCVA; we set $d_c=256$.

CrossViewer supports three matching modes. GT follows the dataset’s canonical ordering and is used only as an oracle analysis branch. Greedy selects the highest-scoring unmatched pairs, while Hungarian solves the global 1-to-1 assignment when extra latency is acceptable. The recovered mapping π reorders target-view tokens into $\tilde{\mathbf{T}}^{(b)}$ before OCVA. For correspondence-heavy questions (Q1–Q5), $\mathbf{S}$ provides the explicit cross-view signal, while final answers still come from decoder scoring.

4.4 2nd Stage: Cross-View Alignment

Retrieval provides only a coarse correspondence hypothesis and does not yet model token-level interaction between matched objects. After token reordering, OCVA processes each source-view object token sequence $\mathbf{T}_i^{(a)}$ together with its matched target-view counterpart $\tilde{\mathbf{T}}_i^{(b)}$ to build a unified cross-view representation. It has two parallel paths: a cross-attention fusion path, which injects target-view context into source-view tokens for language decoding, and a contrastive alignment path, which trains the shared projection head $g(\cdot)$ to sharpen the similarity matrix $\mathbf{S}$ (Eq. (3)).

Cross-Attention Fusion Path. Because each view often reveals only partial evidence of the same object, the source tokens should

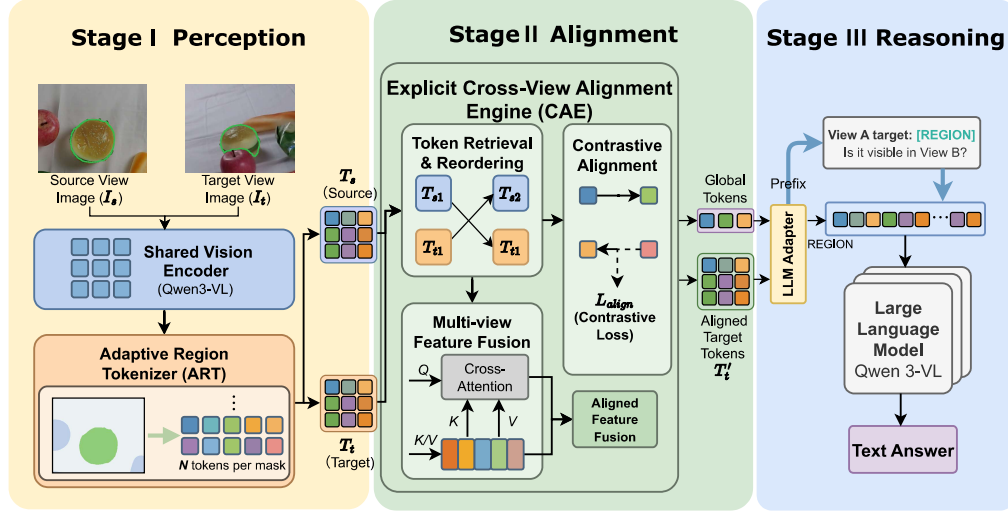


Figure 3: Overview of CrossViewer. Stage I extracts mask-grounded object tokens, Stage II aligns them across views, and Stage III performs region-guided reasoning.

explicitly absorb complementary cues from the matched target view. Using $T_i^{(a)}$ as queries and $\tilde{T}_i^{(b)}$ as keys and values, we apply multi-head cross-attention:

$$\hat{T}_i^{(a)} = \text{LN}\left(T_i^{(a)} + \text{MHA}\left(T_i^{(a)}, \tilde{T}_i^{(b)}, \tilde{T}_i^{(b)}\right)\right), \quad (4)$$

followed by a standard FFN with residual layer normalisation.

Contrastive Alignment Path. Fusion contextualizes features for decoding, but it does not explicitly enforce stable identity structure in the embedding space. The contrastive path uses the shared projection head $g(\cdot)$ to place co-referent objects close on the unit hypersphere and separate non-matches. Object tokens $T_i^{(a)}$ and $\tilde{T}_i^{(b)}$ are independently mean-pooled and projected through $g(\cdot)$ to obtain embeddings $z_i^{(a)}, z_i^{(b)} \in \mathbb{S}^{d_c-1}$ (Eq. (3)).

Supervised Contrastive Loss. For an aligned view pair, let M denote the number of valid non-global object pairs after masking. We concatenate all valid object embeddings from both views into $2M$ vectors with track-id labels and optimize a supervised contrastive loss $\mathcal{L}_{\text{SC}}$ following [18]. With temperature $\tau=0.07$, embeddings sharing the same track-id are treated as positives, so $\mathcal{L}_{\text{SC}}$ can exploit multiple positives for the same physical entity within a batch.

Online Hard-Negative Triplet Loss. We additionally use an on-line hard-negative triplet term, where the negative for each anchor is mined from the valid target-side embeddings in the current mini-batch. The resulting triplet loss $\mathcal{L}_{\text{tri}}$ uses the matched object as the positive, the highest-similarity non-match $z_{j_i^*}^{(b)}$ selected from that set as the negative, Euclidean distance $d(\cdot, \cdot)$, and margin $m=0.5$. This auxiliary term tightens the decision boundary around hard confusions.

4.5 3rd Stage: Region-Guided Reasoning

Even after alignment, object-level evidence can be diluted if it is passed to the decoder only as generic multi-image features. After explicit alignment, CrossViewer performs answer generation

with a standard LLM decoder, but now conditioned on aligned object evidence rather than raw multi-image fusion alone. Each question contains one or more `<region>` placeholders together with a `region_refs` list of (v, i) tuples indicating the referenced objects. For each referenced object, the aligned token sequence $\hat{T}_i^{(v)}$ is projected by the LLM adapter $h(\cdot)$ into region embeddings $\mathbf{R}_i^{(v)} = h(\hat{T}_i^{(v)})$, and each placeholder expands into c_i `<REGION>` tokens whose embeddings are replaced by $\mathbf{R}_i^{(v)}$.

Beyond region-token injection, masked-pooled aligned features produce a global scene token and a target-object summary token, which are prepended as visual prefix cues before the question tokens. Let $\mathbf{g}$ denote the projected global feature and $\mathbf{o}$ the projected target-object feature. The final reasoning input is formed as

$$\mathbf{e}_q = [\mathbf{g}; \mathbf{o}; \text{Tok}(q, \{\text{<REGION>} \mapsto \mathbf{R}\})], \quad (5)$$

where $\text{Tok}(\cdot)$ denotes token embeddings after region replacement. The LLM then autoregressively predicts the textual answer from $\mathbf{e}_q$. Although the decoder itself is standard, its reasoning is grounded on explicitly aligned cross-view object representations, allowing correspondence, visibility, geometric, and physical questions to be answered through a unified interface.

Training Objective. Answer supervision alone is insufficient to preserve stable cross-view correspondences during optimization. CrossViewer is trained with standard autoregressive answer cross-entropy together with the two cross-view alignment losses above:

$$\mathcal{L} = \lambda_{\text{VQA}} \mathcal{L}_{\text{VQA}} + \lambda_{\text{SC}} \mathcal{L}_{\text{SC}} + \lambda_{\text{tri}} \mathcal{L}_{\text{tri}}, \quad (6)$$

where $\mathcal{L}_{\text{VQA}}$ is the token-level answer cross-entropy on the gold response, and $\mathcal{L}_{\text{SC}}$ and $\mathcal{L}_{\text{tri}}$ are the two alignment losses defined above. In all experiments, we set $\lambda_{\text{VQA}}=0.5$, $\lambda_{\text{SC}}=1.0$, and $\lambda_{\text{tri}}=0.1$.

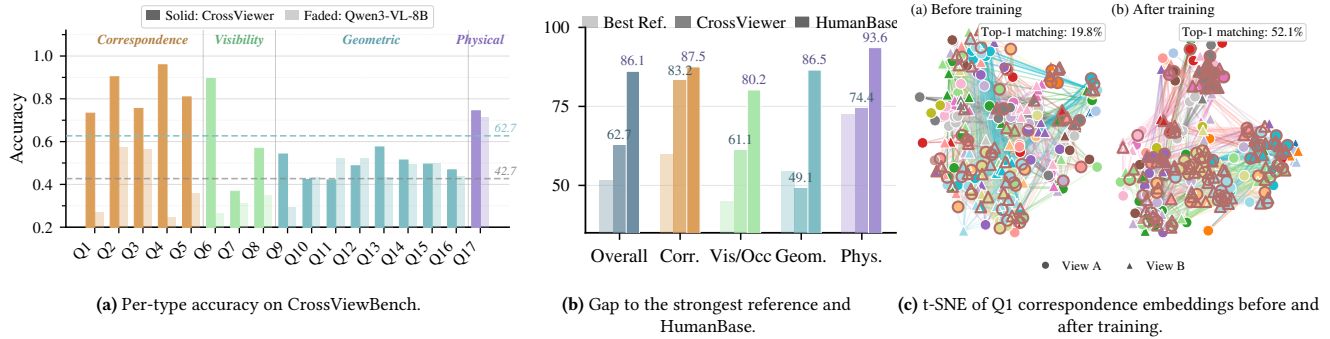


Figure 4: Overview panels of CrossView Suite and CrossViewer: per-type gains, gap to HumanBase, and t-SNE of Q1 correspondence embeddings before and after training.

Table 3: Performance comparisons on CrossViewBench. The best results are bold and the second-best results are underlined.

Method	Overall	Corr.	Vis/Occ	Geometric	Physical
HumanBase	86.1	87.5	80.2	86.5	93.6
Proprietary Models					
Gemini-3.1-Pro	51.5	<u>60.0</u>	39.0	50.5	56.0
GPT-5.2	49.5	41.5	<u>45.1</u>	54.5	58.3
Grok-4-Fast	42.5	38.8	33.3	45.8	59.0
Open-source Models					
Qwen3.5-397B	<u>51.7</u>	50.1	41.0	<u>54.1</u>	<u>72.6</u>
Qwen3.5-35B	50.1	48.3	39.4	53.3	65.6
Qwen3-VL-235B-A22B-Instruct	47.7	46.3	37.5	50.2	65.3
InternVL2.5-38B	45.9	43.8	36.2	48.4	65.5
Qwen2.5-VL-72B	45.2	43.2	35.6	47.8	63.2
LLaVA-Video-Qwen2-72B	44.2	42.6	34.9	46.7	60.1
InternVL2.5-78B	43.7	42.4	34.3	46.4	56.8
LLaVA-OneVision-Qwen2-72B	43.6	42.2	34.5	45.7	61.1
DeepSeek-VL2	42.8	41.6	33.8	44.8	59.8
Qwen3-VL-8B	42.7	40.1	30.7	45.3	71.1
InternVL2.5-4B	42.0	40.2	33.5	44.4	57.3
InternVL2.5-2B	40.0	38.8	31.9	42.2	52.7
CrossViewer (ours)	62.7	83.2	61.1	49.1	74.4

5 Experiments

5.1 Implementation Details

We instantiate CrossViewer on top of Qwen3-VL-8B-Instruct [3]. Unless otherwise noted, ART uses $K = 10$ object tokens, the Object-Centric Cross-View Aligner adopts 8 attention heads, and the contrastive embedding dimension is set to $d_{\text{contrast}} = 256$. Training mainly targets the lightweight modules introduced by CrossViewer, including the ART projection layers, the cross-view alignment blocks, and the language-side adaptation layers. We use AdamW with $\text{lr} = 10^{-4}$ and a cosine decay schedule on $4 \times \text{A100}$ GPUs. In the default configuration, we use greedy cross-view matching, fused region-token injection, and pairwise aggregation for VQA over the available view pairs; contrastive supervision follows the paired-view training path set by the configuration. Unless otherwise specified, training uses the full CrossViewSet split produced by our data generation pipeline.

5.2 Evaluation Setup

We evaluate CrossViewer on both CrossViewBench and MMVBench [51]. On CrossViewBench, we report accuracy for each question type and overall accuracy. For CrossViewer, referenced objects are provided through the native `<REGION>` token-replacement interface described in Sec. 4.5. For baseline MLLMs without region-token inputs, we instead render each referenced mask as a semi-transparent colored overlay and rewrite the question to use the corresponding color cue, yielding a unified object-grounded evaluation protocol across models.

5.3 Main Results

CrossViewBench. Table 3 compares CrossViewer with 15 reference MLLMs spanning both proprietary and open-source models, while Fig. 4(b) highlights the remaining gap to HumanBase. CrossViewer achieves the best overall performance at 62.7 accuracy, surpassing the strongest reference model, Qwen3.5-397B, by 11.0 points and the same-backbone Qwen3-VL-8B baseline by 20.0 points. The latter gap is particularly important: it shows that the gains are not explained by model scale or broader pretraining alone, but by the explicit object-centric alignment and reasoning design of CrossViewer.

Fig. 4 (a) shows that the gains are broad rather than concentrated on a single task family. The largest improvements appear on Correspondence and Visibility/Occlusion, where general-purpose MLLMs still rely mostly on implicit multi-image matching and therefore struggle under viewpoint change and partial observation. Larger frontier models remain more competitive on Geometric reasoning, with GPT-5.2 and Qwen3.5-397B slightly ahead of CrossViewer, suggesting that global extent estimation and holistic spatial abstraction are not fully solved by object-level alignment alone. By contrast, CrossViewer retains the best Physical score, indicating that explicit alignment helps the decoder ground higher-level relational reasoning on cleaner object evidence.

MMVBench. To evaluate out-of-domain generalization, we further assess CrossViewer on the external benchmark MMVBench [51]. Our model achieves an accuracy of 49.5% on 1,453 valid test cases using the contrastive retrieval head, outperforming the native Qwen3-VL-8B baseline by 19.4 points. This gain shows that the benefits of CrossViewer are not limited to in-domain optimization, but transfer

Table 4: Generalization Results on MMVMBench.

Method	Overall	CL	SP	TM	SZ	RP	OO	BR	OM
Qwen3-VL-8B	30.1	27.9	41.7	60.0	40.3	24.0	28.0	26.6	32.7
CrossViewer	49.5 (+19.4)	45.8	33.3	55.3	71.4	49.1	62.4	33.7	45.4

Table 5: Ablation study on CrossViewBench.

Variant	Overall	Corr.	Vis/Occ	Geometric	Physical
Training Baselines					
Vanilla SFT	46.1	41.3	31.5	50.8	71.6
w/ box-as-mask	51.5	68.7	50.4	41.2	61.4
Component Ablations					
w/o ART (mean pool)	52.7	67.0	35.0	48.8	70.0
w/o CrossView Attn	47.6	54.0	35.6	45.3	72.4
w/o SupCon	47.8	53.0	38.1	45.5	71.6
Full Model					
CrossViewer (full)	62.7	83.2	61.1	49.1	74.4

to unseen benchmarks with different data distributions. Table 4 provides a detailed breakdown across the eight match types defined in MMVMBench [51]. The strongest gains appear on CL, SZ, RP, OO, and OM, while SP and TM remain closer to the baseline. This pattern is consistent with the strengths of CrossViewer: it most strongly improves settings that require stable cross-view association and object-level relational structure, rather than uniformly boosting every appearance-driven comparison.

5.4 Ablation Study

We next analyze which ingredients are responsible for the gains of CrossViewer on CrossViewBench.

Training Baselines And Mask Quality. Table 5 first compares CrossViewer against two training baselines. Vanilla SFT uses the same Qwen3-VL-8B backbone and the same CrossViewSet split, but without explicit cross-view alignment, and reaches only 46.1 Overall. This result shows that in-domain instruction tuning alone does not induce stable cross-view association. Replacing precise masks with box-as-mask supervision improves performance to 51.5, confirming that explicit object references are already helpful, but the model still trails the full system by 11.2 points. The remaining gap indicates that coarse localization cannot preserve the fine boundaries and partial-visibility cues needed for reliable object-level reasoning across views.

Component Contribution. The component ablations isolate the roles of ART, cross-view attention, and contrastive alignment. Replacing ART with masked-region mean pooling especially hurts Vis/Occ (61.1 $\rightarrow$ 35.0), showing that a single pooled descriptor loses local evidence that is crucial for visibility and occlusion reasoning. Removing CrossView Attn causes the largest overall drop (62.7 $\rightarrow$ 47.6), confirming that token-level cross-view interaction is the main mechanism that turns retrieval matches into usable reasoning evidence. Removing SupCon ($\mathcal{L}_{SC}$) sharply degrades Correspondence (83.2 $\rightarrow$ 53.0), indicating that discriminative cross-view embeddings are essential for stable identity recovery even when the fusion pathway remains intact.

Table 6: Hyperparameter sensitivity on CrossViewBench.

Factor	Option A	Option B	Option C	Option D
ART token count	4: 58.0	8: 61.5	10: 62.4	16: 62.8
SupCon loss weight	0.5: 60.0	1.0: 62.4	–	–
Triplet loss weight	0: 62.0	0.05: 62.3	0.1: 62.4	0.2: 61.6
OCVA depth	2: 63.0	4: 62.5	–	–

Table 7: Effect of retrieval matching strategy on CrossViewBench.

Matching Strategy	Overall	Corr.	Vis/Occ	Geometric	Physical
Inference-time Matching					
Greedy	62.7	83.2	61.1	49.1	74.4
Hungarian	61.9	82.6	60.6	49.5	73.9
Analysis-only Reference					
GT ordering	52.8	69.4	51.3	42.2	69.3

Hyperparameter Sensitivity. We also vary ART token count, SupCon weight, triplet weight, and OCVA depth (Table 6). Increasing the ART token count from 4 to 16 steadily improves Overall accuracy from 58.0 to 62.8, with the gain largely saturating after 10 tokens. This suggests that ART benefits from preserving enough local structure, but does not require excessively long object token sequences. SupCon weight 1.0 and triplet weight 0.1 provide the best trade-off among the tested values, indicating that moderate metric supervision is sufficient. Finally, a 2-layer OCVA slightly outperforms a 4-layer variant, suggesting that this benchmark benefits more from precise alignment than from additional fusion depth.

Retrieval Matching Strategy. Table 7 shows that Greedy and Hungarian perform similarly, suggesting that the learned similarity space is already sharp enough for simple matching. In contrast, GT ordering performs substantially worse, indicating a train-deployment mismatch between oracle ordering and inference-time retrieved correspondences.

5.5 Qualitative Analysis

We next visualize the learned correspondence space and summarize the source and task composition of CrossViewSet and CrossViewBench. Fig. 4 (c) embeddings from the two views are strongly intermixed before training and yield only 20.5% top-1 matching on the shown Q1 subset; after training, matched objects form tighter neighborhoods and top-1 matching rises to 52.7%, supporting the role of contrastive supervision. As shown in Fig. 5, most queries recover the correct target despite viewpoint changes, while the failure case highlights the remaining ambiguity between nearby instances.

6 Conclusion

We introduced CrossView Suite, which combines CrossViewSet, CrossViewBench, and CrossViewer for multi-view spatial intelligence. On CrossViewBench, CrossViewer reaches 62.7% overall accuracy, outperforming Qwen3-VL-8B by 20.0%. Our analyses show that ART, contrastive alignment, and cross-view attention are all important. We hope CrossViewBench will support future work

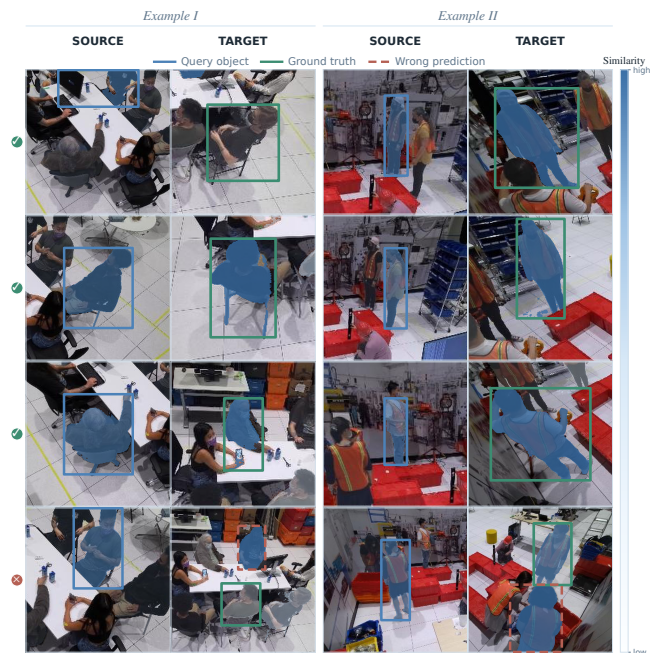


Figure 5: Qualitative cross-view retrieval results.

on richer multi-view settings and open-ended spatial reasoning in MLLMs.

Acknowledgments

We thank the authors of Ego-Exo4D, EgoHumans, MessyTable, and MMPTracking for making their datasets publicly available.

References

- [1] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katie Millican, Malcolm Reynolds, Roman Ring, Eliza Rutherford, Serkan Cabi, Tengda Han, Zhitao Gong, Sina Samangooei, Marianne Monteiro, Jacob Menick, Sebastian Borgeaud, Andrew Brock, Aida Nematzadeh, Sahand Sharifzadeh, Mikolaj Binkowski, Ricardo Barreira, Oriol Vinyals, Andrew Zisserman, and Karen Simonyan. 2022. Flamingo: A Visual Language Model for Few-Shot Learning. *Advances in Neural Information Processing Systems* 35 (2022), 23716–23736.
- [2] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-VL: A Versatile Vision-Language Model for Understanding, Localization, Text Reading, and Beyond. *arXiv preprint arXiv:2308.12966* (2023).
- [3] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. 2025. Qwen3-VL Technical Report. *arXiv preprint arXiv:2511.21631* (2025).
- [4] Zhongang Cai, Junzhe Zhang, Daxuan Ren, Cunjun Yu, Haiyu Zhao, Shuai Yi, Chai Kiat Yeo, and Chen Change Loy. 2020. Messytable: Instance association in multiple camera views. In *European Conference on Computer Vision*. Springer, 1–16.
- [5] Boyuan Chen, Zhuo Xu, Sean Kirmani, Brian Ichter, Danny Driess, Pete Florence, Dorsa Sadigh, Leonidas Guibas, and Fei Xia. 2024. SpatialVLM: Endowing Vision-Language Models with Spatial Reasoning Capabilities. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 14455–14465.
- [6] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. 2024. InternVL: Scaling up Vision Foundation Models and Aligning for Generic Visual-Linguistic Tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 24185–24198.
- [7] An-Chieh Cheng, Hongxu Yin, Yang Fu, Qiushan Guo, Ruihan Yang, Jan Kautz, Xiaolong Wang, and Sifei Liu. 2024. SpatialRGPT: Grounded Spatial Reasoning in Vision-Language Models. *arXiv preprint arXiv:2406.01584* (2024).
- [8] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. 2023. InstructBLIP: Towards General-Purpose Vision-Language Models with Instruction Tuning. *Advances in Neural Information Processing Systems* 36 (2023), 49250–49267.
- [9] Erik Daxberger, Nina Wenzel, David Griffiths, Haiming Gang, Justin Lazarow, Gefen Kohavi, Kai Kang, Marcin Eichner, Yinfei Yang, Afshin Dehghan, et al. 2025. Mm-spatial: Exploring 3d spatial understanding in multimodal llms. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 7395–7408.
- [10] Yuqian Fu, Runze Wang, Bin Ren, Guolei Sun, Biao Gong, Yanwei Fu, Danda Pani Paudel, Xuanjing Huang, and Luc Van Gool. 2024. ObjectRelator: Enabling Cross-View Object Relation Understanding Across Ego-Centric and Exo-Centric Perspectives. *arXiv preprint arXiv:2411.19083* (2024).
- [11] Kristen Grauman, Andrew Westbury, Lorenzo Torresani, Kris Kitani, Jitendra Malik, et al. 2024. Ego-Exo4D: Understanding Skilled Human Activity from First- and Third-Person Perspectives. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 19383–19400.
- [12] Qiushan Guo, Shalini De Mello, Hongxu Yin, Wonmin Byeon, Ka Chun Cheung, Yizhou Yu, Ping Luo, and Sifei Liu. 2024. RegionGPT: Towards Region Understanding Vision Language Model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 13796–13806.
- [13] Xiaotian Han, Quanzeng You, Chunyu Wang, Zhizheng Zhang, Peng Chu, Houdong Hu, Jiang Wang, and Zicheng Liu. 2023. MMPTRACK: Large-scale densely annotated multi-camera multiple people tracking benchmark. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*. 4860–4869.
- [14] Junwen He, Yifan Wang, Lijun Wang, Huchuan Lu, Jun-Yan He, Jin-Peng Lan, Bin Luo, and Xuansong Xie. 2024. Multi-Modal Instruction Tuned LLMs with Fine-Grained Visual Perception. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 13980–13990.
- [15] Jiaxin Huang, Runnan Chen, Ziwen Li, Zhengqing Gao, Xiao He, Yandong Guo, Mingming Gong, and Tongliang Liu. 2025. Mllm-for3d: Adapting multimodal large language model for 3d reasoning segmentation. *arXiv preprint arXiv:2503.18135* (2025).
- [16] Dongfu Jiang, Xuan He, Huaye Zeng, Cong Wei, Max W.F. Ku, Qian Liu, and Wenhui Chen. 2024. MANTIS: Interleaved Multi-Image Instruction Tuning. *Transactions on Machine Learning Research* (2024). *arXiv:2405.01483*.
- [17] Rawal Khrodgar, Aayush Bansal, Lingni Ma, Richard Newcombe, Minh Vo, and Kris Kitani. 2023. EgoHumans: An Egocentric 3D Multi-Human Benchmark. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 19750–19762.
- [18] Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. 2020. Supervised Contrastive Learning. *CoRR abs/2004.11362* (2020). *arXiv:2004.11362*
- [19] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. 2023. Segment Anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 4015–4026.
- [20] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. 2024. LISA: Reasoning Segmentation via Large Language Model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9579–9589.
- [21] Feng Li, Renrui Zhang, Hao Zhang, Yuanhan Zhang, Bo Li, Wei Li, Zejun Ma, and Chunyuan Li. 2024. LLaVA-NeXT-Interleave: Tackling Multi-image, Video, and 3D in Large Multimodal Models. *arXiv preprint arXiv:2407.07895* (2024).
- [22] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. 2023. BLIP-2: Bootstrapping Language-Image Pre-training with Frozen Image Encoders and Large Language Models. In *International Conference on Machine Learning*. PMLR, 19730–19742.
- [23] Tianwei Lin, Wenqiao Zhang, Sijing Li, Yuqian Yuan, Binhe Yu, Haoyuan Li, Wanggui He, Hao Jiang, Mengze Li, Xiaohui Song, et al. 2025. HealthGPT: A Medical Large Vision-Language Model for Unifying Comprehension and Generation via Heterogeneous Knowledge Adaptation. *arXiv preprint arXiv:2502.09838* (2025).
- [24] Bangwei Liu, Yicheng Bao, Shaohui Lin, Xuhong Wang, Xin Tan, Yingchun Wang, Yuan Xie, and Chaochao Lu. 2025. Idmr: Towards instance-driven precise visual correspondence in multimodal retrieval. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 6320–6329.
- [25] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023. Visual Instruction Tuning. *Advances in Neural Information Processing Systems* 36 (2023), 34892–34916.
- [26] Chuofan Ma, Yi Jiang, Jiannan Wu, Zehuan Yuan, and Xiaojuan Qi. 2024. Groma: Localized Visual Tokenization for Grounding Multimodal Large Language Models. In *European Conference on Computer Vision*. doi:10.1007/978-3-031-72658-3_24
- [27] Wentao Mo, Qingchao Chen, Yuxin Peng, Siyuan Huang, and Yang Liu. 2025. Advancing 3D Scene Understanding with MV-ScanQA Multi-View Reasoning Evaluation and TripAlign Pre-training Dataset. In *Proceedings of the 33rd ACM International Conference on Multimedia*. 12973–12980.
- [28] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M. Anwer, Eric Xing, Ming-Hsuan Yang, and Fahad S. Khan. 2024. GLaMM: Pixel Grounding Large Multimodal Model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 13009–13018.
- [29] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, Eric Mintun, Junting Pan, Kalyan Vasudev Alwala, Nicolas Carion, Chao-Yuan Wu, Ross Girshick, Piotr Dollár, and Christoph Feichtenhofer. 2024. SAM 2: Segment Anything in Images and Videos. *arXiv preprint arXiv:2408.00714* (2024).
- [30] Paul-Edouard Sarlin, Daniel DeTone, Tomasz Malisiewicz, and Andrew Rabinovich. 2020. SuperGlue: Learning feature matching with graph neural networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 4938–4947.
- [31] Jiaming Sun, Zehong Shen, Yuang Wang, Hujun Bao, and Xiaowei Zhou. 2021. LoFTR: Detector-free local feature matching with transformers. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 8922–8931.
- [32] Luming Tang, Menglin Jia, Qianqian Wang, Cheng Perng Phoo, and Bharath Hariharan. 2023. Emergent correspondence from image diffusion. *Advances in neural information processing systems* 36 (2023), 1363–1389.
- [33] Shengbang Tong, Zhuang Liu, Yuexiang Zhai, Yi Ma, Yann LeCun, and Saining Xie. 2024. Eyes Wide Shut? Exploring the Visual Shortcomings of Multimodal LLMs. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9568–9578.
- [34] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024. Qwen2-VL: Enhancing Vision-Language Model’s Perception of the World at Any Resolution. *arXiv preprint arXiv:2409.12191* (2024).
- [35] Yipu Wang, Yuheng Ji, Yuyang Liu, Enshen Zhou, Ziqiang Yang, Yuxuan Tian, Ziheng Qin, Yue Liu, Huajie Tan, Cheng Chi, et al. 2025. Towards cross-view point correspondence in vision-language models. *arXiv preprint arXiv:2512.04686* (2025).
- [36] Chun-Hsiao Yeh, Chenyu Wang, Shengbang Tong, Ta-Ying Cheng, Ruoyu Wang, Tianzhe Chu, Yuexiang Zhai, Yubei Chen, Shenghua Gao, and Yi Ma. 2025. Seeing from Another Perspective: Evaluating Multi-View Understanding in MLLMs. *arXiv preprint arXiv:2504.15280* (2025).
- [37] Haoxuan You, Haotian Zhang, Zhe Gan, Xianzhi Du, Bowen Zhang, Zirui Wang, Liangliang Cao, Shih-Fu Chang, and Yinfei Yang. 2024. Ferret: Refer and Ground Anything Anywhere at Any Granularity. In *International Conference on Learning Representations*. 57153–57180.
- [38] Yuqian Yuan, Ronghao Dang, Long Li, Wentong Li, Dian Jiao, Xin Li, Deli Zhao, Fan Wang, Wenqiao Zhang, Jun Xiao, et al. 2025. EOC-Bench: Can MLLMs

- Identify, Recall, and Forecast Objects in an Egocentric World? *arXiv preprint arXiv:2506.05287* (2025).
- [39] Yuqian Yuan, Wentong Li, Jian Liu, Dongqi Tang, Xinjie Luo, Chi Qin, Lei Zhang, and Jianke Zhu. 2024. Osprey: Pixel Understanding with Visual Instruction Tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 28202–28211.
- [40] Yuqian Yuan, Hang Zhang, Wentong Li, Zesen Cheng, Boqiang Zhang, Long Li, Xin Li, Deli Zhao, Wenqiao Zhang, Yueting Zhuang, et al. 2025. VideoRefer Suite: Advancing Spatial-Temporal Object Understanding with Video LLM. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 18970–18980.
- [41] Yuqian Yuan, Wenqiao Zhang, Xin Li, Shihao Wang, Kehan Li, Wentong Li, Jun Xiao, Lei Zhang, and Beng Chin Ooi. 2025. PixelRefer: A Unified Framework for Spatio-Temporal Object Referring with Arbitrary Granularity. *arXiv preprint arXiv:2510.23603* (2025).
- [42] Yuqian Yuan, Wenqiao Zhang, Juekai Lin, Yu Zhong, Mingjian Gao, Binhe Yu, Yunqi Cao, Wentong Li, Yueting Zhuang, and Beng Chin Ooi. 2026. LMMs Meet Object-Centric Vision: Understanding, Segmentation, Editing and Generation. *arXiv preprint arXiv:2604.11789* (2026).
- [43] Wenqiao Zhang, Tianwei Lin, Jiang Liu, Fangxun Shu, Haoyuan Li, Lei Zhang, He Wanggui, Hao Zhou, Zheqi Lv, Hao Jiang, et al. 2024. HyperLLaVA: Dynamic Visual and Language Expert Tuning for Multimodal Large Language Models. *arXiv preprint arXiv:2403.13447* (2024).
- [44] Wenqiao Zhang, Changshuo Liu, Lingze Zeng, Beng Chin Ooi, Siliang Tang, and Yueting Zhuang. 2023. Learning in Imperfect Environment: Multi-Label Classification with Long-Tailed Distribution and Partial Labels. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 1423–1432.
- [45] Wenqiao Zhang, Zheqi Lv, Hao Zhou, Jia-Wei Liu, Juncheng Li, Mengze Li, Yunfei Li, Dongping Zhang, Yueting Zhuang, and Siliang Tang. 2024. Revisiting the Domain Shift and Sample Uncertainty in Multi-Source Active Domain Transfer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 16751–16761.
- [46] Wenqiao Zhang, Lei Zhu, James Hallinan, Shengyu Zhang, Andrew Makmur, Qingpeng Cai, and Beng Chin Ooi. 2022. BoostMIS: Boosting Medical Image Semi-Supervised Learning with Adaptive Pseudo Labeling and Informative Active Annotation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 20666–20676.
- [47] Xiaohan Zhang, Tavis Shore, Chen Chen, Oscar Mendez, Simon Hadfield, and Safwan Wshah. 2025. VICI: VLM-Instructed Cross-view Image-localisation. In *Proceedings of the 3rd International Workshop on UAVs in Multimedia: Capturing the World from a New Perspective*. 21–25.
- [48] Duo Zheng, Shijia Huang, Yanyang Li, and Liwei Wang. 2025. Learning from videos for 3d world: Enhancing mllms with 3d vision geometry priors. *arXiv preprint arXiv:2505.24625* (2025).
- [49] Duo Zheng, Shijia Huang, and Liwei Wang. 2025. Video-3d llm: Learning position-aware video representation for 3d scene understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 8995–9006.
- [50] Yu Zhong, Tianwei Lin, Ruike Zhu, Yuqian Yuan, Haoyu Zheng, Liang Liang, Wenqiao Zhang, Feifei Shao, Haoyuan Li, Wanggui He, et al. 2026. Unified Personalized Understanding, Generating and Editing. *arXiv preprint arXiv:2601.06965* (2026).
- [51] Yikang Zhou, Tao Zhang, Shilin Xu, Shihao Chen, Qiong Zhou, Yibing Tong, et al. 2025. Are They the Same? Exploring Visual Correspondence Shortcomings of Multimodal LLMs. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 17663–17674.