

MementoGUI: Learning Agentic Multimodal Memory Control for Long-Horizon GUI Agents

Ziyan Zeng^{1,*}, Hang Hua^{2,*†}, Bocheng Zou³, Mu Cai³, Rogerio Feris², Jiebo Luo¹

¹University of Rochester, ²MIT-IBM Watson AI Lab, ³University of Wisconsin-Madison
 ziyun.zeng@rochester.edu, hang.hua1@ibm.com, bochengz@cs.wisc.edu
 mucai@cs.wisc.edu, rsferis@us.ibm.com, jluo@cs.rochester.edu

[†] Project Lead, ^{*} Equal Contribution

Abstract

Recent GUI agents have made substantial progress in visual grounding and action prediction, yet they remain brittle in long-horizon tasks that require maintaining task state across many interface transitions. Existing agents typically rely on raw history replay or text-only memory, which either overwhelms the model with redundant screenshots or discards localized visual evidence needed for future decisions. To address these limitations, we introduce **MEMENTOGUI**, a plug-in agentic memory framework that equips MLLM-based GUI agents with **MEMENTOCORE**, a learned controller for online memory selection, compression, and retrieval. Rather than treating interaction history as a fixed context, MEMENTOGUI formulates long-horizon GUI control as an online memory-control problem: working memory selectively preserves task-relevant interface events with textual summaries and ROI-level visual evidence, while episodic memory retrieves reusable past trajectories through learned relevance selection. MEMENTOCORE modularizes memory control into specialized operators for step processing, memory compression, episodic writing, and episodic selection, enabling plug-in memory augmentation without finetuning the GUI agent backbone. We further develop a scalable data curation pipeline that converts computer-use trajectories into memory-controller training data, introduce **MEMENTOGUI-BENCH** for evaluating long-horizon decision-making in GUI agents, and design MLLM-based metrics for semantic action matching, task progress, and memory consistency. Experiments on GUI-Odyssey, MM-Mind2Web, and MEMENTOGUI-BENCH show that MEMENTOGUI consistently improves GUI agents over no-history, history-replay, and text-only memory baselines, with larger MEMENTOCORE backbones further strengthening memory-augmented GUI control. Resources available at zzmyyzeng.github.io/MementoGUI

1 Introduction

Recent advances in multimodal large language models (MLLMs) [3, 23, 35, 48, 50, 61] have enabled agentic systems that perceive, reason, and act in complex visual environments [2, 20, 21, 24, 25, 57, 77, 78], alongside their growing success in complex scientific tasks [5, 54, 56, 79, 81]. Graphical user interface (GUI) control is a representative setting for such agents, requiring visually grounded actions over dynamic software interfaces. While recent GUI agents have improved single-step grounding and action prediction [10, 15, 22, 31, 80, 84], long-horizon GUI control remains brittle [29, 40, 45, 69, 86]. Agents have to preserve task state across many interface transitions, where crucial evidence can be local, transient, or unavailable in later screenshots, such as a selected widget state, a temporary menu option, or an earlier instruction needed for a later decision. As trajectories grow longer, these missed cues accumulate, causing agents to forget constraints, lose track of progress, or

repeat ineffective actions. This failure mode appears in both cross-app mobile environments [40, 45] and multimodal web settings [10], suggesting a fundamental paradigm shift in GUI agent design: the primary bottleneck is no longer single-step visual understanding, but rather the active management of long-term multimodal state.

Existing GUI agents often address long-horizon interaction through passive history conditioning [13, 60, 70, 71]. However, longer histories or text-only memory representations do not necessarily provide decision-useful context, and may introduce redundant or distracting information. In long GUI trajectories, useful evidence is sparse and unevenly distributed: some past steps only reflect routine transitions, while others encode task constraints, completed subgoals, or localized visual cues that may no longer be visible in the current screenshot. This suggests that long-horizon GUI control is better viewed as a multimodal memory-control problem rather than a pure context-length problem. Effective agents should decide when to update memory, what to preserve, how to compress interaction history, and when to retrieve past evidence for future decisions.

To address this challenge, we introduce **MENTOGUI**, a plug-in agentic multimodal memory-control framework for long-horizon GUI agents. **MENTOGUI** augments a frozen GUI backbone with a learned memory controller rather than finetuning the action policy itself. The controller maintains memory at two complementary timescales: working memory for evolving in-task state and episodic memory for reusable experience from prior interactions. At each step, the controller transforms relevant interaction history into structured multimodal context, including concise event summaries and localized visual references. The frozen GUI backbone then predicts actions from the current screenshot with the memory context, turning interaction history from passive context replay into a decision-oriented control layer.

Trained with large-scale supervision automatically curated from computer-use trajectories, **MENTOGUI** consistently improves frozen GUI backbones across GUI-Odyssey [40], Multimodal-Mind2Web [10], and our **MENTOGUI-BENCH**. Beyond standard GUI metrics, we further evaluate long-horizon behavior with memory-aware metrics that measure semantic action matching, task progress, and memory consistency. For example, on GUI-Odyssey with UI-Venus-1.5-8B, **MENTOGUI** improves action matching from 54.58 to 68.32 and trajectory success from 1.29 to 3.57, outperforming no-history, history-replay, and text-only memory baselines. These results support our central hypothesis that learning to control multimodal memory is more effective than relying on longer raw interaction histories or text-only memory representations for long-horizon GUI agents. Our contributions are summarized as follows:

- We propose **MENTOGUI**, a plug-in online multimodal agent memory framework that reframes long-horizon GUI control from raw history conditioning to active memory management. **MENTOGUI** augments frozen GUI backbones with a learned controller that actively manages working and episodic memory, enabling agents to preserve and retrieve decision-relevant multimodal state without finetuning the underlying GUI action model.
- We develop an automatic data curation pipeline from PSAI computer-use trajectories to provide scalable supervision for memory control. The pipeline converts raw interactions into training signals for step processing, working-memory compression, episodic memory writing, and episodic memory selection, enabling **MENTOGUI** to learn memory operations with minimal trajectory-level annotation.
- We introduce **MENTOGUI-BENCH**, a benchmark for memory-dependent long-horizon GUI decision making, together with memory-aware metrics for semantic action matching, task progress, and memory consistency. Experiments across mobile and web environments show that **MENTOGUI** consistently improves frozen GUI backbones over strong no-history, raw-history, and text-only memory baselines.

2 Related Work

Memory Systems for Autonomous Agents. Recent GUI-agent research has explored memory mechanisms beyond raw interaction history. MGA [9] and adaptive history modeling [66] improve within-task state tracking by managing long GUI trajectories more compactly. For cross-task reuse, Chain-of-Experience [13], EchoTrail [32], and HybridAgent [87] store past trajectories as reasoning chains, retrievable traces, or structured knowledge. Other computer-use agents accumulate

reusable knowledge through online interaction, demonstrations, or self-improvement, including AppAgentX [28], MobileGPT [30], ScaleCUA [39], UI-Explorer [68], EvoCUA [73], and AppAgent [82]. More broadly, autonomous-agent memory has developed around memory streams [43], verbal replay [47], skill libraries [59], and procedural memory [11, 65], as well as self-updating memory and retrieval-augmented refinement [53, 55]. Recent systems further study learned memory control [19, 76], trainable memory operations [62, 83], self-organizing memory frameworks [16, 72], decision-theoretic memory management [49], and efficient compressed or parametric memory representations [4, 36, 41]. Multimodal memory systems have also begun to store visual trajectories for open-world planning [33, 63], unify visual and episodic memory for video reasoning [75], or distill multimodal experience into reusable programs and lifelong memory [6, 38, 46]. However, they do not fully address long-horizon GUI control, where dense screenshot streams must be selectively compressed, localized visual state changes must be preserved, and memory retrieval must directly support action prediction.

Long-Horizon Challenges in GUI Agents. Recent vision-language models have substantially advanced GUI automation, from visual grounding [8, 17, 34, 26] to cross-platform foundation action models [1, 44, 67, 27]. Recent technical reports and open-source systems, including MAI-UI [85], GUI-Owl-1.5 [70], Step-GUI [74], and UI-Venus-1.5 [12], further improve GUI grounding and navigation across desktop, web, and mobile settings. Complementary efforts further improve efficiency through adaptive perception [42], compositional planning [1], and systematic skill acquisition via exploration [37, 51]. Yet long-horizon tasks remain a dominant failure mode: on benchmarks such as OSWorld [69] and WebArena [86], success rates degrade sharply as task length grows, with agents forgetting prior observations, repeating actions, or losing track of sub-goals. The bottleneck has therefore shifted from perception to cross-step state management. To cope with growing context, prior work restructures history as structured prompts or program variables [58, 64], compresses trajectory tokens [7], or maintains rule-based skill memory for computer control [52]. These approaches improve how agents reason over history, but leave open what should be retained, when it should be compressed, and how experience should be reused over time.

3 Data Curation

To train the memory controller, we curate structured supervision from raw computer-use trajectories in PSAT [18]. As illustrated in Figure 1, the pipeline first preprocesses the raw video and metadata into frame-level and subgoal-level annotations, then uses the annotations to construct the SFT training data for four memory-control operators. Finally, preference pairs for the online memory operators are constructed through rule-based corruption and VLM-judged filtering. We assess annotation quality through human validation on 200 randomly sampled trajectories, of which 197 are judged fully correct.

3.1 Data Preprocessing

Each trajectory in the raw computer-use dataset is converted into two annotation streams. Frame-level annotations capture fine-grained interface transitions by comparing adjacent video frames, including action occurrence, event description, input type, key sequence when applicable, and an ROI box for the changed interface region. Subgoal-level annotations capture coarse task progress by segmenting metadata events and interaction logs into chronological semantic units.

3.2 Memory Supervision Construction

We convert the preprocessed frame and subgoal annotations into operator-specific supervision for MEMENTOCORE. Specifically, we construct four supervised datasets, $\mathcal{D}_{\text{step}}$, $\mathcal{D}_{\text{cmp}}$, $\mathcal{D}_{\text{write}}$, and $\mathcal{D}_{\text{sel}}$, corresponding to the Step Processor, WM Compressor, Episodic Writer, and Episodic Selector. Each example pairs the task goal and relevant multimodal context with a structured target following the schema of the corresponding memory operation.

For SFT, step-processing examples are constructed from adjacent-frame annotations and subgoal context, with targets including importance scores, event summaries, ROI bounding boxes, and episodic-retrieval activation tags. Compression examples are built by simulating working-memory buffers and asking the model to summarize older entries while preserving representative visual

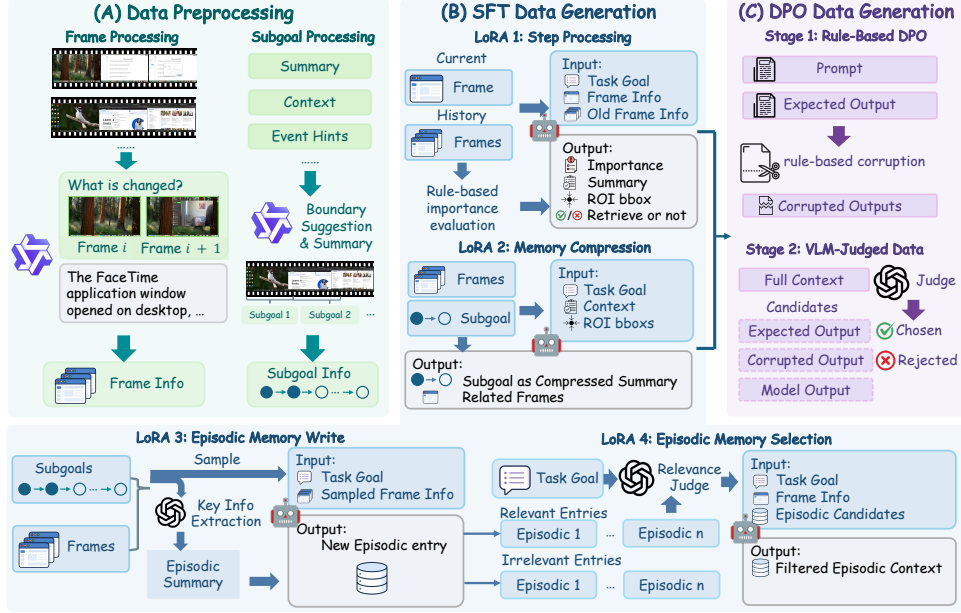


Figure 1: Overview of the MEMENTOGUI data curation pipeline. (A) Raw computer-use videos are parsed into hierarchical frame- and subgoal-level annotations. (B) These annotations are converted into SFT data for four MEMENTOCORE operators: step processing, memory compression, episodic memory writing, and episodic memory selection. (C) Step-processing and memory-compression samples are further corrupted and VLM-filtered to form DPO training pairs.

identifiers. Episodic-writing examples convert completed trajectories into compact reusable memories, and episodic-selection examples train the model to filter retrieved candidates by relevance to the current task state. We further construct DPO preference data for the Step Processor and WM Compressor, the two operators most directly tied to online memory quality. Preference pairs are obtained in two stages: rule-based corruptions create controlled negative outputs, and VLM-judged filtering selects outputs that better preserve task-relevant state, maintain visual grounding, and provide useful downstream context. The resulting preference sets are used for DPO training of the Step Processor and WM Compressor.

4 Methodology

4.1 The MEMENTOGUI Framework

Given a task goal g and a long-horizon GUI episode $\mathcal{E} = \{x_t\}_{t=1}^T$, where x_t denotes the screenshot at step t , the agent predicts actions $\{a_t\}_{t=1}^T$ to complete the task. We study a plug-in setting where the GUI action model is a frozen backbone π_B , and MEMENTOGUI augments it with an external multimodal memory controller, MEMENTOCORE. MEMENTOCORE implements a deterministic input-construction step and four learned operators: writing salient events into working memory, consolidating older entries, triggering episodic retrieval, and selecting relevant past episodes.

MEMENTOGUI contains an in-episode working memory W_t , a cross-episode episodic memory bank $\mathcal{M}$, and MEMENTOCORE. Working memory tracks transient task state, while episodic memory stores reusable experience from completed episodes. MEMENTOCORE is built by attaching four task-specific LoRA adapters to a shared frozen Qwen3-VL backbone, corresponding to step processing, working-memory compression, episodic writing, and episodic selection. Memory exposure is performed by the input constructor, which serializes textual summaries and ROI references into the native multimodal interface of the GUI backbone. Thus, MEMENTOGUI requires no memory-specific tokens, projection layers, architecture changes, or action-backbone finetuning.

At step t , the Step Processor outputs

$$(o_t, s_t, b_t, \gamma_t) = f_{\text{step}}(g, x_t, a_{t-1}, W_{t-1}), \quad (1)$$

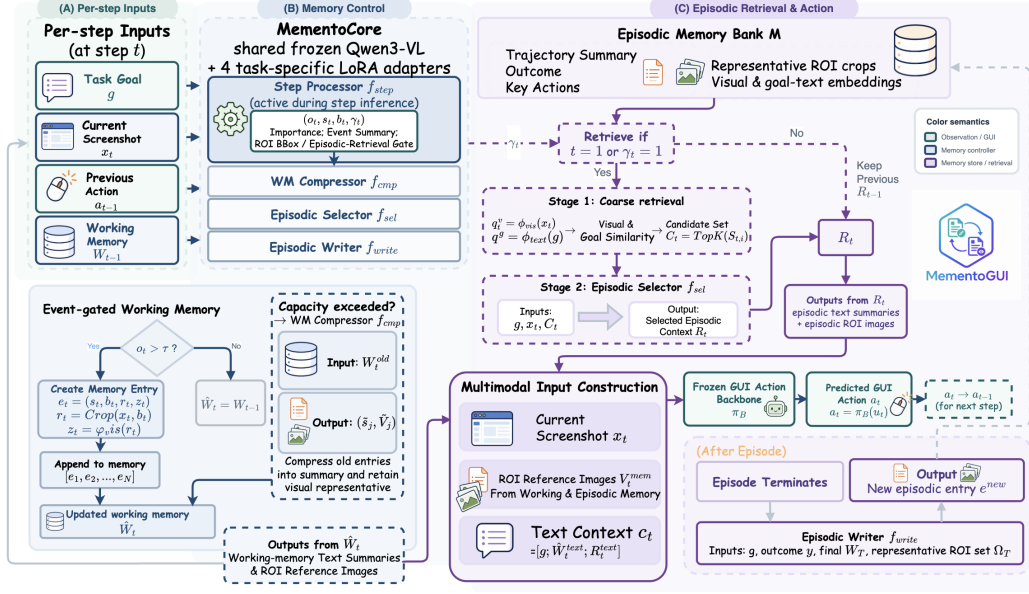


Figure 2: MEMENTOGUI augments a frozen GUI action backbone with multimodal working and episodic memory. It updates, retrieves, and writes memory, then serializes textual summaries and ROI references as multimodal context for GUI action prediction.

where $o_t \in [0, 1]$ is a write-salience score, s_t is an event summary, b_t is a task-relevant ROI box, and γ_t indicates whether episodic retrieval is needed. This yields a pre-action working memory $\hat{W}_t$. Episodic retrieval is invoked at $t = 1$ and, afterward, only when $\gamma_t = 1$.

The frozen GUI backbone receives

$$\mathbf{u}_t = (x_t, \mathcal{V}_t^{\text{mem}}, c_t), \quad c_t = [g; \hat{W}_t^{\text{text}}; R_t^{\text{text}}], \quad (2)$$

where $\mathcal{V}_t^{\text{mem}}$ contains selected ROI images from working and episodic memory, and c_t contains the task goal and textual memory summaries. The next action is predicted as

$$a_t = \pi_B(\mathbf{u}_t), \quad W_t \leftarrow \hat{W}_t. \quad (3)$$

The input $\mathbf{u}_t$ is serialized using the standard multimodal chat template of the backbone, so all memory is consumed as ordinary text and images.

4.2 Memory System Design

4.2.1 Event-Gated Working Memory

Working memory preserves task-relevant state without replaying the full interaction history. Rather than logging every frame, MEMENTOGUI writes memory only when the current interface may affect future decisions. For a retained step, the memory item is

$$e_t = (s_t, b_t, r_t, z_t), \quad r_t = \text{Crop}(x_t, b_t), \quad z_t = \phi_{\text{vis}}(r_t), \quad (4)$$

where r_t is the ROI crop and z_t is used only for memory organization. The update rule is

$$\hat{W}_t = \begin{cases} \text{Append}(W_{t-1}, e_t), & \text{if } o_t > \tau, \\ W_{t-1}, & \text{otherwise,} \end{cases} \quad (5)$$

where τ converts the learned salience score into a deterministic write decision. The action backbone never receives z_t as a custom token; selected ROI crops are passed as ordinary images.

To control context growth, older uncompressed entries are consolidated when the recent-memory capacity is exceeded:

$$(\tilde{s}_j, \tilde{\mathcal{V}}_j) = f_{\text{cmp}}(g, W_t^{\text{old}}), \quad (6)$$

where $\tilde{s}_j$ is a compact summary and $\tilde{\mathcal{V}}_j$ contains retained visual identifiers resolved into ROI crops during input construction. We pass at most K_{roi} ROI references to the backbone from compressed blocks and recent entries.

4.2.2 On-Demand Episodic Memory

Episodic memory stores reusable experience across completed episodes. Each entry contains a trajectory summary, metadata such as outcome and key actions, representative ROI crops, and retrieval embeddings. Unlike static retrieval, MEMENTOGUI initializes episodic context at the first step and refreshes it only when $\gamma_t = 1$.

When retrieval is invoked, MEMENTOGUI first performs coarse retrieval using the current screenshot and task goal:

$$s_{t,i} = \lambda_v \cos(q_t^v, m_i^v) + \lambda_g \cos(q_t^g, m_i^g), \quad \mathcal{C}_t = \text{TopK}_i(s_{t,i}), \quad (7)$$

where $q_t^v = \phi_{\text{vis}}(x_t)$, $q_t^g = \phi_{\text{text}}(g)$, and (m_i^v, m_i^g) are visual and goal-text embeddings of episodic entry m_i . The Episodic Selector then filters the coarse candidates:

$$\tilde{R}_t = f_{\text{sel}}(g, x_t, \{m_i\}_{i \in \mathcal{C}_t}), \quad (8)$$

where each m_i includes its summary, metadata, and ROI crops. The episodic context is updated by

$$R_t = \begin{cases} \tilde{R}_t, & \text{if } t = 1 \text{ or } \gamma_t = 1, \\ R_{t-1}, & \text{otherwise.} \end{cases} \quad (9)$$

This two-stage design combines efficient vector retrieval with multimodal relevance filtering, while allowing the accumulated working memory to gate when retrieval is invoked.

After an episode ends, the Episodic Writer converts the trajectory into a compact memory:

$$e^{\text{new}} = f_{\text{write}}(g, y, W_T, \Omega_T), \quad (10)$$

where y is the outcome and Ω_T is the representative ROI set from the final working memory. The new entry is stored in $\mathcal{M}$ with its metadata, embeddings, and ROI crops.

4.3 Training MEMENTOCORE

We train the four LoRA adapters of MEMENTOCORE as structured memory-control tasks on top of a shared frozen Qwen3-VL [3] backbone. The supervised datasets $\mathcal{D}_{\text{step}}$, $\mathcal{D}_{\text{cmp}}$, $\mathcal{D}_{\text{write}}$, and $\mathcal{D}_{\text{sel}}$ are produced by the data curation pipeline in Section 3.2. For each operator $k \in \{\text{step, cmp, write, sel}\}$ with LoRA parameters α_k and frozen backbone parameters θ , we minimize

$$\mathcal{L}_{\text{SFT}}^{(k)} = -\mathbb{E}_{(x,y) \sim \mathcal{D}_k} \log p_{\theta, \alpha_k}(y | x). \quad (11)$$

We further apply DPO to the Step Processor and WM Compressor using preference sets $\mathcal{P}_{\text{step}}$ and $\mathcal{P}_{\text{cmp}}$, since these operators directly trade off informativeness against context budget. The Episodic Writer and Selector have direct supervised targets and are trained with SFT only. For $k \in \{\text{step, cmp}\}$, DPO is initialized from the SFT adapter α_k^{SFT} , with reference policy $p_{\text{ref},k} = p_{\theta, \alpha_k^{\text{SFT}}}$. Given $(x, y^+, y^-) \sim \mathcal{P}_k$, we optimize

$$\mathcal{L}_{\text{DPO}}^{(k)} = -\mathbb{E} \log \sigma \left[\beta \log \frac{p_{\theta, \alpha_k}(y^+ | x) p_{\text{ref},k}(y^- | x)}{p_{\text{ref},k}(y^+ | x) p_{\theta, \alpha_k}(y^- | x)} \right]. \quad (12)$$

4.4 Benchmarking Long-Horizon GUI Agents

MEMENTOGUI-BENCH. We construct MEMENTOGUI-BENCH, an offline benchmark derived from PSAI computer-use videos [18] for memory-dependent GUI decision making. It contains 200 trajectories with 6,953 steps, averaging 34.8 steps per trajectory, 80 for testing and 120 for test-time scaling, and focuses on cases where the next action depends on accumulated task state, delayed constraints, completed subgoals, or prior experience. All reported MEMENTOGUI-BENCH results are evaluated on the 80 trajectories, and another 120 are used to accumulate episodic memory.

Semantic and Memory-Aware Evaluation Framework. Reference-based GUI evaluation is standardized but incomplete for long-horizon tasks, where multiple action paths may be valid and decision quality depends on accumulated state. We therefore report VLM-based metrics alongside standard reference-based scores. **VLM-based Action Match (VAM)** measures whether a predicted action

Table 1: Quantitative results on three GUI benchmarks. We evaluate history and memory augmentation strategies on four frozen open-source GUI backbones, with closed-source generalist MLLMs included as direct-prompting baselines. Metrics include AMS/Traj. SR for GUI-Odyssey, Step SR for MM-Mind2Web, and VAM/TPS/MCS for MementoGUI-Bench.

Backbone	Method	GUI-Odyssey		MM-Mind2Web	MementoGUI-Bench		
		AMS $\uparrow$	Traj. SR $\uparrow$	Step SR $\uparrow$	VAM $\uparrow$	TPS $\uparrow$	MCS $\uparrow$
Proprietary generalist MLLM agents							
GPT-5.5 [48]	Direct Prompting	54.46	2.02	18.81	1.95	2.00	2.86
Gemini-3.1-Pro [14]	Direct Prompting	60.62	1.81	22.97	2.18	2.67	2.75
Open-source frozen GUI backbones							
UI-Venus-1.5-8B [12]	No History	54.58	1.29	5.29	1.80	2.00	0.00
	Pred. Hist. All	66.31	2.33	7.57	1.58	2.29	5.36
	Text Summary Memory	62.18	2.12	11.66	1.58	3.38	3.08
	Working Memory	<u>67.69</u>	<u>2.69</u>	<u>11.80</u>	<u>1.41</u>	<u>4.63</u>	<u>7.00</u>
	Working + Episodic Memory	68.32	3.57	12.60	<u>1.67</u>	5.16	7.14
MAI-UI-8B [85]	No History	35.70	0.36	12.53	<u>1.81</u>	2.00	0.00
	Pred. Hist. All	44.79	1.35	13.44	1.54	2.11	7.55
	Text Summary Memory	38.33	0.62	13.28	1.63	3.00	3.23
	Working Memory	<u>49.08</u>	<u>1.97</u>	<u>14.61</u>	1.76	<u>5.13</u>	8.18
	Working + Episodic Memory	49.31	2.12	14.67	1.88	5.36	<u>8.13</u>
GUI-Owl-1.5-8B [70]	No History	40.15	0.16	17.78	1.60	2.00	0.00
	Pred. Hist. All	38.88	0.47	13.56	1.04	2.00	5.25
	Text Summary Memory	45.45	0.62	14.14	1.51	3.05	3.10
	Working Memory	<u>48.25</u>	<u>1.40</u>	<u>15.53</u>	<u>1.79</u>	<u>3.38</u>	<u>7.39</u>
	Working + Episodic Memory	49.45	1.71	<u>16.42</u>	1.82	4.18	7.73
GUI-Owl-1.5-32B [70]	No History	45.73	0.57	<u>18.98</u>	2.10	2.00	0.00
	Pred. Hist. All	49.02	1.55	<u>16.48</u>	1.83	2.11	4.73
	Text Summary Memory	47.21	0.72	17.00	2.37	3.40	3.40
	Working Memory	<u>51.36</u>	<u>2.33</u>	17.71	<u>2.50</u>	<u>4.24</u>	<u>7.85</u>
	Working + Episodic Memory	55.17	2.59	19.12	2.89	4.31	8.30

is semantically equivalent to the reference action on the current screenshot. **Task Progress Score (TPS)** evaluates whether the predicted sequence moves the task forward without loops, regressions, or stalling. **Memory Consistency Score (MCS)** assesses whether the memory state evolves consistently with task progress, including prior selections, completed subgoals, user constraints, and retrieved episodic experience.

5 Experiments

5.1 Experimental Setup

Implementation Details. All GUI backbones are frozen during evaluation. We evaluate four open-source GUI models: UI-Venus-1.5-8B [12], MAI-UI-8B [85], GUI-Owl-1.5-8B, and GUI-Owl-1.5-32B [70]. MEMENTOGUI is used as a plug-in memory controller that injects working- and episodic-memory context into the backbone prompt without backbone finetuning, using controllers trained as described in Sec. 4.3. We also evaluate GPT-5.5 [48] and Gemini-3.1-Pro [14] as API-based MLLM agents under the same observation, instruction, and action format. Latency is measured on NVIDIA H100 GPUs under the same inference setup and includes memory-controller inference, retrieval, prompt construction, and GUI-backbone inference.

Evaluation Metrics. We report standard offline GUI metrics following each benchmark protocol, including action-matching score (AMS), step success rate, and trajectory-level success rate. For finer-grained analysis, we additionally use VAM, TPS, and MCS to measure semantic action matching, task-progress plausibility, and consistency with accumulated task state/memory context, respectively, with Gemini-3.1-Pro as the VLM judge. For API-based and scaling experiments, we further report trajectory-level inference time and token usage to quantify compute and context cost.

5.2 Quantitative Results

Table 1 reports results on GUI-Odyssey [40], MM-Mind2Web [10], and MEMENTOGUI-BENCH. MEMENTOGUI consistently improves frozen open-source GUI backbones over no-history, predicted-history, and text-summary baselines. For example, on GUI-Odyssey with UI-Venus-1.5-8B, working

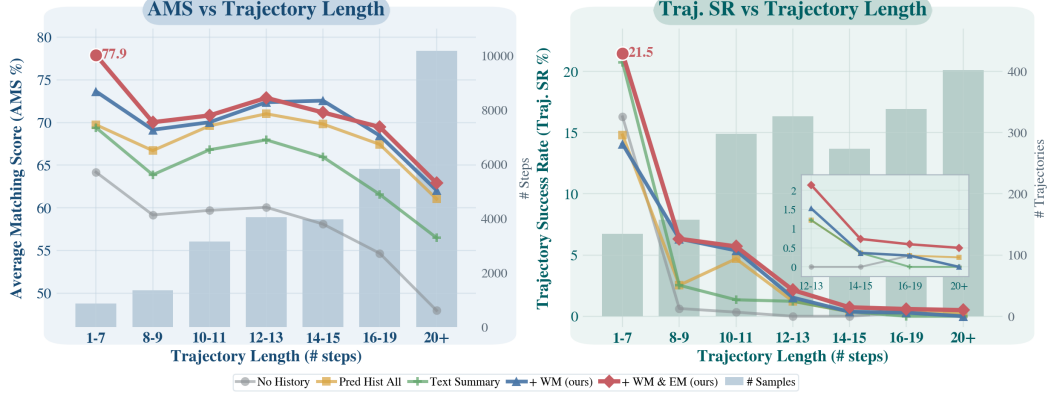


Figure 3: GUI-Odyssey performance by trajectory length on UI-Venus-1.5-8B.

memory raises AMS from 54.58 to 67.69 and trajectory success from 1.29 to 2.69; adding episodic memory further improves them to 68.32 and 3.57. Similar gains across MAI-UI-8B and GUI-Owl variants confirm its effectiveness as plug-in memory augmentation. Figure 3 shows stronger AMS across trajectory-length bins and higher trajectory success than history-based and text-only memory baselines, especially when working and episodic memory are combined. Figure 4 shows that larger episodic memory banks generally improve trajectory success, suggesting that reusable experience mainly benefits long-horizon completion. Table 2 further shows that the same working-memory context can augment proprietary MLLM agents in a stateless single-step setting.

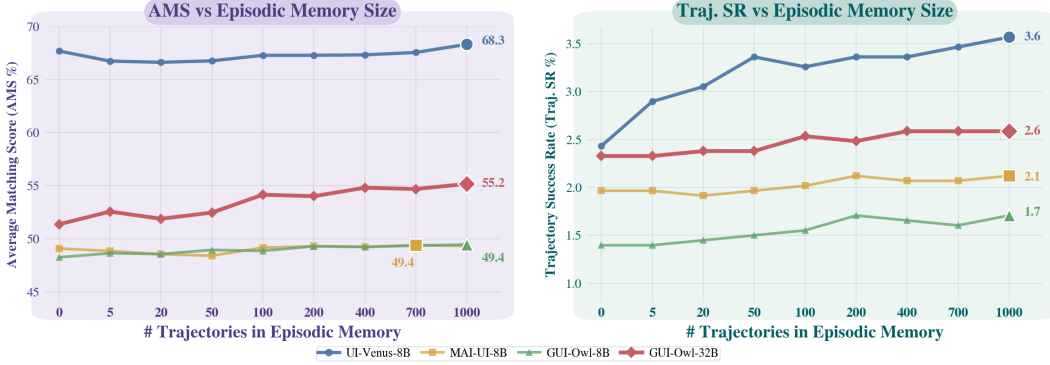


Figure 4: Effect of episodic memory bank size on GUI-Odyssey across frozen GUI backbones.

Table 2: Plug-in working-memory augmentation for API-based MLLM agents. Working Memory replaces native conversation history with stateless single-step inference conditioned on the current screenshot, task instruction, and MementoGUI memory context.

Backbone	Method	GUI-Odyssey				MementoGUI-Bench				
		AMS $\uparrow$	Traj. SR $\uparrow$	Token	Time	VAM $\uparrow$	TPS $\uparrow$	MCS $\uparrow$	Token	Time
GPT-5.5	Direct Prompting	54.46	2.02	29,974	66.28 s	1.95	2.00	2.86	80,066	133.15 s
	Working Memory	55.73 $_{+2.33\%}$	2.07 $_{+2.48\%}$	37,798	80.73 s	1.63 $_{-16.41\%}$	2.57 $_{+28.50\%}$	6.57 $_{+129.72\%}$	66,718	174.69 s
Gemini-3.1-Pro	Direct Prompting	60.62	1.81	26,100	58.44 s	2.18	2.67	2.75	75,769	125.37 s
	Working Memory	61.94 $_{+2.18\%}$	1.97 $_{+8.84\%}$	43,918	78.91 s	2.59 $_{+18.81\%}$	3.71 $_{+38.95\%}$	7.22 $_{+162.55\%}$	106,237	160.82 s

5.3 Ablation Study

Table 3 studies whether working-memory gains come only from learned text summarization or also require visual grounding. *WM w/o Visual Memory* uses the same learned memory-writing and compression controller as full working memory but removes ROI reference images from the memory context, isolating the contribution of localized GUI visual evidence. Table 4 studies how episodic memories should be selected before injection. *Random Episodic Context* controls for adding unrelated past experience, *Single-stage Retrieval* directly uses the top embedding-retrieved episode, and *Two-stage Retrieval* corresponds to our full WM+EM setting with learned relevance selection. Across both backbones, removing visual memory or learned episodic selection consistently degrades

performance, confirming that MEMENTOGUI benefits from both ROI-level grounding and filtered episodic experience rather than merely adding more context.

Table 3: Ablation of visual grounding in working memory. *WM w/o Visual Memory* refers to using the learned memory control but removing ROI reference images from the memory context, while full *Working Memory* uses both textual summaries and selected ROI images.

Method	GUI-Odyssey		MementoGUI-Bench		
	AMS ↑	Traj. SR ↑	VAM ↑	TPS ↑	MCS ↑
Backbone: UI-Venus-1.5-8B [12]					
Text Summary Memory	62.18	2.12	1.58	3.38	3.08
WM w/o Visual Memory	64.22	2.48	1.53	4.50	6.68
Working Memory	67.69	2.69	1.41	4.63	7.00
Backbone: GUI-Owl-1.5-8B [70]					
Text Summary Memory	45.45	0.62	1.51	3.05	3.10
WM w/o Visual Memory	47.58	1.19	1.76	3.33	5.78
Working Memory	48.25	1.40	1.79	3.38	7.39

Table 4: Ablation of episodic retrieval. *Single-stage Retrieval* injects the top embedding-retrieved episode, while *Two-stage Retrieval* applies learned relevance selection before memory injection.

Method	GUI-Odyssey		MementoGUI-Bench		
	AMS ↑	Traj. SR ↑	VAM ↑	TPS ↑	MCS ↑
Backbone: UI-Venus-1.5-8B [12]					
WM Only	67.69	2.69	1.41	4.63	7.00
Random Episodic Context	64.46	2.22	1.31	4.48	6.35
Single-stage Retrieval	64.40	2.33	1.62	4.79	6.65
Two-stage Retrieval	68.32	3.57	1.67	5.16	7.14
Backbone: GUI-Owl-1.5-8B [70]					
WM Only	48.25	1.40	1.79	3.38	7.39
Random Episodic Context	45.66	1.29	1.72	3.48	6.83
Single-stage Retrieval	48.08	1.19	1.69	3.89	7.51
Two-stage Retrieval	49.45	1.71	1.82	4.18	7.73

5.4 Scaling MEMENTOCORE

Table 5 studies the effect of memory-controller scale while keeping the memory architecture and frozen GUI action backbone fixed. We compare 2B, 4B, and 8B MEMENTOCORE variants under working-memory-only and working-plus-episodic-memory settings and report both GUI performance and end-to-end trajectory latency. Increasing controller capacity generally improves long-horizon decision support, especially in the working-plus-episodic-memory setting. The 8B controller achieves the strongest results on several key metrics, including action matching for both UI-Venus-1.5-8B and GUI-Owl-1.5-8B in GUI-Odyssey, as well as VAM for GUI-Owl-1.5-8B in MEMENTOGUI-BENCH. Episodic memory further provides complementary gains over working memory alone in most settings, suggesting that retrieved past evidence improves decisions beyond compressed in-task state. These improvements come with additional latency in some cases but require no finetuning of the underlying action model. Overall, the results indicate that MEMENTOGUI can scale as a plug-in memory layer by replacing the controller with stronger variants.

Table 5: We vary the memory-controller size with fixed memory architecture and frozen GUI backbones, comparing working memory with working-plus-episodic memory. Results report GUI performance and end-to-end trajectory latency on GUI-Odyssey and MEMENTOGUI-BENCH.

Backbone	#Params	Method	GUI-Odyssey			MementoGUI-Bench		
			AMS ↑	Traj. SR ↑	Time	VAM ↑	TPS ↑	MCS ↑
UI-Venus-1.5-8B [12]	2B	Working Memory	67.69	2.69	41.98 s	1.41	4.63	7.00
		Working + Episodic Memory	68.32 _{+0.93%}	3.57 _{+32.71%}	51.68 s	1.67 _{+18.44%}	5.16 _{+11.45%}	7.14 _{+2.00%}
	4B	Working Memory	67.82	2.74	61.95 s	1.53	4.84	7.36
		Working + Episodic Memory	68.84 _{+1.50%}	3.20 _{+16.79%}	60.76 s	1.44 _{-5.88%}	4.90 _{+1.24%}	7.71 _{+4.76%}
	8B	Working Memory	67.38	2.85	72.47 s	1.60	4.83	7.39
		Working + Episodic Memory	69.83 _{+3.64%}	3.36 _{+17.89%}	56.20 s	1.63 _{+1.87%}	4.96 _{+2.69%}	7.96 _{+7.71%}
GUI-Owl-1.5-8B [70]	2B	Working Memory	48.25	1.40	49.02 s	1.79	3.38	7.39
		Working + Episodic Memory	49.45 _{+2.49%}	1.71 _{+22.14%}	54.57 s	1.82 _{+1.68%}	4.18 _{+23.67%}	7.73 _{+4.60%}
	4B	Working Memory	48.49	1.60	60.81 s	1.64	3.90	7.58
		Working + Episodic Memory	49.05 _{+1.15%}	1.71 _{+6.88%}	61.21 s	1.87 _{+14.02%}	3.68 _{-5.64%}	7.53 _{-0.66%}
	8B	Working Memory	49.47	1.81	64.45 s	1.65	4.14	7.50
		Working + Episodic Memory	50.70 _{+2.49%}	1.81 _{+0.00%}	55.24 s	2.18 _{+32.12%}	4.58 _{+10.63%}	7.75 _{+3.33%}

6 Conclusion

We introduced MEMENTOGUI, a plug-in online multimodal memory-control framework for long-horizon GUI agents. Instead of relying on raw history replay or longer context windows, MEMENTOGUI reframes long-horizon GUI control as active memory control, enabling frozen GUI backbones to selectively update, preserve, compress, and retrieve decision-relevant multimodal state across interface transitions. We further developed an automatic data curation pipeline from PSAI computer-use trajectories and introduced MEMENTOGUI-BENCH, a benchmark for memory-dependent long-horizon GUI decision making. Across mobile and web environments, MEMENTOGUI consistently improves frozen GUI backbones over strong history- and memory-based baselines. Ablations show that localized visual evidence and learned episodic selection provide complementary gains, and scaling experiments suggest that stronger memory controllers can further improve long-horizon decision support. These results suggest that agentic multimodal memory control offers a scalable path toward GUI agents that remain coherent, efficient, and reliable over extended interaction trajectories.

References

- [1] Saaket Agashe, Kyle Wong, Vincent Tu, Jiachen Yang, Ang Li, and Xin Eric Wang. Agent s2: A compositional generalist-specialist framework for computer use agents. *arXiv preprint arXiv:2504.00906*, 2025.
- [2] Niccolo Avogaro, Nayanika Debnath, Li Mi, Thomas Frick, Junling Wang, Zexue He, Hang Hua, Konrad Schindler, and Mattia Rigotti. Sparc: Separating perception and reasoning circuits for test-time scaling of vlms. *arXiv preprint arXiv:2602.06566*, 2026.
- [3] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [4] Luiz C Borro, Luiz AB Macarini, Gordon Tindall, Michael Montero, and Adam B Struck. Memori: A persistent memory layer for efficient, context-aware llm agents. *arXiv preprint arXiv:2603.19935*, 2026.
- [5] He Cao, Yanjun Shao, Zhiyuan Liu, Zijing Liu, Xiangru Tang, Yuan Yao, and Yu Li. Presto: Progressive pretraining enhances synthetic chemistry outcomes. *arXiv preprint arXiv:2406.13193*, 2024.
- [6] Chunliang Chen, Ming Guan, Xiao Lin, Jiaxu Li, Luxi Lin, Qiyi Wang, Xiangyu Chen, Jixiang Luo, Changzhi Sun, Dell Zhang, et al. Telemem: Building long-term and multimodal memory for agentic ai. *arXiv preprint arXiv:2601.06037*, 2025.
- [7] Gongwei Chen, Xurui Zhou, Rui Shao, Yibo Lyu, Kaiwen Zhou, Shuai Wang, Wentao Li, Yinchuan Li, Zhongang Qi, and Liqiang Nie. Less is more: Empowering gui agent with context-aware simplification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5901–5911, 2025.
- [8] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Li YanTao, Jianbing Zhang, and Zhiyong Wu. Seeclck: Harnessing gui grounding for advanced visual gui agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9313–9332, 2024.
- [9] Weihua Cheng, Ersheng Ni, Wenlong Wang, Yifei Sun, Junming Liu, Wangyu Shen, Yirong Chen, Botian Shi, and Ding Wang. Mga: Memory-driven gui agent for observation-centric interaction. *arXiv preprint arXiv:2510.24168*, 2025.
- [10] Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. *Advances in Neural Information Processing Systems*, 36:28091–28114, 2023.
- [11] Runnan Fang, Yuan Liang, Xiaobin Wang, Jialong Wu, Shuofei Qiao, Pengjun Xie, Fei Huang, Huajun Chen, and Ningyu Zhang. Memp: Exploring agent procedural memory. *arXiv preprint arXiv:2508.06433*, 2025.
- [12] Changlong Gao, Zhangxuan Gu, Yulin Liu, Xinyu Qiu, Shuheng Shen, Yue Wen, Tianyu Xia, Zhenyu Xu, Zhengwen Zeng, Beitong Zhou, et al. Ui-venus-1.5 technical report. *arXiv preprint arXiv:2602.09082*, 2026.
- [13] Xinzge Gao, Chuanrui Hu, Bin Chen, and Teng Li. Chain-of-memory: Enhancing gui agents for cross-application navigation. *arXiv preprint arXiv:2506.18158*, 2025.
- [14] Google DeepMind. Gemini 3.1 Pro Model Card. <https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-3-1-Pro-Model-Card.pdf>, February 2026. Published February 2026; updated 19 February 2026.
- [15] Boyu Gou, Ruohan Wang, Boyuan Zheng, Yanan Xie, Cheng Chang, Yiheng Shu, Huan Sun, and Yu Su. Navigating the digital world as humans do: Universal visual grounding for gui agents. *arXiv preprint arXiv:2410.05243*, 2024.

- [16] Ziliang Guo, Ziheng Li, and Zhiyu Li. Memfactory: Unified inference & training framework for agent memory. *arXiv preprint arXiv:2603.29493*, 2026.
- [17] Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazhen Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 14281–14290, 2024.
- [18] Anais Howland, Ashwin Thinnappan, and Jameel Shahid Mohammed. Computer use data - paradigm shift ai, 2025.
- [19] Mengkang Hu, Tianxing Chen, Qiguang Chen, Yao Mu, Wenqi Shao, and Ping Luo. Hiagent: Hierarchical working memory management for solving long-horizon agent tasks with large language model. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 32779–32798, 2025.
- [20] Yushi Hu, Hang Hua, Zhengyuan Yang, Weijia Shi, Noah A. Smith, and Jiebo Luo. Promptcap: Prompt-guided image captioning for vqa with gpt-3. *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 2951–2963, 2023.
- [21] Hang Hua, Qing Liu, Lingzhi Zhang, Jing Shi, Soo Ye Kim, Zhifei Zhang, Yilin Wang, Jianming Zhang, Zhe Lin, and Jiebo Luo. Finecaption: Compositional image captioning focusing on wherever you want at any granularity. In *Proceedings of the computer vision and pattern recognition conference*, pages 24763–24773, 2025.
- [22] Hang Hua, Jing Shi, Kushal Kafle, Simon Jenni, Daoan Zhang, John P. Collomosse, Scott Cohen, and Jiebo Luo. Finematch: Aspect-based fine-grained image and text mismatch detection and correction. In *European Conference on Computer Vision*, 2024.
- [23] Hang Hua, Yunlong Tang, Chenliang Xu, and Jiebo Luo. V2xum-llm: Cross-modal video summarization with temporal prompt instruction tuning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 3599–3607, 2025.
- [24] Hang Hua, Yunlong Tang, Ziyun Zeng, Liangliang Cao, Zhengyuan Yang, Hangfeng He, Chenliang Xu, and Jiebo Luo. Mmcomposition: Revisiting the compositionality of pre-trained vision-language models. *arXiv preprint arXiv:2410.09733*, 2024.
- [25] Hang Hua, Ziyun Zeng, Yizhi Song, Yunlong Tang, Liu He, Daniel G. Aliaga, Wei Xiong, and Jiebo Luo. Mmig-bench: Towards comprehensive and explainable evaluation of multi-modal image generation models. *ArXiv*, abs/2505.19415, 2025.
- [26] Brandon Huang, Hang Hua, Zhuoran Yu, Trevor Darrell, Rogerio Feris, and Roei Herzig. Dave: A vlm vision encoder for document understanding and web agents. *arXiv preprint arXiv:2512.17221*, 2025.
- [27] Yue Huang, Hang Hua, Yujun Zhou, Pengcheng Jing, Manish Nagireddy, Inkit Padhi, Greta Dolcetti, Zhangchen Xu, Subhajit Chaudhury, Ambrish Rawat, et al. Building a foundational guardrail for general agentic systems via synthetic data. *arXiv preprint arXiv:2510.09781*, 2025.
- [28] Wenjia Jiang, Yangyang Zhuang, Chenxi Song, Xu Yang, Joey Tianyi Zhou, and Chi Zhang. Apagentx: Evolving gui agents as proficient smartphone users. *arXiv preprint arXiv:2503.02268*, 2025.
- [29] Jing Yu Koh, Robert Lo, Lawrence Jang, Vikram Duvvur, Ming Lim, Po-Yu Huang, Graham Neubig, Shuyan Zhou, Russ Salakhutdinov, and Daniel Fried. Visualwebarena: Evaluating multimodal agents on realistic visual web tasks. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 881–905, 2024.
- [30] Sunjae Lee, Junyoung Choi, Jungjae Lee, Munim Hasan Wasi, Hojun Choi, Steve Ko, Sangeun Oh, and Insik Shin. Mobilegpt: Augmenting llm with human-like app memory for mobile task automation. In *Proceedings of the 30th Annual International Conference on Mobile Computing and Networking*, pages 1119–1133, 2024.

- [31] Weixian Lei, Difei Gao, and Mike Zheng Shou. Grounding multimodal large language model in gui world. In *The Thirteenth International Conference on Learning Representations*, 2025.
- [32] Runze Li, Yuwen Zhai, Bo Xu, LiWu Xu, Nian Shi, Wei Zhang, Ran Lin, and Liang Wang. Echotrail-gui: Building actionable memory for gui agents via critic-guided self-exploration. *arXiv preprint arXiv:2512.19396*, 2025.
- [33] Zaijing Li, Yuquan Xie, Rui Shao, Gongwei Chen, Dongmei Jiang, and Liqiang Nie. Optimus-1: Hybrid multimodal memory empowered agents excel in long-horizon tasks. *Advances in neural information processing systems*, 37:49881–49913, 2024.
- [34] Kevin Qinghong Lin, Linjie Li, Difei Gao, Zhengyuan Yang, Shiwei Wu, Zechen Bai, Stan Weixian Lei, Lijuan Wang, and Mike Zheng Shou. Showui: One vision-language-action model for gui visual agent. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 19498–19508, 2025.
- [35] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36:34892–34916, 2023.
- [36] Jiaqi Liu, Yaofeng Su, Peng Xia, Siwei Han, Zeyu Zheng, Cihang Xie, Mingyu Ding, and Huaxiu Yao. Simplemem: Efficient lifelong memory for llm agents. *arXiv preprint arXiv:2601.02553*, 2026.
- [37] Jiateng Liu, Zhenhailong Wang, Rushi Wang, Bingxuan Li, Jeonghwan Kim, Aditi Tiwari, Pengfei Yu, Denghui Zhang, and Heng Ji. Osexpert: Computer-use agents learning professional skills via exploration. *arXiv preprint arXiv:2603.07978*, 2026.
- [38] Junming Liu, Yifei Sun, Weihua Cheng, Haodong Lei, Yirong Chen, Licheng Wen, Xuemeng Yang, Daocheng Fu, Pinlong Cai, Nianchen Deng, et al. Memverse: Multimodal memory for lifelong learning agents. *arXiv preprint arXiv:2512.03627*, 2025.
- [39] Zhaoyang Liu, JingJing Xie, Zichen Ding, Zehao Li, Bowen Yang, Zhenyu Wu, Xuehui Wang, Qiushi Sun, Shi Liu, Weiyun Wang, et al. Scalecua: Scaling open-source computer use agents with cross-platform data. *arXiv preprint arXiv:2509.15221*, 2025.
- [40] Quanfeng Lu, Wenqi Shao, Zitao Liu, Lingxiao Du, Fanqing Meng, Boxuan Li, Botong Chen, Siyuan Huang, Kaipeng Zhang, and Ping Luo. Guidyssey: A comprehensive dataset for cross-app gui navigation on mobile devices. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22404–22414, 2025.
- [41] Sidi Lu, Zhenwen Liang, Dongyang Ma, Yan Wang, Haitao Mi, and Dong Yu. Locas: Your models are principled initializers of locally-supported parametric memories. *arXiv preprint arXiv:2602.05085*, 2026.
- [42] Sarthak Mehrotra, Sairam VC Rebbapragada, Mani Hemanth Reddy Bonthu, and Vineeth N Balasubramanian. ishift: Lightweight slow-fast gui agent with adaptive perception. *arXiv preprint arXiv:2512.22009*, 2025.
- [43] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th annual acm symposium on user interface software and technology*, pages 1–22, 2023.
- [44] Yujia Qin, Yining Ye, Junjie Fang, Haoming Wang, Shihao Liang, Shizuo Tian, Junda Zhang, Jiahao Li, Yunxin Li, Shijue Huang, et al. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025.
- [45] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Androidinthewild: A large-scale dataset for android device control. *Advances in Neural Information Processing Systems*, 36:59708–59728, 2023.
- [46] Gabriel Sarch, Lawrence Jang, Michael J Tarr, William W Cohen, Kenneth Marino, and Katerina Fragkiadaki. Vlm agents generate their own memories: Distilling experience into embodied programs of thought. *Advances in Neural Information Processing Systems*, 37:75942–75985, 2024.

- [47] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [48] Aaditya Singh, Adam Fry, Adam Perelman, Adam Tart, Adi Ganesh, Ahmed El-Kishky, Aidan McLaughlin, Aiden Low, AJ Ostrow, Akhila Ananthram, et al. Openai gpt-5 system card. *arXiv preprint arXiv:2601.03267*, 2026.
- [49] Changzhi Sun, Xiangyu Chen, Jixiang Luo, Dell Zhang, and Xuelong Li. Beyond heuristics: A decision-theoretic framework for agent memory management. *arXiv preprint arXiv:2512.21567*, 2025.
- [50] Guohao Sun, Hang Hua, Jian Wang, Jiebo Luo, Sohail A. Dianat, Majid Rabbani, Raghuvver Rao, and Zhiqiang Tao. Latent chain-of-thought for visual reasoning. *ArXiv*, abs/2510.23925, 2025.
- [51] Zeyi Sun, Ziyu Liu, Yuhang Zang, Yuhang Cao, Xiaoyi Dong, Tong Wu, Dahua Lin, and Jiaqi Wang. Seagent: Self-evolving computer use agent with autonomous learning from experience. *arXiv preprint arXiv:2508.04700*, 2025.
- [52] Weihao Tan, Wentao Zhang, Xinrun Xu, Haochong Xia, Ziluo Ding, Boyu Li, Bohan Zhou, Junpeng Yue, Jiechuan Jiang, Yewen Li, et al. Cradle: Empowering foundation agents towards general computer control. *arXiv preprint arXiv:2403.03186*, 2024.
- [53] Xiangru Tang, Tianyu Hu, Muiyang Ye, Yanjun Shao, Xunjian Yin, Siru Ouyang, Wangchunshu Zhou, Pan Lu, Zhuosheng Zhang, Yilun Zhao, et al. Chemagent: Self-updating library in large language models improves chemical reasoning. *arXiv preprint arXiv:2501.06590*, 2025.
- [54] Xiangru Tang, Daniel Shao, Jiwoong Sohn, Jiapeng Chen, Jiayi Zhang, Jinyu Xiang, Fang Wu, Yilun Zhao, Chenglin Wu, Wenqi Shi, et al. Medagentsbench: Benchmarking thinking models and agent frameworks for complex medical reasoning. *arXiv preprint arXiv:2503.07459*, 2025.
- [55] Xiangru Tang, Wanghan Xu, Yujie Wang, Zijie Guo, Daniel Shao, Jiapeng Chen, Cixuan Zhang, Ziyi Wang, Lixin Zhang, Guancheng Wan, et al. Eigen-1: Adaptive multi-agent refinement with monitor-based rag for scientific reasoning. *arXiv preprint arXiv:2509.21193*, 2025.
- [56] Xiangru Tang, Zhuoyun Yu, Jiapeng Chen, Yan Cui, Daniel Shao, Weixu Wang, Fang Wu, Yuchen Zhuang, Wenqi Shi, Zhi Huang, et al. Cellforge: Agentic design of virtual cell models. *arXiv preprint arXiv:2508.02276*, 2025.
- [57] Tristan Thrush, Ryan Jiang, Max Bartolo, Amanpreet Singh, Adina Williams, Douwe Kiela, and Candace Ross. Winoground: Probing vision and language models for visio-linguistic compositionality. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5238–5248, 2022.
- [58] Shizuo Tian, Hao Wen, Yuxuan Chen, Jiacheng Liu, Shanhui Zhao, Guohong Liu, Ju Ren, Yunxin Liu, and Yuanchun Li. Agentprog: Empowering long-horizon gui agents with program-guided context management. *arXiv preprint arXiv:2512.10371*, 2025.
- [59] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [60] Junyang Wang, Haiyang Xu, Haitao Jia, Xi Zhang, Ming Yan, Weizhou Shen, Ji Zhang, Fei Huang, and Jitao Sang. Mobile-agent-v2: Mobile device operation assistant with effective navigation via multi-agent collaboration. *Advances in Neural Information Processing Systems*, 37:2686–2710, 2024.
- [61] Weiyun Wang, Zhangwei Gao, Lixin Gu, Hengjun Pu, Long Cui, Xingguang Wei, Zhaoyang Liu, Linglin Jing, Shenglong Ye, Jie Shao, et al. Internv13. 5: Advancing open-source multimodal models in versatility, reasoning, and efficiency. *arXiv preprint arXiv:2508.18265*, 2025.

- [62] Xinyu Wang, Mingze Li, Peng Lu, Xiao-Wen Chang, Lifeng Shang, Jinping Li, Fei Mi, Prasanna Parthasarathi, and Yufei Cui. Infmem: Learning system-2 memory control for long-context agent. *arXiv preprint arXiv:2602.02704*, 2026.
- [63] Zihao Wang, Shaofei Cai, Anji Liu, Yonggang Jin, Jinbing Hou, Bowei Zhang, Haowei Lin, Zhaofeng He, Zilong Zheng, Yaodong Yang, et al. Jarvis-1: Open-world multi-task agents with memory-augmented multimodal language models. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(3):1894–1907, 2024.
- [64] Ziwei Wang, Leyang Yang, Xiaoxuan Tang, Sheng Zhou, Dajun Chen, Wei Jiang, and Yong Li. History-aware reasoning for gui agents. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 36448–36456, 2026.
- [65] Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. *arXiv preprint arXiv:2409.07429*, 2024.
- [66] Wenyi Wu, Kun Zhou, Ruoxin Yuan, Vivian Yu, Stephen Wang, Zhiting Hu, and Biwei Huang. Auto-scaling continuous memory for gui agent. *arXiv preprint arXiv:2510.09038*, 2025.
- [67] Zhiyong Wu, Zhenyu Wu, Fangzhi Xu, Yian Wang, Qiushi Sun, Chengyou Jia, Kanzhi Cheng, Zichen Ding, Liheng Chen, Paul Pu Liang, et al. Os-atlas: A foundation action model for generalist gui agents. *arXiv preprint arXiv:2410.23218*, 2024.
- [68] Han Xiao, Guozhi Wang, Hao Wang, Shilong Liu, Yuxiang Chai, Yue Pan, Yufeng Zhou, Xiaoxin Chen, Yafei Wen, and Hongsheng Li. Ui-mem: Self-evolving experience memory for online reinforcement learning in mobile gui agents. *arXiv preprint arXiv:2602.05832*, 2026.
- [69] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh J Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, et al. Osworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *Advances in Neural Information Processing Systems*, 37:52040–52094, 2024.
- [70] Haiyang Xu, Xi Zhang, Haowei Liu, Junyang Wang, Zhaozai Zhu, Shengjie Zhou, Xuhao Hu, Feiyu Gao, Junjie Cao, Zihua Wang, et al. Mobile-agent-v3. 5: Multi-platform fundamental gui agents. *arXiv preprint arXiv:2602.16855*, 2026.
- [71] Ran Xu, Kaixin Ma, Wenhao Yu, Hongming Zhang, Joyce C Ho, Carl Yang, and Dong Yu. Retrieval-augmented gui agents with generative guidelines. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 17877–17886, 2025.
- [72] Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-mem: Agentic memory for llm agents. *arXiv preprint arXiv:2502.12110*, 2025.
- [73] Taofeng Xue, Chong Peng, Mianqiu Huang, Linsen Guo, Tiancheng Han, Haozhe Wang, Jianing Wang, Xiaocheng Zhang, Xin Yang, Dengchang Zhao, et al. Evocua: Evolving computer use agents via learning from scalable synthetic experience. *arXiv preprint arXiv:2601.15876*, 2026.
- [74] Haolong Yan, Jia Wang, Xin Huang, Yeqing Shen, Ziyang Meng, Zhimin Fan, Kaijun Tan, Jin Gao, Lieyu Shi, Mi Yang, et al. Step-gui technical report. *arXiv preprint arXiv:2512.15431*, 2025.
- [75] Woongyeong Yeo, Kangsan Kim, Jaehong Yoon, and Sung Ju Hwang. Worldmm: Dynamic multimodal memory agent for long video reasoning. *arXiv preprint arXiv:2512.02425*, 2025.
- [76] Yi Yu, Liuyi Yao, Yuexiang Xie, Qingquan Tan, Jiaqi Feng, Yaliang Li, and Libing Wu. Agentic memory: Learning unified long-term and short-term memory management for large language model agents. *arXiv preprint arXiv:2601.01885*, 2026.
- [77] Yongsheng Yu, Ziyun Zeng, Hang Hua, Jianlong Fu, and Jiebo Luo. Promptfix: You prompt and we fix the photo. *arXiv preprint arXiv:2405.16785*, 2024.
- [78] Yongsheng Yu, Ziyun Zeng, Haitian Zheng, and Jiebo Luo. Omnipaint: Mastering object-oriented editing via disentangled insertion-removal inpainting. *arXiv preprint arXiv:2503.08677*, 2025.

- [79] Ziyun Zeng, Junyu Chen, Noha Rashwan, Nisreen Al Jallad, Jin Xiao, and Jiebo Luo. Automated detection and quantitative assessment of dental plaque in intraoral images. *ACM Transactions on Computing for Healthcare*, 7(2):1–12, 2026.
- [80] Ziyun Zeng, Hang Hua, and Jiebo Luo. Mira: Multimodal iterative reasoning agent for image editing. *arXiv preprint arXiv:2511.21087*, 2025.
- [81] Ziyun Zeng, Ashwin Ramesh, Jinglong Ruan, Peirong Hao, N Al_Jallad, Hoonji Jang, Oriana Ly-Mapes, Kevin Fiscella, Jin Xiao, and Jiebo Luo. Use of artificial intelligence to detect dental caries on intraoral photos. *Quintessence international*, 2025.
- [82] Chi Zhang, Zhao Yang, Jiaxuan Liu, Yanda Li, Yucheng Han, Xin Chen, Zebiao Huang, Bin Fu, and Gang Yu. Appagent: Multimodal agents as smartphone users. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems*, pages 1–20, 2025.
- [83] Haozhen Zhang, Quanyu Long, Jianzhu Bao, Tao Feng, Weizhi Zhang, Haodong Yue, and Wenya Wang. Memskill: Learning and evolving memory skills for self-evolving agents. *arXiv preprint arXiv:2602.02474*, 2026.
- [84] Boyuan Zheng, Boyu Gou, Jihyung Kil, Huan Sun, and Yu Su. Gpt-4v (ision) is a generalist web agent, if grounded. *arXiv preprint arXiv:2401.01614*, 2024.
- [85] Hanzhang Zhou, Xu Zhang, Panrong Tong, Jianan Zhang, Liangyu Chen, Quyu Kong, Chenglin Cai, Chen Liu, Yue Wang, Jingren Zhou, et al. Mai-ui technical report: Real-world centric foundation gui agents. *arXiv preprint arXiv:2512.22047*, 2025.
- [86] Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, et al. Webarena: A realistic web environment for building autonomous agents. *arXiv preprint arXiv:2307.13854*, 2023.
- [87] Sibozhu, Wenyi Wu, Kun Zhou, Stephen Wang, and Biwei Huang. Hybrid self-evolving structured memory for gui agents. *arXiv preprint arXiv:2603.10291*, 2026.