

Robo-Cortex: A Self-Evolving Embodied Agent via Dual-Grain Cognitive Memory and Autonomous Knowledge Induction

Nga Teng Chan^{1,2◊}, Yi Zhang^{2‡}, Yechi Liu^{3,2◊}, Renwen Cui^{3,2◊}, Fanhu Zeng³, Zeyuan Ding², Xiancong Ren², Zhang Zhang³, Qifeng Chen^{1*}, Jian Liu⁴, Yong Dai^{2*}, Xiaozhu Ju^{2*}

¹The Hong Kong University of Science and Technology, ²X-Humanoid, ³Institute of Automation, CAS

⁴Beijing University of Aeronautics and Astronautics

*Corresponding author, ‡Project lead

Project Website: <https://robocortex66.github.io>

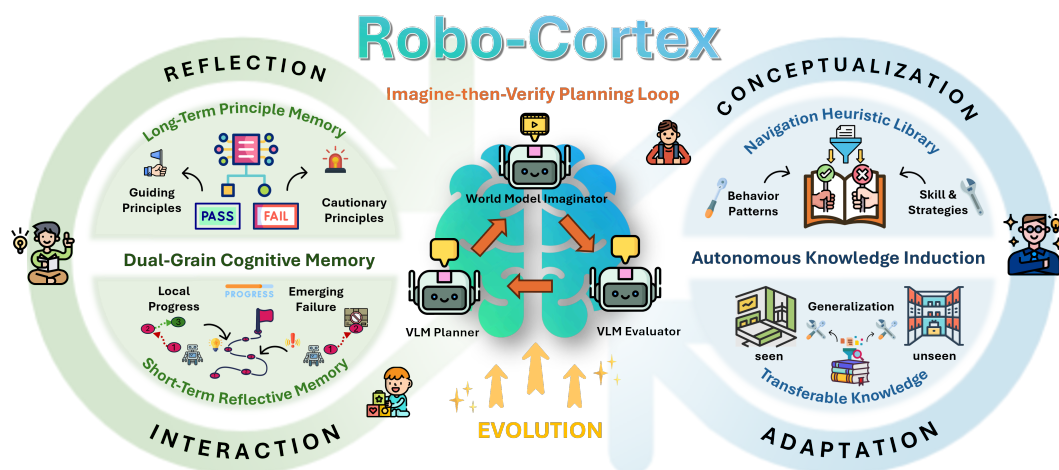


Figure 1: **Overview of Robo-Cortex.** Robo-Cortex is a self-evolving embodied navigation framework with three components: an *Imagine-then-Verify* planning loop for closed-loop decision making, *Dual-Grain Cognitive Memory* for reflection at two temporal scales, and *Autonomous Knowledge Induction* for distilling transferable navigation heuristics from experience. Together, they form an interaction-reflection-conceptualization-adaptation loop for continual strategy evolution.

Abstract

The ability to navigate and interact with complex environments is central to real-world embodied agents, yet navigation in unseen environments remains challenging due to “experiential amnesia,” where existing trajectory-driven or reactive policies fail to synthesize generalizable strategies from past interactions. We propose Robo-Cortex, a self-evolving framework that enables robots to autonomously induce navigation heuristics and refine cognitive strategies through a continuous reflection-adaptation loop. By abstracting success patterns and failure pitfalls into natural-language heuristics, Robo-Cortex enables a transition from passive execution to active strategy evolution. Our core innovation is an Autonomous Knowledge Induction (AKI) mechanism that distills multimodal trajectories into a structured Navigation Heuristic Library for knowledge generalization. The architecture further incorporates a Dual-Grain Cognitive Memory system, comprising a Short-term

[◊]Work was carried out during the internships of Nga Teng Chan, Yechi Liu, and Renwen Cui at X-Humanoid.

Reflective Memory (SRM) for real-time local progress analysis, and a Long-term Principle Memory (LPM) that abstracts past trajectories into reusable guiding and cautionary principles. To ensure robust decision-making, we introduce a multimodal Imagine-then-Verify loop, where a world model simulates potential outcomes and a VLM-based evaluator validates action plans. Extensive evaluations on IGNV, AR, and AEQA show that Robo-Cortex consistently outperforms strong baselines in both task success and exploration efficiency, with gains of up to +4.16% SPL over the strongest prior method and up to +15.30% SPL under heuristic transfer to unseen environments. Preliminary real-world robotic experiments further support the effectiveness of Robo-Cortex in physical settings.

1 Introduction

Autonomous navigation is a foundational capability for real-world embodied agents, which are increasingly needed to carry out exploration and task execution in hazardous, unfamiliar, or dynamic environments [3, 42]. Achieving this capability, however, requires an agent to continuously integrate visual perception, semantic goals, spatial context, and action consequences under partial observability [12]. Despite substantial progress in embodied AI, robust navigation in unseen environments remains challenging [25, 38]. Existing methods have improved navigation through stronger planning, richer memory, or more capable reasoning, yet many remain trajectory-driven or reactive: they may imitate successful paths, retrieve episode-specific memories, or select actions from local observations, while still struggling to convert prior interactions into portable decision strategy [2, 48, 41, 23, 44, 47]. As a result, experience often improves behavior only weakly and locally, leading to what we term *experiential amnesia*: the failure to transform past interactions into reusable decision knowledge that generalizes across environments.

We envision embodied agents that can evolve their cognition in a human-like manner, improving not merely by accumulating experiences, but by transforming them into better strategies over time. In humans, interaction, reflection, abstraction, and adaptation continuously reshapes human cognition [15], turning raw experiences into reusable knowledge for future decision making. Inspired by this process of cognitive evolution, we seek to develop embodied agents that do more than act and remember: they continually transform lived experience into increasingly effective strategies for perception, reasoning, and action, enabling cognition to evolve with every interaction.

In this work, we propose **Robo-Cortex**, a self-evolving embodied navigation framework that continually transforms accumulated experience into transferable heuristics and refined decision strategies through a reflection-adaptation loop. Robo-Cortex integrates three tightly coupled components. First, it uses an **Imagine-then-Verify** planning loop that performs short-horizon closed-loop decision making: a world model imagines the likely future outcomes of candidate actions, and a vision-language evaluator verifies which candidate is most promising with respect to the task goal. Second, it introduces a **Dual-Grain Cognitive Memory** architecture to support adaptation at two complementary time scales. A **Short-term Reflective Memory** captures local progress, execution context, and emerging failure patterns within an episode, while a **Long-term Principle Memory** abstracts prior successful and unsuccessful trajectories into reusable guiding and cautionary principles across episodes. Third, Robo-Cortex includes an **Autonomous Knowledge Induction** (AKI) mechanism that distills recurring multimodal behavior patterns into a structured *Navigation Heuristic Library* for knowledge generalization. In this way, Robo-Cortex goes beyond methods that primarily emphasize planning, memory, or reflection in isolation, and instead unifies multimodal decision-making, reflective memory, and cross-episode heuristic induction within a single embodied framework for continual strategy evolution [28, 31].

We evaluate Robo-Cortex on three complementary embodied tasks: image-goal navigation (IGNV), active recognition (AR), and active embodied question answering (AEQA) [41]. Across these settings, Robo-Cortex consistently improves both task success and exploration efficiency over strong baselines. We further consider two evaluation regimes: a *static* variant, *Robo-Cortex*, in which memory and heuristic guidance are fixed before testing for fair benchmark comparison, and an *adaptive* variant, *Robo-Cortex++*, in which the agent continues updating its heuristic library online during inference. This separation allows us to distinguish the intrinsic strength of the learned framework from the additional gains enabled by continual self-evolution. Beyond simulation, we also validate Robo-Cortex in real-world robotic deployments, demonstrating its effectiveness in physical environments.

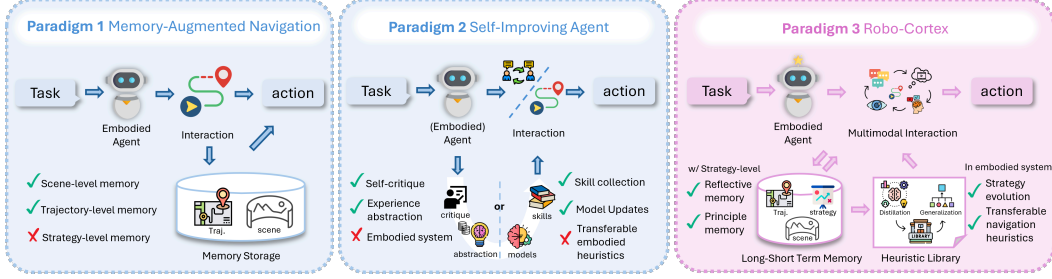


Figure 2: Comparison of prior embodied-agent paradigms and **Robo-Cortex**. Prior methods typically preserve scene or trajectory context, or improve through critique, skill accumulation, or model updates, but do not explicitly induce transferable embodied heuristics. In contrast, Robo-Cortex forms a self-evolving embodied loop that distills multimodal interaction experience into reusable navigation heuristics for future reflection, planning, and strategy evolution.

In summary, our contributions are threefold:

- We introduce **Robo-Cortex**, a unified embodied navigation framework that couples short-horizon imagine-then-verify planning with dual-grain cognitive memory to support both online decision-making and experience-aware reasoning.
- We propose **Autonomous Knowledge Induction (AKI)**, which drives the self-evolving capability of Robo-Cortex by inducing reusable heuristics from accumulated experience, updating them online across episodes, and generalizing them to unseen environments.
- We demonstrate across three complementary embodied navigation tasks and real-world robot deployments that Robo-Cortex significantly improves success, efficiency, and generalization to unseen environments, validating the benefit of continual heuristic evolution.

2 Related Work

2.1 Embodied Navigation & Multimodal Planning

Embodied navigation studies how an agent perceives, explores, and acts in partially observed environments to reach goals or complete tasks. Early progress was largely driven by training-based policies that map language instructions and egocentric visual observations to actions [2, 11, 29]. Subsequent work enriched this setting with stronger multimodal grounding, trajectory modeling, and spatial reasoning, enabling agents to better integrate visual perception, language, and navigation history for more robust decision making [13, 8, 9]. Embodied navigation has also been extended beyond route following to tasks such as active recognition and embodied question answering, where navigation serves not only to move, but also to gather task-relevant evidence through interaction with the environment [10, 1, 37].

More recently, LLM/VLM-based methods and embodied agents have introduced explicit reasoning, subgoal decomposition, and map-guided or world-model-based planning, substantially improving multimodal decision making within an episode [7, 46, 48, 41, 18]. However, these approaches still primarily optimize action selection under the current episode, whether through better grounding, stronger reasoning, or improved planning modules. By contrast, Robo-Cortex focuses on how embodied experience can be abstracted *across* episodes into reusable navigation heuristics that improve future planning and decision making. In this sense, Robo-Cortex studies embodied navigation not only as a perception and policy problem, but also as a continual strategy-induction problem.

2.2 Memory for Embodied Navigation

Memory is central to embodied navigation under partial observability, since the agent must retain information beyond the current observation over long horizons. Prior work therefore equips navigation agents with structured memory mechanisms such as spatial maps, semantic maps, and allocentric memory to preserve explored regions, object cues, and goal-relevant scene structure over time [6, 14].

Later work extends memory beyond geometric layout to include relational, episodic, and working-memory-style representations that maintain scene structure, object relations, and trajectory context for long-horizon decision making [35, 16, 36]. More recent methods further explore memory-efficient long-horizon navigation through annotated semantic maps, retrieved histories, and online map-based memory integrated with world models [43, 21, 44, 47].

While these methods substantially improve long-horizon navigation, they primarily retain *scene-level* or *trajectory-level* context. Robo-Cortex instead treats memory as a substrate for reflection and abstraction. Thus, unlike prior scene-centric memory mechanisms, Robo-Cortex uses memory not only to preserve context, but also to induce portable strategy.

2.3 Self-Improving Agents

A complementary line of work studies whether agents can improve by reflecting on their own behavior. Recent agentic frameworks show that verbal feedback, self-critique, iterative refinement, and anticipatory introspection can improve future performance without parameter updates [28, 19, 32]. Subsequent non-embodied systems further demonstrate that prior interactions can be summarized into higher-level guidance that transfers across trials and tasks [24, 45, 20, 22, 34]. These works highlight the value of reflection and experience abstraction, but they are typically developed in textual or code-centric settings rather than closed-loop embodied interaction.

Related ideas have also begun to emerge in embodied settings, but with different emphases. Voyager learns a library of executable skills in a simulator-native domain, EvoAgent continually updates the world model for long-horizon embodied tasks, and C-NAV adapts navigation representations to new object categories under continual learning [31, 40, 39]. Other recent navigation works have also explored cross-episode experience accumulation and continual refinement [17, 33]. Robo-Cortex differs by abstracting multimodal experience into *transferable navigation heuristics* that guide future reflection and planning, generalize to unseen environments, and remain updatable online during inference. This makes Robo-Cortex a framework for continual strategy evolution rather than merely continual refinement.

3 The Robo-Cortex Framework

3.1 System Overview

Robo-Cortex is a self-evolving framework integrating three components: (1) an *Imagine-then-Verify* planning loop for online closed-loop planning, (2) a *Dual-Grain Cognitive Memory* module that combines short-term reflective and long-term principle memory, and (3) an *Autonomous Knowledge Induction* (AKI) module that distills reusable heuristics from accumulated experience.

At each decision step, the agent observes the current state and generates a set of task-conditioned candidate actions or semantic plans. A subtask distributor aligns these candidates with the current semantic goal, after which a world model imagines the future visual outcomes induced by each candidate. A vision-language evaluator then assesses these imagined futures and selects the most promising action or subtask for execution. The selected decision is executed, and the resulting state transition is written to the memory bank. Within each episode, the Short-term Reflective Memory (SRM) module captures local progress and failure patterns to refine subsequent planning in the same trajectory. Across episodes, the Long-term Principle Memory (LPM) module consolidates structured trajectories and their associated principles into persistent knowledge for future planning. On top of this, Autonomous Knowledge Induction (AKI) distills recurring behavioral regularities into reusable heuristics, allowing Robo-Cortex to leverage prior experience as transferable strategic guidance for future planning, and thereby generalize more effectively to unseen environments. Through this design, Robo-Cortex integrates online decision-making, persistent cognitive memory, and continual strategy evolution into a unified embodied navigation system.

3.2 Imagine-then-Verify Planning Loop

Since long-range predictions are particularly susceptible to accumulated model error under partial observability, Robo-Cortex avoids committing to extended open-loop action sequences and instead

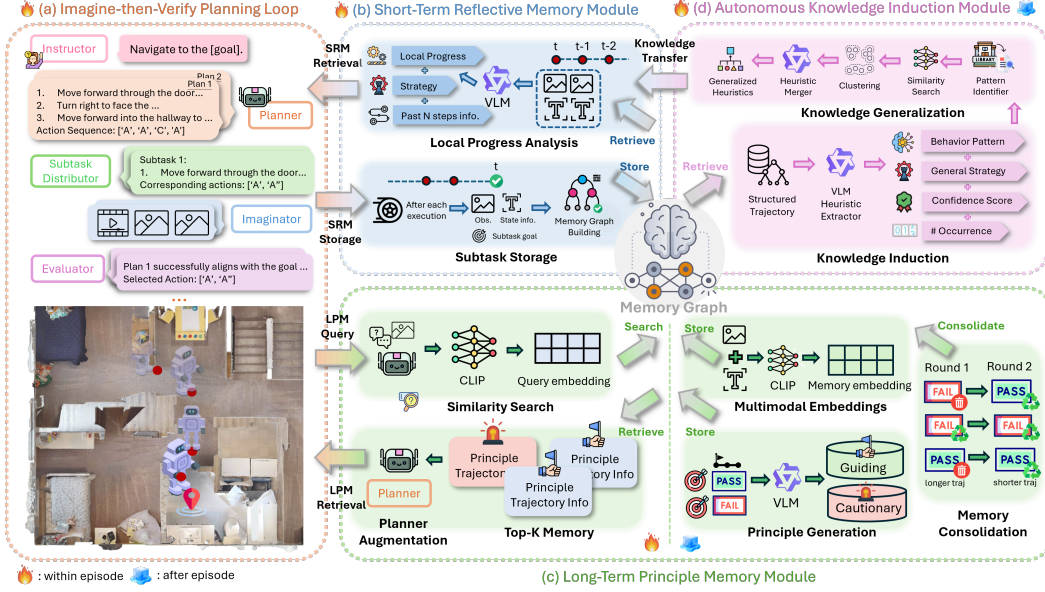


Figure 3: **Internal Workflow of Robo-Cortex.** Robo-Cortex integrates (a) **Imagine-then-Verify Planning Loop**, (b) **Short-Term Reflective Memory**, (c) **Long-Term Principle Memory** and (d) **Autonomous Knowledge Induction** through a shared memory graph. During execution, recent subtasks are analyzed for local progress and failure patterns, while related past experiences are retrieved as principle-level guidance. Meanwhile, accumulated trajectories are continually abstracted into reusable navigation heuristics and fed back into future reflection and planning, enabling continual strategy evolution over time.

performs short-horizon imagine-select-execute planning. This design supports frequent replanning, allowing the agent to continually revise its decisions as new observations become available.

Let o_t denote the current observation at time step t , and let $\mathcal{P}_t = \{p_t^{(1)}, \dots, p_t^{(N)}\}$ denote the candidate plans proposed by the planner. Each candidate plan $p_t^{(i)}$ consists of a low-level action sequence $a_t^{(i)}$ and associated high-level reasoning $r_t^{(i)}$:

$$p_t^{(i)} = \left(a_t^{(i)}, r_t^{(i)} \right). \quad (1)$$

Since the granularity of the high-level reasoning may not match that of the low-level action sequence, a subtask distributor aligns the discrete actions with the corresponding semantic rationale(s), producing a sequence of semantically grounded subtask units:

$$\mathcal{S}_t^{(i)} = \mathcal{D}\left(a_t^{(i)}, r_t^{(i)}\right), \quad (2)$$

where $\mathcal{D}(\cdot)$ denotes the subtask distributor. This action-to-reason alignment ensures that each executable action is associated with an explicit semantic rationale, improving the interpretability of action selection and execution.

For each candidate, the world model predicts a short future rollout,

$$\hat{o}_{t+1:t+h}^{(i)} = \mathcal{W}(o_t, \mathcal{S}_t^{(i)}), \quad (3)$$

where $\mathcal{W}(\cdot)$ denotes the world model and h is the imagination horizon. The predicted rollout is then passed to a vision-language evaluator, which scores each candidate according to its expected progress toward the task goal g . The selected plan is:

$$p_t^* = \arg \max_{p_t^{(i)} \in \mathcal{P}_t} \text{Score}\left(\hat{o}_{t+1:t+h}^{(i)}, g\right). \quad (4)$$

A key property of this design is frequent replanning. After executing the selected decision, Robo-Cortex updates the state and re-enters the planning loop rather than trusting a long open-loop rollout.

This produces a closed-loop decision process that uses imagination locally while remaining responsive to newly observed evidence.

3.3 Dual-Grain Cognitive Memory

Robo-Cortex organizes experience as a structured memory graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, which supports reasoning at two complementary granularities: fine-grained local reflection within an episode and coarse-grained principle retrieval across episodes. The node set is defined as:

$$\mathcal{V} = \mathcal{V}^{\text{root}} \cup \mathcal{V}^{\text{traj}} \cup \mathcal{V}^{\text{sub}}, \quad (5)$$

where root, trajectory, and subtask nodes represent episodes, decision steps, and executed semantic units, respectively. The edge set includes hierarchical parent-child links and temporal links between consecutive subtasks, enabling both local trajectory analysis and cross-episode memory consolidation.

Short-term reflective memory. Short-term reflective memory (SRM) operates over a sliding window of recent subtasks. Let:

$$W_t = \{v_{t-w+1}^{\text{sub}}, \dots, v_t^{\text{sub}}\} \quad (6)$$

denote the most recent window of subtasks. Once enough subtasks have been accumulated, an SRM analyzer summarizes this local trajectory segment as:

$$s_t^{\text{SRM}} = f_{\text{srn}}(W_t). \quad (7)$$

The resulting summary captures local progress, failure patterns, and ongoing subgoal context. This reflective cue is then appended to the planner context for subsequent decisions within the same episode, enabling the agent to preserve short-term behavioral continuity, avoid repeatedly executing ineffective actions, and continue partially completed approaches without replanning the entire strategy at every step.

Long-term principle memory. Long-term principle memory (LPM) is constructed after each episode ends. For each subtask, Robo-Cortex traverses the temporal graph forward to collect the downstream trajectory:

$$\tau_i = \{v_i^{\text{sub}}, v_{i+1}^{\text{sub}}, \dots, v_{i+k}^{\text{sub}}\}, \quad (8)$$

where k is a configured horizon. A principle analyzer converts this trajectory into a guiding principle for successful episodes or a cautionary principle for failed episodes.

At test time, Robo-Cortex retrieves prior subtasks by nearest-neighbor matching in a goal-conditioned state embedding space, retaining only matches above a threshold δ_{lpm} .

For each matched subtask, LPM returns not only episodic trajectories but also principle-level abstractions distilled from prior successes and failures, allowing the planner to exploit transferable strategic knowledge rather than merely replaying scene-specific actions. This makes the retrieved memory more robust to environmental variation.

Memory consolidation. To maintain a compact yet informative memory over continual self-evolution, Robo-Cortex performs goal-wise consolidation over stored episodes. Successful episodes are prioritized over failed ones, and among successful episodes, shorter trajectories are retained as more efficient behavioral templates. When no successful episode is available, diverse failed episodes are preserved. The rationale is to store the most efficient successful behavior once it is available, while otherwise keeping varied failure trajectories that may reveal complementary failure modes for later principle induction.

3.4 Autonomous Knowledge Induction (AKI)

While SRM and LPM enable local reflection and episodic retrieval, they do not by themselves allow the agent to *evolve* its decision strategy over time. AKI addresses this limitation by continuously abstracting the agent’s own accumulated interaction history into reusable and generalized behavioral heuristics, and feeding the induced knowledge back into future reflection and planning. In this way, Robo-Cortex moves beyond episodic memory alone and progressively converts past experience into transferable strategic knowledge.

Table 1: Comparison with state-of-the-art methods on IGINav, AR, and AEQA. Robo-Cortex is evaluated in both static and adaptive settings for each task.

Method	IGINav			AR		AEQA		
	SR↑	SPL↑	Mean Traj.↓	SR↑	Mean Traj.↓	Score↑	Mean Traj.↓	SPL↑
MapGPT [7]	17.36	15.11	56.48	10.14	9.19	25.50	18.58	22.40
WMNav [21]	26.39	23.36	50.60	12.96	8.89	19.50	19.98	<u>23.60</u>
World-In-World [41]	38.57	27.50	47.10	20.68	<u>7.09</u>	27.19	20.53	20.56
Robo-Cortex	<u>41.26</u>	<u>31.66</u>	49.90	<u>22.39</u>	6.97	<u>29.78</u>	<u>17.34</u>	21.40
Robo-Cortex++	45.07	35.06	<u>47.50</u>	23.88	7.57	30.59	16.61	25.57

After each episode, the knowledge agent loads the corresponding structured trajectory from the memory graph and applies a vision-language heuristic extractor to identify recurring success and failure patterns. Each extracted heuristic is represented as:

$$h = (\rho, d, a, c, y), \quad (9)$$

where ρ is a pattern identifier, d is a problem description, a is a recommended strategy, $c \in [0, 1]$ is a confidence score, and $y \in \{\text{success, failure}\}$ indicates whether the heuristic is derived from successful or failed behavior.

As new episodes accumulate, the extracted heuristics are merged into a shared knowledge base. Heuristics are first grouped by pattern identifier, and optionally further refined by semantic similarity over their textual descriptions and recommended strategies. For each resulting cluster $\mathcal{C}$, a merger model produces a generalized heuristic:

$$\tilde{h}_{\mathcal{C}} = (\rho, \tilde{d}, \tilde{a}, \tilde{c}), \quad (10)$$

where $\tilde{d}$ and $\tilde{a}$ denote the merged problem description and strategy, and $\tilde{c}$ is the aggregated confidence. Through this process, Robo-Cortex incrementally refines its heuristic library over time, moving from isolated episodic traces to compact behavioral knowledge supported by repeated evidence across episodes.

Unlike LPM, which retrieves principle memories from specific matched experiences, AKI performs cross-episode abstraction to induce shared heuristics that are not tied to any single trajectory. As a result, the induced knowledge is more transferable than raw action traces or scene-specific memories, and can provide strategic guidance that generalizes across varied situations, including unseen environments.

Finally, high-confidence recurrent heuristics are fed back into the online system as structured guidance for short-term reflective analysis and planning. These heuristics provide priors on likely failure modes and promising behaviors, helping the agent interpret recent interaction history more effectively and produce more informative reflective summaries for subsequent decisions. This closes the self-evolving loop of Robo-Cortex: experience is accumulated through interaction, abstracted into reusable knowledge, and then reused to improve future behavior.

4 Experiments

4.1 Experimental Setup

Datasets and evaluation metrics. We evaluate Robo-Cortex on three embodied tasks following [41]: image-goal navigation (IGINav), active recognition (AR), and active embodied question answering (AEQA). In particular, IGINav and AEQA are evaluated on Habitat-based episodes built on the HM3D validation split [26], while AR is evaluated on Habitat-based episodes built on MP3D [5]. Together, these benchmarks span complementary forms of embodied navigation and provide a broad test of generalization across task settings.

For **IGINav**, the agent navigates to a target location specified by a goal image. We report *Success Rate* (SR), *Success weighted by Path Length* (SPL), and mean trajectory length. For **AR**, the agent explores the scene to recognize the target object category. We report SR and mean trajectory length. For **AEQA**, the agent explores the environment to answer a scene-grounded natural-language question. We report the protocol-defined *Answer Score*, SPL, and mean trajectory length.

Table 2: Memory accumulation study on the seen split. We compare the Basic Pipeline and Dual-Grain Memory variants across multiple rounds to evaluate how progressive experience accumulation improves performance.

Method	Round	IGNav			AR		AEQA		
		SR↑	SPL↑	Mean Traj.↓	SR↑	Mean Traj.↓	Score↑	Mean Traj.↓	SPL↑
Basic Pipeline + SRM	1	36.11	28.16	50.90	20.93	6.61	25.55	19.22	18.55
		40.18	30.25	50.05	20.93	6.22	30.83	18.80	23.77
+ LPM + LPM & SRM	2	37.50	28.74	50.90	21.71	6.55	25.00	19.46	18.75
		42.65	32.54	48.90	20.16	6.26	33.70	17.50	21.12
+ LPM + LPM & SRM	3	43.06	34.94	47.30	20.97	6.03	28.80	18.71	21.66
		44.29	34.74	47.90	24.03	6.18	31.71	17.15	27.51

Table 3: Heuristic transfer study on the unseen split. We compare manual guidance, online updating, transferred heuristics, and transferred heuristics with continued online updating to evaluate how induced heuristics generalize and adapt in novel environments. Here, *heur.* denotes heuristics

Method	IGNav			AR		AEQA		
	SR↑	SPL↑	Mean Traj.↓	SR↑	Mean Traj.↓	Score↑	Mean Traj.↓	SPL↑
Basic Pipeline	34.72	24.03	48.50	19.42	7.91	32.42	19.06	26.80
w/ manual <i>heur.</i>	38.89	30.96	50.10	18.71	7.82	31.59	18.29	27.04
w/ transferred <i>heur.</i>	48.61	39.33	46.20	23.02	7.78	32.88	19.47	24.31
w/ seen <i>heur.</i> + update	41.67	31.69	49.50	19.42	7.58	33.06	18.51	26.69
w/ manual <i>heur.</i> + update	36.62	28.06	50.70	22.30	7.71	35.33	17.97	28.47
w/ transferred <i>heur.</i> + update	41.67	34.84	48.30	23.02	7.80	32.22	17.95	25.50

Baselines. We compare Robo-Cortex with three recent strong baselines: MapGPT [7], WMNav [21], and World-In-World [41]. They represent competitive embodied agents with different emphases on map-guided planning, world-model-based navigation, and closed-loop embodied decision making.

Implementation details. All simulation experiments are conducted in Habitat-sim [27]. We use Qwen2.5-VL-72B-Instruct-AWQ [4] as the shared vision-language backbone for planning, memory analysis, and AKI, and Wan2.1-I2V-A14B-480P-Diffusers [30] as the backbone for world-model imagination. For efficiency, planning and memory-related modules are deployed as separate vLLM services, while sharing the same backbone weights. Moreover, the navigation action space is discretized into a forward motion of 0.20 m and left/right rotations of 22.5°. Additional implementation details are provided in the supplementary material.

4.2 Comparison with SOTA Methods

We compare Robo-Cortex with prior state-of-the-art methods [7, 21, 41]. Robo-Cortex denotes the full *static* system with fixed heuristic guidance during evaluation, while Robo-Cortex++ denotes the *adaptive* variant that updates heuristics online during inference. We report this variant additionally to show the gains enabled by continual self-evolution beyond a fixed policy.

As shown in Table 1, Robo-Cortex consistently outperforms prior methods across all three embodied tasks. Under the static setting, it already achieves the strongest overall performance, reaching 41.26% SR and 31.66% SPL on IGINav, 22.39% SR on AR, and 29.78 Answer Score on AEQA. Compared with the strongest baseline, Robo-Cortex improves IGINav by +2.69% SR and +4.16% SPL, while also achieving the best AR success rate and the shortest trajectories on both AR and AEQA. These results indicate that Robo-Cortex improves not only task success, but also exploration quality and decision efficiency.

The adaptive variant further highlights the self-evolving nature of the framework. With online heuristic updating during inference, Robo-Cortex++ improves the static model on all three tasks, reaching 45.07% SR on IGINav, 23.88% SR on AR, and 30.59 Answer Score with 25.57% SPL

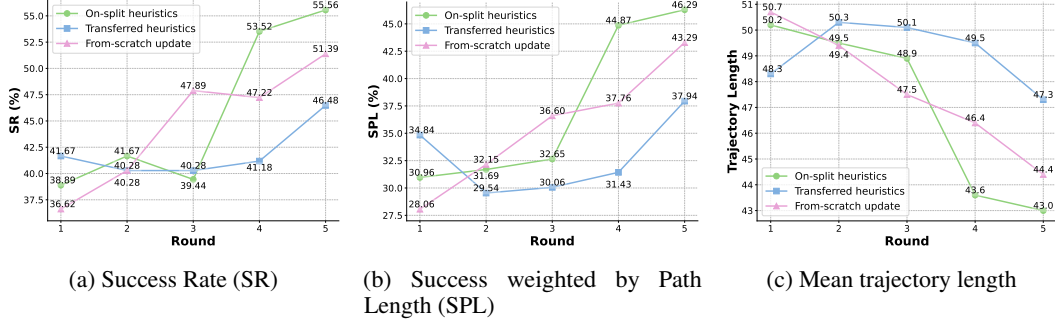


Figure 4: **Round-wise update dynamics on IGVNav.** We visualize how updating over multiple rounds affects IGVNav under three initialization settings: on-split heuristics, transferred heuristics, and from-scratch update. Transferred heuristics provide the strongest initial prior, while continued updating on the target split yields larger long-term gains in both success and efficiency.

on AEQA. This shows that Robo-Cortex is not only a stronger static embodied agent, but also a framework whose strategy can continue to improve through online refinement.

4.3 Ablation Study

We separate the evaluation set into two disjoint halves, *i.e.*, seen and unseen, to comprehensively evaluate Robo-Cortex. On the seen split, we analyze how SRM and LPM improve performance as experience accumulates over multiple rounds. On the unseen split, we evaluate whether heuristics extracted from prior experience transfer to novel episodes, and whether further online updating provides additional gains. As a reference, we define a **Basic Pipeline** that contains only the core Imagine-then-Verify loop, including planning, world-model imagination, evaluation, and execution, while excluding SRM, LPM, and AKI.

Seen split. We first analyze the contribution of Dual-Grain Cognitive Memory under repeated evaluation on the same split. Since SRM operates within an episode whereas LPM depends on accumulated past experience, we report the Basic Pipeline and **+SRM** in round 1, and evaluate LPM-based variants after repeated rounds. As shown in Table 2, **SRM** already provides clear first-round gains, improving IGVNav from 36.11% to 40.18% SR and AEQA from 25.55 to 30.83 Answer Score, while also shortening the AR trajectory. In contrast, the benefit of **LPM** becomes more pronounced as experience accumulates: its gains are modest at round 2 but substantially stronger by round 3, where it reaches 43.06% SR on IGVNav and improves AEQA to 28.80 Answer Score with shorter trajectories. The full **+LPM & SRM** model yields the strongest and most consistent overall results, achieving 44.29% SR on IGVNav, 24.03% SR on AR, and 31.71 Answer Score on AEQA at round 3. These results support the complementary roles of the two memory components: SRM improves within-episode reflection and failure recovery, while LPM provides increasingly useful cross-episode strategic guidance as experience accumulates.

Unseen split. We next isolate heuristic transfer on novel episodes. In this setting, no LPM is used, so the comparison focuses on heuristic guidance and online updating. As shown in Table 3, manually written heuristics provide a useful prior, improving IGVNav from 34.72% to 38.89% SR, but their benefits are less consistent on AR and AEQA. In contrast, heuristics transferred from the seen split generalize strongly to unseen environments: without any further updating, **w/ transferred heuristics** achieves the best IGVNav performance (48.61% SR) and the highest AR success rate (23.02%), showing that AKI captures portable success and failure patterns rather than split-specific trajectories. Online updating on the unseen split yields a more nuanced effect. While **w/ transferred heuristics + update** still outperforms the Basic Pipeline on IGVNav and AR, it does not surpass the fixed transferred-heuristic setting, suggesting that strong transferred heuristics already provide a high-quality prior and that aggressive online rewriting on limited unseen episodes may partially overwrite useful guidance. Overall, the unseen-split results validate the central role of AKI: heuristics induced from prior experience are transferable to novel environments, and their main value lies in supplying compact strategic priors that complement, rather than replace, online adaptation.

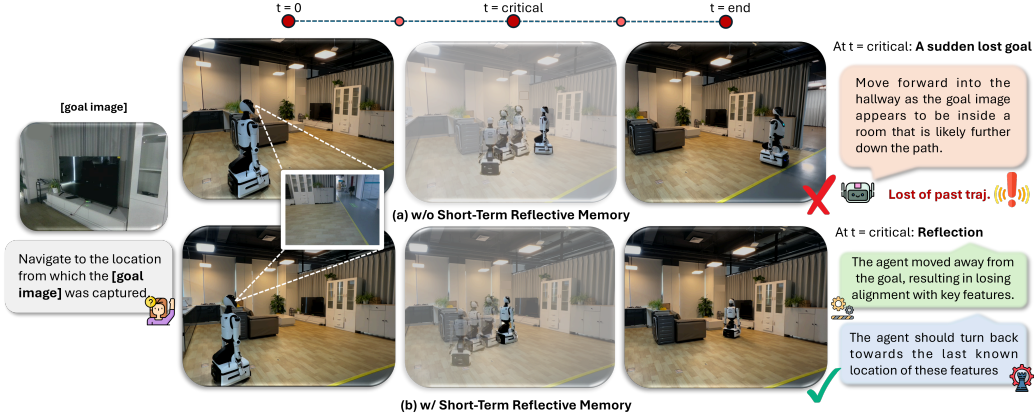


Figure 5: **Real-world benefit of short-term reflection.** In an image-goal navigation task, the robot without SRM drifts away from the target after losing goal-relevant cues at a critical step. With SRM, Robo-Cortex detects the misalignment, reflects on the failure, and recovers by returning toward the last known goal-consistent region, leading to successful completion.

Round-wise update dynamics on IGNv. To further analyze how online updating changes performance over time, we visualize the round-wise dynamics on IGNv in Fig. 4. This figure should be viewed as a case study of update behavior, while Tables 2 and 3 remain the main multi-task ablation results. The transferred setting provides the strongest initial prior, achieving 41.67% SR and 34.84% SPL in round 1, which confirms that heuristics induced from prior experience are immediately useful on unseen episodes. However, its gains plateau quickly, then reaching 46.48% SR by round 5, with trajectory length 47.3. In contrast, from-scratch updating improves more steadily, increasing from 36.62% SR in round 1 to 51.39% in round 5, while shortening the trajectory from 50.7 to 44.4. The strongest long-run performance is obtained by on-split heuristics, which rise from 38.89% SR and 30.96% SPL in round 1 to **55.56%** SR and **46.29%** SPL in round 5, together with a trajectory reduction from 50.2 to 43.0. Notably, this setting shows a sharp improvement after round 3, suggesting that once sufficient target-split experience has accumulated, the induced heuristics become substantially more effective. Overall, these curves reveal a clear trade-off between *fast transfer* and *long-term adaptation*: transferred heuristics offer the best early prior, whereas repeated updating on the target split ultimately yields the strongest navigation performance.

4.4 Real-World Experiment

We conduct a preliminary real-world study on image-goal navigation (IGNv) in two indoor scenes (i.e. living room and supermarket). The Basic Pipeline succeeds on 4/10 goals, showing that the closed-loop Imagine-then-Verify pipeline transfers to physical deployment, but remains vulnerable to appearance ambiguity and local drift. Across failed trials, a recurring failure mode emerges: the robot initially makes plausible progress, when faces alignment lost with key visual cues, it continues acting without recognizing the deviation.

Fig. 5 shows a representative recovery case with SRM. Using navigation heuristics derived from simulation, the system detects the loss of alignment, identifies the last known goal-consistent region, and redirects the robot to recover. Although preliminary, this result suggests that the failure modes targeted by Robo-Cortex are not simulator-specific, and that these navigation heuristics can remain useful under real-world reflection.

5 Conclusion and Limitations

We presented **Robo-Cortex**, a self-evolving embodied agent that reframes navigation from isolated action selection to continual strategy evolution. By combining imagine-then-verify planning, dual-grain cognitive memory, and autonomous knowledge induction, Robo-Cortex transforms embodied experience into reusable heuristics for future decision making. Across three embodied tasks, Robo-Cortex consistently improves success, efficiency, and generalization, while Robo-Cortex++ further

shows that the learned strategy can continue to evolve through online memory and heuristic updating during inference. The transfer of induced heuristics to unseen environments, together with evidence from real-world robotic deployment, suggests that Robo-Cortex captures portable strategic structure rather than merely benchmark-specific behavior.

Despite these promising results, several limitations remain. Our current real-world validation is still preliminary and limited in scale, and broader physical experiments are needed to more fully assess robustness in diverse deployment settings. In addition, although the framework is intended to be model-agnostic, we have not yet systematically evaluated Robo-Cortex with different vision-language backbones or world models. Extending the evaluation across a wider range of VLMs and world models is therefore an important direction for future work.

References

- [1] Phil Ammirato, Patrick Poirson, Eunbyung Park, Jana Košecká, and Alexander C Berg. A dataset for developing and benchmarking active vision. In *2017 IEEE international conference on robotics and automation (ICRA)*, pages 1378–1385. IEEE, 2017.
- [2] Peter Anderson, Qi Wu, Damien Teney, Jake Bruce, Mark Johnson, Niko Sünderhauf, Ian Reid, Stephen Gould, and Anton Van Den Hengel. Vision-and-language navigation: Interpreting visually-grounded navigation instructions in real environments. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3674–3683, 2018.
- [3] Héctor Azpúrua, Maíra Saboia, Gustavo M Freitas, Lillian Clark, Ali-akbar Agha-mohammadi, Gustavo Pessin, Mario FM Campos, and Douglas G Macharet. A survey on the autonomous exploration of confined subterranean spaces: Perspectives from real-word and industrial robotic deployments. *Robotics and Autonomous Systems*, 160:104304, 2023.
- [4] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibong Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, et al. Qwen2. 5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- [5] Angel Chang, Angela Dai, Thomas Funkhouser, Maciej Halber, Matthias Niessner, Manolis Savva, Shuran Song, Andy Zeng, and Yinda Zhang. Matterport3d: Learning from rgb-d data in indoor environments. *arXiv preprint arXiv:1709.06158*, 2017.
- [6] Devendra Singh Chaplot, Dhiraj Prakashchand Gandhi, Abhinav Gupta, and Russ R Salakhutdinov. Object goal navigation using goal-oriented semantic exploration. *Advances in Neural Information Processing Systems*, 33:4247–4258, 2020.
- [7] Jiaqi Chen, Bingqian Lin, Ran Xu, Zhenhua Chai, Xiaodan Liang, and Kwan-Yee Wong. Mapgpt: Map-guided prompting with adaptive path planning for vision-and-language navigation. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9796–9810, 2024.
- [8] Shizhe Chen, Pierre-Louis Guhur, Cordelia Schmid, and Ivan Laptev. History aware multimodal transformer for vision-and-language navigation. *Advances in neural information processing systems*, 34:5834–5847, 2021.
- [9] Shizhe Chen, Pierre-Louis Guhur, Makarand Tapaswi, Cordelia Schmid, and Ivan Laptev. Think global, act local: Dual-scale graph transformer for vision-and-language navigation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16537–16547, 2022.
- [10] Abhishek Das, Samyak Datta, Georgia Gkioxari, Stefan Lee, Devi Parikh, and Dhruv Batra. Embodied question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1–10, 2018.
- [11] Daniel Fried, Ronghang Hu, Volkan Cirik, Anna Rohrbach, Jacob Andreas, Louis-Philippe Morency, Taylor Berg-Kirkpatrick, Kate Saenko, Dan Klein, and Trevor Darrell. Speaker-follower models for vision-and-language navigation. *Advances in neural information processing systems*, 31, 2018.
- [12] Jing Gu, Eliana Stefani, Qi Wu, Jesse Thomason, and Xin Wang. Vision-and-language navigation: A survey of tasks, methods, and future directions. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 7606–7623, 2022.
- [13] Weituo Hao, Chunyuan Li, Xiujun Li, Lawrence Carin, and Jianfeng Gao. Towards learning a generic agent for vision-and-language navigation via pre-training. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 13137–13146, 2020.
- [14] Joao F Henriques and Andrea Vedaldi. Mapnet: An allocentric spatial memory for mapping environments. In *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 8476–8484, 2018.

- [15] David A Kolb. *Experiential learning: Experience as the source of learning and development*. FT press, 2014.
- [16] Hongxin Li, Zeyu Wang, Xu Yang, Yuran Yang, Shuqi Mei, and Zhaoxiang Zhang. Memonav: Working memory model for visual navigation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 17913–17922, 2024.
- [17] Zhiyuan Li, Yanfeng Lv, Ziqin Tu, Di Shang, and Hong Qiao. Vision-language navigation with continual learning. *arXiv preprint arXiv:2409.02561*, 2024.
- [18] Bingshuai Liu, Chenyang Lyu, Zijun Min, Zhanyu Wang, Jinsong Su, and Longyue Wang. Retrieval-augmented multi-modal chain-of-thoughts reasoning for large language models. In *2025 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8. IEEE, 2025.
- [19] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, et al. Self-refine: Iterative refinement with self-feedback. *Advances in neural information processing systems*, 36:46534–46594, 2023.
- [20] Bodhisattwa Prasad Majumder, Bhavana Dalvi Mishra, Peter Jansen, Oyvind Tafjord, Niket Tandon, Li Zhang, Chris Callison-Burch, and Peter Clark. Clin: A continually learning language agent for rapid task adaptation and generalization. *arXiv preprint arXiv:2310.10134*, 2023.
- [21] Dujun Nie, Xianda Guo, Yiqun Duan, Ruijun Zhang, and Long Chen. Wmnav: Integrating vision-language models into world models for object goal navigation. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 2392–2399. IEEE, 2025.
- [22] Siru Ouyang, Jun Yan, I Hsu, Yanfei Chen, Ke Jiang, Zifeng Wang, Rujun Han, Long T Le, Samira Daruki, Xiangru Tang, et al. Reasoningbank: Scaling agent self-evolving with reasoning memory. *arXiv preprint arXiv:2509.25140*, 2025.
- [23] Yiyuan Pan, Yunzhe Xu, Zhe Liu, and Hesheng Wang. Planning from imagination: Episodic simulation and episodic memory for vision-and-language navigation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 6345–6353, 2025.
- [24] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th annual acm symposium on user interface software and technology*, pages 1–22, 2023.
- [25] Amin Parvaneh, Ehsan Abbasnejad, Damien Teney, Javen Qinfeng Shi, and Anton Van den Hengel. Counterfactual vision-and-language navigation: Unravelling the unseen. *Advances in neural information processing systems*, 33:5296–5307, 2020.
- [26] Santhosh K Ramakrishnan, Aaron Gokaslan, Erik Wijmans, Oleksandr Maksymets, Alex Clegg, John Turner, Eric Undersander, Wojciech Galuba, Andrew Westbury, Angel X Chang, et al. Habitat-matterport 3d dataset (hm3d): 1000 large-scale 3d environments for embodied ai. *arXiv preprint arXiv:2109.08238*, 2021.
- [27] Manolis Savva, Abhishek Kadian, Oleksandr Maksymets, Yili Zhao, Erik Wijmans, Bhavana Jain, Julian Straub, Jia Liu, Vladlen Koltun, Jitendra Malik, et al. Habitat: A platform for embodied ai research. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 9339–9347, 2019.
- [28] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [29] Hao Tan, Licheng Yu, and Mohit Bansal. Learning to navigate unseen environments: Back translation with environmental dropout. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2610–2621, 2019.

- [30] Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Feiwei Yu, Haiming Zhao, Jianxiao Yang, et al. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*, 2025.
- [31] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [32] Haoyu Wang, Tao Li, Zhiwei Deng, Dan Roth, and Yang Li. Devil’s advocate: Anticipatory reflection for llm agents. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 966–978, 2024.
- [33] Xudong Wang, Jiahua Dong, Baichen Liu, Qi Lyu, Lianqing Liu, and Zhi Han. Lifelong embodied navigation learning. *arXiv preprint arXiv:2603.06073*, 2026.
- [34] Rong Wu, Xiaoman Wang, Jianbiao Mei, Pinlong Cai, Daocheng Fu, Cheng Yang, Licheng Wen, Xueming Yang, Yufan Shen, Yuxin Wang, et al. Evolver: Self-evolving llm agents through an experience-driven lifecycle. *arXiv preprint arXiv:2510.16079*, 2025.
- [35] Yi Wu, Yuxin Wu, Aviv Tamar, Stuart Russell, Georgia Gkioxari, and Yuandong Tian. Bayesian relational memory for semantic visual navigation. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 2769–2779, 2019.
- [36] Yuncong Yang, Han Yang, Jiachen Zhou, Peihao Chen, Hongxin Zhang, Yilun Du, and Chuang Gan. 3d-mem: 3d scene memory for embodied exploration and reasoning. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 17294–17303, 2025.
- [37] Naoki Yokoyama, Ram Ramrakhya, Abhishek Das, Dhruv Batra, and Sehoon Ha. Hm3d-ovon: A dataset and benchmark for open-vocabulary object goal navigation. In *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 5543–5550. IEEE, 2024.
- [38] Felix Yu, Zhiwei Deng, Karthik Narasimhan, and Olga Russakovsky. Take the scenic route: Improving generalization in vision-and-language navigation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, pages 920–921, 2020.
- [39] Ming-Ming Yu, Fei Zhu, Wenzhuo Liu, Yirong Yang, Qunbo Wang, Wenjun Wu, and Jing Liu. C-nav: Towards self-evolving continual object navigation in open world. *arXiv preprint arXiv:2510.20685*, 2025.
- [40] Siyu Yuan, Kaitao Song, Jiangjie Chen, Xu Tan, Dongsheng Li, and Deqing Yang. Evoagent: Towards automatic multi-agent generation via evolutionary algorithms. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 6192–6217, 2025.
- [41] Jiahao Zhang, Muqing Jiang, Nanru Dai, Taiming Lu, Arda Uzunoglu, Shunchi Zhang, Yana Wei, Jiahao Wang, Vishal M Patel, Paul Pu Liang, et al. World-in-world: World models in a closed-loop world. *arXiv preprint arXiv:2510.18135*, 2025.
- [42] Jiazhaoh Zhang, Anqi Li, Yunpeng Qi, Minghan Li, Jiahao Liu, Shaoan Wang, Haoran Liu, Gengze Zhou, Yuze Wu, Xingxing Li, et al. Embodied navigation foundation model. *arXiv preprint arXiv:2509.12129*, 2025.
- [43] Lingfeng Zhang, Xiaoshuai Hao, Qinwen Xu, Qiang Zhang, Xinyao Zhang, Pengwei Wang, Jing Zhang, Zhongyuan Wang, Shanghang Zhang, and Renjing Xu. Mapnav: A novel memory representation via annotated semantic maps for vlm-based vision-and-language navigation. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 13032–13056, 2025.
- [44] Lingfeng Zhang, Yuecheng Liu, Zhanguang Zhang, Matin Aghaei, Yaochen Hu, Hongjian Gu, Mohammad Ali Alomrani, David Gamaliel Arcos Bravo, Raika Karimi, Atia Hamidizadeh, et al. Mem2ego: Empowering vision-language models with global-to-ego memory for long-horizon embodied navigation. *arXiv preprint arXiv:2502.14254*, 2025.

- [45] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. Expel: Llm agents are experiential learners. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19632–19642, 2024.
- [46] Duo Zheng, Shijia Huang, Lin Zhao, Yiwu Zhong, and Liwei Wang. Towards learning a generalist model for embodied navigation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13624–13634, 2024.
- [47] Qi Zheng, Daqing Liu, Chaoyue Wang, Jing Zhang, Dadong Wang, and Dacheng Tao. Esceme: Vision-and-language navigation with episodic scene memory. *International Journal of Computer Vision*, 133(1):254–274, 2025.
- [48] Gengze Zhou, Yicong Hong, and Qi Wu. Navgpt: Explicit reasoning in vision-and-language navigation with large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 7641–7649, 2024.