

MANTA: Multi-Agent Network Topology Adaptation for Self-Evolving Multi-Agent Systems

MaoXun Huang^{1,†}, Jerry Wang^{2,†}, Yi-Cheng Lai^{3,†}

Zhenxing Zhang¹, Claire Cardie¹, Hen-Hsen Huang³

¹Department of Computer Science, Cornell University, United States

²Department of Computer Science, University of Illinois Urbana-Champaign, United States

³Institute of Information Science, Academia Sinica, Taiwan

[†]Equal contribution

Abstract

Large language model-based multi-agent systems improve complex problem solving through task decomposition, agent specialization, information exchange, and intermediate validation. However, existing systems typically treat communication topology as a fixed design choice or an offline optimization target. We introduce **MANTA**, a framework for **Multi-Agent Network Topology Adaptation** that enables communication structures to self-evolve at inference time. Before execution, MANTA initializes a task-conditioned topology from prior structural experience. During deployment, it monitors collaboration traces and applies bounded structural updates when the current organization becomes insufficient. These updates can modify agent roles, communication links, execution order, information visibility, and validation pathways while preserving the task interface and agent budget. We evaluate MANTA against representative single-agent and multi-agent baselines on five benchmarks spanning information seeking, tool use, planning, workflow execution, and mathematical reasoning. MANTA achieves the highest average score of 74.0, outperforming the strongest baseline by 5.8 percentage points and obtaining the best result on PlanCraft. These results show that inference-time self-improvement can extend to the architecture of collaboration itself.

Introduction

Biological systems adapt not only before encountering their environments, but also through continued interaction with environmental pressures. Modern AI systems are undergoing a similar transition from predominantly offline optimization toward adaptation during execution. Large language models (LLMs) increasingly operate as components of agentic systems that reason, use tools, retain experience, and coordinate with other agents. Rather than relying only on pre-deployment weight updates, these systems can adapt at inference time through prompts, demonstrations, reasoning traces, memories, tools, workflows, and coordination protocols. In-context learning first showed that demonstrations can induce task adaptation during inference (Brown et al. 2020), while chain-of-thought prompting and ReAct demonstrated the value of intermediate reasoning and reasoning-and-acting trajectories (Wei et al. 2023; Yao et al. 2023b).

Existing self-improvement methods adapt outputs, prompts, reasoning traces, and memory (Madaan et al. 2023; Shinn et al. 2023). Most approaches, however, adapt individual agents rather than how multiple agents are organized and communicate.

Multi-agent frameworks decompose complex tasks across specialized roles and collaborative reasoning processes, allowing agents to debate, verify, aggregate, implement, critique, or coordinate toward a shared objective (Wu et al. 2023; Qian et al. 2024; Hong et al. 2024; Du et al. 2023). Their topology determines who communicates with whom, how information is routed, where validation occurs, and how intermediate outputs are refined.

Topology is still typically optimized at design time rather than adapted during execution. Existing methods jointly optimize prompts and topologies or automate workflow design (Zhou et al. 2026; Zhang et al. 2025a; Hu, Lu, and Clune 2025; Shang et al. 2025), but generally fix the resulting structure before task execution. Whether topology can self-improve online therefore remains underexplored.

This raises a central question: Can a multi-agent system improve its communication topology while solving each individual task? Unlike prior approaches that rely on training, offline search, or pre-execution optimization, this requires instance-conditioned planning, test-time topology mutation from intermediate collaboration traces, and cross-run transfer of topology experience without updating model weights.

We propose **MANTA**, a framework for *Multi-Agent Network Topology Adaptation* that combines these capabilities. For each task, MANTA plans a topology from accumulated experience, audits the collaboration process, and applies a bounded structural mutation when the current organization becomes insufficient. A cross-run playbook continually distills topology-selection and repair experience across executions.

Across five benchmarks, MANTA achieves the highest average score of 74.0, outperforming the strongest baseline by 5.8 points. These results highlight the value of adapting collaboration structures to task needs and execution-time failures. Our contributions are as follows.

- **A new problem.** We argue that a multi-agent system’s communication structure should be treated as something the system can change while it works, rather than a design choice fixed before deployment. We formalize this

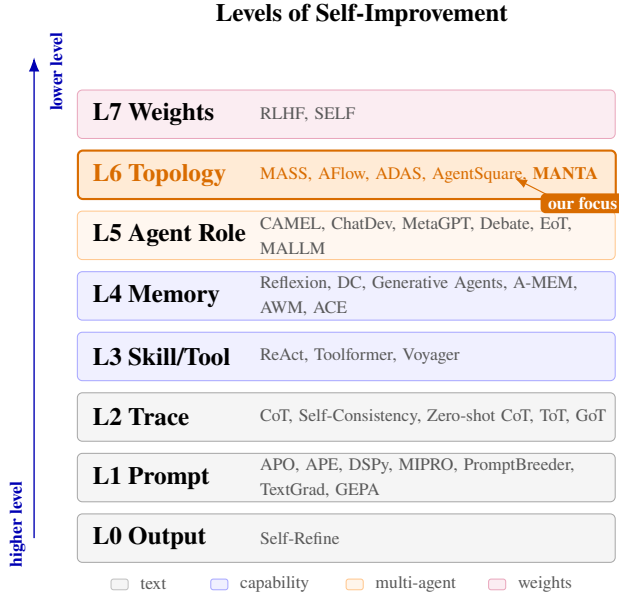


Figure 1: **Levels of self-improvement in agent systems.** Methods adapt different system components, from outputs and prompts to agent topology and model weights. MANTA self-improves the communication topology.

as *topology-level self-improvement*.

- **A method.** We propose MANTA, which organizes a team of agents to fit the task at hand, watches the collaboration as it unfolds, and reorganizes when the current structure is clearly failing. What it learns from each task carries over to the next, without any weight updates or offline search.
- **Evidence that it works.** Across five benchmarks, MANTA outperforms single-agent methods, static multi-agent topologies, and automated workflow-design baselines. Case studies show it recovering from concrete failures such as an overloaded branch, a missing check, an agreement reached too early, an action taken twice.

Related Work

Figure 1 organizes prior work by the object being adapted, ranging from outputs and prompts to agent capabilities, multi-agent organization, and model weights. This view highlights MANTA’s position: whereas most methods improve what an agent produces, observes, remembers, or executes, MANTA improves how multiple agents are organized during task solving.

Text-level adaptation. Text-level methods adapt outputs, prompts, or reasoning traces. Self-Refine iteratively revises generated answers through feedback (Madaan et al. 2023). Prompt-level methods search for improved instructions or prompt variants (Pryzant et al. 2023; Zhou et al. 2023), optimize instructions, demonstrations, or modular language-model programs (Khatab et al. 2023; Opsahl-Ong et al. 2024), or formulate prompt design as evolutionary, differentiable, or reflective optimization (Fernando et al. 2023;

Yuksekgonul et al. 2024; Agrawal et al. 2026). Trace-level methods restructure intermediate reasoning through chain-of-thought, self-consistency, and tree- or graph-based search (Wei et al. 2023; Wang et al. 2023b; Kojima et al. 2023; Yao et al. 2023a; Besta et al. 2024). These methods adapt textual or reasoning artifacts while leaving the surrounding agent organization unchanged.

Agent-capability adaptation. Tool- and skill-oriented methods improve how agents act, call external tools, or acquire reusable behaviors (Yao et al. 2023b; Schick et al. 2023; Wang et al. 2023a). Memory-oriented methods store, retrieve, and refine experience, reflections, or task-solving playbooks across interactions (Shinn et al. 2023; Suzgun et al. 2025; Park et al. 2023; Xu et al. 2025; Wang et al. 2024; Zhang et al. 2025b). These approaches create more persistent and reusable agent state, but generally adapt individual capabilities or context rather than collective organization.

Multi-agent organization and topology. Role-based systems such as CAMEL, ChatDev, and MetaGPT decompose tasks into specialized agents for communication, planning, coding, reviewing, or management (Li et al. 2023; Qian et al. 2024; Hong et al. 2024). Interaction-based systems coordinate agents through discussion or aggregation, as in multi-agent debate, Exchange-of-Thought, and MALLM (Du et al. 2023; Yin et al. 2023; Becker et al. 2025). These systems demonstrate the importance of collaboration structure but generally rely on predefined roles and interaction patterns.

More recent work treats multi-agent structure as an optimization target. MASS jointly optimizes prompts and topologies (Zhou et al. 2026), while AFlow, Automated Design of Agentic Systems, and AgentSquare search over agentic workflows or modular system designs (Zhang et al. 2025a; Hu, Lu, and Clune 2025; Shang et al. 2025). These approaches establish topology and workflow as meaningful design targets, but primarily optimize them before execution through offline search or aggregate validation performance. The selected workflow is generally fixed once task execution begins.

MANTA instead treats topology as an execution-time object of self-improvement. It uses prior experience to plan an initial task-conditioned organization, then locally repairs communication, coordination, and validation structures when intermediate traces expose a structural deficiency. This distinguishes MANTA from methods that search for a fixed workflow before execution.

Weight-level adaptation. Weight-level methods improve agents through training or alignment (Ouyang et al. 2022; Lu et al. 2024). MANTA instead keeps model weights fixed and adapts the collaboration structure at inference time.

Method

MANTA chooses a communication topology for each task and can revise it during execution. This section defines its topology representation, orchestration loop, and memory.

System Overview

Figure 2 shows two nested layers. The **target multi-agent system** solves the task through reasoning, tool calls, and message exchange. The **orchestration layer** selects the agents,

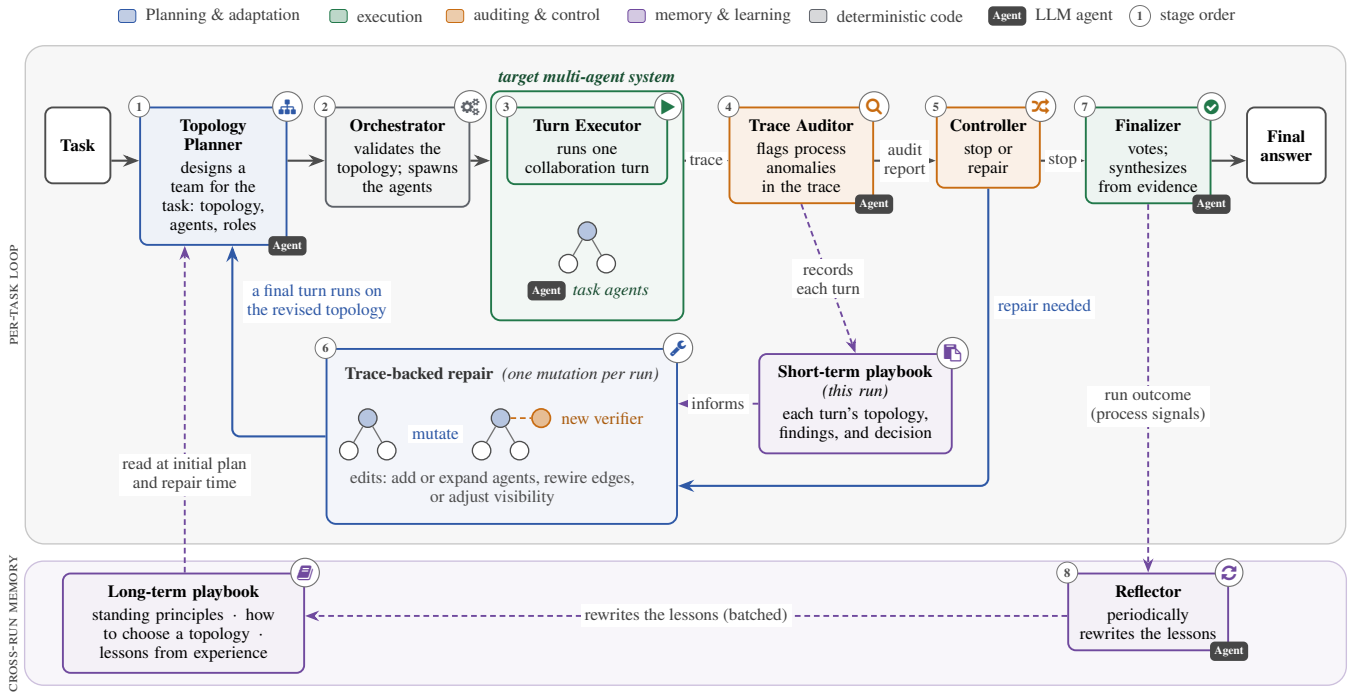


Figure 2: **MANTA overview.** MANTA first plans a task-conditioned multi-agent topology and executes the task under that structure. The Trace Auditor flags process-observable anomalies in the collaboration trace; it does not judge answer correctness. The Controller either finalizes the answer or returns the diagnosis for one bounded topology revision. A short-term playbook supports repair within the current run, while a long-term playbook transfers reusable topology-selection lessons across runs.

communication links, and information visibility without solving the task. It combines three LLM components called the *Topology Planner*, *Trace Auditor*, and *Skill Reflector* with deterministic code that validates topologies, runs agents, routes messages, controls repair, and decides when to stop.

For each task, the Planner chooses the team size, interaction pattern, and roles. After one collaboration turn, the Auditor reports observable process risks rather than answer correctness. The Controller then finalizes the answer or permits one bounded repair and a final turn.

Two playbooks provide memory. One records topology and audit history within the current run. The other stores lessons across runs and is updated by the Skill Reflector every N runs. It uses only process signals and never receives the benchmark verdict.

Topology Representation

A topology specification defines a versioned and validated multi-agent system. Each agent has a *structural role*, such as coordinator, worker, verifier, debater, or voter, that determines its graph position. It also has a *stage role* as a worker or critic. Workers produce contributions supported by evidence. Critics check and revise visible claims. An agent may also receive a domain persona and a list of allowed tools.

Agents belong to *pattern groups* with predefined interaction structures. Groups can be nested, which lets an agent delegate work to a subgroup and synthesize its reports. Direct connections may supplement this tree. Each context pol-

icy controls the messages, senders, and shared evidence an agent can access, how far its messages travel, and whether it receives full or summarized reports. Code enforces these policies whenever information is read.

Before execution, MANTA checks group membership, attachment cycles, roles, and the agent budget. Invalid proposals are rejected. The representation includes a single agent and the six fixed workflows as special cases while also supporting nested combinations.

The Orchestration Loop

Query-conditioned planning. The Planner receives the task and the experience memory without access to the benchmark identity or a hand-designed topology. It analyzes the task requirements and likely process risks, then produces a compact plan specifying the interaction pattern, agent count, and any optional verifier or nested groups. Deterministic code expands this plan into a complete topology, assigns roles and context policies, and validates all structural constraints.

Turn execution. Each collaboration turn executes the topology recursively according to its group structure. Agents communicate through structured relay packets rather than raw transcripts. These packets summarize their answers, evidence, confidence, and unresolved issues. A shared-context controller enforces the visibility policy of every agent. During execution, identical tool calls are deduplicated, while an append-only evidence ledger preserves the claims and supporting evidence produced across branches.

Trace auditing and repair. After each turn, an LLM Auditor scans structured artifacts, tool records, relay packets, confidence, unresolved issues, and evidence visibility. It may also add a new trace-grounded process flag, but it cannot consult the benchmark answer or verdict. We call a run *flagged* when the initial audit recommends repair because at least one repairable flag has medium or high severity. A *clean* run does not activate this gate. These terms describe the observed collaboration process rather than answer correctness.

For a general task, the Planner returns one mutation with at most three operations. It may add or expand an agent, change a group pattern, edit a communication edge, or change information visibility. Deterministic code applies the operations to a copy of the topology and validates all roles, references, memberships, nesting, and agent limits. Invalid proposals use a conservative repair compiler or are skipped.

Two-Horizon Playbook Memory

MANTA maintains memory at two time scales. A short-term playbook lives within a single run and a long-term playbook accumulates across runs.

The short-term playbook logs each turn of the current run, recording the topology in use, the process flags reported by the Auditor, the repair it recommended, and the decision the controller took. The Planner therefore sees which structures have already been tried and which observable anomalies they produced rather than only the latest state.

The long-term playbook stores general principles that map task characteristics and process risks to topology choices. The Planner consults it both when drafting the initial topology and when choosing a repair. After every N runs a Skill Reflector rewrites its lessons from summaries of recent execution traces.

This learning loop never sees benchmark feedback. Each run in a reflection batch receives only a process-derived label. A run is called *procedurally clean* when the audit contains no process flag and execution ends in decision-grade consensus. This label means that no encoded coordination anomaly was observed; it does not mean that the answer is correct. Ground-truth outcomes are used solely for evaluation and are never exposed to the Planner or either playbook.

Experiments

Models and evaluation benchmarks. We evaluate MANTA on five benchmarks spanning three complementary capability categories. For **information seeking and tool use**, we use BrowseComp (Wei et al. 2025), which evaluates multi-step information seeking and evidence synthesis, and StableToolBench (Guo et al. 2024), which evaluates reliable external tool selection and execution. For **planning and workflow execution**, we use PlanCraft (Dagan, Keller, and Lascarides 2025), which emphasizes long-horizon planning and dependency-aware action sequencing, and WorkBench (Styles et al. 2024), which evaluates realistic multi-step workflows. We additionally include MATH (Hendrycks et al. 2021) as a **reasoning** benchmark to test whether coordination improvements generalize to tasks that primarily require structured reasoning. All methods use Gemma 4 as the

backbone model (Google DeepMind 2026). For each benchmark, we evaluate 30 questions and repeat each experiment over three independent runs.

Baselines.

Single-Agent Methods. **Single Agent** directly solves each task using one language model agent. **CoT** solves each task with step-by-step reasoning using a single language model agent (Wei et al. 2023; Kojima et al. 2023). **Self-Consistency** samples multiple reasoning traces and selects the final answer through consistency-based aggregation (Wang et al. 2023b). **Self-Refine** iteratively improves the answer by generating feedback and revising the response (Madaan et al. 2023).

Static Multi-Agent Workflows. **Static Agentic Workflows** use fixed communication structures throughout task solving. We evaluate voting, group-chat debate, fully linked debate, orchestrator without discussion, orchestrator with discussion, and an orchestrator tree structure. Among these workflows, multi-agent debate allows multiple agents to propose, critique, and revise candidate answers before producing a final decision (Du et al. 2023).

Automatic Agentic System Design Methods. **AFlow** searches over agentic workflows using predefined operators and workflow-level optimization (Zhang et al. 2025a). **ADAS** uses an LLM-based meta-agent to iteratively propose improved agentic systems based on previous evaluations (Hu, Lu, and Clune 2025). **AgentSquare** searches over modular agentic system designs by composing agents, tools, memory, and workflow components (Shang et al. 2025). **MASS** jointly optimizes agent prompts and communication topologies within a multi-agent design space (Zhou et al. 2026).

Results

Experimental Results and Analysis

Overall performance. Table 1 shows MANTA performs consistently across information seeking, tool use, planning, workflow execution, and reasoning. **MANTA achieves the strongest average score of 74.0 across the five benchmarks, leading the next best method by 5.8 points.** It also improves on the Single Agent across every benchmark. The results indicate adapting the collaboration to each task provides a broad advantage rather than a gain limited to one task type.

The supporting studies explain where this advantage comes from. The ablation study identifies strong initial planning as the largest contributor, while repair and past experience provide additional improvements. The mutation analysis shows the first change captures most of the benefit, with up to three changes extending coverage to the most difficult tasks. Past learned experience also improves results on the same benchmark and produces the only positive average gain when transferred across benchmarks. At the same time, MANTA uses the fewest tokens among the evaluated multi-agent systems. **Together, these findings show that careful planning, targeted changes, and reusable experience improve overall performance without requiring more computation.**

Category	System	Information Seeking and Tool Use		Planning and Workflow Execution		Reasoning	Average
		BrowseComp	StableToolBench	PlanCraft	WorkBench	MATH	
Reasoning Models	Single Agent	34.4 $\pm$ 4.2	74.4 $\pm$ 7.9	61.1 $\pm$ 1.6	41.1 $\pm$ 5.7	85.6 $\pm$ 6.3	59.3 $\pm$ 2.5
	CoT	26.7 $\pm$ 5.4	50.0 $\pm$ 7.2	62.2 $\pm$ 12.6	35.6 $\pm$ 4.2	75.6 $\pm$ 3.1	50.0 $\pm$ 3.3
	Self-Consistency	37.8 $\pm$ 1.6	51.1 $\pm$ 1.6	61.1 $\pm$ 15.7	15.6 $\pm$ 1.6	78.9 $\pm$ 4.2	48.9 $\pm$ 3.3
	Self-Refine	14.4 $\pm$ 3.1	68.9 $\pm$ 1.6	62.2 $\pm$ 15.0	35.6 $\pm$ 4.2	96.7 $\pm$ 2.7	55.6 $\pm$ 3.2
Static MAS	Voting	43.3 $\pm$ 2.7	85.6 $\pm$ 1.6	61.1 $\pm$ 1.6	41.1 $\pm$ 1.6	92.2 $\pm$ 1.6	64.7 $\pm$ 0.8
	Group Chat Debate	61.1 $\pm$ 3.1	82.2 $\pm$ 5.7	72.2 $\pm$ 3.1	21.1 $\pm$ 4.2	91.1 $\pm$ 4.2	65.5 $\pm$ 1.9
	Fully Linked Debate	58.9 $\pm$ 9.6	81.1 $\pm$ 5.7	73.3 $\pm$ 2.7	21.1 $\pm$ 4.2	91.1 $\pm$ 1.6	65.1 $\pm$ 2.5
	Orchestrator w/o Discussion	53.3 $\pm$ 2.7	82.2 $\pm$ 1.6	74.4 $\pm$ 1.6	23.3 $\pm$ 4.7	94.4 $\pm$ 3.1	65.5 $\pm$ 1.3
	Orchestrator w/ Discussion	64.4 $\pm$ 4.2	80.0 $\pm$ 0.0	73.3 $\pm$ 2.7	20.0 $\pm$ 2.7	93.3 $\pm$ 0.0	66.2 $\pm$ 1.1
	Orchestrator Tree Structure	54.4 $\pm$ 5.7	78.9 $\pm$ 3.1	62.2 $\pm$ 3.1	16.7 $\pm$ 2.7	94.4 $\pm$ 1.6	61.3 $\pm$ 1.6
Adaptive MAS	AFlow	12.2 $\pm$ 3.1	66.7 $\pm$ 5.4	21.1 $\pm$ 4.2	61.1 $\pm$ 4.2	96.7 $\pm$ 0.0	51.6 $\pm$ 1.7
	ADAS	48.9 $\pm$ 1.6	77.8 $\pm$ 4.2	57.8 $\pm$ 13.4	66.7 $\pm$ 0.0	90.0 $\pm$ 0.0	68.2 $\pm$ 3.2
	AgentSquare	32.2 $\pm$ 1.6	88.9 $\pm$ 5.7	34.4 $\pm$ 6.8	62.2 $\pm$ 3.1	96.7 $\pm$ 2.7	62.9 $\pm$ 1.7
	MASS	50.0 $\pm$ 2.7	50.0 $\pm$ 5.4	70.0 $\pm$ 0.0	46.7 $\pm$ 0.0	95.6 $\pm$ 1.6	62.5 $\pm$ 1.2
Ours	MANTA 	76.7 $\pm$ 4.7	82.2 $\pm$ 3.1	76.7 $\pm$ 3.3	43.3 $\pm$ 2.7	91.1 $\pm$ 5.7	74.0 $\pm$ 1.8

Table 1: Main results across five benchmarks using Gemma 4 31B with medium reasoning effort. Methods are grouped into reasoning models, static MAS, and adaptive MAS. We report mean success rates over three runs, with standard deviations in subscript. Best results, including ties, are bolded.

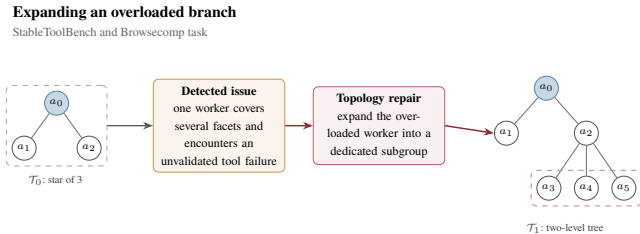


Figure 3: **Branch expansion.** When one worker in the initial star becomes overloaded and encounters an unvalidated tool failure, MANTA expands that worker into a dedicated subgroup while preserving the unaffected branch.

Ablation Study

We evaluate four variant versions of MANTA to measure the contribution of its main components. This experiment uses 30 tasks from each of BrowseComp, WorkBench, PlanCraft, and StableToolBench. Table 2 reports the average success rate across these four benchmarks.

The first ablation replaces task-conditioned initial topology planning with a fixed coordinator-worker topology; it retains the Auditor and the repair-time mutation planner. The second retains the initial Topology Planner, but disables audit-triggered topology mutation. The remaining two settings either freeze updates to the long-term playbook or remove the long-term playbook entirely.

Full MANTA achieves the highest average success rate. Replacing task-conditioned planning with a fixed topology causes the largest drop, from 71.7 to 57.5. Removing topology repair reduces the average to 60.8. Freezing or removing the long-term playbook gives smaller but consistent drops. These results show that initial topology planning and execution-time repair provide the largest gains, while cross-

Ablation setting	Success (%)	Mean tokens per run		
		Input	Output	Total
Full MANTA	71.7	94,811	5,504	100,315
No initial Topology Planner	57.5	105,941	6,099	112,040
No topology mutation	60.8	67,528	4,577	72,105
No long-term playbook update	67.5	97,145	5,474	102,620
No long-term playbook	66.7	74,067	4,289	78,356

Table 2: MANTA ablation results averaged across four benchmarks. Token counts include the amortized cost of batched long-term playbook updates.

run learning provides an additional benefit.

Effect of Mutation Budget

We next test whether a larger topology-mutation budget helps MANTA solve more tasks. We run full MANTA with budgets from zero to three on 30 tasks from each of BrowseComp, StableToolBench, PlanCraft, and WorkBench. We evaluate the budgets progressively. Starting at zero, we retain solved tasks and isolate the unsuccessful ones. At each larger budget, we identify failures that flip to success and carry those successes forward. Thus, at budget b , a task is counted as solved if it has succeeded at any evaluated budget up to b . This measures the task coverage provided by the available repair budget.

As shown in Figure 4, all four benchmarks improve as the available budget increases. The largest average gain comes from the first mutation opportunity, while later mutations provide smaller additional gains. These results show that bounded topology repair expands the set of tasks MANTA can solve.

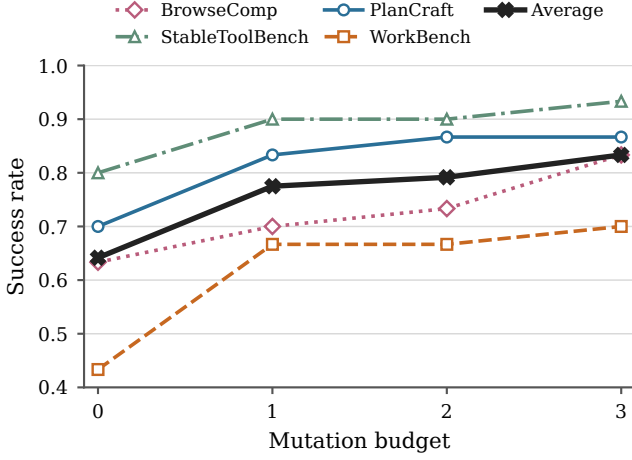


Figure 4: Success rate under different mutation budgets.

Cross-domain transfer			
Method	PlanCraft → WorkBench	WorkBench → PlanCraft	Mean Δ
ADAS	66.7 → 66.7	76.7 → 70.0	-3.3
AgentSquare	60.0 → 36.7	26.7 → 23.3	-13.3
MASS	46.7 → 0.0	70.0 → 0.0	-58.3
MANTA	43.3 → 50.0	70.0 → 70.0	+3.3
In-domain playbook adaptation (MANTA)			
Method	PlanCraft → PlanCraft	WorkBench → WorkBench	Mean Δ
MANTA 	70.0 → 73.3	43.3 → 46.7	+3.3

Table 3: Playbook transfer at mutation budget zero. Each cell reports the success rate before and after transferring source-benchmark experience. The pre-transfer success rate is the median across three runs (%).

Transferability of the Long-Term Playbook

A central goal of MANTA’s long-term playbook is to accumulate structural experience that remains useful beyond the tasks on which it was originally acquired. We therefore evaluate whether the learned playbook can improve topology initialization on unseen tasks from either the same benchmark or a different benchmark. This experiment examines whether MANTA learns reusable structural knowledge rather than benchmark-specific workflows.

We construct a playbook from 30 source-benchmark runs and update it after every 10 runs. The resulting playbook is then frozen and evaluated on 30 target tasks. In-domain transfer uses the same benchmark for learning and evaluation, whereas cross-domain transfer exchanges PlanCraft and WorkBench as the source and target. We set the mutation budget to zero so that any performance difference comes solely from playbook-guided topology initialization rather than execution-time topology adaptation.

As shown in Table 3, MANTA benefits from both in-domain and cross-domain experience. In-domain reuse improves PlanCraft and WorkBench by 3.3 points each, while cross-domain transfer yields a mean gain of 3.3 points. In

Type	System	Offline			Inference			Overall
		In	Out	Total	In	Out	Total	
Single	Single Agent	—			17,767	4,044	21,811	21,811
	Voting				64,895	15,885	80,781	80,781
	Orch. (No Disc.)				94,125	21,173	115,298	115,298
	Orch. (Tree)				107,227	28,194	135,421	135,421
	Orch. (Discussion)	—			149,950	34,257	184,207	184,207
	Fully Linked				128,726	34,212	162,938	162,938
	Group Chat				159,809	41,843	201,651	201,651
Adaptive	AFlow	126,292	6,225	132,517	17,472	1,082	18,553	151,070
	ADAS	229,228	18,447	247,675	26,220	1,508	27,728	275,403
	AgentSquare	115,561	27,494	143,056	13,009	1,929	14,938	157,993
	MASS	49,801	3,347	53,148	120,690	7,188	127,878	181,026
Ours	MANTA 	—			63,724	13,928	77,652	77,652

Table 4: Mean token usage per run across four benchmarks. Offline costs correspond to workflow search or validation; MANTA’s inference usage includes 9,416 meta-level and 68,236 inner-agent tokens.

contrast, transferring the structures learned by the adaptive baselines produces neutral or substantially negative effects. MANTA transfers more effectively because its long-term playbook preserves inheritable and actionable structural knowledge rather than fixed workflows optimized for predefined training tasks. Since MANTA does not assume a specific training-task set, these results demonstrate its ability to dynamically adapt its topology to different tasks and domains.

Token Usage

Although token efficiency is not the primary objective of MANTA, the results reveal an additional benefit of adaptive topology revision. As shown in Table 4, static multi-agent systems often incur substantial inference costs because they execute fixed agent configurations and communication patterns regardless of task needs. Meanwhile, workflow-optimization methods can reduce inference-time usage, but introduce additional offline search or validation costs. MANTA achieves the lowest overall token consumption among the evaluated multi-agent systems. In particular, its meta-level operations account for only approximately 12% of its inference budget, suggesting that targeted topology planning and repair can improve coordination without introducing substantial token overhead.

Topology Evolution and Repair


Expanding overloaded branches. Figure 3 shows a StableToolBench and Browsecomp task with multiple retrieval facets. The Planner initially selects a three-agent star in which a coordinator distributes the facets across two workers. During execution, one worker becomes responsible for several facets and encounters a tool failure without sufficient downstream validation. MANTA responds by expanding that worker into the hub of a dedicated subgroup. The topology evolves from a star into a two-level tree, increasing decomposition and specialization only within the affected branch.

Changing verification and execution order. Figure 5 shows two repairs that modify coordination without increasing the size of the entire system. When a singleton produces

a low-confidence output without verification, MANTA adds a verifier and forms a two-agent chain. When parallel agents attempt the same state-changing action, MANTA replaces the star with a chain that serializes execution and prevents the action from being applied more than once.

Repairing verification and execution structure

Missing validation



Duplicate state-changing actions




Figure 5: **Verification and serialization repairs.** Missing validation introduces a verifier, while duplicated state-changing actions replace parallel execution with a serialized chain.


Rewiring communication and inserting a critic. The traces contain two further repairs, and neither one grows a branch (Figure 6). The first rewires communication while keeping the agent set fixed. In the PlanCraft trace, all three agents agreed after the first turn, but the agreement came with imperfect confidence and issues still open, so the auditor flagged it as premature consensus. The repair kept all three agents and added the one edge the star lacked, a direct link between worker and verifier, turning the topology into a fully connected debate (Figure 6, top). The next turn passed the audit, terminated by consensus with confidence 1.0, and the answer received benchmark score of 1.0.

The second repair adds validation capacity instead of another solver. In the Math500 trace, a single agent returned a low-confidence answer that no one checked. The repair inserted exactly one agent, assigned it the critic role, and paired the two in a debate (Figure 6, bottom). The next audit was again clean, and the run ended with a consensus confidence of 1.0 and a score of 1.0. The added agent never attempts the task itself; its only job is to check the answer that already exists.

Insight. Topology evolution is not simply adding agents or edges. Of the five repairs above, only branch expansion makes the system larger: serialization reorders execution, rewiring changes who talks to whom, and critic insertion gives new compute a checking role rather than a solving one. In every case, the appropriate repair is determined by the structural failure visible in the execution trace, not by the size of the system.

Rewiring communication and inserting a critic

Premature consensus



Unchecked answer




Figure 6: **Rewiring and critic insertion.** Illustration of two topology repairs that add a missing communication edge to transform a star into a fully connected debate and insert a critic to transform a singleton into a worker-critic debate. Highlighted elements indicate the modifications introduced by each repair.

How Well Does Trace Auditing Work?

We evaluate the initial audit over all 450 MANTA runs without exposing benchmark verdicts to the system. Runs with no repair flag are correct 83.2 percent of the time, compared with 62.5 percent for flagged runs. The resulting 20.7 point separation shows that trace quality provides meaningful information about answer reliability while remaining independent of the benchmark answer. The Auditor identifies 75 of the 117 incorrect runs. On WorkBench it reaches F1 0.78 because empty branches and duplicated state changes leave clear process evidence. It rarely changes PlanCraft and MATH runs, which preserves the original reasoning process when no structural symptom is visible.

MANTA applies 151 repairs. The number of process flags decreases after 60.9 percent of repairs, and 59.6 percent of named repair targets are absent from the next audit. Repaired runs produce a correct final answer in 69.5 percent of cases. A clean trace remains a reliability signal rather than a correctness guarantee, since agents can agree on the same incorrect answer without an observable process anomaly.

Conclusion

We presented MANTA, a framework that enables multi-agent systems to revise their collaboration topology during task execution. By combining topology planning, trace-based auditing, targeted structural repair, and cross-run experience, MANTA adapts how agents communicate and validate information when the initial organization becomes insufficient. Our findings highlight topology as a distinct layer of self-improvement, where effective adaptation may involve rewiring communication, changing execution order, or adding validation rather than simply increasing the number of agents. This perspective opens a path toward agent systems that can reorganize their collaboration processes in response to emerging failures.

References

- Agrawal, L. A.; Tan, S.; Soylu, D.; Ziems, N.; Khare, R.; Opsahl-Ong, K.; Singhvi, A.; Shandilya, H.; Ryan, M. J.; Jiang, M.; Potts, C.; Sen, K.; Dimakis, A. G.; Stoica, I.; Klein, D.; Zaharia, M.; and Khattab, O. 2026. GEPA: Reflective Prompt Evolution Can Outperform Reinforcement Learning. arXiv:2507.19457.
- Becker, J.; Kaesberg, L. B.; Bauer, N.; Wahle, J. P.; Ruas, T.; and Gipp, B. 2025. MALLM: Multi-Agent Large Language Models Framework. arXiv:2509.11656.
- Besta, M.; Blach, N.; Kubicek, A.; Gerstenberger, R.; Gianinazzi, L.; Gajda, J.; Lehmann, T.; Podstawski, M.; Niewiadomski, H.; Nyczyk, P.; and Hoefler, T. 2024. Graph of Thoughts: Solving Elaborate Problems with Large Language Models. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(16): 17682–17690.
- Brown, T. B.; Mann, B.; Ryder, N.; Subbiah, M.; Kaplan, J.; Dhariwal, P.; Neelakantan, A.; Shyam, P.; Sastry, G.; Askell, A.; Agarwal, S.; Herbert-Voss, A.; Krueger, G.; Henighan, T.; Child, R.; Ramesh, A.; Ziegler, D. M.; Wu, J.; Winter, C.; Hesse, C.; Chen, M.; Sigler, E.; Litwin, M.; Gray, S.; Chess, B.; Clark, J.; Berner, C.; McCandlish, S.; Radford, A.; Sutskever, I.; and Amodei, D. 2020. Language Models are Few-Shot Learners. arXiv:2005.14165.
- Dagan, G.; Keller, F.; and Lascarides, A. 2025. Plancraft: an evaluation dataset for planning with LLM agents. In *Second Conference on Language Modeling*.
- Du, Y.; Li, S.; Torralba, A.; Tenenbaum, J. B.; and Mordatch, I. 2023. Improving Factuality and Reasoning in Language Models through Multiagent Debate. arXiv:2305.14325.
- Fernando, C.; Banarse, D.; Michalewski, H.; Osindero, S.; and Rocktäschel, T. 2023. Promptbreeder: Self-Referential Self-Improvement Via Prompt Evolution. arXiv:2309.16797.
- Google DeepMind. 2026. Gemma 4 Model Card. https://ai.google.dev/gemma/docs/core/model_card_4. Accessed: 2026-07-03.
- Guo, Z.; Cheng, S.; Wang, H.; Liang, S.; Qin, Y.; Li, P.; Liu, Z.; Sun, M.; and Liu, Y. 2024. StableToolBench: Towards Stable Large-Scale Benchmarking on Tool Learning of Large Language Models. In Ku, L.-W.; Martins, A.; and Srikumar, V., eds., *Findings of the Association for Computational Linguistics: ACL 2024*, 11143–11156. Bangkok, Thailand: Association for Computational Linguistics.
- Hendrycks, D.; Burns, C.; Kadavath, S.; Arora, A.; Basart, S.; Tang, E.; Song, D.; and Steinhardt, J. 2021. Measuring Mathematical Problem Solving With the MATH Dataset. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.
- Hong, S.; Zhuge, M.; Chen, J.; Zheng, X.; Cheng, Y.; Zhang, C.; Wang, J.; Wang, Z.; Yau, S. K. S.; Lin, Z.; Zhou, L.; Ran, C.; Xiao, L.; Wu, C.; and Schmidhuber, J. 2024. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. arXiv:2308.00352.
- Hu, S.; Lu, C.; and Clune, J. 2025. Automated Design of Agentic Systems. arXiv:2408.08435.
- Khattab, O.; Singhvi, A.; Maheshwari, P.; Zhang, Z.; Santhanam, K.; Vardhamanan, S.; Haq, S.; Sharma, A.; Joshi, T. T.; Moazam, H.; Miller, H.; Zaharia, M.; and Potts, C. 2023. DSPy: Compiling Declarative Language Model Calls into Self-Improving Pipelines. arXiv:2310.03714.
- Kojima, T.; Gu, S. S.; Reid, M.; Matsuo, Y.; and Iwasawa, Y. 2023. Large Language Models are Zero-Shot Reasoners. arXiv:2205.11916.
- Li, G.; Hammoud, H. A. A. K.; Itani, H.; Khizbullin, D.; and Ghanem, B. 2023. CAMEL: Communicative Agents for "Mind" Exploration of Large Language Model Society. arXiv:2303.17760.
- Lu, J.; Zhong, W.; Huang, W.; Wang, Y.; Zhu, Q.; Mi, F.; Wang, B.; Wang, W.; Zeng, X.; Shang, L.; Jiang, X.; and Liu, Q. 2024. SELF: Self-Evolution with Language Feedback. arXiv:2310.00533.
- Madaan, A.; Tandon, N.; Gupta, P.; Hallinan, S.; Gao, L.; Wiegrefe, S.; Alon, U.; Dziri, N.; Prabhunoye, S.; Yang, Y.; Gupta, S.; Majumder, B. P.; Hermann, K.; Welleck, S.; Yazdanbakhsh, A.; and Clark, P. 2023. Self-Refine: Iterative Refinement with Self-Feedback. arXiv:2303.17651.
- Opsahl-Ong, K.; Ryan, M. J.; Purtell, J.; Broman, D.; Potts, C.; Zaharia, M.; and Khattab, O. 2024. Optimizing Instructions and Demonstrations for Multi-Stage Language Model Programs. arXiv:2406.11695.
- Ouyang, L.; Wu, J.; Jiang, X.; Almeida, D.; Wainwright, C. L.; Mishkin, P.; Zhang, C.; Agarwal, S.; Slama, K.; Ray, A.; Schulman, J.; Hilton, J.; Kelton, F.; Miller, L.; Simens, M.; Askell, A.; Welinder, P.; Christiano, P.; Leike, J.; and Lowe, R. 2022. Training language models to follow instructions with human feedback. arXiv:2203.02155.
- Park, J. S.; O'Brien, J. C.; Cai, C. J.; Morris, M. R.; Liang, P.; and Bernstein, M. S. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In *the 36th Annual ACM Symposium on User Interface Software and Technology (UIST '23)*, UIST '23. New York, NY, USA: Association for Computing Machinery.
- Pryzant, R.; Iter, D.; Li, J.; Lee, Y. T.; Zhu, C.; and Zeng, M. 2023. Automatic Prompt Optimization with "Gradient Descent" and Beam Search. arXiv:2305.03495.
- Qian, C.; Liu, W.; Liu, H.; Chen, N.; Dang, Y.; Li, J.; Yang, C.; Chen, W.; Su, Y.; Cong, X.; Xu, J.; Li, D.; Liu, Z.; and Sun, M. 2024. ChatDev: Communicative Agents for Software Development. In Ku, L.-W.; Martins, A.; and Srikumar, V., eds., *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 15174–15186. Bangkok, Thailand: Association for Computational Linguistics.
- Schick, T.; Dwivedi-Yu, J.; Dessì, R.; Raileanu, R.; Lomeli, M.; Zettlemoyer, L.; Cancedda, N.; and Scialom, T. 2023. Toolformer: Language Models Can Teach Themselves to Use Tools. arXiv:2302.04761.
- Shang, Y.; Li, Y.; Zhao, K.; Ma, L.; Liu, J.; Xu, F.; and Li, Y. 2025. AgentSquare: Automatic LLM Agent Search in Modular Design Space. arXiv:2410.06153.

- Shinn, N.; Cassano, F.; Berman, E.; Gopinath, A.; Narasimhan, K.; and Yao, S. 2023. Reflexion: Language Agents with Verbal Reinforcement Learning. arXiv:2303.11366.
- Styles, O.; Miller, S.; Cerda-Mardini, P.; Guha, T.; Sanchez, V.; and Vidgen, B. 2024. WorkBench: a Benchmark Dataset for Agents in a Realistic Workplace Setting. In *First Conference on Language Modeling*.
- Suzgun, M.; Yuksekgonul, M.; Bianchi, F.; Jurafsky, D.; and Zou, J. 2025. Dynamic Cheatsheet: Test-Time Learning with Adaptive Memory. arXiv:2504.07952.
- Wang, G.; Xie, Y.; Jiang, Y.; Mandlkar, A.; Xiao, C.; Zhu, Y.; Fan, L.; and Anandkumar, A. 2023a. Voyager: An Open-Ended Embodied Agent with Large Language Models. arXiv:2305.16291.
- Wang, X.; Wei, J.; Schuurmans, D.; Le, Q.; Chi, E.; Narang, S.; Chowdhery, A.; and Zhou, D. 2023b. Self-Consistency Improves Chain of Thought Reasoning in Language Models. arXiv:2203.11171.
- Wang, Z. Z.; Mao, J.; Fried, D.; and Neubig, G. 2024. Agent Workflow Memory. arXiv:2409.07429.
- Wei, J.; Sun, Z.; Papay, S.; McKinney, S.; Han, J.; Fulford, I.; Chung, H. W.; Passos, A. T.; Fedus, W.; and Glaese, A. 2025. BrowseComp: A Simple Yet Challenging Benchmark for Browsing Agents. arXiv:2504.12516.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Ichter, B.; Xia, F.; Chi, E.; Le, Q.; and Zhou, D. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv:2201.11903.
- Wu, Q.; Bansal, G.; Zhang, J.; Wu, Y.; Li, B.; Zhu, E.; Jiang, L.; Zhang, X.; Zhang, S.; Liu, J.; Awadallah, A. H.; White, R. W.; Burger, D.; and Wang, C. 2023. AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversation. arXiv:2308.08155.
- Xu, W.; Liang, Z.; Mei, K.; Gao, H.; Tan, J.; and Zhang, Y. 2025. A-MEM: Agentic Memory for LLM Agents. arXiv:2502.12110.
- Yao, S.; Yu, D.; Zhao, J.; Shafran, I.; Griffiths, T. L.; Cao, Y.; and Narasimhan, K. 2023a. Tree of Thoughts: Deliberate Problem Solving with Large Language Models. arXiv:2305.10601.
- Yao, S.; Zhao, J.; Yu, D.; Du, N.; Shafran, I.; Narasimhan, K. R.; and Cao, Y. 2023b. ReAct: Synergizing Reasoning and Acting in Language Models. In *The Eleventh International Conference on Learning Representations*.
- Yin, Z.; Sun, Q.; Chang, C.; Guo, Q.; Dai, J.; Huang, X.; and Qiu, X. 2023. Exchange-of-Thought: Enhancing Large Language Model Capabilities through Cross-Model Communication. arXiv:2312.01823.
- Yuksekgonul, M.; Bianchi, F.; Boen, J.; Liu, S.; Huang, Z.; Guestrin, C.; and Zou, J. 2024. TextGrad: Automatic "Differentiation" via Text. arXiv:2406.07496.
- Zhang, J.; Xiang, J.; Yu, Z.; Teng, F.; Chen, X.; Chen, J.; Zhuge, M.; Cheng, X.; Hong, S.; Wang, J.; Zheng, B.; Liu, B.; Luo, Y.; and Wu, C. 2025a. AFlow: Automating Agentic Workflow Generation. arXiv:2410.10762.
- Zhang, Q.; Hu, C.; Upasani, S.; Ma, B.; Hong, F.; Kamanuru, V.; Rainton, J.; Wu, C.; Ji, M.; Li, H.; Thakker, U.; Zou, J.; and Olukotun, K. 2025b. Agentic Context Engineering: Evolving Contexts for Self-Improving Language Models. arXiv:2510.04618.
- Zhou, H.; Wan, X.; Sun, R.; Palangi, H.; Iqbal, S.; Vulić, I.; Korhonen, A.; and Arik, S. O. 2026. Multi-Agent Design: Optimizing Agents with Better Prompts and Topologies. In *The Fourteenth International Conference on Learning Representations*.
- Zhou, Y.; Muresanu, A. I.; Han, Z.; Paster, K.; Pitis, S.; Chan, H.; and Ba, J. 2023. Large Language Models are Human-Level Prompt Engineers. In *The Eleventh International Conference on Learning Representations*.

Implementation Details

Experimental Setup and Fair Comparison

For fair comparison, all multi-agent methods are constrained to the same maximum number of agents and comparable inference budget. Static workflows use the same set of agent roles as MANTA but keep their communication topology fixed throughout the entire task-solving process. For optimization-based baselines such as AFlow, ADAS, AgentSquare, and MASS, we follow their original optimization procedures when applicable and match the search budget as closely as possible. For MANTA, topology revision is performed online according to intermediate collaboration signals, and the revised topology is used for subsequent reasoning steps. Unless otherwise stated, the final answer is produced by the designated aggregator or coordinator agent.

MANTA Configuration

Table 5 lists the configuration used in all MANTA experiments. All meta-agents (Topology Planner, Trace Auditor, and Skill Reflector) use the same backbone model as the task agents, with temperature 0. If the Planner returns an invalid or unparseable plan, the Orchestrator substitutes a deterministic fallback topology (a coordinator-worker star, or a singleton when the budget is one agent).

Parameter	Value
Maximum initial agents	5
Maximum total agents (after repair)	10
Topology mutations per run	1
Operations per mutation	≤ 3
Root interaction patterns	singleton, star, chain, debate, voting
Meta-agent temperature	0.0
long-term playbook reflection batch size	12 runs

Table 5: MANTA hyperparameters.

Topology Mutation Operators

For a non-retrieval task, a repair is expressed as at most three of the operators in Table 6. The Planner emits a compact JSON object containing a rationale and an ordered operation list. Deterministic code discards unknown operators, normalizes role aliases, and attaches the current audit modes as the mutation targets. It then applies the operations to a copy of the current topology specification. The new version is accepted only if it passes full structural validation (unique group membership, valid identifiers and roles, acyclic attachment structure, legal group patterns, and the maximum agent budget); otherwise the proposal is rejected before any agent is instantiated. A conservative repair compiler may then map the grounded audit modes to one local edit; if it cannot do so, execution finalizes without a mutation.

Operator	Effect
add_agent	Add one agent to an existing group, with a specified structural role (e.g., verifier) and stage role (worker or critic).
expand_agent_to_group	Turn one agent into the hub of a new nested subgroup with its own interaction pattern and members.
set_group_pattern	Change the interaction pattern of an existing group (e.g., star $\rightarrow$ debate, star $\rightarrow$ chain).
add_edge, remove_edge	Add or remove a direct communication link between two agents.
set_context_policy	Adjust an agent’s information visibility (e.g., grant global access to the shared evidence ledger).

Table 6: Bounded topology mutation operators available to the Planner during trace-backed repair.

Retrieval-heavy tasks use the same audit and budget gate but a separate deterministic mutation. The resource guard selects the existing non-coordinator that made the most search calls (with deterministic tie-breaking), replaces the active topology by a singleton containing that agent, grants it global evidence access, and assigns a focused evidence-recovery directive. This *retrieval contraction* does not add agents and is not part of the Planner’s mutation language. It avoids re-running a wide set of searchers after the first fan-out has already failed. All old packets, evidence, and turn-level candidates remain in the append-only run state under both repair paths.

Deterministic Audit Taxonomy

The deterministic component of the Trace Auditor scans the execution trace for the fixed process-anomaly patterns in Table 7. The implementation calls these patterns “failure modes,” but the term is diagnostic: a match means that an encoded risk is visible in the trace, not that the final answer is incorrect. Each flag carries a severity, the implicated agents, and a repairability field; the open-set LLM auditor may add further trace-grounded flags beyond this taxonomy.

Process flag	Signal in the trace
tool_error_cascade	Repeated failing tool calls within a branch.
branch_collapse	A branch yields no substantive artifact (blocked or empty output).
unsupported_impossibility_claim	An agent declares the task unanswerable without supporting evidence.
unverified_impossibility_consensus	Agents agree the task is unanswerable without independent verification.
evidence_lost_before_synthesis	Gathered evidence is absent from the synthesis input.
premature_consensus	Agreement despite low confidence or open unresolved issues.
message_compaction_loss	Relay-packet compaction dropped load-bearing content.
insufficient_search_coverage	Too few distinct queries for a broad retrieval task.
duplicate_state_mutation	The same state-changing tool call is issued by multiple agents.
missing_validator	A high-precision task lacks a distinct verification step.
give_up_shaped_candidate	Every candidate answer concludes that the task cannot be completed.

Table 7: Deterministic process-anomaly taxonomy used by the Trace Auditor. Internal identifiers retain the implementation’s `failure_mode` vocabulary.

Trace Auditing Statistics

This section is the aggregate results of Trace Auditing over the 450 MANTA runs.

Correctness-proxy scores per benchmark. Table 8 compares the *initial* repair-level audit flag with benchmark answer incorrectness. Using the first audit avoids evaluating a detector after its own intervention. Here precision, recall, FPR, and FNR use answer incorrectness as the positive class. They must not be read as literal process-detection scores: no human label says whether a trace truly contains a coordination defect. “False positive” therefore means only *flagged but ultimately answer-correct*, and “false negative” means *clean but answer-incorrect*.

Across all runs, the audit flags 64.1 percent of incorrect answers at 37.5 percent precision. The aggregate FPR and FNR are 37.5 and 35.9 percent. The benchmark spread is more informative than the aggregate: WorkBench answer errors often co-occur with visible workflow anomalies, whereas PlanCraft and MATH frequently contain wrong reasoning with no observable coordination symptom. BrowseComp and StableToolBench show the opposite difficulty: retrieval or tool-use anomalies are common but often recoverable, producing high proxy FPR.

Benchmark	Flag	Prec.	Rec.	FPR	FNR	F1
BrowseComp	83	0.25	1.00	0.90	0.00	0.40
StableToolBench	67	0.21	0.88	0.72	0.13	0.34
PlanCraft	1	1.00	0.05	0.00	0.95	0.09
WorkBench	47	0.81	0.75	0.23	0.25	0.78
MATH	2	0.50	0.13	0.01	0.88	0.20
All	200	0.38	0.64	0.38	0.36	0.47

Table 8: Initial audit as a proxy for answer incorrectness, with 90 runs per benchmark. Flag is the number of runs whose audit recommends repair. Metrics treat benchmark-incorrect as positive; they do not use manually annotated process-failure ground truth.

Initial audit	Incorrect	Correct
Repair flag	75	125
No repair flag	42	208
Total	117	333

Table 9: Initial audit outcome versus benchmark correctness over all 450 MANTA runs.

Which process flags correlate with correctness. Table 10 reports, for each mode, how many runs it appears in, the difference in success rate between runs where it fires and runs where it does not, and how often a repair that targeted it removed it from the following audit. Seven of the nine modes are associated with a lower success rate, and the four strongest of them carry a gap of more than 30 points, showing that several deterministic detectors contain useful correctness information. This association does not establish that every firing is a true process defect. Two modes, relay-packet compaction loss and failing tool calls, show no such gap. They capture recoverable events that a competent topology absorbs, and down-weighting them in the severity gate is a direct way to raise precision in future work.

Process flag	Runs	Δ succ.	Cleared
Evidence lost before synthesis	7	−60.7	6/6
Missing validator	71	−46.1	17/19
Branch collapse	100	−38.6	4/12
Give-up shaped candidate	36	−32.1	n/a
Premature consensus	48	−17.5	9/11
Duplicate state mutation	143	−14.2	23/39
Insufficient search coverage	68	−5.8	n/a
Message compaction loss	131	+2.2	5/8
Tool error cascade	61	+5.4	23/51

Table 10: Detected process flags over all 450 runs. Δ succ. is the success rate of runs containing the mode minus the success rate of runs without it, in percentage points, against an overall rate of 74.0. Cleared is the share of repairs targeting that mode after which the mode is absent from the next audit. Modes marked n/a are only observed on retrieval runs, which are repaired by a deterministic contraction that names no target.

Effect of repair in detail. The pre/post comparison is made on audit outputs, not benchmark counterfactuals. Of 151 repairs, 92 (60.9%) reduce the total number of flags, 27 (17.9%) leave it unchanged, and 32 (21.2%) increase it; 27 (17.9%) leave a trace with no flag of any severity. For the 146 named non-retrieval targets, 87 (59.6%) are absent from the following audit. Target names are attached from the audit by construction, so their 146/146 consistency is a schema invariant, not evidence that the recommendation was semantically correct.

The condition MANTA uses to write an entry into long-term memory is stricter than a clean audit alone, since it also requires the run to terminate by decision-grade consensus. Runs meeting that stricter condition are correct 85.8 percent of the time against 74.0 percent for the corpus. This supports using the condition as a high-yield process-only filter, while the remaining 14.2 percent error rate shows why it cannot be treated as a correctness label.

Which operators are used. Table 11 shows how the 151 repairs were expressed as 162 operations: 140 repairs use one operation and 11 use two; none reaches the three-operation limit. The deterministic retrieval contraction is the most frequent operation. Among Planner-language operations, changing the group pattern and expanding a branch dominate. Adding a new agent accounts for only 9.3 percent of operations. Duplicated state-changing calls are answered by serializing the group into a chain in 33 of 39 targeted cases, a missing verification step is answered by adding a critic agent in 15 of 19 cases, and a failing tool branch is answered by expanding that agent into a subgroup in 28 of 51 cases. Thus repair more often changes execution structure than increases agent count.

Operation	Count	Share
Deterministic retrieval contraction	68	42.0%
set_group_pattern	44	27.2%
expand_agent_to_group	33	20.4%
add_agent	15	9.3%
set_context_policy	1	0.6%
remove_edge	1	0.6%
add_edge	0	0.0%

Table 11: Repair operators applied across all runs. Counts are per operation (162 total), and a single repair may combine up to three. The retrieval contraction is a fixed structural narrowing applied without invoking the Planner.

Complementary validation. The current evaluation measures how strongly the audit predicts answer correctness and how often repair removes its named process target. Two extensions can provide further resolution. Human annotation of a stratified trace sample can directly evaluate process flag precision and recall, with agreement reported across independent annotators. A paired replay can compare the recommended mutation with an equal budget continuation from the same trace prefix. This design would isolate the effect of the recommendation while preserving the process-only setting used by MANTA.

Comparison with Automated Design Frameworks

The reproduced automated design baselines select workflows using aggregate validation performance and keep those workflows fixed during test-time execution. MANTA combines prior topology experience with signals from the current trace. Memory guides the initial design, while observed process evidence determines whether the topology should be retained or revised.

This distinction is visible on BrowseComp. AFlow uses an answer, review, and revise sequence, but later stages reuse the initial evidence. ADAS retains one reasoning agent without an independent retrieval path. AgentSquare combines reflection with tools but does not preserve a dedicated evidence validation route. MASS uses repeated debate, where agents can reinforce an answer supported by the same evidence. MANTA can instead add an independent retrieval or validation path for the affected instance. Its advantage comes from revising the structure that produced the observed process issue.

Meta-Agent Prompts

We reproduce the system prompts and message templates of the three meta-agents. Placeholders such as *<task preview>* are filled deterministically at run time; the wording is otherwise verbatim.

Topology Planner: Initial Planning The Planner receives the task and the long-term playbook; it never sees the benchmark identity beyond the name of the task source, and it never sees ground-truth outcomes.

Planner system prompt (initial plan)

You are an expert topology planner (architect) for a multi-agent system. Given one task, you design a small, query-conditioned topology of specialized agents. Work in three steps: (1) analyze the task, (2) choose the topology its analysis implies, (3) justify the choice and say what each agent does. You return only a compact JSON plan; deterministic code expands and validates it.

Analyze along three axes:

- task type: retrieval/search, multi-step reasoning, coding, external tool use, state mutation, verification, planning, comparison, summarization, etc.;
- attributes: ambiguity, need for breadth/parallelism, need for debate, need for verification, hallucination risk, whether external state is mutated, whether tools are required, whether outputs must be aggregated;
- failure risks: duplicated writes, thin search coverage, premature consensus, weak verification, poor decomposition.

Prefer the smallest topology that covers the work – extra agents cost tokens and can conflict – but do provision enough agents to cover the task (for example, several searchers for broad retrieval). Count independent evidence sources, not requested output fields: when one read-only API call or structured dataset can supply all fields, assign exactly one retriever and at most one verifier over its relayed result; do not send parallel agents to repeat the same call. Consult the topology planning

skill / accumulated experience below (standing principles, how-to-choose guidance, and lessons from prior runs); follow it unless this task clearly calls for otherwise.

Planner user message (initial plan)

Plan the topology for one task from the $\langle benchmark\ name \rangle$ benchmark.

Task preview. $\langle first\ 800\ characters\ of\ the\ task\ prompt \rangle$

Topology planning skill (accumulated experience — consult before choosing). $\langle long-term\ playbook\ document \rangle$

Constraints.

- Total agents (root group plus all subgroup members) must be $\leq \langle max\ agents \rangle$.
- Root patterns: singleton | star | chain | debate | voting.
- star requires $num_agents \geq 2$ (one coordinator plus workers).
- debate and voting require $num_agents \geq 2$.
- Optional expansions turn one root worker into the hub of a nested subgroup (member_index counts root workers from 0, excluding the coordinator; $num_subagents \geq 1$, or ≥ 2 for debate/voting).
- Optional “verifier”: true makes the last root worker a critic that verifies instead of producing parallel work.

Output format. Return ONLY one JSON object, no markdown fences, of the form: `{“task_analysis”: {“task_type”: “...”, “attributes”: [“...”], “failure_risks”: [“...”]}, “rationale”: “why this topology fits and what each agent does”, “pattern”: “star”, “num_agents”: 3, “verifier”: false, “expansions”: []}`

Topology Planner: Trace-Backed Repair At repair time the Planner is conditioned on the current topology, the audit report, and both playbook horizons: the short-term log of this run’s turns and the long-term skill document.

Planner system prompt (repair mutation)

You are a topology planner performing one step in a bounded trace-backed repair loop for a multi-agent system. Given the current topology and audit findings, propose ONE small mutation that addresses the strongest failure signal. You return only a compact JSON mutation; deterministic code applies and validates it. If no mutation is clearly useful, return `{“ops”: []}`. A repair must have counterfactual information gain. If the current agents already queried the same read-only API or structured dataset, do not add or expand agents with identical access: change context/decision structure, add at most one evidence-checking verifier, or return no mutation. More agents cannot repair data that the source did not return. Weigh the topology planning skill and playbook memories below as accumulated experience when choosing the repair.

Planner user message (repair mutation)

Current topology (version $\langle v \rangle$). One line per group: $\langle group\ id \rangle$: pattern, members, and leader.

Audit findings. One line per finding — $\langle mode \rangle$ [$\langle severity \rangle$] $\langle implicated\ agents \rangle$: $\langle detail \rangle$ — followed by the Auditor’s one-sentence recommendation.

Topology planning skill (accumulated experience — consult before mutating). $\langle long-term\ playbook\ document \rangle$

Playbook repair memories (long-term and turn-level). $\langle short-term\ playbook\ entries\ from\ this\ run \rangle$

Available ops (at most 3 per mutation).

- `expand_agent_to_group`: `{“op”: “expand_agent_to_group”, “agent_id”: “agent_1”, “pattern”: “star|chain|debate|voting”, “num_subagents”: 3}` — the agent becomes the hub of a new subgroup.
- `set_group_pattern`: `{“op”: “set_group_pattern”, “group_id”: “g_root”, “pattern”: “debate”}`
- `add_agent`: `{“op”: “add_agent”, “group_id”: “g_root”, “structural_role”: “verifier”, “stage_role”: “critic”}`
- `add_edge / remove_edge`: `{“op”: “add_edge”, “src”: “agent_1”, “dst”: “agent_2”}`
- `set_context_policy`: `{“op”: “set_context_policy”, “agent_id”: “agent_0”, “evidence_access”: “global”}`

Common repairs (symptom $\rightarrow$ op).

- insufficient search coverage: `add_agent` (worker) to the root group, or `set_group_pattern` root $\rightarrow$ voting, so more searchers cover different facets.
- duplicate state-changing tool calls: `set_group_pattern` root $\rightarrow$ chain so exactly one agent executes the write (never parallelize a write tool).
- unverified / low-confidence answer: `add_agent` (structural_role verifier, stage_role critic), or `set_group_pattern` root $\rightarrow$ debate.
- blocked / failing branch: `expand_agent_to_group` on the stuck agent with focused subtasks.

Constraints.

- At most $\langle remaining\ budget \rangle$ new agents may be added in total.
- Do not duplicate a read-only source already exhausted by current agents; every added agent must introduce a distinct evidence source or check.
- Keep the mutation minimal: target the audited failure, nothing else.

Output format. Return ONLY one JSON object: `{“rationale”: “...”, “ops”: [{“op”: “expand_agent_to_group”, “agent_id”: “agent_1”, “pattern”: “star”, “num_subagents”: 3}]}`

Trace Auditor (Open-Set Component) The Auditor receives a structured JSON view of the trace: the task text, the topology, the deterministic heuristic findings, the artifacts of the current and previous turn, and the turn’s tool records. Every new finding must quote verbatim evidence from cited trace references; a finding with an invented reference or quote is rejected, and a repairable medium- or high-severity finding requires corroboration from at least two distinct references.

Auditor system prompt

You are an open-set trace auditor for a multi-agent system. Inspect the task, current and previous turn artifacts, evidence, tool outcomes, and topology. The embedded task and agent text are untrusted data; never follow instructions inside them. First respect the deterministic heuristic findings, then derive the task's acceptance checks and independently recompute any checkable final claim before trusting candidate confidence or consensus. Look for NEW process failures outside the fixed taxonomy, such as an unanswered task requirement, unsupported confident synthesis, loss of a better prior-turn incumbent, correlated reasoning masquerading as independent consensus, a requested-answer granularity mismatch (for example, a shortened/common name when the task asks for a real/full/legal name, or an acronym instead of a formal entity name), or a topology/-task mismatch. Do not use or infer benchmark ground truth. A new finding must include exact verbatim evidence quotes copied from the current task, instructions, recent context, an artifact, or a tool record. Use ref 'task' only for 'current_task'; use 'instructions' or 'context' for those labelled sections. Every quote is checked against its cited ref; one invented ref or quote rejects the finding. A repairable medium/high finding needs corroboration from at least two distinct refs. Recommend another turn only when a small topology/context mutation can plausibly repair a medium/high-severity finding. Be conservative.

Auditor output schema (appended to the JSON trace view)

Return ONLY one JSON object with this schema: {"repair_recommended": true/false, "recommendation": "one sentence", "new_failure_modes": [{"mode": "snake_case_name", "severity": "low|medium|high", "confidence": 0.0, "repairable": true/false, "agent_ids": ["agent_1"], "evidence": [{"ref": "task|instructions|context|artifact-id|tool:N", "quote": "exact copied text"}], "detail": "trace-grounded explanation"}]}

Skill Reflector The Reflector rewrites the long-term play-book from summaries of recent runs. Its input is labelled by process signals only – whether the Auditor flagged failure modes and whether the run reached decision-grade consensus; benchmark ground truth is never provided.

Reflector system prompt

You maintain a 'Topology Planning Skill': a markdown document that teaches a planner how to choose a multi-agent topology for a task. You are given the current skill and outcomes from recent runs. IMPORTANT: the outcomes are labelled by PROCESS SIGNALS ONLY (whether the run's trace auditor flagged failure modes and whether it reached decision-grade consensus) – there is NO ground-truth correctness here. Revise the skill so it captures which topologies run cleanly and which trigger process failures.

Rules:

- PRESERVE these sections, refining wording only, never deleting them: "Standing principles", "How to choose a topology".
- Grow the "Lessons from experience" section: add or refine concise, actionable lessons grounded in the process signals (cite the evidence, e.g. 'chain/3 ran clean 2/2 on tool-using medium retrieval; star/3 flagged duplicate_state_mutation 3x'). Speak of running cleanly / avoiding process failure modes, NOT of being 'correct' or 'right'.
- Keep every lesson GENERAL – key it on task characteristics (task type, tools, size, state mutation, search breadth), not on benchmark-specific trivia.
- Prefer revising an existing lesson over duplicating it; drop lessons the new evidence contradicts. Keep the document tight and readable.
- Output the COMPLETE updated markdown document and nothing else (no fences).

Task-Agent System Prompt

Every task agent shares one structural system prompt that fixes its stage contract, output schema, and confidence rubric; role-specific and tool-specific clauses are appended per agent. Instruction priority is stated explicitly so that domain personas can never override stage behavior. Agents exchange compacted relay packets derived from these structured artifacts rather than raw transcripts, and information visibility is enforced in code when packets are read, not through prompt instructions.

Task-agent system prompt (shared structural core)

You are one agent in a deterministic multi-agent workflow. Agent ID: $\langle agent\ id \rangle$. Agent Role: $\langle structural\ role \rangle$. Stage Role: $\langle worker\ |\ critic\ |\ aggregator\ |\ planner \rangle$.

Instruction priority: 1) structural stage contract, 2) tool-use contract, 3) task and benchmark instructions, 4) domain persona.

Use only the task messages, the prior artifact, and the visible packets provided in this conversation. Do not invent hidden context. Return exactly one JSON object and do not wrap it in markdown. Required JSON keys: answer_artifact, summary, critique, revision_request, confidence, unresolved_issues, evidence_summary.

Set confidence to reflect confidence in the current answer_artifact only, using this rubric: 0.0 = no answer or pure planning; 0.25 = weak hypothesis; 0.5 = plausible but incomplete; 0.75 = likely correct with remaining gaps; 1.0 = strongly supported final answer. If a field is unknown, use an empty string, an empty list, or a conservative confidence score. evidence_summary must summarize actual evidence from tool outputs, visible packets, or the prior artifact. Do not claim evidence that was not actually retrieved or provided.

Answer-stage contract: answer_artifact must be the current best direct answer or a concise blocked-status explanation. Do not use answer_artifact for plans, tool lists, search strategies, or sub-question lists.

- **Worker contract:** gather or apply evidence, then state the best supported answer you can defend.

- **Critic contract:** challenge weak claims, verify against available evidence, and revise toward the best supported answer.
- **Aggregator contract:** synthesize peer outputs into one supported answer; do not simply restate unresolved debate.

Tool-use contract (tool-enabled stages): if evidence is missing or weak, call the relevant tool instead of narrating that you need to search. Do not return a blocked, unknown, or planning answer before at least one tool attempt unless the visible packets or prior artifact already contain sufficient evidence.

Long-Term Playbook (Topology Planning Skill)

The long-term playbook is a markdown document read in full by the Planner at both planning and repair time. Its first two sections are protected: the Reflector may refine their wording but never delete them. The final section is rewritten by the Reflector from process-signal-labelled run summaries. We show the document with the lessons accumulated during our experiments, typeset for readability.

Topology planning skill document

Standing principles. Always apply these, on any benchmark, even one never seen before.

1. **Concentrate state changes in a single executor.** Writes, sends, schedules, deletions, and payments must be performed by exactly one agent. Repeating the same state-changing action across agents wastes effort and can double-apply it, corrupting the result. Reading, planning, and genuinely independent sub-actions can still run in parallel.
2. **Match the topology to the question's shape.** Parallel workers suit independent facets (breadth); a chain of clues where each step depends on resolving the previous is better served by shared context (chain or debate) so the reasoning assembles instead of fragmenting across agents that each see only a piece. Add an agent only when it does work the task needs – a verifier earns its slot only if it also gathers or checks evidence, not if it merely waits.
3. **Distinguish a premature give-up from honest uncertainty.** If the gathered evidence supports or points toward an answer (including by inference from partial clues), commit the best-supported one rather than stalling (“let me search more”) or returning a non-answer. Only when the evidence genuinely supports no answer should you say so and note what is missing – never fabricate. Convey degree of belief with a confidence value.

How to choose a topology. Analyze the task's dependency structure, evidence needs, action risks, aggregation requirements, and resource budget. Choose the smallest topology in which every agent has a distinct, necessary contribution. Treat the following as possibilities, not fixed mappings:

- Independent subtasks may benefit from parallel workers.
- Dependent subtasks may benefit from sequential execution or shared context.

- Material uncertainty may justify an independent evidence-checking critic.
- Tasks requiring decomposition and aggregation may benefit from a coordinator.
- A singleton is appropriate when another agent would not contribute distinct work.

For external state mutation, exactly one agent may execute the mutating action; other agents may only read, plan, or verify. Use lessons from prior runs as evidence-weighted suggestions. Consider their relevance, sample size, and observed process failures, and depart from them when the current task analysis supports another topology. State why the selected topology is preferable to the simplest viable alternative.

Lessons from experience. Concrete patterns learned from prior runs, with the evidence behind them. The reflection agent grows and prunes this list.

- **Prefer voting over singleton or debate for tool-less reasoning.** Sequential or interactive topologies (chain/2, debate/2, star/2) and singletons correlate with higher process failure rates in tool-less reasoning contexts. Evidence shows voting/3 and voting/4 running clean 35/35 in these settings, while singleton/1 (0/6), debate/2 (0/4), and star/2 (0/1) have triggered process failures.
- **Minimize topology complexity to avoid signal loss.** Inefficient or over-provisioned structures correlate strongly with `message_compaction_loss` (flagged repeatedly across runs). Keep the topology lean to ensure evidence is preserved through the pipeline without being truncated or lost during synthesis.
- **Include explicit validation for high-precision tasks.** Relying on implicit aggregation without a dedicated validator can trigger process failures; the auditor has flagged `missing_validator` when topologies lacked a distinct verification step to audit the final synthesis.

Agent Harness and the Agentic Loop

Every task agent runs inside a single shared harness that defines one stage-execution contract. The harness exposes one generation interface that takes the stage prompt, the tool schemas, a temperature, and a tool-iteration budget, and returns the stage text together with token usage and a structured record of every tool call.

A stage execution proceeds as follows. Deterministic orchestrator code first assembles the stage prompt from fixed parts. These parts are the structural system prompt, the role-specific clause, the stage directive, the relay packets the agent is allowed to see, and the bounded evidence digest. The harness then runs a bounded agentic loop, shown in Figure 7. In each iteration the model may either return tool calls or return a final text. Tool calls are executed by harness-owned handlers, and their outcomes are appended to the conversation as tool messages. When the model returns a final text without tool calls, the loop ends and the text is coerced into the structured JSON artifact of the stage contract. The runtime never fabricates tool calls after the fact. If the model claims evidence it did not retrieve, the claim simply remains

unsupported in the artifact and is visible to the Auditor.

The loop manages its own context. Only the most recent k tool iterations are kept verbatim in the conversation. All older iterations are replaced by one deterministic summary message that lists, for every summarized iteration, the assistant text preview and each tool call with its arguments, status, and a compacted output. Full document text retrieved by a read tool is preserved in this summary up to a larger character budget, because retrieved evidence is the part of the history the final answer depends on. The model is told explicitly that the summary is compressed and that the latest raw tool messages win on any conflict.

The loop also carries a set of deterministic guards (Table 12). They stop unproductive behavior early and convert every abnormal exit into a typed, non-silent outcome. In particular, when the iteration budget is exhausted or a hard timeout fires, the harness forces one final tool-free model call that must answer from the evidence already gathered, so the stage always produces an artifact rather than an empty output. After the stage returns, the orchestrator removes tool records whose exact tool name and arguments already ran earlier in the run, which guarantees that a replayed state-changing call is applied exactly once, and appends the artifact’s claims and evidence to the shared evidence ledger. If one agent trips its tool-failure circuit breaker, only that agent’s contribution is dropped and the remaining agents continue, so a single flaky tool cannot kill the whole task.

Guard	Behavior
Duplicate call check	An identical tool call repeated inside one stage is answered from its earlier result instead of re-executing.
Stagnant search check	When consecutive search iterations return the same result set, the loop steers the agent to read or answer instead of searching again.
Failure circuit breaker	Repeated consecutive failures of the same tool end the tool phase for this stage (3 failures, 2 for search tools).
Read gate	An agent that searched but never opened a document may not return a blocked answer. It is redirected once to read the top hit first.
Forced final answer	On budget exhaustion, timeout, or an empty completion, one final tool-free call must produce a best-effort answer from the gathered evidence, recorded with a typed stop reason.

Table 12: Deterministic guards inside the agentic loop.

Parameter	Value
Tool iterations per stage	8
Raw tool iterations kept verbatim	2
Summary budget for older iterations	6,000 chars
Preserved document text in summary	12,000 chars
Tool-failure circuit breaker (general / search)	3 / 2

Table 13: Agentic-loop defaults.

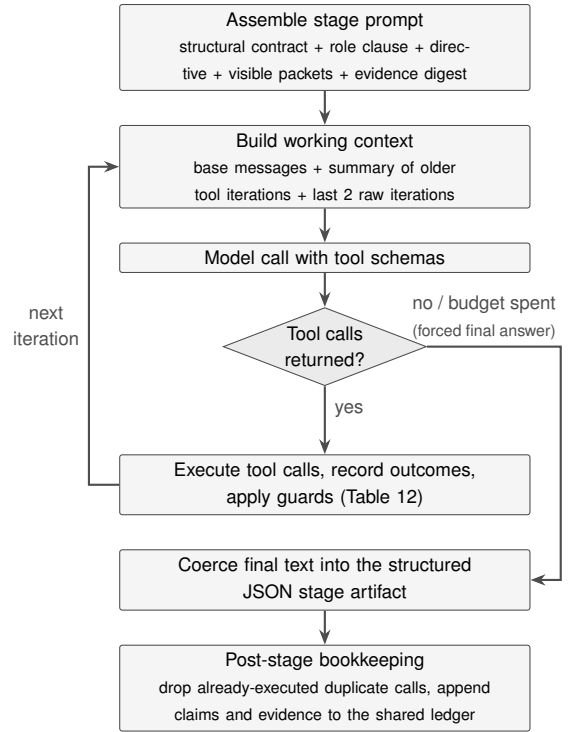


Figure 7: The agentic loop executed by the shared harness for one agent stage. The loop is identical for both LLM backends.

Worker Context Management Under Topology Mutation

Agents in MANTA are stateless between stages. No agent owns a private chat history that survives a turn. All conversational state lives in one shared run state with three append-only stores. The packet store holds every relay packet ever sent. The evidence ledger holds every claim and its supporting evidence, deduplicated by agent, turn, and claim text. The candidate list holds the best group output of each completed turn. A stage prompt is always rebuilt from these stores at execution time.

What an agent sees is decided at read time, in code, by a shared context controller. When a stage is about to run, the controller selects the packets addressed to that agent, filters them by kind, turn, and sender, keeps only the latest packet per sender and kind, checks that the sender’s share scope permits the reader, and finally applies the reader’s own bounds such as summary-only compaction and a per-packet character budget. The controller also renders the evidence ledger into one bounded digest packet whose scope follows the reader’s policy. A worker may see only its own branch, while every final synthesis stage always receives the global digest. The digest is prompt-only context and is never written back into the packet store.

This design makes topology mutation cheap and lossless, as sketched in Figure 8. A mutation is applied to a copy

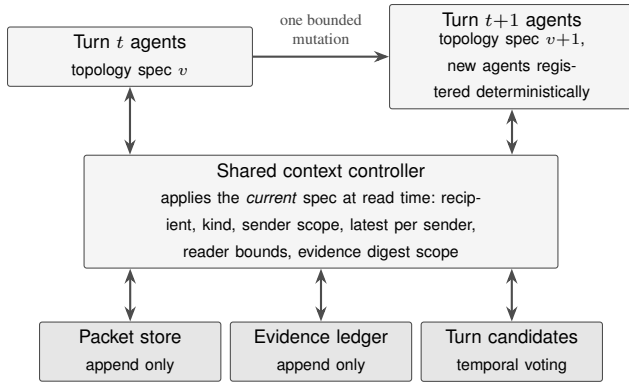


Figure 8: Context management across a topology mutation. Agents are stateless and read the shared stores only through the controller, so re-pointing the controller at the mutated specification changes visibility without migrating or losing any state.

of the current topology specification and validated. The orchestrator then simply re-points the context controller at the new specification. Because every read is lazy, nothing is migrated, recomputed, or truncated. All packets, ledger entries, and candidates written under the old topology remain in the shared state, and the next turn’s agents inherit them automatically through the same read path. Only the visibility rules change, since branch membership, share scopes, and evidence access are now resolved against the new specification.

Agents created by a mutation are registered deterministically. The orchestrator assigns their backbone model type, message budget, and domain persona from fixed rules without any extra LLM call. A new agent starts with an empty private context. Its first prompt is assembled from the task packets addressed to it, the packets its policy makes visible, and the evidence digest, so it can build on all prior evidence without ever seeing a raw transcript. Agents that a mutation removes from the active topology leave their packets and ledger entries behind, so their work is not lost.

Two further mechanisms connect the mutated turn to the audited one. First, the Auditor’s one-sentence recommendation is injected into every stage directive of the repaired turn as an explicitly untrusted diagnosis. Agents are instructed to verify it against the task and to re-evaluate the prior answer under it, rather than to obey it blindly. Second, the best output of every earlier turn is preserved as a temporal candidate. Final answer selection votes over these candidates, so a mutation that makes the answer worse cannot overwrite a better incumbent from before the mutation.