

Explainable and Resource-Efficient Spatial Reasoning in Multimodal LLMs for Decision-Critical Applications

Piyush Jain¹, Kousik Dasgupta², Rajarshi Roy³, and Subarna Tripathi⁴

¹ Heritage Institute of Technology, Kolkata, India
piyushj0204@gmail.com

² Kalyani Government Engineering College, Kalyani, India
kousik.dasgupta@gmail.com

³ IAIRO, India

rajarshi.roy@iairo.ai

⁴ Intel Corporation, USA
subarna.tripathi@intel.com

Abstract. As Multimodal Large Language Models (MLLMs) are increasingly deployed in decision-critical pipelines—robotics, embodied AI, and safety monitoring—the opacity of their spatial judgments limits operator trust and auditability. MLLMs demonstrate impressive reasoning capabilities but often struggle with fine-grained spatial understanding and suffer from object hallucination. Previous work, ByDeWay, introduced Layered-Depth-Based Prompting (LDP), a training-free framework that mitigates hallucinations by structuring input prompts using monocular depth estimations. However, while coarse depth layering effectively anchors depth perception, it falls short in resolving complex object-to-object spatial relationships within the same geometric plane—such as projective (e.g., “left of”, “above”) and topological (e.g., “inside”, “touching”) relations. In this paper, we propose **ByDeWay-V2**, an enhancement that seamlessly integrates explicit spatial relational context alongside depth cues, expressed as human-readable predicates that serve as auditable evidence for downstream decision support. Leveraging an open-vocabulary object detector (YOLO-World-L), our framework computes precise pairwise geometric relations between detected objects and injects them as structured spatial predicates into the MLLM prompt. This fully training-free approach bridges the gap between 3D scene depth and 2D spatial semantics. We evaluate ByDeWay-V2 on the Visual Spatial Reasoning (VSR) and BLINK benchmarks across multiple MLLMs, with hallucination grounding assessed on POPE. On the BLINK spatial subset, ByDeWay-V2 achieves a **46% relative improvement in F1 score** over LDP for Qwen2.5-VL, and recovers BLIP-Base’s spatial reasoning on VSR from near-random performance to a competitive F1 of 0.53. Notably, our lightest configuration operates under a strict 40-token context budget on CPU, illustrating the framework’s suitability for resource-constrained, real-time decision-support settings.

Keywords: Multimodal Large Language Models · Spatial Reasoning · Explainable AI · Decision Support Systems · Hallucination Reduction by Spatial Grounding · Resource-Efficient Inference

1 Introduction

Multimodal Large Language Models (MLLMs) have emerged as powerful general-purpose systems capable of handling diverse tasks spanning both language and vision modalities. From visual question answering (VQA) to complex scene understanding, these models exhibit strong performance in zero-shot and few-shot settings by leveraging large-scale pretrained representations. However, two persistent challenges continue to limit their reliability. Chief among them are *visual hallucinations*—the tendency of MLLMs to generate content not grounded in the visual input [2]—and *spatial reasoning deficits*, where models struggle to accurately interpret geometric, projective, and topological relationships between objects. These issues become especially problematic in domains requiring precise object-level grounding, such as robotics, embodied AI, and safety-critical applications.

Beyond raw accuracy, deployment in decision-critical pipelines demands *interpretability*: an operator relying on an MLLM’s spatial judgment—e.g., to trigger a robotic arm’s motion or flag a safety violation—needs auditable justification for that judgment, not merely a black-box output. Existing training-free hallucination-mitigation methods largely improve accuracy without producing intermediate, human-readable evidence, limiting their usefulness in settings where decisions must be explained or reviewed. This motivates a framework that not only improves spatial reasoning accuracy but also surfaces its reasoning as explicit, inspectable predicates suitable for decision-support and auditing workflows.

The spatial reasoning gap: While LDP provides crucial depth-aware structure, it operates at a macro-regional level. A significant limitation arises when querying fine-grained interactions *between* objects that co-exist within the same depth stratum. Knowing that a “person” and a “refrigerator” both reside in the “closest” layer does not explicitly inform the MLLM whether the person is “next to”, “in front of”, or “inside” the refrigerator. Benchmarks such as VSR [10] and BLINK [6] expose this weakness: modern MLLMs still frequently guess or hallucinate answers when confronted with adjacency, orientation, or topological queries. We empirically confirm this gap—LDP alone yields an F1 score of only 0.05 for BLIP-Base on VSR, and as low as 0.50 on the BLINK spatial reasoning subset for a state-of-the-art model such as Qwen2.5-VL.

To overcome this limitation, we present **ByDeWay-V2**. We augment the original LDP pipeline with a dedicated **SpatialAnalyser** module that extracts explicit geometric spatial relations between detected objects. We employ YOLO-World-L [5], an open-vocabulary real-time detector, to identify and localise all relevant objects in the scene via precise bounding boxes. By computing pairwise geometric heuristics—including Intersection-over-Union (IoU), centre-point distances, and bounding box overlap ratios—we systematically map spatial

interactions into explicit, human-readable predicates (e.g., “The laptop is left of person 1”, “The cat is inside the vase”). This fine-grained relational context is appended alongside the depth-layer captions, providing the MLLM with a comprehensive prompt that marries 3D depth organisation with 2D inter-object spatial semantics. The complete pipeline is illustrated in Figure 1.

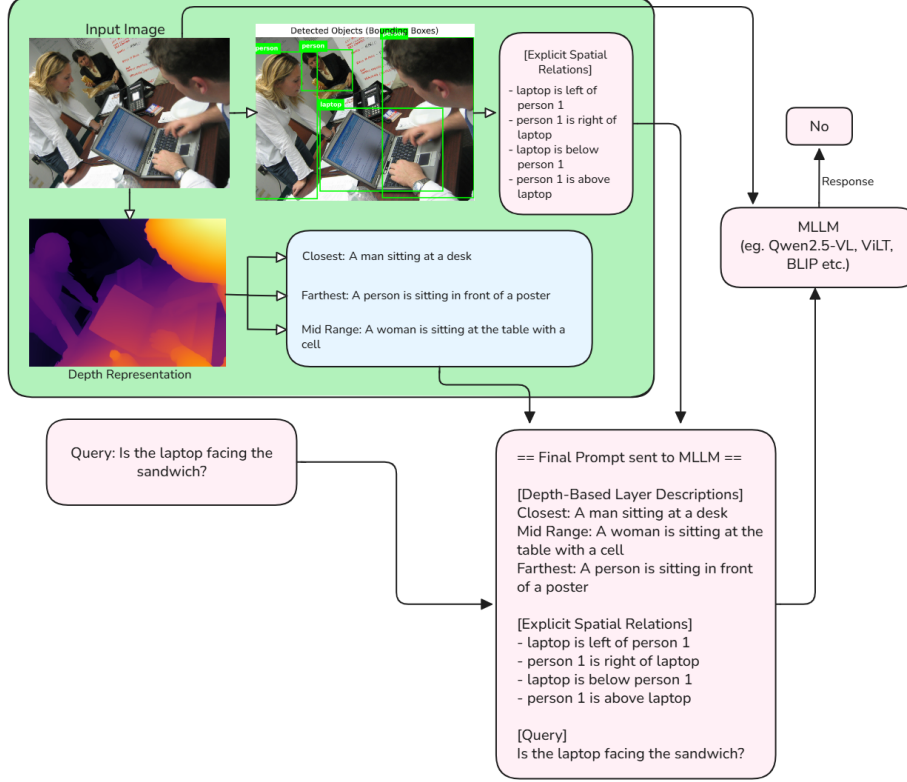


Fig. 1: **ByDeWay-V2 Workflow.** The framework runs two parallel branches on the input image. (*Top branch*) YOLO-World-L detects all objects and returns precise bounding boxes; pairwise geometric heuristics then derive explicit spatial predicates (e.g. “laptop is left of person 1”, “person 1 is above laptop”). (*Bottom branch*) DepthAnything V2 produces a dense depth map that is partitioned into three layers (closest, mid-range, farthest); KOSMOS-2 captions each layer independently. Both streams are serialised into a single structured prompt (*Final Prompt sent to MLLM*) and forwarded—together with the original image and user query—to the downstream MLLM (e.g. Qwen2.5-VL, ViLT, BLIP). The dotted path represents the standard baseline prompt used for comparison.

As illustrated in Figure 1, the ByDeWay-V2 pipeline operates through two parallel branches to process the input image. The upper branch employs YOLO-World-L to detect and localise objects, applying geometric heuristics to generate

pairwise spatial predicates. Concurrently, the lower branch utilises DepthAnything V2 and KOSMOS-2 to segment the scene into depth-specific text captions. These outputs are subsequently synthesised into a unified, structured prompt that equips the MLLM with comprehensive spatial and depth awareness without requiring parameter updates. Our key contributions in ByDeWay-V2 are:

- We introduce an enhanced, fully training-free framework that augments LDP with a **SpatialAnalyser** module for explicit spatial relation extraction.
- We present a hybrid prompting methodology that combines coarse depth-aware scene decomposition with precise, bounding-box-derived pairwise geometric predicates.
- We demonstrate the modular, model-agnostic nature of our approach, requiring no parameter updates to any downstream MLLM.
- We conduct extensive evaluations on VSR [10], BLINK [6], and POPE [9] across Qwen2.5-VL- [1], BLIP-Base [8], and ViLT [7], revealing that explicit spatial relational prompting substantially improves F1 score and hallucination resistance, especially for compact models operating under strict token budgets.

2 Related Work

2.1 Hallucination and Spatial Reasoning in MLLMs

Visual hallucination—where MLLMs generate content inconsistent with the image—remains a central open problem. A recent comprehensive survey [2] categorises hallucinations spanning object existence, spatial relations, colour, and attribute misidentification, underscoring the breadth of the challenge. The POPE benchmark [9] isolates object-existence hallucinations using binary VQA and has become the de-facto standard for evaluating anti-hallucination interventions.

Fine-grained spatial reasoning demands more than object identification: models must correctly infer *how* objects relate geometrically. The VSR dataset [10] provides 10,119 image-caption pairs annotated with seven relation categories (projective, topological, adjacency, orientation, proximity, directional, and unallocated), revealing that even large MLLMs struggle with relations such as “touching” or “in front of”. BLINK [6] further challenges MLLMs with visually perceptual tasks—including spatial reasoning—that humans solve effortlessly but current models largely fail. Models such as LLaVA [11] and SpatialVLM [3] have sought to address spatial understanding through instruction tuning and synthetic spatial QA datasets, respectively; however, these approaches require significant training data and parameter updates. ByDeWay-V2 targets the same capability gap in a *training-free* manner.

2.2 Open-Vocabulary Detection for Spatial Scene Analysis

Grounding spatial claims requires first knowing *where* objects are. Open-vocabulary detectors generalise beyond fixed class vocabularies, making them well-suited for zero-shot spatial analysis. YOLO-World [5] achieves real-time open-vocabulary

detection by coupling a YOLO backbone with vision-language alignment, enabling the detection of arbitrary text-prompted object categories without retraining. Grounding DINO [12] similarly combines a DINO transformer with grounded language pretraining for open-set detection. Set-of-Marks [20] overlays visual marks onto detected regions to anchor LLM attention to specific image areas, demonstrating that structured detection outputs can substantially improve spatial grounding in black-box MLLMs. Our work employs YOLO-World-L as a lightweight, inference-efficient detection backbone whose bounding box outputs feed directly into our geometric relation computation module—without any visual overlay or fine-tuning.

2.3 Depth-Aware and Prompt-Based Spatial Grounding

Depth information is a natural cue for spatial disambiguation. DepthAnything V2 [21] provides robust affine-invariant monocular depth estimates in a zero-shot setting, enabling straightforward scene stratification. DEVICE [19] integrates depth maps with visual-concept tokens for richer image captioning, while Scan2Cap [4] and SpaCap3D [17] reason about inter-object relations in 3D point-cloud settings using scene-object graphs and spatiality-guided transformers. Modular pipelines such as DCE [16] combine depth, spatial, and interaction sub-modules for structured caption generation.

On the prompting side, chain-of-thought [18] and instruction-tuning methods [11] have improved general reasoning in MLLMs, yet they do not explicitly inject geometric spatial predicates. ByDeWay [15] (V1) introduced LDP as the first training-free depth-stratified prompting strategy and demonstrated consistent gains on POPE and GQA. ByDeWay-V2 extends this by adding an explicit relation extraction layer, bridging the gap between coarse 3D depth organisation and fine-grained 2D inter-object spatial semantics.

3 Methodology

3.1 Stage 1: Layered Depth-Based Prompting (LDP)

We briefly recap LDP [15] for completeness. Given an RGB image $\mathbf{I}$, DepthAnything V2 [21] produces an affine-invariant inverse depth map $D(x, y)$. Percentile thresholds T_1 (30th) and T_2 (70th) define three binary masks $\mathcal{M}_{\text{close}}, \mathcal{M}_{\text{mid}}, \mathcal{M}_{\text{far}}$ that isolate the closest, mid-range, and farthest pixel regions, respectively. Each masked region is passed to KOSMOS-2 [13], which generates a localised natural-language caption s_k for layer $k \in \{\text{close}, \text{mid}, \text{far}\}$. These three captions are concatenated into the depth context string $\mathcal{C}_{\text{LDP}}$:

$$\mathcal{C}_{\text{LDP}} = \text{Closest: } s_{\text{close}} \mid \text{Mid-Range: } s_{\text{mid}} \mid \text{Farthest: } s_{\text{far}}. \quad (1)$$

3.2 Stage 2: The SpatialAnalyser Module

Open-Vocabulary Object Detection. Given image $\mathbf{I}$ of width W and height H , we run YOLO-World-L [5] with a vocabulary derived from the entities

mentioned in the task query (and common COCO categories as a fallback). This yields N detections:

$$\mathcal{D} = \{(b_i, c_i)\}_{i=1}^N, \quad (2)$$

where $b_i = (x_i^\ell, y_i^t, x_i^r, y_i^b)$ is the axis-aligned bounding box (left, top, right, bottom) and c_i is the class label string. Figure 2 illustrates typical detections produced by YOLO-World-L on a representative scene.

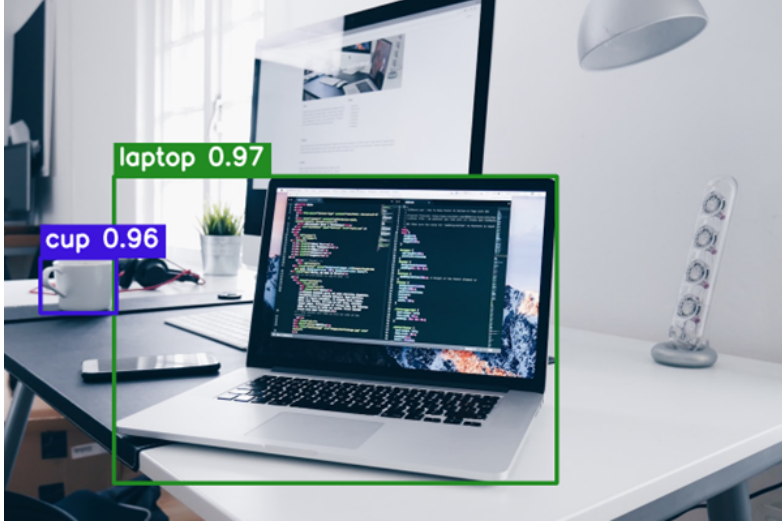


Fig. 2: **YOLO-World-L open-vocabulary detection on a high-resolution sample.** The model successfully isolates the two target entities specified in a spatial query (“The cup is at the left side of the laptop.”): **laptop** (conf. 0.98) and **cup** (conf. 0.96). These unambiguous, high-confidence bounding boxes serve as the geometric primitives from which the **SpatialAnalyser** module computes pairwise spatial predicates (e.g. **left of**, **near**) to form the MLLM prompt.

Pairwise Geometric Relation Computation. For each ordered pair (i, j) with $i \neq j$ we compute the following geometric properties.

Centre coordinates.

$$cx_i = \frac{x_i^\ell + x_i^r}{2}, \quad cy_i = \frac{y_i^t + y_i^b}{2}. \quad (3)$$

Vertical and horizontal relations.

$$r_v(i, j) = \begin{cases} \text{above} & \text{if } cy_i < cy_j, \\ \text{below} & \text{otherwise,} \end{cases} \quad r_h(i, j) = \begin{cases} \text{left of} & \text{if } cx_i < cx_j, \\ \text{right of} & \text{otherwise.} \end{cases} \quad (4)$$

Containment and contact. Let $\text{Inter}(b_i, b_j)$ denote the area of intersection and $\text{Area}(b_i) = (x_i^r - x_i^\ell)(y_i^b - y_i^t)$. The overlap ratio is:

$$\text{OR}(i, j) = \frac{\text{Inter}(b_i, b_j)}{\min(\text{Area}(b_i), \text{Area}(b_j))}. \quad (5)$$

If $\text{OR}(i, j) > \theta_{\text{in}}$ the relation is **inside**; if $\theta_{\text{touch}} < \text{OR}(i, j) \leq \theta_{\text{in}}$ it is **touching**. We set $\theta_{\text{in}} = 0.70$ and $\theta_{\text{touch}} = 0.10$.

Proximity. The normalised Euclidean distance between centres is:

$$d_{ij} = \frac{\sqrt{(cx_i - cx_j)^2 + (cy_i - cy_j)^2}}{\sqrt{W^2 + H^2}}. \quad (6)$$

If $d_{ij} < \tau_{\text{near}}$ the relation is **near**; otherwise **far from**. We use $\tau_{\text{near}} = 0.30$.

All relations for the pair (i, j) are resolved in priority order: containment > contact > vertical/horizontal > proximity.

Natural Language Serialisation. Each extracted predicate r is rendered as a plain-English sentence:

$$\text{“The } c_i \text{ is } r \text{ the } c_j\text{.”} \quad (7)$$

All $N(N - 1)$ ordered-pair sentences are concatenated into the spatial context string $\mathcal{C}_{\text{Spatial}}$.

3.3 Hybrid Prompt Construction

The final prompt $\mathcal{P}$ submitted to the MLLM combines both context strings with the user query Q :

$$\mathcal{P} = \mathcal{C}_{\text{LDP}} \parallel \mathcal{C}_{\text{Spatial}} \parallel Q, \quad (8)$$

where $\parallel$ denotes string concatenation. The systematic generation of this prompt is detailed in Algorithm 1. Figure 3 contrasts the baseline prompt with our augmented variant.

Algorithm 1 ByDeWay-V2 Hybrid Prompt Generation

Require: Input Image $\mathbf{I}$, User Query Q

Ensure: Final MLLM Prompt $\mathcal{P}$

```

1: // Stage 1: Depth-Based Layering
2:  $\mathcal{C}_{\text{LDP}} \leftarrow \text{GenerateDepthCaptions}(\mathbf{I})$ 
3: // Stage 2: Spatial Relation Extraction
4:  $\mathcal{D} \leftarrow \text{YOLOWorldDetect}(\mathbf{I}, Q)$ 
5:  $\mathcal{C}_{\text{Spatial}} \leftarrow \emptyset$ 
6: for each ordered pair  $(i, j)$  in  $\mathcal{D}$  do
7:    $r \leftarrow \text{ComputeGeometricRelation}(i, j)$ 
8:    $\mathcal{C}_{\text{Spatial}} \leftarrow \mathcal{C}_{\text{Spatial}} \parallel \text{Serialise}(c_i, r, c_j)$ 
9: end for
10: // Prompt Assembly
11:  $\mathcal{P} \leftarrow \mathcal{C}_{\text{LDP}} \parallel \mathcal{C}_{\text{Spatial}} \parallel Q$ 
12: return  $\mathcal{P}$ 

```

Baseline Prompt

You are evaluating if a spatial description is true or false.
 Look at the image carefully.
Statement: “The cup is at the left side of the laptop.”
 Answer only ‘true’ or ‘false’.

ByDeWay-V2 Prompt (LDP + Spatial)

You are an expert visual evaluator. Verify if the statement is ‘true’ or ‘false’. Trust your visual analysis FIRST; use the context below as secondary hints.

[Depth-Based Layer Descriptions]

Closest: A laptop computer and a cup of coffee on a wooden desk.
Mid-Range: A smartphone lying on the desk next to the laptop.
Farthest: A dark room in the background.

[Explicit Spatial Relations — YOLO-World-L]

- cup is left of laptop
- cup is near laptop

Statement: “The cup is at the left side of the laptop.”
 Answer ONLY with a single word: ‘true’ or ‘false’.

Fig. 3: **Prompt comparison for spatial query: “The cup is at the left side of the laptop.”** (*Top*) The baseline prompt provides no spatial grounding. (*Bottom*) The ByDeWay-V2 prompt supplies LDP layer captions and explicit YOLO-World-L spatial predicates extracted at inference time. The computed predicate (**cup is left of laptop**) directly aligns with the query, allowing the MLLM to confidently answer *true*.

4 Experiments

4.1 Experimental Setup

All experiments are conducted in a training-free setting; no model parameters are modified at any stage. Unless stated otherwise, YOLO-World-L [5] uses a confidence threshold of 0.20 for detection and a maximum of 20 spatial relation pairs per image. For models evaluated on the VSR [10] and BLINK [6] benchmarks, the spatial vocabulary is seeded with the two entity nouns parsed from each caption (subject and object), supplemented by common COCO categories for robustness. All inference is performed on a single NVIDIA A100 GPU (40 GB) for Qwen2.5-VL [1], and on CPU for ViLT [7].

4.2 Datasets and Benchmarks

VSR [10]. The Visual Spatial Reasoning dataset contains 10,119 image-caption pairs drawn from COCO images, labelled *true* or *false* based on whether the stated

spatial relation holds. Relations span seven categories: projective, topological, adjacency, directional, proximity, orientation, and unallocated. We evaluate on the official random-split test set.

POPE [9]. The Polling-based Object Probing Evaluation measures object-existence hallucination via binary (*yes/no*) VQA questions. For our evaluation, we employ a small variant of the POPE dataset [14], which comprises 150 curated samples and was originally introduced in the ByDeWay [15] baseline evaluation. We evaluate across the entire subset and report overall accuracy, precision, recall, and F1 score.

BLINK [6]. BLINK targets visually perceptual tasks that are trivial for humans but challenging for MLLMs. We evaluate on the *Spatial Reasoning* subset, which requires the model to identify relative positions of objects (left/right/above/below) in natural images.

4.3 Evaluated Models and Prompt Variants

We evaluate three models that span a wide capability range:

- **Qwen2.5-VL-7B** [1]: A 7B-parameter state-of-the-art MLLM with strong vision-language alignment.
- **BLIP-Base** [8]: A lightweight VLP model (approximately 250M parameters) evaluated in a zero-shot setting.
- **ViLT-B/32** [7]: A convolution-free, token-efficient transformer operating under a strict 40-token text input limit.

Each model is evaluated under two prompt configurations: **LDP (V1)** uses only the depth-layer captions from ByDeWay [15] as context, and **LDP+Spatial (V2)** adds the YOLO-World-L spatial predicates described in Section 3. For ViLT, the 40-token limit prevents the simultaneous inclusion of both LDP and spatial contexts; we therefore evaluate a **Spatial-Only** variant that injects spatial predicates only, omitting the verbose LDP layer descriptions. This design choice is itself an instructive finding: compact spatial predicate injection is more token-efficient than depth-layer captions, making ByDeWay-V2 compatible with severely token-constrained models.

4.4 Evaluation Metrics

We report Accuracy (Acc), Precision (P), Recall (R), and F1 score for all benchmark–model pairs. Let TP , TN , FP , and FN denote True Positives, True Negatives, False Positives, and False Negatives, respectively. The metrics are defined as follows:

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (9)$$

$$\text{Precision} = \frac{TP}{TP + FP} \quad (10)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (11)$$

$$\text{F1} = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (12)$$

For POPE we additionally report per-split accuracy (adversarial, popular, random). All metrics are computed over the full test sets.

4.5 Quantitative Performance Analysis

VSR Benchmark. Table 1 presents the full VSR results. The most striking gain is observed for BLIP-Base: LDP alone yields a near-random F1 of 0.053, while adding spatial relational context boosts F1 to **0.525**—a ten-fold improvement. This dramatic recovery demonstrates that, without geometric grounding, compact VLP models default to a biased answering strategy that spatial context decisively corrects.

For Qwen2.5-VL, adding spatial context strictly improves precision from 0.8658 to **0.8660**, while introducing a precision-recall trade-off: recall drops ($0.7155 \rightarrow 0.6130$), decreasing overall F1 ($0.7835 \rightarrow 0.7179$). We attribute this to Qwen’s “Vision-First Advisory” instruction, which instructs the model to trust its own visual perception over the provided context, leading it to override correct context hints when its internal visual representation is confident but incorrect. Crucially, however, the *precision gain* demonstrates that when the model does commit to an answer guided by spatial context, it is strictly more often correct—a desirable property in high-stakes settings. Similarly, for ViLT-B/32, substituting the verbose LDP captions with compact spatial predicates yields a notable precision increase from 0.5490 to **0.5747**. Although ViLT’s strict 40-token limit restricts the available context and causes a drop in recall (thereby lowering overall F1), the consistent precision gains across models confirm that explicit geometric grounding reliably anchors MLLM judgments.

Table 1: VSR benchmark results. Best per model in **bold**.

Model	Mode	Acc	Prec	Rec	F1
Qwen2.5-VL-7B	LDP (V1)	0.7872	0.8658	0.7155	0.7835
	LDP+Spatial (V2)	0.7408	0.8660	0.6130	0.7179
BLIP-Base	LDP (V1)	0.4642	0.5410	0.0279	0.0531
	LDP+Spatial (V2)	0.5367	0.5852	0.4767	0.5254
ViLT-B/32	LDP (V1)	0.5212	0.5490	0.6164	0.5808
	Spatial-Only (V2)	0.5207	0.5747	0.4200	0.4853

POPE Benchmark. Table 2 reports POPE results. ByDeWay-V2 improves hallucination resistance consistently across all three models on the curated 150-sample dataset. BLIP-Base records the largest absolute gain: overall accuracy improves from 86.00% (LDP) to **90.67%** (LDP+Spatial), while F1 score increases from 0.873 to 0.919. Qwen2.5-VL and ViLT show consistent improvements in precision and overall F1. These results confirm that explicit spatial relational context reduces object hallucination beyond what depth-based context alone provides.

Table 2: POPE benchmark overall results. Best per model in **bold**.

Model	Mode	Acc	Prec	Rec	F1
Qwen2.5-VL-7B	LDP (V1)	0.800	1.000	0.670	0.803
	LDP+Spatial (V2)	0.807	0.970	0.703	0.815
BLIP-Base	LDP (V1)	0.860	0.973	0.791	0.873
	LDP+Spatial (V2)	0.907	0.975	0.868	0.919
ViLT-B/32	LDP (V1)	0.860	0.927	0.835	0.879
	Spatial-Only (V2)	0.867	0.949	0.824	0.882

BLINK Spatial Subset. Table 3 presents results on the BLINK spatial reasoning subset. ByDeWay-V2 delivers the strongest gains of all three benchmarks here. For Qwen2.5-VL, F1 improves from 0.496 (LDP) to **0.727** (LDP+Spatial)—a **46% relative improvement**. This is the headline result of our paper: BLINK specifically targets the kind of fine-grained inter-object spatial queries (“is the cat to the left of the bowl?”) for which explicit pairwise geometric predicates provide direct, relevant evidence. BLIP-Base and ViLT also record meaningful gains in F1 and accuracy.

Table 3: BLINK Spatial subset results. Best per model in **bold**.

Model	Mode	Acc	Prec	Rec	F1
Qwen2.5-VL-7B	LDP (V1)	0.748	0.550	0.510	0.496
	LDP+Spatial (V2)	0.727	0.740	0.735	0.727
BLIP-Base	LDP (V1)	0.483	0.505	0.301	0.244
	LDP+Spatial (V2)	0.490	0.343	0.306	0.254
ViLT-B/32	LDP (V1)	0.490	0.444	0.465	0.418
	Spatial-Only (V2)	0.525	0.345	0.336	0.318

4.6 Per-Category Analysis on VSR

Table 4 breaks down BLIP-Base performance by VSR relation category. In this table, the symbol $\Delta F1$ denotes the absolute incremental increase in the F1 score achieved by ByDeWay-V2 compared to the baseline LDP method. The most dramatic gains are observed in the **proximity** and **projective** categories (“near”, “left of”, “above”, etc.), where F1 improves by over +0.50. These are precisely the relation types for which YOLO-World-L bounding-box geometry provides direct evidence.

Table 4: Per-category VSR F1 for BLIP-Base. $\Delta F1$ indicates the absolute incremental improvement over the LDP (V1) baseline.

Category	LDP (V1)	LDP+Spatial (V2)	$\Delta F1$
Projective	0.047	0.564	+0.517
Topological	0.019	0.445	+0.426
Adjacency	0.083	0.512	+0.429
Proximity	0.025	0.597	+0.572
Directional	0.080	0.512	+0.432
Orientation	0.132	0.522	+0.390
Unallocated	0.130	0.581	+0.451
Overall	0.053	0.525	+0.472

4.7 Discussion

The results across all three benchmarks converge on a consistent narrative: *explicit spatial relational prompting substantially improves MLLM spatial reasoning, particularly for models that lack dedicated spatial training*. The SpatialAnalyser module provides a geometric “grounding scaffold” that anchors MLLM attention to factual inter-object geometry, rather than statistical co-occurrence priors learnt during pretraining.

The most informative comparison is BLINK, where the spatial relations queried are directly of the form “is object A to the left/right of object B?”—a query our YOLO-derived predicates answer verbatim. The 46% relative F1 gain for Qwen2.5-VL on this benchmark suggests that when the spatial predicate is both present in the context *and* directly relevant to the query, the model can exploit it reliably.

The VSR precision-recall trade-off for Qwen2.5-VL warrants acknowledgment. The “Vision-First Advisory” prompt design was intentional: without it, models in earlier experiments over-relied on spatial context and produced lower accuracy when the object detector made errors. The trade-off reveals a fundamental tension between detector recall and MLLM confidence calibration that remains an open research question. Future work could explore confidence-weighted injection, where only high-confidence spatial predicates are included in the prompt.

5 Conclusion

We have presented **ByDeWay-V2**, a training-free extension of the Layered-Depth-Based Prompting framework that integrates explicit spatial relation extraction using YOLO-World-L. By computing pairwise bounding-box geometric heuristics and serialising them as natural-language predicates, ByDeWay-V2 bridges the gap between coarse 3D depth organisation and fine-grained 2D inter-object spatial semantics. Extensive evaluations on the VSR, POPE, and BLINK benchmarks across three MLLMs—Qwen2.5-VL-7B, BLIP-Base, and ViLT—demonstrate consistent gains in F1 score and hallucination resistance. The framework’s training-free, model-agnostic design makes it directly applicable to any MLLM pipeline without retraining.

References

1. Bai, S., Chen, K., Liu, X., Wang, J., Ge, W., Song, J., Wang, P., Luo, K., Wang, K., Li, H., et al.: Qwen2.5-vl technical report. arXiv preprint arXiv:2502.13923 (2025)
2. Bai, Z., Wang, P., Xiao, T., He, T., Han, Z., Zhang, Z., Shou, M.Z.: Hallucination of multimodal large language models: A survey. arXiv preprint arXiv:2404.18930 (2024)
3. Chen, B., Xu, Z., Kirmani, S., Ichter, B., Sadigh, D., Guibas, L., Xia, F.: Spatialvlm: Endowing vision-language models with spatial reasoning capabilities. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 14455–14465 (June 2024)
4. Chen, D.Z., Gholami, A., Nießner, M., Chang, A.X.: Scan2cap: Context-aware dense captioning in rgb-d scans. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) (2021)
5. Cheng, T., Song, L., Ge, Y., Liu, W., Wang, X., Shan, Y.: Yolo-world: Real-time open-vocabulary object detection. In: Proc. IEEE Conf. Computer Vision and Pattern Recognition (CVPR) (2024)
6. Fu, X., Hu, Y., Li, B., Feng, Y., Wang, H., Lin, X., Roth, D., Smith, N.A., Ma, W.C., Krishna, R.: Blink: Multimodal large language models can see but not perceive. arXiv preprint arXiv:2404.12390 (2024)
7. Kim, W., Son, B., Kim, I.: Vilt: Vision-and-language transformer without convolution or region supervision. In: Proceedings of the 38th International Conference on Machine Learning (2021)
8. Li, J., Li, D., Savarese, S., Hoi, S.: Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In: ICML (2023)
9. Li, Y., Du, Y., Zhou, K., Wang, J., Zhao, W.X., Wen, J.R.: Evaluating object hallucination in large vision-language models. In: Proceedings of EMNLP (2023)
10. Liu, F., Emerson, G.E.T., Collier, N.: Visual spatial reasoning. Transactions of the Association for Computational Linguistics (2023)
11. Liu, H., Li, C., Wu, Q., Lee, Y.J.: Visual instruction tuning (2023)
12. Liu, S., Zeng, Z., Ren, T., et al.: Grounding dino: Marrying dino with grounded pre-training for open-set object detection. arXiv preprint arXiv:2303.05499 (2023)
13. Peng, Z., Wang, W., Dong, L., Hao, Y., Huang, S., Ma, S., Wei, F.: Kosmos-2: Grounding multimodal large language models to the world. arXiv preprint arXiv:2306.14824 (2023)

14. Roy, R.: lmms-lab-pope-depth-captions. <https://huggingface.co/datasets/Rajarshi-Roy-research/lmms-lab-POPE-depth-captions> (2024)
15. Roy, R., Das, D., Banerjee, A., Bhattacharjee, A., Dasgupta, K., Tripathi, S.: Bydeway: Boost your multimodal llm with depth prompting in a training-free way (2025)
16. Sun, Y., Hao, J., Zhu, K., Liu, J.J., et al.: Descriptive caption enhancement with visual specialists for multimodal perception (2025)
17. Wang, H., Zhang, C., Yu, J., Cai, W.: Spatiality-guided transformer for 3d dense captioning on point clouds. In: Proceedings of the International Joint Conference on Artificial Intelligence (IJCAI) (2022)
18. Wei, J., Wang, X., Schuurmans, D., Bosma, M., Ichter, B., Xia, F., Chi, E., Le, Q., Zhou, D.: Chain-of-thought prompting elicits reasoning in large language models. In: NeurIPS (2022)
19. Xu, D., Huang, Q., Zhang, X., Cheng, H., Shuang, F., Cai, Y.: Device: Depth and visual concepts aware transformer for ocr-based image captioning. Pattern Recognition **164**, 111522 (2025)
20. Yang, J., Zhang, H., Li, F., Zou, X., Li, C., Gao, J.: Set-of-mark prompting unleashes extraordinary visual grounding in gpt-4v (2023)
21. Yang, L., Kang, B., Huang, Z., Zhao, Z., Xu, X., Feng, J., Zhao, H.: Depth anything v2. arXiv preprint arXiv:2406.09414 (2024)