

Insights on Time-consistent Deep Hedging under Elicitable Dynamic Risk Measures

Shuyi Zhang^a and Frédéric Godin^b

^aRiver Hill High School, Intern/Mentor Research Program, Clarksville, Maryland,

`szhang48@terpmail.umd.edu`

^bConcordia University, Department of Mathematics and Statistics, Montréal, Canada,

`frederic.godin@concordia.ca`

September 3, 2026

Abstract

We study deep hedging in the context of dynamics risk measures, where sequential decisions are time-consistent. Whereas the literature in such context mainly considers low-dimensional problems with simple environment dynamics, we tackle the high-dimensional problem of basket option hedging; we show that the approach is feasible and can be used conveniently in the presence of more complex state spaces. We rely on the conditional elicibility of spectral risk measures to represent the optimization objective. We provide insights on how the choice of scoring function impacts the training of the hedging agent. Lastly, the time-consistent hedging strategies are benchmark against deep hedging approaches relying on static risk measures leading to precommitment.

JEL classification: C44, C45, C58, G11, G13, G32

Keywords: Reinforcement Learning, Dynamic Risk Measures, Deep Hedging, Elicitability, Time-consistency, Conditional Value-at-Risk (CVaR), Options

1 Intro

Reinforcement learning (RL) is a popular method used to solve stochastic control optimization problems (Barto et al., 1983). Notably, RL has surpassed human performance in Go (Silver et al., 2016), Atari 2600 (Mnih et al., 2015), and chess (Silver et al., 2018), largely due to its ability to develop sequential decision making strategies in uncertain environments. Recently, RL has been applied to financial problems, with a strong emphasis on risk management dependent on market and portfolio dynamics. A particular avenue of RL applied to finance is dynamic hedging, where one mitigates the risk of some financial derivative by trading the underlying asset(s) the financial derivative is based upon. Buehler et al. (2019), Cao et al. (2019), and Halperin (2020) were the first to apply deep reinforcement learning (DRL), the fusion of reinforcement learning algorithms and deep neural networks, to dynamic hedging. Following these seminal works, a profusion of literature has applied DRL to increasingly complex hedging environments, incorporating features such as market frictions, more realistic market dynamics, richer state spaces, larger portfolios, more complex derivatives, and additional hedging instruments (Cao et al., 2023; Carbonneau and Godin, 2021, 2024; Ding et al., 2025; Du et al., 2020; François et al., 2024, 2025; Lütkebohmert et al., 2022; Marzban et al., 2023; Mikkilä and Kanninen, 2023; Murray et al., 2022; Neagu et al., 2024, 2025; Sharma et al., 2024; Wu and Jaimungal, 2023; Yuana, 2024).

In these contexts, typical RL frameworks involve optimizing a global objective using a *static* risk measure, which refers to the risk associated with the overall distribution of the cumulative reward, as seen in (Prashanth and Ghavamzadeh, 2016; Tamar and Mannor, 2013). However, these frameworks often result in policies that are suboptimal over time. To resolve this, a common design choice of RL frameworks is that of *time-consistency*, a property that ensures that policies remain optimal across time (Coache and Jaimungal, 2024; Yu and Ying, 2023). RL algorithms are particularly favorable when such frameworks are used within continuous (and therefore infinite) state and action spaces settings because they are much more efficient than conventional dynamic programming (DP) techniques, as the latter requires looping over all possible outcomes to find the optimal solution. At the same time, time-consistent risk-aware RL frameworks often rely on using *dynamic* risk measures, which evaluate future risk conditional on the information available at each point in time, to achieve time-consistency, but such approaches may suffer from the burden of recursively evaluating the dynamic risk measure through nested simulations.

A recent development is the integration of elicibility into risk-aware RL frameworks, allowing dynamic risk measures to be estimated efficiently by minimizing scoring (loss) functions without the computational burden of nested simulations (Coache et al., 2023; Marzban et al., 2023). While these approaches alleviate the computational challenges, there remains opportunity to further explore how elicitable risk frameworks can be designed in deep learning settings to produce desirable optimization landscapes for risk estimation and facilitate more effective convergence toward optimal RL policies. In this paper, we analyze different characterizations of strictly consistent scoring functions and use these insights to develop a conditionally elicitable actor-critic RL framework with a stochastic policy that targets desirable optimization geometry by exploiting the translation invariance of spectral risk measures. We characterize the optimization properties of different scoring functions and empirically examine their effects on the performance of risk-aware policies derived from the proposed algorithm in a finite-horizon setting with a high-dimensional state space and granular temporal resolution. The risk-aware RL setting considered in this paper is a dynamic hedging problem involving the mitigation of risk for a portfolio containing a European basket option with a one-year maturity through daily trading of its underlying assets. We consider both a time-consistent (dynamic) CVaR objective, for which the conditional elicibility framework is employed, and a precommitment (static) CVaR objective as a benchmark. The underlying assets are modeled according to the Dynamic Conditional Correlation - Generalized Autoregressive Conditional Heteroskedasticity (DCC-GARCH(1, 1)) framework. For our numerical experiments, we demonstrate that the conditional elicibility actor-critic RL framework can derive effective dynamic risk hedging policies in higher-dimensional settings, an aspect that has received limited attention in the existing literature. We find that high tail-sensitivity scoring functions such as canonical logarithmic or fractional-power, yields RL-based dynamic risk estimates that are the most accurate relative to critics trained using a nested approach benchmark when sufficient extreme-tail samples are available at high confidence levels. We find that while a precommitment static risk objective indeed is the optimal choice when mitigating terminal hedging risk to the hedging of basket options, deploying a dynamic risk objective yields a hedging policy with consistently lower hedging risk over shorter horizons, and a monotonic decrease in risk as maturity shortens. This is in contrast to results from the static risk policy, whose hedging risk increases as maturity decreases. This motivates the use of time-consistent risk objectives for hedging policies. The paper is organized as such: first, we outline the elicitable, time-consistent dynamic risk

framework and the theoretical considerations when characterizing scoring functions in Section 2. We then propose the main actor-critic algorithm in Section 3, and the underlying basket hedging problem it aims to solve in Section 4. Experimental results are provided and further discussion is carried out in Section 5.¹ Finally, we conclude in Section 6.

2 Conditionally Elicitable Time-consistent Dynamic Risk

Following ideas from Ruszczyński (2010) and Coache et al. (2023), we outline the theoretical setup we consider for risk optimization under time-consistent elicitable dynamic risk measures.

2.1 Time-consistent dynamic risk measures

We first outline the structure of risk measures used in this paper.

Let $\mathcal{T} := \{0, \dots, T\}$ be a sequence of time periods and $(\Omega, \mathcal{F}, \{\mathcal{F}_t\}_{t \in \mathcal{T}}, \mathbb{P})$ a filtered probability space satisfying the usual conditions. Define $\mathcal{X}_t$ as the set of $\mathcal{F}_t$ -measurable random variables for $t \in \mathcal{T}$. We consider a sequence of one-step conditional risk measures $\{\rho_t\}_{t=0}^{T-1}$ with each mapping $\rho_t : \mathcal{X}_{t+1} \rightarrow \mathcal{X}_t$ possessing the following properties:

- **Monotonicity:** For any $X, Y \in \mathcal{X}_{t+1}$ with $X \geq Y$, $\rho_t(X) \geq \rho_t(Y)$.
- **Translation Invariance:** For any $X \in \mathcal{X}_{t+1}$ and $m \in \mathbb{R}$, $\rho_t(X + m) = \rho_t(X) + m$.
- **Null at Zero Risk:** $\rho_t(0) = 0$.
- **Law invariance:** If $X \in \mathcal{X}_{t+1}$ and $Y \in \mathcal{X}_{t+1}$ have the same conditional distribution with respect to (w.r.t.) $\mathcal{F}_t$, then $\rho_t(X) = \rho_t(Y)$.

Ruszczyński (2010) highlights that such one-step conditional risk measures can be leveraged to design so-called dynamic risk measures $\{\rho_{t,T}\}_{t=0}^T$. In our work, for a $\mathcal{F}$ -adapted stochastic process $\{X_t\}_{t=0}^T$, we consider dynamic risk measure of the form

$$\begin{aligned} \rho_{t,T}(X_t, X_{t+1}, \dots, X_T) &\equiv X_t + \rho_t(X_{t+1} + \rho_{t+1}(X_{t+2} + \rho_{t+2}(X_{t+3} + \dots + \rho_{T-1}(X_T)) \dots)) \quad (2.1) \\ &= \rho_t \circ \rho_{t+1} \circ \dots \circ \rho_{T-1} \left(\sum_{k=t}^T X_k \right). \end{aligned}$$

Risk measures defined through such nesting approach possess favorable properties, such as

¹The python code to replicate the experiment can be found at <https://github.com/shuyizhang01/Time-consistent-Deep-hedging>.

that of time-consistency. A dynamic risk measure $\{\rho_{t,T}\}_{t=0}^T$ is said to be time-consistent if, for any $\mathcal{F}$ -adapted processes $\{X_t\}_{t=0}^T$ and $\{Y_t\}_{t=0}^T$ and any $0 \leq \tau_1 < \tau_2 \leq T$, conditions $X_{\tau_1} = Y_{\tau_1}, \dots, X_{\tau_2-1} = Y_{\tau_2-1}$ and $\rho_{\tau_2,T}(X_{\tau_2}, \dots, X_T) \geq \rho_{\tau_2,T}(Y_{\tau_2}, \dots, Y_T)$ imply that $\rho_{\tau_1,T}(X_{\tau_1}, \dots, X_T) \geq \rho_{\tau_1,T}(Y_{\tau_1}, \dots, Y_T)$. The interpretation of such property is that relative preference between risks persists through time when cycling through elements $\rho_{t,T}$ of the dynamic risk measure.

One can then show that

$$\rho_{t,T}(X_t, \dots, X_T) = X_t + \rho_t(\rho_{t+1,T}(X_{t+1}, \dots, X_T)) \quad (2.2)$$

which entails that the risk-to-go can be computed through a recursion analogous to the Bellman equation.

2.2 Integration in Markov decision processes and neural approximations

In reinforcement learning frameworks, an agent interacts with some environment and learns a policy over time. Accordingly, we consider a *Markov decision process* (MDP) with finite horizon $\mathcal{T}$ defined by the tuple $(\mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{C})$ containing a continuous state and action space, stationary transition probabilities, and a cost space. Because we are working in a finite horizon, we assume that the current stage t is an element of the state vector $s_t \in \mathcal{S}$. The symbol π denotes a stochastic policy, which associates, for any state vector s_t , a probability distribution over actions $a_t \in \mathcal{A}$. Thus, for each time period t , state variables s_t are observed, an action a_t is then drawn based on π , and transition probabilities characterize the next state and policy-induced $\mathcal{F}_{t+1}$ -measurable cost $c_t \in \mathcal{C}$ observed:²

$$\mathbb{P}(s_{t+1} = s', c_t = c \mid a_t = a, s_t = s, a_{0:t-1}, s_{0:t-1}) = \mathcal{P}(s', c \mid s, a).$$

In this framework, we solve for the policy that minimizes the initial risk-to-go:

$$\pi^* \equiv \operatorname{argmin}_{\pi} \rho_{0,T}(c_0^\pi, \dots, c_T^\pi), \quad (2.3)$$

²Here $x_{0:t}$ denotes $x_0, \dots, x_t$.

with any of the optimal policies being selected in case of non-uniqueness, and where the dependence of costs c on the policy π is made explicit. Due to time-consistency, the policy remains optimal at subsequent stages: for all $t \in \mathcal{T}$,

$$\pi^* \in \operatorname{argmin}_{\pi} \rho_{t,T}(c_t^\pi, \dots, c_T^\pi).$$

Furthermore, the Markovian nature of the evolution of the state vector combined with the recursive expression (2.2) allows defining a value function which reflects the risk-to-go. For a policy π , define

$$V_t^\pi(s_t) = \rho_{t,T}(c_{t:T}^\pi) = \rho_t(c_t^\pi + V_{t+1}^\pi(s_{t+1})). \quad (2.4)$$

The optimal value function V^* associated with an optimal policy π^* should thus satisfy

$$V_t^*(s_t) = \min_{\pi} V_t^\pi(s_t) = \min_{a_t} [\rho_t(c_t + V_{t+1}^*(s_{t+1}))]. \quad (2.5)$$

2.3 Conditional elicibility

For one-step conditional risk measures ρ_t , we use (conditional) spectral risk measures operators as they admit an elicibility structure that enables efficient characterization of time-consistent dynamic risk and yield an explicit gradient formula for the value-function as highlighted in [Coache et al. \(2023\)](#). Indeed, elicibility means that risk can be characterized by minimizing some scoring (loss) function which eliminates the need for nested simulation to evaluate risk. This drastically increases the efficiency of the training process when solving the hedging optimization problem.

A static risk measure is a mapping from some random variable to a scalar risk value. Such mapping is said to be elicitable if it can be recovered as the minimizer of an expected scoring function ([Lambert et al., 2008](#); [Gneiting, 2011](#)).

Definition 2.1 (Elicibility). *A statistical functional $\Gamma : \mathbb{F} \rightarrow \mathbb{R}^p$, mapping a class of probability distributions $\mathbb{F}$ to the (multivariate) reals, is **elicitable**³ if there exists a subset $\mathbb{A} \subseteq \mathbb{R}^p$ and*

³When $p > 1$, we refer to joint elicibility.

scoring function $S : \mathbb{A} \times \mathbb{R} \rightarrow \mathbb{R}$ such that

$$\Gamma(F) = \arg \min_{\mathbf{a} \in \mathbb{A}} \mathbb{E}_{Y \sim F}[S(\mathbf{a}, Y)], \quad \forall F \in \mathbb{F}. \quad (2.6)$$

The scoring function S is called a consistent scoring function for Γ if the above holds, and is said to be strictly consistent if the minimizer is unique.

We focus on the one-step conditional dynamic CVaR risk measure which operates on one-step costs in the RL environment. In contrast to the static CVaR risk measure, which minimizes the tail risk of the cumulative reward, dynamic CVaR controls tail risk conditionally throughout the trajectory, allowing an RL agent to adapt its actions to the level of risk associated with each state. To construct a procedure that recovers the true dynamic risk of some policy, we require estimates of the one-step conditional risk at each time period and state in the environment. We obtain these estimates by exploiting the joint elicibility of CVaR and VaR, as described below. First, for any random variable Y , define the VaR as

$$\text{VaR}_\alpha(Y) = \inf\{x \mid F_Y(x) \geq \alpha\}. \quad (2.7)$$

Then, the CVaR at the $\alpha \in (0, 1)$ confidence level averages the worst $(1 - \alpha)$ outcomes:

$$\text{CVaR}_\alpha = \frac{1}{1 - \alpha} \int_\alpha^1 \text{VaR}_u du. \quad (2.8)$$

We thus consider eliciting the vector-valued mapping

$$\Gamma(Y) = (\text{VaR}_\alpha(Y), \text{CVaR}_\alpha(Y)), \quad (2.9)$$

and utilize the strictly consistent scoring function defined in Corollary 4.4 of [Coache et al. \(2023\)](#) for this purpose, since it is easy to integrate in RL environments:

$$\begin{aligned} S(\mathbf{a}_1, \mathbf{a}_2, y) &= (\mathbb{1}_{y \leq \mathbf{a}_1} - \alpha) (H(\mathbf{a}_1) - H(y)) - G(\mathbf{a}_2) + G(y) \\ &\quad + G'(\mathbf{a}_2) \left[\mathbf{a}_2 + \frac{1}{1 - \alpha} (\mathbf{a}_1 (\mathbb{1}_{y > \mathbf{a}_1} - (1 - \alpha)) - y \mathbb{1}_{y > \mathbf{a}_1}) \right] \end{aligned} \quad (2.10)$$

for $\mathbb{A} = \{\mathbf{a} \in \mathbb{R} \times \mathbb{R} \mid \mathbf{a}_1 \leq \mathbf{a}_2\}$ and where G is any function such that

1. $\mathbb{E}_{Y \sim F} [|H(Y)|], \mathbb{E}_{Y \sim F} [|G(Y)|] < \infty$ for all $F \in \mathbb{F}$,
2. $G : \mathbb{R} \rightarrow \mathbb{R}$ is strictly convex,
3. The gradient of G , denoted G' , exists and for a specific $H : \mathbb{R} \rightarrow \mathbb{R}$

$$z \mapsto H(z) - \frac{z}{1-\alpha} G'(\mathbf{a}_2) \quad (2.11)$$

is strictly increasing for any $\mathbf{a}_2 \in \mathbb{R}$.

In our RL experiments, we assume that Y is a bounded random variable that may take both positive and negative values, with $Y > -C$ for some constant $C > 0$ and bounded above by a finite constant. This means that $\mathbf{a}_1$ and $\mathbf{a}_2$ are restricted to a bounded domain. To further simplify (2.10), we consider the case of a null-valued function H , which leads to

$$S(\mathbf{a}_1, \mathbf{a}_2, y) = -G(\mathbf{a}_2) + G(y) + G'(\mathbf{a}_2) \left[\mathbf{a}_2 + \frac{1}{1-\alpha} (\mathbf{a}_1 (\mathbb{1}_{y > \mathbf{a}_1} - (1-\alpha)) - y \mathbb{1}_{y > \mathbf{a}_1}) \right]. \quad (2.12)$$

The use of (2.12) still provides great flexibility by allowing for various possible choices of G ; testing for the impact of G on the training performance of the RL agent is a key contribution of our work.

We can estimate the value function for all $t \in \mathcal{T}$ and $s_t \in \mathcal{S}$ in the style of a quantile regression problem (Meinshausen, 2006) by approximating the conditional risk mapping through elicibility. Set ρ_t as the conditional CVaR with confidence level α defined through

$$\text{CVaR}_{t,\alpha} = \frac{1}{1-\alpha} \int_{\alpha}^1 \text{VaR}_{t,u} du, \quad \text{VaR}_{t,\alpha}(Y) = \inf\{x \mid F_Y(x|\mathcal{F}_t) \geq \alpha\}. \quad (2.13)$$

with $F_Y(\cdot|\mathcal{F}_t)$ being the time- t conditional CDF of Y . Since our environment is Markov, we may assume that s_t sufficiently summarizes the information contained in $\mathcal{F}_t$. Therefore, using (2.5), (2.6) and (2.9),

$$V_t^*(s_t) = \min_{\mathbf{a}_t} \text{Proj}_2 \left\{ \underset{\mathbf{a}_1, \mathbf{a}_2}{\text{argmin}} \mathbb{E} [S(\mathbf{a}_1, \mathbf{a}_2, c_t + V_{t+1}^*(s_{t+1})) | s_t] \right\}.$$

where $\text{Proj}_2(\mathbf{a}_1, \mathbf{a}_2) = \mathbf{a}_2$.

2.4 Characterizing dynamic risk using deep learning

To obtain a tractable optimization scheme, we restrict ourselves to policies represented by neural networks (the actor) whose parameters are denoted by θ . Such parametric policies are denoted by π^θ . Therefore, the approximate problem we tackle is

$$\theta^* = \underset{\theta}{\operatorname{argmin}} \rho_{0,T}(c_0^{\pi^\theta}, \dots, c_T^{\pi^\theta}) = \underset{\theta}{\operatorname{argmin}} V_0^{\pi^\theta}(s_0). \quad (2.14)$$

The associated value functions (the critic) are also represented by a parametric function V^Ψ with parameters Ψ . As such, for any policy π^θ we form some approximation $V^{\pi^\theta} \approx V^\Psi$ for some Ψ . Based on (2.4), this leads to the approximation

$$V_t^\Psi(s_t) \approx \rho_t(c_t^{\pi^\theta} + V_{t+1}^\Psi(s_{t+1})). \quad (2.15)$$

The aim of the reinforcement learning algorithm is to progressively refine θ and Ψ to reduce the objective function from (2.14) (the policy improvement step) and to have the relationship (2.15) hold as closely as possible (the policy evaluation step).

For compatibility with the scoring function described, we follow [Coache et al. \(2023\)](#) and separate the value function for dynamic CVaR into a VaR component Z_t and positive excess component (CVaR minus VaR) denoted by $A_t \geq 0$. This entails separating the critic parameter set into two: $\Psi = (\psi, \phi)$, where ψ and ϕ are parameters of neural networks that approximate the VaR Z and the excess A , respectively. For optimization stability, we use an ensemble of neural networks $\{Z_t^{\psi_t}, A_t^{\phi_t}\}_{t=0}^T$, with each time step having a pair of networks (Z_t, A_t) . The set of time-indexed parameters is denoted by $\{\Psi_t\}_{t=0}^T = \{\psi_t, \phi_t\}_{t=0}^T$. For a fixed policy π (we drop the notational dependence on the policy) we set

$$V_t^{\Psi_t}(s_t) = Z_t^{\psi_t}(s_t) + A_t^{\phi_t}(s_t). \quad (2.16)$$

Define optimized critic parameters $\{\Psi_t^*\}_{t=0}^T$ obtained through the policy evaluation steps

$$\Psi_t^* = \underset{(\psi_t, \phi_t)}{\operatorname{argmin}} \mathbb{E} \left[S(Z_t^{\psi_t}(s_t), V_t^{\Psi_t}(s_t), c_t + V_{t+1}^{\Psi_{t+1}^*}(s_{t+1})) \right], \quad (2.17)$$

applied recursively for $t = T, \dots, 0$ with $V_{T+1}^{\Psi_{T+1}} \equiv 0$. We therefore have

$$Z_t^{\psi^*}(s_t) \approx \text{VaR}_{t,\alpha}(c_t + V_{t+1}^{\Psi_{t+1}^*}(s_{t+1})), \quad (2.18)$$

$$A_t^{\phi^*}(s_t) \approx \text{CVaR}_{t,\alpha}(c_t + V_{t+1}^{\Psi_{t+1}^*}(s_{t+1})) - \text{VaR}_{t,\alpha}(c_t + V_{t+1}^{\Psi_{t+1}^*}(s_{t+1})). \quad (2.19)$$

2.5 Scoring function characterization & geometry

A central contribution of this paper lies in choosing varying characterizations the scoring function, and additionally considering how to design the RL problem that leads to desirable optimization landscapes under such characterizations. First, the elimination of H in the score requires that G must be strictly convex and strictly decreasing for a strictly-consistent score⁴. Under this guise, we can observe some appealing characteristics pertaining to the local curvature of our scoring function. We note that the Hessian of $\mathfrak{s}(\mathbf{a}_1, \mathbf{a}_2) := \mathbb{E}_{Y \sim F}[S(\mathbf{a}_1, \mathbf{a}_2, Y)]$ at the optimum $(\mathbf{a}_1^*, \mathbf{a}_2^*)$ where $f(x)$ is the Probability Density Function (PDF) of Y is

$$\nabla^2 \mathfrak{s}(\mathbf{a}_1^*, \mathbf{a}_2^*) = \begin{pmatrix} \frac{-f(\mathbf{a}_1^*)G'(\mathbf{a}_2^*)}{1-\alpha} & 0 \\ 0 & G''(\mathbf{a}_2^*) \end{pmatrix}. \quad (2.20)$$

See [Appendix A](#) for the derivation. We can observe that the Hessian evaluated at the optimum is positive-definite if G satisfies the conditions of a strictly-consistent score, and $f(\mathbf{a}_1) > 0$, as the diagonal entries (and hence the eigenvalues) of the Hessian,

$$-\frac{f(\mathbf{a}_1^*)G'(\mathbf{a}_2^*)}{1-\alpha}, \quad G''(\mathbf{a}_2^*)$$

are strictly positive. Additionally, the zero off-diagonal entries indicate that the VaR and CVaR directions are locally decoupled at the optimum. In particular, a perturbation in the VaR direction does not affect the gradient in the CVaR direction, and a perturbation in the CVaR direction does not affect the gradient in the VaR direction. A novel contribution of our work is the examination of six possible characterizations of strictly consistent scoring functions arising from different choices of G in our model-free environment. The choices of G can be seen in [Table 1](#) and their graphs in [Figure 1](#). We choose G to exhibit convexity on positive reals, with the offset C term

⁴For a strictly consistent scoring function, G is strictly decreasing because its derivative is strictly negative, which follows from the fact that the mapping in (2.11) must be strictly increasing for any $\mathbf{a}_2$ when $H(z) = 0$.

being added to x for strict positivity. In this paper, we do not consider transformations in which G rescales x prior to the addition of C , which may lead to more desirable optimization regions for the scoring functions.

Class	$G(x)$	$G'(x)$	$G''(x)$
Logarithmic	$-\log(x + C)$	$-\frac{1}{x + C}$	$\frac{1}{(x + C)^2}$
Fractional Power	$-(x + C)^{0.3}$	$-0.3(x + C)^{-0.7}$	$0.21(x + C)^{-1.7}$
Arctangent	$-\arctan(x + C)$	$-\frac{1}{1 + (x + C)^2}$	$\frac{2(x + C)}{(1 + (x + C)^2)^2}$
Arcsinh	$-\operatorname{arsinh}(x + C)$	$-\frac{1}{\sqrt{1 + (x + C)^2}}$	$\frac{x + C}{(1 + (x + C)^2)^{3/2}}$
Rational	$-\frac{x + C}{1 + (x + C)}$	$-\frac{1}{(1 + x + C)^2}$	$\frac{2}{(1 + x + C)^3}$
Arcsin	$\arcsin\left(\frac{1}{x + C + 1}\right)$	$\frac{-(x + C + 1)^{-1}}{\sqrt{(x + C + 1)^2 - 1}}$	$\frac{2(x + C + 1)^2 - 1}{(x + C + 1)^2((x + C + 1)^2 - 1)^{3/2}}$

Table 1: Functions G considered for inclusion in the scoring function (2.12), along with first and second derivatives w.r.t. x . We assume that inputs exist in the domain $x \in (-C, \infty)$, where C is a suitable positive real number.

From our chosen G functions, we may observe that both the first and second derivatives w.r.t. x approach 0 from below and above respectively for large x . This gives rise to a particular sensitivity property of the scoring function in Equation (2.12): as the CVaR optimum $\mathbf{a}_2^*$ increases in value, curvature along both the VaR and CVaR axes decreases towards 0, and when the VaR optimum $\mathbf{a}_1^*$ increases in value, curvature on the VaR scales with $f(\mathbf{a}_1^*)$. These local properties can be visually examined through the global score landscape. Figure 2 aims to analyze how the convexity of function s , which is defined as the expectation of the scores of samples of the underlying distribution of Y , changes around the optimal point $(\mathbf{a}_1^*, \mathbf{a}_2^*)$ across different scoring function and varying distributional features. First, the top two plots analyze curvature for various CVaR confidence levels using the logarithmic scoring function. As α increases, $\mathbf{s}$ evaluated at the optimum rises since $\mathbf{a}_1^* = \text{VaR}_\alpha$ shifts further into the tail, while local convexity around the optimum stays roughly constant because the decreasing curvature from $G''(\mathbf{a}_2^*)$ and growing $1/(1 - \alpha)$ in Equation (2.20) result in weighting that roughly cancels out. The middle two plots compare curvature for $Y \sim \mathcal{N}(5, 1)$ and $Y \sim \mathcal{N}(25, 1)$ at a fixed α , with the curves shifted so the minimum $\mathbf{s}$ aligns for better comparison. One may remark that the $\mathcal{N}(5, 1)$ score landscape

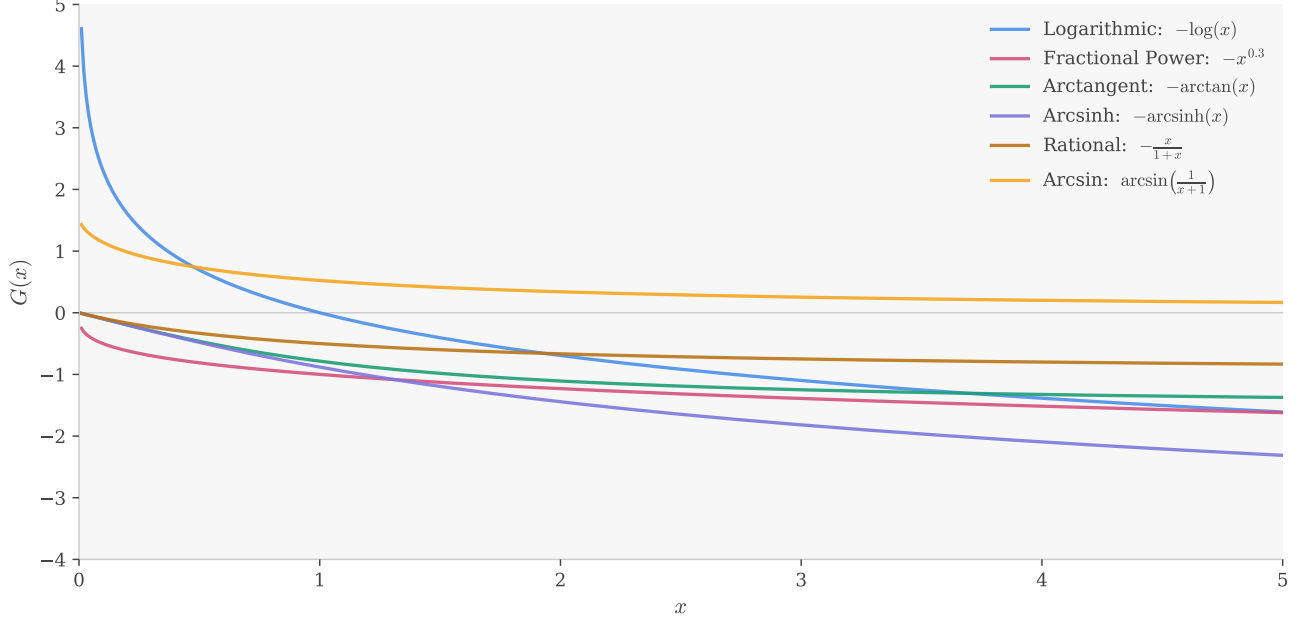


Figure 1: Comparison of the 6 real-valued functions convex on the region $(0, \infty)$

is visibly more convex than $\mathcal{N}(25, 1)$. This is because the C constant in G must be set to a larger value for $\mathcal{N}(25, 1)$ due to the rightward shift in the mean of the distribution, leading to an optimization problem that primarily operates in a region with flatter curvature. Lastly, the bottom two plots compare curvature for each scoring function around the optimum at a fixed α on $Y \sim \mathcal{N}(0, 1)$, with the minimum $\mathfrak{s}$ aligned for better comparison. The log ($G(x) = -\log(x + C)$), arcsinh ($G(x) = -\operatorname{arcsinh}(x + C)$), and power03 ($G(x) = -(x + C)^{0.3}$) scoring functions (we refer to scoring functions based on the choice of G) have the steepest convexity near the optimum, while the arctan ($G(x) = -\operatorname{arctan}(x + C)$), arcsin ($G(x) = \operatorname{arcsin}(\frac{1}{1+x+C})$) and rational ($G(x) = -\frac{x+C}{x+C+1}$) scoring functions are visibly flatter. This follows from the fact that the log and arcsinh G functions have second derivatives w.r.t. x that decay at the rate x^{-2} for large x , whereas the arctan, arcsin, and rational G functions have second derivatives w.r.t. x that decay at the faster rate x^{-3} , causing their curvature to approach zero more rapidly and resulting in flatter convexity. While the power03 G function has a second derivative w.r.t. x that decays at the rate $x^{-1.7}$, its coefficient of 0.21 results in an overall lower magnitude that places it between the log and arcsinh G functions and the arctan, arcsin, and rational G functions. Thus, its curvature lies between these two groups across the relevant range of x . Along with these curvature properties, we may also observe that both the log and arcsinh G s have an unbounded range of $(-\infty, \infty)$, with

first derivatives that decay roughly as $\frac{1}{x}$ which allow the G s to sustain unbounded growth (for a differentiable function to sustain unbounded growth while its rate of change tends to zero, that rate of change must decay sufficiently slowly that its integral remains unbounded). Meanwhile, the arctan, rational, and arcsin G s have first derivatives that decay according to $\frac{1}{x^2}$. The power03 function only has an unbounded range over the positive real line, with its derivative decaying as $0.3x^{-0.7}$. Again, despite this relative slower decay in comparison to the other G s, the coefficient 0.3 results in a lower derivative magnitude overall. Taken together, the decay rates of $G'(x)$ and $G''(x)$ characterize how the corresponding scoring functions retain tail sensitivity as outcomes move into the tails. Based on these properties and the resulting asymptotic behavior of the scoring functions, we classify them into two categories. We refer to the log, power03, and arcsinh G specifications as *unbounded sublinear* scoring functions, since G remains unbounded below, its first derivative vanishes asymptotically, and its magnitude grows more slowly than linearly. In contrast, we refer to the arctan, rational, and arcsin G specifications as *saturating* scoring functions, since their first derivatives vanish sufficiently rapidly for G to approach a finite limit as its argument diverges. In [Section 5](#), this categorization allows us to clearly identify how the scoring function class influences the performance of the trained policies.

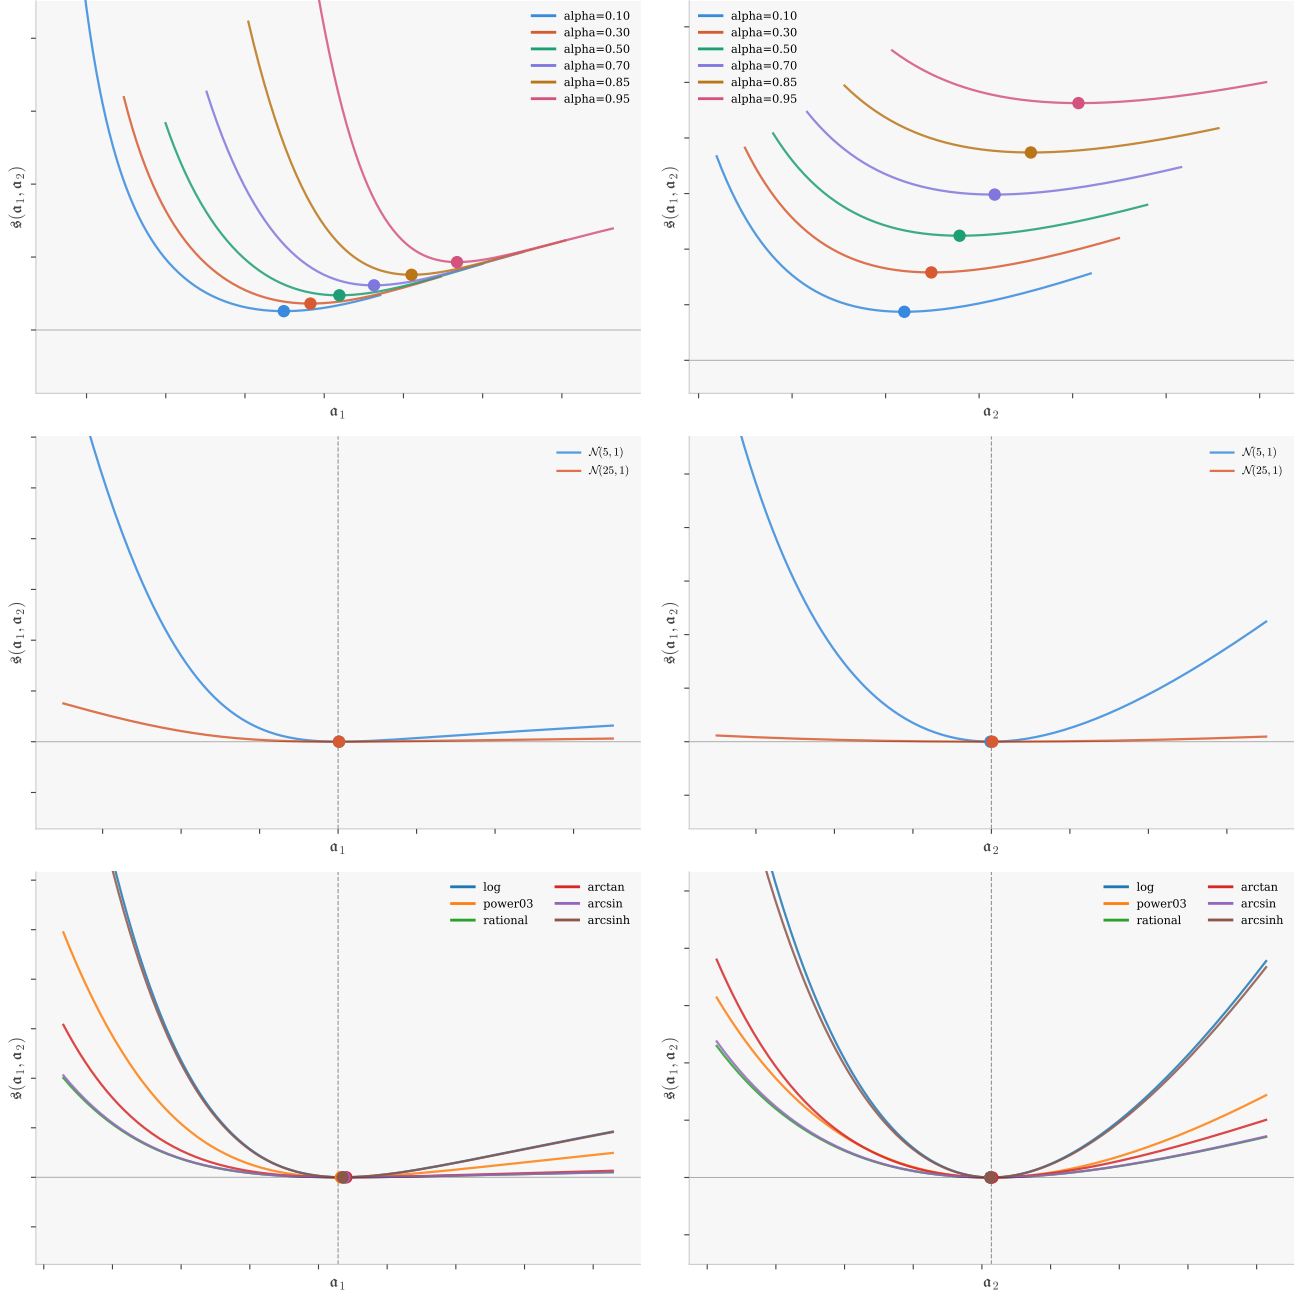


Figure 2: All datasets use $N = 1,000,000$ samples. The top two plots compare curvature around the optimum $(\mathbf{a}_1^*, \mathbf{a}_2^*)$ for varying confidence levels $\alpha \in [10\%, 95\%]$, with $Y \sim \mathcal{N}(0, 1)$ fixed, for the logarithmic scoring function $G(x) = -\log(x + C)$. The middle two plots compare curvature for $Y \sim \mathcal{N}(5, 1)$ versus $Y \sim \mathcal{N}(25, 1)$ at $\alpha = 95\%$, with the optimum shifted to a common origin for visual comparison. The bottom two plots compare curvature across scoring functions at $\alpha = 95\%$ on $Y \sim \mathcal{N}(0, 1)$, with the shift constant C set to the negative minimum of the sampled data so that all values are positive and the expected score evaluated at the optimum aligned at a common horizontal line to better visualize curvature.

3 Model-free actor-critic reinforcement learning framework

We follow the typical actor-critic RL framework, where some critic aims to gradually approximate the risk associated with the actor (policy), and the actor is improved through policy gradient and minimizes the evaluated risk estimated by the critic. Importantly, the critic is only trained on freshly generated data from in-sample policies in an on-policy fashion. On-policy algorithms are less prone to state distribution mismatch and can lead to more stable gradient updates than off-policy methods, such as value-based Deep Q-Networks (DQN) (Mnih et al., 2015) and Deep Deterministic Policy Gradient (DDPG) (Lillicrap et al., 2015), which typically reuse data generated by past policies through replay buffers.

3.1 Divided time horizon and sequential training

In traditional RL, value functions are learned across all periods of a finite time horizon, making the training process increasingly challenging and potentially unstable as the time horizon and complexity of the environment increase. We propose a hybrid sequential training procedure that separates the time horizon into equivalent-sized portions and shifts the value (cost-to-go) function in order to ensure a stable sequential training procedure and guide the optimization problem more desirable regions. In particular, because the value function may accumulate to large values due to the recursive structure of dynamic risk, we propose applying periodic downward shifts to the cost random variables. These shifts reduce the magnitude of the resulting value function and reshape the optimization landscape induced by the elicibility-based objective, making it more suitable for learning. Because dynamic CVaR is translation invariant, the optimal value function can be recovered after accounting for the applied shifts.

Shifting is applied separately (i.e. with different constants) and in sequence to the various sub-portions of the horizon, which leads to better use of high-convexity regions of functions G and facilitates the optimization of the policy. We divide the time horizon $\mathcal{T}$ with $T + 1$ time points into a set $\mathcal{G} := \{0, \dots, \mathbb{G}\}$ of groups, where each group $g \in \mathcal{G}$ contains an integer number $d = (T + 1)/(\mathbb{G} + 1)$ periods corresponding to times $\mathcal{T}_g := \{gd, \dots, (g + 1)d - 1\}$. When updating the value function at such time points, we use target networks corresponding to value functions of periods $\bar{\mathcal{T}}_g := \{gd + 1, \dots, (g + 1)d\}$ periods (i.e. single-period offsets of $\mathcal{T}_g$). For the particular case of the last period of some group $g \neq \mathbb{G}$, the target network is updated with the *frozen* value function of the first period of the subsequent group.

The training procedure starts from the last group $\mathbb{G}$, and trains the critic neural networks for a set number of gradient steps (each of which involves a number of target network updates). Then, we proceed recursively where on each iteration g , we freeze the networks for group g (in fact what matters is freezing the value function at time $gd + 1$, which is the first time point of group g) and update these corresponding to group $g - 1$. This procedure is applied until all groups are ultimately updated, finishing with group $g = 0$.

As discussed above, the optimization of the score function $\mathfrak{s}(\cdot, \cdot)$ is easier when the convexity of $\mathfrak{s}$ is steep around the optimal point $(\mathfrak{a}_1^*, \mathfrak{a}_2^*)$. The optimization landscape can therefore be made more favorable by exploiting the translation property of the VaR and CVaR which entails shifting the value function by a deterministic constant, which does not impact optimal actions and allows for full freedom to shift only based on optimization convenience considerations. Adjusting with different constants on different subgroups g also allows adjusting for the accumulation of risk when iterating backwards through the time periods, which ends up leading in less than ideal curvature regions.

Consider a fixed policy π^θ and some deterministic values $b_0, \dots, b_{\mathbb{G}}$. Define for the last group

$$\begin{aligned}\tilde{V}_T(s_T) &:= \text{CVaR}_{t,\alpha}(c_T + b_{\mathbb{G}}), \\ \tilde{V}_t(s_t) &:= \underbrace{\text{VaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1}))}_{=:\tilde{Z}_t(s_t)} + \underbrace{\left(\text{CVaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1})) - \text{VaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1}))\right)}_{=:\tilde{A}_t(s_t)} \\ &= (Z_t(s_t) + b_{\mathbb{G}}) + A_t(s_t), \quad t = \mathbb{G}d, \dots, T,\end{aligned}$$

where the last equality is obtained through translation invariance. Furthermore, for prior groups $g < \mathbb{G}$ (i.e. times $t \in \mathcal{T}_g$) define,

$$\begin{aligned}\tilde{V}_t(s_t) &:= Z_t(s_t) + \tilde{A}_t(s_t) - (b_{g+1} - b_g) \text{ if } t = (g+1)d - 1, \\ \tilde{V}_t(s_t) &:= \underbrace{\text{VaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1}))}_{=:\tilde{Z}_t(s_t)} + \underbrace{\left(\text{CVaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1})) - \text{VaR}_{t,\alpha}(c_t + \tilde{V}_{t+1}(s_{t+1}))\right)}_{=:\tilde{A}_t(s_t)} \\ &= (Z_t(s_t) + b_g) + A_t(s_t), \quad t = g, \dots, (g+1)d - 2.\end{aligned}$$

As mentioned, because of the translation invariance property, optimal actions obtained when using

the value function $\tilde{V}$ in the Bellman equation (2.5) instead of V are identical, and the optimal policy w.r.t. the modified value function $\tilde{V}$ is left unchanged. In practice, b_g for a given group g can be calculated as the negative sample minimum of the target random variable at $(g+1)d-1$ (i.e. the last time period of the group g) of some batch, ensuring that the shifted terminal target is always positive. As one may note, the shift applied to the terminal target random variable only propagates to the first target random variable after a sufficient number of training iterations and consequently does not guarantee that all target random variables are positive at the beginning of training. The C term in the G functions acts as the necessary additive shift (which is kept constant across all groups) to ensure all target random variables are initially positive. Although b_g^Ψ will change as new batches are generated by the policy, the sampling variability can be mitigated using a sufficiently large batch size. As the algorithm learns a stable policy, the policy-induced changes in b_g . Figure 3 shows the training procedure visually, highlighting connections between original and shifted value function components during the training.

3.2 Actor-critic RL algorithm

For a batch of B $(s_t^{(b)}, a_t^{(b)}, s_{t+1}^{(b)}, c_t^{(b)})$ transitions for $t \in \mathcal{T}_g$ corresponding to a certain group $g \in \mathcal{G}$ and $b \in \mathcal{B}$ where $\mathcal{B} := \{1, \dots, B\}$, the critic loss for some non-terminal group g with starting and ending time period t_a and t_b can be defined as

$$\begin{aligned} \mathcal{L}_\Psi^g = & \frac{1}{d \times B} \sum_{t=t_a}^{t_b-1} \sum_{b=1}^B S(Z_t^{\psi_t}(s_t; \pi^\theta), V_t^{\Psi_t}(s_t; \pi^\theta), c_t + V_{t+1}^{\Psi'_{t+1}}(s_{t+1}; \pi^\theta)) + \\ & \frac{1}{d \times B} \sum_{b=1}^B S(Z_{t_b}^{\psi_{t_b}}(s_{t_b}; \pi^\theta), V_{t_b}^{\Psi_{t_b}}(s_{t_b}; \pi^\theta), c_{t_b} + V_{t_b+1}^{\Psi'_{t_b+1}}(s_{t_b+1}; \pi^\theta) - b_{g+1}^\Psi + b_g^\Psi). \end{aligned} \quad (3.1)$$

Note that the value of the next state is calculated using the target network, whose parameters are denoted by Ψ' . We use hard target updates where the parameters are copied from the critic's parameters and then held frozen for a fixed number of updates before being periodically updated again, thereby stabilizing the random variables on which the dynamic risk is calculated.

Furthermore, the critic loss for the terminal group with starting time period t_a can be defined as

$$\begin{aligned} \mathcal{L}_{\Psi}^{\mathbb{G}} = & \frac{1}{d \times B} \sum_{t=t_a}^{T-1} \sum_{b=1}^B S(Z_t^{\psi_t}(s_t; \pi^\theta), V_t^{\Psi_t}(s_t; \pi^\theta), c_t + V_{t+1}^{\Psi'_{t+1}}(s_{t+1}; \pi^\theta)) + \\ & \frac{1}{d \times B} \sum_{b=1}^B S(Z_T^{\psi_T}(s_T; \pi^\theta), V_T^{\Psi_T}(s_T; \pi^\theta), c_T + b_G^\Psi). \end{aligned} \quad (3.2)$$

We follow the result of Theorem 6.3 of [Coache et al. \(2023\)](#) to obtain the gradient of the value function $\nabla_\theta V(s; \pi^\theta)$ in the context of stochastic policies which we are using in this work. For a batch of B transitions $(s_t^{(b)}, a_t^{(b)}, s_{t+1}^{(b)}, c_t^{(b)}, \log(\pi^\theta(a_t^{(b)} | s_t^{(b)}))$ for $t \in \mathcal{T}, b \in \mathcal{B}$ the actor loss that approximates this gradient w.r.t. θ of the value function is

$$\begin{aligned} \mathcal{L}_{\text{actor}}^\theta = & \frac{1}{(1-\alpha)(T+1)B} \sum_{t=0}^{T-1} \sum_{b=1}^B \left[(c_t + V_{t+1}^{\Psi_{t+1}}(s_{t+1}; \pi^\theta) - Z_t^{\psi_t}(s_t; \pi^\theta) - b_{v(t)}^\Psi)_+ \nabla_\theta \log \pi^\theta(a | s_t) \Big|_{a=a_t} \right] \\ & + \frac{1}{(1-\alpha)(T+1)B} \sum_{b=1}^B \left[(c_T - Z_T^{\psi_T}(s_T; \pi^\theta) - b_G^\Psi)_+ \nabla_\theta \log \pi^\theta(a | s_T) \Big|_{a=a_T} \right], \end{aligned} \quad (3.3)$$

where $v(t) = \lfloor t/d \rfloor$. It is important to note that because the critic is frozen during the actor update, a common choice in actor-critic methods, the loss does not include the additional terms arising from the critic's own dependence on θ .⁵

The full algorithm is outlined in [Algorithm 1](#), with hyperparameter values provided in [Section C.1](#). To address the sparse gradient contributions to the actor loss at high confidence levels, the algorithm weights the actor mini-batch size B_2 by $1/(1-\alpha)$, ensuring that a sufficient number of transitions contribute to the actor update.

⁵There are solutions proposed in the literature (see for instance [Huang et al., 2021](#)) to take into consideration the fact that the policy is not left untouched during training iterations, but we do not pursue such approach.

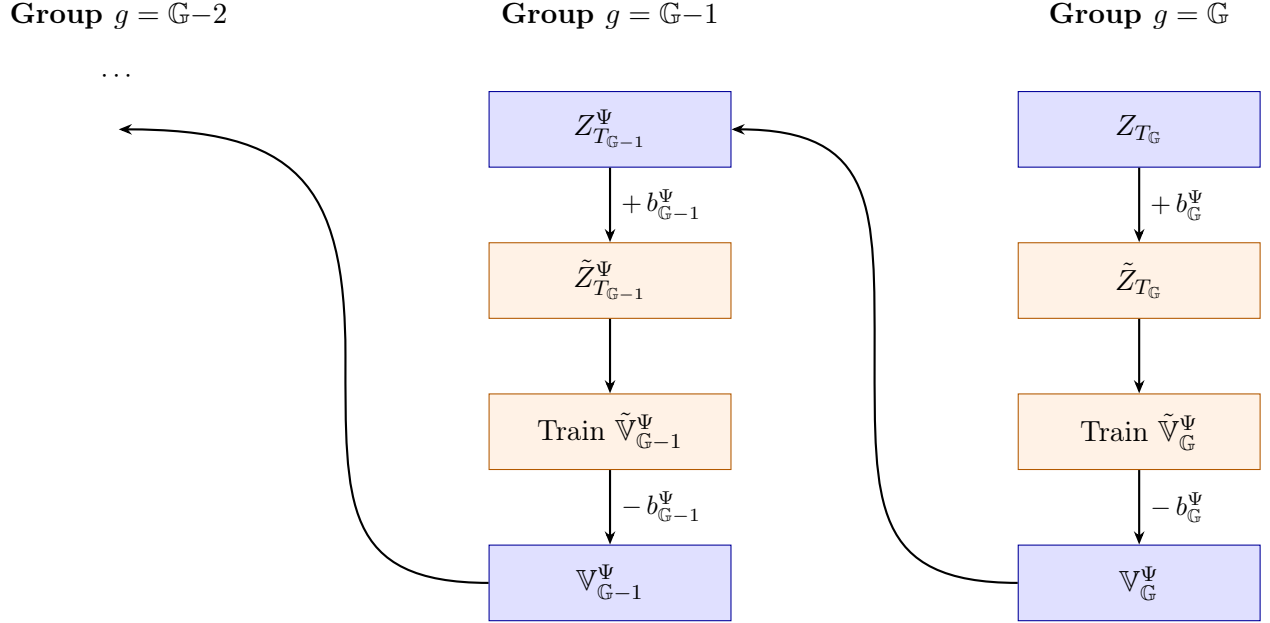


Figure 3: Illustration of the sequential training procedure. For each group $g \in \mathcal{G}$, define $\mathbb{V}_g := \{V_t^{\Psi_t}\}_{t=gd}^{(g+1)d-1}$. Define the endpoint of each group as $T_g = \max(\bar{\mathcal{T}}_g)$, with $T_{\mathbb{G}} = T$. The random variable at the terminal period T_g is shifted up by b_g^{Ψ} , the value function $\tilde{V}_t^{\Psi}$ is trained on all time periods of the group $\mathcal{T}_g$ in the shifted space, and the recovered $V_t^{\Psi} = \tilde{V}_t^{\Psi} - b_g$ is frozen and passed to the preceding group $g-1$ to ground its terminal random variable. The process iterates backwards from $g = \mathbb{G}$ to $g = 0$.

Algorithm 1 Actor-critic Algorithm

Require: Set of group periods $\mathcal{G} = \{0, \dots, \mathbb{G}\}$ dividing the time horizon into equivalently sized sequences of one-step periods with each group containing d periods each defined as $\mathcal{T}_g = \{t_a, \dots, t_b\}$ with t_a and t_b denoting the first and last time periods respectively of some group g , epochs E , critic iterations per group E_1 , actor iterations E_2 , batch size B , critic minibatch size B_1 , actor minibatch size B_2 , batch index sets $\mathcal{B} = \{1, \dots, B\}$, $\mathcal{B}_1 = \{1, \dots, B_1\}$, and $\mathcal{B}_2 = \{1, \dots, \frac{B_2}{1-\alpha}\}$, target update frequency M , learning rates of η_g^Ψ and η^θ for the critics of each group and actor respectively, critic neural networks as $\{\Psi_t, \Psi'_t\}_{t=0}^T$ with parameter set $\Psi = \{\psi, \phi\}$ for $Z_t^{\psi_t}, A_t^{\psi_t}$ and Ψ'_t as the parameter sets for the target neural networks, and actor π^θ with parameter set θ

for $e = 1, \dots, E$ **do**

Generate B trajectories under π^θ

for $g = \mathbb{G}, \dots, 0$ **do**

Slice batch paths into one-step transitions $\{(s_t^{(b)}, a_t^{(b)}, c_t^{(b)}, s_{t+1}^{(b)}) \mid t \in \mathcal{T}_g, b \in \mathcal{B}\}$

for $e_1 = 1, \dots, E_1$ **do**

Sample minibatch of size B_1

Compute critic loss and associated gradient

Update $\{\Psi_t\}_{t \in \mathcal{T}_g}$ via Nesterov-accelerated SGD

if $e_1 \bmod M = 0$ **then**

$\Psi'_{t+1} \leftarrow \Psi_{t+1}$ for $t \in \mathcal{T}_g \setminus \{t_b\}$ ▷ Hard update target networks

if $g \neq \mathbb{G}$ **then**

$\Psi'_{t_b+1} \leftarrow \Psi_{t_b+1}$

end if

end if

Decay η_g^Ψ

end for

Freeze $\{\Psi_t\}_{t \in \mathcal{T}_g}$

end for

for $e_2 = 1, \dots, E_2$ **do**

Generate $B_2/(1-\alpha)$ trajectories under π^θ

Compute actor loss and associated gradient ▷ Use all trajectories per actor step

Update θ via Adam

Decay η_θ

end for

end for

return $\{\Psi_t\}_{t=0}^T, \pi^\theta$

4 Methodology

4.1 Experimental setup

In our experiment, we apply the actor-critic algorithm in [Algorithm 1](#) to the below dynamic hedging problem across the 6 strictly-consistent scoring functions mentioned in [Section 2.5](#) and four confidence levels of $\alpha \in \{92.5\%, 95\%, 97.5\%, 99\%\}$ for both a dynamic and static risk objective. The use of high risk thresholds allows us to demonstrate that our dynamic risk algorithm can learn policies that effectively target the tail of the remaining-cost distribution, which is often overlooked in risk-aware RL. At high thresholds, these policies increasingly approach the worst-case objective of minimizing maximum remaining costs. We fix the global random seed and initialize the neural networks consistently across runs for reproducibility. Randomized components, including minibatch selection and path generation, are controlled through seeded random-number generators. For path generation, the seed is determined by the training iteration and phase, ensuring that corresponding critic and actor updates are exposed to the same samples across runs. Diagnostic paths are generated using the same principle during evaluation. We also use large batch sizes throughout training to reduce sampling variability in the critic and actor losses and their gradients.

4.2 Hedging environment

The financial problem we study consists of dynamically hedging a European basket call option with a $T + 1 = 252$ day (one-year) maturity and strike price of $K = 100$ in a time-consistent fashion. The basket option payoff is calculated as the weighted arithmetic sum of $N = 4$ bank assets: JPMorgan Chase & Co. (JPM), Bank of America Corporation (BAC), Wells Fargo & Company (WFC), and Citigroup Inc. (C), where the vector of time t stock prices is denoted by $S_t = \{S_{i,t}\}_{i=1}^N$. All initial asset prices are set to 100 dollars, and the basket weights we use are $\{w_i\}_{i=1}^N = (0.0775, 0.4434, 0.2649, 0.2142)$, corresponding to JPM, BAC, WFC, and C respectively. To replicate realistic financial market dynamics, we model the evolution of bank stock prices over the hedging horizon using a scalable DCC-GARCH(1, 1) framework with a Student- t copula and Gaussian marginals, explicitly capturing stochastic volatility, dynamic correlations and tail dependence (see [Appendix B](#)). The model parameters are calibrated using ten years of historical daily returns for the four underlying bank stocks, from December 23, 2015, to December 20, 2025, to reflect a broad range of historical market conditions. Details of the calibration procedure

and final parameter values are provided in [Appendix B](#). For the hedging scenario, we assume that a hedging agent writes (sells) a basket call option for a premium $\mathcal{V}_0$. On each daily period $[t, t + 1)$, the action vector $a_t = (a_{t,1}, \dots, a_{t,4}) \in [-2, 2]^4$ determines the number of shares of the four underlying assets they hold to hedge the risk of the option. When the basket option expires, the trader pays back the terminal value of the basket $\mathcal{V}_T$ and liquidates all positions. The cost $c_t = -(j_{t+1} - j_t)$ incurred on each period is defined as minus the change in the trader's net wealth whose dynamics is defined below. We assume that the trader has access to a risk-free instrument, with cash investments growing at a constant daily risk-free rate of $\bar{r}_f = 8.37 \times 10^{-5}$, corresponding to an annualized rate of 2.11%. This constant rate is obtained as the average daily continuously compounded risk-free rate over the ten-year historical period based on 3-month U.S. Treasury bill yields. A proportional transaction cost rate of $\kappa = 0.1\%$ is applied to trades. Trading is assumed not to affect the market.

For any $t \in \mathcal{T}$ the basket option price $\mathcal{V}_t$ is estimated by a surrogate neural network described in [Section B.2](#). The evolution of wealth is given by

$$W_{t+1} = (W_t - a_t \cdot S_t - \kappa S_t \cdot |a_t - a_{t-1}|)e^{\bar{r}_f} + a_t \cdot S_{t+1} - \mathcal{V}_{t+1}, \quad (4.1)$$

where $W_0 = \mathcal{V}_0$ ⁶. Thus, we define the cash account value as

$$\mathbb{C}_{t+1} = e^{\bar{r}_f} (\mathbb{C}_t - (a_t - a_{t-1}) \cdot S_t - \kappa S_t \cdot |a_t - a_{t-1}|).$$

with $\mathbb{C}_0 = \mathcal{V}_0$.

To ensure that the hedging agent is able to perform across a relatively diverse set of paths, we randomize initial asset prices around their initial value and each asset's initial variance around the respective unconditional long-run value, with correlations starting at their long-run unconditional level. This is done by sampling from a centered normal distribution with a small standard deviation and applying a logarithmic shock to the initial stock price and variances.

All initial values can be seen in [Appendix B](#).

For numerical convenience, we normalized some of the inputs from the state space. At time t ,

⁶Liquidation of the remaining hedging position at T reduces W_{T+1} by $\kappa S_{T+1} \cdot |a_T|$.

given $h_t = \{h_{i,t}\}_{i=1}^N$ and $\bar{h} = \{\bar{h}_i\}_{i=1}^N$, the state is defined as $s_t = (S_t/K, h_t/\bar{h}, a_{t-1}, \text{vec}_\Delta(R_t), (T + 1 - t)/(T + 1))$ where S_t/K represents the assets' moneyness values (underlying prices divided by the strike), $h_t/\bar{h}$ represents the assets' conditional variances normalized by their corresponding unconditional variances (which is calculated according to the Heston-Nandi GARCH parameters described in [Appendix B](#)), a_{t-1} represents the previous actions of the hedging agent, $\text{vec}_\Delta(R_t) = (R_{t,ij})_{1 \leq i < j \leq n}$, represents the pairwise conditional correlations, and $(T + 1 - t)/(T + 1)$ represents the remaining time to the basket option's maturity in years. We use the pairwise conditional correlations from R_t rather than the diagonal and upper-triangular elements of the DCC proxy matrix Q_t as it yields a more parsimonious representation of the evolving dependence structure while retaining the information relevant for hedging. The cash account is not included in the state as the CVaR risk measure is translation invariant.

4.3 Benchmarking with a static risk measure

As a benchmark, we train a static risk agent using a Monte carlo policy gradient approach. Such approach involves directly differentiating through the terminal loss, which is reminiscent of that presented in [Buehler et al. \(2019\)](#). Whereas the dynamic risk model solves (2.14) based on (2.1) and $\rho_t = \text{CVaR}_{t,\alpha}$, the static risk model uses the [Rockafellar and Uryasev \(2000\)](#) CVaR representation and minimizes

$$\text{CVaR}_\alpha \left(\sum_{t=0}^T c_t \right) = \min_{q \in \mathbb{R}} \left\{ q + \frac{1}{B(1 - \alpha)} \sum_{b=1}^B \left[\left(\sum_{t=0}^T c_t \right) - q \right]_+ \right\}. \quad (4.2)$$

where q is a smooth auxiliary variable representing the VaR_α of the summed costs and is jointly optimized with the actor neural network parameters during training. In a differentiable environment, the training procedure remains the same as [Algorithm 1](#), excluding the critic training and replacing [Equation \(3.3\)](#) with [Equation \(4.2\)](#). Notably, [Godin \(2016\)](#) showed that the static risk objective that optimizes CVaR_α over terminal costs is time-consistent w.r.t. a conditional CVaR_α with a varying α over time, up to technical conditions. However, since it is non-trivial to derive the varying α sequence, we primarily focus our analysis through the lens of a precommitment (static) vs. time-consistent (dynamic) hedging strategy and explore the differences between the two.

4.4 Policy parameterization

The actor under both dynamic and static risk is characterized as a simple feed-forward neural network, both outputting allocations to each asset. For the dynamic risk policy, the actor learns a normal distribution $\mathcal{N}$ where $\pi^\theta(\cdot \mid s) := \mathcal{N}(e_\theta(s), \sigma^2 I)$ over the action space with I being the identity matrix and $e_\theta(s)$ is the mean vector produced by the network. Applying the reparameterization trick allows for efficient gradient computation by sampling actions through $e_\theta(s) + \sigma \varepsilon$ where $\varepsilon \sim \mathcal{N}(0, I)$. The static actor is fully deterministic and outputs actions within the same range. Specifics to the architecture and hyperparameters to the feed-forward neural networks are outlined in [Appendix C](#).

5 Experimental Results

In the following section, we present results on the hedging policies in our environment from the training procedure, which we outline below.

5.1 Hedging performance

To evaluate the hedging policies under both the dynamic and static risk frameworks, we use test sets of 10,000 paths with either perturbed or fixed initial conditions, where the former follows the same initial distribution as the training set and the latter uses unperturbed initial stock prices and unconditional long-run variance and pairwise correlations. The specific test set used for each figure and table is indicated where relevant. The dynamic risk policy is executed deterministically by taking the mean action $e_\theta(s)$ of the learned policy distribution when evaluating the hedging performance. We additionally consider the nested approach from [Coache and Jaimungal \(2024\)](#) to validate the accuracy of the RL-based critic. In [Table 2](#), we report descriptive statistics (mean, standard deviation, and CVaR at various confidence levels) for the negative terminal P&L distributions under both dynamic and static risk objectives. Throughout this section, models identified by a scoring function denote dynamic risk models, while models labeled as static denote static risk models. The static CVaR metrics are calculated as the upper tail of the negative P&L. All other metrics are calculated on the non-negated P&L. [Figure 4](#) shows the respective distributions for all dynamic and static risk models across only a normalized P&L, where the normalization is performed by dividing each test set path’s terminal P&L by the initial basket option price.

Confidence level	Model	Mean	Std	CVaR _{92.5%}	CVaR _{95%}	CVaR _{97.5%}	CVaR _{99%}
$\alpha = 92.5\%$	log	-1.1197	1.7497	4.5702	4.9721	5.6579	6.5719
	power03	-1.1933	1.7290	4.5799	4.9816	5.6587	6.5686
	arcsinh	-1.1297	1.7521	4.5714	4.9751	5.6788	6.6379
	arctan	-0.9786	1.6969	4.4233	4.8568	5.5935	6.5026
	rational	-0.9570	1.6498	4.3107	4.7327	5.4522	6.3507
	arcsin	-0.9704	1.6863	4.3989	4.8347	5.5721	6.4766
	<i>static</i>	0.2936	2.5728	3.7648	4.0910	4.6219	5.2902
$\alpha = 95\%$	log	-1.1143	1.7095	4.4911	4.8922	5.5790	6.4954
	power03	-1.0899	1.7319	4.4520	4.8351	5.4579	6.3675
	arcsinh	-1.0901	1.7050	4.4531	4.8397	5.5148	6.4274
	arctan	-1.1250	1.9440	4.9344	5.3720	6.1150	7.0660
	rational	-1.1227	1.9015	4.8756	5.3220	6.0702	6.9918
	arcsin	-1.0913	1.8746	4.7818	5.2199	5.9494	6.8820
	<i>static</i>	0.2161	2.6423	3.8546	4.1595	4.6521	5.2612
$\alpha = 97.5\%$	log	-1.3074	2.1361	5.4259	5.8652	6.5945	7.6098
	power03	-1.2588	2.0449	5.1843	5.5995	6.2991	7.2472
	arcsinh	-1.2600	2.1102	5.3637	5.8009	6.5641	7.5813
	arctan	-1.3347	2.3859	5.7730	6.2027	6.9023	7.7148
	rational	-1.3177	2.3300	5.6249	6.0475	6.7539	7.5905
	arcsin	-1.3213	2.3513	5.6528	6.0803	6.7923	7.6186
	<i>static</i>	0.1443	2.7486	4.0504	4.3420	4.8096	5.3640
$\alpha = 99\%$	log	-2.3851	3.2098	8.3262	8.9159	9.8836	10.9717
	power03	-1.8206	2.6868	6.8816	7.3994	8.2324	9.2742
	arcsinh	-2.4234	3.2380	8.3990	8.9908	9.9470	11.0468
	arctan	-1.6265	2.9416	7.0620	7.5615	8.3318	9.1727
	rational	-1.3903	2.7987	6.6296	7.1344	7.9460	8.8084
	arcsin	-1.4748	2.7397	6.5230	7.0171	7.8315	8.7667
	<i>static</i>	0.2464	4.0975	6.9995	7.6007	8.4820	9.4159

Table 2: Relevant statistics of the terminal hedging error distribution on the 10,000-path test set with initial state perturbation for the set of dynamic risk models trained under the different scoring function characterizations and a static (see last row of each subpanel) risk model across all confidence levels at the one-year maturity. The CVaR statistic is applied to losses (i.e. minus the final P&L).

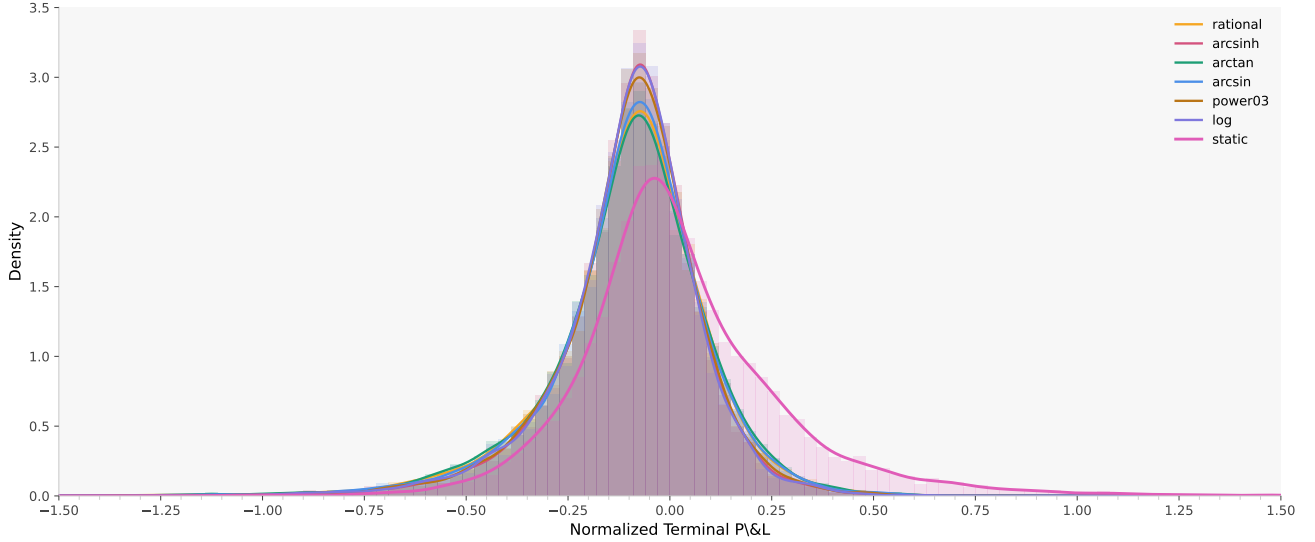


Figure 4: Comparison of normalized terminal P&L (P&L divided by initial option price for each path) densities for the dynamic and static risk models at the $\alpha = 95\%$ confidence level across the 6 scoring functions G for the dynamic risk model and for the static risk model tested across the 10,000-path test set with initial state perturbation.

From the table and figure, we observe that dynamic risk models yield, in most cases, lower standard deviations, corresponding to narrower P&L distributions, and lower average P&L. Indeed, optimizing for a dynamic risk measure fundamentally means minimizing future risk recursively across each conditional state along a path, which entails applying tighter risk control (and higher hedging costs) than what the static risk agent achieves by simply minimizing risk on paths that lead to high risk on final portfolio values. For the $\alpha = 92.5\%$, $\alpha = 95\%$, and $\alpha = 97.5\%$ confidence levels, the static risk models achieve uniformly lower static risk than the dynamic risk models across all scoring functions. This is expected since the static risk agent directly aims to minimize the terminal hedging risk, unlike the dynamic risk agent. Additionally, for the moderate $\alpha = 95\%$ and $\alpha = 97.5\%$ confidence levels, the dynamic risk models trained under the unbounded sublinear scoring functions achieve static risk results closer to the static risk models than those trained under the saturating scoring functions (i.e. are superior). On the other hand, at $\alpha = 92.5\%$ and $\alpha = 99\%$, the dynamic risk models trained under saturating scoring function outperforming those trained under unbounded sublinear scores. We may first remark that these results are consistent across scoring functions within each category, suggesting that the observed differences reflect systematic effects of the scoring function classes rather than random variation. The aforementioned behavior can be explained by the increased sensitivity of the

unbounded sublinear scoring functions to tail samples. Thus, for moderate α the tail sensitivity of the scoring functions in this category are informative, leading to a better final policy. However, for the slightly lower $\alpha = 92.5\%$ confidence level, the tail-sensitivity is less important, favoring a scoring function with bounded and stable updates, explaining the superiority of saturating scoring functions. Interestingly, despite $\alpha = 99\%$ placing greater emphasis on the extreme tail, it does not exhibit the same pattern. We posit that at the $\alpha = 99\%$ confidence level, sensitivity to tail samples leads to sparse, extreme tail samples which lead to large, disproportionate gradients that destabilize training. In this setting, we can observe that the saturating scoring functions may be preferred even when samples are deep in the tail since their lower sensitivity stabilizes training. This suggests that saturating scoring functions may occasionally be able to handle the variance of sampling for the critic at high confidence levels. The training instability from sparse training samples may also help explain the subpar performance of the $\alpha = 99\%$ confidence level static risk model.

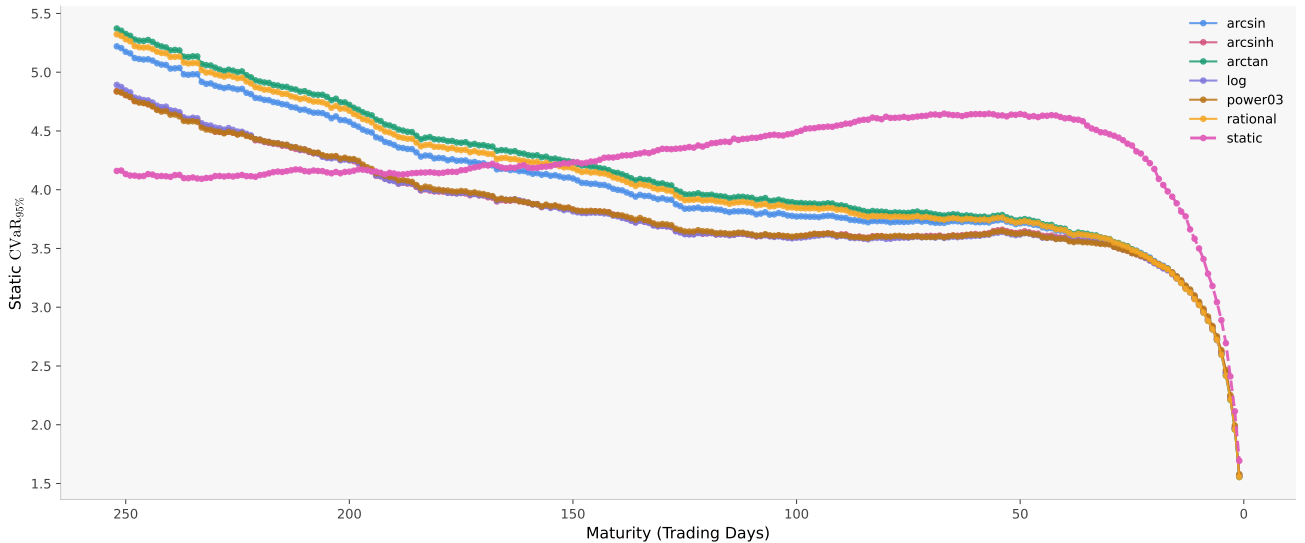


Figure 5: Static CVaR_{95%} of the terminal hedging error for the dynamic risk model under each scoring function and for the static risk model baseline, evaluated over a 10,000-path test set with initial state perturbation for each maturity from one year (252 days) to one day.

To further analyze the validity of the dynamic risk models, we adopt the methodology in [Marzban et al. \(2023\)](#) where dynamic risk and static risk models are evaluated according to a static risk metric over horizons that are shorter than the full hedging horizon on which hedging agents are optimized. Similar to their approach, we assume the same initial conditions as the training set but

Confidence level	Model	Maturity (months)				
		10	8	6	4	2
$\alpha = 92.5\%$	<i>static</i>	3.7271	3.7837	3.9054	4.1066	4.1438
	log	4.0792	3.7239	3.4592	3.3789	3.3546
	power03	4.0894	3.7582	3.4799	3.4031	3.3667
	arcsinh	4.0879	3.7413	3.4783	3.3895	3.3622
	arctan	3.9358	3.5698	3.3201	3.3035	3.3280
	rational	3.8212	3.4675	3.2391	3.2631	3.3128
	arcsin	3.9114	3.5574	3.3010	3.3005	3.3323
$\alpha = 95\%$	<i>static</i>	4.1585	4.2206	4.3512	4.5963	4.6317
	log	4.3425	3.9402	3.6360	3.5778	3.5833
	power03	4.3431	3.9453	3.6579	3.5873	3.5804
	arcsinh	4.3365	3.9323	3.6429	3.5927	3.5979
	arctan	4.8387	4.3670	3.9827	3.8107	3.6786
	rational	4.7777	4.3032	3.9322	3.7696	3.6636
	arcsin	4.6820	4.2072	3.8608	3.7232	3.6533
$\alpha = 97.5\%$	<i>static</i>	4.8661	4.9042	5.0659	5.3495	5.4316
	log	5.8591	5.2388	4.6610	4.3990	4.2534
	power03	5.6085	4.9661	4.4811	4.2425	4.1644
	arcsinh	5.7868	5.1715	4.6050	4.3461	4.1980
	arctan	6.3376	5.8142	5.2437	4.8519	4.4383
	rational	6.1482	5.6704	5.1249	4.7424	4.3695
	arcsin	6.1890	5.6750	5.1459	4.7434	4.3813
$\alpha = 99\%$	<i>static</i>	9.1110	8.8551	8.7340	8.1476	7.6538
	log	10.0580	9.1002	7.8508	6.8589	5.8203
	power03	8.5414	7.6511	6.6518	5.9585	5.3270
	arcsinh	10.1246	9.1652	7.9251	6.9072	5.8456
	arctan	8.5489	8.0814	7.1171	6.4386	5.5849
	rational	8.1729	7.6108	6.7395	6.1424	5.3965
	arcsin	8.0440	7.5185	6.6083	6.0087	5.3163

Table 3: Static CVaR_{95%} over maturities from 10 to 2 months at 2-month intervals, obtained by evaluating the dynamic risk model under each scoring function and the static risk model baseline at each shorter maturity over a 10,000-path test set with initial state perturbation, across all confidence levels.

simulate 10,000-path test sets with initial state perturbation to a shorter maturity for performance evaluation of agents trained on longer maturities. In [Figure 5](#), we show the hedging performance of the dynamic and static risk models at the $\alpha = 95\%$ confidence level. We report the specific hedging risk values over coarser time intervals for all confidence levels in [Table 3](#). Over shorter maturities from 2 to 6 months, we see that the dynamic risk models exhibit lower static $\text{CVaR}_{95\%}$ than the static risk models over horizons shorter than the full option maturity. This highlights the effectiveness of the proposed actor-critic approach: despite being optimized according to a dynamic risk objective, the resulting models achieve superior static risk performance than the static risk baseline. Moreover, we notice that shorter-horizon static risk models display increasing static risk over shorter maturities in contrast to the smooth decrease for dynamic risk models. Indeed, since the static risk model becomes increasingly suboptimal at longer horizons due to time inconsistency, as it incurs greater risk as maturity approaches. Thus, shorter maturities measured from time 0 should also exhibit greater risk, which can explain this discrepancy. Again, we observe that the relative performance of the dynamic risk models trained under unbounded sublinear scoring functions in comparison to those trained with saturating scoring functions over all confidence levels in [Table 2](#) seems to be preserved when evaluated across shorter maturities. That is, in [Table 3](#), hedging policies trained under the unbounded sublinear scoring functions continue to be the best performers for $\alpha = 95\%$ and $\alpha = 97.5\%$ while those trained under the saturating scoring functions continue to be the best performers for $\alpha = 92.5\%$ and $\alpha = 99\%$. In combination, the consistent differences across scoring-function categories indicate that the relative performance of final hedging policies depend on the characterization of the scoring functions and the tail focus of the risk measure, with different categories (i.e. unbounded sublinear and saturating) performing best at different confidence levels.

Beyond policy performance, we examine the dynamic risk estimates produced by the learned critics. In [Table 4](#), we show the RL-based critic dynamic risk estimate of dynamic risk models across scoring functions and the corresponding static risk of the static risk model baseline over all confidence levels on the 10,000-path test set with the fixed initial state. Additionally, we train separate critics on the final dynamic risk policies trained with the log and rational scoring functions at the $\alpha = 95\%$ confidence level to estimate the value function in [Equation \(2.4\)](#) using the nested approach in [Coache and Jaimungal \(2024\)](#) and gauge the accuracy of the risk estimates from the elicibility-based approach. The neural networks for each time period are trained

simultaneously using an MSE Loss.

We first see that the dynamic risk to static risk ratio increases for greater α , indicating that the dynamic CVaR becomes increasingly more conservative relative to its static counterpart as the focus shifts toward more extreme tail losses. Moreover, we observe a difference in the predicted dynamic risk values between models trained with unbounded sublinear and saturating scoring functions, with the latter consistently yielding lower risk estimates over the final (different) policies over all confidence levels. From a theoretical perspective, this discrepancy can be explained by the fact that saturating scoring functions exhibit weaker signal for extreme pathwise losses at moderate confidence levels, potentially leading to an underestimation of risk and a less accurate baseline for the actor to learn from. Indeed, we find that the RL-based critic trained under the log scoring function yields a dynamic risk estimate of 137.22 in comparison to the dynamic risk estimate of 137.906 from the nested approach; in contrast, the RL-based critic trained under the rational scoring function yields a dynamic risk estimate of 107.951 in comparison to the dynamic risk estimate of 141.527 from the nested approach.

Importantly, the previous finding (see [Table 3](#)) that hedging policies trained under saturating scoring functions at moderately high α exhibit greater hedging risk over shorter-horizon maturities than policies trained under the unbounded sublinear scoring functions is consistent with the numerical observation of the greater nested approach critic dynamic risk estimate when the agent is trained under the rational scoring function instead of the log scoring function. Indeed, the lower dynamic-risk estimate produced by the RL-based critic under the rational scoring function reflects an underestimation of the true dynamic risk, while logarithmic-style scoring functions provide a more accurate assessment of dynamic risk and consequently lead to a better policy. Although nested-critic estimates are not obtained for the remaining scoring functions, the consistently lower RL-based dynamic-risk estimates and inferior hedging performance observed under saturating scoring functions, at moderate α , together with the more accurate dynamic-risk estimate and stronger hedging performance obtained under the log scoring function, suggest that highly tail-sensitive, non-saturating scoring functions may provide more reliable dynamic-risk estimation in complex risk-aware RL.

Next, we analyze the behavior the time-consistent policies over time. [Figure 6](#) presents a scatterplot of the weighted aggregate position (basket delta), computed as the sum of each asset's

α	Scoring	RL-based Dynamic CVaR $_{\alpha}$	Nested Dynamic CVaR $_{\alpha}$	RL-DR / SR
92.5%	log	114.889	—	7.30
	power03	102.160	—	6.49
	arcsinh	114.945	—	7.30
	arctan	79.206	—	5.03
	rational	76.848	—	4.88
	arcsin	77.673	—	4.93
95%	log	137.218	137.906	8.50
	power03	125.178	—	7.76
	arcsinh	137.576	—	8.53
	arctan	110.579	—	6.85
	rational	107.951	141.527	6.69
	arcsin	107.757	—	6.68
97.5%	log	202.964	—	12.07
	power03	181.276	—	10.78
	arcsinh	202.463	—	12.03
	arctan	176.853	—	10.51
	rational	172.110	—	10.23
	arcsin	172.266	—	10.24
99%	log	396.417	—	18.74
	power03	346.867	—	16.40
	arcsinh	397.770	—	18.79
	arctan	223.040	—	10.54
	rational	216.243	—	10.22
	arcsin	216.333	—	10.23

Table 4: The dynamic risk estimate at $t = 0$ of the dynamic risk model (first column) by passing the fixed initial state to the RL-based critic and its ratio to the corresponding static CVaR $_{\alpha}$ value of the static risk model evaluated over the 10,000-path test set with a fixed initial state. Since training used an initial account value equal to $\mathcal{V}_0$, both risk objectives were evaluated on the terminal outcome net of this initial value. We therefore add $\mathcal{V}_0$ back to each risk estimate (since CVaR is translation invariant) to obtain the risk under $\mathbb{C}_0 = 0$. We also train a critic using the nested approach from [Coache and Jaimungal \(2024\)](#) on the log and rational scoring functions at the $\alpha = 95\%$ confidence level. With fixed initial conditions, the basket surrogate prices $\mathcal{V}_0$ at 12.04 dollars.

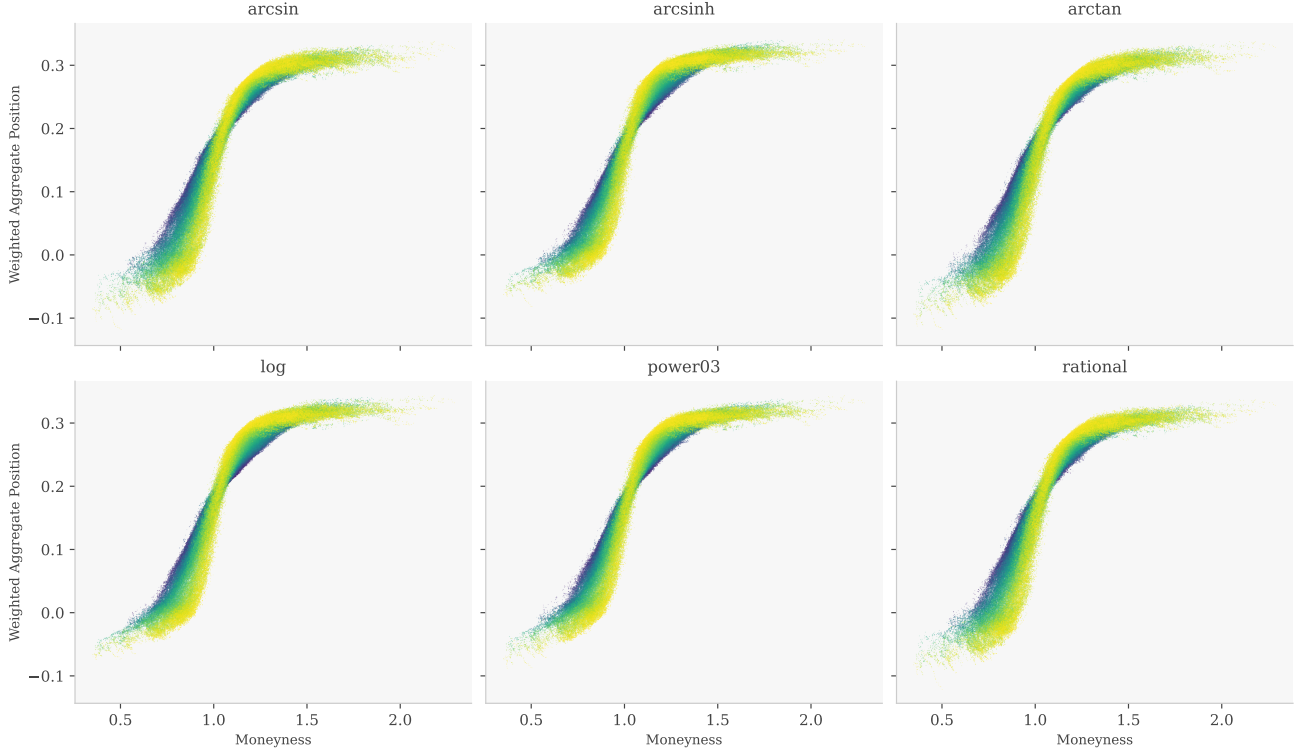


Figure 6: Comparison of the weighted aggregate position of the hedging policy across basket values for the dynamic risk model at the $\alpha = 95\%$ confidence level across the 6 scoring functions tested across the 10,000-path test set without randomization over all confidence levels. Lighter colors correspond to hedging decisions made closer to the maturity of the basket option.

position weighted by its corresponding basket weight, against moneyness across all time periods and states in the 10,000-path test set with a fixed initial state, which allows us to visualize the characteristic shape of the delta curve for an initially at-the-money (ATM) basket option. Across all scoring functions, the scatterplot patterns are qualitatively similar and follow the signature delta curve for the writer of an option with an average basket delta of approximately .13 shares, validating the reliability of all scoring functions in guiding the actor to learn optimal hedging policies.

Figure 7 shows the hedging behavior of the dynamic risk vs. static risk models at the $\alpha = 95\%$ confidence level for a trajectory with high-gamma in order to examine how policies hedge in settings with rapid option delta changes and high P&L variance. The first panel shows the weighted aggregate position (basket delta) across the path for the dynamic and static risk models. The second panel shows the predicted option price using the basket surrogate neural network over the path. The third panel represents the value of the basket and the remaining panels show

the price, conditional variance, and pairwise correlations for that specific path. We observe that the time-consistent dynamic risk model generally allocates less than the static model to assets in order to reduce risky exposure to adverse outcomes along the path.

To assess the convergence and stability of the actor-critic training procedure, we plot the actor loss, critic loss, and test-set risk over the training epochs for the dynamic risk model at the $\alpha = 95\%$ confidence level in [Figure 8](#). These quantities are evaluated every 10 epochs, with the risk computed on separate test sets with batch size of 2048 reserved for monitoring during training and distinct from the 10,000-path test sets used for the results in the figures and tables. The set of left plots represent the unbounded sublinear (log, power03, and arcsinh G s) scoring functions while the right plots represents the saturating (arctan, rational, and arcsin G s) scoring functions. Visually, we can observe that the actor and critic losses are able to converge to relatively stable values towards the tail-end of training. However, the actor-critic RL algorithm exhibits unstable and slightly worse static risk performance on the intermediate test sets towards the tail end of training when using saturating scoring functions. In tandem with our prior observations and consistent with the literature, this suggests using unbounded sublinear scoring functions when the risk confidence level considered is moderate.

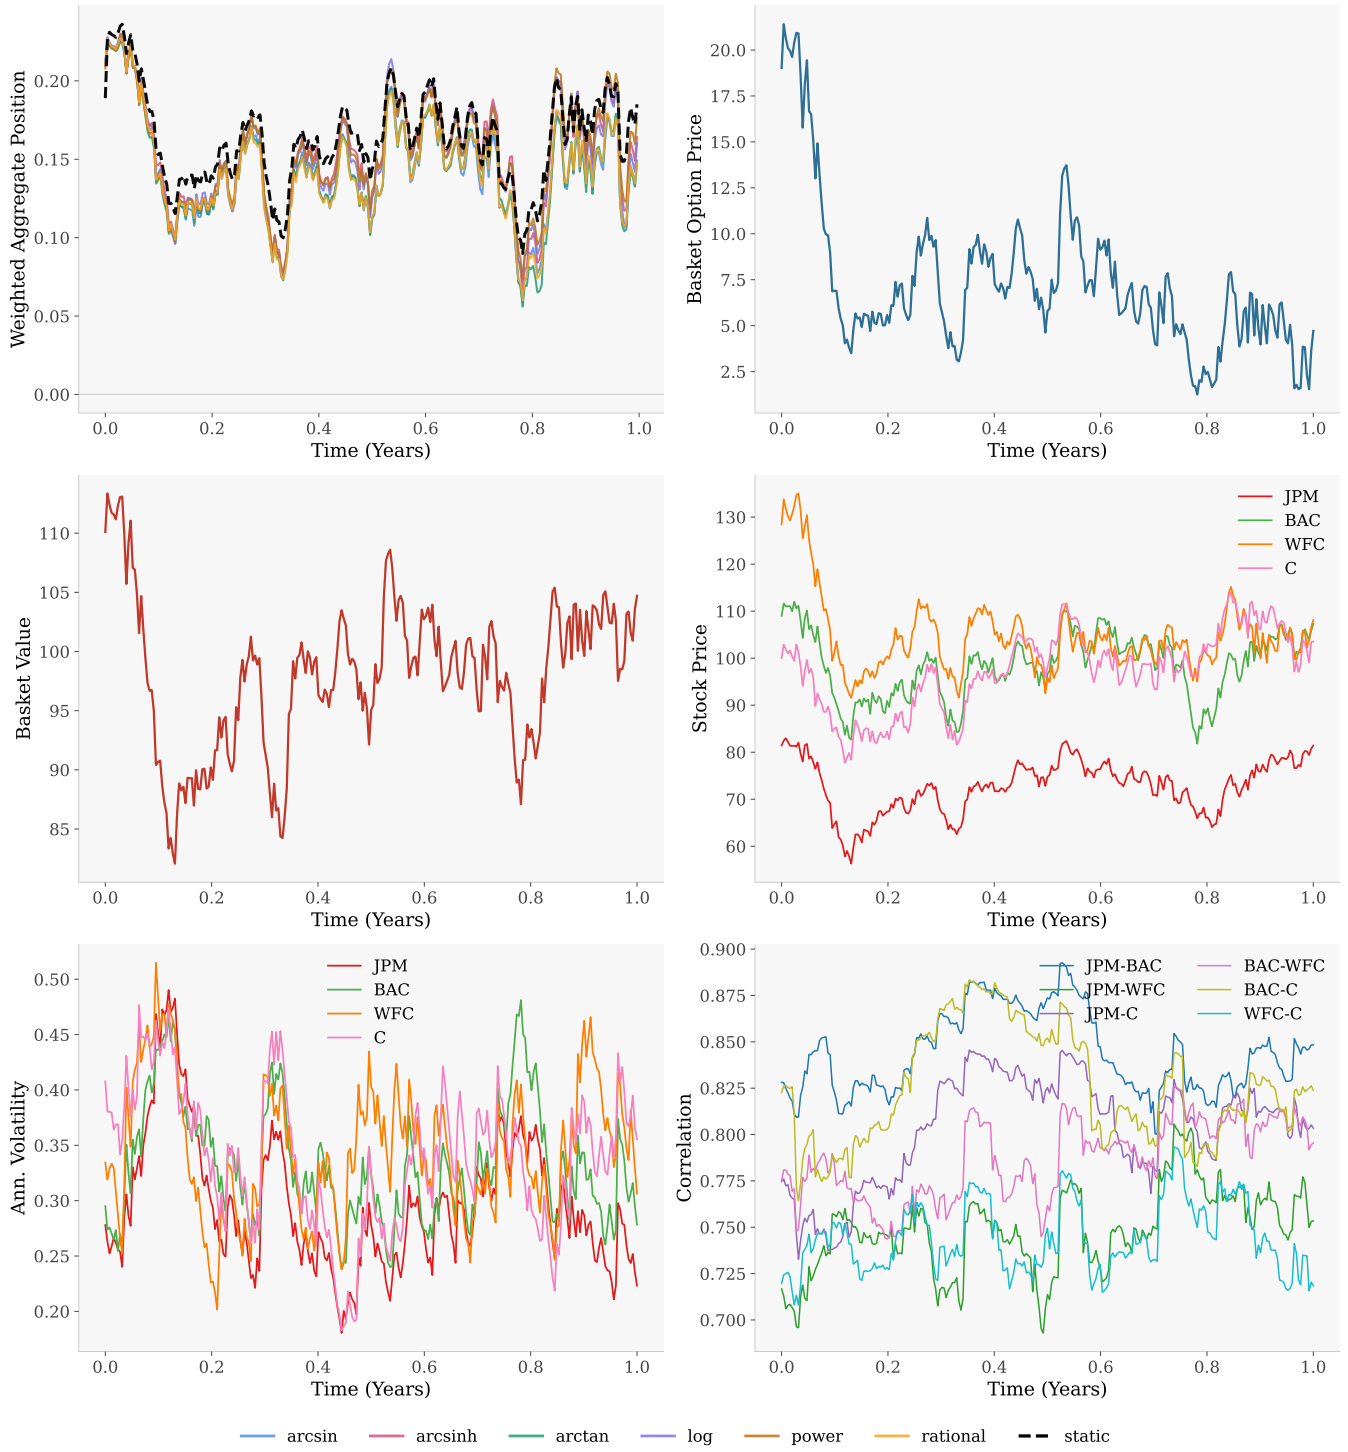


Figure 7: Comparison of the weighted aggregate position of the dynamic and static risk hedging policies trained at the $\alpha = 95\%$ confidence level for JPM, WFC, BAC, and C across the path where the basket option has large daily price changes and exhibits high gamma near expiry from the 10,000-path test set with initial state perturbation.

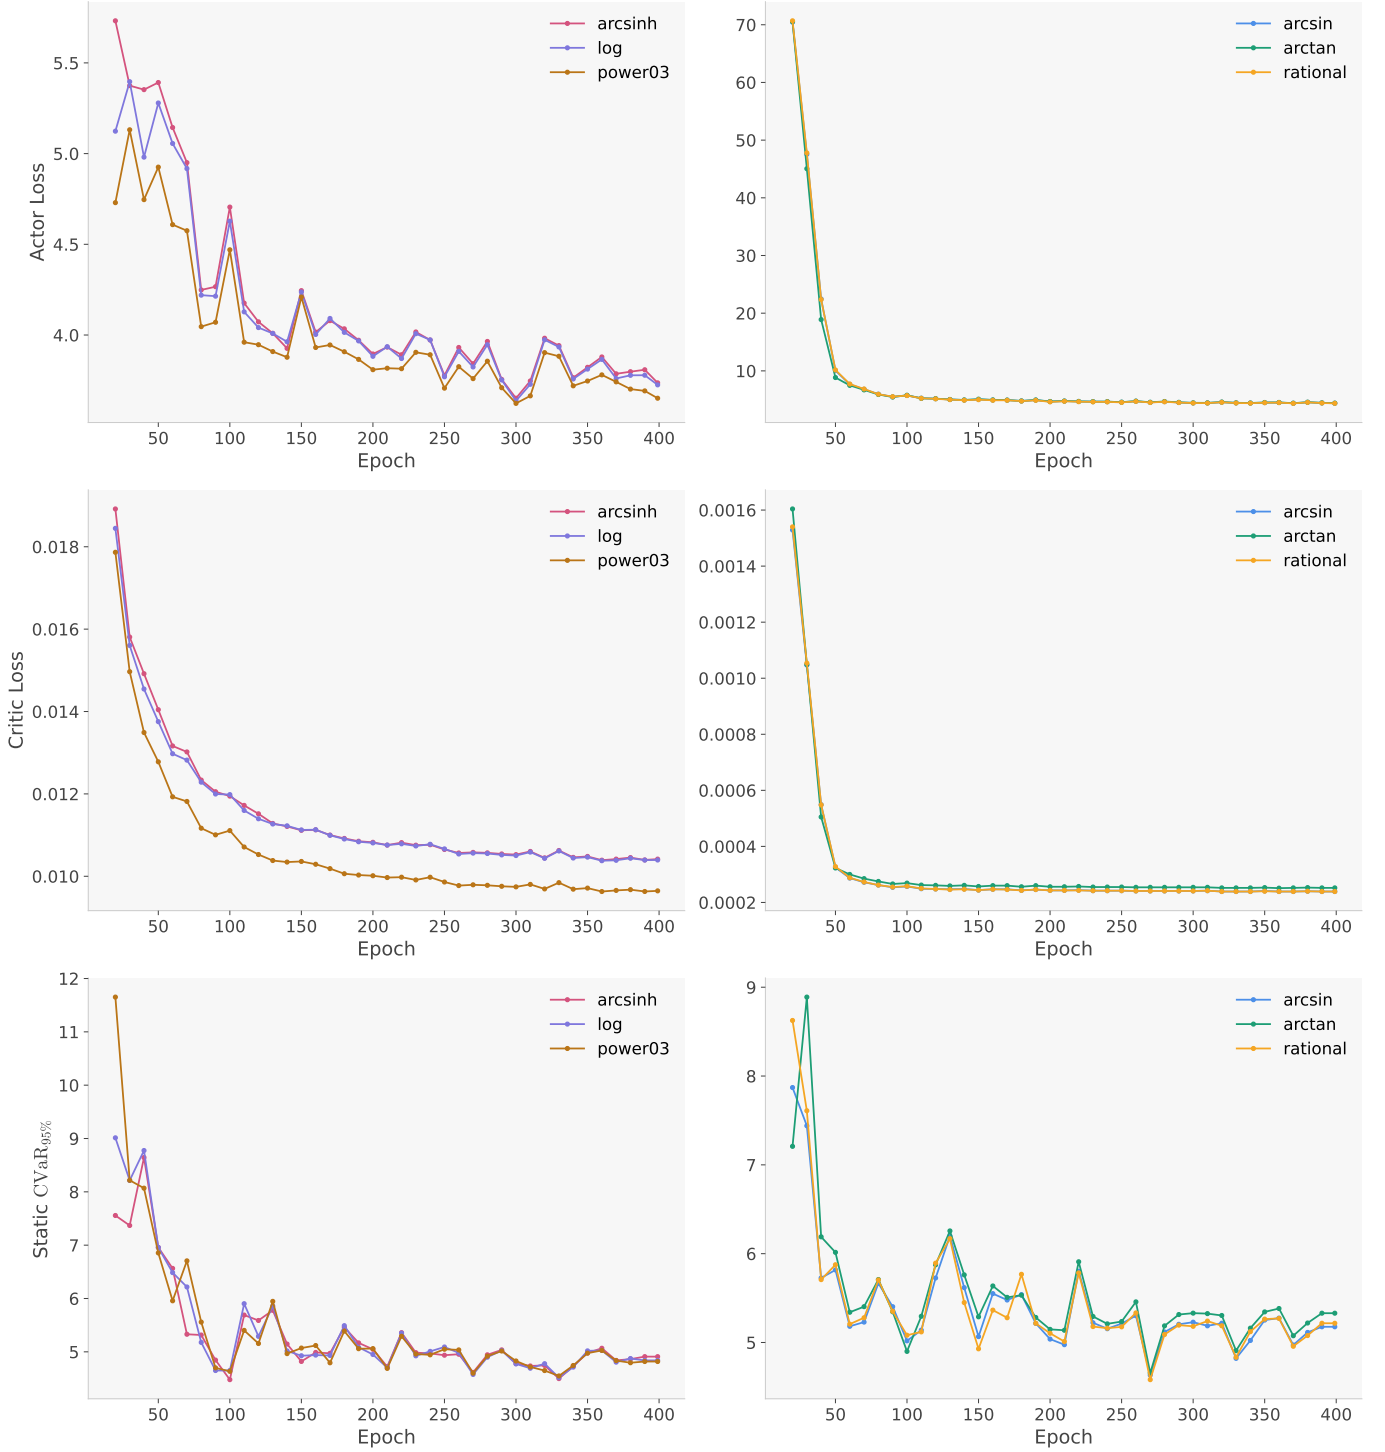


Figure 8: Plots of the actor, critic and test risk over intermediate test set with plots separated based on type of scoring function for better visualization.

6 Conclusion

In this paper, we are able to show that the conditionally elicitable RL framework inspired from [Coache et al. \(2023\)](#) can successfully solve high-dimensionality problems; we were able to tackle the hedging of a basket option across much more granular time grids and higher confidence levels than previously proposed in literature. We also highlight a value-function translation approach that leverages regions of the scoring function with higher convexity to facilitate numerical optimization. Using the proposed elicibility-based approach, we derive effective dynamic risk models under the CVaR risk measure and evaluate their hedging performance against precommitment policies. While precommitment policies outperform on terminal static risk and achieve greater average terminal P&L, dynamic risk policies produce less variable terminal P&L distributions and exhibit superior hedging performance relative to the static risk model over shorter maturities. Finally, consistent with the literature, we find that unbounded sublinear (e.g. logarithmic and fractional-power) characterizations of the scoring function for CVaR generally yield final hedging policies with the best performance when sufficient samples are available in risk-aware actor-critic RL. At extreme confidence levels (e.g., $\alpha = 99\%$), however, saturating scores may yield better hedging performance when tail samples are scarce, as their diminishing tail sensitivity limits the influence of individual samples and can make the loss more stable. Overall, these results demonstrate the effectiveness of the elicibility-based approach in RL while highlighting the importance of tuning the scoring function and learning environment for stable learning at high confidence levels.

References

- Barto, A. G., Sutton, R. S., and Anderson, C. W. (1983). Neuronlike adaptive elements that can solve difficult learning control problems. *IEEE Transactions on Systems, Man, and Cybernetics*, SMC-13(5):834–846.
- Buehler, H., Gonon, L., Teichmann, J., and Wood, B. (2019). Deep hedging. *Quantitative Finance*, 19(8):1271–1291.
- Cao, J., Chen, J., Farghadani, S., Hull, J. C., Poulos, Z., Wang, Z., and Yuan, J. (2023). Gamma and Vega hedging using deep distributional reinforcement learning. *Frontiers in Artificial Intelligence*, 6:1129370.

- Cao, J., Chen, J., Hull, J., and Poulos, Z. (2019). Deep hedging of derivatives using reinforcement learning. *arXiv preprint*.
- Carbonneau, A. and Godin, F. (2021). Equal risk pricing of derivatives with deep hedging. *Quantitative Finance*, 21(4):593–608.
- Carbonneau, A. and Godin, F. (2024). Deep equal risk pricing of illiquid derivatives with multiple hedging instruments. *Journal of Computational Finance*, 28(3):1–41.
- Coache, A. and Jaimungal, S. (2024). Reinforcement learning with dynamic convex risk measures. *Mathematical Finance*, 34(2):557–587.
- Coache, A., Jaimungal, S., and Cartea, Á. (2023). Conditionally elicitable dynamic risk measures for deep reinforcement learning. *SIAM Journal on Financial Mathematics*, 14(4):1249–1289.
- Demarta, S. and McNeil, A. J. (2005). The t copula and related copulas. *International Statistical Review*, 73(1):111–129.
- Ding, Y., Yuan, G., Zuo, D., and Gao, T. (2025). Hedging with sparse reward reinforcement learning. *arXiv preprint*.
- Du, J., Jin, M., Kolm, P. N., Ritter, G., Wang, Y., and Zhang, B. (2020). Deep reinforcement learning for option replication and hedging. *The Journal of Financial Data Science*, 2(4):44–57.
- Engle, R. (2002). Dynamic conditional correlation: A simple class of multivariate generalized autoregressive conditional heteroskedasticity models. *Journal of Business & Economic Statistics*, 20(3):339–350.
- François, P., Gauthier, G., Godin, F., and Pérez-Mendoza, C. O. (2024). Enhancing deep hedging of options with implied volatility surface feedback information. *arXiv preprint*.
- François, P., Gauthier, G., Godin, F., and Pérez-Mendoza, C. O. (2025). Deep hedging with options using the implied volatility surface. *arXiv preprint*.
- Gneiting, T. (2011). Making and evaluating point forecasts. *Journal of the American Statistical Association*, 106(494):746–762.
- Godin, F. (2016). Minimizing CVaR in global dynamic hedging with transaction costs. *Quantitative Finance*, 16(3):461–475.

- Halperin, I. (2020). QLBS: Q-learner in the Black–Scholes(-Merton) worlds. *The Journal of Derivatives*, 28(1):99–122.
- Heston, S. L. and Nandi, S. (2000). A closed-form GARCH option valuation model. *The Review of Financial Studies*, 13(3):585–625.
- Huang, A., Leqi, L., Lipton, Z. C., and Azizzadenesheli, K. (2021). On the convergence and optimality of policy gradient for Markov coherent risk. *arXiv preprint*.
- Lambert, N. S., Pennock, D. M., and Shoham, Y. (2008). Eliciting properties of probability distributions. In *Proceedings of the 9th ACM Conference on Electronic Commerce*, pages 129–138.
- Lillicrap, T. P., Hunt, J. J., Pritzel, A., Heess, N., Erez, T., Tassa, Y., Silver, D., and Wierstra, D. (2015). Continuous control with deep reinforcement learning. *arXiv preprint*.
- Lütkebohmert, E., Schmidt, T., and Sester, J. (2022). Robust deep hedging. *Quantitative Finance*, 22(8):1465–1480.
- Marzban, S., Delage, E., and Li, J. Y. M. (2023). Deep reinforcement learning for option pricing and hedging under dynamic expectile risk measures. *Quantitative Finance*, 23(10):1411–1430.
- Meinshausen, N. (2006). Quantile regression forests. *Journal of Machine Learning Research*, 7(35):983–999.
- Mikkilä, O. and Kanninen, J. (2023). Empirical deep hedging. *Quantitative Finance*, 23(1):111–122.
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., Graves, A., Riedmiller, M., Fidjeland, A. K., Ostrovski, G., Petersen, S., Beattie, C., Sadik, A., Antonoglou, I., King, H., Kumaran, D., Wierstra, D., Legg, S., and Hassabis, D. (2015). Human-level control through deep reinforcement learning. *Nature*, 518(7540):529–533.
- Murray, P., Wood, B., Buehler, H., Wiese, M., and Pakkanen, M. (2022). Deep hedging: Continuous reinforcement learning for hedging of general portfolios across multiple risk aversions. In *Proceedings of the Third ACM International Conference on AI in Finance*, pages 361–368.
- Neagu, A., Godin, F., and Kosseim, L. (2025). Deep reinforcement learning algorithms for option hedging. *arXiv preprint*.

- Neagu, A., Godin, F., Simard, C., Kosseim, L., et al. (2024). Deep hedging with market impact. In *Canadian AI*.
- Patton, A. J. (2006). Modelling asymmetric exchange rate dependence. *International Economic Review*, 47(2):527–556.
- Prashanth, L. A. and Ghavamzadeh, M. (2016). Variance-constrained actor-critic algorithms for discounted and average reward MDPs. *Machine Learning*, 105(3):367–417.
- Rockafellar, R. T. and Uryasev, S. (2000). Optimization of conditional value-at-risk. *Journal of Risk*, 2:21–42.
- Ruszczynski, A. (2010). Risk-averse dynamic programming for Markov decision processes. *Mathematical Programming*, 125(2):235–261.
- Sharma, A., Chen, F., Noh, J., DeJesus, J., and Schlener, M. (2024). Hedging beyond the mean: A distributional reinforcement learning perspective for hedging portfolios with structured products. *arXiv preprint*.
- Silver, D., Huang, A., Maddison, C. J., Guez, A., Sifre, L., Van Den Driessche, G., Schrittwieser, J., Antonoglou, I., Panneershelvam, V., Lanctot, M., Dieleman, S., Grewe, D., Nham, J., Kalchbrenner, N., Sutskever, I., Lillicrap, T., Leach, M., Kavukcuoglu, K., Graepel, T., and Hassabis, D. (2016). Mastering the game of Go with deep neural networks and tree search. *Nature*, 529(7587):484–489.
- Silver, D., Hubert, T., Schrittwieser, J., Antonoglou, I., Lai, M., Guez, A., Lanctot, M., Sifre, L., Kumaran, D., Graepel, T., Lillicrap, T., Simonyan, K., and Hassabis, D. (2018). A general reinforcement learning algorithm that masters chess, shogi, and Go through self-play. *Science*, 362(6419):1140–1144.
- Tamar, A. and Mannor, S. (2013). Variance adjusted actor critic algorithms. *arXiv preprint*.
- Wu, D. and Jaimungal, S. (2023). Robust risk-aware option hedging. *Applied Mathematical Finance*, 30(3):153–174.
- Yu, X. and Ying, L. (2023). On the global convergence of risk-averse policy gradient methods with expected conditional risk measures. In *International Conference on Machine Learning*, pages 40425–40451. PMLR.

Yuana, J. (2024). Hedging barrier options using reinforcement learning. *Journal Of Investment Management*, 22(4):16–25.

A Hessian Derivation

We derive (2.20), the Hessian of $\mathfrak{s}(\mathbf{a}_1, \mathbf{a}_2) = \mathbb{E}_{Y \sim F}[S(\mathbf{a}_1, \mathbf{a}_2, Y)]$ with respect to $(\mathbf{a}_1, \mathbf{a}_2)$, evaluated at the minimizer $\mathbf{a}_1^* = \text{VaR}_\alpha(Y)$ and $\mathbf{a}_2^* = \text{CVaR}_\alpha(Y)$. S is given by (2.12).

Proof. Define

$$M(\mathbf{a}_1, \mathbf{a}_2, y) := \mathbf{a}_2 + \frac{1}{1 - \alpha} (\mathbf{a}_1 (\mathbb{1}_{y > \mathbf{a}_1} - (1 - \alpha)) - y \mathbb{1}_{y > \mathbf{a}_1}).$$

Differentiating $\mathfrak{s}$ w.r.t. $\mathbf{a}_2$, the terms $-G'(\mathbf{a}_2)$ and $+G'(\mathbf{a}_2)$ cancel via the product rule, yielding

$$\frac{\partial \mathfrak{s}}{\partial \mathbf{a}_2} = G''(\mathbf{a}_2) \mathbb{E}[M(\mathbf{a}_1, \mathbf{a}_2, Y)].$$

Furthermore,

$$\begin{aligned} \frac{\partial \mathfrak{s}}{\partial \mathbf{a}_1} &= \frac{G'(\mathbf{a}_2)}{1 - \alpha} \frac{\partial \mathfrak{s}}{\partial \mathbf{a}_1} \mathbb{E}[(\mathbf{a}_1 (\mathbb{1}_{y > \mathbf{a}_1} - (1 - \alpha)) - y \mathbb{1}_{y > \mathbf{a}_1})] \\ &= \frac{G'(\mathbf{a}_2)}{1 - \alpha} \left[-\mathbf{a}_1 f(\mathbf{a}_1) + (1 - F(\mathbf{a}_1)) - (1 - \alpha) - \underbrace{\frac{\partial \mathfrak{s}}{\partial \mathbf{a}_1} \int_{\mathbf{a}_1}^{\infty} y f(y) dy}_{=-\mathbf{a}_1 f(\mathbf{a}_1)} \right] \\ &= -\frac{G'(\mathbf{a}_2)}{1 - \alpha} (F(\mathbf{a}_1) - \alpha). \end{aligned}$$

Both above partial derivatives vanish at $(\mathbf{a}_1^*, \mathbf{a}_2^*)$ since $F(\mathbf{a}_1^*) = \alpha$ and $\mathbb{E}[Y \mathbb{1}_{Y > \mathbf{a}_1^*}] = (1 - \alpha)\mathbf{a}_2^*$; both equalities imply that $\mathbb{E}[M(\mathbf{a}_1^*, \mathbf{a}_2^*, Y)] = 0$.

Additionally, second-order partial derivatives are given by

$$\begin{aligned} \frac{\partial^2 \mathfrak{s}}{\partial \mathbf{a}_2^2} &= G'''(\mathbf{a}_2) \mathbb{E}[M(\mathbf{a}_1, \mathbf{a}_2, Y)] + G''(\mathbf{a}_2), \\ \frac{\partial^2 \mathfrak{s}}{\partial \mathbf{a}_1^2} &= -\frac{G'(\mathbf{a}_2)}{1 - \alpha} f(\mathbf{a}_1), \\ \frac{\partial^2 \mathfrak{s}}{\partial \mathbf{a}_1 \partial \mathbf{a}_2} &= -\frac{G''(\mathbf{a}_2)}{1 - \alpha} (F(\mathbf{a}_1) - \alpha). \end{aligned}$$

Thus, for arbitrary $(\mathbf{a}_1, \mathbf{a}_2)$, the Hessian is

$$\nabla^2 \mathfrak{s}(\mathbf{a}_1, \mathbf{a}_2) = \begin{pmatrix} -\frac{G'(\mathbf{a}_2) f(\mathbf{a}_1)}{1 - \alpha} & -\frac{G''(\mathbf{a}_2)(F(\mathbf{a}_1) - \alpha)}{1 - \alpha} \\ -\frac{G''(\mathbf{a}_2)(F(\mathbf{a}_1) - \alpha)}{1 - \alpha} & G'''(\mathbf{a}_2) \mathbb{E}[M(\mathbf{a}_1, \mathbf{a}_2, Y)] + G''(\mathbf{a}_2) \end{pmatrix}. \quad (\text{A.1})$$

Substituting $F(\mathbf{a}_1^*) = \alpha$ and $\mathbb{E}[M(\mathbf{a}_1^*, \mathbf{a}_2^*, Y)] = 0$ at the optimum, the off-diagonal entries vanish and the Hessian reduces to

$$\nabla^2 \mathfrak{s}(\mathbf{a}_1^*, \mathbf{a}_2^*) = \begin{pmatrix} -\frac{f(\mathbf{a}_1^*) G'(\mathbf{a}_2^*)}{1 - \alpha} & 0 \\ 0 & G''(\mathbf{a}_2^*) \end{pmatrix}. \quad (\text{A.2})$$

□

B Environment

B.1 Parameter calibration

To simulate the asset price behavior of the four bank assets mentioned, we follow the DCC-GARCH(1, 1) model as specified by (Engle, 2002), which models individual asset volatilities using a univariate GARCH process and their dependence through time-varying correlations. To capture the tail-dependence across banking assets, we use Gaussian marginals coupled through a Student- t copula with ν degrees of freedom. With N assets indexed by $i = 1, \dots, N$ and $t \in \mathcal{T}_{\text{hist}} = \{1, \dots, T_{\text{hist}}\}$, the DCC-GARCH model can be described by first specifying the GARCH dynamics for each asset, followed by the dynamic conditional correlation structure. First, we have

$$\mathbf{r}_t = \boldsymbol{\mu}_t + \boldsymbol{\epsilon}_t, \quad \mathbf{z}_t = D_t^{-1} \boldsymbol{\epsilon}_t, \quad \text{and} \quad (\text{B.1})$$

$$\mathbf{z}_t = \left[z_{1,t}, \dots, z_{N,t} \right]^\top, \quad (\text{B.2})$$

where $\mathbf{r}_t$ is the vector of asset returns, $\boldsymbol{\mu}_t$ is the vector of conditional means, and $\boldsymbol{\epsilon}_t$ is the vector of return innovations. $z_{i,t}$ represents the standardized residual for the i th asset, with a standard normal marginal distribution. D_t is the diagonal matrix of conditional volatilities. For our hedging simulation, each asset follows a Heston–Nandi GARCH(1,1) process (Heston and Nandi, 2000)

under the physical measure, where

$$r_{i,t} = r_{f,t} + \lambda_i h_{i,t} + \sqrt{h_{i,t}} z_{i,t}, \quad (\text{B.3})$$

$$h_{i,t} = \omega_i + \beta_i h_{i,t-1} + \tilde{\alpha}_i \left(z_{i,t-1} - \gamma_i \sqrt{h_{i,t-1}} \right)^2. \quad (\text{B.4})$$

The dependence structure of the innovation vector is driven by a Student- t copula with correlation matrix R_t , which is updated according to the proxy matrix

$$Q_t = (1 - \alpha_{\text{DCC}} - \beta_{\text{DCC}}) \bar{Q} + \alpha_{\text{DCC}} \boldsymbol{\xi}_{t-1} \boldsymbol{\xi}_{t-1}^\top + \beta_{\text{DCC}} Q_{t-1}, \quad (\text{B.5})$$

where the $\boldsymbol{\xi}_{t-1}$ are defined as follows. First, $\mathbf{u}_t = T_\nu^{-1}(\Phi(\mathbf{z}_t))$ is the Student- t -transformed standardized residuals, with Φ denoting the standard normal cumulative distribution function and T_ν^{-1} denoting the quantile function of a standard Student- t distribution with ν degrees of freedom, and $\boldsymbol{\xi}_t = \sqrt{\frac{\nu-2}{\nu}} \mathbf{u}_t$ is their unit variance rescaling (assuming $\nu > 2$). $\bar{Q} = \frac{1}{T_{\text{hist}}} \sum_{t=1}^{T_{\text{hist}}} \boldsymbol{\xi}_t \boldsymbol{\xi}_t^\top$ represents the unconditional proxy matrix where $Q_0 = \bar{Q}$ during calibration. Based on this recursive update, the time- t correlation matrix is then given by

$$R_t = \text{diag}(Q_t)^{-\frac{1}{2}} Q_t \text{diag}(Q_t)^{-\frac{1}{2}}. \quad (\text{B.6})$$

To estimate the parameters of the DCC-GARCH model, we utilize a two-stage Maximum Likelihood Estimation (MLE) procedure. The data consists of a 10-year historical period from December 23rd, 2015 to December 20th, 2025, containing $T_{\text{hist}} = 2513$ daily closing prices. All market data, including adjusted closing prices for equities and the 3-month Treasury bill yield, are obtained from Yahoo! Finance. The Heston–Nandi GARCH residuals $\epsilon_{i,t}$ are computed recursively for each parameter vector during the MLE procedure from excess log returns by subtracting the continuously compounded risk-free component $r_{f,t}$ and the conditional risk premium $\lambda_i h_{i,t}$, which sum to $\mu_{i,t}$. $r_{f,t}$ is derived from the annualized 3-month Treasury bill yields and the aforementioned constant daily risk-free rate $\bar{r}_f = \frac{1}{T_{\text{hist}}+1} \sum_{t=1}^{T_{\text{hist}}+1} r_{f,t}$. During calibration, the initial conditional volatility $h_{i,0}$ is the sample variance of log-returns. The GARCH parameters $\Theta_i = \{\omega_i, \tilde{\alpha}_i, \beta_i, \gamma_i, \lambda_i\}$ for each asset are estimated by minimizing the following conditional

Gaussian negative log-likelihood:

$$\min_{\zeta_i} - \sum_t \ell_t^{\text{Marginal}} = \min_{\zeta_i} \frac{1}{2} \sum_t (\ln(2\pi) + \ln(h_{i,t}) + z_{i,t}^2). \quad (\text{B.7})$$

GARCH parameter estimates for the four assets are provided in [Table 5](#). Following [Heston and](#)

Table 5: Calibrated GARCH parameters

Bank	ω	$\tilde{\alpha}$	β	γ	λ	$\sqrt{252\bar{h}}$
JPM	4.26×10^{-8}	1.17×10^{-5}	0.8668	87.19	2.4522	25.73%
BAC	1.58×10^{-7}	1.41×10^{-5}	0.8563	84.94	1.3468	29.40%
WFC	1.09×10^{-9}	2.85×10^{-5}	0.8590	47.39	0.6377	30.57%
C	1.00×10^{-9}	2.01×10^{-5}	0.8586	65.86	0.9214	30.54%

[Nandi \(2000\)](#), for each asset, the unconditional variance is⁷ $\bar{h}_i = (\omega_i + \tilde{\alpha}_i)/(1 - \beta_i - \alpha_i\gamma_i^2)$ and the annualized unconditional volatility is $\sqrt{252\bar{h}_i}$. We use the differential evolution algorithm to effectively search the parameter space and reach global optima.

Following the multivariate Student- t copula described by ([Demarta and McNeil, 2005](#)) within the conditional copula framework of ([Patton, 2006](#)), the DCC parameters and degrees of freedom are optimized minimizing the following negative log-likelihood:

$$\min_{\alpha_{\text{DCC}}, \beta_{\text{DCC}}, \nu} - \sum_t \ell_t^{\text{cop}} \quad (\text{B.8})$$

where

$$\begin{aligned} \ell_t^{\text{cop}} &= -\frac{1}{2} \log |R_t| - \frac{\nu+N}{2} \log \left(1 + \frac{\mathbf{u}_t^\top R_t^{-1} \mathbf{u}_t}{\nu} \right) + \frac{\nu+1}{2} \sum_{i=1}^N \log \left(1 + \frac{u_{i,t}^2}{\nu} \right) + \tilde{C}, \\ \tilde{C} &= \log \Gamma \left(\frac{\nu+N}{2} \right) + (N-1) \log \Gamma \left(\frac{\nu}{2} \right) - N \log \Gamma \left(\frac{\nu+1}{2} \right). \end{aligned}$$

The resulting DCC parameters and degrees of freedom are reported in [Table 6](#), while the associated unconditional correlation between assets implied by the unconditional proxy $\bar{Q}$ is summarized in [Table 7](#). Exact calibrated parameter values in our experiments can be found in the configurations folder in the [GitHub repository](#).

⁷See p.598 of [Heston and Nandi \(2000\)](#).

Table 6: Calibrated DCC parameters

Parameter	Value	Constraint	Interpretation
α_{DCC}	0.0165	≥ 0	News (shock) effect
β_{DCC}	0.9652	≥ 0	Persistence effect
$\alpha_{\text{DCC}} + \beta_{\text{DCC}}$	0.9816	< 1	Stationarity
ν (DoF)	15.9241	> 2	Tail thickness

Table 7: Unconditional pairwise correlations from $\bar{Q}$

Asset Pair	Correlation
JPM – BAC	0.8282
JPM – WFC	0.7167
JPM – C	0.7746
BAC – WFC	0.7753
BAC – C	0.8227
WFC – C	0.7197

To simulate, we generate correlated innovations from the calibrated Student- t copula using the Gaussian scale-mixture representation of the multivariate Student- t distribution. Specifically, at each time period, we draw

$$\hat{\mathbf{u}}_t = \hat{\boldsymbol{\zeta}}_t \sqrt{\frac{\nu}{\chi_t}}, \quad \hat{\boldsymbol{\zeta}}_t \sim \mathcal{N}(\mathbf{0}, R_t), \quad \chi_t \sim \chi_\nu^2, \quad (\text{B.9})$$

where $\hat{\boldsymbol{\zeta}}_t$ and χ_t are independent. Note that the same χ_t applies to the denominator for all components of $\hat{\boldsymbol{\zeta}}_t$ in (B.9). Then, $\hat{\boldsymbol{\xi}}_t = \hat{\mathbf{u}}_t \sqrt{\frac{\nu-2}{\nu}}$ is used to update Q_t and $\hat{\mathbf{z}}_t = \Phi^{-1}(T_\nu(\hat{\mathbf{u}}_t))$ is used to update $r_{i,t}$ and $h_{i,t}$. The initial variances and proxy matrix are set to their unconditional values. The Monte Carlo paths used for basket option pricing described in Section B.2 are generated under the risk-neutral measure. Specifically, following risk-neutral parameterization described in Heston and Nandi (2000) and its componentwise extension to the multivariate DCC-GARCH setting, the market price of risk is set to $\lambda_i^{\mathbb{Q}} = -\frac{1}{2}$, and the leverage parameter is adjusted according to

$$\gamma_i^{\mathbb{Q}} = \gamma_i^{\mathbb{P}} + \lambda_i^{\mathbb{P}} + \frac{1}{2}. \quad (\text{B.10})$$

We assume that the correlation structure of the DCC and the student copula dependence module are left unchanged under the risk-neutral measure.

B.2 Basket option pricing

To price European basket call options, we use a feedforward neural network described in [Section C.2](#) to map the state vector s_t in [Section 4](#) excluding a_{t-1} to the time-value of the hedged basket option in a $\log 1p(x)$ space to stabilize the time-value’s heavy right skew. The training set comprises $n_{\text{samples}} = 50,000$ randomized configurations of the state vectors that span the one-year hedging horizon and are stratified across intrinsic-value cases ($T = 0$), boundary regimes such as deep ITM/OTM and near-expiry and long-expiry ATM, and a general population sampled from a mixture distribution over T that oversamples near-expiry maturities, as pricing noise is quite large in this regime.

In the dataset, the response variable for each observation consists of the time value (price minus intrinsic value) of an option price associated with the state s_t , which is approximated through Monte Carlo simulation. All Monte Carlo paths in this context are generated according to DCC-GARCH under the risk-neutral measure, implied by the Heston-Nandi transformation described prior. Each sample (option price) involves applying Monte Carlo simulation with $n_{\text{paths}} = 100,000$ paths under the model-implied risk-neutral DCC-GARCH following the same gaussian marginal and Student- t copula assumption, beginning from a single randomly generated state vector. For each sample, the price of the basket option is calculated as the sample average discounted intrinsic payoff $e^{-\bar{r}_f \cdot 252(T-t)} \frac{1}{n_{\text{paths}}} \sum_{j=1}^{n_{\text{paths}}} \max\left(\sum_{i=1}^N w_i S_T^{(i,j)} - K, 0\right)$ of the 100,000 terminal prices resulting from the DCC-GARCH simulation. The network regresses to the time value in the $\log 1p(x)$ space using the mean squared error (MSE) loss on 85,000 samples until convergence. On a test set of 15,000 samples, the surrogate neural network accurately predicts the time value of the Monte Carlo-priced basket option with a best mean absolute error (MAE) of \$0.0288 and median absolute error and \$0.0150. Relative to the average test time-value of \$2.1418, this corresponds to a best relative MAE of 1.34%. Furthermore, predictions on 95% of test samples exhibit best MAEs below \$0.0927.

C Neural network architecture and hyperparameters

C.1 Dynamic and static risk models

As mentioned, there are two neural networks that make up the respective critics for each time period, one estimating VaR and the other estimating the excess above VaR, each applying a

two linear layers of dimension 128 and SiLU activation in between, with the excess network additionally applying a LeakyReLU activation with the negative slope parameter of .05. The actor for both the dynamic and static risk models shares an identical trunk of two linear layers of dimension 256, each followed by a LeakyReLU activation with the same negative slope, feeding into a final linear layer that outputs the mean of the action distribution. The standard deviation of the action distribution for the dynamic risk model is fixed throughout training to 1×10^{-3} . The actor and critic learning rates for the dynamic risk model are set to 2.5×10^{-3} , with geometric decay rates of .997 and .99999 per gradient step, respectively; the static risk model’s actor and smooth auxiliary variable q learning rates are set to 2.5×10^{-5} and 2.5×10^{-2} , both decayed with a geometric decay rate of .998 per step.⁸ Per epoch, which involves passing all groups $\mathbb{G}$ for the critic and updating the actor, the VaR and excess critics for all time periods in each group are updated simultaneously using $E_1 = 2000$ gradient steps for the first epoch and $E_1 = 1000$ otherwise, and the actor is updated using $E_2 = 3$ gradient steps. The target networks for the critic are updated every $M = 300$ critic gradient steps. We set $\mathbb{G} = 17$ for 18 total groups of critics over the time horizon for the actor-critic algorithm; we did not test other values for $\mathbb{G} > 1$ for the sequential training procedure. The actor-only (static) algorithm takes 1 gradient step per epoch. We use $B = 16,384$, which represents the batch size of generated paths per epoch for critic training, $B_1 = 2048$ as the minibatch size for critic training, and $B_2 = 2048$ as the baseline, unadjusted batch size of generated paths for each actor gradient step for both the dynamic and static risk models. Table 8 shows the total generated paths for increasingly risk-aware dynamic risk models for a singular epoch including the B_1 size intermediate test set, where B trajectories are generated for the critic and $B_2/(1 - \alpha)$ trajectories are generated for each gradient step of the actor. The optimizers for the critic and actor for the actor-critic algorithm are Stochastic

α	Paths per epoch ($B + B_1 + 3B_2/(1 - \alpha)$)
92.5%	100,352
95%	141,312
97.5%	264,192
99%	632,832

Table 8: Number of simulated paths per epoch by risk level for the dynamic risk model

Gradient Descent with Nesterov Momentum of .9 and Adam, respectively, and the optimizers for

⁸At the $\alpha = 99\%$ confidence level, all learning rates are decreased by three orders of magnitude to mitigate instability from sparse, tail-driven updates.

the q auxiliary variable and the actor in the actor-only algorithm are both Adam. The actor-critic algorithm is run in separate trials across the four confidence levels and the six proposed scoring functions for eliciting CVaR. All dynamic risk models are trained for $E = 400$ outer epochs (equivalent to 1200 actor updates), while all static risk models are trained for $E = 2000$ epochs (equivalent to 2000 actor updates). All scoring functions use $C = 40$.

All Training was performed using an NVIDIA T4 GPU through Kaggle’s servers.

C.2 Basket surrogate

The Basket Surrogate feedforward neural network contains fully connected layers with widths of 256, 128, and 64, followed by a fully connected output head with dimensions 64, 32, and 1. The network applies layer norm after the first linear transformation, SiLU activations between layers, and dropout regularizations at a rate of 5%. A residual connection adds the output of the 128-unit layer to a learned linear projection of its 256-dimensional input, with the resulting 128-dimensional representation passed through dropout and then to the 64-unit fully connected layer. This is done to achieve effective gradient propagation. To train the neural network, we use the AdamW optimizer with a learning rate of 1×10^{-3} and weight decay of 1×10^{-4} . A batch size of 512 is used to train the surrogate model each epoch. If the MSE Loss shows no improvement for a patience period of 20 consecutive epochs, the learning rate is halved until reaching a minimum floor of 1×10^{-6} . The model trains for 1000 epochs and stops training early if the latest MAE on the test set has not exceeded its best prior MAE for 250 epochs.

Acknowledgements

The authors thank Janine Sharbaugh for her invaluable support throughout this work. Frédéric Godin acknowledges funding from NSERC (RGPIN-2024-04593).

Statement of interest

Authors have no conflict of interest to declare.