

SoftSAE: Dynamic Top-K Selection for Adaptive Sparse Autoencoders

Jakub Stepień

Jagiellonian University
jaku8.stepien@student.uj.edu.pl

Marcin Mazur

Jagiellonian University
marcin.mazur@uj.edu.pl

Jacek Tabor

Jagiellonian University
jacek.tabor@uj.edu.pl

Przemysław Spurek

Jagiellonian University
IDEAS Research Institute
przmeyslaw.spurek@uj.edu.pl

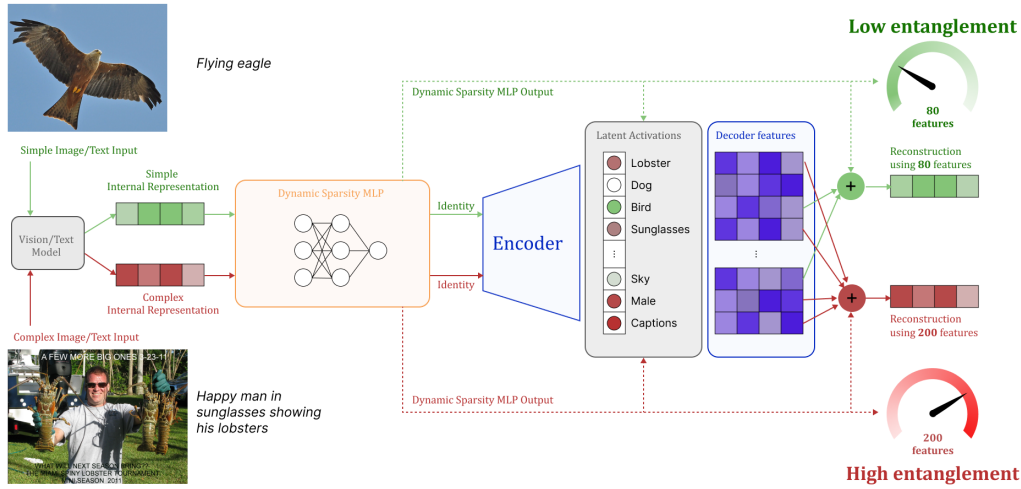


Figure 1: Overview of the SoftSAE framework for adaptive mechanistic interpretability. Unlike traditional SAEs that enforce a fixed sparsity level K regardless of input complexity, SoftSAE uses a Dynamic Sparsity MLP to estimate an input-dependent sparsity $\hat{k}$. Simple inputs, such as a “flying eagle”, are represented with fewer active features, reducing noise and entanglement. In contrast, semantically rich or cluttered inputs, such as “a happy man in sunglasses showing his lobsters”, induce higher sparsity budgets, enabling the model to capture multiple concepts without information loss. This adaptive mechanism aligns the effective explanation length with the local intrinsic dimensionality of the data manifold.

Abstract

Sparse Autoencoders (SAEs) have become an important tool in mechanistic interpretability, helping to analyze internal representations in both Large Language Models (LLMs) and Vision Transformers (ViTs). By decomposing polysemantic activations into sparse sets of monosemantic features, SAEs aim to translate neural network computations into human-understandable concepts. However, common architectures such as TopK SAEs rely on a fixed sparsity level. They enforce the same number of active features (K) across all inputs, ignoring the varying complexity of real-world data. Natural data often lies on manifolds with varying local intrinsic dimensionality, meaning the number of relevant factors can change significantly across samples. This suggests that a fixed sparsity level is not optimal.

Simple inputs may require only a few features, while more complex ones need more expressive representations. Using a constant K can therefore introduce noise in simple cases or miss important structure in more complex ones. To address this issue, we propose SoftSAE, a sparse autoencoder with a Dynamic Top-K selection mechanism. Our method uses a differentiable Soft Top-K operator to learn an input-dependent sparsity level $\hat{k}$. This allows the model to adjust the number of active features based on the complexity of each input. As a result, the representation better matches the structure of the data, and the explanation length reflects the amount of information in the input. Experimental results confirm that SoftSAE not only finds meaningful features, but also selects the right number of features for each concept. The source code is available at: <https://github.com/St0pien/SoftSAE>.

1 Introduction

Mechanistic interpretability seeks to reverse engineer the opaque representations of deep neural networks into human-understandable components. As both Large Language Models and Vision Transformers scale in complexity, understanding their internal reasoning becomes critical for safety and alignment. In recent years, Sparse Autoencoders (SAEs) [1, 2] have emerged as the dominant paradigm for this task. By mapping dense, polysemantic activations into a higher-dimensional space under a strict sparsity constraint, SAEs successfully isolate monosemantic features. Early foundational approaches, such as the ReLU SAE [3], have demonstrated that neural networks naturally learn superposition, in which multiple distinct concepts share the same latent neurons.

To refine feature extraction and address optimization instabilities, the research community has proposed several structural innovations. The TopK SAE [4] introduced a hard thresholding mechanism that explicitly activates only the most prominent features, effectively bypassing the tuning issues of continuous penalty terms. This concept was further advanced by BatchTopK [5] to ensure better feature utilization and prevent dead neurons across diverse training batches. Concurrent innovations include the JumpReLU SAE [6], which employs a discontinuous activation function to cleanly separate true signals from noise, and Matryoshka representations [7], which organize learned features into highly scalable hierarchical structures. Despite impressive advancements, all these leading methodologies share a fundamental architectural limitation: they impose a rigid, global capacity constraint across the entire dataset.

Natural data exhibits immense variability in complexity. As demonstrated by Local Intrinsic Dimensionality (LID) estimation techniques such as LIDL [8], the number of latent degrees of freedom fluctuates significantly across different regions of the data manifold. A simple linguistic conjunction or a visually uniform background requires very few active concepts to be fully described. Conversely, highly specialized domain terminology or dense, cluttered visual scenes demand a rich, multifaceted set of explanatory features. Imposing a uniform global parameter K , representing the number of active features, explicitly disregards this fundamental geometric property of the data. It forces the interpretability model into an unavoidable compromise: it either generates overly complex explanations by hallucinating noisy features for simple inputs, or produces insufficient explanations by dropping critical semantic nuance for complex thoughts.

To overcome this rigid bottleneck, we propose SoftSAE (see Figure 1), a highly adaptive architecture that dynamically calibrates its capacity to match the exact complexity of each processed input. Our core contribution is the integration of a Dynamic Top-K Selection mechanism powered by the differentiable Soft Top-K operator [9]. Instead of relying on a static hyperparameter, SoftSAE optimizes an input-dependent scalar $\hat{k}$, representing the sparsity level of the processed data, through continuous gradient descent. This method allows the network to learn exactly how many concepts are required to faithfully reconstruct a given representation, thereby aligning the explanation length with the signal’s true information density.

The primary contributions of our work are as follows:

- We introduce SoftSAE, a novel approach that uses a continuous Soft Top-K formulation to dynamically predict and optimize the exact sparsity level ($\hat{k}$) for each input.
- We provide a strong theoretical grounding for adaptive sparsity in mechanistic interpretability by linking explanation capacity directly to the local intrinsic dimensionality of the neural activation space.

- By dynamically adjusting $\hat{k}$, the model achieves a superior balance between reconstruction fidelity and interpretability, uncovering monosemantic features that more faithfully reflect the multiscale complexity of natural data.

2 Related Work

As deep learning architectures achieve unprecedented performance across diverse domains, their inherent opacity remains a significant barrier to safe and reliable deployment. The pursuit of illuminating these opaque systems has fostered a rich landscape of research, generally bifurcating into structural and semantic methodologies. In this section, we review the foundational and contemporary literature that contextualizes our proposed dynamic framework. We begin by examining the rapid evolution of mechanistic interpretability and sparse autoencoders, which strive to decode internal network representations at a highly granular level. Following this, we explore concept-based explainability paradigms that map latent geometric spaces to human-comprehensible concepts. Finally, we review recent developments in adaptive capacity and differentiable selection, positioning our methodology as a necessary synthesis of these distinct research trajectories.

Mechanistic Interpretability and Sparse Autoencoders The field of mechanistic interpretability aims to reverse engineer the opaque inner workings of complex neural networks into understandable, logical components [10, 11]. Initial attempts in this domain focused on generating natural-language descriptions of individual neurons [12]. However, the highly polysemantic nature of these representations, where a single neuron responds to multiple unrelated concepts, posed significant challenges.

To disentangle these overlapping representations, Sparse Autoencoders (SAEs) emerged as a robust solution capable of recovering monosemantic features [1, 2]. The foundational ReLU-based architectures [3] paved the way for scaling these methods to massive language models [13]. Subsequent architectural improvements focused heavily on refining the sparsity constraint to improve both reconstruction fidelity and feature purity. The applied Top-K framework [4] introduced a strict activation limit to bypass the instability of continuous penalty terms. This was later optimized across training batches via BatchTopK [5] to prevent dead neurons. Other notable variants include the JumpReLU architecture [6], which implements a discontinuous activation function to cleanly separate signal from noise, and Matryoshka representations [7], which explore scalable hierarchical feature structuring. These advanced techniques have been successfully applied across a wide range of domains, including diffusion models [14], radiology report generation [15], and broad vision architectures [16, 17].

Concept Based Explainability Parallel to mechanistic approaches, concept-based explainability seeks to map latent spaces to predefined, human-coherent ideas. Early frameworks relied heavily on manually annotated datasets to construct interpretable basis decompositions and concept activation vectors [18, 19]. To scale these methods beyond small datasets, researchers developed automated concept extraction techniques [20, 21]. Further structural innovations led to the introduction of Concept Bottleneck Models [22], which explicitly enforce conceptual representations during training. Recent advancements have addressed the traditional accuracy-versus-interpretability trade-off by embedding continuous concept representations directly into the network [23].

Dynamic Capacity and Differentiable Selection While existing sparse architectures and concept-based models provide valuable insights, they typically enforce a static capacity parameter across all inputs, disregarding the varying complexity of individual data samples. Our approach diverges from these static constraints by drawing inspiration from differentiable selection operators. By leveraging the continuous Soft Top-K formulation [9], we introduce an adaptive sparsity mechanism. Unlike rigid models, this dynamic selection allows the network to autonomously determine the optimal number of active features for each input, bridging the gap between fixed-capacity autoencoders and the inherent multiscale complexity of natural data.

3 Our Method

In this section, we detail the theoretical foundation and practical implementation of our SoftSAE architecture. We begin by formalizing the standard interpretability paradigm and identifying the mathematical limitations of static capacity constraints. Following this, we introduce the core components

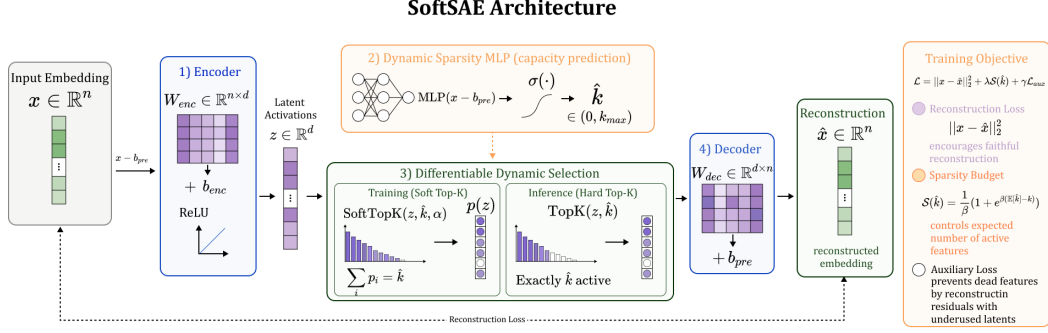


Figure 2: Diagrammatic representation of the SoftSAE architecture. The model utilizes a Dynamic Sparsity MLP to estimate an input-dependent sparsity level $\hat{k}$. During training, a differentiable Soft Top-K operator enables gradient flow through the selection mechanism, while a hard Top-K is used at inference to ensure exact sparsity and interpretability.

of our proposed model, highlighting the dedicated neural module that estimates input-dependent capacity. We then explain the integration of a differentiable Soft Top-K operator, which enables continuous, gradient-based optimization during training while ensuring strict interpretability through exact selection at inference time. Finally, we formulate the comprehensive training objective and outline a novel sparsity budget mechanism that balances reconstruction fidelity with dynamic feature allocation. The overall SoftSAE architecture is visually summarized in Figure 2.

Preliminaries and Background Standard interpretability techniques analyze neural model activations $x \in \mathbb{R}^n$ extracted from a specific layer of a pretrained network. Sparse autoencoders decompose these activations into sparse linear combinations of learned directions, aiming to achieve high interpretability and monosemanticity.

The foundational SAE’s architecture consists of an encoder, a decoder, and an expanded latent space $\mathcal{Z} = \mathbb{R}^d$, where the dimension z is typically much larger than n . Formally, given a pre-encoder bias $b_{pre} \in \mathbb{R}^n$, an encoder weight matrix $W_{enc} \in \mathbb{R}^{n \times d}$, and an encoder bias $b_{enc} \in \mathbb{R}^d$, the latent representation $z \in \mathbb{R}^d$ is traditionally computed using a non linear activation such as ReLU:

$$z = \text{ReLU}(W_{enc}(x - b_{pre}) + b_{enc}). \quad (1)$$

The input is then reconstructed using a decoder matrix $W_{dec} \in \mathbb{R}^{d \times n}$ as follows:

$$\hat{x} = W_{dec}z + b_{pre}. \quad (2)$$

The rows of W_{dec} form a dictionary of d feature vectors in $\mathbb{R}^n$, and the latent vector z specifies a linear combination of these features used to reconstruct x , accordingly d is often referred to as the dictionary size.

The basic objective during training is to minimize the reconstruction loss, defined as the squared Euclidean distance between the original and reconstructed activations:

$$\mathcal{L}(x) := \|x - \hat{x}\|_2^2, \quad (3)$$

often accompanied by a sparsity penalty.

While foundational models utilize continuous activations to induce sparsity, recent advancements have replaced ReLU with a rigid Top-K selection to guarantee an exact number of active concepts. However, locking this capacity to a single global value completely ignores the varying conceptual density of individual inputs, forcing the network into a suboptimal regime in which it cannot autonomously adjust its explanatory bandwidth.

The above-mentioned issue is partially mitigated by BatchTopK and Matryoshka sparse autoencoders, in which sparsity is enforced through a global threshold rather than a fixed per-input budget. During training, this threshold is estimated using an exponential moving average (EMA) of activation statistics, and then applied at inference time. As a result, the number of active features per input can vary, but this variation is largely incidental rather than a principled adaptation to input complexity. In particular, multiple high activations do not necessarily indicate that all corresponding concepts should be used, as they may reflect redundancy or noise rather than genuinely distinct explanatory factors.

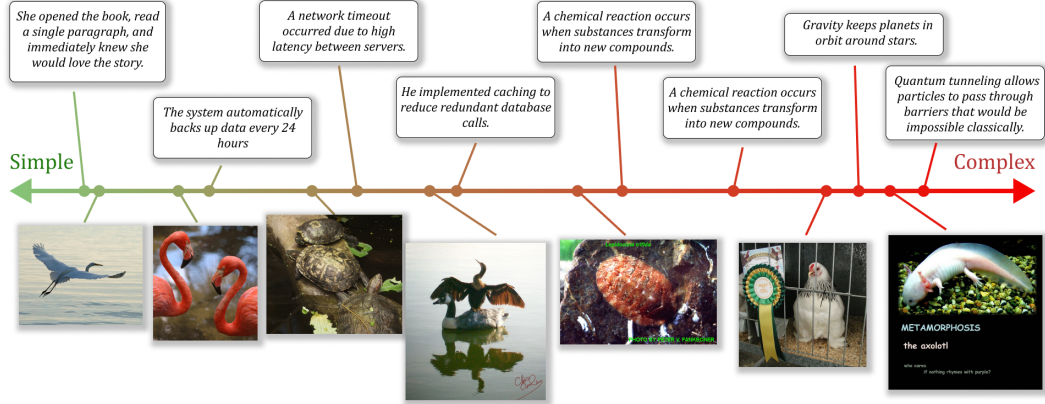


Figure 3: Visualization of inputs with varying embedding complexity: images with a solid background and a single entity lead to a low score, while text and multiple entities produce a high score. For text, the more context and knowledge required to fully capture the meaning of a sentence, the higher the score.

SoftSAE Architecture Overview To address the limitations of static capacity, we propose the SoftSAE architecture. Our model enhances the foundational autoencoder structure by introducing a Dynamic Sparsity MLP, a dedicated neural module that predicts the optimal capacity for every distinct input. Given model activations $x \in \mathbb{R}^n$, we estimate the input-dependent sparsity level $\hat{k} \in (0, k_{\max})$ as follows:

$$\hat{k} := \sigma(\text{MLP}(x)) \cdot k_{\max}, \quad (4)$$

where $k_{\max} \in \{1, \dots, d\}$ is a hyperparameter specifying the upper bound on the sparsity level, $d \in \mathbb{N}^+$ denotes the dictionary size of the autoencoder, and σ is the sigmoid activation function. This continuous formulation ensures that the predicted capacity scales smoothly between zero and the prescribed maximum capacity.

We implement the Dynamic Sparsity MLP as a single-hidden-layer network with a hidden dimensionality matching the autoencoder’s latent size d . The first layer is initialized with the encoder weights W_{enc} , thereby providing an inductive bias that aligns the capacity predictor with the feature space used for decomposition, although these parameters are free to diverge during training. We deliberately avoid deeper architectures, as the encoder itself remains linear and therefore cannot exploit higher-order nonlinear representations produced by a deep MLP, making additional depth unnecessary. Despite its simplicity, this design still offers a key advantage over global thresholding approaches: the decision about how many features to activate is made by a dedicated module, disentangled from the reconstruction process, allowing for a more principled and input-dependent allocation of representational capacity.

Differentiable Dynamic Selection The central innovation of our methodology lies in integrating the predicted continuous sparsity $\hat{k}$ directly into the feature selection process. Since standard sorting and Top-K operations are discrete and obstruct gradient flow, we instead employ a differentiable Soft Top-K mechanism during training, while reverting to exact Top-K selection at inference time. Concretely, given latent activations $z \in \mathbb{R}^d$, the Soft Top-K operator as defined by Struski et al. [9] (see Section 3.3 therein) produces a vector of continuous selection weights $p \in (0, 1)^d$ such that $\sum_i p_i = \hat{k}$. These weights approximate a binary selection mask and are applied elementwise to the latent representation, yielding a soft approximation of Top-K routing.

The sharpness of this approximation is controlled by a temperature parameter $\alpha > 0$ (see [9]), where values closer to zero recover the hard ranking in the limit. In practice, α can either be fixed to a small value or gradually annealed toward zero during training; empirically, we observe that such annealing yields modest but consistent improvements. However, in both cases, as α approaches 0, the operator becomes increasingly numerically unstable, producing weights that are nearly binary. While desirable for faithful selection, this regime also introduces a failure mode in which the model can “hide” information in features assigned extremely small but nonzero weights, effectively bypassing the intended sparsity constraint. To mitigate this, we adopt a stabilization strategy in the final phase

of training: we freeze the Dynamic Sparsity MLP and replace the soft selection with a hard Top-K operator, ensuring that the model converges to a solution that respects exact, discrete feature selection. In summary, the forward pass of our model is defined as follows:

Stage 1. We first pass the input through the encoder:

$$z = \text{ReLU}(W_{enc}(x - b_{pre}) + b_{enc}). \quad (5)$$

Stage 2. During training, we calculate the representation using Soft Top-K, the activations z , the hyperparameter α , and $\hat{k}$ obtained from Equation (4). Notice that we can use a $\hat{k}$ as a continuous value directly since the Soft Top-K operator naturally accepts non-integer sparsity levels:

$$p(z) = \text{SoftTopK}(z, \hat{k}, \alpha) \in (0, 1)^d, \quad (6)$$

$$f_{train}(z) = p(z) \odot z. \quad (7)$$

Stage 3. During inference and in the late stages of training, the representation is obtained using the standard hard Top-K operator, with $\hat{k}$ discretized (via rounding) to meet the operator input requirements.

$$f_{inf}(z) = \text{TopK}(z, \hat{k}). \quad (8)$$

Stage 4. Finally, the selected sparse features are projected back into the original space, and the reconstruction follows the standard protocol used in conventional autoencoders:

$$\hat{x} = W_{dec}f_{inf}(z) + b_{pre}. \quad (9)$$

Training Objective and Sparsity Budget To effectively train SoftSAE, we formulate a comprehensive objective function that balances representation quality against our dynamic capacity mechanism. We use a three-term loss consisting of a reconstruction penalty, a sparsity budget constraint, and an optional auxiliary component to maintain neuron health. Consequently, the total loss is defined as:

$$\mathcal{L}(x) := \|x - \hat{x}(f_{train}(x))\|_2^2 + \lambda \mathcal{S}(\hat{k}) + \gamma \mathcal{L}_{aux}, \quad (10)$$

with all terms detailed in the following paragraphs.

The first term minimizes the standard squared distance between the input data and its reconstruction. The second term, weighted by λ , regularizes the dynamic sparsity predictor, preventing it from greedily activating the entire dictionary. A natural naive formulation is as follows:

$$\mathcal{S}(\hat{k}) = \text{ReLU}(\mathbb{E}[\hat{k}] - k), \quad (11)$$

where $k < d$ is the hyperparameter that controls the mean sparsity level and $\mathbb{E}[\cdot]$ denotes the expectation operator. This formulation highlights the core principle behind our sparsity control mechanism: it enforces a budget on the expected number of active features. As long as the model operates below the prescribed threshold, it is free to allocate capacity without incurring any penalty, focusing entirely on minimizing reconstruction error. However, once the expected sparsity $\mathbb{E}[\hat{k}]$ exceeds this budget, the penalty term becomes active, forcing the model to trade off reconstruction fidelity against the cost of using additional features. In effect, this creates a dynamic equilibrium in which the model must learn to utilize its representational capacity efficiently, activating more neurons only when the corresponding gain in reconstruction quality justifies the incurred penalty.

Despite this appealing interpretation, the use of the ReLU function introduces a significant optimization challenge. Specifically, ReLU is non-differentiable at zero and exhibits a discontinuous gradient, switching abruptly from zero to one. In our setting, this is particularly problematic because the model is explicitly encouraged to operate near the boundary constraint $\mathbb{E}[\hat{k}] \approx k$, where the penalty transitions from inactive to active. As a result, the optimization landscape becomes sharply kinked in precisely the region most relevant for learning, leading to unstable gradient signals and potentially hindering convergence. This motivates the need for a smoother alternative that preserves the notion of a sparsity budget while providing well-behaved gradients near the constraint boundary. To address these issues, we replace the hard ReLU penalty with a smooth approximation based on the Softplus operator, yielding the final form of our sparsity penalty:

$$S(\hat{k}) = \frac{1}{\beta} \ln(1 + e^{(\mathbb{E}[\hat{k}] - k) \cdot \beta}), \quad (12)$$

where $\beta > 0$ controls the sharpness of the transition. If $\beta \rightarrow \infty$, this formulation recovers the original ReLU penalty, while for finite β it provides a continuously differentiable alternative. Crucially, this smoothness eliminates the abrupt change in gradients around the boundary constraint $\mathbb{E}[\hat{k}] \approx k$, resulting in a more stable optimization landscape. Instead of a hard kink, the model now experiences a gradual increase in penalty as it approaches and exceeds the sparsity budget, allowing gradients to guide it more reliably toward the desired operating point.

An additional, somewhat counter-intuitive benefit of this formulation emerges in practice. Unlike ReLU, Softplus assigns a small but nonzero penalty even when $\mathbb{E}[\hat{k}] < k$, effectively discouraging the model from saturating the available capacity. While this may initially appear undesirable, we empirically observe that models trained without such a margin tend to overshoot the intended sparsity level at inference time, activating more features than prescribed. The softened constraint therefore acts as a regularizer that encourages the model to remain conservatively within budget during training, leading to better adherence to the target sparsity level at test time.

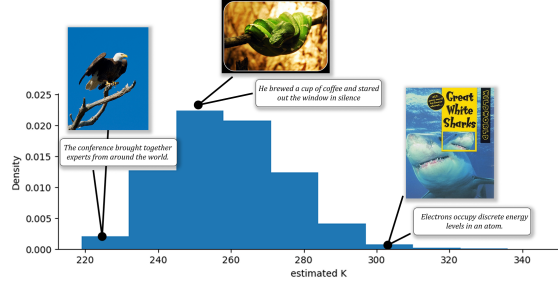


Figure 4: Estimated distribution of $\hat{k}$, with examples of corresponding texts and images illustrating various levels of complexity.

The final (optional) component of our objective is an auxiliary loss designed to prevent the emergence of “dead” neurons, *i.e.*, latent features that are rarely or never activated during training. This technique is standard in sparse autoencoder literature and was first introduced in [4]. We follow the conventional formulation:

$$\mathcal{L}_{aux} = \|(x - \hat{x}) - \hat{e}\|_2^2, \quad (13)$$

where $\hat{e}$ denotes a partial reconstruction formed exclusively from the top k_{aux} latent features that are currently underutilized. Intuitively, this objective encourages these inactive features to capture residual information not already explained by the primary reconstruction. By explicitly assigning them responsibility for modeling the remaining error, the auxiliary loss promotes more balanced utilization of the dictionary and reduces the risk of feature collapse. As a result, the model maintains a healthier and more expressive latent space, in which a larger fraction of neurons contribute meaningfully to the representation.

4 Experiments

We evaluate the SoftSAE model on two distinct modalities to assess both its generality and effectiveness: vision embeddings from CLIP [7] and language model activations from Gemma-2-2B [24]. For the vision setting, we extract image embeddings from a pretrained CLIP encoder (ViT-B/16) and train our model directly on these representations, following the setup of [7]. For the language setting, we operate on post-residual activations from layer 12 of Gemma-2-2B, following standard practices in mechanistic interpretability.

For CLIP SAEs, we use CC3M for training, and Imagenet-1k/Imagenet-100 [25] for evaluation. The dictionary size is set to $d = 4096$. All CLIP evaluations are conducted across five different target sparsity levels, $k \in \{60, 100, 140, 180, 220\}$.

Gemma-2-2B SAEs are trained on the FineWeb dataset [26], with the dictionary size set to $d = 2^{14} = 16384$. All Gemma-2-2B evaluations are performed across five different target sparsity levels, $k \in \{20, 40, 80, 160, 320\}$.

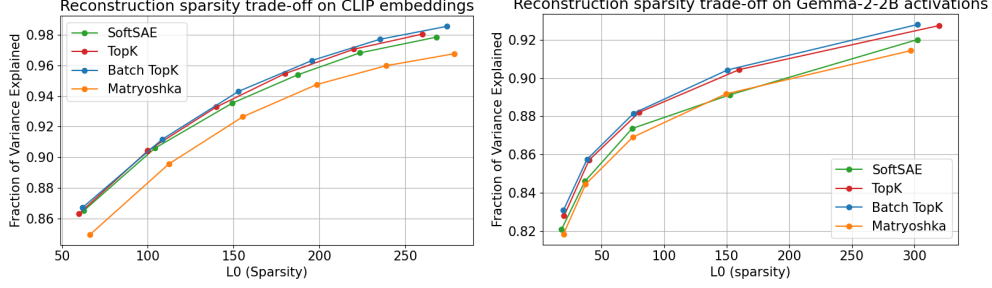


Figure 5: Reconstruction quality versus sparsity level for different model architectures evaluated on ImageNet CLIP embeddings (left) and Gemma-2-2B 12th layer activations (right). SoftSAE achieves tight sparsity control with competitive reconstruction fidelity.

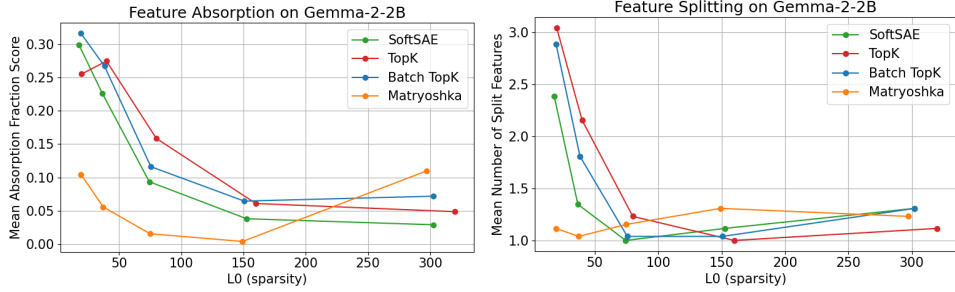


Figure 6: Absorption Rate and Number of Split Features vs. Sparsity. SoftSAE demonstrates its resistance to feature absorption and splitting anomalies.

Across all experiments, we compare SoftSAE against several well-established architectures: TopK SAE [4], BatchTopK SAE [5], and the recent Matryoshka SAE [7, 27]. Evaluation focuses on three axes: reconstruction fidelity, sparsity control, and usefulness of the learned features.

All training and experiments were conducted on a single Nvidia GH200 120GB GPU with 64GB RAM within a SLURM cluster. For CLIP, we trained for 40k steps, requiring approximately 2 hours for SoftSAE and 1.5 hours for the baselines. For Gemma-2-2B, we trained for approximately 150k steps, requiring around 6 hours for SoftSAE and 2.5 hours for the baselines. Hyperparameter settings were selected through an extensive Bayesian sweep and are reported in detail in Appendix E.

Reconstruction–Sparsity Trade-off A key objective of sparse autoencoders is to balance reconstruction fidelity with controllable sparsity, which we evaluate using the fraction of explained variance (Figure 5). On CLIP embeddings, SoftSAE matches the reconstruction–sparsity performance of TopK and BatchTopK, slightly outperforming BatchTopK at comparable error while remaining close to TopK, which retains a small edge. This proximity is important because TopK methods, while effective at optimizing the trade-off, often do so at the expense of feature quality; SoftSAE instead sacrifices only a negligible amount of reconstruction performance in exchange for improved feature quality, similar to Matryoshka representations. On Gemma-2-2B activations, SoftSAE performs comparably to Matryoshka, with a slight advantage in reconstruction at similar sparsity levels. Overall, SoftSAE remains competitive on the reconstruction–sparsity frontier while offering clear gains in feature structure and interpretability.

Feature Quality Evaluation (SAE Bench) Beyond reconstruction, we assess interpretability and utility using selected modules from SAE Bench [24], focusing on feature splitting, feature absorption, spurious correlation removal, and targeted probe perturbation. These diagnostics provide a finer-grained view of representation quality by directly probing the structure, robustness, and disentanglement of learned features.

Using SAE Bench absorption and splitting metrics (Figure 6), which measure whether semantic features are overly concentrated (absorption) or redundantly distributed (splitting), we observe that

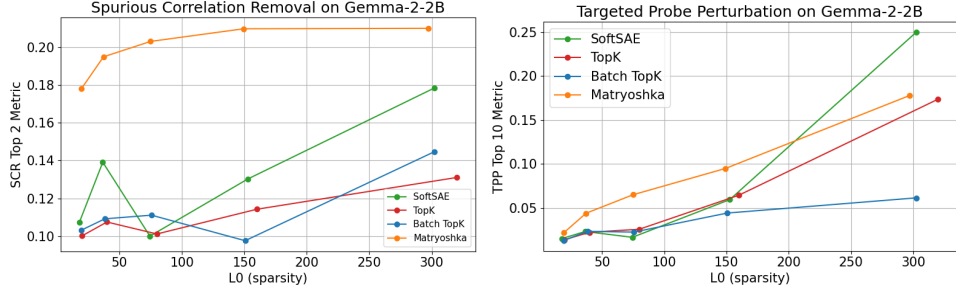


Figure 7: Spurious Correlation Removal and Targeted Probe Perturbation scores vs. Sparsity. SoftSAE proves effective at feature disentanglement, especially at higher L_0 values.

SoftSAE performs comparably to state-of-the-art Matryoshka SAEs while showing a clear advantage in reducing feature absorption at higher L_0 sparsity metric value. This indicates better preservation of general semantic features as representations become more specialized.

Sparse Probing and Targeted Concept Removal We further evaluate representation quality with Spurious Correlation Removal (SCR) and Targeted Probe Perturbation (TPP) (Figure 7), which assess semantic alignment, robustness to spurious features, and disentanglement. SoftSAE outperforms TopK and BatchTopK on SCR and remains competitive with Matryoshka, while matching and at higher sparsity level surpassing Matryoshka on TPP, indicating strong disentanglement and precise, localized control over learned features.

Qualitative Analysis of Dynamic Sparsity We visualize the behavior of the Dynamic Sparsity MLP in Figures 3 and 4, with additional examples and details provided in Appendix B. We observe that inputs with low complexity, such as images with a uniform background and a single entity, consistently receive low scores, as they require only a small number of features to represent their content. In contrast, inputs with high complexity, including scenes with multiple entities, rich backgrounds, or textual content, receive higher scores; for text in particular, the estimated complexity increases with the amount of context and knowledge required to fully capture the meaning.

5 Conclusions

In this work, we introduced SoftSAE, a sparse autoencoder architecture that replaces fixed-capacity constraints with a fully differentiable, input-adaptive sparsity mechanism. While maintaining competitive performance on the reconstruction–sparsity trade-off relative to strong baselines, SoftSAE consistently yields well structured and disentangled features, particularly at higher sparsity levels. Importantly, its primary contribution is not merely improved reconstruction or feature quality, but the ability to dynamically allocate representational capacity based on input complexity. This dynamic sparsity control is learned end-to-end and correlates closely with both visual and textual complexity, enabling the model to produce shorter, cleaner explanations for simple inputs and richer representations for complex ones. Despite current limitations, most notably increased computational cost and the need to carefully manage the soft-to-hard selection transition, our approach opens a new direction in which sparsity is no longer a fixed hyperparameter but a flexible, learnable component. Because the mechanism is fully differentiable, it can be seamlessly integrated into broader neural systems, including generative pipelines, where adaptive allocation of capacity may improve both efficiency and interpretability.

Limitations SoftSAE incurs higher computational cost than baseline methods, primarily due to the differentiable Soft Top-K operator, which becomes a bottleneck for large dictionaries (e.g., with $d = 2^{16}$) and may limit scalability.

References

- [1] Robert Huben, Hoagy Cunningham, Logan Riggs Smith, Aidan Ewart, and Lee Sharkey. Sparse autoencoders find highly interpretable features in language models. In *The Twelfth International Conference on Learning Representations*, 2023.
- [2] Qi Zhang, Yifei Wang, Jingyi Cui, Xiang Pan, Qi Lei, Stefanie Jegelka, and Yisen Wang. Beyond interpretability: The gains of feature monosemanticity on model robustness. *arXiv preprint arXiv:2410.21331*, 2024.
- [3] Trenton Bricken, Adly Templeton, Joshua Batson, Brian Chen, Adam Jermy, Tom Conerly, Nicholas L. Turner, Cem Anil, Carson Denison, Amanda Askell, Robert Lasenby, Yifan Wu, Shauna Kravec, Nicholas Schiefer, Tim Maxwell, Nicholas Joseph, Alex Tamkin, Karina Nguyen, Brayden McLean, Josiah E. Burke, Tristan Hume, Shan Carter, Tom Henighan, and Chris Olah. Towards monosemanticity: Decomposing language models with dictionary learning. <https://transformer-circuits.pub/2023/monosemantic-features/index.html>, October 2023. Transformer Circuits Thread.
- [4] Leo Gao, Tom Dupré la Tour, Henk Tillman, Gabriel Goh, Rajan Troll, Alec Radford, Ilya Sutskever, Jan Leike, and Jeffrey Wu. Scaling and evaluating sparse autoencoders. In *ICLR*, 2025.
- [5] Bart Bussmann, Patrick Leask, and Neel Nanda. Batchtopk sparse autoencoders. *arXiv preprint arXiv:2412.06410*, 2024.
- [6] Senthooan Rajamanoharan, Tom Lieberum, Nicolas Sonnerat, Arthur Conmy, Vikrant Varma, János Kramár, and Neel Nanda. Jumping ahead: Improving reconstruction fidelity with jumprelu sparse autoencoders. *arXiv preprint arXiv:2407.14435*, 2024.
- [7] Vladimir Zagrajew, Hubert Baniecki, and Przemysław Biecek. Interpreting CLIP with hierarchical sparse autoencoders. In *Forty-second International Conference on Machine Learning*, 2025.
- [8] Piotr Tempczyk, Rafał Michaluk, Łukasz Garncarek, Przemysław Spurek, Jacek Tabor, and Adam Golinski. Lidl: Local intrinsic dimension estimation using approximate likelihood. In *International Conference on Machine Learning*, pages 21205–21231. PMLR, 2022.
- [9] Łukasz Struski, Michał B Bednarczyk, Igor T Podolak, and Jacek Tabor. Lapsun-one method to differentiate them all: Ranking, sorting and top-k selection. In *International Conference on Machine Learning*, pages 56990–57007. PMLR, 2025.
- [10] Arthur Conmy, Augustine Mavor-Parker, Aengus Lynch, Stefan Heimersheim, and Adrià Garriga-Alonso. Towards automated circuit discovery for mechanistic interpretability. *Advances in Neural Information Processing Systems*, 36:16318–16352, 2023.
- [11] Leonard Bereska and Efstratios Gavves. Mechanistic interpretability for ai safety—a review. *arXiv preprint arXiv:2404.14082*, 2024.
- [12] Evan Hernandez, Sarah Schwettmann, David Bau, Teona Bagashvili, Antonio Torralba, and Jacob Andreas. Natural language descriptions of deep visual features. In *International Conference on Learning Representations*, 2021.
- [13] Adly Templeton. *Scaling monosemanticity: Extracting interpretable features from claude 3 sonnet*. Anthropic, 2024.
- [14] Viacheslav Surkov, Chris Wendler, Antonio Mari, Mikhail Terekhov, Justin Deschenaux, Robert West, Caglar Gulcehre, and David Bau. One-step is enough: Sparse autoencoders for text-to-image diffusion models. *arXiv preprint arXiv:2410.22366*, 2024.
- [15] Ahmed Abdulaal, Hugo Fry, Nina Montaña-Brown, Ayodeji Ijishakin, Jack Gao, Stephanie Hyland, Daniel C Alexander, and Daniel C Castro. An x-ray is worth 15 features: Sparse autoencoders for interpretable radiology report generation. *arXiv preprint arXiv:2410.03334*, 2024.

- [16] Usha Bhalla, Alex Oesterling, Suraj Srinivas, Flavio P Calmon, and Himabindu Lakkaraju. Interpreting clip with sparse linear concept embeddings (splice). *Advances in Neural Information Processing Systems*, 37:84298–84328, 2024.
- [17] Bartosz Cywiński and Kamil Deja. Saeuron: Interpretable concept unlearning in diffusion models with sparse autoencoders. *arXiv preprint arXiv:2501.18052*, 2025.
- [18] Been Kim, Martin Wattenberg, Justin Gilmer, Carrie Cai, James Wexler, Fernanda Viegas, et al. Interpretability beyond feature attribution: Quantitative testing with concept activation vectors (tcav). In *International conference on machine learning*, pages 2668–2677. PMLR, 2018.
- [19] Bolei Zhou, Yiyao Sun, David Bau, and Antonio Torralba. Interpretable basis decomposition for visual explanation. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 119–134, 2018.
- [20] Amirata Ghorbani, James Wexler, James Y Zou, and Been Kim. Towards automatic concept-based explanations. *Advances in neural information processing systems*, 32, 2019.
- [21] Kirill Bykov, Laura Kopf, Shinichi Nakajima, Marius Kloft, and Marina Höhne. Labeling neural representations with inverse recognition. *Advances in Neural Information Processing Systems*, 36:24804–24828, 2023.
- [22] Pang Wei Koh, Thao Nguyen, Yew Siang Tang, Stephen Mussmann, Emma Pierson, Been Kim, and Percy Liang. Concept bottleneck models. In *International conference on machine learning*, pages 5338–5348. PMLR, 2020.
- [23] Mateo Espinosa Zarlenga, Pietro Barbiero, Gabriele Ciravegna, Giuseppe Marra, Francesco Giannini, Michelangelo Diligenti, Zohreh Shams, Frederic Precioso, Stefano Melacci, Adrian Weller, et al. Concept embedding models: Beyond the accuracy-explainability trade-off. *Advances in neural information processing systems*, 35:21400–21413, 2022.
- [24] Adam Karvonen, Can Rager, Johnny Lin, Curt Tigges, Joseph Isaac Bloom, David Chanin, Yeu-Tong Lau, Eoin Farrell, Callum Stuart McDougall, Kola Ayonrinde, et al. Saebench: A comprehensive benchmark for sparse autoencoders in language model interpretability. In *International Conference on Machine Learning*, pages 29223–29264. PMLR, 2025.
- [25] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- [26] Guilherme Penedo, Hynek Kydlíček, Loubna Ben allal, Anton Lozhkov, Margaret Mitchell, Colin Raffel, Leandro Von Werra, and Thomas Wolf. The fineweb datasets: Decanting the web for the finest text data at scale. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024.
- [27] Bart Bussmann, Noa Nabeshima, Adam Karvonen, and Neel Nanda. Learning multi-level features with matryoshka sparse autoencoders. In *Forty-second International Conference on Machine Learning*, 2025.

A Impact Statement and Declaration of LLM Usage

Our work contributes to the safety and alignment of Large Language Models (LLMs) and Vision Transformers (ViTs) by providing more faithful and adaptive internal representations. While we acknowledge that interpretability tools could theoretically be used to exploit model vulnerabilities, we emphasize that SoftSAE primarily serves as a foundational tool for defensive safety research.

LLMs were utilized exclusively for the purposes of language editing and text refinement to improve the clarity of the manuscript.

B Qualitative Examples of Extreme Sparsity Regimes

To better illustrate the behavior of the Dynamic Sparsity mechanism, we present additional qualitative examples corresponding to extreme values of the estimated sparsity level $\hat{k}$ (see Figures 8 to 11). These examples highlight how the model adapts its representational capacity to the intrinsic complexity of the input.

At the low end of the spectrum, we observe inputs assigned very small $\hat{k}$ values. These are typically simple images containing a single, well-isolated object on a clean or uniform background. In such cases, only a few features are sufficient to reconstruct the representation, leading to short and highly focused explanations. Notably, many examples in this regime include images of birds, suggesting that the concept of a bird in CLIP embeddings is highly separable and can be captured with a small number of distinct features.

At the high end of the spectrum, inputs with large $\hat{k}$ values exhibit significantly greater complexity. These include scenes with multiple objects, cluttered backgrounds, or the presence of text. In particular, images containing text consistently receive higher scores, indicating that textual content introduces additional semantic dimensions that require more features to represent accurately. Similarly, multi-object compositions demand a richer set of features to disentangle overlapping concepts and interactions.

Overall, these examples reinforce a key property of our approach: the estimated sparsity level $\hat{k}$ aligns closely with intuitive notions of input complexity. Simple, single-object scenes yield compact representations, while visually or semantically dense inputs naturally expand the number of active features.



Figure 8: Examples of images from ImageNet100 with the highest estimated $\hat{k}$ values (target $K = 140$); most of them include text or at least multiple objects.



Figure 9: Additional examples of images from ImageNet100 with the highest estimated $\hat{k}$ values (target $K = 260$); most of them include text or at least multiple objects.

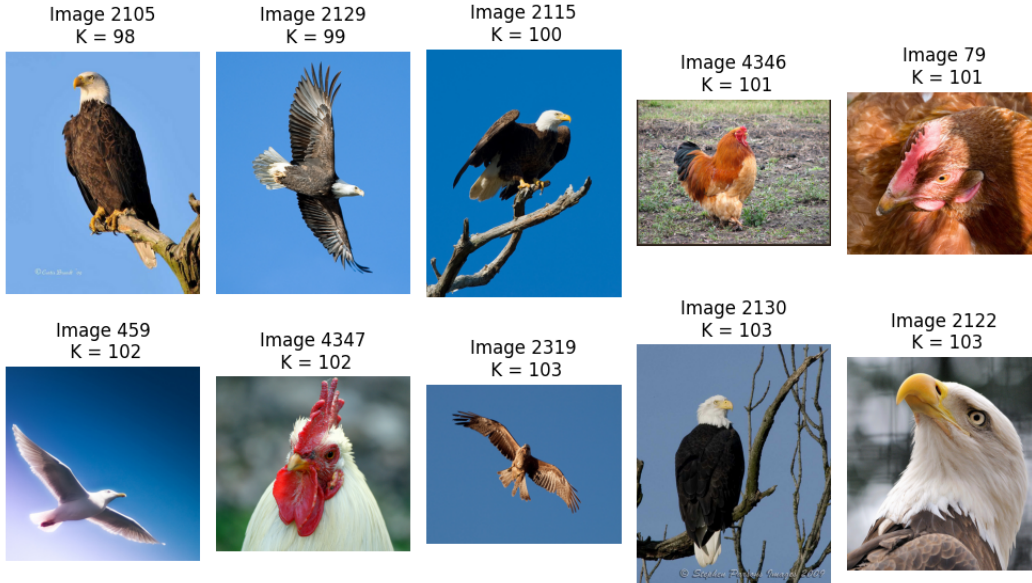


Figure 10: Examples of images from ImageNet100 with the lowest estimated $\hat{k}$ values (target $K = 140$); most of them contain a single entity and have no background or a plain background.

C Concept Masking

To gain deeper insight into how the Dynamic Sparsity MLP estimates input complexity, we conduct a controlled perturbation analysis on high-complexity images. Starting from samples that yield high predicted sparsity levels ($\hat{k}$), we systematically simplify their visual content by removing or degrading informative components. Results are shown in Figure 12.

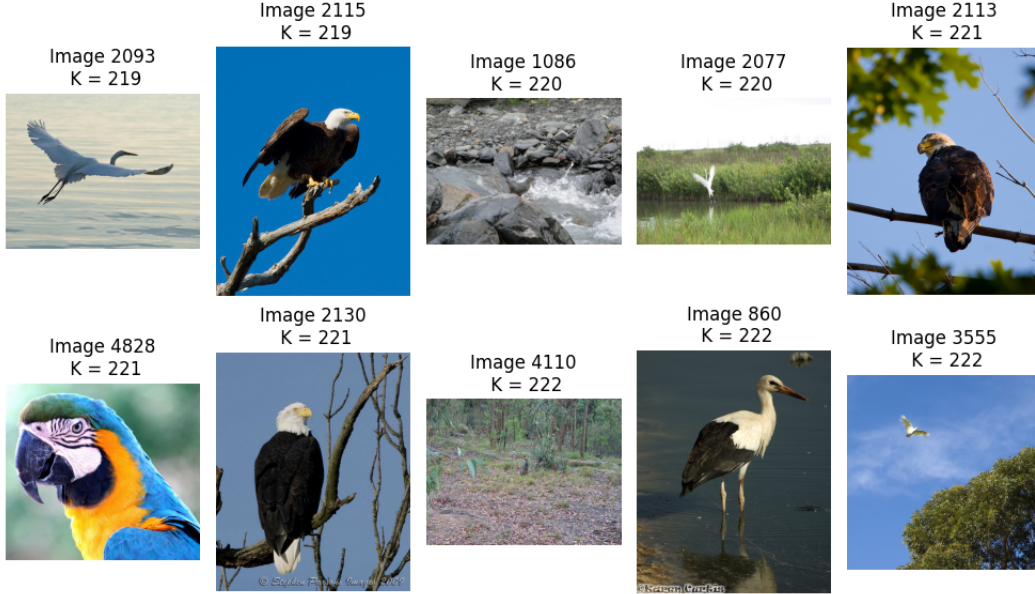


Figure 11: Additional examples of images from ImageNet100 with the lowest estimated $\hat{k}$ values (target $K = 260$); most of them contain a single entity and have no background or a plain background.

D Detailed Numerical Results

To complement the visual comparisons presented in the figures, we additionally report detailed numerical results in Tables 1 and 2. While plots provide an intuitive overview of trends and trade-offs, they can obscure precise quantitative differences between methods, particularly at specific sparsity levels. The tables, therefore, present exact values for reconstruction quality, sparsity metrics, and interpretability benchmarks across all evaluated configurations. This allows for a more fine-grained comparison between SoftSAE and baseline approaches, highlighting subtle performance gaps and confirming consistency of the observed trends.

E Hyperparameter Settings

We provide detailed hyperparameter configurations used across all experiments for reproducibility. Tables 3 and 4 include settings for both vision (CLIP) and language (Gemma) models, covering optimization, sparsity control, and architectural choices. While most parameters remain consistent across runs, key values such as target sparsity K , learning rates, and regularization strengths were tuned to ensure a fair comparison with baseline methods.

F Annealing Ablation

We further investigate the impact of annealing strategies through an ablation study on both the Soft Top-K temperature parameter α and the target sparsity K (Figure 13). Although the improvements are modest, they are consistent across settings, suggesting that annealing both the selection sharpness and the target sparsity provides a better alignment between the soft training dynamics and the hard Top-K behavior used at inference time.

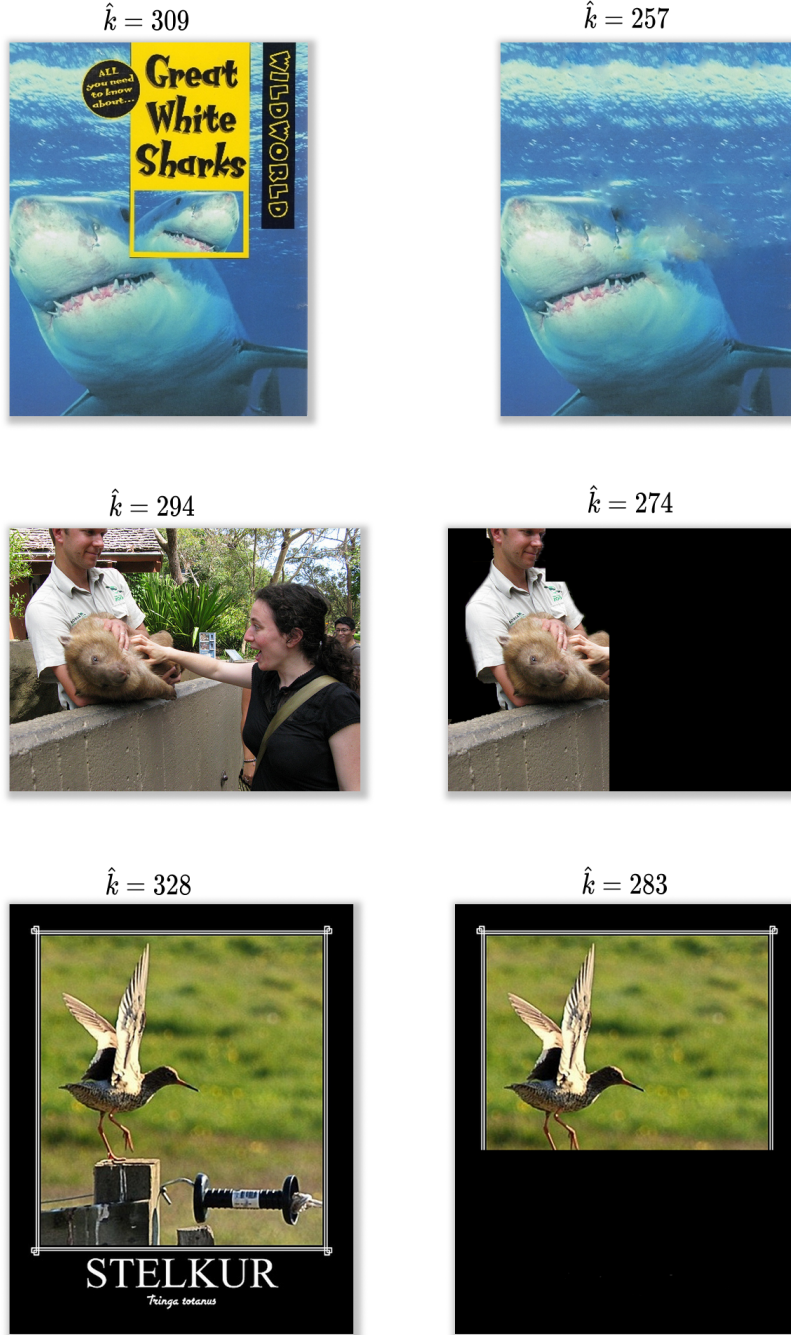


Figure 12: The presented results indicate that the Dynamic Sparsity MLP is sensitive not only to the presence of information, but also to the manner in which it is removed. Naive masking with solid black rectangles consistently reduces the predicted sparsity $\hat{k}$, confirming that the model reacts to a loss of visual content. However, this approach proves less effective than smoother, structure-preserving transformations. In particular, methods that remove or simplify content without introducing artificial high-contrast artifacts, such as background-aware inpainting, gradual blurring, or cropping that respects existing image boundaries, lead to a more pronounced decrease in $\hat{k}$. For example, when images contain natural dark borders, simply expanding these regions inward reduces the complexity score more reliably than inserting abrupt occlusions into high-frequency areas. This suggests that the model partially interprets sharp artificial edges as informative signals, whereas more naturalistic simplifications better align with its notion of reduced semantic complexity.

Table 1: Detailed numerical results from experiments on CLIP embeddings.

Architecture	k	L0	FVE
TopK	60	60.000	0.863
Batch TopK	60	61.906	0.867
Matryoshka	60	66.420	0.850
SoftSAE	60	62.562	0.865
TopK	100	100.000	0.904
BatchTopK	100	108.314	0.912
Matryoshka	100	112.275	0.896
SoftSAE	100	104.150	0.906
TopK	140	140.000	0.933
Batch TopK	140	152.770	0.943
Matryoshka	140	155.405	0.926
SoftSAE	140	149.300	0.935
TopK	180	180.000	0.955
Batch TopK	180	195.747	0.963
Matryoshka	180	198.477	0.947
SoftSAE	180	187.240	0.954
TopK	220	220.000	0.970
Batch TopK	220	235.186	0.977
Matryoshka	220	238.797	0.960
SoftSAE	220	223.459	0.968
TopK	260	260.000	0.980
Batch TopK	260	274.274	0.985
Matryoshka	260	278.693	0.968
SoftSAE	260	268.338	0.978

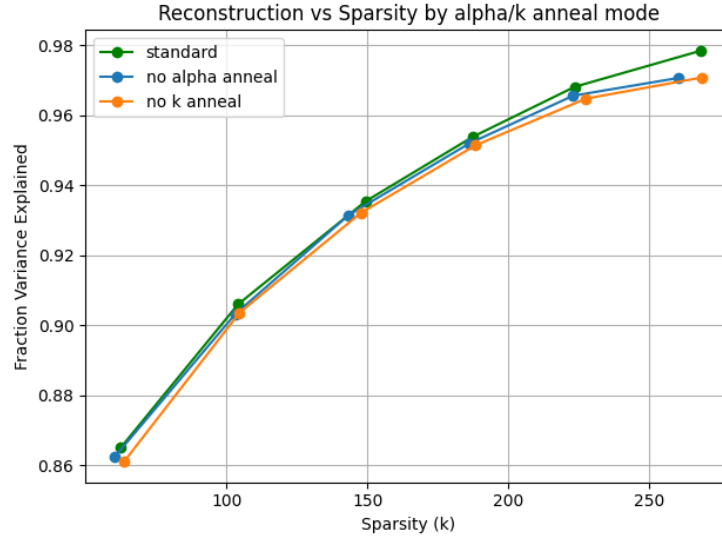


Figure 13: Ablation study within CLIP reconstruction experimental setup. Removing α/k annealing results in a minor drop in reconstruction quality.

Table 2: Detailed numerical results from experiments on Gemma-2-2B activations.

Architecture	k	L0	FVE	Absorp Frac	Splitting	SCR TOP 2	TPP TOP 10
Batch TopK	20	19.452	0.831	0.317	2.885	0.103	0.013
Matryoshka	20	19.531	0.818	0.105	1.115	0.178	0.022
TopK	20	20.000	0.828	0.255	3.038	0.100	0.014
SoftSAE	20	17.977	0.821	0.299	2.385	0.107	0.015
Batch TopK	40	38.326	0.857	0.267	1.808	0.109	0.023
Matryoshka	40	37.247	0.845	0.056	1.038	0.195	0.044
TopK	40	40.000	0.857	0.275	2.154	0.108	0.022
SoftSAE	40	36.668	0.846	0.226	1.346	0.139	0.023
Batch TopK	80	75.649	0.882	0.116	1.038	0.111	0.023
Matryoshka	80	74.956	0.869	0.015	1.154	0.203	0.065
TopK	80	80.000	0.882	0.159	1.231	0.101	0.026
SoftSAE	80	74.380	0.874	0.093	1.000	0.100	0.017
Batch TopK	160	150.634	0.904	0.064	1.038	0.098	0.044
Matryoshka	160	149.306	0.892	0.004	1.308	0.210	0.095
TopK	160	160.000	0.904	0.060	1.000	0.114	0.065
SoftSAE	160	152.657	0.891	0.038	1.115	0.130	0.060
Batch TopK	320	302.343	0.928	0.072	1.308	0.145	0.062
Matryoshka	320	297.323	0.914	0.110	1.231	0.210	0.178
TopK	320	320.000	0.927	0.048	1.115	0.131	0.174
SoftSAE	320	302.355	0.920	0.029	1.308	0.178	0.250

Table 3: Detailed hyperparameter settings in CLIP experiments.

Category	Setting
<i>Model / Architecture</i>	
Activation dimension	512
Dictionary size	4096
Model name	CLIP
<i>Optimization</i>	
Learning rate	6e-4
Total steps	40,000
Warmup steps	1,900
Decay start	6,500
<i>Top-K Parameters</i>	
$k_{\max}$	$2 \cdot k$
Auxiliary k	256
Hard top- k steps	6,000
<i>Loss & Regularization</i>	
k loss weight	1.0
k loss beta	5.0
Auxiliary α	0.1
Soft top- k α	1e-4
<i>Annealing</i>	
k anneal steps	1,600
α anneal steps	1,000
<i>Other</i>	
Dead feature threshold	400,000

Table 4: Detailed hyperparameter settings in Gemma-2-2B experiments.

Category	Setting
<i>Model / Architecture</i>	
Activation dimension	2304
Dictionary size	16384
Model name	Gemma-2-2B
<i>Optimization</i>	
Learning rate	3e-4
Total steps	146,484
Warmup steps	1,000
Decay start	117,187
<i>Top-K Parameters</i>	
$k_{\max}$	$2 \cdot k$
Auxiliary k	1152
Hard top- k steps	10,000
<i>Loss & Regularization</i>	
k loss weight	1.0
k loss beta	5.0
Auxiliary α	0.03125
Soft top- k α	1e-4
<i>Annealing</i>	
k anneal steps	1,464
α anneal steps	2,500
<i>Other</i>	
Dead feature threshold	10,000,000