

GaussianWAM: Distilling Geometry and Semantics from 3D Gaussian Fields into World-Action Models

Zijian Zhang^{2,3,1,*}, Yuqing Jiang^{2,3,1,*}, Weitao Zhou^{4,5,†}, Minglei Li⁵, Jinhao Zhang⁶, Yao Mu⁷, Xiaofan Li⁸, Hao Zhao⁹, Haibao Yu^{10,1,†}

¹TuoJing Intelligence, ²University of Chinese Academy of Sciences, ³Institute of Automation, Chinese Academy of Sciences, ⁴Tsinghua University, ⁵Simple AI, ⁶Harbin Institute of Technology (Shenzhen), ⁷Shanghai Jiao Tong University, ⁸Zhejiang University, ⁹Institute for AI Industry Research (AIR), Tsinghua University, ¹⁰The University of Hong Kong

*equal contribution, †corresponding author

World-Action Models (WAMs) jointly learn future visual prediction and action generation, using video dynamics as a representation-learning signal for robotic manipulation. However, their video latents are primarily optimized for visual prediction and are not explicitly encouraged to preserve cross-view geometric structure or spatially localized, object-relevant semantics. We propose **GaussianWAM**, a training-time representation-enhancement framework that organizes geometric and semantic supervision through a 3D Gaussian field. Given synchronized multi-view observations, frozen geometry and vision foundation models provide depth, camera parameters, and dense semantic features. GaussianWAM binds these heterogeneous signals to shared Gaussian primitives and renders spatially aligned semantic, depth, and coverage targets, which are distilled into the current-observation representations of the WAM. All teacher models, Gaussian components, and auxiliary prediction heads are removed after training, leaving the original WAM inference path without additional modules or forward computation. On LIBERO-Plus, GaussianWAM improves FastWAM from 52.05% to 71.29% and Cosmos Policy from 71.52% to 77.30%. Direct CLIP and VGGT distillation already establishes a strong FastWAM baseline of 69.37%, while Gaussian-field unification further improves it to 71.29%, supporting the benefit of spatially organizing heterogeneous teacher signals. GaussianWAM also improves performance on standard LIBERO and shows positive transfer trends on RoboTwin and real-world manipulation. These results suggest that training-time Gaussian distillation provides a practical way to inject geometry- and semantics-related supervision into WAM representations without changing their deployment architecture.

Code: <https://github.com/TuoJingAI/GaussianWAM>

Project Website: <https://tuojingai.github.io/GaussianWAM-project-page/>



1 Introduction

Recent World-Action Models (WAMs) and video-action models have introduced a new modeling paradigm for robotic control. Unlike conventional vision-language-action (VLA) models that primarily predict robot actions directly from current observations (Brohan et al., 2022; Kim et al., 2024), WAMs leverage the temporal dynamics and implicit physical priors learned by video generative models to jointly learn future visual dynamics and action generation (Ye et al., 2026b). As illustrated in Fig. 1, this paradigm moves beyond purely reactive action prediction and uses future scene evolution as an additional representation-learning signal. In this sense, future prediction serves not only as a visual generation objective, but also as temporal supervision for action generation.

Despite this progress, the video latent representations learned by existing WAMs are primarily optimized for visual reconstruction or prediction and are not explicitly constrained to preserve cross-view geometric structure. Most WAMs model the world primarily in RGB image space or two-dimensional video latent space. While such representations can effectively capture appearance changes, motion continuity, and implicit dynamics, visual coherence does not necessarily imply geometric reliability. Robotic manipulation fundamentally takes

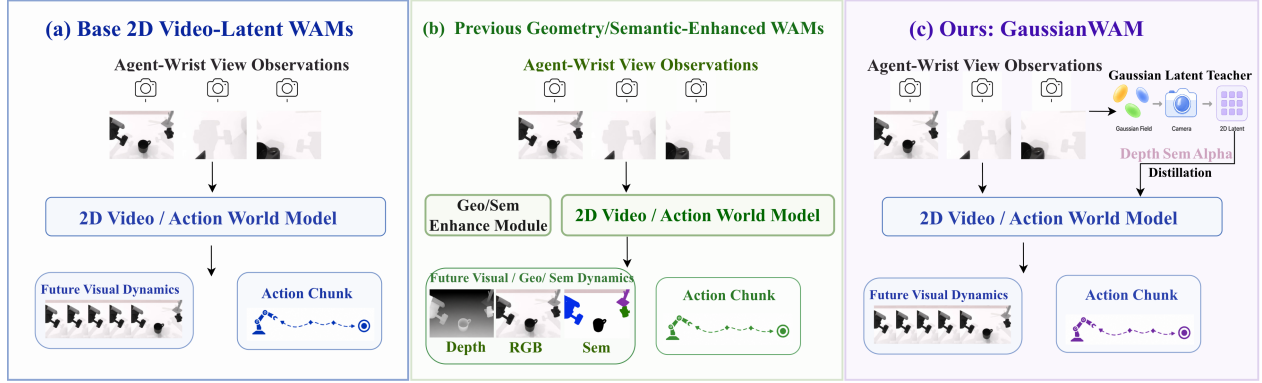


Figure 1 Comparison of WAM enhancement paradigms. (a) Conventional WAMs learn world-action representations primarily in 2D video or latent space. (b) Previous geometry- or semantics-aware WAMs introduce dedicated spatial enhancement modules or structured representations into the modeling pipeline. (c) GaussianWAM instead uses a training-time 3D Gaussian teacher to inject geometry-, semantics-, and coverage-aware supervision into the original WAM representations, without modifying the inference backbone.

place in three-dimensional space, where precise control requires a reliable understanding of scene geometry and spatial relationships among objects. Consequently, latent representations learned solely through RGB reconstruction or video prediction may remain geometrically under-constrained, limiting the capability of WAMs for precise spatial interaction and action generation (Li et al., 2026b; Zhang et al., 2026; Ma et al., 2026; Yan et al., 2026; Zhao et al., 2026; Yuan et al., 2026a; Yang et al., 2026).

Moreover, WAM video latents are not explicitly optimized to preserve spatially localized, object-relevant semantic information. Although language instructions can condition video generation and action prediction, such conditioning does not necessarily ensure that visual tokens consistently correspond to task-relevant objects and their spatial locations. In other words, task-level language conditioning does not necessarily translate into object-relevant semantic structure in the visual latent space. Visual foundation models such as CLIP (Radford et al., 2021), DINO (Oquab et al., 2023), and SAM (Kirillov et al., 2023) provide rich object- and region-level semantic priors, while geometric foundation models such as VGGT (Wang et al., 2025) provide depth and camera cues. Therefore, effective WAM representations for robotic manipulation should capture not only *where* objects are in 3D space, but also *what* the corresponding visual regions represent.

A seemingly straightforward solution is to distill geometric and semantic knowledge from multiple pretrained teachers into the WAM backbone, or to explicitly extend WAMs toward 3D/4D world modeling (Guo et al., 2026; Li et al., 2026b). However, both directions have important limitations. Independent geometric and semantic teachers typically produce heterogeneous features in different representation spaces, viewpoints, and confidence regimes. Applying separate feature losses therefore treats geometry and semantics as disconnected supervision signals, without a shared spatial carrier that consistently associates semantic information with the same physical 3D structures across views. On the other hand, explicit 3D/4D world models often require additional 3D encoders, decoders, rendering modules, geometric annotations, or future 3D rollouts, increasing both training complexity and inference cost. These limitations raise two key questions: *How can heterogeneous geometric and semantic knowledge be unified into a spatially coherent representation for WAMs? And can such structured supervision be introduced without sacrificing the inference efficiency of the original policy?*

To address these challenges, we propose **GaussianWAM**, a **Gaussian Field Enhancement framework for World-Action Models**. We use a 3D Gaussian field as a unified spatial carrier that organizes geometric and semantic supervision from different foundation models within the same set of Gaussian primitives. Specifically, multi-view geometric cues are lifted into 3D Gaussian primitives, while visual-semantic features are associated with the corresponding Gaussians, allowing each primitive to jointly carry geometry- and semantics-related attributes. In this way, heterogeneous supervision originally defined in different representation spaces can be spatially aligned within a unified reconstructed 3D coordinate system, rather than being independently distilled in separate 2D feature spaces (Kerbl et al., 2023; Kerr et al., 2023; Zhou et al., 2024; Qin et al., 2024). In addition, Gaussian rendering naturally produces a coverage signal, which we use to restrict supervision to

locations supported by valid geometry and non-negligible rendered Gaussian contributions.

Concretely, GaussianWAM constructs a Gaussian field from current multi-view observations and renders its geometric, semantic, and coverage signals back onto the token grid aligned with the WAM backbone. These dense signals are distilled into current-observation video latents through training-time Gaussian distillation, encouraging WAM representations to retain geometry-related and spatially aligned semantic information. In other words, the enhanced representations better capture both *where* objects are in 3D space and *what* the corresponding visual regions represent. Crucially, the Gaussian field and all external teachers are used only during training and are completely removed at inference time. GaussianWAM therefore introduces no additional 3D reconstruction, semantic encoding, Gaussian rendering, or rollout overhead during deployment, preserving the original inference pipeline and computational cost of the underlying WAM.

Our contributions are:

- We propose **GaussianWAM**, a general enhancement framework for WAMs that uses a Gaussian field as a unified 3D spatial carrier to organize complementary geometric and visual-semantic supervision for action-relevant latent representations.
- We introduce a Gaussian-field-based distillation mechanism that first binds geometric and visual-semantic knowledge within a unified 3D spatial representation, and then distills the rendered semantic, depth, and coverage signals into current-observation WAM representations.
- We adopt a **training-only enhancement** strategy that completely removes the Gaussian field and external teachers at inference, preserving the original WAM inference pipeline and computational cost. We extensively validate GaussianWAM on two representative WAM architectures, FastWAM and Cosmos Policy, and observe consistent improvements across **LIBERO**, **LIBERO-Plus**, **RoboTwin**, and **real-world robotic experiments**, demonstrating its effectiveness, robustness, and generalization ability.

2 Related Work

World-action models and video-action models. World-Action Models (WAMs) and video-action models augment robot policies with predictive world modeling, jointly learning future visual dynamics and action generation. Representative methods such as Fast-WAM (Yuan et al., 2026b), Cosmos Policy (Kim et al., 2026), LingBot (Li et al., 2026a), and GigaWorld-Policy (Ye et al., 2026a) demonstrate that future observation or latent dynamics modeling can provide effective representation-learning signals for robotic manipulation. Compared with purely reactive VLA policies, these approaches enable the policy to exploit temporal dynamics and implicit physical priors learned from video generation. However, their world representations are still predominantly modeled in RGB image space or 2D video latent space, leaving the resulting representations weakly grounded in explicit 3D structure and spatially aligned visual semantics. GaussianWAM retains the original WAM architecture and enhances its internal representations through structured training-time supervision without modifying the inference pipeline.

Geometry- and semantic-aware world-action learning. Recent studies have begun to incorporate structured geometric and semantic priors into WAMs to improve spatial understanding and action generation (Li et al., 2026b; Zhang et al., 2026; Ma et al., 2026; Yan et al., 2026; Yang et al., 2026; Guo et al., 2026). These methods explore complementary directions including explicit 3D/4D representations, geometric foresight, spatial features, and auxiliary geometry or semantic prediction. In particular, GeoSem-WAM (Ma et al., 2026) highlights the complementary role of geometry and semantics in learning structured world representations beyond RGB prediction. Despite these advances, geometric and semantic knowledge is typically introduced through task-specific representations, prediction branches, or separate supervision objectives, without an explicit shared spatial carrier that associates both types of information with the same physical 3D structures. GaussianWAM instead unifies geometric and visual-semantic knowledge within a common 3D Gaussian field and distills the resulting structured representation into action-relevant WAM latents.

3D Gaussian fields for representation enhancement. 3D Gaussian Splatting (3DGS) (Kerbl et al., 2023) provides an explicit and efficient 3D scene representation in which Gaussian primitives encode spatial

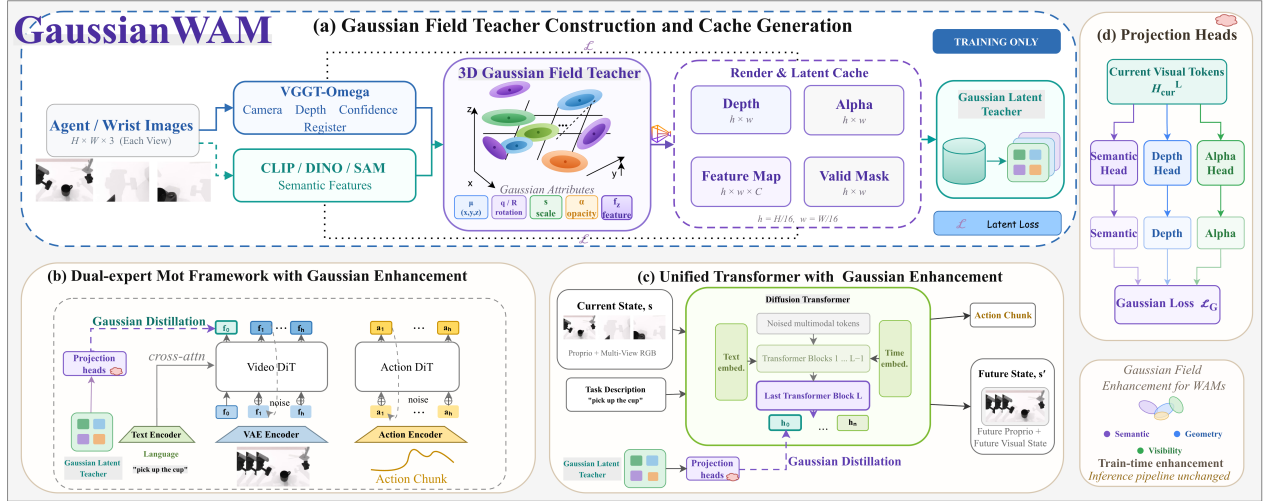


Figure 2 Overview of GaussianWAM. (a) A 3D Gaussian teacher is constructed from synchronized multi-view observations and rendered into semantic, depth, and alpha targets, together with a validity mask, which are cached for training. (b) In FastWAM-style dual-expert MoT models, Gaussian supervision is applied to current-observation video representations. (c) In Cosmos-Policy-style unified Transformers, the same supervision is applied to current-observation visual tokens in the shared backbone. (d) Lightweight semantic, depth, and alpha heads distill the cached Gaussian targets into WAM visual representations. All Gaussian-related modules are removed at inference, preserving the original WAM forward path and computational cost.

attributes such as position, scale, rotation, and opacity. Beyond appearance reconstruction, recent works have extended Gaussian primitives to carry high-dimensional features from pretrained foundation models. Feature 3DGS (Zhou et al., 2024) distills 2D foundation-model features into Gaussian primitives, while LangSplat (Qin et al., 2024) constructs language-aware Gaussian fields for open-vocabulary 3D understanding. Gaussian world models such as GWM (Lu et al., 2025) and ManiGaussian (Lu et al., 2024) further explore Gaussian representations for robotic manipulation and dynamic scene modeling. More recently, Feature4X (Zhou et al., 2025) demonstrates that heterogeneous features from visual and video foundation models can be lifted into a unified dynamic Gaussian representation. These works establish Gaussian primitives as a flexible spatial carrier that jointly preserves explicit geometry while accommodating rich semantic features. Building on this property, GaussianWAM uses a 3D Gaussian field to spatially bind geometric and visual-semantic knowledge and render dense supervision for WAM representation enhancement. Unlike prior Gaussian feature fields that primarily serve as scene representations for downstream 3D/4D perception and interaction, our Gaussian field is used only as a training-time knowledge carrier and is completely removed during policy inference.

3 Method

3.1 Overview

We propose **GaussianWAM**, a general training-time 3D Gaussian enhancement framework for World-Action Models. As shown in Fig. 2, GaussianWAM first constructs an offline 3D Gaussian teacher from current multi-view observations. The Gaussian field provides a unified spatial representation that combines 3D geometry, visual-semantic features, and rendering-derived coverage information. These signals are rendered onto spatial grids aligned with the visual representations of the WAM and distilled into action-relevant visual representations during policy training.

The Gaussian teacher is used only during training. At inference time, all foundation-model teachers, Gaussian construction and rendering modules, and auxiliary prediction heads are removed. The enhanced policy therefore follows exactly the same forward path as the original WAM. We instantiate GaussianWAM on both a FastWAM-style dual-expert MoT architecture (Yuan et al., 2026b) and a Cosmos-Policy-style unified DiT (Kim et al., 2026).

3.2 Gaussian Teacher Construction

For each training sample, we construct a dense 3D Gaussian teacher from synchronized multi-view observations $\{I^v\}_{v=1}^V$. The teacher takes only visual observations as input, while language instructions and proprioceptive states remain inputs to the policy.

Geometry extraction. We employ a frozen geometry foundation model, VGGT-Omega (Wang et al., 2025), to estimate dense depth, depth confidence, and camera parameters:

$$\{D^v, C^v, K^v, E^v\}_{v=1}^V = \text{VGGT}(\{I^v\}_{v=1}^V), \quad (1)$$

where D^v and C^v denote the depth and depth-confidence maps, while K^v and E^v denote the corresponding camera intrinsics and extrinsics.

The estimated depth and confidence maps are resized to a common 14×14 teacher grid for each view, with the camera intrinsics scaled accordingly. Invalid or low-confidence estimates are filtered to obtain a geometry-valid mask M_{geo}^v . The remaining valid pixels are then back-projected into 3D space using the corresponding depth and camera parameters.

Visual-semantic feature extraction. We additionally extract dense visual-semantic features using a frozen CLIP image encoder (Radford et al., 2021). Specifically, we use CLIP ViT-B/16 in all experiments. The patch tokens are reshaped into a spatial feature map and resized to the same teacher grid. The resulting CLIP features are projected to a 64-dimensional representation, yielding F_{sem}^v for each view. By placing geometric cues and visual-semantic features on the same spatial grid, we associate the two types of information at corresponding image locations before lifting them into the Gaussian field. We use CLIP in our implementation, while the same construction is compatible in principle with other dense visual foundation encoders, such as DINO (Oquab et al., 2023) or SAM (Kirillov et al., 2023).

Gaussian field initialization. Using the geometry-valid 3D points, we initialize a Gaussian field $\mathcal{G} = \{g_i\}_{i=1}^N$. We adopt dense initialization with spatial stride 1 on the teacher grid, such that every geometry-valid location initializes one Gaussian primitive:

$$g_i = \{\mathbf{x}_i, \mathbf{r}_i, \mathbf{s}_i, o_i, \mathbf{z}_i\}, \quad (2)$$

where $\mathbf{x}_i \in \mathbb{R}^3$ denotes the 3D center, $\mathbf{r}_i$ represents the Gaussian rotation, $\mathbf{s}_i \in \mathbb{R}^3$ denotes the spatial scale, o_i denotes opacity, and $\mathbf{z}_i \in \mathbb{R}^{64}$ stores the visual-semantic feature initialized from the corresponding location in F_{sem}^v . This construction binds explicit 3D geometry and visual-semantic information to the same Gaussian primitives within a common 3D coordinate system.

Multi-view Gaussian fitting. We render the Gaussian field into each observed camera view using a differentiable depth-aware Gaussian renderer $\mathcal{R}$:

$$(\hat{F}^v, \hat{D}^v, \hat{A}^v) = \mathcal{R}(\mathcal{G}; K^v, E^v), \quad (3)$$

where $\hat{F}^v$, $\hat{D}^v$, and $\hat{A}^v$ denote the rendered visual-semantic feature map, depth map, and accumulated Gaussian coverage map, respectively. Specifically, $\mathcal{R}$ transforms the Gaussian primitives into the target camera frame, projects them onto the teacher grid using K^v , and performs depth-aware, opacity-weighted soft splatting. The projected Gaussian contributions are aggregated to obtain the rendered feature and depth maps, while their accumulated weights define the coverage map $\hat{A}^v$.

We optimize the Gaussian field jointly across all observed views using

$$\mathcal{L}_{\text{fit}} = \lambda_s \mathcal{L}_{\text{sem}}^{\text{fit}} + \lambda_d \mathcal{L}_{\text{depth}}^{\text{fit}} + \lambda_c \mathcal{L}_{\text{cov}} + \mathcal{L}_{\text{reg}}, \quad (4)$$

where $\mathcal{L}_{\text{sem}}^{\text{fit}}$ aligns $\hat{F}^v$ with F_{sem}^v using cosine distance, and $\mathcal{L}_{\text{depth}}^{\text{fit}}$ aligns $\hat{D}^v$ with D^v using an ℓ_1 loss. The coverage objective $\mathcal{L}_{\text{cov}}$ encourages high Gaussian coverage at geometry-valid locations while suppressing spurious coverage outside valid regions. $\mathcal{L}_{\text{reg}}$ denotes lightweight regularization on the Gaussian parameters, including scale regularization and penalties on excessive center drift and, when optimized, deviation of semantic features from their initialization. The fitting stage optimizes the selected Gaussian parameters, including their centers, rotations, scales, and opacities, with semantic features optionally refined during fitting. Each per-sample Gaussian field is optimized for N_{fit} iterations, where we set $N_{\text{fit}} = 50$.

Offline teacher cache. After fitting, we render the optimized Gaussian field and store

$$\mathcal{T} = \{T_{\text{sem}}, T_{\text{depth}}, T_{\alpha}, T_{\text{valid}}\}. \quad (5)$$

Here, T_{sem} is the visual-semantic feature map rendered from the optimized Gaussian field, T_{depth} is the rendered depth, and T_{α} represents accumulated Gaussian coverage. We define the final valid mask as

$$T_{\text{valid}} = M_{\text{geo}} \cap M_{\text{render}}, \quad M_{\text{render}} = \mathbb{I}[T_{\alpha} > \tau_{\alpha}], \quad (6)$$

where we set $\tau_{\alpha} = 10^{-4}$ in all experiments. This small threshold filters locations with negligible accumulated Gaussian coverage, such that downstream supervision is applied only at locations supported by both reliable geometry and valid Gaussian rendering.

For WAMs that jointly process multiple camera views, the per-view rendered targets are further resized and composed according to the same multi-view spatial layout used by the policy representation. The resulting semantic, depth, alpha, and validity maps are cached offline and directly reused during policy training, avoiding repeated foundation-model inference and Gaussian fitting.

3.3 Gaussian Distillation

GaussianWAM distills the cached Gaussian representation into the internal visual representation of a WAM. Let H_{cur}^L denote the final-layer hidden tokens corresponding to the current visual observations. Their exact source depends on the underlying WAM architecture and is described in Secs. 3.4 and 3.5.

We attach three lightweight auxiliary prediction heads, collectively denoted as

$$\Phi_G = \{\phi_{\text{sem}}, \phi_{\text{depth}}, \phi_{\alpha}\}, \quad (7)$$

to predict the cached Gaussian targets:

$$\begin{aligned} \hat{T}_{\text{sem}} &= \phi_{\text{sem}}(H_{\text{cur}}^L), \\ \hat{T}_{\text{depth}} &= \phi_{\text{depth}}(H_{\text{cur}}^L), \\ \hat{T}_{\alpha} &= \sigma(\phi_{\alpha}(H_{\text{cur}}^L)), \end{aligned} \quad (8)$$

The Gaussian distillation objective is

$$\mathcal{L}_G = \lambda_{\text{sem}}\mathcal{L}_{\text{sem}} + \lambda_{\text{depth}}\mathcal{L}_{\text{depth}} + \lambda_{\alpha}\mathcal{L}_{\alpha}, \quad (9)$$

where all losses are evaluated only over T_{valid} . Let $\Omega_{\text{valid}} = \{p \mid T_{\text{valid}}(p) = 1\}$ denote the valid locations on the WAM-aligned token grid. We use masked cosine distance for visual-semantic alignment:

$$\mathcal{L}_{\text{sem}} = \frac{1}{|\Omega_{\text{valid}}|} \sum_{p \in \Omega_{\text{valid}}} \left(1 - \frac{\hat{T}_{\text{sem}}(p)^{\top} T_{\text{sem}}(p)}{\|\hat{T}_{\text{sem}}(p)\|_2 \|T_{\text{sem}}(p)\|_2 + \epsilon} \right), \quad (10)$$

where ϵ is a small constant for numerical stability. and masked ℓ_1 losses for depth and Gaussian coverage:

$$\mathcal{L}_{\text{depth}} = \frac{1}{|\Omega_{\text{valid}}|} \sum_{p \in \Omega_{\text{valid}}} \left| \hat{T}_{\text{depth}}(p) - T_{\text{depth}}(p) \right|, \quad (11)$$

$$\mathcal{L}_{\alpha} = \frac{1}{|\Omega_{\text{valid}}|} \sum_{p \in \Omega_{\text{valid}}} \left| \hat{T}_{\alpha}(p) - T_{\alpha}(p) \right|. \quad (12)$$

The overall training objective is

$$\mathcal{L}_{\text{train}} = \mathcal{L}_{\text{WAM}} + \lambda_G \mathcal{L}_G, \quad (13)$$

where $\mathcal{L}_{\text{WAM}}$ denotes the original training objective of the underlying WAM.

The Gaussian teacher and auxiliary prediction heads are used only during training. At inference time, they are completely removed, leaving the original WAM forward path and inference cost unchanged.

Table 1 Main results on LIBERO and LIBERO-Plus. We report success rate (%). All models are trained on LIBERO and evaluated on both LIBERO and LIBERO-Plus, where LIBERO-Plus serves as a zero-shot evaluation under distribution shifts. Emb. PT. indicates large-scale embodied pretraining. Our FastWAM baseline and its GaussianWAM variant are trained for 70k optimization steps, while the Cosmos Policy baseline and its GaussianWAM variant are trained for 5k iterations.

Method	Type	Emb. PT.	LIBERO	Camera	Robot	Lang.	Light	BG	Noise	Layout	Overall
<i>Vision-Language-Action Models</i>											
UniVLA (Bu et al., 2025)	VLA	Yes	95.20	1.80	46.20	69.60	69.00	90.70	21.20	31.90	43.90
π_0 (Black et al., 2024)	VLA	Yes	94.20	13.80	6.00	58.80	85.00	90.70	79.00	68.90	54.60
π_0 -FAST (Pertsch et al., 2025)	VLA	Yes	85.50	65.10	21.60	61.00	73.20	97.70	74.40	68.80	64.20
OpenVLA-OFT (Kim et al., 2025)	VLA	Yes	97.10	56.40	31.90	79.50	88.70	97.30	75.80	74.20	70.00
X-VLA (Zheng et al., 2025)	VLA	Yes	98.10	23.40	89.70	75.70	88.20	96.00	62.70	71.80	70.46
Spatial Forcing (Li et al., 2025)	VLA	Yes	98.50	20.10	13.40	40.90	29.10	33.40	25.70	39.30	28.52
<i>Geometry-, Semantic-, and Structured World-Action Models</i>											
GeoSem-WAM (Ma et al., 2026)	WAM	No	98.55	—	—	—	—	—	—	—	—
SG-WAM (Zhao et al., 2026)	WAM	No	98.50	58.60	48.90	81.40	89.80	86.10	80.70	74.20	73.00
DreamWAM (Yuan et al., 2026a)	WAM	No	98.90	53.78	63.61	94.80	96.67	71.56	67.15	80.72	74.61
ST-WAM (Wang et al., 2026)	WAM	No	98.70	55.40	60.10	79.30	93.00	74.20	79.50	74.30	72.80
4D-WAM (Yang et al., 2026)	WAM	No	98.60	45.15	64.26	90.63	94.29	57.71	69.08	79.21	71.01
<i>GaussianWAM on FastWAM</i>											
FastWAM (Yuan et al., 2026b)	WAM	No	96.60	25.63	42.88	73.88	61.70	54.88	43.55	66.80	52.05
FastWAM + GaussianWAM	WAM	No	97.60 (+1.00)	54.66 (+29.03)	61.61 (+18.73)	75.41 (+1.53)	90.81 (+29.11)	58.18 (+3.30)	83.01 (+39.46)	76.72 (+9.92)	71.29 (+19.24)
<i>GaussianWAM on Cosmos Policy</i>											
Cosmos Policy (Kim et al., 2026)	WAM	No	98.50	69.67	42.39	86.26	90.89	77.51	75.58	65.23	71.52
Cosmos Policy + GaussianWAM	WAM	No	98.60 (+0.10)	79.11 (+9.44)	56.52 (+14.13)	92.18 (+5.92)	89.84 (-1.05)	66.17 (-11.34)	86.26 (+10.68)	70.55 (+5.32)	77.30 (+5.78)

3.4 FastWAM-Style Dual-Expert MoT

FastWAM-style models (Yuan et al., 2026b) employ separate video and action experts coupled through a Mixture-of-Transformers (MoT) architecture. The video expert maintains the visual world representation, which is accessed by the action expert through MoT interaction. We therefore apply Gaussian distillation to the final-layer video representation.

Let H_{vid}^L denote the final-layer video hidden states. We select the spatial tokens corresponding to the current visual observations:

$$H_{\text{cur}}^L = \text{Select}_{\text{cur}}(H_{\text{vid}}^L), \quad (14)$$

restore their spatial organization according to the visual token grid, and apply the Gaussian distillation objective defined in Sec. 3.3.

Through the MoT interaction, the geometry- and semantic-enhanced video representation is directly available to the action expert. Gaussian supervision can therefore influence action learning without introducing an additional action pathway or modifying the original FastWAM inference procedure.

3.5 Cosmos-Policy-Style Unified DiT

Cosmos-Policy-style models (Kim et al., 2026) instead process visual observations, world-related variables, and action-related tokens within a unified diffusion Transformer. Since there is no separate video expert, Gaussian distillation is applied directly to the final-layer hidden tokens corresponding to the current visual observations.

Let H^L denote the final Transformer hidden states. We extract the current-observation tokens as

$$H_{\text{cur}}^L = \text{Select}_{\text{cur}}(H^L), \quad (15)$$

restore their spatial organization, and apply the same Gaussian distillation mechanism from Sec. 3.3.

Because these visual tokens belong to the shared Transformer backbone, Gaussian supervision directly shapes the latent representation shared by world and action modeling. As with FastWAM, all Gaussian-related modules are removed after training, preserving the original Cosmos Policy inference path.

4 Experiments

4.1 Experimental Setup

Benchmarks. We evaluate GaussianWAM on LIBERO (Liu et al., 2024), LIBERO-Plus (Fei et al., 2025), RoboTwin, and real-world robotic manipulation tasks. LIBERO evaluates standard language-conditioned

manipulation, while LIBERO-Plus introduces diverse distribution shifts in camera viewpoint, robot appearance, language instruction, illumination, background, visual noise, and scene layout. RoboTwin is a bimanual manipulation benchmark evaluated under both *Clean* and *Random* settings, where the latter introduces stronger scene and visual randomization to test robustness under distribution shifts. Our real-world experiments further evaluate whether the learned representation improvements transfer beyond simulation. We report task success rate (%) as the main evaluation metric.

Backbones and training. We instantiate GaussianWAM on two representative WAM architectures: FastWAM (Yuan et al., 2026b), based on a dual-expert Mixture-of-Transformers (MoT) architecture, and Cosmos Policy (Kim et al., 2026), based on a unified diffusion Transformer. For both architectures, Gaussian distillation is applied to the final-layer visual representation corresponding to the current observations.

For FastWAM, we train both the baseline and its GaussianWAM variant for 70k optimization steps on 8 NVIDIA A100 GPUs, with a per-GPU batch size of 2 and gradient accumulation over 2 steps, resulting in an effective batch size of 32. We use a learning rate of 1×10^{-4} with cosine decay and a weight decay of 1×10^{-2} . The Gaussian distillation losses are weighted by $\lambda_{\text{sem}} = 0.01$, $\lambda_{\text{depth}} = 0.01$, and $\lambda_{\alpha} = 0.005$.

For Cosmos Policy, we use 8 GPUs with a local batch size of 30 and gradient accumulation over 8 steps, resulting in an effective batch size of 1920, following its LIBERO training configuration. Both the baseline and its GaussianWAM variant are trained for 5k iterations. For each backbone, the baseline and GaussianWAM variant use the same training data, backbone configuration, and optimization budget, with Gaussian distillation introduced only during training.

4.2 Main Results

LIBERO and LIBERO-Plus. Table 1 reports the main results on LIBERO and LIBERO-Plus. GaussianWAM consistently improves the underlying WAM backbones. For FastWAM, standard LIBERO success increases from 96.6% to 97.6%, while the official LIBERO-Plus overall score improves substantially from 52.05% to 71.29%. Particularly large gains are observed under camera (+29.03), lighting (+29.11), noise (+39.46), and robot (+18.73) shifts, suggesting that structured Gaussian supervision provides substantially stronger spatial grounding under challenging visual variations.

The improvement is also consistent on a distinct WAM architecture. Under the same 5k-iteration training budget, GaussianWAM improves Cosmos Policy from 71.52% to 77.30% overall. Notable gains are obtained for camera, robot, language, noise, and layout shifts. These results indicate that the proposed enhancement is not specific to the dual-expert FastWAM architecture, but can also benefit a unified world-action Transformer.

Table 2 Results on the 15-task RoboTwin 2.0 Clean-to-Random benchmark. Clean and Random denote the clean and randomized evaluation settings, respectively. We report average success rate (%).

Method	Clean	Random
DP	34.07	0.33
ACT	34.20	4.00
DP3	59.87	3.80
FastWAM	70.50	0.70
FastWAM + GaussianWAM	70.50	1.60
Cosmos Policy	34.40	7.10
Cosmos Policy + GaussianWAM	68.90	14.40

stronger robustness under randomized evaluation conditions.

RoboTwin and real-world evaluation. We further evaluate GaussianWAM on RoboTwin and real-world robotic manipulation tasks. These experiments complement LIBERO by introducing different scene distributions, object configurations, and embodiment conditions. As shown in Table 2, GaussianWAM matches or improves the corresponding base WAM on RoboTwin, with particularly clear gains under the Random setting. For FastWAM, GaussianWAM preserves the Clean performance at 70.50% while improving Random success from 0.70% to 1.60%. For Cosmos Policy, GaussianWAM improves Clean success from 34.40% to 68.90% and Random success from 7.10% to 14.40%. These results demonstrate that the learned representation enhancement transfers beyond the LIBERO environment and provides

Task 1: Pick up the vase and touch the edge of the red plate. Task 2: Place the white cup in the center, then put the purple cylinder into it.

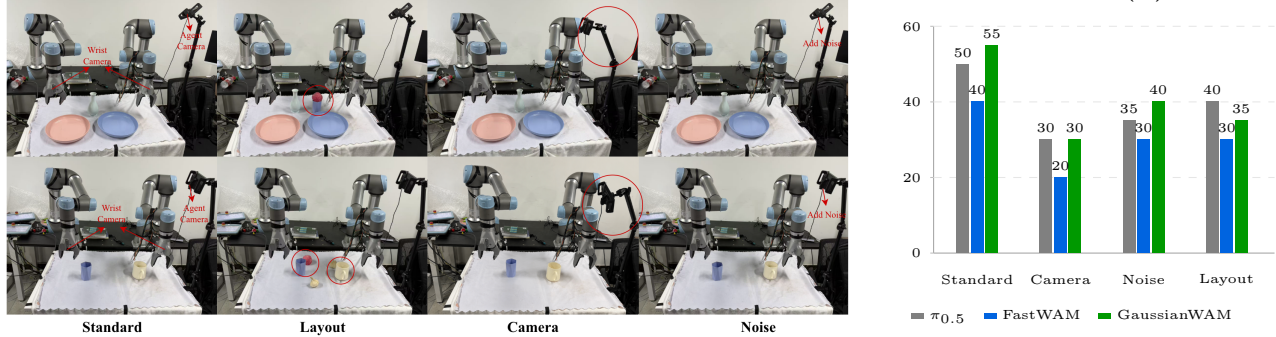


Figure 3 Real-world evaluation and success rates. The left panel shows two bimanual tasks under standard, layout, camera, and visual-noise variations. The right panel shows success rates for $\pi_{0.5}$, FastWAM, and GaussianWAM under the four settings. Each task uses 100 demonstrations and 20 evaluation trials per setting.

Real-world manipulation. We further evaluate GaussianWAM on a bimanual real-robot platform consisting of two UR7e robotic arms. We consider two manipulation tasks: lifting a vase to contact the edge of a red plate, and placing a white cup at the designated center before inserting a purple cylinder into it. For each task, we collect 100 demonstrations and evaluate each method over 20 independent trials under every evaluation setting. A trial is considered successful only when all task-specific objectives are completed.

Figure 3 shows the evaluation setup under four conditions: standard, layout, camera, and visual-noise variations. GaussianWAM improves the average success rate of FastWAM from 30.00% to 40.00%. These results demonstrate that the representation enhancement learned through training-time Gaussian distillation remains effective under real-world distribution shifts, while preserving the original WAM inference pipeline at deployment.

4.3 Ablation Studies

Effect of Gaussian-field unification. We first compare GaussianWAM with a direct 2D distillation baseline, where CLIP semantic features and VGGT depth are independently distilled into the WAM representation without constructing a Gaussian field. Direct CLIP + VGGT distillation already provides a strong improvement over FastWAM, increasing the official LIBERO-Plus overall success rate from 52.05% to 69.37%. Notably, GaussianWAM without alpha supervision further reaches 70.99%, outperforming direct CLIP + VGGT distillation by 1.62 points. This result supports the benefit of organizing heterogeneous teacher signals through a shared 3D Gaussian representation, beyond direct multi-teacher supervision. Adding rendering-derived alpha supervision further improves the full model to 71.29%, providing an additional signal of reliable 3D spatial support.

Effect of Gaussian supervision components. We next study the contribution of semantic, depth, and alpha supervision on LIBERO-Plus. As shown in Table 3, removing any individual component degrades the overall performance. Removing semantic or alpha supervision reduces the official overall success rate from 71.29% to 68.06% and 70.99%, respectively, highlighting the importance of both visual-semantic grounding and rendering-derived 3D spatial support. Removing depth supervision results in the largest performance drop, reducing the overall success rate to 66.28%, demonstrating the importance of explicit geometric information for robust manipulation. Together, these results show that geometry, visual semantics, and Gaussian coverage provide complementary supervision for GaussianWAM.

Effect of supervision depth. We further investigate where Gaussian distillation should be applied within the WAM backbone. As shown in Table 4, applying Gaussian distillation to the final Transformer layer (layer 30) achieves the best official overall performance of 71.29%, compared with 67.86% and 68.44% at layers 10 and 20, respectively. Although intermediate layers perform favorably under several individual distribution shifts,

Table 3 Ablation of Gaussian-field unification and supervision components on LIBERO-Plus with FastWAM. Overall is computed over the official 10,030 evaluation tasks.

Variant	Camera	Robot	Lang.	Light	BG	Noise	Layout	Overall
FastWAM	25.63	42.88	73.88	61.70	54.88	43.55	66.80	52.05
Direct CLIP + VGGT	48.41	63.74	69.75	88.53	61.71	82.14	74.36	69.37
Full	54.66	61.61	75.41	90.81	58.18	83.01	76.72	71.29
w/o Semantic	49.30	62.80	73.30	84.80	55.40	77.20	74.60	68.06
w/o Depth	50.78	58.84	68.58	83.54	52.23	78.33	72.13	66.28
w/o Alpha	58.85	63.74	72.61	87.74	59.29	79.51	76.20	70.99

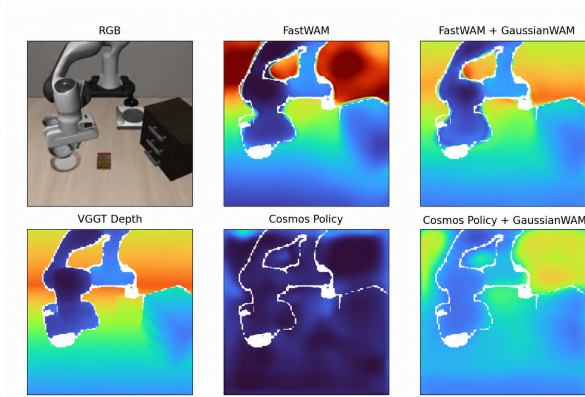


Figure 4 Frozen-backbone depth probing of WAM visual representations. The same lightweight depth probe is applied to the base and GaussianWAM models using VGGT-Omega pseudo-depth as supervision.

Table 4 Ablation of supervision depth on LIBERO-Plus with FastWAM + GaussianWAM. Layer 30 corresponds to the final Transformer layer. Overall is computed over the official 10,030 evaluation tasks.

Layer	Camera	Robot	Lang.	Light	BG	Noise	Layout	Overall
10	52.28	64.97	62.65	88.79	61.52	78.08	70.49	67.86
20	51.91	62.77	69.81	86.95	64.50	75.20	72.00	68.44
30	54.66	61.61	75.41	90.81	58.18	83.01	76.72	71.29

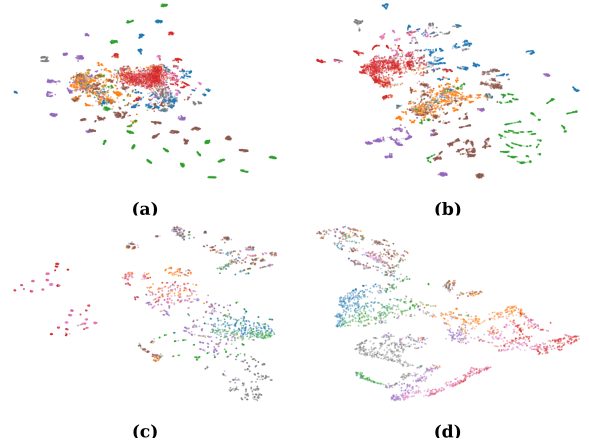


Figure 5 t-SNE visualization of final-layer visual-semantic representations. Panels (a) and (c) show the base FastWAM and Cosmos Policy representations, while panels (b) and (d) show their GaussianWAM-enhanced counterparts.

final-layer supervision provides the strongest overall performance. We therefore apply Gaussian distillation to the final-layer visual representation in our main configuration.

4.4 Qualitative Analysis

We further analyze the geometric and visual-semantic representations learned with GaussianWAM.

Geometric representation probing. We freeze the trained WAM backbones and train the same lightweight depth probe on their final-layer visual representations, using VGGT-Omega depth estimates as pseudo-depth supervision. As shown in Figure 4, GaussianWAM-enhanced representations recover clearer scene structure and more coherent depth responses than their corresponding base models, indicating stronger geometric grounding.

Visual-semantic representation visualization. We further visualize the learned visual-semantic representations using t-SNE. For each sample, the final-layer visual features are aggregated into a feature vector and projected into two dimensions using the same t-SNE configuration for the base and GaussianWAM models. As shown in Figure 5, the GaussianWAM-enhanced representations exhibit more compact local clusters and clearer separation among semantic groups, suggesting improved visual-semantic organization in the learned latent space.

5 Conclusion

We presented **GaussianWAM**, a training-time Gaussian-field enhancement framework for World-Action Models. Rather than converting WAMs into explicit 3D or 4D world models, GaussianWAM uses a 3D Gaussian field as a unified spatial teacher that binds geometric and visual-semantic knowledge within the same 3D representation. The rendered semantic, depth, and alpha signals are distilled into action-relevant WAM representations, while a validity mask restricts supervision to reliable spatial regions. All Gaussian-related teacher and prediction modules are removed at inference, preserving the original WAM deployment pipeline and computational cost.

Experiments on LIBERO, LIBERO-Plus, RoboTwin, and real-world robotic manipulation demonstrate the effectiveness of GaussianWAM across two distinct WAM architectures, FastWAM and Cosmos Policy. The improvements are particularly pronounced under challenging distribution shifts, indicating stronger geometric and visual-semantic grounding of the learned representations. Ablation studies further demonstrate the complementary contributions of semantic, depth, and alpha supervision, as well as the importance of the supervised representation depth. Overall, our results show that training-time Gaussian distillation provides a practical and inference-efficient approach to strengthening the geometric and visual-semantic grounding of World-Action Models.

References

- Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control. *CoRR*, abs/2410.24164, 2024. URL <https://arxiv.org/abs/2410.24164>.
- Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, et al. RT-1: Robotics transformer for real-world control at scale. *CoRR*, abs/2212.06817, 2022. URL <https://arxiv.org/abs/2212.06817>.
- Dongbo Bu, Jiaqi Chen, Yucheng Zhou, Jian Yang, Shaoli Huang, and Hongsheng Li. UniVLA: Learning to act anywhere with task-centric latent actions. *CoRR*, abs/2505.06111, 2025.
- S. Fei, S. Wang, J. Shi, Z. Dai, J. Cai, P. Qian, L. Ji, X. He, S. Zhang, Z. Fei, J. Fu, J. Gong, and X. Qiu. LIBERO-Plus: A robust evaluation benchmark for robot policies under distribution shifts. *CoRR*, abs/2510.13626, 2025.
- J. Guo, Q. Li, P. Li, Z. Chen, N. Sun, Y. Su, H. Wang, Y. Zhang, X. Li, and H. Liu. Unified 4d world action modeling from video priors with asynchronous denoising. *CoRR*, abs/2604.26694, 2026.
- Bernhard Kerbl, Georgios Kopanas, Thomas Leimkuehler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics*, 42(4), 2023.
- Justin Kerr, Chung Min Kim, Ken Goldberg, Angjoo Kanazawa, and Matthew Tancik. LERF: Language embedded radiance fields. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. OpenVLA: An open-source vision-language-action model. *CoRR*, abs/2406.09246, 2024. URL <https://arxiv.org/abs/2406.09246>.
- Moo Jin Kim, Chelsea Finn, and Percy Liang. OpenVLA-OFT: A strong vision-language-action baseline fine-tuned on open-source data. *CoRR*, abs/2505.22285, 2025.
- Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, and Jinwei Gu. Cosmos Policy: Fine-tuning video models for visuomotor control and planning. *CoRR*, abs/2601.16163, 2026.
- Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- Fuhao Li, Wenxuan Song, Han Zhao, Jingbo Wang, Pengxiang Ding, Donglin Wang, Long Zeng, and Haoang Li. Spatial forcing: Implicit spatial representation alignment for vision-language-action model. *CoRR*, abs/2510.12276, 2025. URL <https://arxiv.org/abs/2510.12276>.
- Lin Li, Qihang Zhang, Yiming Luo, Shuai Yang, Ruilin Wang, Fei Han, Mingrui Yu, Zelin Gao, Nan Xue, Xing Zhu, Yujun Shen, and Yinghao Xu. Causal world modeling for robot control. *CoRR*, abs/2601.21998, 2026a.
- Y. Li, X. Wei, J. Cao, H. Wang, X. Chi, C. Bai, Q. Sun, J. Li, X. Zhang, J. Tang, S. Han, and S. Zhang. WAM4D: Fast 4d world action model via spatial register tokens. *CoRR*, abs/2606.14048, 2026b.
- Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 2024.
- Guanxing Lu, Shiyi Zhang, Ziwei Wang, Changliu Liu, Jiwen Lu, and Yansong Tang. Manigaussian: Dynamic gaussian splatting for multi-task robotic manipulation. In *European Conference on Computer Vision*, pp. 349–366. Springer, 2024.
- Guanxing Lu, Baoxiong Jia, Puhao Li, Yixin Chen, Ziwei Wang, Yansong Tang, and Siyuan Huang. GWM: Towards scalable gaussian world models for robotic manipulation. In *ICCV*, pp. 9263–9274, 2025. URL https://openaccess.thecvf.com/content/ICCV2025/html/Lu_GWM_Towards_Scalable_Gaussian_World_Models_for_Robotic_Manipulation_ICCV_2025_paper.html.
- F. Ma, D. Peng, W. Yue, J. Cao, B. Wang, Q. Zhang, and J. Ma. GeoSem-WAM: Geometry- and semantic-aware world action models. *CoRR*, abs/2606.03188, 2026.

- Maxime Oquab, Timothee Darcet, Theo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. DINOv2: Learning robust visual features without supervision. *CoRR*, abs/2304.07193, 2023.
- Karl Pertsch, Kyle Stachowicz, Brian Ichter, Danny Driess, Suraj Nair, Quan Vuong, Oier Mees, Chelsea Finn, and Sergey Levine. FAST: Efficient action tokenization for vision-language-action models. *CoRR*, abs/2501.09747, 2025. URL <https://arxiv.org/abs/2501.09747>.
- Minghan Qin, Wanhua Li, Jiawei Zhou, Haoqian Wang, and Hanspeter Pfister. LangSplat: 3d language gaussian splatting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, 2021.
- Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. Vggt: Visual geometry grounded transformer. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 5294–5306, 2025.
- Mingxin Wang, Bin Hu, Bin Qian, Kaitao Jiang, Haoning Wu, Feng Yan, Bowen Jing, Ruiyang Hao, Enyi Wang, Kangning Niu, Yandan Yang, Mu Xu, Yan Wang, Houde Liu, and Tianlun Li. St-wam: Semantic-temporal world action model for robust manipulation under visual distribution shifts. *arXiv preprint arXiv:2607.28993*, 2026. URL <https://arxiv.org/abs/2607.28993>.
- H. Yan, Z. Zhong, J. Zhu, J. He, W. Yuan, W. Song, X. Gong, Y. Cai, G. Zhao, X. Yan, B. Liu, Y.-C. Chen, and H. Li. S-VAM: Shortcut video-action model by self-distilling geometric and semantic foresight. *CoRR*, abs/2603.16195, 2026.
- L. Yang, W. Song, X. Wang, P. Sheng, Z. Fang, Z. Zhou, J. He, H. Yan, J. Chen, N. Sun, et al. 4D-WAM: Infusing spatiotemporal awareness into world action models through trajectory fields. *CoRR*, abs/2608.08023, 2026.
- A. Ye, B. Wang, C. Ni, G. Huang, G. Zhao, H. Li, et al. GigaWorld-Policy: An efficient action-centered world-action model. *CoRR*, abs/2603.17240, 2026a.
- Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Yuke Zhu, Linxi Fan, and Joel Jang. World Action Models are Zero-shot Policies. *CoRR*, abs/2602.15922, 2026b. URL <https://arxiv.org/abs/2602.15922>.
- S. Yuan, W. Zhao, X. Shi, H. Jiang, X. Guo, L. Liu, W. Liu, W. Sui, and X. Wang. DreamWAM: Beyond rgb future prediction for world action models. *CoRR*, abs/2608.04996, 2026a.
- T. Yuan, Z. Dong, Y. Liu, and H. Zhao. Fast-WAM: Do world action models need test-time future imagination? *CoRR*, abs/2603.16666, 2026b.
- J. Zhang, J. Zhu, T. Su, C. Ma, Z. Huang, Y. Xu, and H. Wang. Learning 4d geometric priors for inference-efficient world action models. *CoRR*, abs/2607.05468, 2026.
- R. Zhao, Z. Zhang, Y. Su, W. Wang, J. Li, Z. Yang, F. E. H. Tay, M. H. Ang, and H. Zhu. SG-WAM: Self-guided world modeling in geometry-aware policy space. *CoRR*, abs/2608.01397, 2026.
- Z. Zheng, Z. Chen, Y. Chen, and Y. Wu. X-VLA: An embodied generalist agent with cross-embodiment vision-language-action alignment. *CoRR*, abs/2502.11821, 2025.
- Shijie Zhou, Hansheng Chang, Sen Jiang, Zhiwen Fan, Zehao Zhu, Dejia Xu, Pradyumna Chari, Suyu You, Zhangyang Wang, and Achuta Kadambi. Feature 3dgs: Supercharging 3d gaussian splatting to enable distilled feature fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- Shijie Zhou, Hui Ren, Yijia Weng, Shuwang Zhang, Zhen Wang, Dejia Xu, Zhiwen Fan, Suyu You, Zhangyang Wang, Leonidas Guibas, and Achuta Kadambi. Feature4x: Bridging any monocular video to 4d agentic ai with versatile gaussian feature fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14179–14190, 2025.